



FCC Part 15C Test Report

FCC ID: XHWEGQ178

| | |
|------------------|---|
| Product Name: | 7.9 inch tablet |
| Trademark: | E-matic |
| Model Name : | EGQ178 EGQ178BL, EGQ178BU, EGQ178PR, EGQ178PN, EGQ178RD |
| Prepared For : | E-matic |
| Address : | 3435 Ocean Park Blvd # 107 PMB#444 Santa Monica CA 90405 Los Angeles, CA 90405. |
| Prepared By : | Shenzhen BCTC Technology Co., Ltd. |
| Address : | No.101,Yousong Road,Longhua New District, Shenzhen,China |
| Test Date: | Feb. 03 - Feb. 16, 2015 |
| Date of Report : | Feb. 20, 2015 |
| Report No.: | BCTC-150100527 |



VERIFICATION OF COMPLIANCE

Applicant's name : E-matic
Address : 3435 Ocean Park Blvd # 107 PMB#444 Santa Monica CA 90405
Los Angeles, CA 90405.
Manufacture's Name..... : Shaghal Ltd
Address : 2231 Colby Ave. L.A., C.A., 90064 U.S.A

Product description

Product name : 7.9 inch tablet
Trademark: E-matic
Model Name: EGQ178
Test procedure FCC Part15.247
Standards ANSI C63.4-2003

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Date of Test :
Date (s) of performance of tests : Feb. 03 - Feb. 16, 2015
Date of Issue..... : Feb. 16, 2015
Test Result..... : **Pass**

Testing Engineer : Eric Yang
(Eric Yang)

Technical Manager : Sophie Lu
(Sophia Lee)

Authorized Signatory : Carson Zhang
(Carson. Zhang)



**Table of Contents**

| | Page |
|---|-------------|
| 1 . SUMMARY OF TEST RESULTS | 5 |
| 1.1 TEST FACILITY | 6 |
| 1.2 MEASUREMENT UNCERTAINTY | 6 |
| 2 . GENERAL INFORMATION | 7 |
| 2.1 GENERAL DESCRIPTION OF EUT | 7 |
| 2.2 DESCRIPTION OF TEST MODES | 9 |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10 |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) | 11 |
| 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS | 12 |
| 3 . EMC EMISSION TEST | 13 |
| 3.1 CONDUCTED EMISSION MEASUREMENT | 13 |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS | 13 |
| 3.1.2 TEST PROCEDURE | 14 |
| 3.1.3 DEVIATION FROM TEST STANDARD | 14 |
| 3.1.4 TEST SETUP | 14 |
| 3.1.5 EUT OPERATING CONDITIONS | 14 |
| 3.1.6 TEST RESULTS | 15 |
| 3.2 RADIATED EMISSION MEASUREMENT | 17 |
| 3.2.1 RADIATED EMISSION LIMITS | 17 |
| 3.2.2 TEST PROCEDURE | 18 |
| 3.2.3 DEVIATION FROM TEST STANDARD | 18 |
| 3.2.4 TEST SETUP | 19 |
| 3.2.5 EUT OPERATING CONDITIONS | 20 |
| 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ) | 21 |
| 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ) | 22 |
| 3.2.8 TEST RESULTS (ABOVE 1000 MHZ) | 24 |
| 4 . POWER SPECTRAL DENSITY TEST | 46 |
| 4.1 APPLIED PROCEDURES / LIMIT | 46 |
| 4.1.1 TEST PROCEDURE | 46 |
| 4.1.2 DEVIATION FROM STANDARD | 46 |
| 4.1.3 TEST SETUP | 46 |

**Table of Contents**

| | Page |
|---|-------------|
| 4.1.4 EUT OPERATION CONDITIONS | 46 |
| 4.1.5 TEST RESULTS | 47 |
| 5 . BANDWIDTH TEST | 56 |
| 5.1 APPLIED PROCEDURES / LIMIT | 56 |
| 5.1.1 TEST PROCEDURE | 56 |
| 5.1.2 DEVIATION FROM STANDARD | 56 |
| 5.1.3 TEST SETUP | 56 |
| 5.1.4 EUT OPERATION CONDITIONS | 56 |
| 5.1.5 TEST RESULTS | 57 |
| 6 . PEAK OUTPUT POWER TEST | 63 |
| 6.1 APPLIED PROCEDURES / LIMIT | 63 |
| 6.1.1 TEST PROCEDURE | 63 |
| 6.1.2 DEVIATION FROM STANDARD | 63 |
| 6.1.3 TEST SETUP | 63 |
| 6.1.4 EUT OPERATION CONDITIONS | 63 |
| 6.1.5 TEST RESULTS | 64 |
| 7 . ANTENNA REQUIREMENT | 65 |
| 7.1 STANDARD REQUIREMENT | 65 |
| 7.2 EUT ANTENNA | 65 |
| 8 . EUT TEST PHOTO | 66 |
| APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS | |



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C | | | |
|--|----------------------------|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.207 | Conducted Emission | PASS | |
| 15.247 (a)(2) | 6dB Bandwidth | PASS | |
| 15.247 (b) | Peak Output Power | PASS | |
| 15.247 (c) | Radiated Spurious Emission | PASS | |
| 15.247 (d) | Power Spectral Density | PASS | |
| 15.205 | Band Edge Emission | PASS | |
| 15.203 | Antenna Requirement | PASS | |

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registration No.:187086

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | Uncertainty |
|-----|------------------------------|---------------------------|
| 1 | Conducted Emission Test | $\pm 1.38\text{dB}$ |
| 2 | RF power,conducted | $\pm 0.16\text{dB}$ |
| 3 | Spurious emissions,conducted | $\pm 0.21\text{dB}$ |
| 4 | All emissions,radiated(<1G) | $\pm 4.68\text{dB}$ |
| 5 | All emissions,radiated(>1G) | $\pm 4.89\text{dB}$ |
| 6 | Temperature | $\pm 0.5^{\circ}\text{C}$ |
| 7 | Humidity | $\pm 2\%$ |



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

| | | |
|------------------------|--|---|
| Equipment | 7.9 inch tablet | |
| Trademark | E-matic | |
| Model Name | EGQ178 | |
| Serial Model | EGQ178BL, EGQ178BU, EGQ178PR, EGQ178PN, EGQ178RD | |
| Model Difference | All the same, Only model name is different | |
| Product Description | The EUT is a 7.9 inch tablet | |
| | Operation Frequency: | 2412~2462 MHz |
| | Modulation Type: | CCK/OFDM/DBPSK/DAPSK |
| | Bit Rate of Transmitter | 802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n:72.2/52/6.5 Mbps |
| | Number Of Channel | 11 CH, Please see Note 2. |
| | Antenna Designation: | Please see Note 3. |
| | Output Power(Conducted): | 802.11b: 8.87 dBm (Max.) 802.11g: 6.51 dBm (Max.) 802.11n: 5.52 dBm (Max.) |
| | Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. | |
| Channel List | Please refer to the Note 2. | |
| Adapter | Model:PGAE0500200U1UL AC Power Input: 100-240V~, 50/60Hz, 0.3A Output: 5.0V $\overline{\text{---}}$, 2.0A | |
| Battery | DC3.7V | |
| Connecting I/O Port(s) | Please refer to the User's Manual | |

Note
:



1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

| Channel List for 802.11b/g/n | | | | | | | |
|------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01 | 2412 | 04 | 2427 | 07 | 2442 | 10 | 2457 |
| 02 | 2417 | 05 | 2432 | 08 | 2447 | 11 | 2462 |
| 03 | 2422 | 06 | 2437 | 09 | 2452 | | |

3.

Table for Filed Antenna

| Ant | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | NOTE |
|-----|-------|------------|--------------|-----------|------------|--------------|
| A | N/A | N/A | FPCB antenna | N/A | 1.0 | Wifi Antenna |



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description |
|--------------|------------------------|
| Mode 1 | 802.11b CH1/ CH6/ CH11 |
| Mode 2 | 802.11g CH1/ CH6/ CH11 |
| Mode 3 | 802.11n CH1/ CH6/ CH11 |
| Mode 4 | WIFI Link Mode |

| For Conducted Emission | |
|------------------------|----------------|
| Final Test Mode | Description |
| Mode 4 | WIFI Link Mode |

| For Radiated Emission | |
|-----------------------|------------------------|
| Final Test Mode | Description |
| Mode 1 | 802.11b CH1/ CH6/ CH11 |
| Mode 2 | 802.11g CH1/ CH6/ CH11 |
| Mode 3 | 802.11n CH1/ CH6/ CH11 |


Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

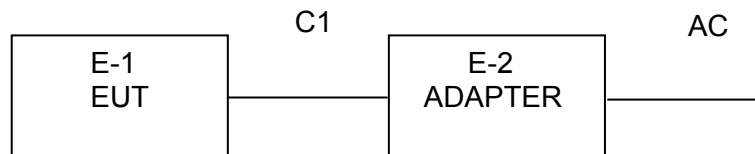

Radiated Spurious Emission Test



**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------------|-----------|-----------------|------------|------|
| E-1 | 7.9 inch tablet | N/A | EGQ178 | N/A | EUT |
| E-2 | Adapter | N/A | PGAE0500200U1UL | N/A | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| C-1 | NO | NO | 0.9M | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|--------------------|--------------|------------|-------------------|------------------|------------------|--------------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY4510957 2 | 2014.08.25 | 2015.08.24 | 1 year |
| 2 | Test Receiver | R&S | ESPI | 101396 | 2014.08.25 | 2015.08.24 | 1 year |
| 3 | Bilog Antenna | SCHWARZBECK | VULB9160 | VULB9160- 3369 | 2014.08.25 | 2015.08.24 | 1 year |
| 4 | 50Ω Coaxial Switch | Anritsu | MP59B | 620026441 6 | 2014.06.07 | 2015.06.06 | 1 year |
| 5 | Spectrum Analyzer | ADVANTEST | R3132 | 150900201 | 2014.06.07 | 2015.06.06 | 1 year |
| 6 | Horn Antenna | SCHWARZBECK | 9120D | 9120D-1275 | 2014.08.25 | 2015.08.24 | 1 year |
| 7 | Horn Ant | Schwarzbeck | BBHA 9170 | 9170-181 | 2014.07.06 | 2015.07.05 | 1 year |
| 8 | Amplifier | SCHWARZBECK | BBV9718 | 9718-270 | 2014.08.25 | 2015.08.24 | 1 year |
| 9 | Amplifier | SCHWARZBECK | BBV9743 | 9743-119 | 2014.08.25 | 2015.08.24 | 1 year |
| 10 | Loop Antenna | ARA | PLA-1030/B | 1029 | 2014.06.08 | 2015.06.07 | 1 year |
| 11 | Power Meter | R&S | NRVS | 100696 | 2014.07.06 | 2015.07.05 | 1 year |
| 12 | Power Sensor | R&S | URV5-Z4 | 0395.1619. 05 | 2014.07.06 | 2015.07.05 | 1 year |
| 13 | RF cables | R&S | N/A | N/A | 2014.07.06 | 2015.07.05 | 1 year |

Conduction Test equipment

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|-----------------------|--------------|----------|----------------|------------------|------------------|--------------------|
| 1 | Test Receiver | R&S | ESCI | 101421 | 2014.08.25 | 2015.08.24 | 1 year |
| 2 | LISN | SCHWARZBECK | NSLK8127 | 812779 | 2014.08.25 | 2015.08.24 | 1 year |
| 3 | LISN | EMCO | Feb-16 | 42990 | 2014.08.24 | 2015.08.23 | 1 year |
| 4 | 50Ω Coaxial Switch | Anritsu | MP59B | 620026441 7 | 2014.06.07 | 2015.06.06 | 1 year |
| 5 | Passive Voltage Probe | R&S | ESH2-Z3 | 100196 | 2014.06.07 | 2015.06.06 | 1 year |



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Class A (dBuV) | | Class B (dBuV) | | Standard |
|-----------------|----------------|---------|----------------|-----------|----------|
| | Quasi-peak | Average | Quasi-peak | Average | |
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * | CISPR |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00 | 46.00 | CISPR |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00 | 50.00 | CISPR |

| | | | | | |
|-----------|-------|-------|-----------|-----------|-----|
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00 | 46.00 | FCC |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00 | 50.00 | FCC |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

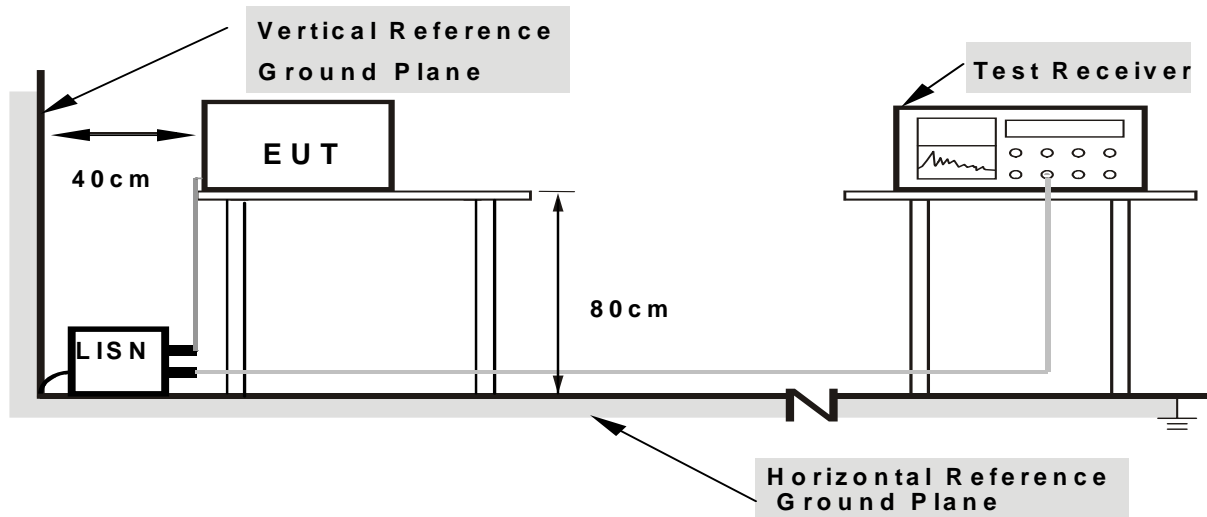

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

| | | | |
|----------------|-----------------|---------------------|--------|
| EUT : | 7.9 inch tablet | Model Name. : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010hPa | Phase : | L |
| Test Voltage : | AC 120V/60Hz | Test Mode : | Mode 4 |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

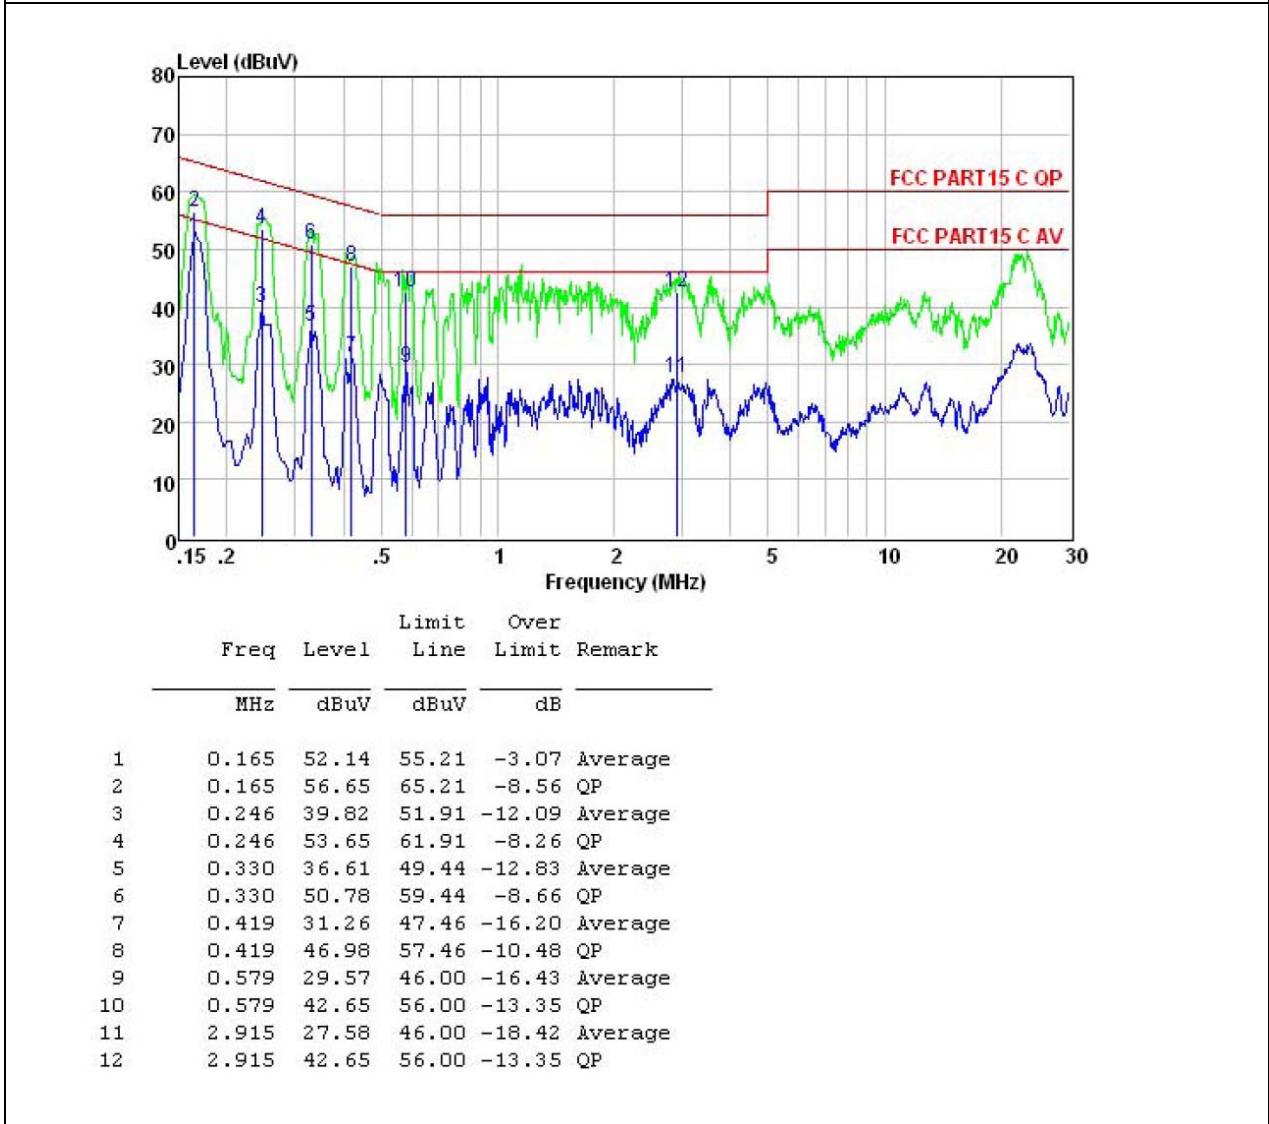




| | | | |
|----------------|-----------------|---------------------|--------|
| EUT : | 7.9 inch tablet | Model Name. : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010hPa | Phase : | N |
| Test Voltage : | AC 120V/60Hz | Test Mode : | Mode 4 |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

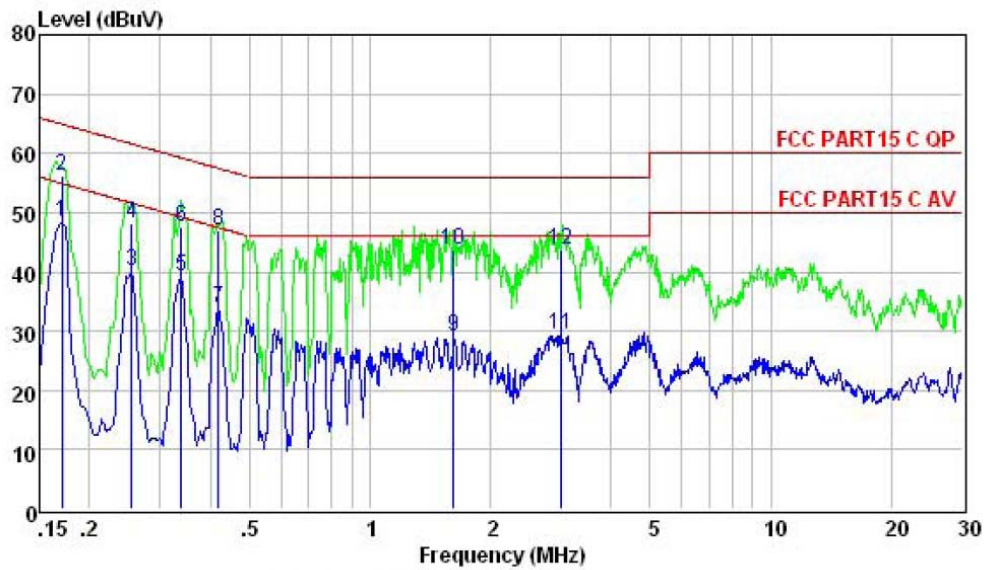

| | Freq | Level | Limit | Over | Remark |
|----|-------|-------|-------|--------|---------|
| | MHz | dBuV | dBuV | dB | |
| 1 | 0.170 | 48.37 | 54.94 | -6.57 | Average |
| 2 | 0.170 | 56.17 | 64.94 | -8.77 | QP |
| 3 | 0.255 | 40.10 | 51.60 | -11.50 | Average |
| 4 | 0.255 | 48.17 | 61.60 | -13.43 | QP |
| 5 | 0.339 | 39.18 | 49.22 | -10.04 | Average |
| 6 | 0.339 | 47.65 | 59.22 | -11.57 | QP |
| 7 | 0.419 | 34.03 | 47.46 | -13.43 | Average |
| 8 | 0.419 | 46.87 | 57.46 | -10.59 | QP |
| 9 | 1.619 | 29.23 | 46.00 | -16.77 | Average |
| 10 | 1.619 | 43.65 | 56.00 | -12.35 | QP |
| 11 | 2.993 | 29.46 | 46.00 | -16.54 | Average |
| 12 | 2.993 | 43.68 | 56.00 | -12.32 | QP |



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

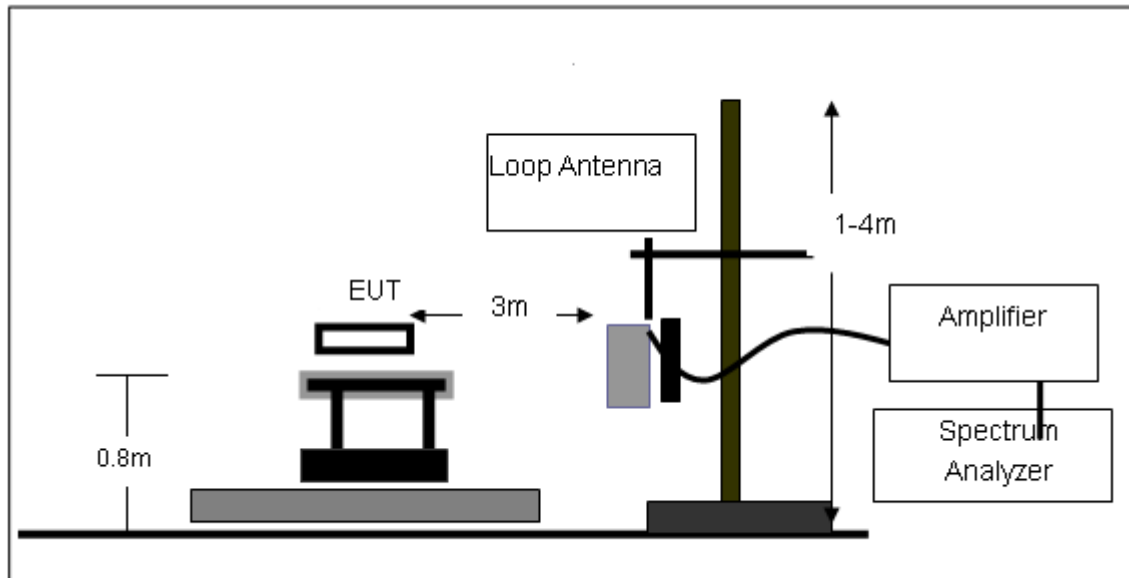

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

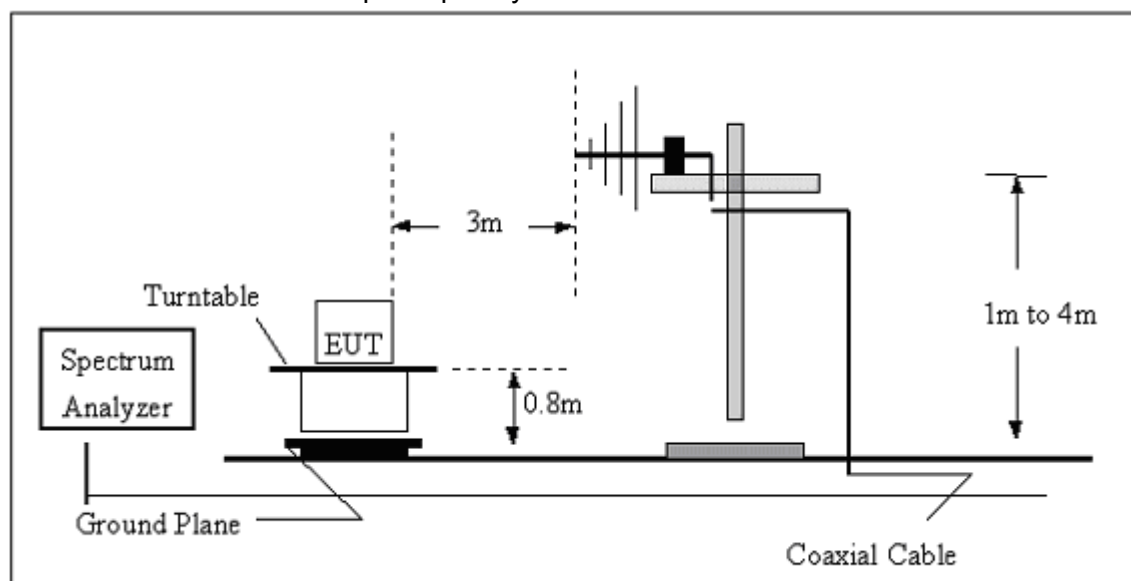

(C) Radiated Emission Test-Up Frequency Above 1GHz

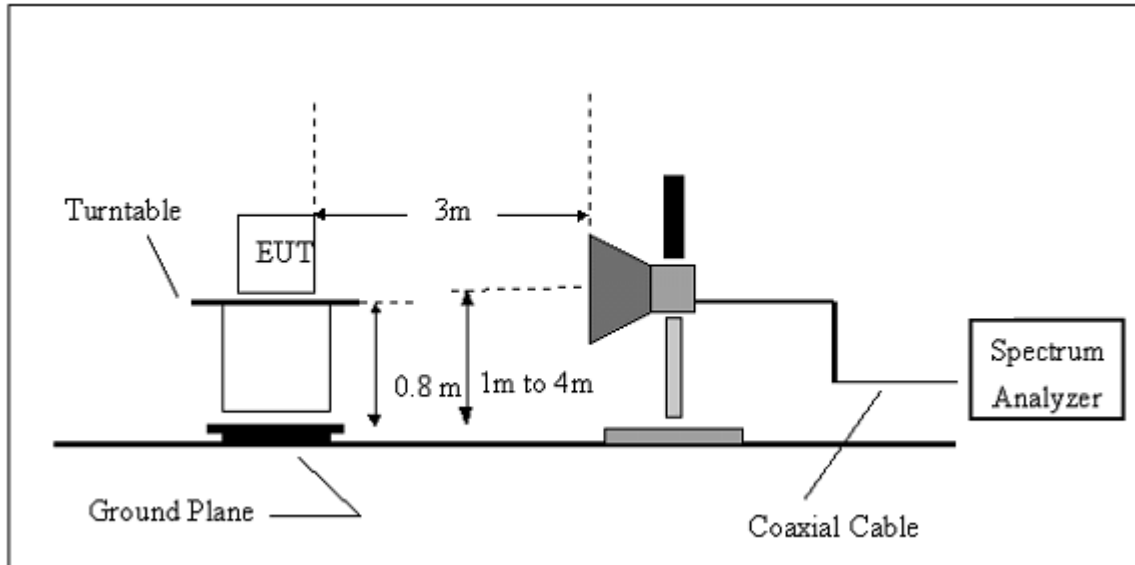**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

| | | | |
|--------------|-----------------|--------------------|---------|
| EUT: | 7.9 inch tablet | Model Name. : | EGQ178 |
| Temperature: | 26 °C | Relative Humidity: | 54% |
| Pressure: | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX | Polarization : | -- |

| Freq. (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | State P/F |
|----------------|---------------------|-------------------|----------------|--------------|
| -- | -- | -- | -- | PASS |
| -- | -- | -- | -- | PASS |

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);


Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

| | | | |
|---------------|-----------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX | Polarization : | Horizontal |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

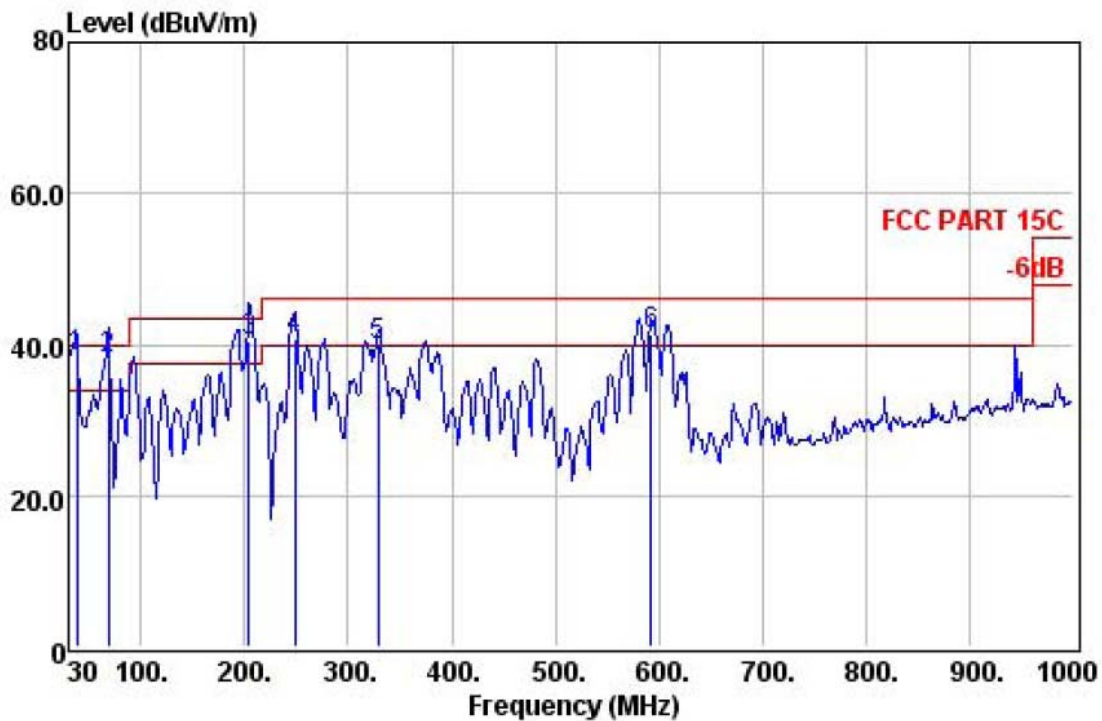


| | Preamp | Read | Cable&antenna | | Limit | Over | | | |
|-----|--------|--------|---------------|------|--------|--------|--------|-------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 ! | 37.76 | 31.36 | 55.07 | 0.56 | 14.22 | 38.49 | 40.00 | -1.51 | QP |
| 2 ! | 68.80 | 31.32 | 61.18 | 0.85 | 7.48 | 38.19 | 40.00 | -1.81 | QP |
| 3 ! | 204.60 | 31.09 | 58.97 | 1.46 | 11.22 | 40.56 | 43.50 | -2.94 | QP |
| 4 ! | 248.25 | 30.96 | 57.29 | 1.70 | 12.85 | 40.88 | 46.00 | -5.12 | QP |
| 5 | 328.76 | 30.79 | 53.98 | 2.02 | 14.65 | 39.86 | 46.00 | -6.14 | QP |
| 6 ! | 592.60 | 30.68 | 48.49 | 3.29 | 20.36 | 41.46 | 46.00 | -4.54 | QP |



| | | | |
|---------------|-----------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX | Polarization : | Vertical |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

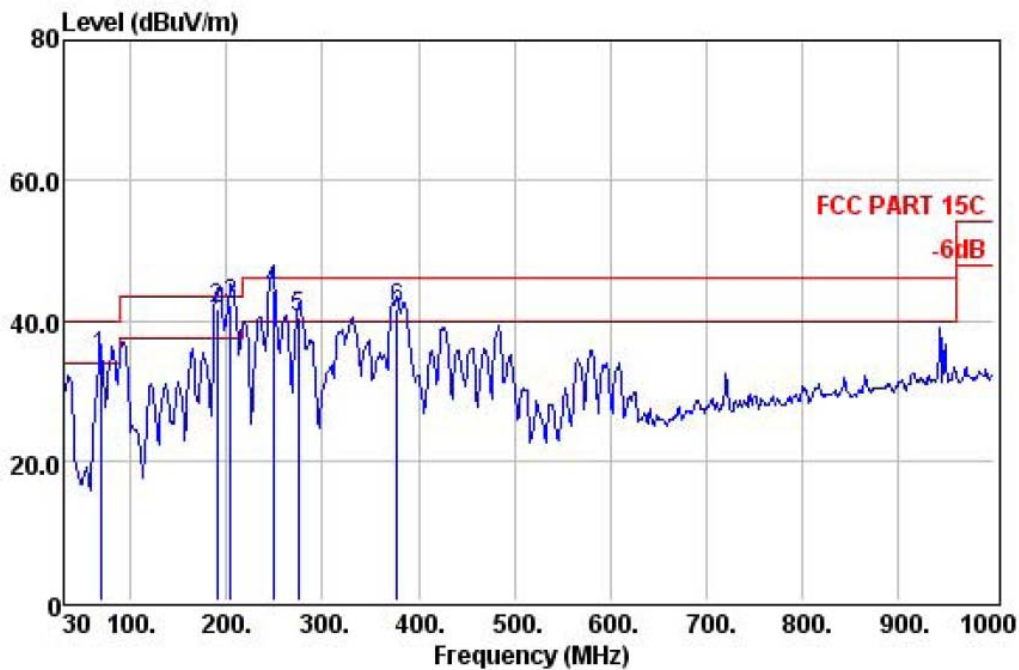


| | Preamp Freq | Preamp Factor | Read Level | Cable Loss | Antenna Factor | Limit Line | Over Limit | Remark |
|-----|-------------|---------------|------------|------------|----------------|------------|------------|----------|
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dB | |
| 1 ! | 68.80 | 31.32 | 57.67 | 0.85 | 7.48 | 34.68 | 40.00 | -5.32 QP |
| 2 ! | 190.05 | 31.12 | 61.33 | 1.39 | 10.10 | 41.70 | 43.50 | -1.80 QP |
| 3 ! | 204.60 | 31.09 | 60.69 | 1.46 | 11.22 | 42.28 | 43.50 | -1.22 QP |
| 4 ! | 248.25 | 30.96 | 60.74 | 1.70 | 12.85 | 44.33 | 46.00 | -1.67 QP |
| 5 ! | 274.44 | 30.95 | 56.64 | 1.78 | 13.00 | 40.47 | 46.00 | -5.53 QP |
| 6 ! | 378.23 | 30.62 | 53.71 | 2.27 | 16.20 | 41.56 | 46.00 | -4.44 QP |



3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

| | | | |
|---------------|--------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1 (802.11b Mode) | Polarization : | Horizontal |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

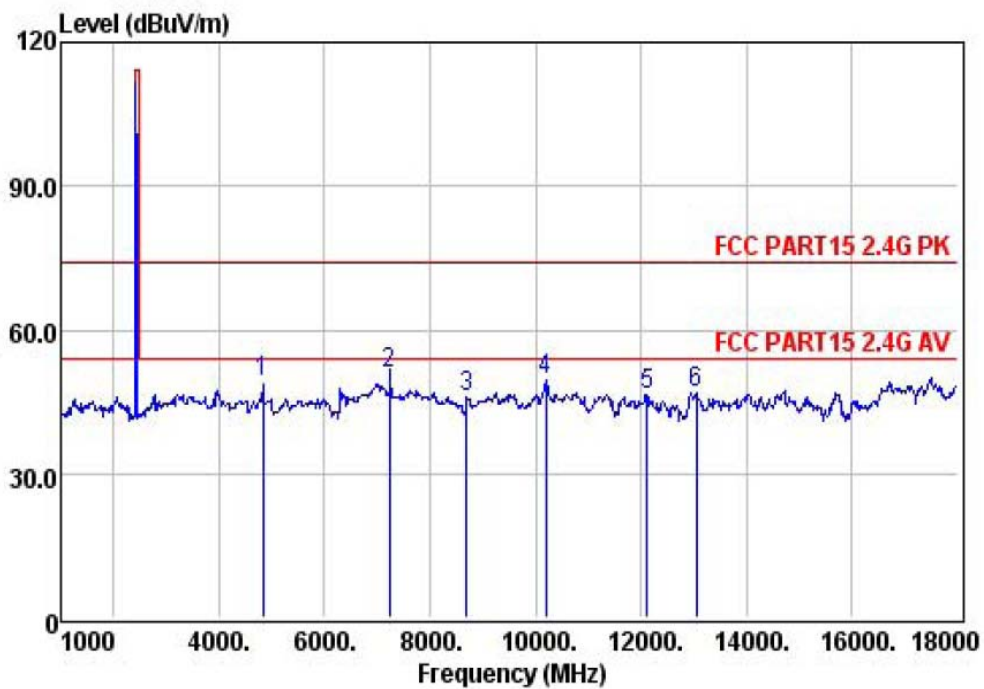


| | Preamp Freq | Preamp Factor | Read Level | Cable Loss | Antenna Factor | Level | Limit Line | Over Limit | Remark |
|---|-------------|---------------|------------|------------|----------------|--------|------------|------------|--------|
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4824.00 | 27.50 | 31.69 | 12.01 | 32.99 | 49.19 | 74.00 | -24.81 | Peak |
| 2 | 7236.00 | 27.95 | 24.71 | 16.61 | 37.30 | 50.67 | 74.00 | -23.33 | Peak |
| 3 | 8701.00 | 28.31 | 20.32 | 16.81 | 37.04 | 45.86 | 74.00 | -28.14 | Peak |
| 4 | 10197.00 | 28.82 | 22.52 | 17.00 | 38.72 | 49.42 | 74.00 | -24.58 | Peak |
| 5 | 12118.00 | 29.02 | 18.63 | 17.47 | 39.42 | 46.50 | 74.00 | -27.50 | Peak |
| 6 | 13053.00 | 29.21 | 16.72 | 18.28 | 40.94 | 46.73 | 74.00 | -27.27 | Peak |



| | | | |
|---------------|--------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1 (802.11b Mode) | Polarization : | Vertical |


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

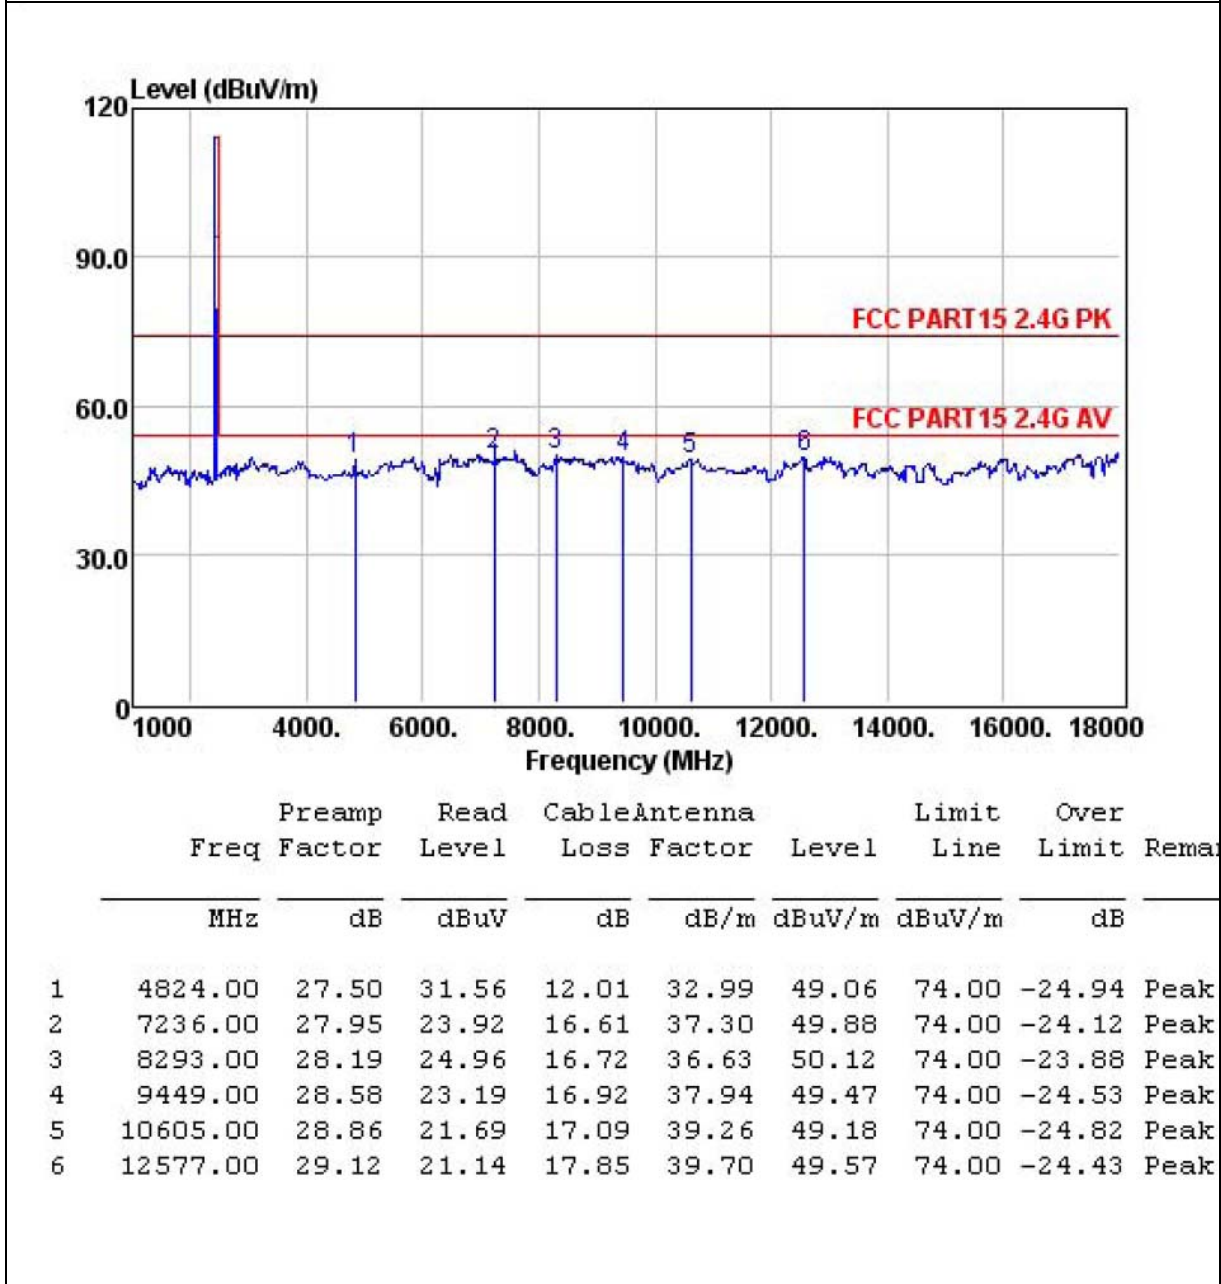



| | | | |
|---------------|--------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH6 (802.11b Mode) | Polarization : | Horizontal |

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

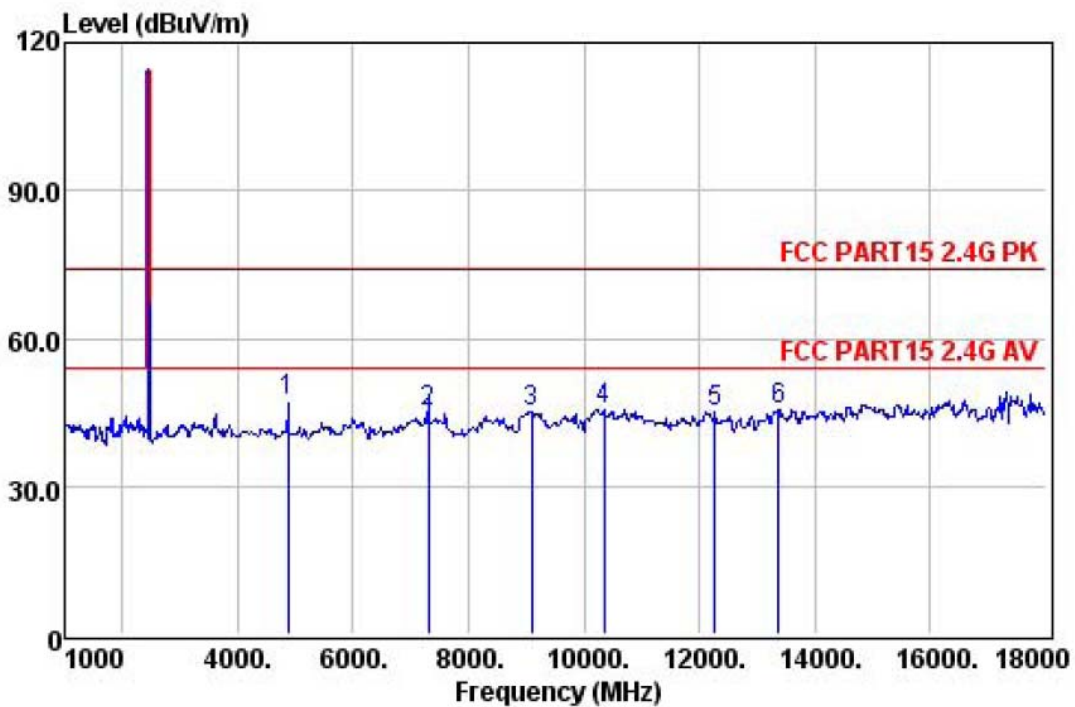


| | Preamp Freq | Preamp Factor | Read Level | Cable Loss | Antenna Factor | Level | Limit Line | Over Limit | Remark |
|---|-------------|---------------|------------|------------|----------------|--------|------------|------------|--------|
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4874.00 | 27.53 | 29.39 | 12.14 | 33.11 | 47.11 | 74.00 | -26.89 | Peak |
| 2 | 7311.00 | 27.96 | 19.29 | 16.62 | 37.32 | 45.27 | 74.00 | -28.73 | Peak |
| 3 | 9092.00 | 28.43 | 19.06 | 16.89 | 37.50 | 45.02 | 74.00 | -28.98 | Peak |
| 4 | 10350.00 | 28.84 | 18.40 | 17.04 | 38.96 | 45.56 | 74.00 | -28.44 | Peak |
| 5 | 12271.00 | 29.05 | 17.26 | 17.59 | 39.46 | 45.26 | 74.00 | -28.74 | Peak |
| 6 | 13376.00 | 29.27 | 13.48 | 18.65 | 42.44 | 45.30 | 74.00 | -28.70 | Peak |



| | | | |
|---------------|--------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH6 (802.11b Mode) | Polarization : | Vertical |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

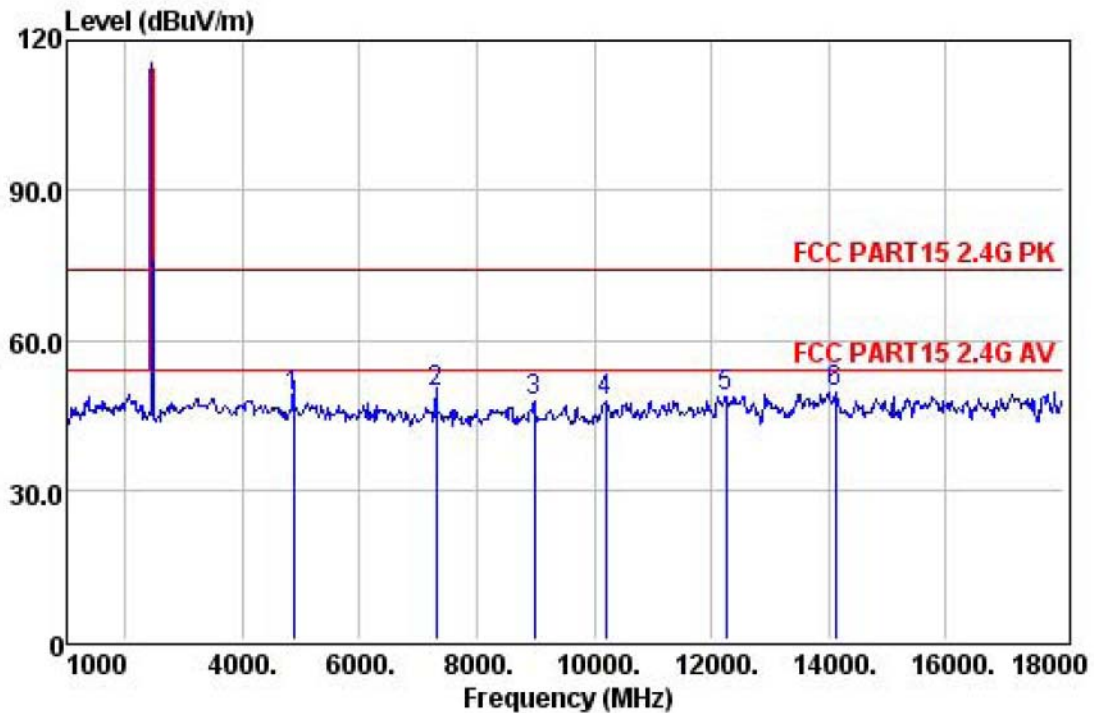


| | Preamp | Read | Cable | Antenna | Limit | Over | | | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4874.00 | 27.53 | 31.06 | 12.14 | 33.11 | 48.78 | 74.00 | -25.22 | Peak |
| 2 | 7311.00 | 27.96 | 23.69 | 16.62 | 37.32 | 49.67 | 74.00 | -24.33 | Peak |
| 3 | 8973.00 | 28.39 | 21.72 | 16.87 | 37.36 | 47.56 | 74.00 | -26.44 | Peak |
| 4 | 10197.00 | 28.82 | 20.73 | 17.00 | 38.72 | 47.63 | 74.00 | -26.37 | Peak |
| 5 | 12254.00 | 29.05 | 20.82 | 17.58 | 39.45 | 48.80 | 74.00 | -25.20 | Peak |
| 6 | 14107.00 | 29.42 | 16.44 | 19.43 | 42.90 | 49.35 | 74.00 | -24.65 | Peak |



| | | | |
|---------------|---------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH11 (802.11b Mode) | Polarization : | Horizontal |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- No emission detected above 18GHz

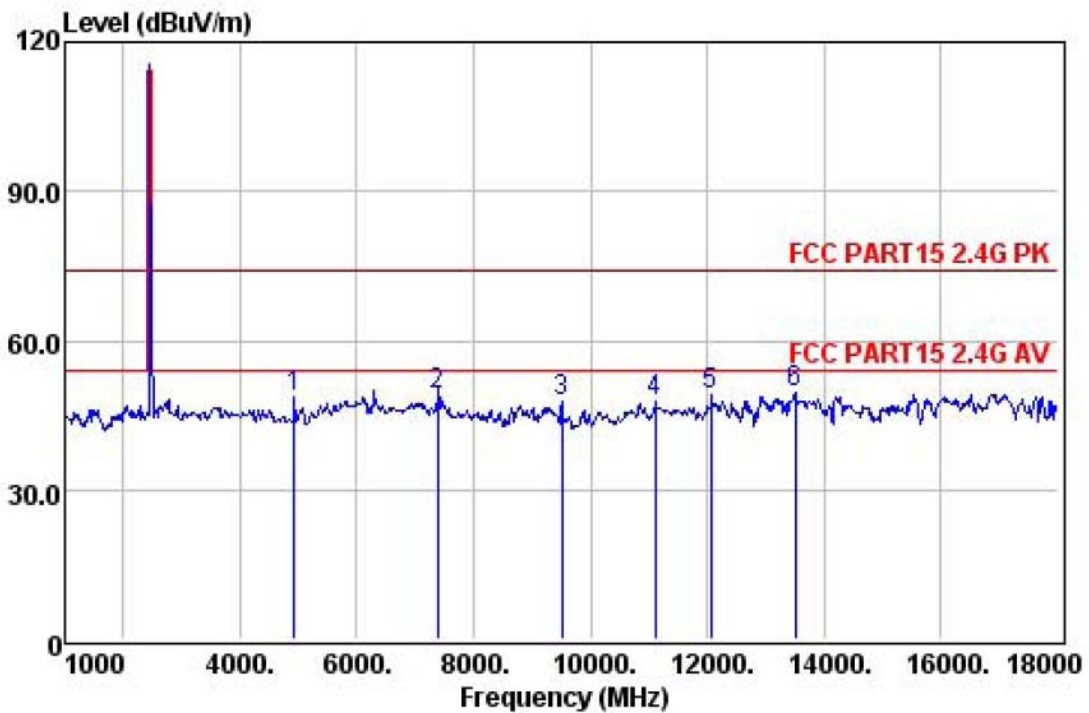


| | Preamp | Read | Cable | Antenna | | Limit | Over | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB |
| 1 | 4924.00 | 27.56 | 30.72 | 12.28 | 33.23 | 48.67 | 74.00 | -25.33 |
| 2 | 7386.00 | 27.98 | 23.11 | 16.62 | 37.36 | 49.11 | 74.00 | -24.89 |
| 3 | 9517.00 | 28.61 | 21.39 | 16.92 | 38.01 | 47.71 | 74.00 | -26.29 |
| 4 | 11115.00 | 28.91 | 19.79 | 17.19 | 39.59 | 47.66 | 74.00 | -26.34 |
| 5 | 12067.00 | 29.01 | 21.19 | 17.43 | 39.41 | 49.02 | 74.00 | -24.98 |
| 6 | 13495.00 | 29.30 | 16.88 | 18.77 | 43.00 | 49.35 | 74.00 | -24.65 |



| | | | |
|---------------|---------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH11 (802.11b Mode) | Polarization : | Vertical |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

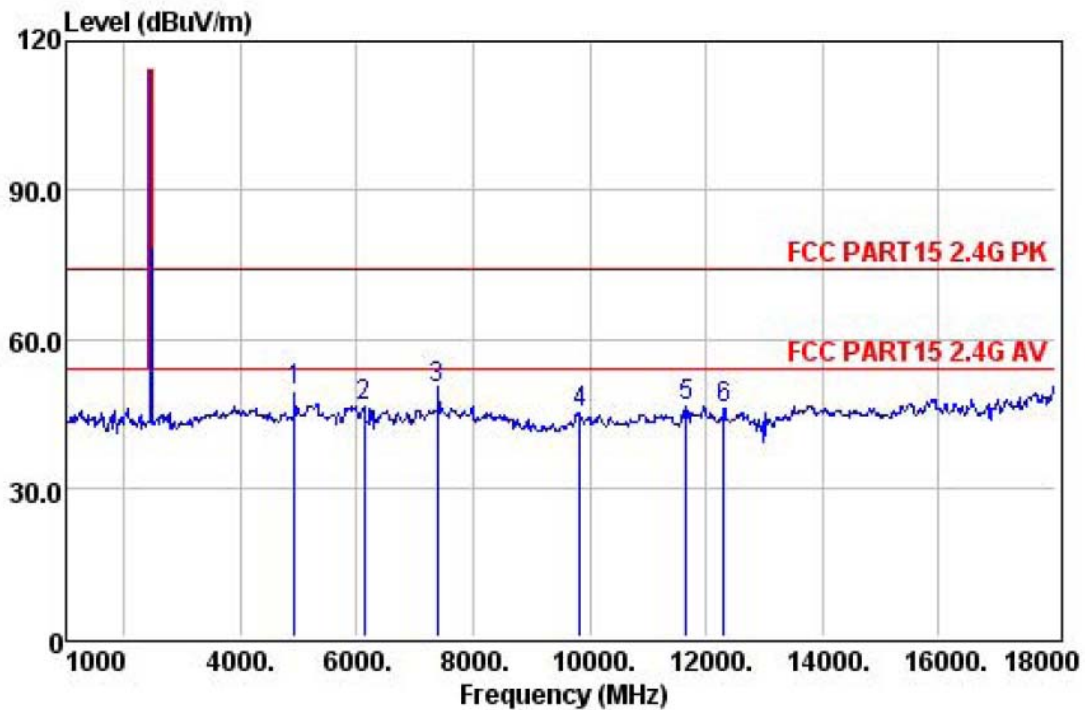


| | Preamp | Read | Cable | Antenna | Limit | Over | | | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4924.00 | 27.56 | 31.73 | 12.28 | 33.23 | 49.68 | 74.00 | -24.32 | Peak |
| 2 | 6117.00 | 27.72 | 22.25 | 16.60 | 35.36 | 46.49 | 74.00 | -27.51 | Peak |
| 3 | 7386.00 | 27.98 | 23.97 | 16.62 | 37.36 | 49.97 | 74.00 | -24.03 | Peak |
| 4 | 9840.00 | 28.74 | 18.56 | 16.95 | 38.28 | 45.05 | 74.00 | -28.95 | Peak |
| 5 | 11659.00 | 28.97 | 18.23 | 17.30 | 39.74 | 46.30 | 74.00 | -27.70 | Peak |
| 6 | 12305.00 | 29.06 | 18.07 | 17.62 | 39.46 | 46.09 | 74.00 | -27.91 | Peak |



| | | | |
|---------------|--------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1 (802.11g Mode) | Polarization : | Horizontal |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

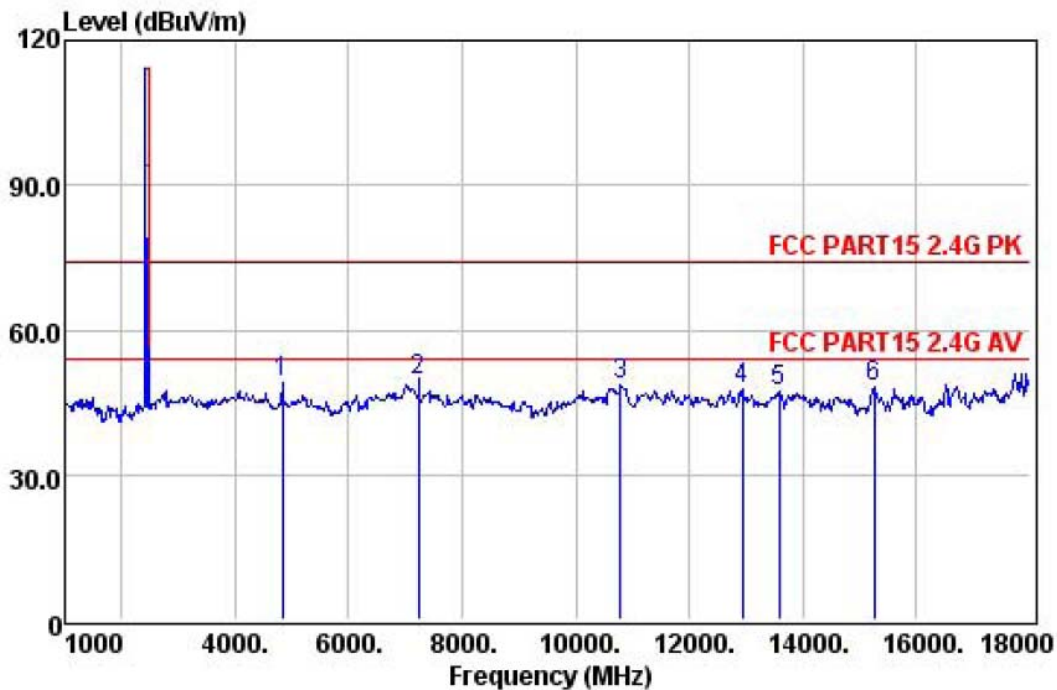


| | Preamp Freq | Preamp Factor | Read Level | Cable Loss | Antenna Factor | Level | Limit Line | Over Limit | Remark |
|---|-------------|---------------|------------|------------|----------------|--------|------------|------------|--------|
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4824.00 | 27.50 | 31.46 | 12.01 | 32.99 | 48.96 | 74.00 | -25.04 | Peak |
| 2 | 7236.00 | 27.95 | 23.71 | 16.61 | 37.30 | 49.67 | 74.00 | -24.33 | Peak |
| 3 | 10775.00 | 28.88 | 20.91 | 17.12 | 39.37 | 48.52 | 74.00 | -25.48 | Peak |
| 4 | 12934.00 | 29.19 | 18.07 | 18.15 | 40.54 | 47.57 | 74.00 | -26.43 | Peak |
| 5 | 13580.00 | 29.32 | 14.67 | 18.87 | 43.08 | 47.30 | 74.00 | -26.70 | Peak |
| 6 | 15246.00 | 29.59 | 18.99 | 20.16 | 38.45 | 48.01 | 74.00 | -25.99 | Peak |



| | | | |
|---------------|--------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1 (802.11g Mode) | Polarization : | Vertical |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

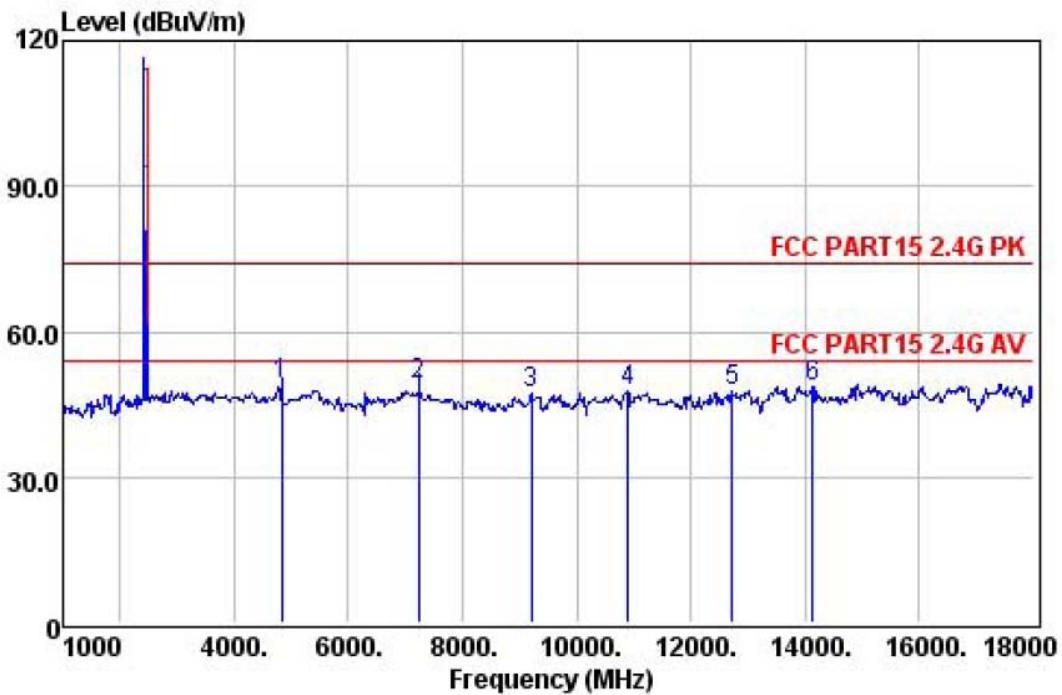


| | Preamp | Read | Cable | Antenna | | Limit | Over | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB |
| 1 | 4824.00 | 27.50 | 31.44 | 12.01 | 32.99 | 48.94 | 74.00 | -25.06 |
| 2 | 7236.00 | 27.95 | 23.15 | 16.61 | 37.30 | 49.11 | 74.00 | -24.89 |
| 3 | 9211.00 | 28.48 | 20.99 | 16.90 | 37.65 | 47.06 | 74.00 | -26.94 |
| 4 | 10894.00 | 28.89 | 19.82 | 17.15 | 39.44 | 47.52 | 74.00 | -26.48 |
| 5 | 12730.00 | 29.15 | 18.87 | 17.99 | 40.06 | 47.77 | 74.00 | -26.23 |
| 6 | 14124.00 | 29.42 | 15.88 | 19.44 | 42.80 | 48.70 | 74.00 | -25.30 |



| | | | |
|---------------|--------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH6 (802.11g Mode) | Polarization : | Horizontal |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

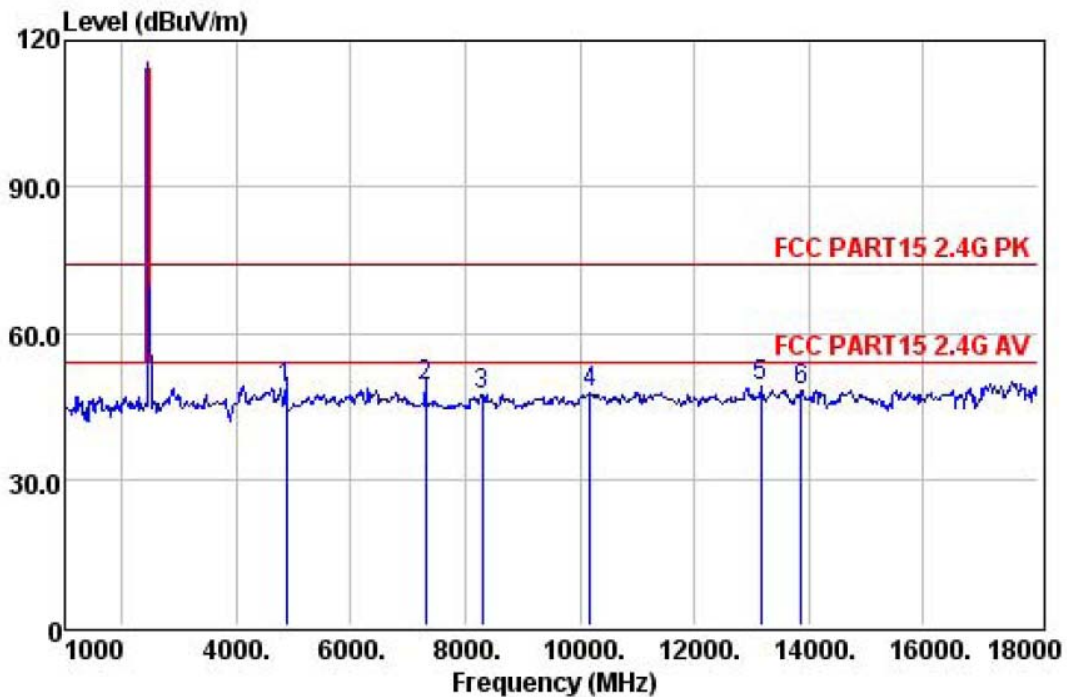


| | Preamp | Read | Cable | Antenna | Limit | Over | | | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4874.00 | 27.53 | 30.85 | 12.14 | 33.11 | 48.57 | 74.00 | -25.43 | Peak |
| 2 | 7311.00 | 27.96 | 23.10 | 16.62 | 37.32 | 49.08 | 74.00 | -24.92 | Peak |
| 3 | 8293.00 | 28.19 | 22.28 | 16.72 | 36.63 | 47.44 | 74.00 | -26.56 | Peak |
| 4 | 10180.00 | 28.82 | 20.99 | 17.00 | 38.69 | 47.86 | 74.00 | -26.14 | Peak |
| 5 | 13155.00 | 29.23 | 18.63 | 18.40 | 41.41 | 49.21 | 74.00 | -24.79 | Peak |
| 6 | 13869.00 | 29.37 | 15.19 | 19.20 | 43.37 | 48.39 | 74.00 | -25.61 | Peak |



| | | | |
|---------------|--------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH6 (802.11g Mode) | Polarization : | Vertical |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

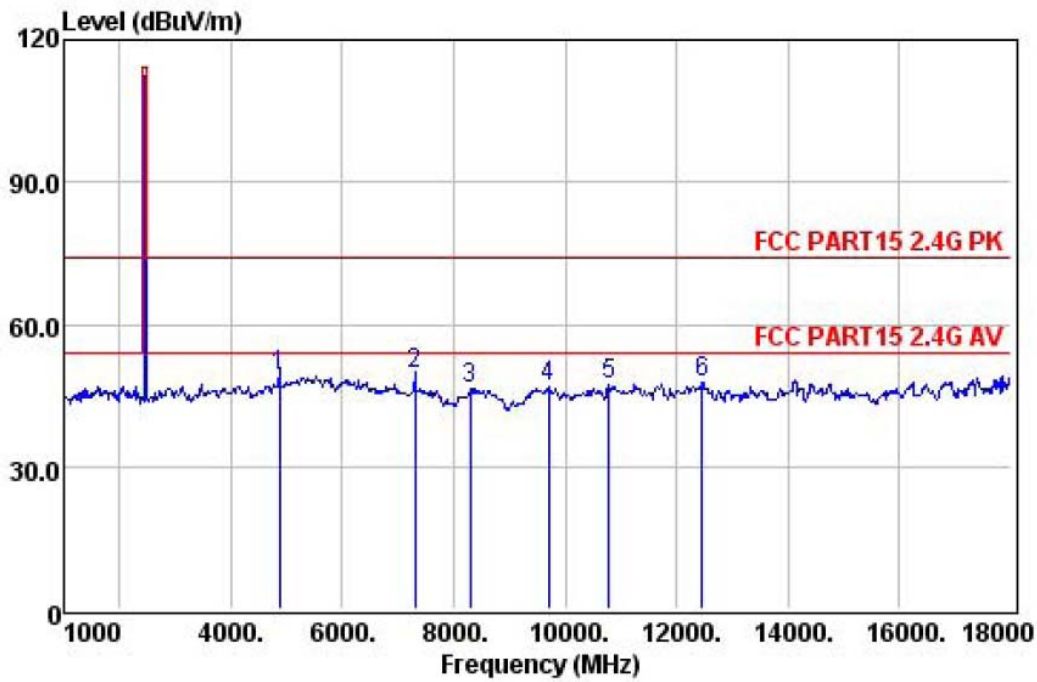


| | Preamp Freq | Preamp Factor | Read Level | Cable Loss | Antenna Factor | Level | Limit Line | Over Limit | Remark |
|---|-------------|---------------|------------|------------|----------------|--------|------------|------------|--------|
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4874.00 | 27.53 | 31.39 | 12.14 | 33.11 | 49.11 | 74.00 | -24.89 | Peak |
| 2 | 7311.00 | 27.96 | 23.69 | 16.62 | 37.32 | 49.67 | 74.00 | -24.33 | Peak |
| 3 | 8293.00 | 28.19 | 21.28 | 16.72 | 36.63 | 46.44 | 74.00 | -27.56 | Peak |
| 4 | 9704.00 | 28.68 | 20.32 | 16.94 | 38.17 | 46.75 | 74.00 | -27.25 | Peak |
| 5 | 10775.00 | 28.88 | 19.49 | 17.12 | 39.37 | 47.10 | 74.00 | -26.90 | Peak |
| 6 | 12458.00 | 29.09 | 19.73 | 17.76 | 39.49 | 47.89 | 74.00 | -26.11 | Peak |



| | | | |
|---------------|---------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH11 (802.11g Mode) | Polarization : | Horizontal |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

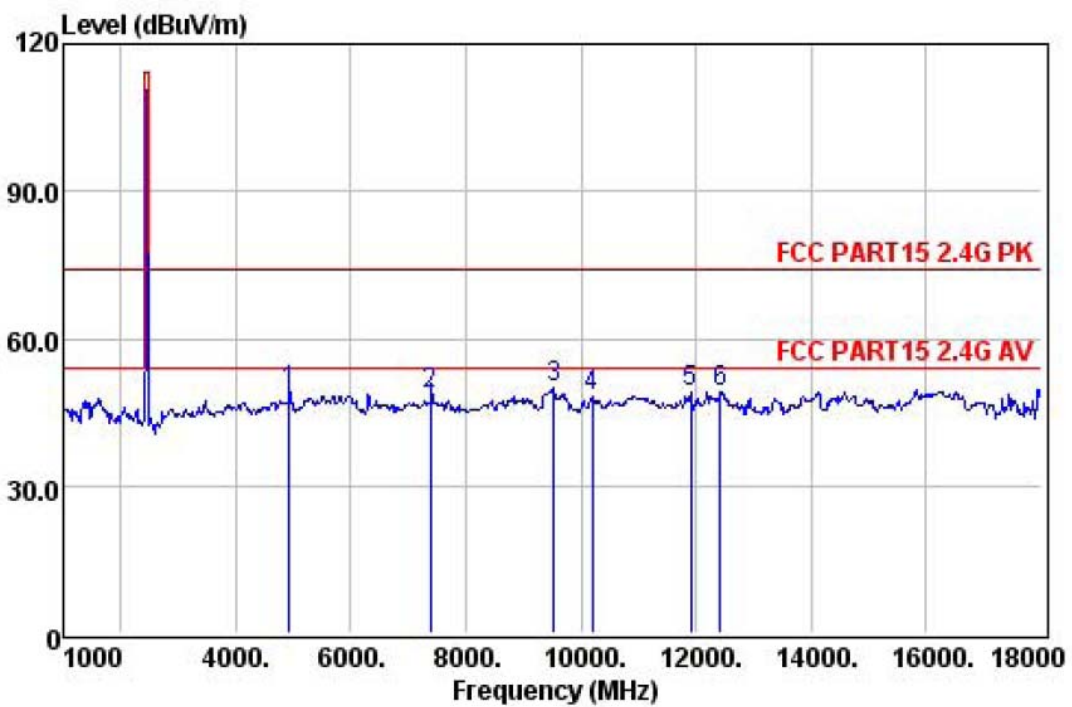


| | Preamp | Read | Cable | Antenna | Limit | Over | | | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4924.00 | 27.56 | 30.94 | 12.28 | 33.23 | 48.89 | 74.00 | -25.11 | Peak |
| 2 | 7386.00 | 27.98 | 22.68 | 16.62 | 37.36 | 48.68 | 74.00 | -25.32 | Peak |
| 3 | 9534.00 | 28.61 | 23.59 | 16.92 | 38.03 | 49.93 | 74.00 | -24.07 | Peak |
| 4 | 10197.00 | 28.82 | 21.37 | 17.00 | 38.72 | 48.27 | 74.00 | -25.73 | Peak |
| 5 | 11914.00 | 28.99 | 21.22 | 17.35 | 39.49 | 49.07 | 74.00 | -24.93 | Peak |
| 6 | 12424.00 | 29.08 | 20.83 | 17.73 | 39.49 | 48.97 | 74.00 | -25.03 | Peak |



| | | | |
|---------------|--------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH11(802.11g Mode) | Polarization : | Vertical |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

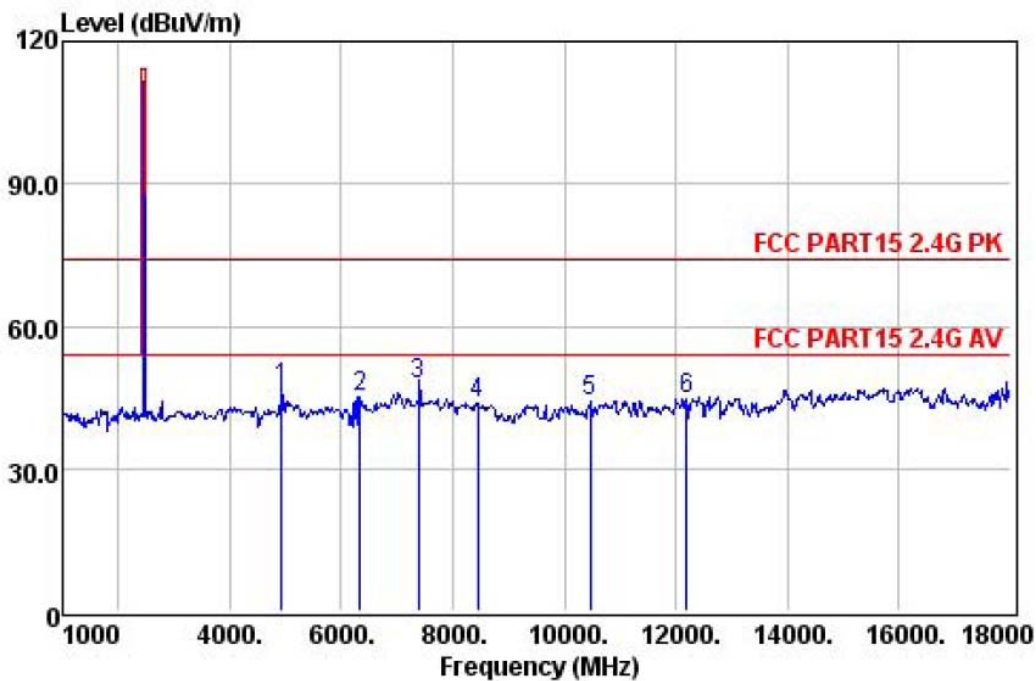


| | Preamp | Read | Cable | Antenna | Limit | Over | | | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4924.00 | 27.56 | 29.02 | 12.28 | 33.23 | 46.97 | 74.00 | -27.03 | Peak |
| 2 | 6338.00 | 27.77 | 20.69 | 16.60 | 35.67 | 45.19 | 74.00 | -28.81 | Peak |
| 3 | 7386.00 | 27.98 | 21.87 | 16.62 | 37.36 | 47.87 | 74.00 | -26.13 | Peak |
| 4 | 8446.00 | 28.23 | 18.61 | 16.76 | 36.76 | 43.90 | 74.00 | -30.10 | Peak |
| 5 | 10469.00 | 28.85 | 17.00 | 17.06 | 39.15 | 44.36 | 74.00 | -29.64 | Peak |
| 6 | 12186.00 | 29.04 | 16.78 | 17.53 | 39.44 | 44.71 | 74.00 | -29.29 | Peak |



| | | | |
|---------------|--------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1 (802.11n Mode) | Polarization : | Horizontal |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

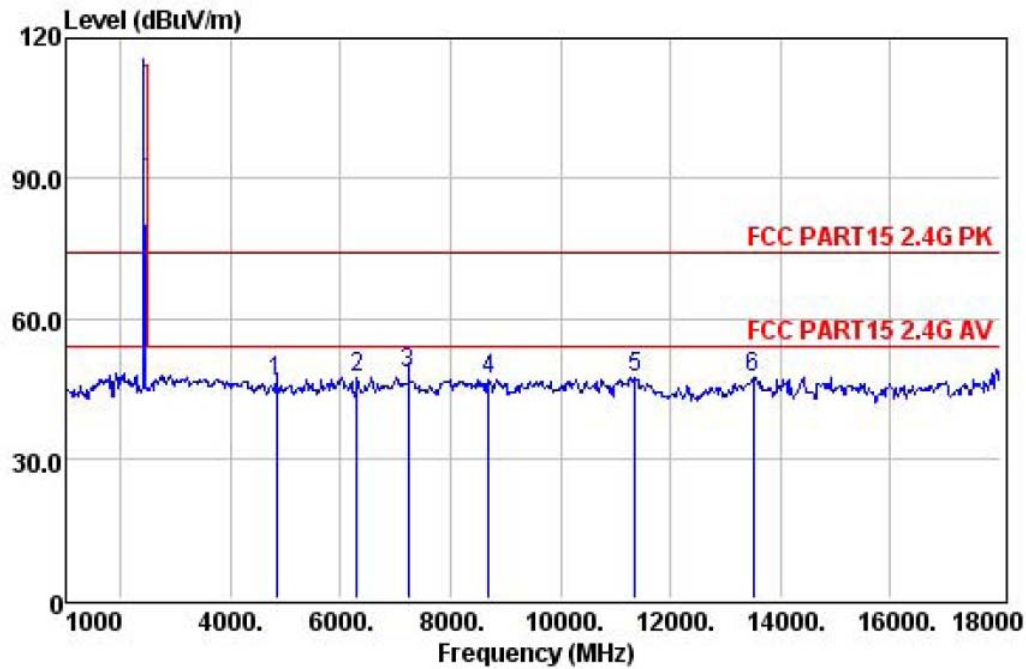


| | Preamp Freq | Preamp Factor | Read Level | Cable Loss | Antenna Factor | Level | Limit Line | Over Limit | Remark |
|---|----------------|------------------|---------------|---------------|-------------------|--------|---------------|---------------|--------|
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4824.00 | 27.50 | 28.81 | 12.01 | 32.99 | 46.31 | 74.00 | -27.69 | Peak |
| 2 | 6287.00 | 27.76 | 22.90 | 16.60 | 35.60 | 47.34 | 74.00 | -26.66 | Peak |
| 3 | 7236.00 | 27.95 | 22.35 | 16.61 | 37.30 | 48.31 | 74.00 | -25.69 | Peak |
| 4 | 8684.00 | 28.30 | 21.34 | 16.81 | 37.02 | 46.87 | 74.00 | -27.13 | Peak |
| 5 | 11353.00 | 28.94 | 19.08 | 17.24 | 39.78 | 47.16 | 74.00 | -26.84 | Peak |
| 6 | 13512.00 | 29.30 | 14.98 | 18.79 | 43.02 | 47.49 | 74.00 | -26.51 | Peak |



| | | | |
|---------------|--------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1 (802.11n Mode) | Polarization : | Vertical |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

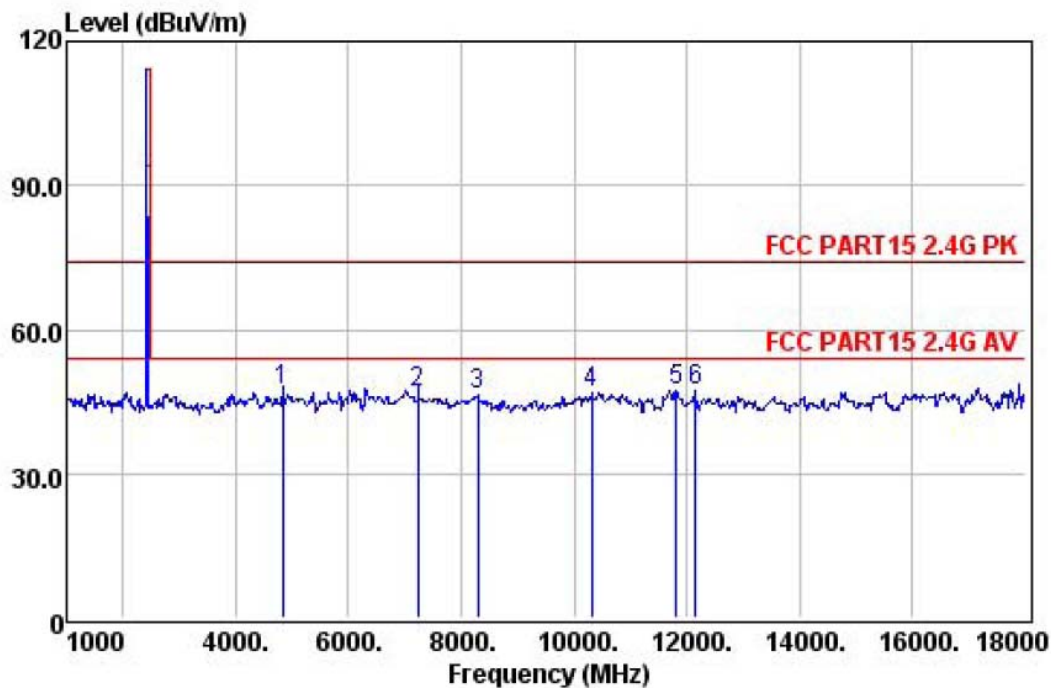


| | Preamp Freq | Preamp Factor | Read Level | Cable Loss | Antenna Factor | Level | Limit Line | Over Limit | Remark |
|---|-------------|---------------|------------|------------|----------------|--------|------------|------------|--------|
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4824.00 | 27.50 | 29.66 | 12.01 | 32.99 | 47.16 | 74.00 | -26.84 | Peak |
| 2 | 7236.00 | 27.95 | 20.91 | 16.61 | 37.30 | 46.87 | 74.00 | -27.13 | Peak |
| 3 | 8293.00 | 28.19 | 21.10 | 16.72 | 36.63 | 46.26 | 74.00 | -27.74 | Peak |
| 4 | 10316.00 | 28.83 | 19.57 | 17.03 | 38.91 | 46.68 | 74.00 | -27.32 | Peak |
| 5 | 11812.00 | 28.98 | 19.28 | 17.33 | 39.59 | 47.22 | 74.00 | -26.78 | Peak |
| 6 | 12152.00 | 29.03 | 19.17 | 17.50 | 39.43 | 47.07 | 74.00 | -26.93 | Peak |



| | | | |
|---------------|--------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH6 (802.11n Mode) | Polarization : | Horizontal |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

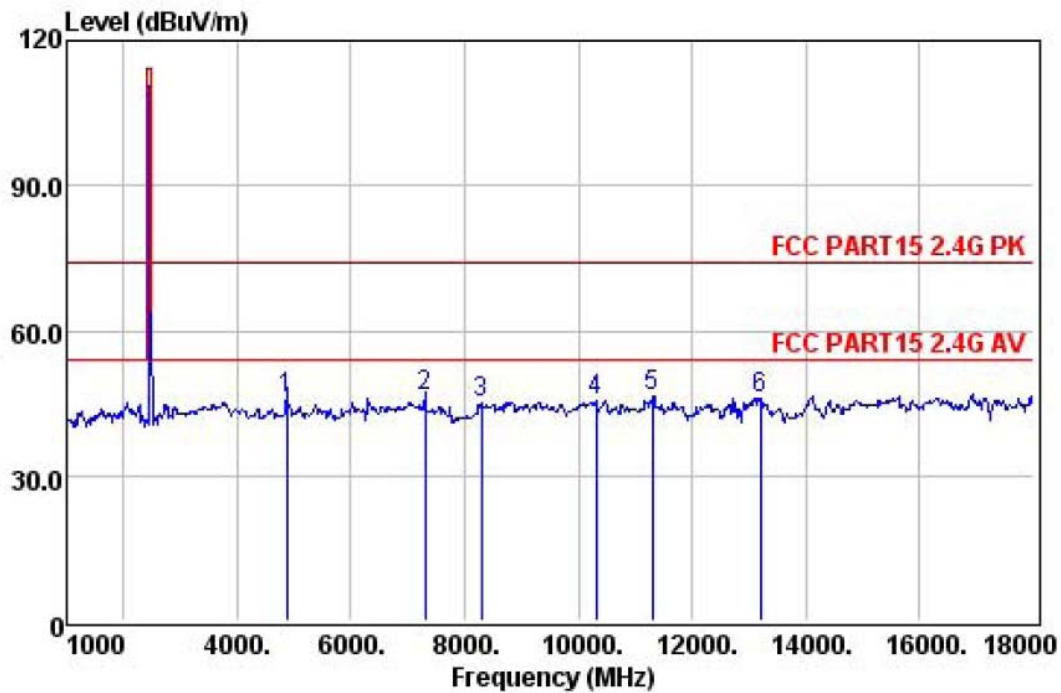


| | Preamp | Read | Cable&Antenna | | Limit | Over | | | |
|---|----------|--------|---------------|-------|--------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4874.00 | 27.53 | 28.17 | 12.14 | 33.11 | 45.89 | 74.00 | -28.11 | Peak |
| 2 | 7311.00 | 27.96 | 20.36 | 16.62 | 37.32 | 46.34 | 74.00 | -27.66 | Peak |
| 3 | 8293.00 | 28.19 | 20.10 | 16.72 | 36.63 | 45.26 | 74.00 | -28.74 | Peak |
| 4 | 10316.00 | 28.83 | 18.57 | 17.03 | 38.91 | 45.68 | 74.00 | -28.32 | Peak |
| 5 | 11302.00 | 28.93 | 18.26 | 17.22 | 39.74 | 46.29 | 74.00 | -27.71 | Peak |
| 6 | 13206.00 | 29.24 | 15.22 | 18.44 | 41.65 | 46.07 | 74.00 | -27.93 | Peak |



| | | | |
|---------------|--------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH6 (802.11n Mode) | Polarization : | Vertical |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

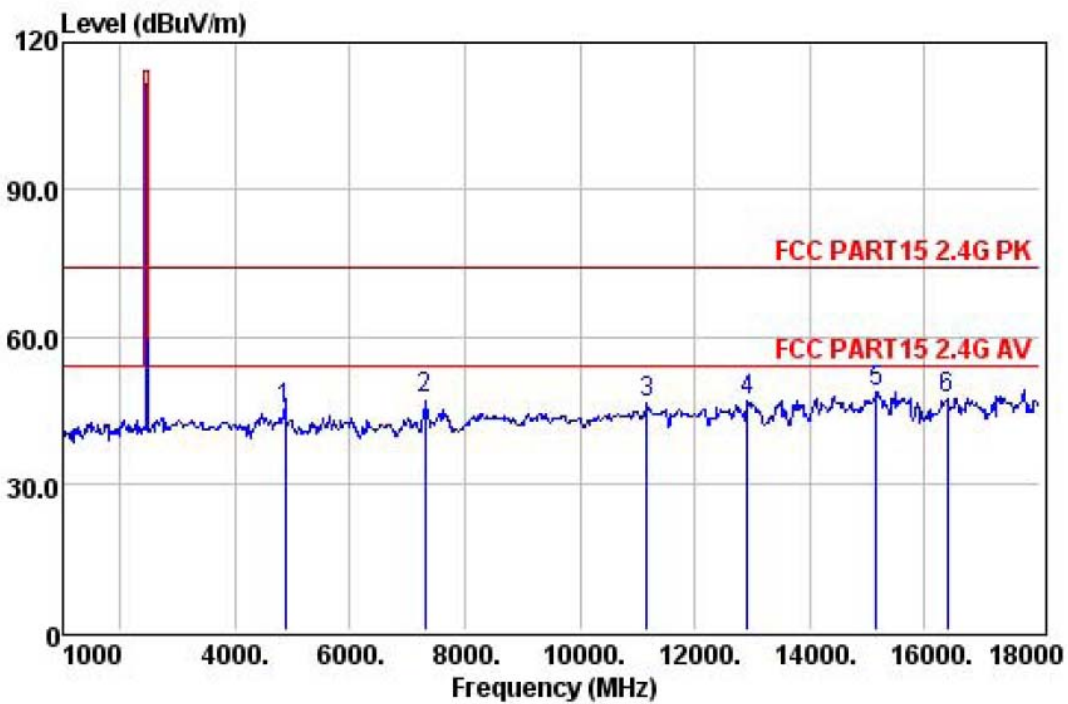


| | Preamp | Read | Cable | Antenna | Limit | Over | | | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4874.00 | 27.53 | 27.15 | 12.14 | 33.11 | 44.87 | 74.00 | -29.13 | Peak |
| 2 | 7311.00 | 27.96 | 21.38 | 16.62 | 37.32 | 47.36 | 74.00 | -26.64 | Peak |
| 3 | 11166.00 | 28.92 | 18.45 | 17.20 | 39.63 | 46.36 | 74.00 | -27.64 | Peak |
| 4 | 12917.00 | 29.18 | 17.52 | 18.14 | 40.50 | 46.98 | 74.00 | -27.02 | Peak |
| 5 | 15161.00 | 29.57 | 19.75 | 20.10 | 38.47 | 48.75 | 74.00 | -25.25 | Peak |
| 6 | 16402.00 | 29.86 | 13.67 | 20.91 | 42.78 | 47.50 | 74.00 | -26.50 | Peak |



| | | | |
|---------------|---------------------|---------------------|------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH11 (802.11n Mode) | Polarization : | Horizontal |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

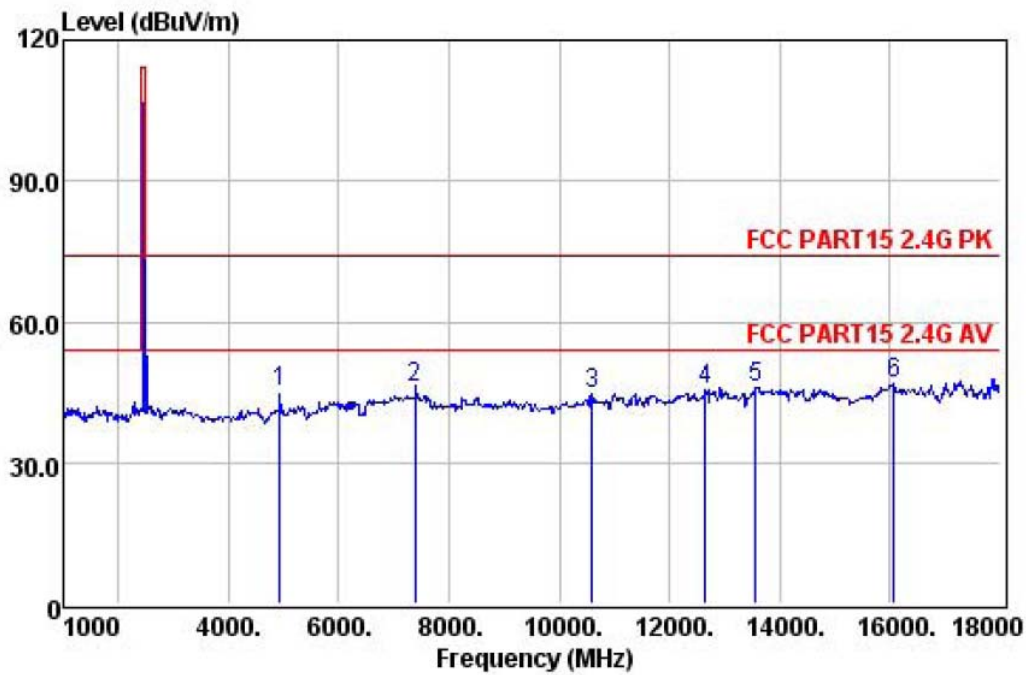


| | Preamp Freq | Preamp Factor | Read Level | Cable Loss | Antenna Factor | Level | Limit Line | Over Limit | Remark |
|---|-------------|---------------|------------|------------|----------------|--------|------------|------------|--------|
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4924.00 | 27.56 | 27.23 | 12.28 | 33.23 | 45.18 | 74.00 | -28.82 | Peak |
| 2 | 7386.00 | 27.98 | 19.84 | 16.62 | 37.36 | 45.84 | 74.00 | -28.16 | Peak |
| 3 | 10588.00 | 28.86 | 17.31 | 17.08 | 39.25 | 44.78 | 74.00 | -29.22 | Peak |
| 4 | 12645.00 | 29.13 | 16.65 | 17.91 | 39.86 | 45.29 | 74.00 | -28.71 | Peak |
| 5 | 13563.00 | 29.31 | 13.56 | 18.85 | 43.07 | 46.17 | 74.00 | -27.83 | Peak |
| 6 | 16079.00 | 29.73 | 15.03 | 20.69 | 40.82 | 46.81 | 74.00 | -27.19 | Peak |



| | | | |
|---------------|---------------------|---------------------|----------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH11 (802.11n Mode) | Polarization : | Vertical |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

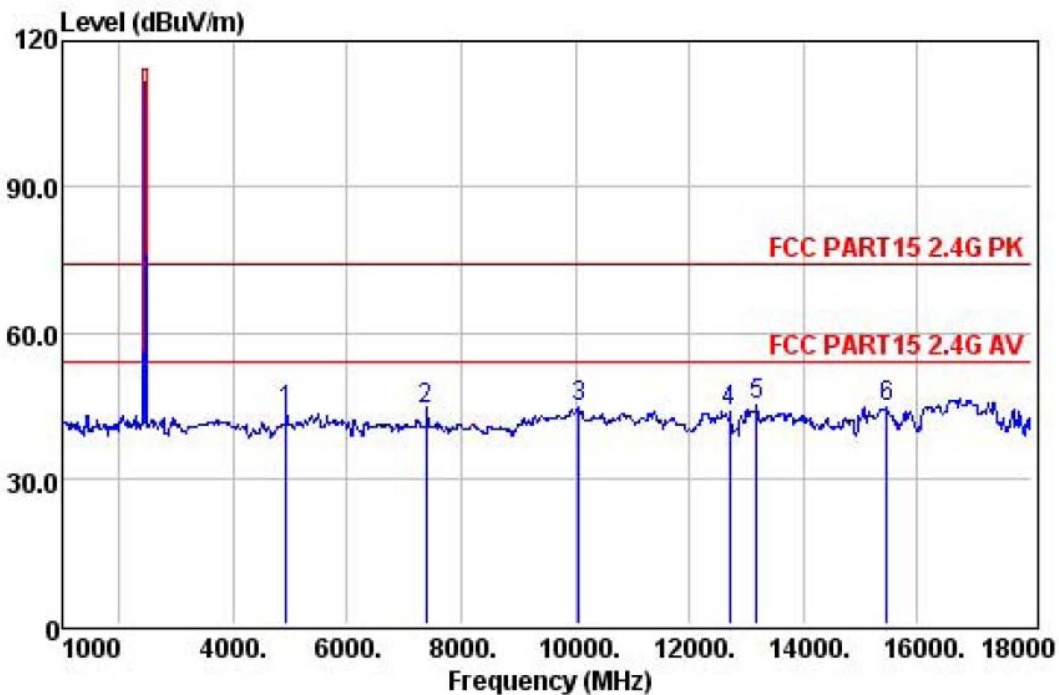

| | Preamp | Read | Cable | Antenna | | Limit | Over | | |
|---|----------|--------|-------|---------|--------|--------|--------|--------|--------|
| | Freq | Factor | Level | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4924.00 | 27.56 | 25.87 | 12.28 | 33.23 | 43.82 | 74.00 | -30.18 | Peak |
| 2 | 7386.00 | 27.98 | 18.37 | 16.62 | 37.36 | 44.37 | 74.00 | -29.63 | Peak |
| 3 | 10061.00 | 28.81 | 17.77 | 16.98 | 38.51 | 44.45 | 74.00 | -29.55 | Peak |
| 4 | 12713.00 | 29.14 | 14.99 | 17.97 | 40.02 | 43.84 | 74.00 | -30.16 | Peak |
| 5 | 13189.00 | 29.24 | 14.39 | 18.42 | 41.57 | 45.14 | 74.00 | -28.86 | Peak |
| 6 | 15467.00 | 29.62 | 15.54 | 20.29 | 38.41 | 44.62 | 74.00 | -29.38 | Peak |



Band Edge Emission:

| | | | |
|---------------|-----------------------|---------------------|----------------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1(802.11b&g&n Mode) | Polarization : | Horizontal& Vertical |



| | Frequency (MHz) | Antenna polarization (H/V) | Emission (dBuV/m) | | Band edge Limit (dBuV/m) | |
|---------------|-----------------|----------------------------|-------------------|-------|--------------------------|-------|
| | | | PK | AV | PK | AV |
| 802.11b | <2400 | H | 52.06 | 43.07 | 74.00 | 54.00 |
| | <2400 | V | 51.43 | 43.28 | 74.00 | 54.00 |
| | >2483.5 | H | 52.38 | 42.11 | 74.00 | 54.00 |
| | >2483.5 | V | 51.27 | 41.34 | 74.00 | 54.00 |
| 802.11g | <2400 | H | 53.02 | 42.67 | 74.00 | 54.00 |
| | <2400 | V | 51.46 | 42.79 | 74.00 | 54.00 |
| | >2483.5 | H | 52.78 | 43.04 | 74.00 | 54.00 |
| | >2483.5 | V | 51.43 | 42.51 | 74.00 | 54.00 |
| 802.11n(HT20) | <2400 | H | 52.51 | 43.08 | 74.00 | 54.00 |
| | <2400 | V | 51.67 | 42.19 | 74.00 | 54.00 |
| | >2483.5 | H | 52.19 | 42.52 | 74.00 | 54.00 |
| | >2483.5 | V | 52.27 | 41.67 | 74.00 | 54.00 |

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.



| | | | |
|---------------|--------------------|---------------------|-----------------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH11(802.11b Mode) | Polarization : | Horizontal & Vertical |



For conducted test plot as follows:

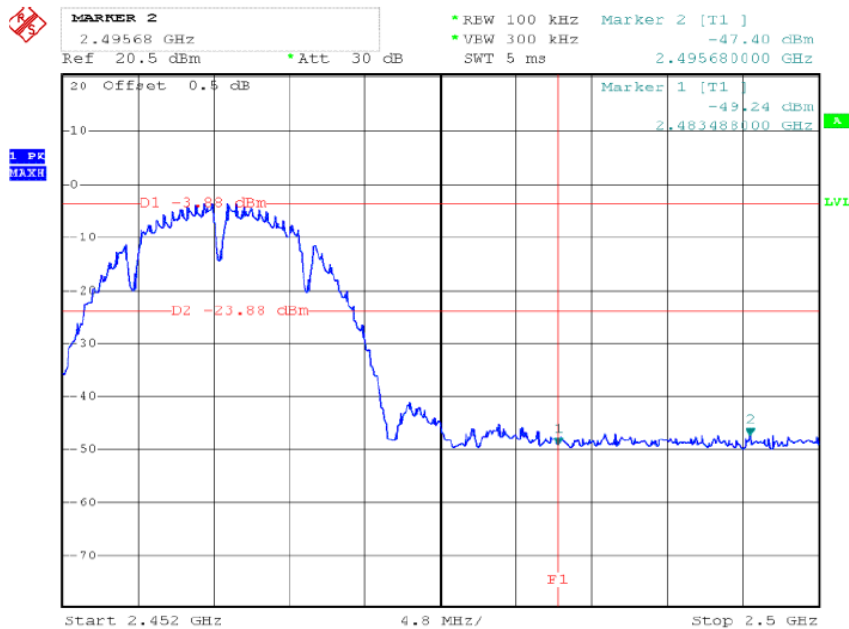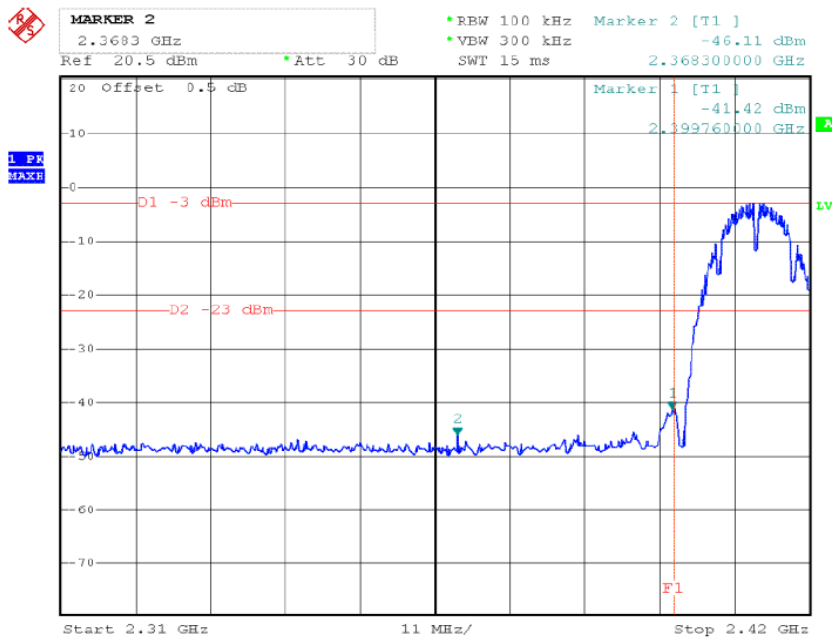



| | | | |
|---------------|-------------------|---------------------|----------------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1(802.11g Mode) | Polarization : | Horizontal& Vertical |



For conducted test plot as follows:

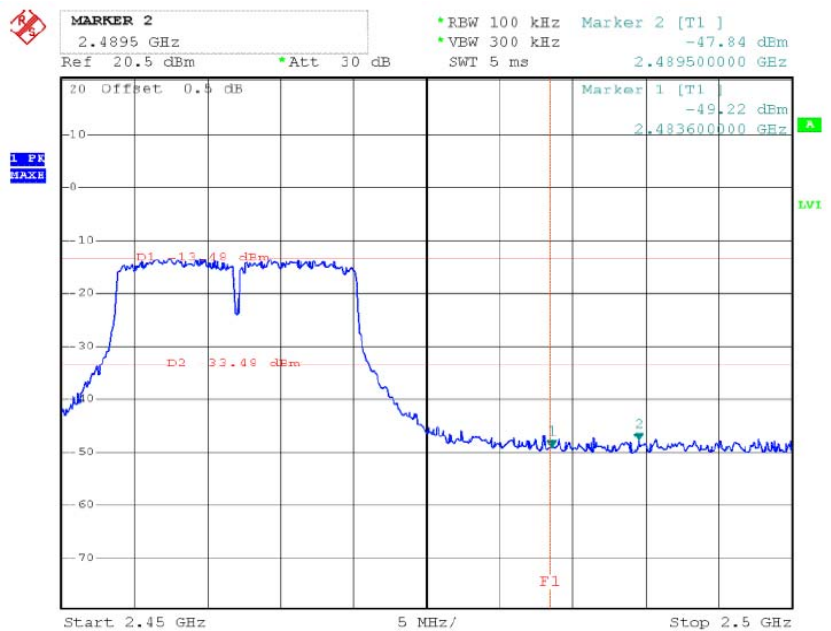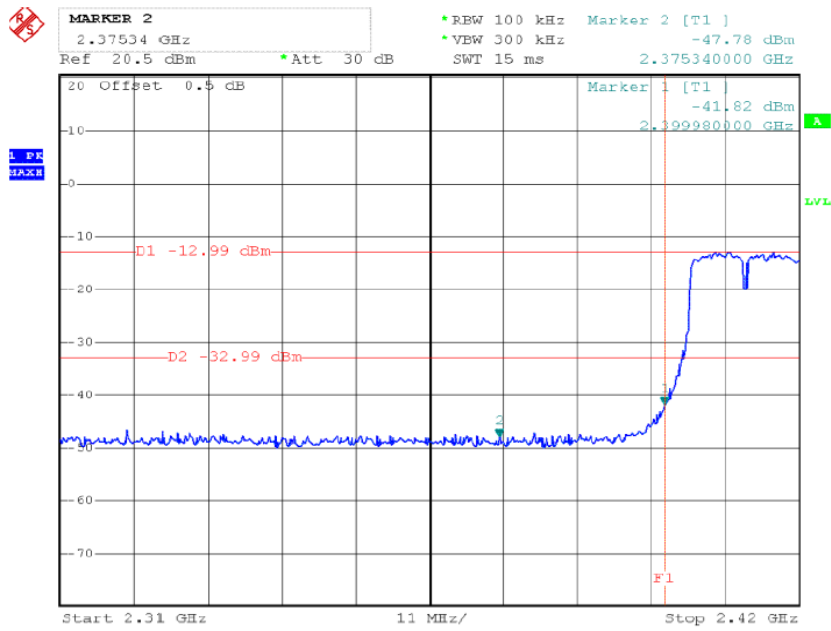



| | | | |
|---------------|------------------|---------------------|---------------------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | CH1(802.11nMode) | Polarization : | Horizontal&Vertical |

For conducted test plot as follows:

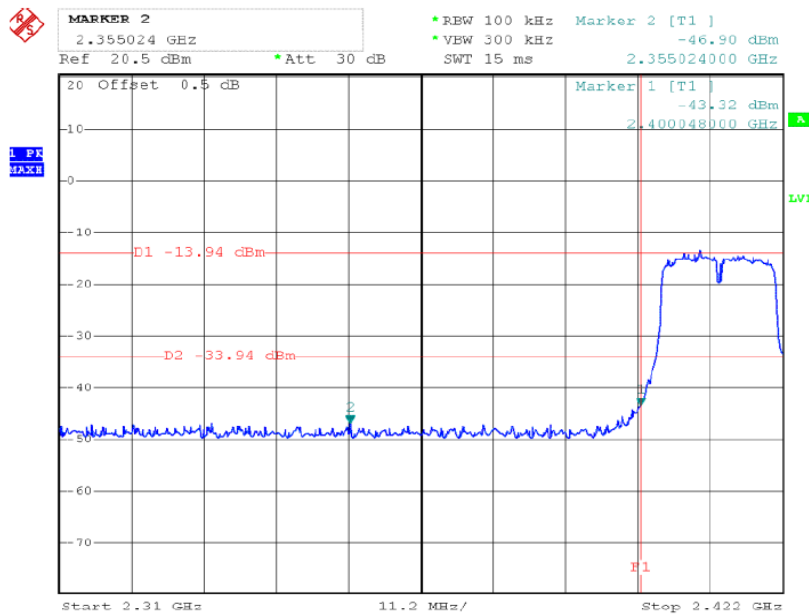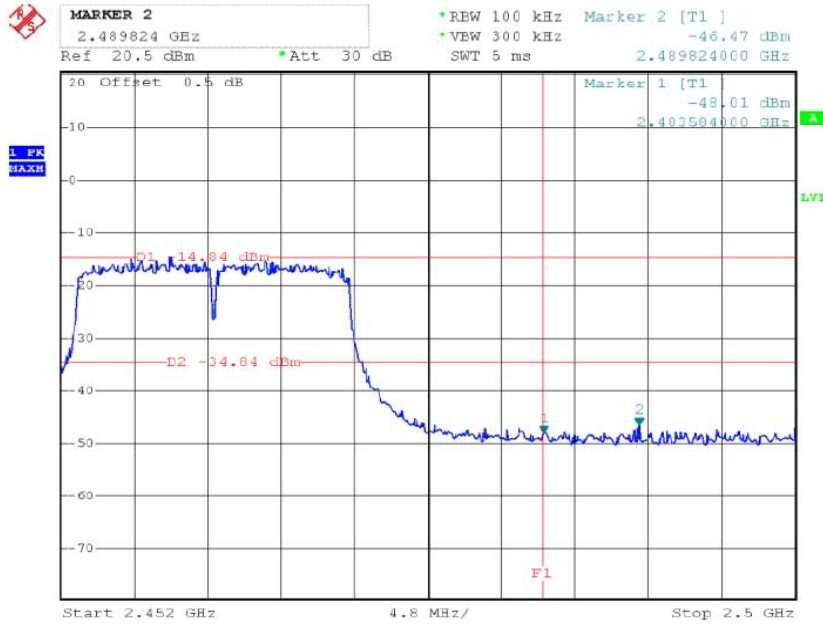



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|------------------------|------------------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247 | Power Spectral Density | 8 dBm (in any 3KHz) | 2400-2483.5 | PASS |

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.





4.1.5 TEST RESULTS

| | | | |
|---------------|-----------------------------|---------------------|---------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1015 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX b Mode /CH01, CH06, CH11 | | |

| Frequency | Power Density (dBm) | Limit (dBm) | Result |
|-----------|---------------------|-------------|--------|
| 2412 | -3.01 | <8 | Pass |
| 2437 | -3.18 | <8 | Pass |
| 2462 | -3.43 | <8 | Pass |

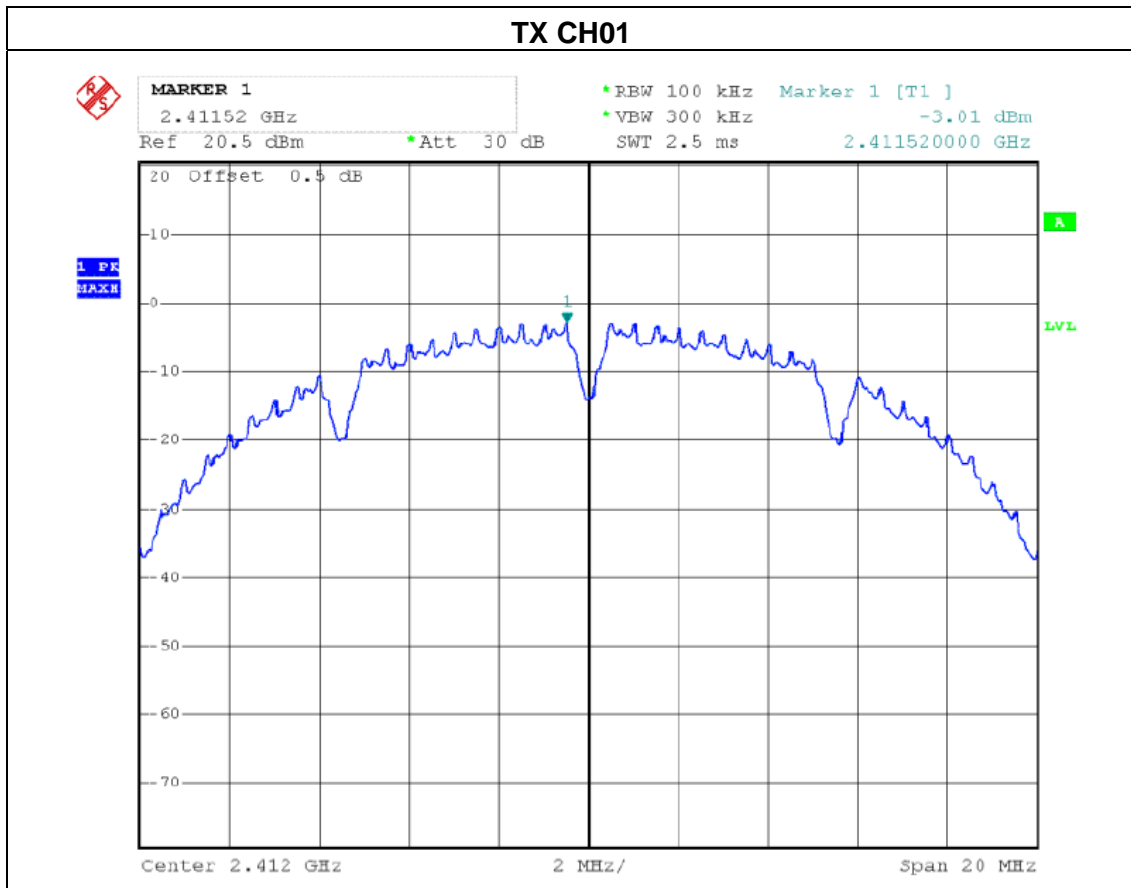

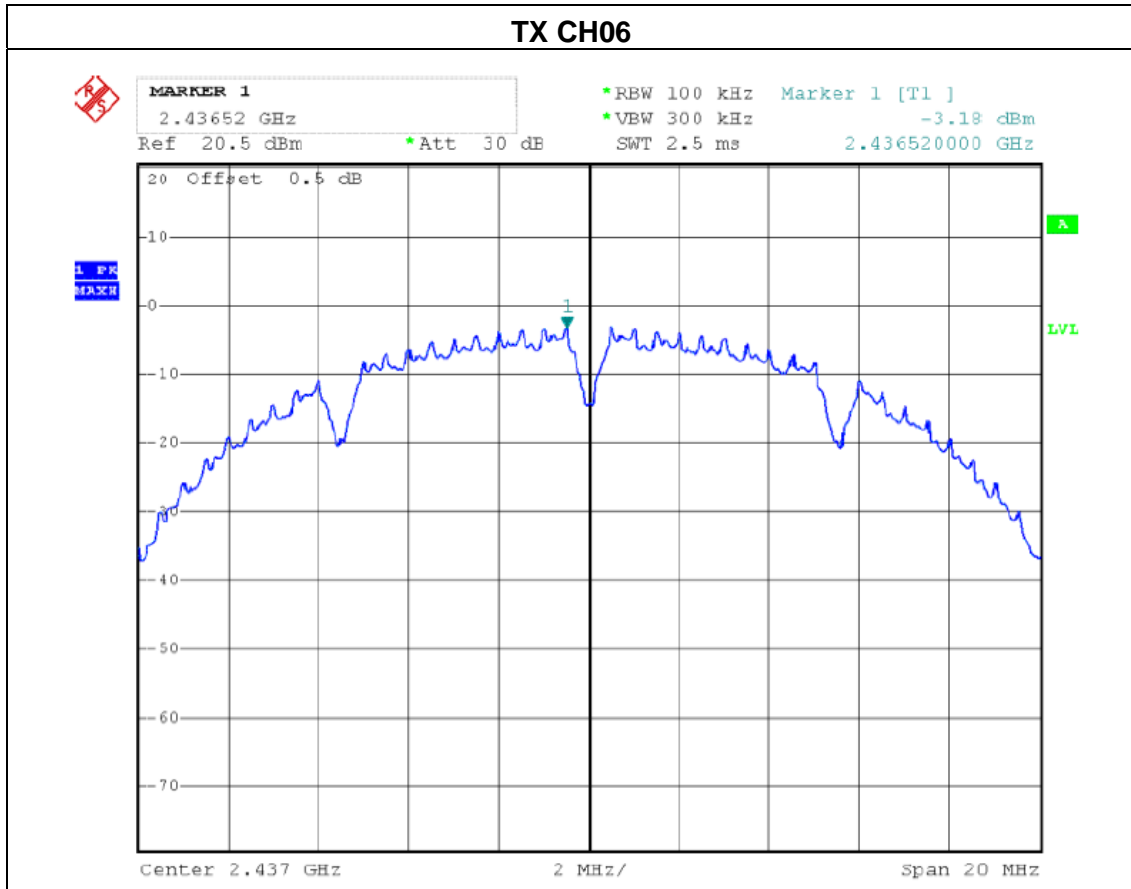


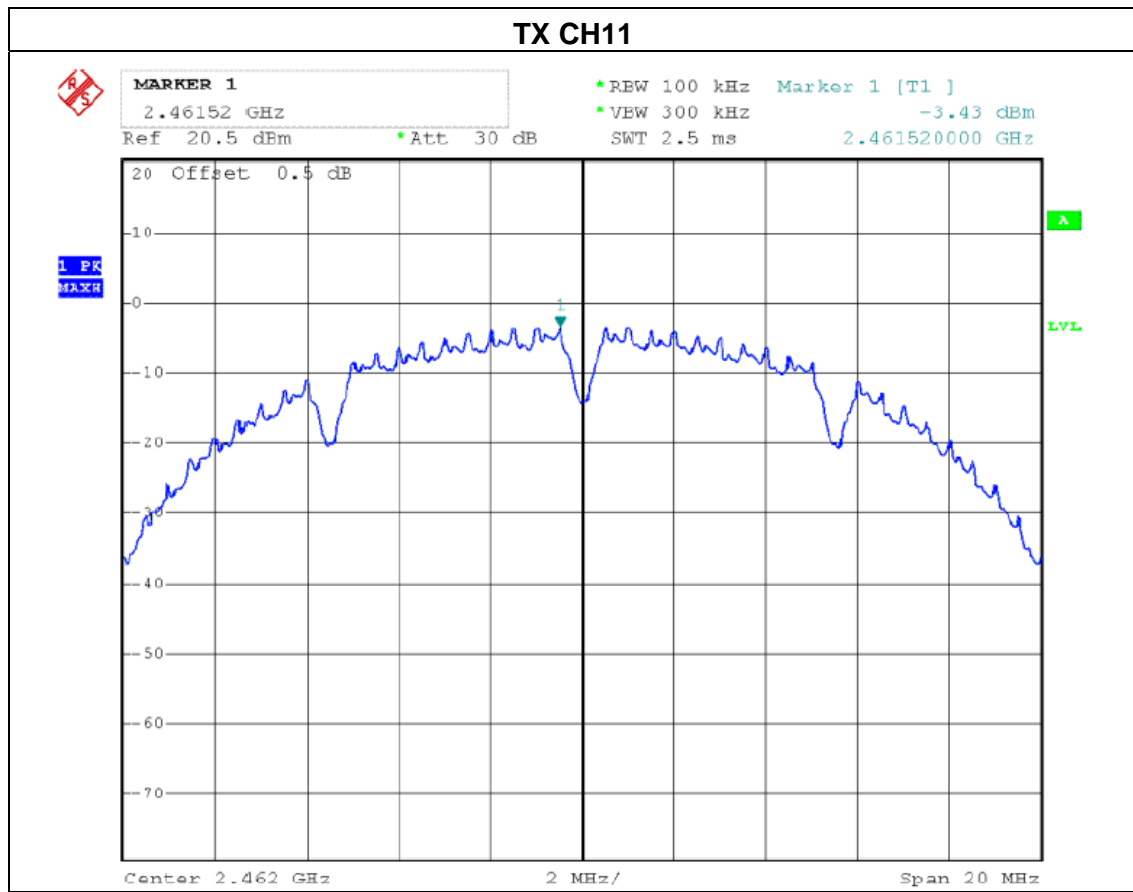





| | | | |
|---------------|-----------------------------|---------------------|---------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1015 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX g Mode /CH01, CH06, CH11 | | |

| Frequency | Power Density (dBm) | Limit (dBm) | Result |
|-----------|---------------------|-------------|--------|
| 2412 MHz | -12.92 | <8 | Pass |
| 2437 MHz | -13.29 | <8 | Pass |
| 2462 MHz | -13.59 | <8 | Pass |

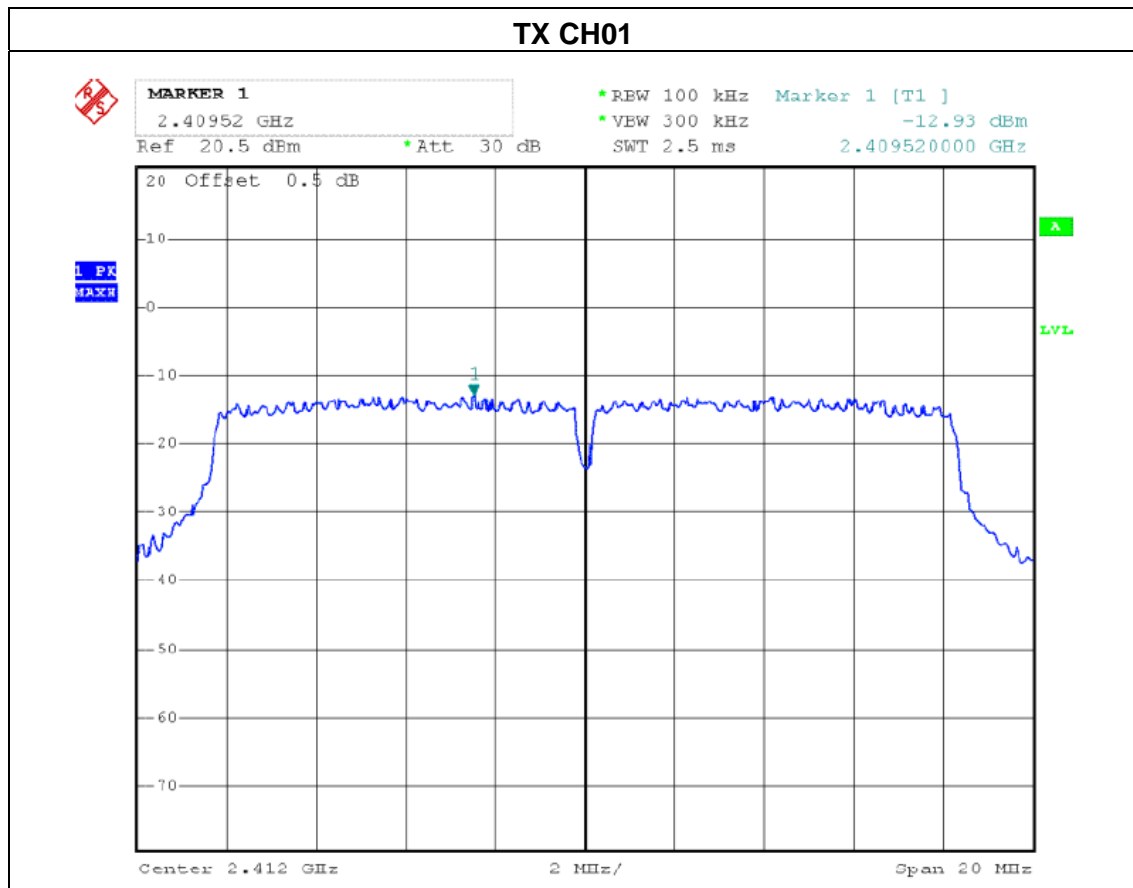

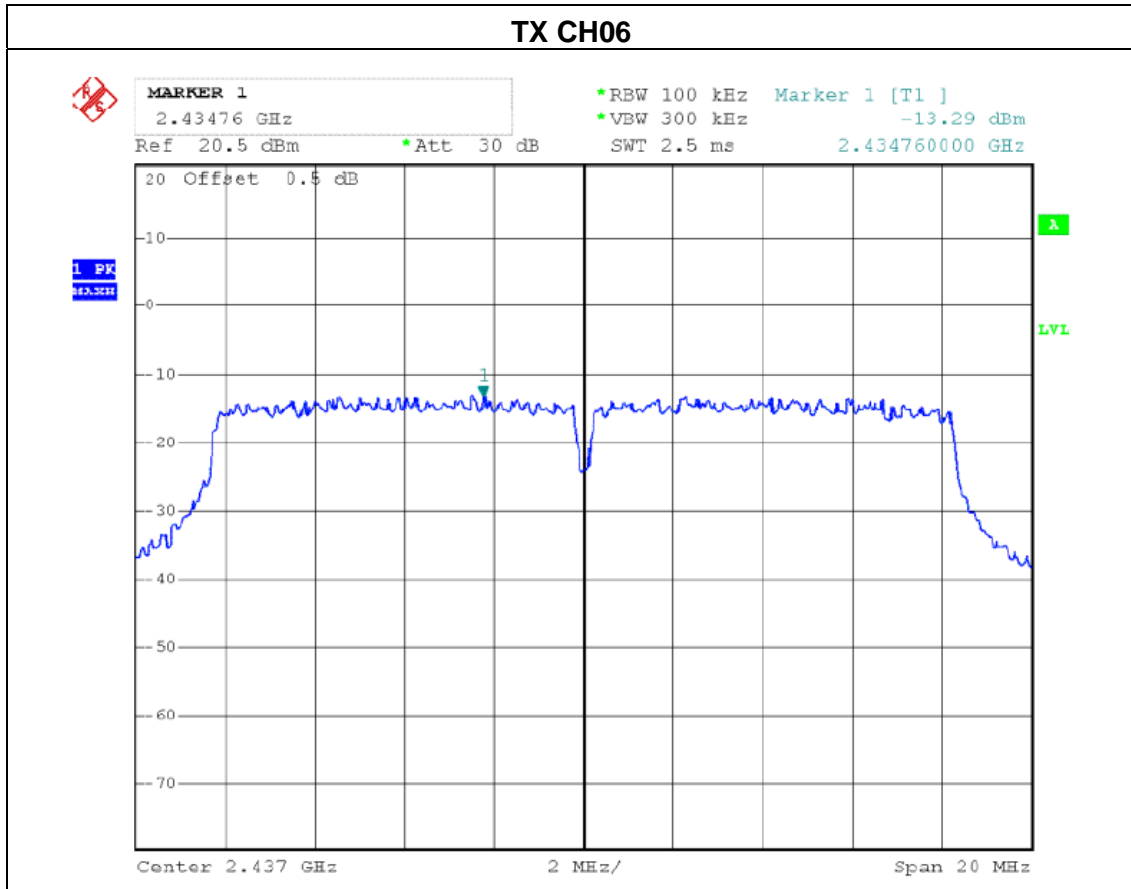


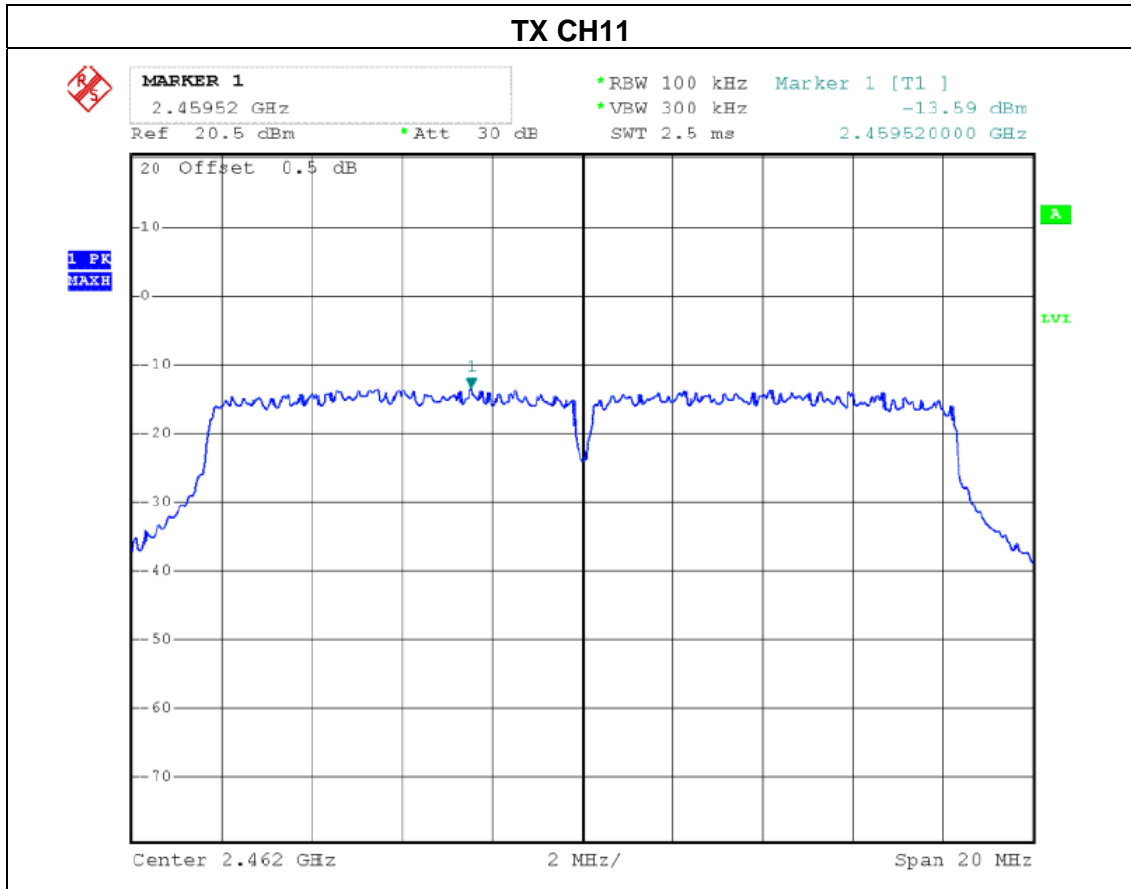




| | | | |
|---------------|-----------------------------|---------------------|---------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1015 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX n Mode /CH01, CH06, CH11 | | |


| Frequency | Power Density (dBm) | Limit (dBm) | Result |
|-----------|---------------------|-------------|--------|
| 2412 MHz | -13.77 | <8 | Pass |
| 2437 MHz | -14.43 | <8 | Pass |
| 2462 MHz | -14.46 | <8 | Pass |

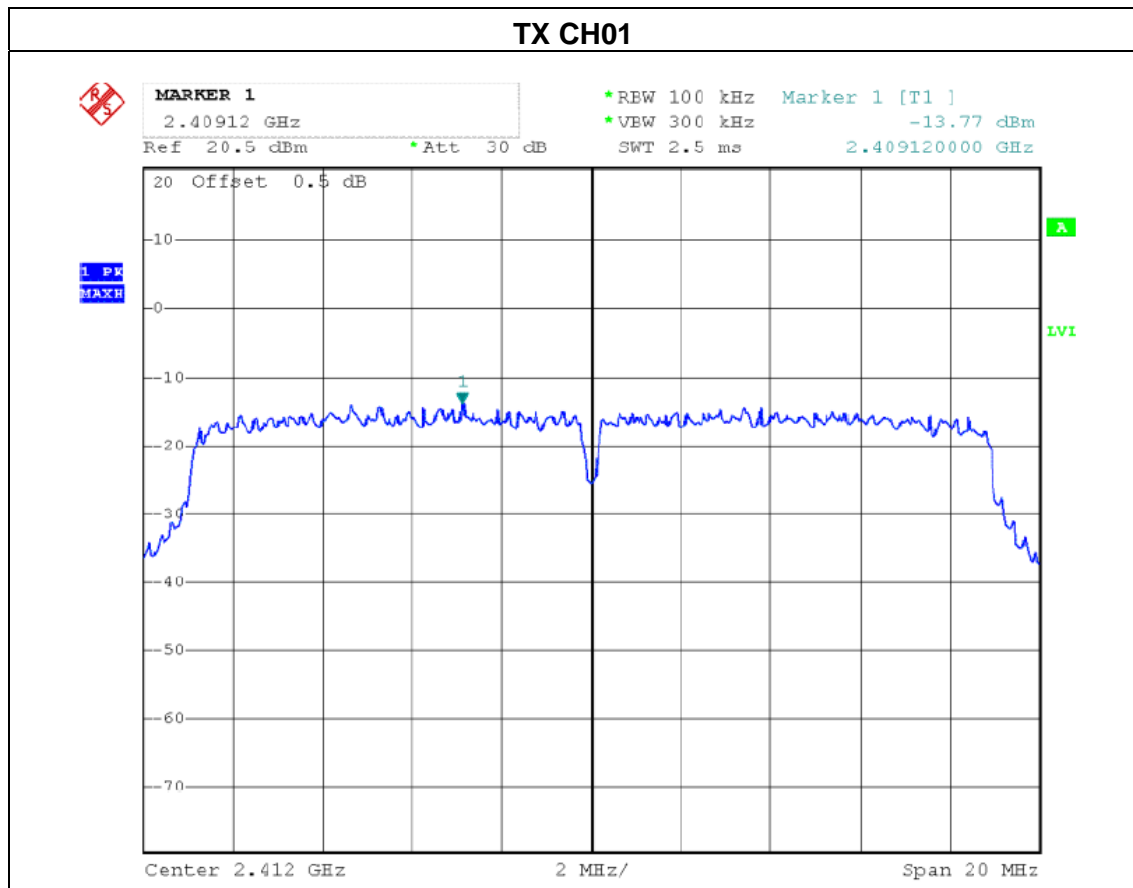

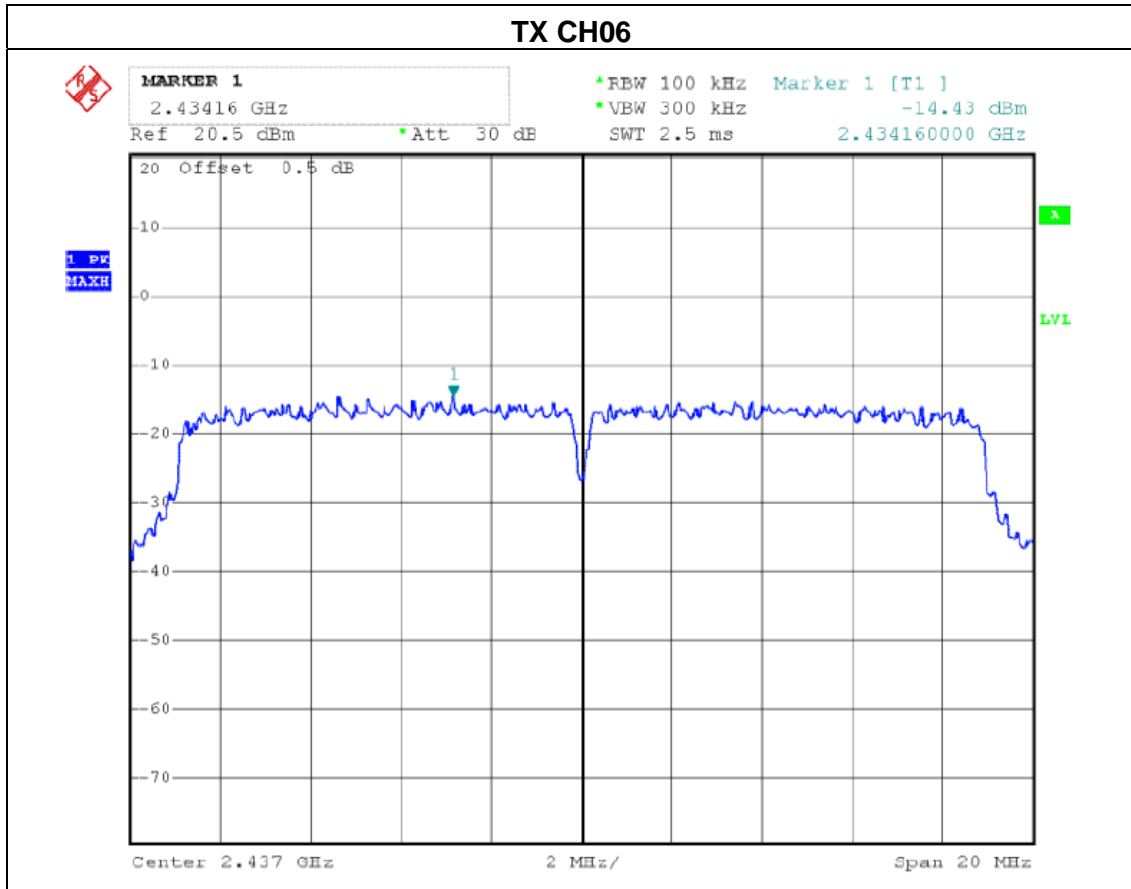



TX CH11

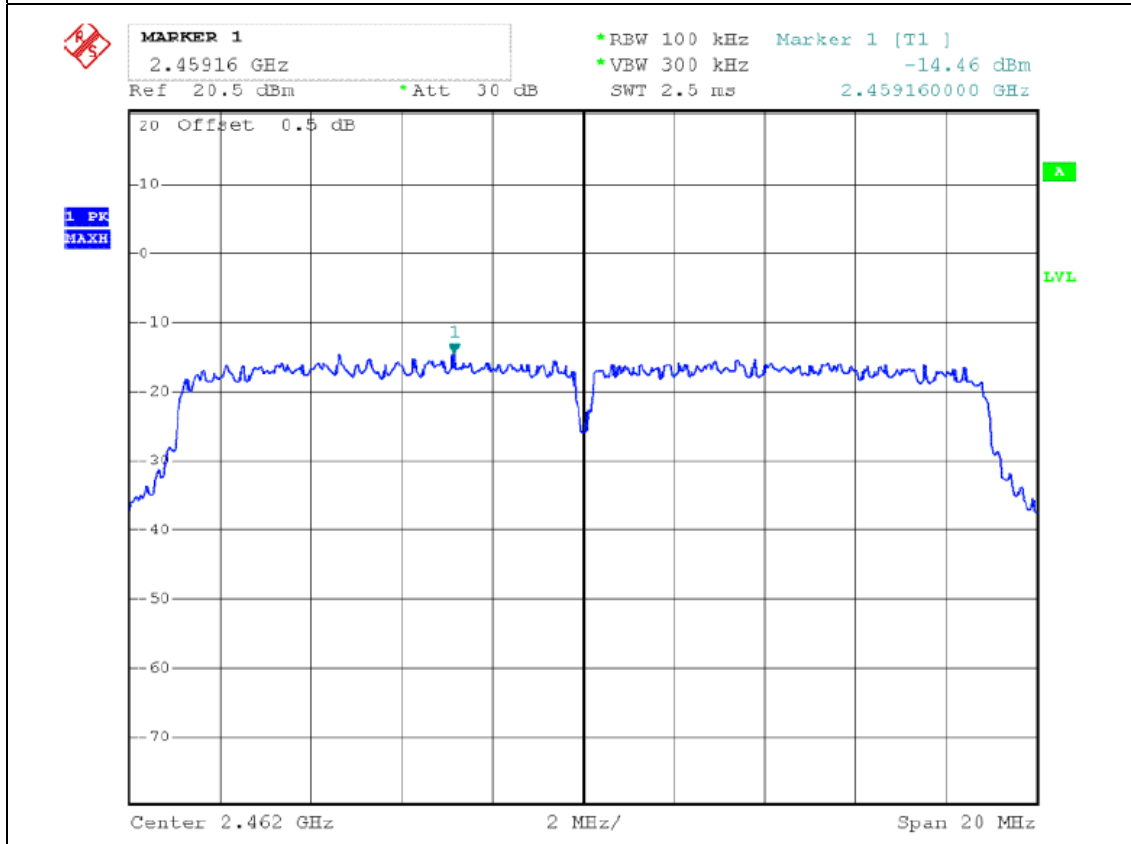



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|-----------|---|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(a)(2) | Bandwidth | $\geq 500\text{KHz}$ (6dB bandwidth) | 2400-2483.5 | PASS |

5.1.1 TEST PROCEDURE

a.

1. Set RBW= 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





5.1.5 TEST RESULTS

| | | | |
|---------------|-----------------------------|---------------------|---------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1012 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX b Mode /CH01, CH06, CH11 | | |

| Channel | Frequency (MHz) | 6dB bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low | 2412 | 10.32 | >0.5 | Pass |
| Middle | 2437 | 10.24 | >0.5 | Pass |
| High | 2462 | 10.32 | >0.5 | Pass |

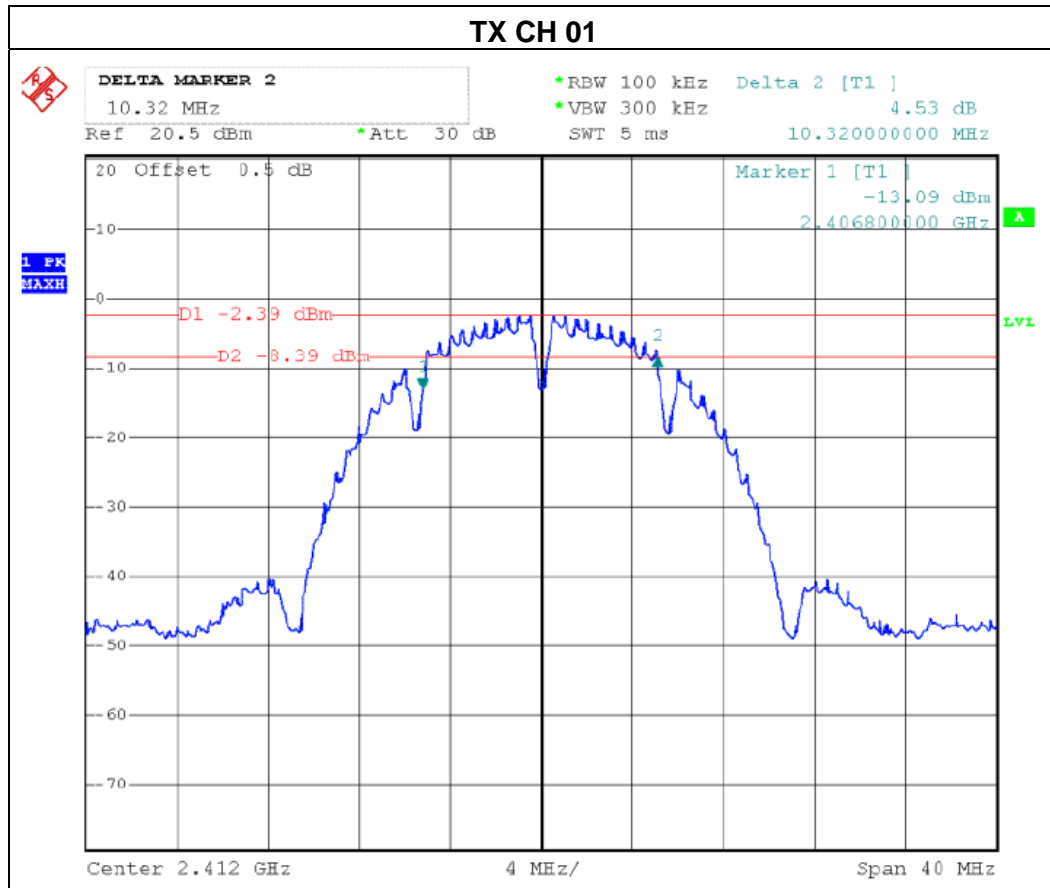


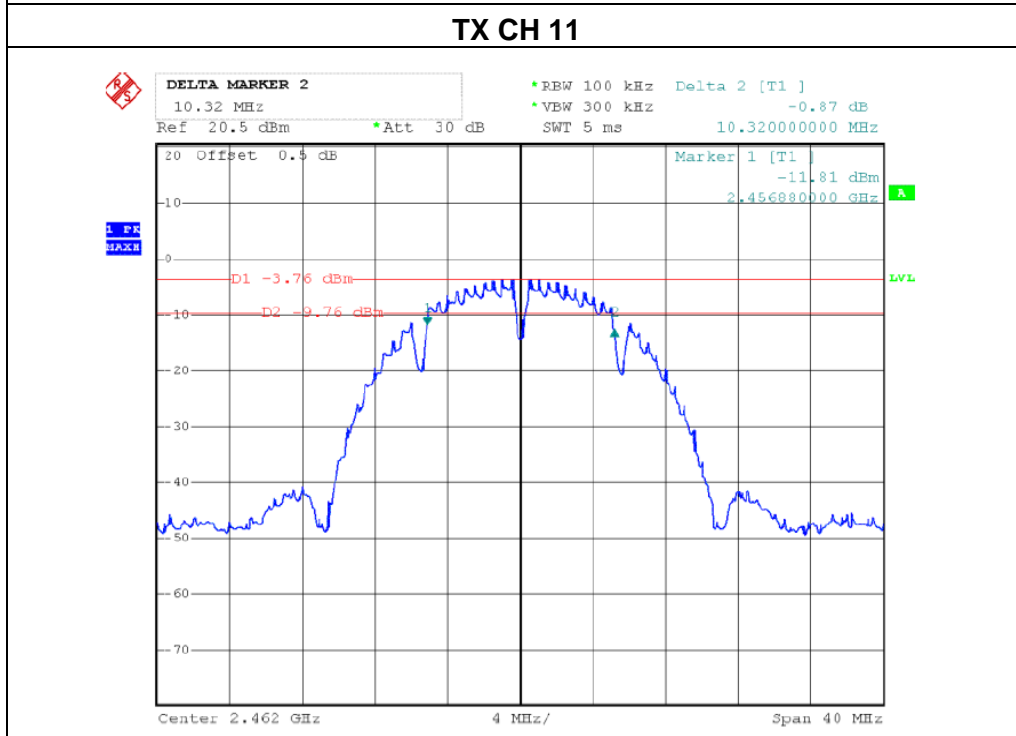
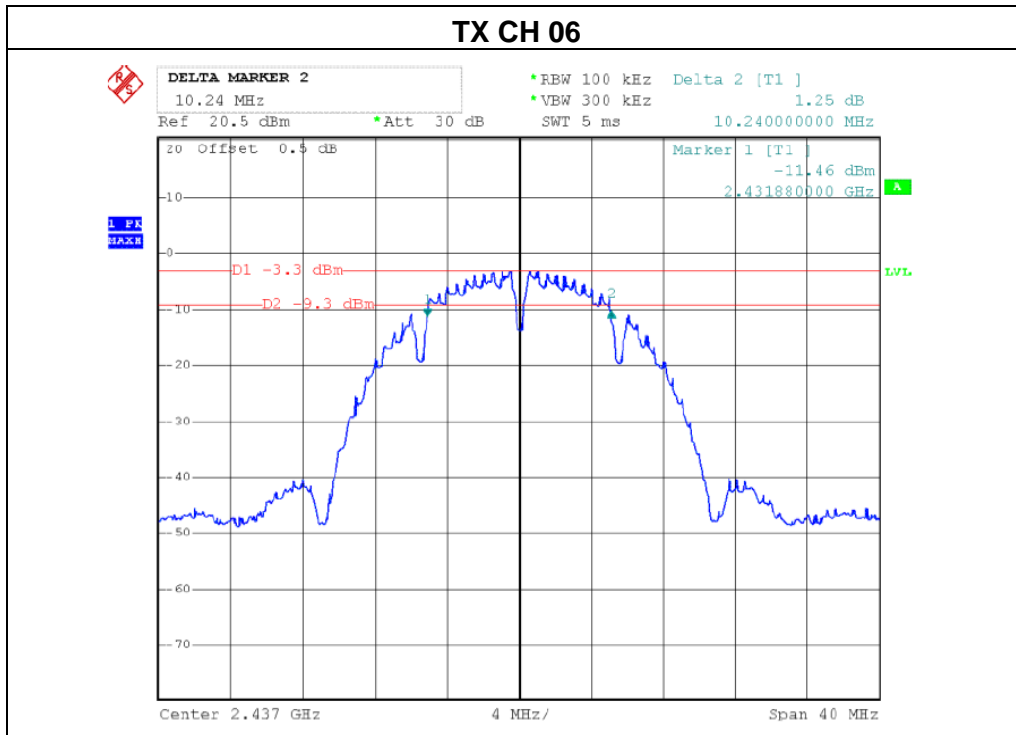




| | | | |
|---------------|-----------------------------|---------------------|---------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1012 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX g Mode /CH01, CH06, CH11 | | |

| Channel | Frequency (MHz) | 6dB bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low | 2412 | 16.64 | >0.5 | Pass |
| Middle | 2437 | 16.72 | >0.5 | Pass |
| High | 2462 | 16.64 | >0.5 | Pass |

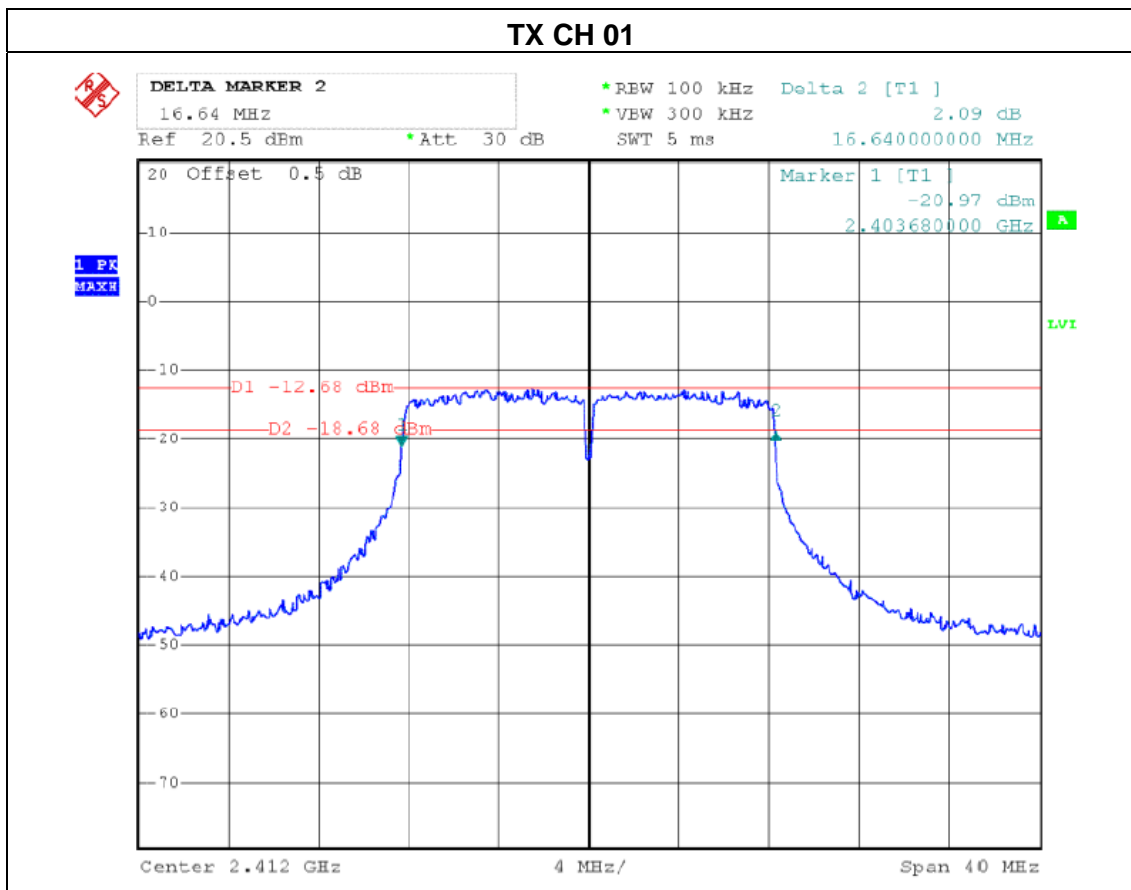


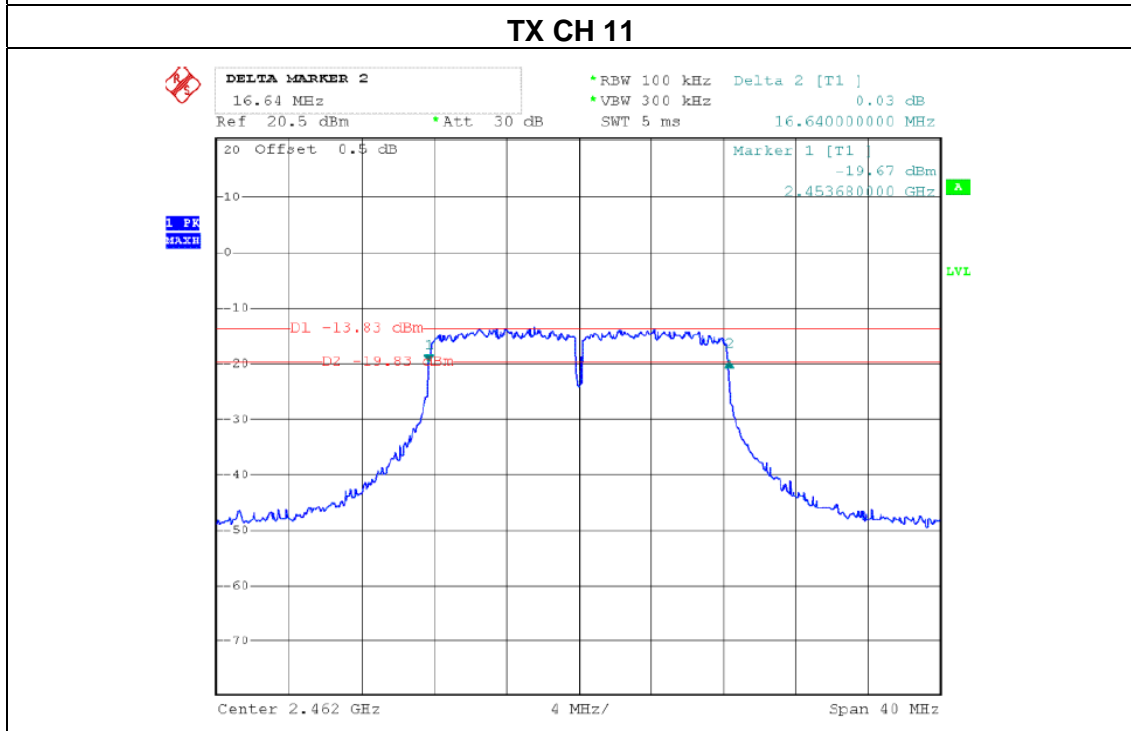
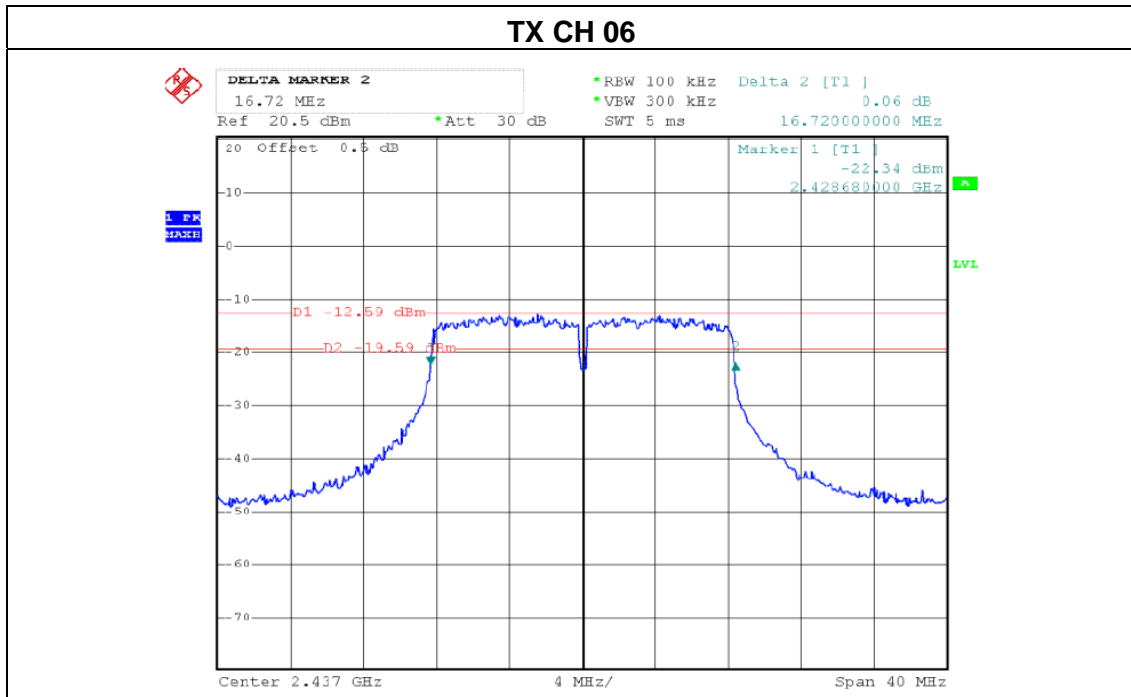




| | | | |
|---------------|-----------------------------|---------------------|---------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1012 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX n Mode /CH01, CH06, CH11 | | |

| Channel | Frequency (MHz) | 6dB bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low | 2412 | 17.84 | >0.5 | Pass |
| Middle | 2437 | 17.84 | >0.5 | Pass |
| High | 2462 | 17.84 | >0.5 | Pass |

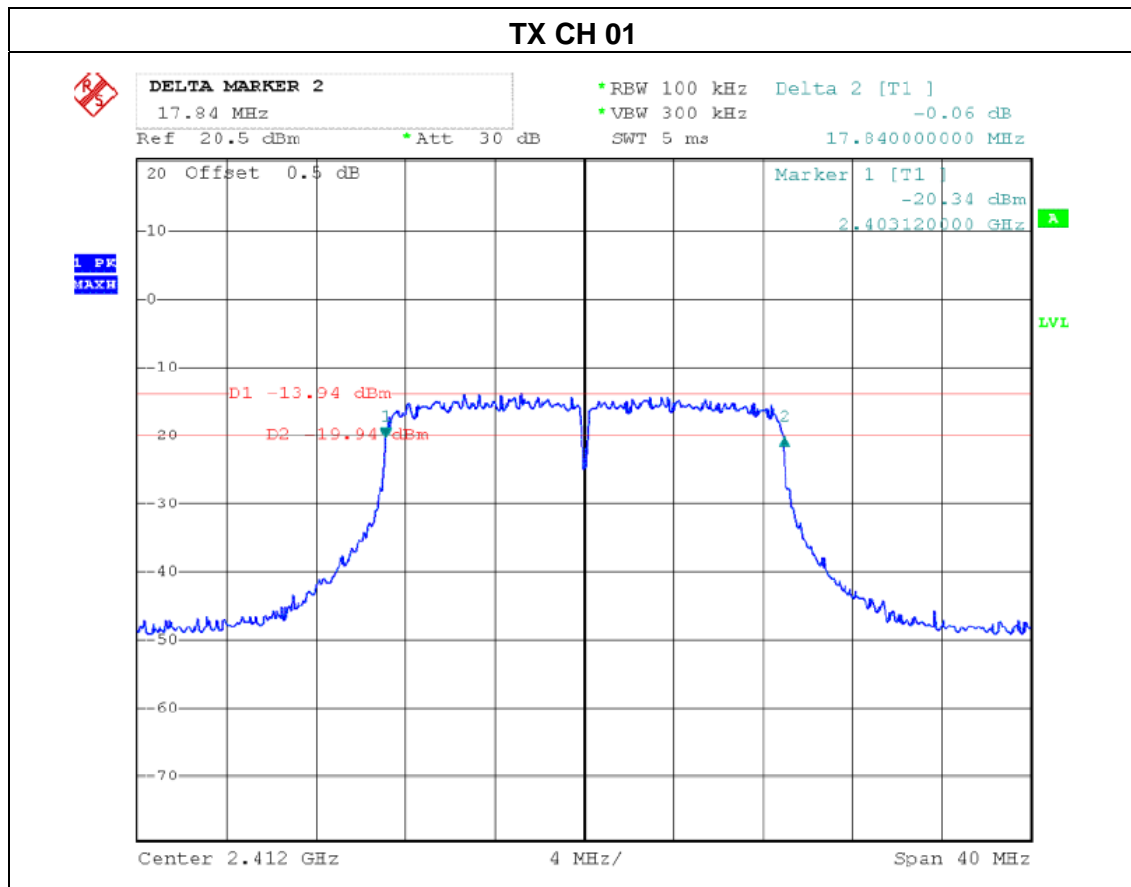

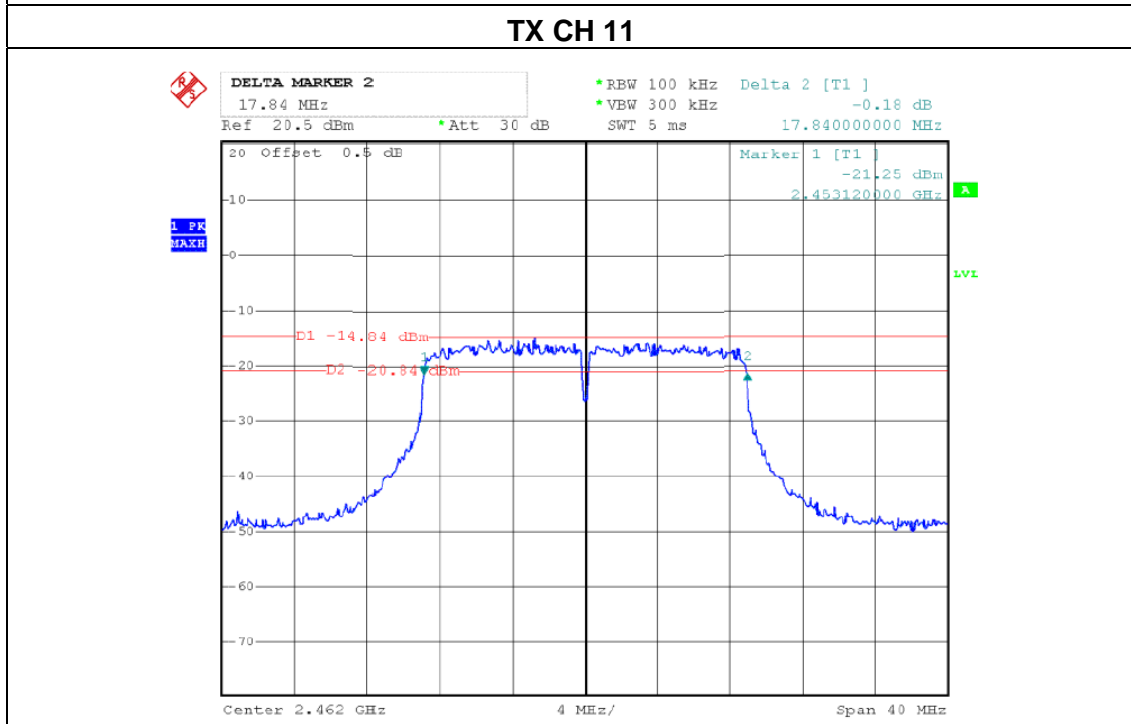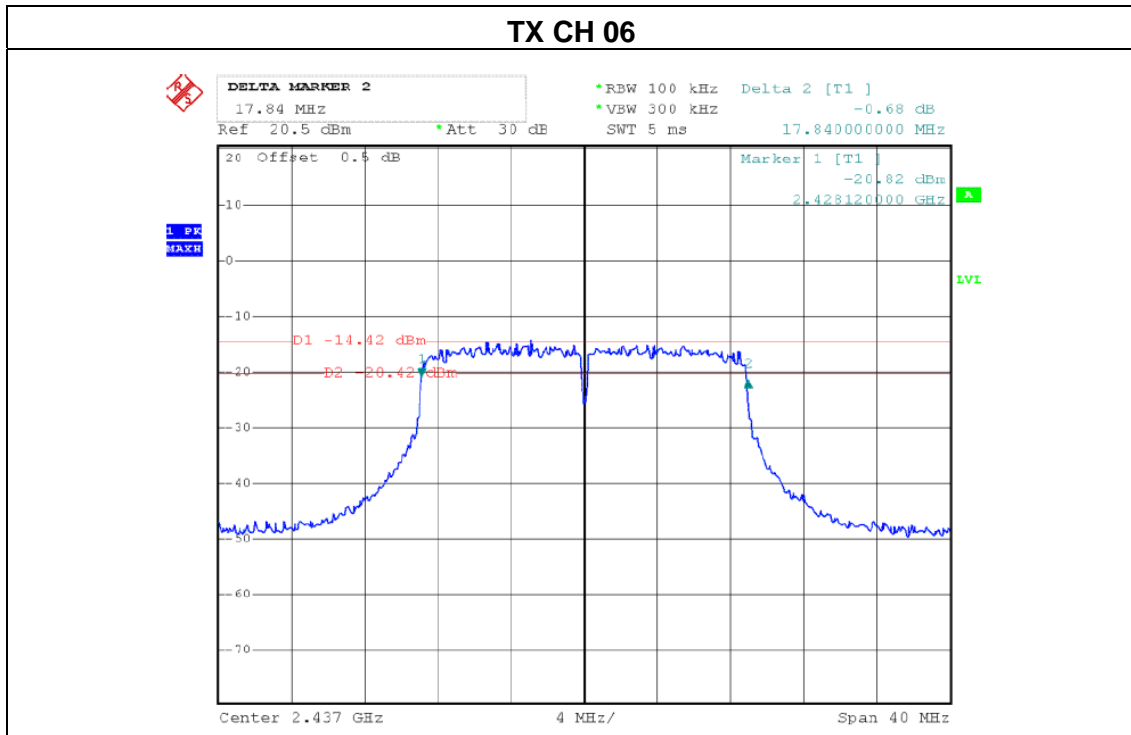



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|-------------------|-----------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(b)(3) | Peak Output Power | 1 watt or 30dBm | 2400-2483.5 | PASS |

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

| | | | |
|---------------|---------------------------------|---------------------|---------|
| EUT : | 7.9 inch tablet | Model Name : | EGQ178 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1012 hPa | Test Voltage : | DC 3.7V |
| Test Mode : | TX b/g/n Mode /CH01, CH06, CH11 | | |

| TX 802.11b Mode | | | |
|------------------------|-----------|------------------------------------|-------|
| Test Channe | Frequency | Maximum Conducted Output Power(PK) | LIMIT |
| | (MHz) | (dBm) | dBm |
| CH01 | 2412 | 8.87 | 30 |
| CH06 | 2437 | 8.81 | 30 |
| CH11 | 2462 | 8.86 | 30 |
| TX 802.11g Mode | | | |
| CH01 | 2412 | 6.48 | 30 |
| CH06 | 2437 | 6.42 | 30 |
| CH11 | 2462 | 6.51 | 30 |
| TX 802.11n Mode | | | |
| CH01 | 2412 | 5.51 | 30 |
| CH06 | 2437 | 5.49 | 30 |
| CH11 | 2462 | 5.52 | 30 |



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.



7.2 EUT ANTENNA

The antennas used for this product are Internal Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.0 dBi.



8. EUT TEST PHOTO

Radiated Measurement Photos

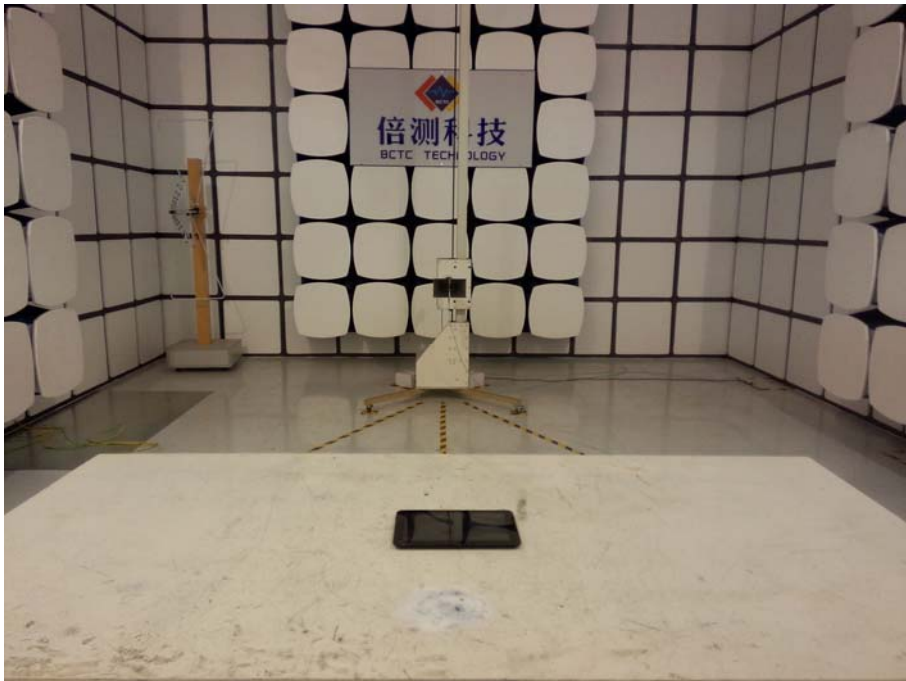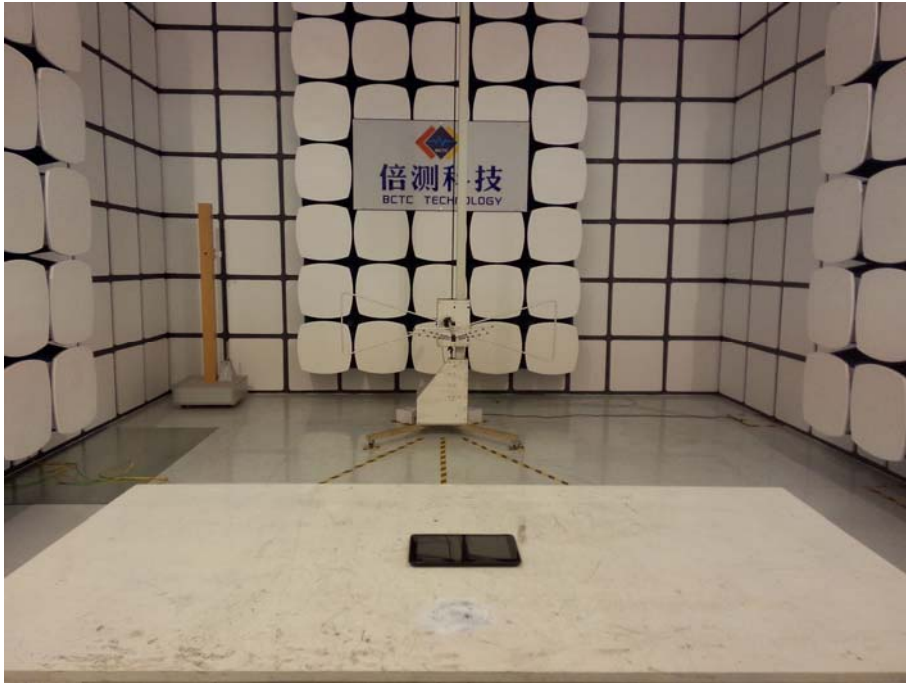



Radiated Measurement Photos

