

FCC PART 15.247

TEST REPORT

For

SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD.

NO.1 Shuoying Rd., Hebei Industry Area, Dalang, Longhua Town, Baoan, Shenzhen, China

FCC ID: XJN-PM0739X

Report Type: Original Report	Product Type: Mobile Internet Devices
Test Engineer: Rocky Kang	<i>Rocky Kang</i>
Report Number: R2DG131206001-00D	
Report Date: 2013-12-23	
Reviewed By: Jimmy Xiao RF Engineer	<i>Jimmy Xiao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	9
APPLICABLE STANDARD	9
RESULT	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST EQUIPMENT LIST AND DETAILS.....	41
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA	49
FCC §15.247(e) - POWER SPECTRAL DENSITY	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST EQUIPMENT LIST AND DETAILS.....	55
TEST DATA	55
PRODUCT SIMILARITY DECLARATION LETTER	63

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD.'s product, model number: PM0739 (FCC ID: XJN-PM0739X) or the "EUT" in this report was a Mobile Internet Devices, which was measured approximately: 18.8 cm (L) x 10.8 cm (W) x 0.8 cm (H), rated with input voltage: DC 3.7V Li-ion battery or DC 5V charging from adapter.

Adapter Information:

Model: TEKA012-0502000UK

Input: AC 100-240V, 50/60 Hz, 0.35A Max

Output: DC 5V, 2A

Note: the product Mobile Internet Devices, serial models IBT0725, IBT0725A and IBT0725B are electrically identical with the model PM0739 which was selected to test, and difference among them is just the model number which was explained in the product similarity declaration letter that provided and guaranteed by applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1312079 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-12-06.*

Objective

This report is prepared on behalf of SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS and Part 22H/24E PCE submissions with FCC ID: XJN-PM0739X.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

WiFi RF test built-in the EUT

802.11b: Rate 1MB, Power level: 10

802.11g: Rate 6MB, Power level: 10


802.11n-HT20: Rate Mcs0, Power level: 10

802.11n-HT40: Rate Mcs0, Power level: 10

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded detachable USB Cable	0.8	EUT	Adapter

Block Diagram of Test Setup

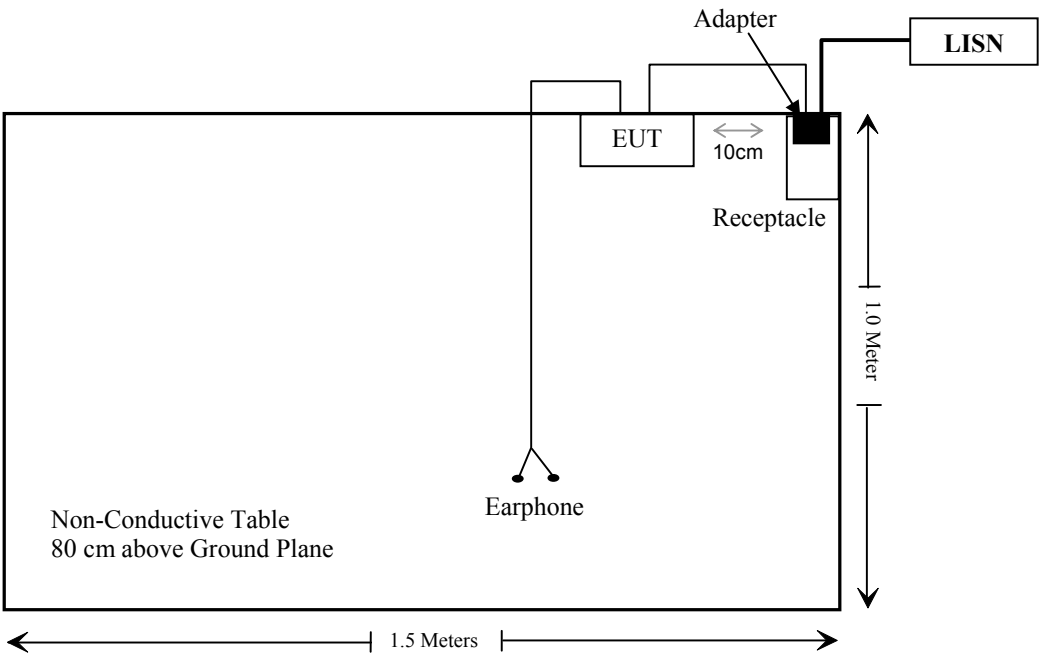

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

Result

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The distance between antenna and test point is 5 mm
The maximum conducted average output power: 9.39dBm (8.69mW)

According to the Appendix A of KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW.

Conclusion:

The time-averaged output power is 8.69mW < the exclusion thresholds 10mW, so stand-alone SAR evaluation is not required.

The other SAR data please refer to the SAR report, report No.: R2DG131206001-20.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one integral antenna arrangement for Wifi, which was permanently attached and the antenna gain is -1.5dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

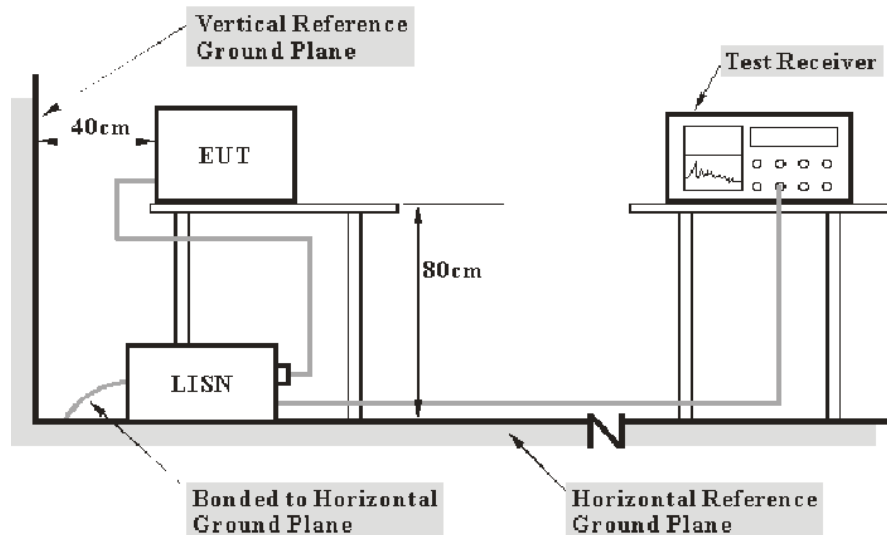

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2013-06-17	2014-06-17
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2013-05-07	2014-05-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2013-10-15	2014-10-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

10.6 dB at 2.926000 MHz in the Line conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	20 °C
Relative Humidity:	50 %
ATM Pressure:	100.1 kPa

The testing was performed by Rocky Kang on 2013-12-16.

EUT operation mode: Charging & transmitting

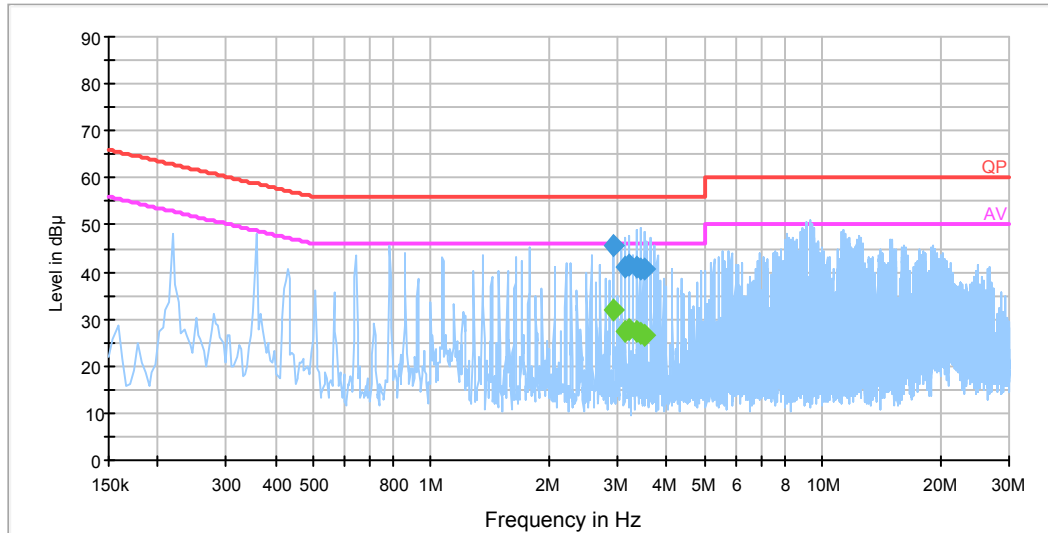AC 120V/60 Hz, Line**EMI Auto Test L**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
2.926000	45.4	19.7	56.0	10.6	QP
2.926000	31.9	19.7	46.0	14.1	Ave.
3.138000	41.2	19.7	56.0	14.8	QP
3.138000	27.4	19.7	46.0	18.6	Ave.
3.214000	41.5	19.7	56.0	14.5	QP
3.214000	27.7	19.7	46.0	18.3	Ave.
3.354000	41.0	19.7	56.0	15.0	QP
3.354000	27.3	19.7	46.0	18.7	Ave.
3.426000	40.8	19.7	56.0	15.2	QP
3.426000	26.8	19.7	46.0	19.2	Ave.
3.498000	40.8	19.7	56.0	15.2	QP
3.498000	26.7	19.7	46.0	19.3	Ave.

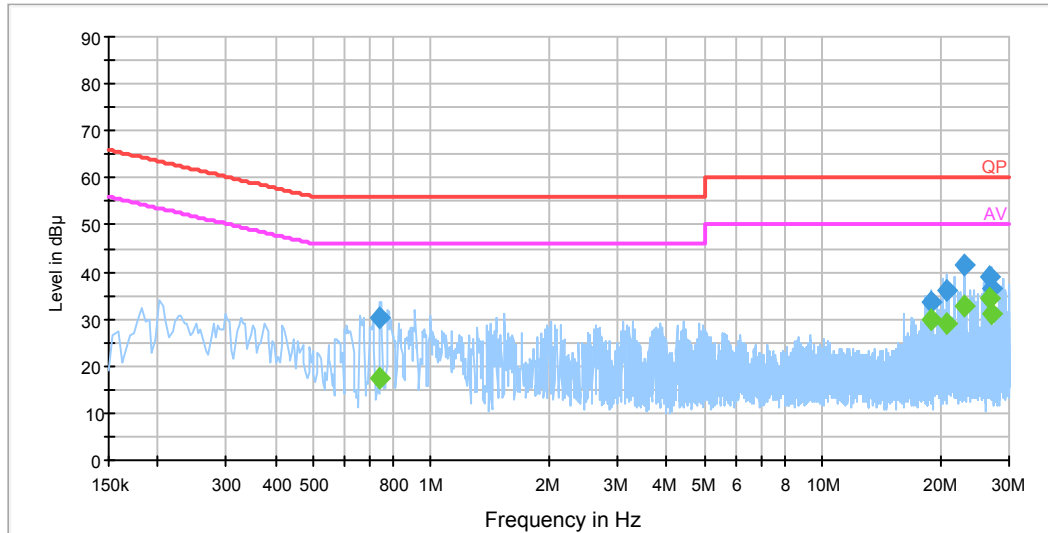AC 120V/60 Hz, Neutral**EMI Auto Test N**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.742000	30.3	19.6	56.0	25.7	QP
0.742000	17.6	19.6	46.0	28.4	Ave.
18.914000	33.7	20.0	60.0	26.3	QP
18.914000	29.7	20.0	50.0	20.3	Ave.
20.806000	36.1	20.1	60.0	23.9	QP
20.806000	29.0	20.1	50.0	21.0	Ave.
23.130000	41.5	20.1	60.0	18.5	QP
23.130000	32.8	20.1	50.0	17.2	Ave.
26.610000	39.0	20.2	60.0	21.0	QP
26.610000	34.5	20.2	50.0	15.5	Ave.
27.122000	36.5	20.2	60.0	23.5	QP
27.122000	31.2	20.2	50.0	18.8	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz. And this uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

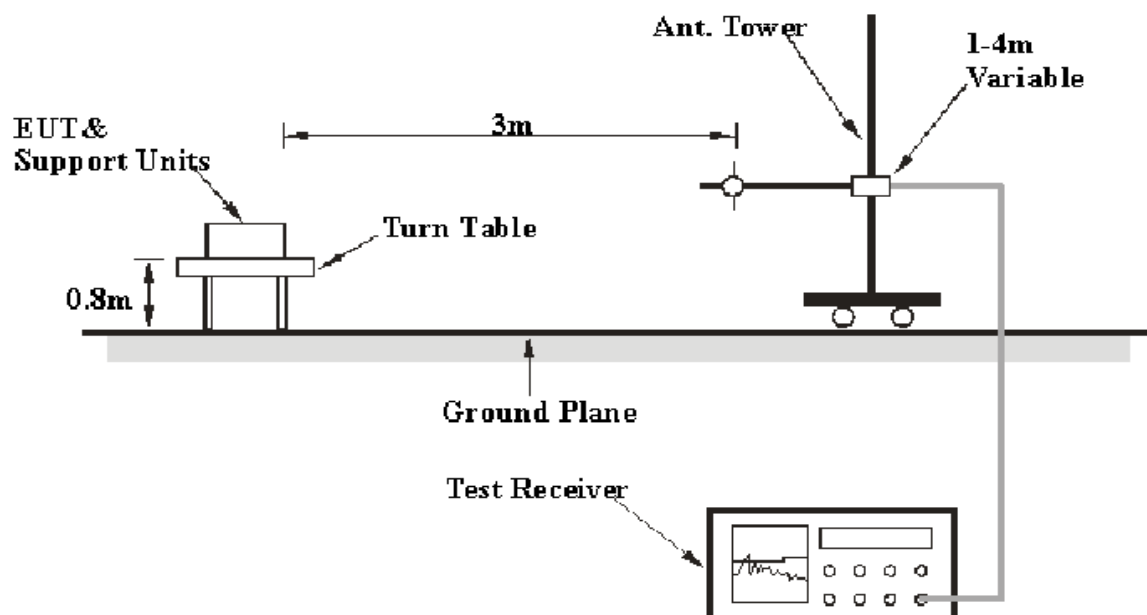

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-17	2014-09-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini	Amplifier	ZVA-183-S+	5969001149	2013-04-03	2014-04-03
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	CE Test software	EMC 32	V8.53	-	-

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

10.04 dB at 2388.1 MHz in the Vertical polarization for 802.11n-HT40 Mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	19~20 °C
Relative Humidity:	50~51 %
ATM Pressure:	100.0~100.1 kPa

The testing was performed by Rocky Kang on 2013-12-13 and 2013-12-14.

EUT operation mode: Transmitting

30 MHz-25 GHz:

802.11b Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	97.00	PK	219	1.3	H	6.13	103.13	/	/
2412.0	92.75	Ave.	219	1.3	H	6.13	98.88	/	/
2412.0	98.88	PK	63	1.5	V	6.13	105.01	/	/
2412.0	93.89	Ave.	63	1.5	V	6.13	100.02	/	/
2359.8	51.53	PK	232	1.3	H	5.48	57.01	74	16.99
2359.8	32.80	Ave.	232	1.3	H	5.48	38.28	54	15.72
2386.2	48.23	PK	342	1.4	V	6.13	54.36	74	19.64
2386.2	30.15	Ave.	342	1.4	V	6.13	36.28	54	17.72
2491.0	35.96	PK	318	1.2	V	7.21	43.17	74	30.83
2491.0	22.26	Ave.	318	1.2	V	7.21	29.47	54	24.53
4824.0	34.80	PK	324	1.3	H	12.40	47.20	74	26.80
4824.0	20.13	Ave.	324	1.3	H	12.40	32.53	54	21.47
7236.0	34.15	PK	123	1.2	V	16.62	50.77	74	23.23
7236.0	20.22	Ave.	123	1.2	V	16.62	36.84	54	17.16
9648.0	33.58	PK	131	1.5	V	19.29	52.87	74	21.13
9648.0	19.12	Ave.	131	1.5	V	19.29	38.41	54	15.59
Middle Channel (2437 MHz)									
2437.0	86.63	PK	302	1.3	H	7.21	93.84	/	/
2437.0	64.27	Ave.	302	1.3	H	7.21	71.48	/	/
2437.0	95.75	PK	235	1.5	V	7.21	102.96	/	/
2437.0	72.42	Ave.	235	1.5	V	7.21	79.63	/	/
2373.5	39.45	PK	240	1.5	V	6.13	45.58	74	28.42
2373.5	24.87	Ave.	240	1.5	V	6.13	31.00	54	23.00
2484.9	39.52	PK	342	1.3	V	7.21	46.73	74	27.27
2484.9	26.13	Ave.	342	1.3	V	7.21	33.34	54	20.66
2489.0	38.27	PK	34	1.3	H	7.21	45.48	74	28.52
2489.0	24.55	Ave.	34	1.3	H	7.21	31.76	54	22.24
4874.0	41.20	PK	332	1.2	V	12.46	53.66	74	20.34
4874.0	26.32	Ave.	332	1.2	V	12.46	38.78	54	15.22
7311.0	39.42	PK	101	1.4	V	16.49	55.91	74	18.09
7311.0	24.32	Ave.	101	1.4	V	16.49	40.81	54	13.19
9748.0	37.44	PK	29	1.4	H	19.40	56.84	74	17.16
9748.0	23.11	Ave.	29	1.4	H	19.40	42.51	54	11.49

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	99.93	PK	260	1.4	H	7.21	107.14	/	/
2462.0	94.84	Ave.	260	1.4	H	7.21	102.05	/	/
2462.0	93.41	PK	47	1.4	V	7.21	100.62	/	/
2462.0	88.12	Ave.	47	1.4	V	7.21	95.33	/	/
2381.6	45.40	PK	42	1.3	H	6.13	51.53	74	22.47
2381.6	30.68	Ave.	42	1.3	H	6.13	36.81	54	17.19
2485.7	40.25	PK	87	1.3	V	7.21	47.46	74	26.54
2485.7	28.14	Ave.	87	1.3	V	7.21	35.35	54	18.65
2495.9	46.41	PK	137	1.2	V	7.21	53.62	74	20.38
2495.9	33.26	Ave.	137	1.2	V	7.21	40.47	54	13.53
4924.0	35.87	PK	325	1.3	H	12.50	48.37	74	25.63
4924.0	21.06	Ave.	325	1.3	H	12.50	33.56	54	20.44
7386.0	35.21	PK	281	1.3	H	15.91	51.12	74	22.88
7386.0	20.98	Ave.	281	1.3	H	15.91	36.89	54	17.11
9848.0	34.25	PK	80	1.3	H	19.39	53.64	74	20.36
9848.0	19.28	Ave.	80	1.3	H	19.39	38.67	54	15.33

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	95.58	PK	13	1.5	H	6.13	101.71	/	/
2412.0	84.93	Ave.	13	1.5	H	6.13	91.06	/	/
2412.0	94.06	PK	119	1.2	V	6.13	100.19	/	/
2412.0	82.30	Ave.	119	1.2	V	6.13	88.43	/	/
2355.8	50.27	PK	2	1.4	H	5.48	55.75	74	18.25
2355.8	33.48	Ave.	2	1.4	H	5.48	38.96	54	15.04
2389.5	52.94	PK	87	1.3	V	6.13	59.07	74	14.93
2389.5	35.92	Ave.	87	1.3	V	6.13	42.05	54	11.95
2492.4	38.90	PK	141	1.2	H	7.21	46.11	74	27.89
2492.4	26.04	Ave.	141	1.2	H	7.21	33.25	54	20.75
4824.0	35.67	PK	9	1.4	H	12.40	48.07	74	25.93
4824.0	20.49	Ave.	9	1.4	H	12.40	32.89	54	21.11
7236.0	35.21	PK	77	1.4	V	16.62	51.83	74	22.17
7236.0	20.88	Ave.	77	1.4	V	16.62	37.50	54	16.50
9648.0	34.18	PK	37	1.4	V	19.29	53.47	74	20.53
9648.0	19.68	Ave.	37	1.4	V	19.29	38.97	54	15.03
Middle Channel (2437 MHz)									
2437.0	86.54	PK	142	1.4	H	7.21	93.75	/	/
2437.0	64.58	Ave.	142	1.4	H	7.21	71.79	/	/
2437.0	92.34	PK	293	1.3	V	7.21	99.55	/	/
2437.0	67.96	Ave.	293	1.3	V	7.21	75.17	/	/
2349.6	38.59	PK	359	1.4	V	5.48	44.07	74	29.93
2349.6	24.58	Ave.	359	1.4	V	5.48	30.06	54	23.94
2484.5	39.40	PK	63	1.4	H	7.21	46.61	74	27.39
2484.5	25.10	Ave.	63	1.4	H	7.21	32.31	54	21.69
2489.8	52.65	PK	282	1.2	H	7.21	59.86	74	14.14
2489.8	28.53	Ave.	282	1.2	H	7.21	35.74	54	18.26
4874.0	42.50	PK	102	1.2	V	12.46	54.96	74	19.04
4874.0	28.66	Ave.	102	1.2	V	12.46	41.12	54	12.88
7311.0	38.40	PK	115	1.3	V	16.49	54.89	74	19.11
7311.0	24.32	Ave.	115	1.3	V	16.49	40.81	54	13.19
9748.0	37.53	PK	321	1.4	H	19.40	56.93	74	17.07
9748.0	23.41	Ave.	321	1.4	H	19.40	42.81	54	11.19

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	93.94	PK	80	1.3	H	7.21	101.15	/	/
2462.0	83.67	Ave.	80	1.3	H	7.21	90.88	/	/
2462.0	92.44	PK	126	1.2	V	7.21	99.65	/	/
2462.0	82.79	Ave.	126	1.2	V	7.21	90.00	/	/
2382.1	45.07	PK	282	1.5	H	6.13	51.20	74	22.80
2382.1	33.69	Ave.	282	1.5	H	6.13	39.82	54	14.18
2485.2	49.44	PK	359	1.2	V	7.21	56.65	74	17.35
2485.2	29.73	Ave.	359	1.2	V	7.21	36.94	54	17.06
2491.0	45.28	PK	30	1.4	V	7.21	52.49	74	21.51
2491.0	33.15	Ave.	30	1.4	V	7.21	40.36	54	13.64
4924.0	36.31	PK	187	1.2	H	12.50	48.81	74	25.19
4924.0	22.19	Ave.	187	1.2	H	12.50	34.69	54	19.31
7386.0	35.53	PK	286	1.3	H	15.91	51.44	74	22.56
7386.0	22.18	Ave.	286	1.3	H	15.91	38.09	54	15.91
9848.0	34.64	PK	224	1.3	V	19.39	54.03	74	19.97
9848.0	21.05	Ave.	224	1.3	V	19.39	40.44	54	13.56

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	95.05	PK	50	1.5	H	6.13	101.18	/	/
2412.0	83.95	Ave.	50	1.5	H	6.13	90.08	/	/
2412.0	92.40	PK	155	1.3	V	6.13	98.53	/	/
2412.0	81.12	Ave.	155	1.3	V	6.13	87.25	/	/
2342.7	49.32	PK	202	1.3	H	5.48	54.80	74	19.20
2342.7	30.56	Ave.	202	1.3	H	5.48	36.04	54	17.96
2389.8	52.79	PK	268	1.2	H	6.13	58.92	74	15.08
2389.8	31.54	Ave.	268	1.2	H	6.13	37.67	54	16.33
2485.4	37.46	PK	274	1.2	H	7.21	44.67	74	29.33
2485.4	24.36	Ave.	274	1.2	H	7.21	31.57	54	22.43
4824.0	35.41	PK	313	1.2	H	12.40	47.81	74	26.19
4824.0	21.06	Ave.	313	1.2	H	12.40	33.46	54	20.54
7236.0	35.11	PK	29	1.4	V	16.62	51.73	74	22.27
7236.0	21.36	Ave.	29	1.4	V	16.62	37.98	54	16.02
9648.0	34.61	PK	7	1.2	H	19.29	53.90	74	20.10
9648.0	20.54	Ave.	7	1.2	H	19.29	39.83	54	14.17
Middle Channel (2437 MHz)									
2437.0	87.87	PK	211	1.5	H	7.21	95.08	/	/
2437.0	66.52	Ave.	211	1.5	H	7.21	73.73	/	/
2437.0	91.97	PK	92	1.5	V	7.21	99.18	/	/
2437.0	69.35	Ave.	92	1.5	V	7.21	76.56	/	/
2360.5	39.62	PK	270	1.3	V	5.48	45.10	74	28.90
2360.5	25.28	Ave.	270	1.3	V	5.48	30.76	54	23.24
2484.2	40.13	PK	26	1.3	H	7.21	47.34	74	26.66
2484.2	25.67	Ave.	26	1.3	H	7.21	32.88	54	21.12
2489.8	42.63	PK	165	1.4	H	7.21	49.84	74	24.16
2489.8	25.44	Ave.	165	1.4	H	7.21	32.65	54	21.35
4874.0	40.33	PK	213	1.4	V	12.46	52.79	74	21.21
4874.0	26.47	Ave.	213	1.4	V	12.46	38.93	54	15.07
7311.0	39.56	PK	184	1.5	V	16.49	56.05	74	17.95
7311.0	24.60	Ave.	184	1.5	V	16.49	41.09	54	12.91
9748.0	37.30	PK	151	1.4	V	19.40	56.70	74	17.30
9748.0	22.14	Ave.	151	1.4	V	19.40	41.54	54	12.46

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	94.25	PK	92	1.3	H	7.21	101.46	/	/
2462.0	82.26	Ave.	92	1.3	H	7.21	89.47	/	/
2462.0	90.15	PK	204	1.5	V	7.21	97.36	/	/
2462.0	79.42	Ave.	204	1.5	V	7.21	86.63	/	/
2348.3	44.36	PK	289	1.2	H	5.48	49.84	74	24.16
2348.3	32.34	Ave.	289	1.2	H	5.48	37.82	54	16.18
2381.6	46.95	PK	158	1.2	V	6.13	53.08	74	20.92
2381.6	34.30	Ave.	158	1.2	V	6.13	40.43	54	13.57
2485.6	53.32	PK	15	1.4	V	7.21	60.53	74	13.47
2485.6	30.98	Ave.	15	1.4	V	7.21	38.19	54	15.81
4924.0	36.21	PK	269	1.3	H	12.50	48.71	74	25.29
4924.0	21.09	Ave.	269	1.3	H	12.50	33.59	54	20.41
7386.0	35.20	PK	98	1.5	H	15.91	51.11	74	22.89
7386.0	20.58	Ave.	98	1.5	H	15.91	36.49	54	17.51
9848.0	34.67	PK	5	1.4	V	19.39	54.06	74	19.94
9848.0	20.86	Ave.	5	1.4	V	19.39	40.25	54	13.75

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
2422.0	91.23	PK	348	1.2	H	6.13	97.36	/	/
2422.0	78.29	Ave.	348	1.2	H	6.13	84.42	/	/
2422.0	86.84	PK	118	1.2	V	6.13	92.97	/	/
2422.0	75.49	Ave.	118	1.2	V	6.13	81.62	/	/
2337.5	52.16	PK	157	1.3	H	5.48	57.64	74	16.36
2337.5	31.13	Ave.	157	1.3	H	5.48	36.61	54	17.39
2388.1	57.83	PK	93	1.4	V	6.13	63.96	74	10.04
2388.1	35.59	Ave.	93	1.4	V	6.13	41.72	54	12.28
2485.2	38.70	PK	185	1.3	H	7.21	45.91	74	28.09
2485.2	24.36	Ave.	185	1.3	H	7.21	31.57	54	22.43
4844.0	36.21	PK	96	1.2	H	12.40	48.61	74	25.39
4844.0	22.09	Ave.	96	1.2	H	12.40	34.49	54	19.51
7266.0	35.21	PK	209	1.5	V	16.62	51.83	74	22.17
7266.0	21.88	Ave.	209	1.5	V	16.62	38.50	54	15.50
9688.0	34.52	PK	40	1.2	V	19.29	53.81	74	20.19
9688.0	20.43	Ave.	40	1.2	V	19.29	39.72	54	14.28
Middle Channel (2437 MHz)									
2437.0	85.76	PK	36	1.5	H	7.21	92.97	/	/
2437.0	63.10	Ave.	36	1.5	H	7.21	70.31	/	/
2437.0	87.97	PK	172	1.4	V	7.21	95.18	/	/
2437.0	66.50	Ave.	172	1.4	V	7.21	73.71	/	/
2367.2	39.65	PK	342	1.2	V	5.48	45.13	74	28.87
2367.2	26.30	Ave.	342	1.2	V	5.48	31.78	54	22.22
2484.2	41.82	PK	314	1.3	H	7.21	49.03	74	24.97
2484.2	27.01	Ave.	314	1.3	H	7.21	34.22	54	19.78
2487.4	40.12	PK	101	1.4	H	7.21	47.33	74	26.67
2487.4	26.31	Ave.	101	1.4	H	7.21	33.52	54	20.48
4874.0	39.16	PK	182	1.3	V	12.46	51.62	74	22.38
4874.0	24.03	Ave.	182	1.3	V	12.46	36.49	54	17.51
7311.0	38.45	PK	3	1.2	V	16.49	54.94	74	19.06
7311.0	24.36	Ave.	3	1.2	V	16.49	40.85	54	13.15
9748.0	37.15	PK	182	1.5	H	19.40	56.55	74	17.45
9748.0	22.18	Ave.	182	1.5	H	19.40	41.58	54	12.42

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
2452.0	90.34	PK	91	1.4	H	7.21	97.55	/	/
2452.0	78.00	Ave.	91	1.4	H	7.21	85.21	/	/
2452.0	88.17	PK	110	1.2	V	7.21	95.38	/	/
2452.0	75.48	Ave.	110	1.2	V	7.21	82.69	/	/
2389.7	45.18	PK	288	1.3	H	6.13	51.31	74	22.69
2389.7	29.73	Ave.	288	1.3	H	6.13	35.86	54	18.14
2484.2	53.61	PK	210	1.5	V	7.21	60.82	74	13.18
2484.2	28.28	Ave.	210	1.5	V	7.21	35.49	54	18.51
2492.9	50.37	PK	266	1.4	H	7.21	57.58	74	16.42
2492.9	27.16	Ave.	266	1.4	H	7.21	34.37	54	19.63
4904.0	36.71	PK	181	1.4	H	12.46	49.17	74	24.83
4904.0	21.11	Ave.	181	1.4	H	12.46	33.57	54	20.43
7356.0	35.10	PK	15	1.2	H	15.91	51.01	74	22.99
7356.0	20.33	Ave.	15	1.2	H	15.91	36.24	54	17.76
9808.0	34.75	PK	20	1.3	V	19.29	54.04	74	19.96
9808.0	19.86	Ave.	20	1.3	V	19.29	39.15	54	14.85

Note:

Corrected Amplitude = Corrected Factor + Reading


Corrected Factor=Antenna Factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit – Corr. Amplitude


For below 1 GHz, the data which is 20dB to the limit was not recorded.

Conducted Spurious Emissions at Antenna Port


802.11b Low Channel

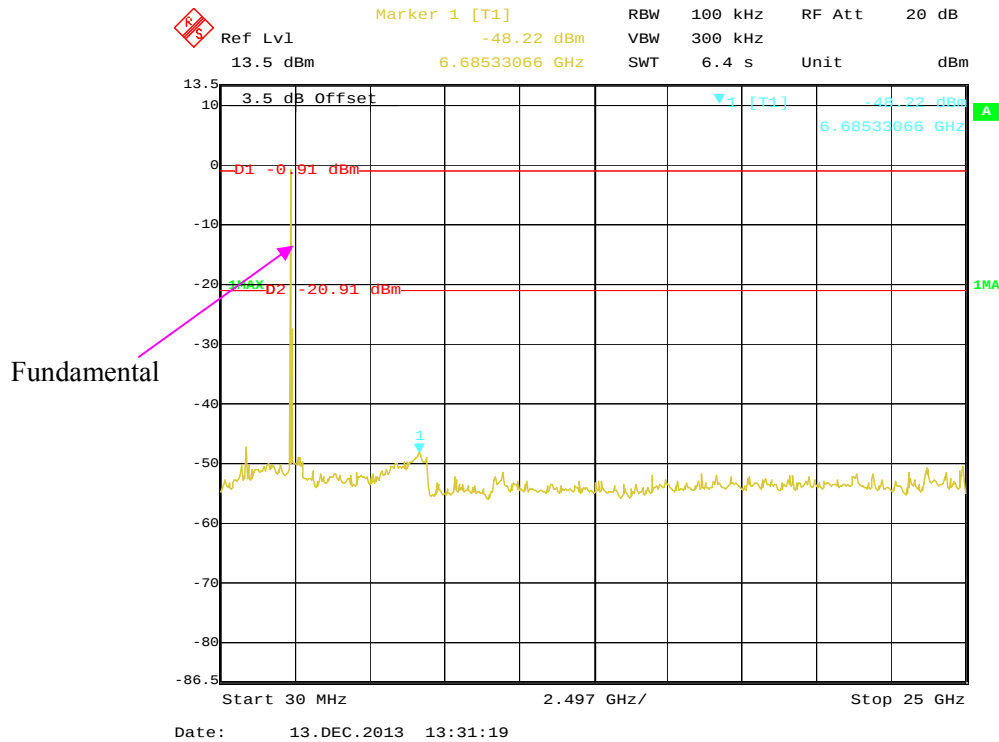


802.11b Middle Channel

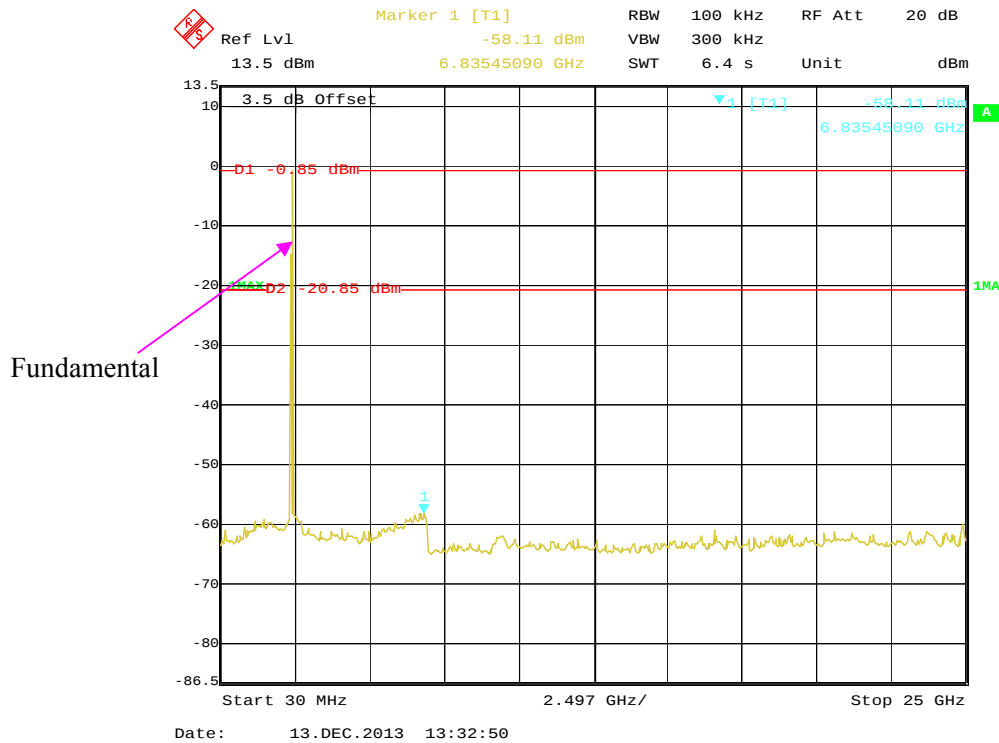


802.11b High Channel

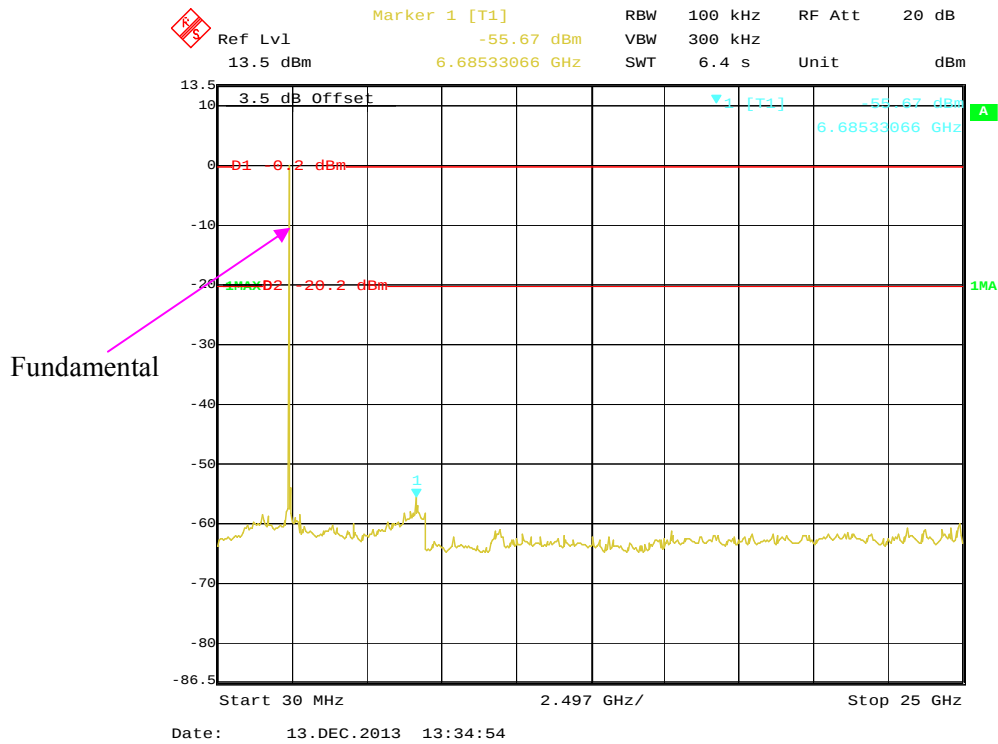


802.11g Low Channel

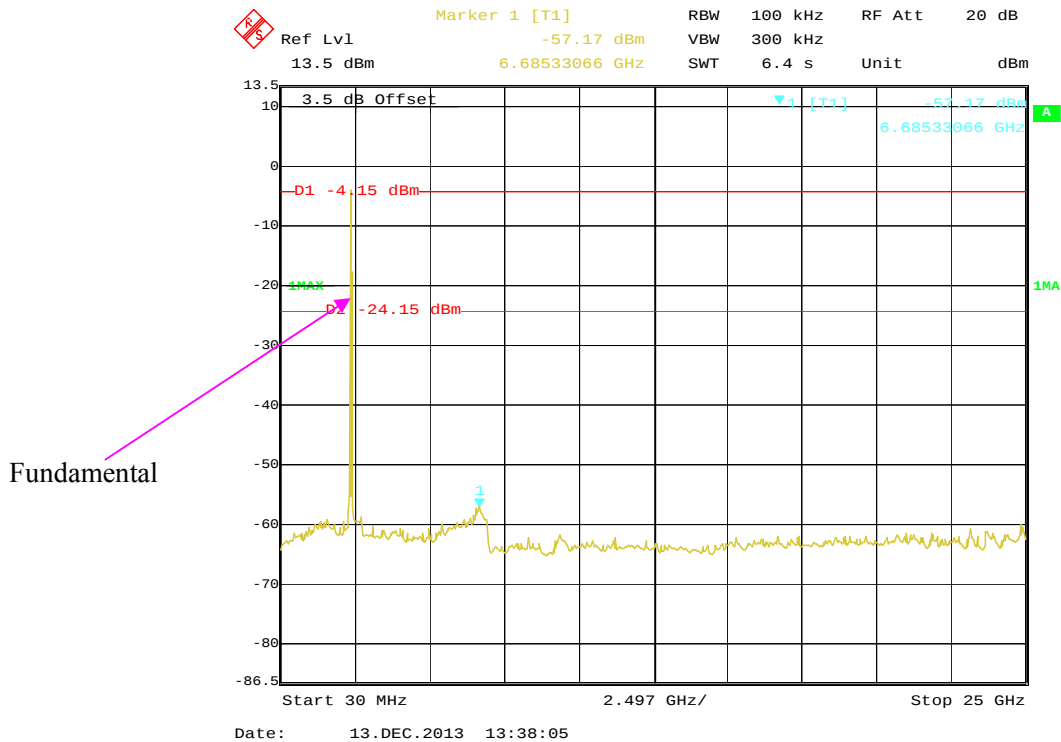


802.11g Middle Channel

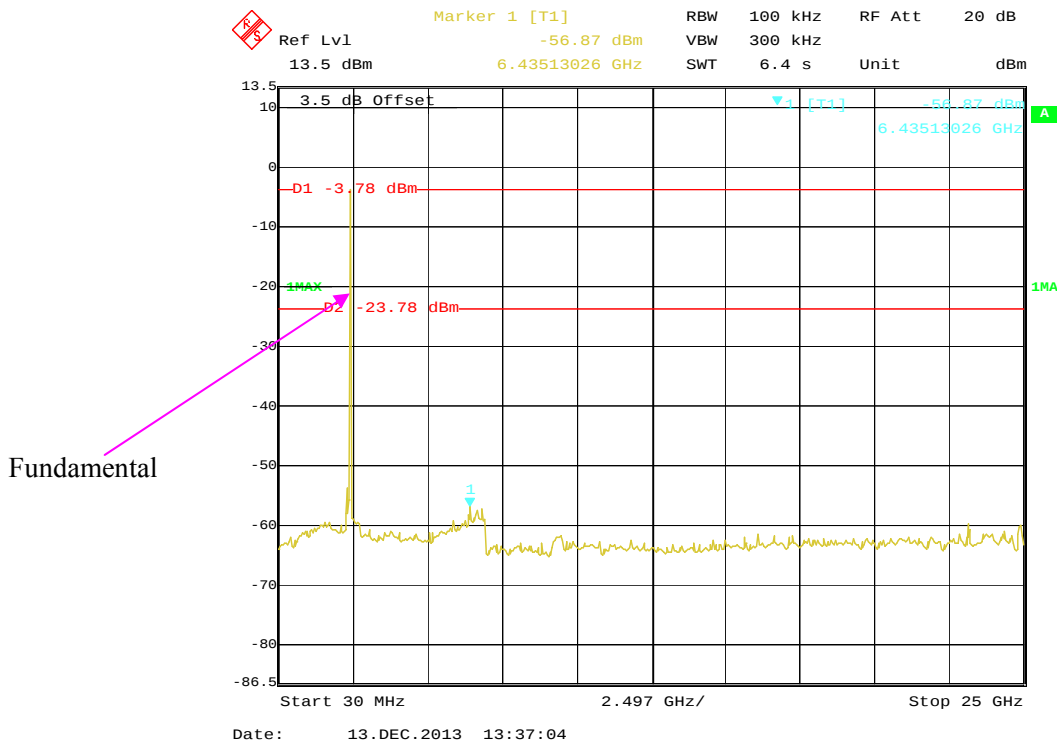


802.11g High Channel

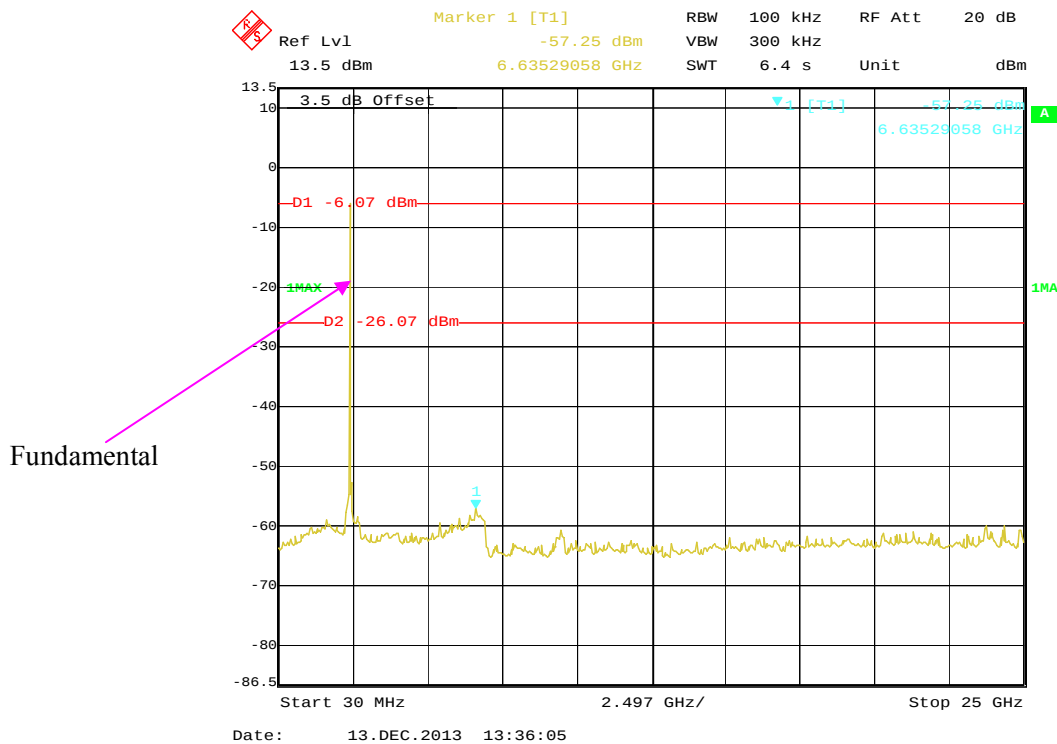


802.11n-HT20 Low Channel

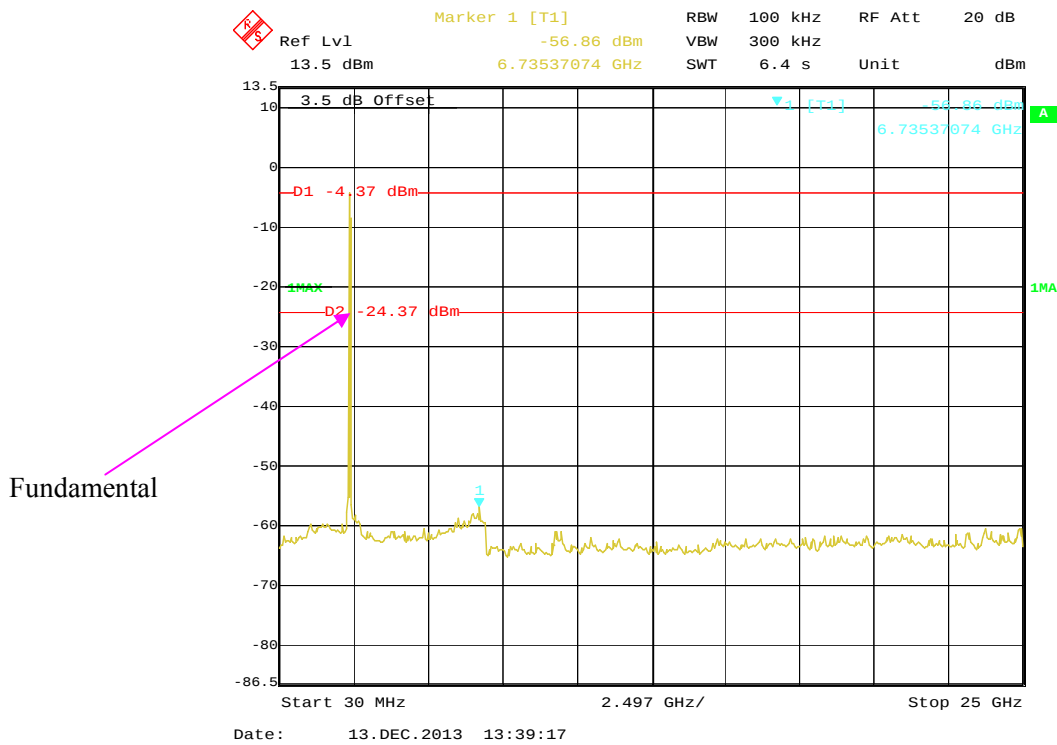


802.11n-HT20 Middle Channel

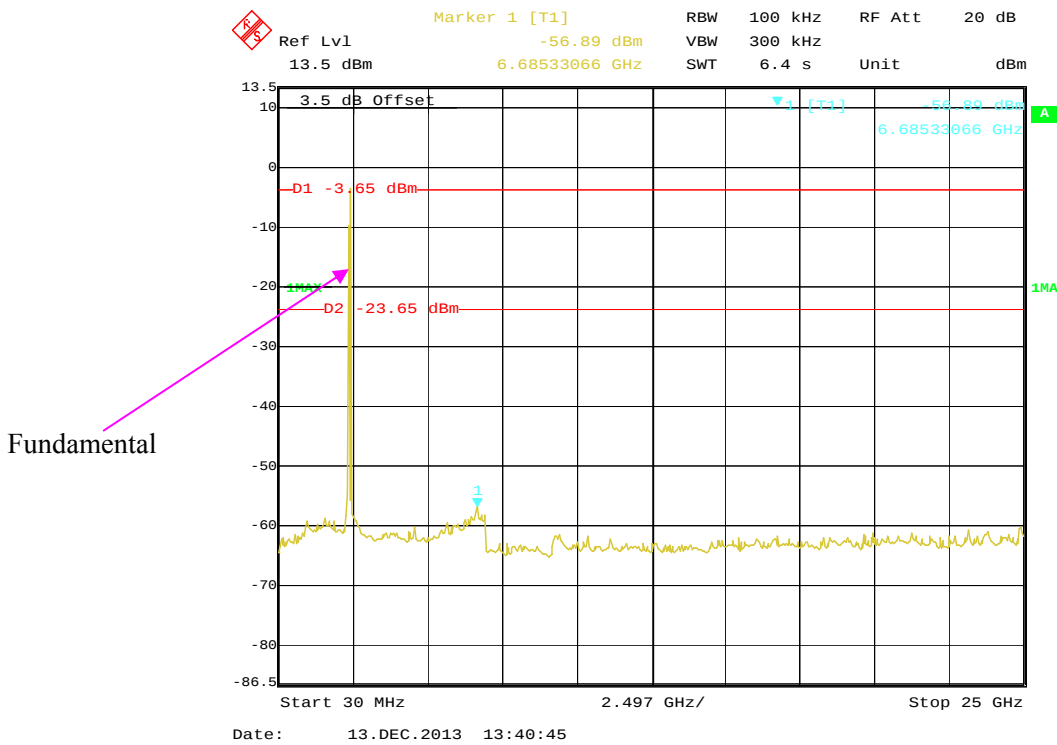


802.11n-HT20 High Channel

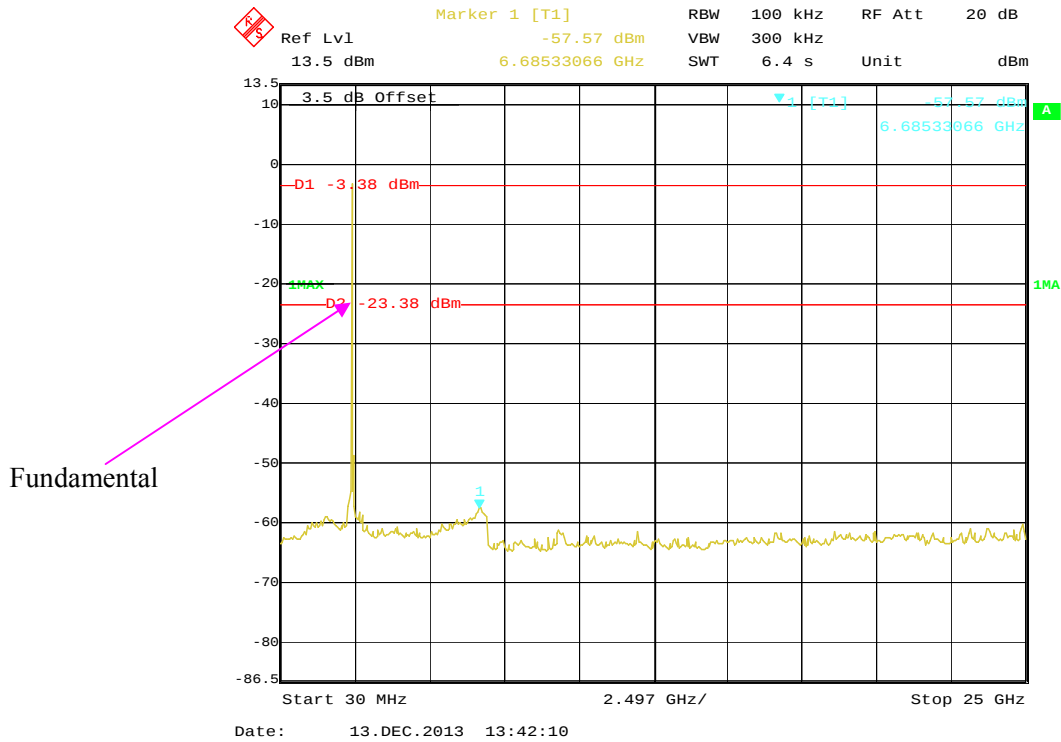


802.11n-HT40 Low Channel

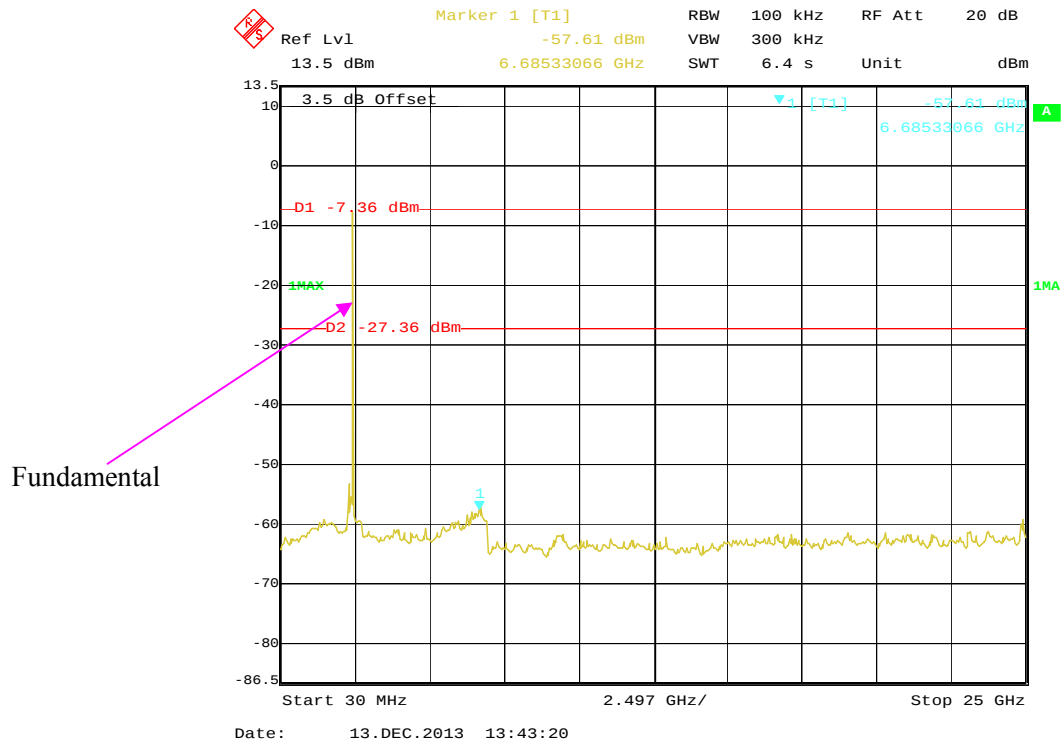

802.11n-HT40 Middle Channel

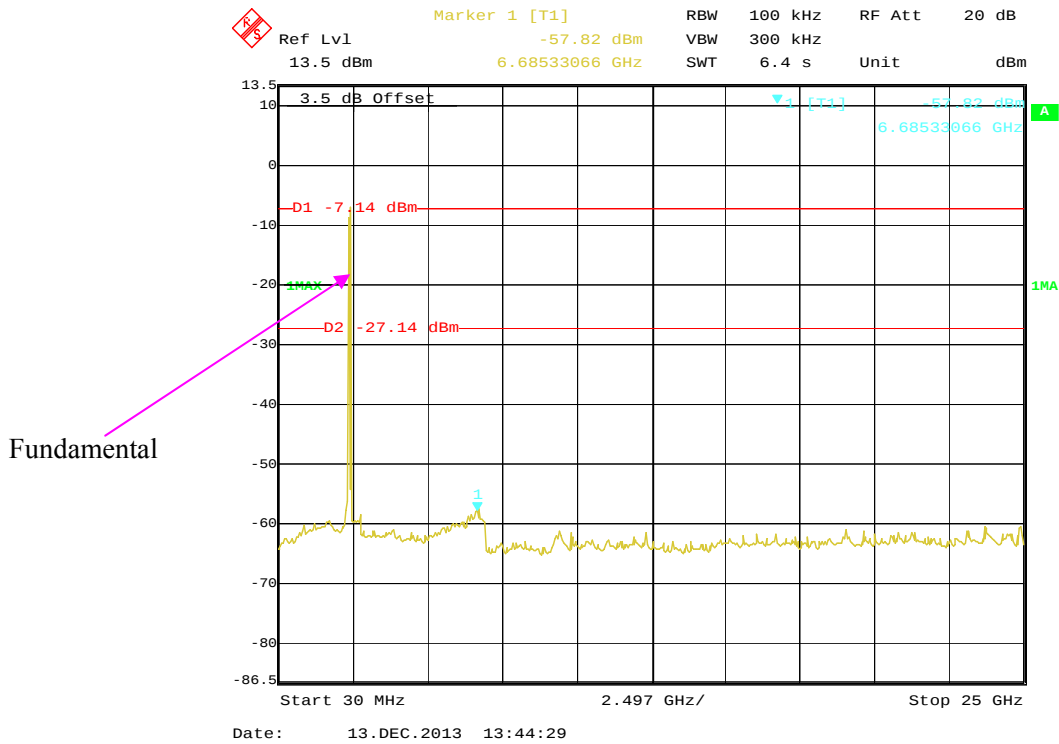

802.11n-HT40 High Channel

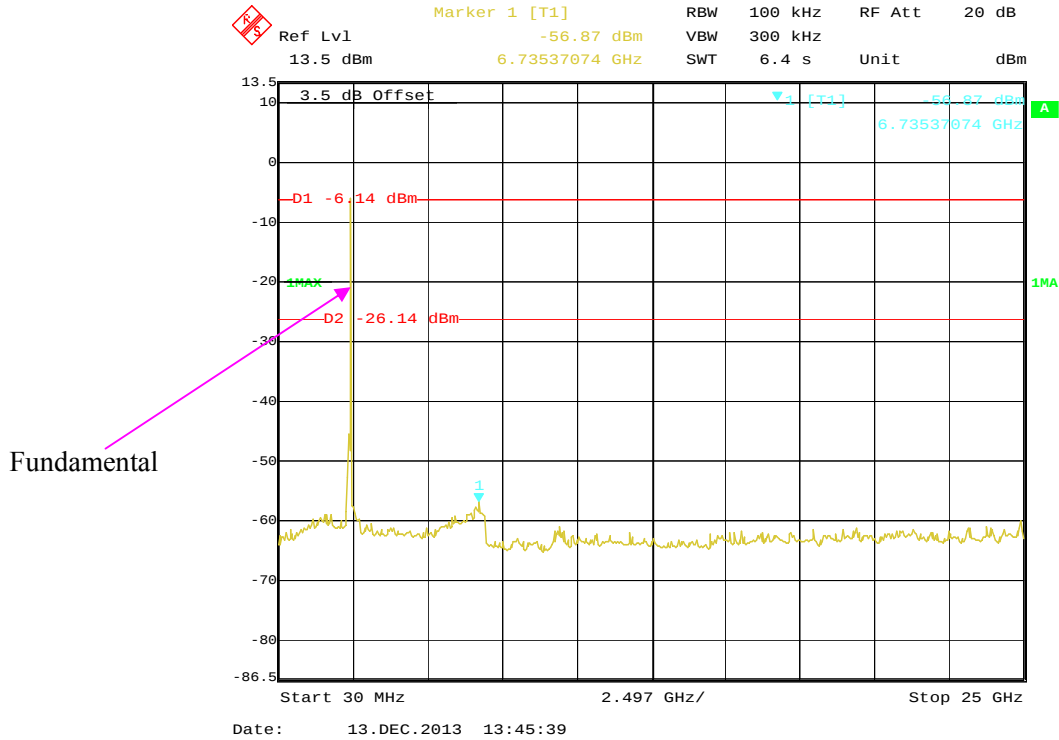

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	51 %
ATM Pressure:	100.0 kPa

The testing was performed by Rocky Kang on 2013-12-13.


Test Result: Pass.

Please refer to the following tables and plots.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	10.22	≥ 500
Middle	2437	10.22	≥ 500
High	2462	10.22	≥ 500
802.11g mode			
Low	2412	16.47	≥ 500
Middle	2437	16.47	≥ 500
High	2462	16.47	≥ 500
802.11n-HT20 mode			
Low	2412	17.74	≥ 500
Middle	2437	17.74	≥ 500
High	2462	17.74	≥ 500
802.11n-HT40 mode			
Low	2422	36.31	≥ 500
Middle	2437	36.31	≥ 500
High	2452	36.31	≥ 500


802.11b Low Channel

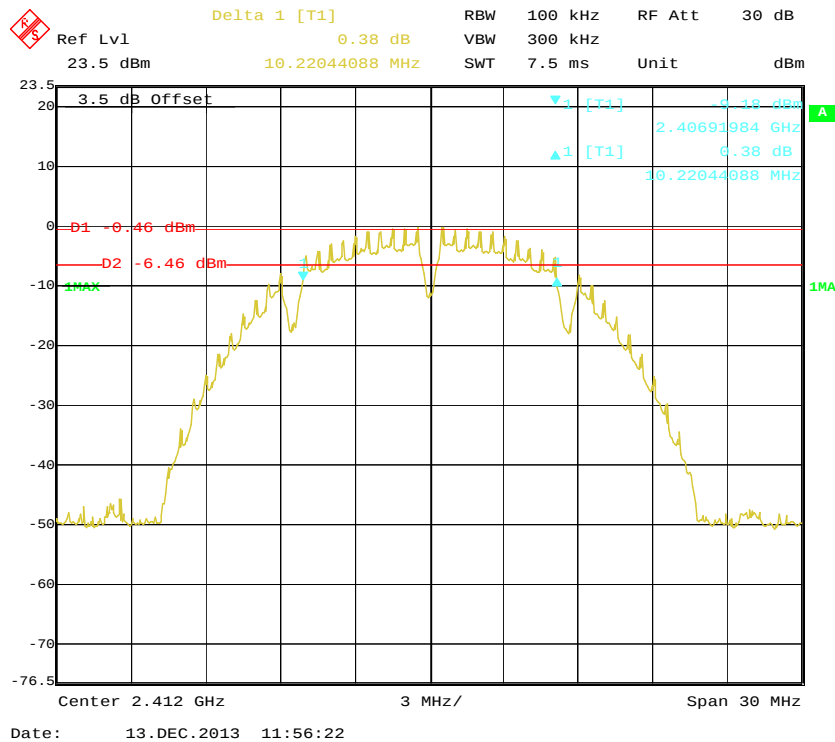


802.11b Middle Channel

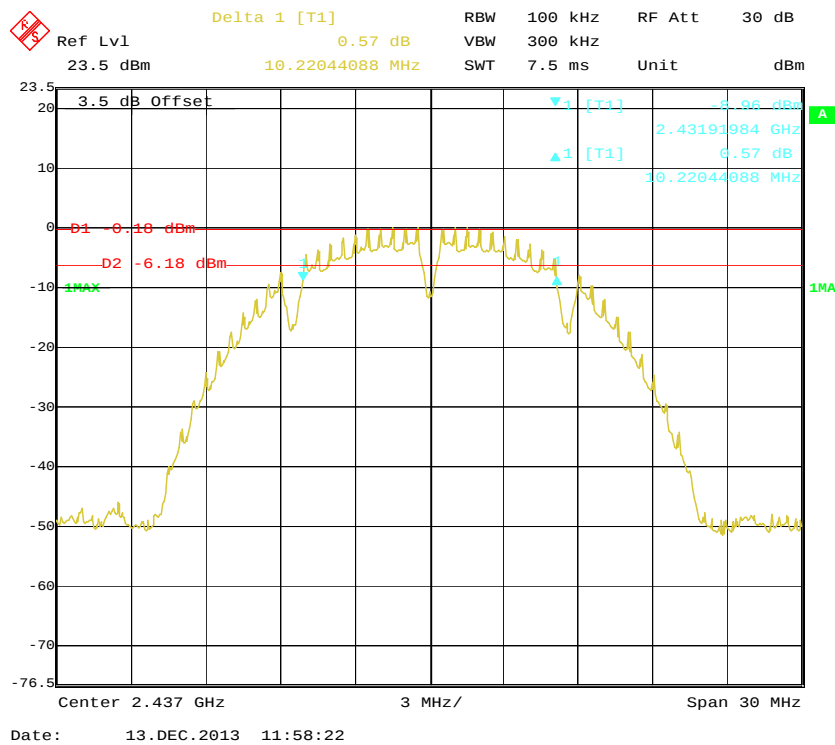


802.11b High Channel

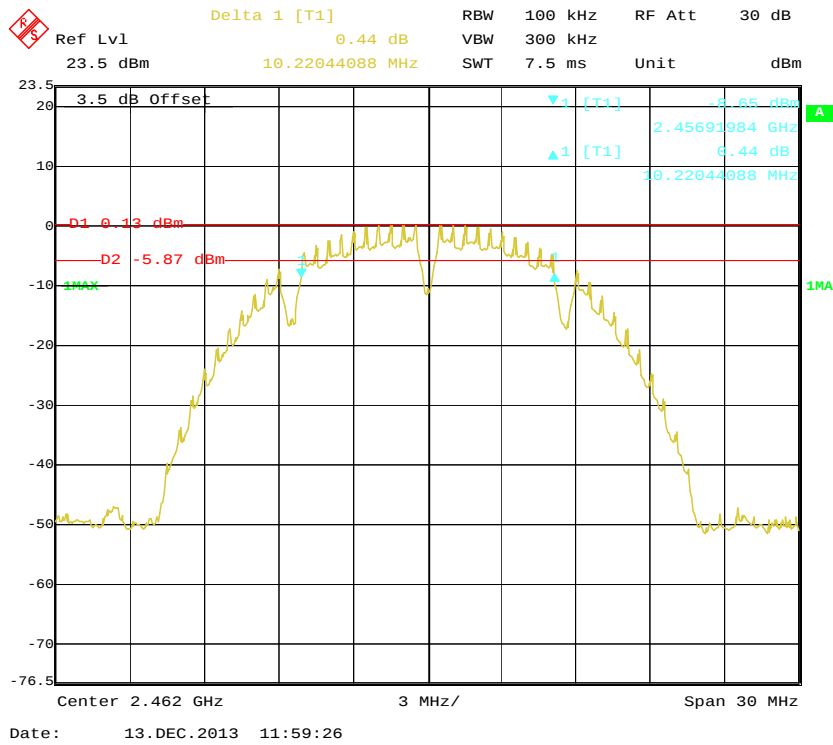


802.11g Low Channel

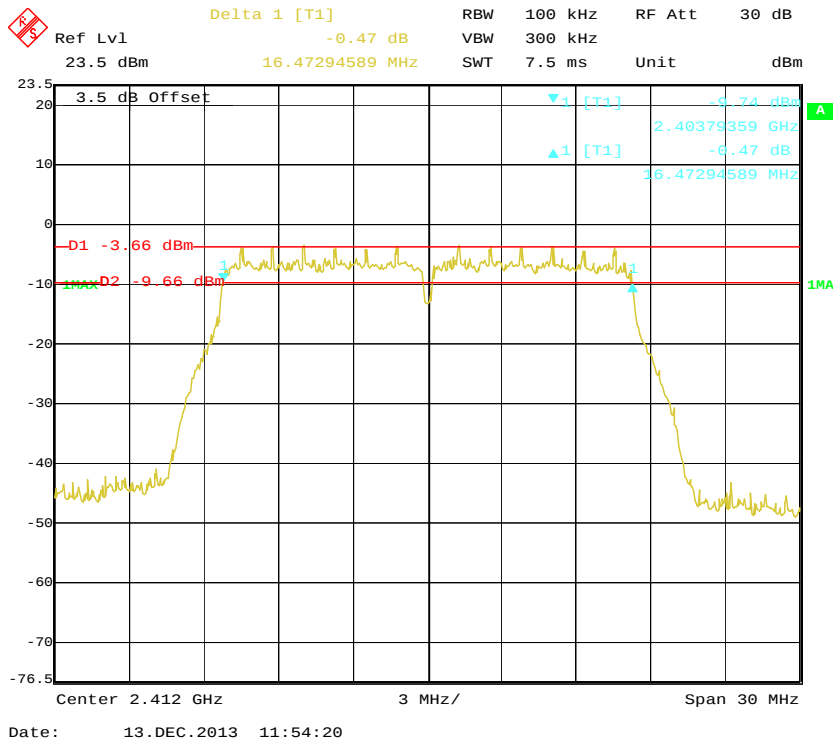


802.11g Middle Channel

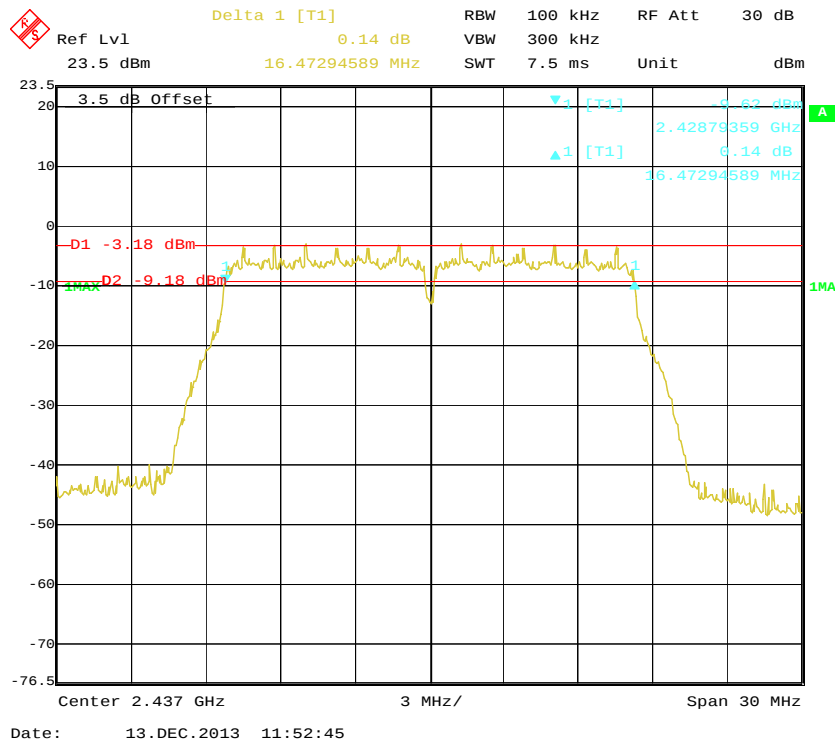


802.11g High Channel

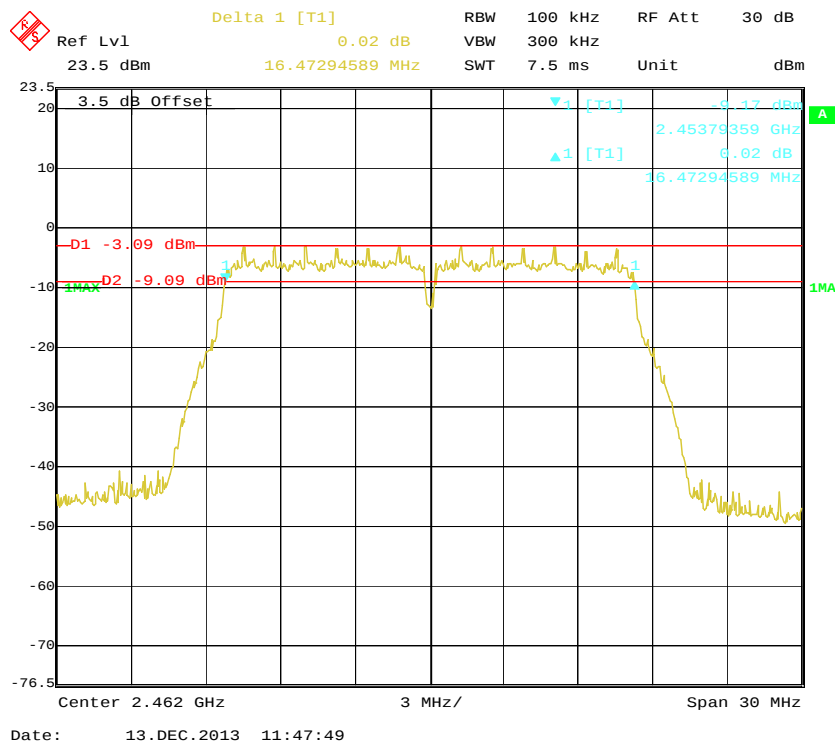


802.11n-HT20 Low Channel

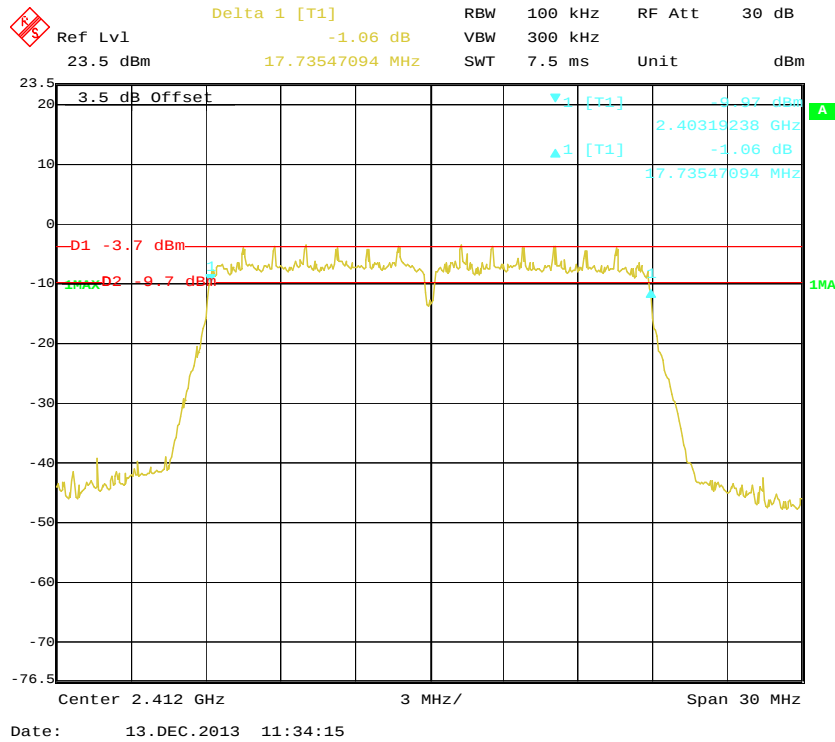


802.11n-HT20 Middle Channel

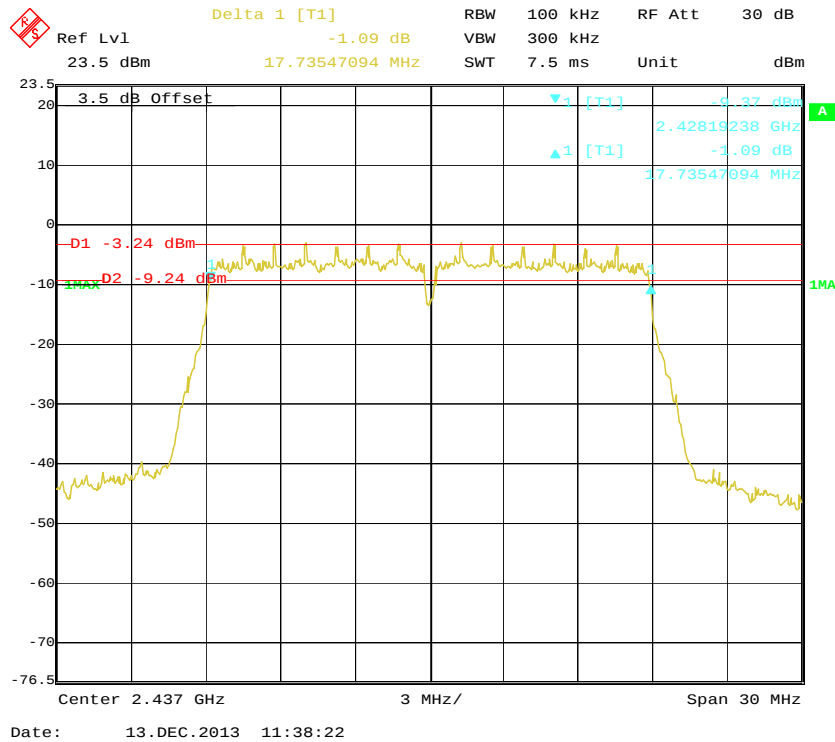

802.11n-HT20 High Channel

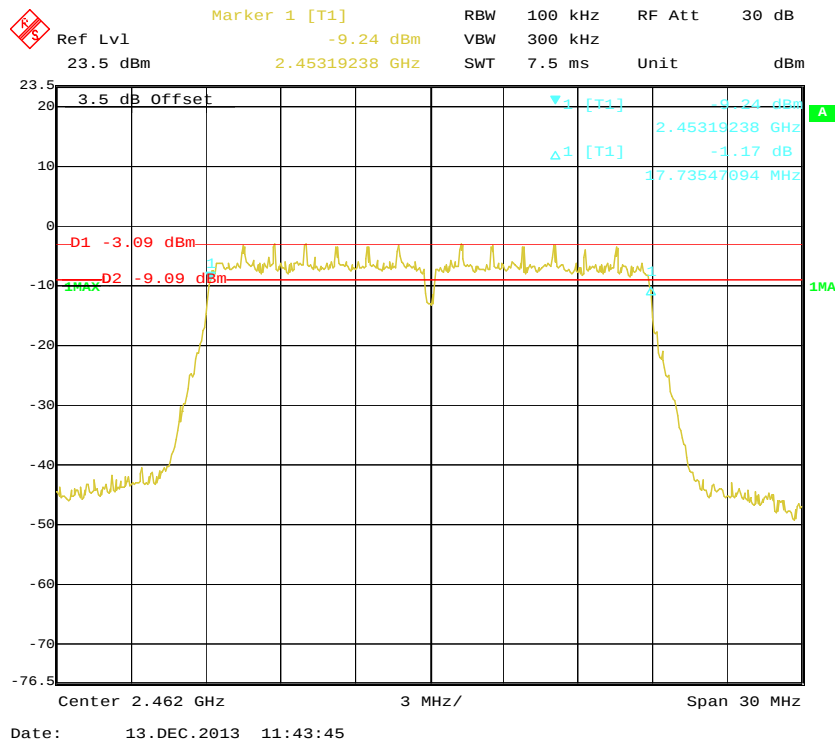

802.11n-HT40 Low Channel

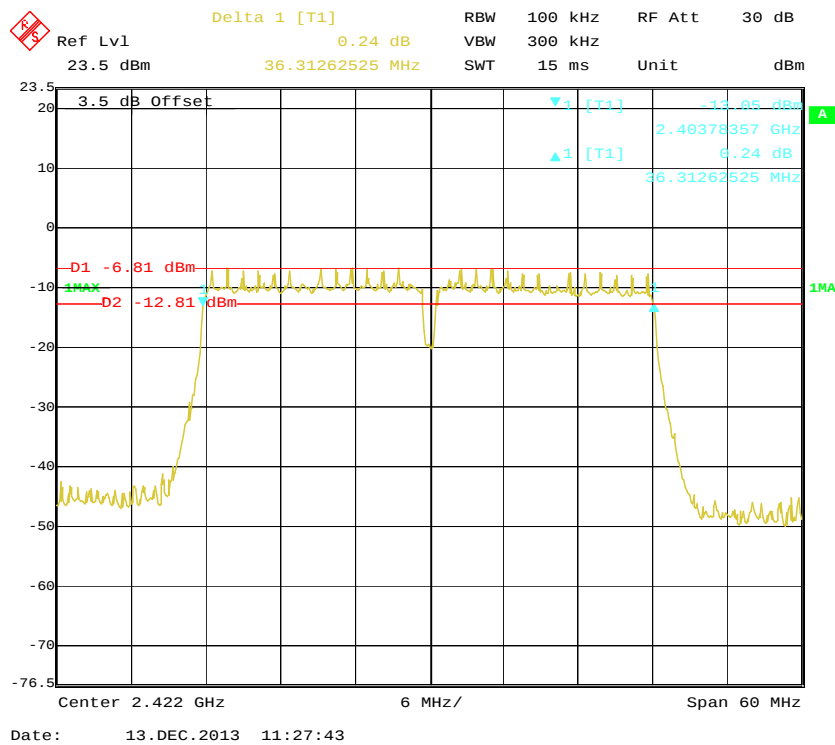

Ref Lvl 23.5 dBm
 Delta 1 [T1] 0.18 dB
 RBW 100 kHz
 VBW 300 kHz
 SWT 15 ms
 RF Att 30 dB
 Unit dBm

3.5 dB Offset

D1 -6.55 dBm
 D2 -12.55 dBm

Center 2.437 GHz
 6 MHz/
 Span 60 MHz

Delta 1 [T1] 0.18 dB
 2.41878357 GHz
 36.31262525 MHz

Delta 1 [T1] 0.59 dB
 RBW 100 kHz RF Att 30 dB
 Ref Lvl 23.5 dBm 36.31262525 MHz
 VBW 300 kHz
 SWT 15 ms Unit dBm

3.5 dB Offset
 -12.13 dBm
 2.43378357 GHz
 0.59 dB
 36.31262525 MHz

-D1 -6.39 dBm
 -D2 -12.39 dBm

Center 2.452 GHz
 6 MHz/
 Span 60 MHz

Date: 13.DEC.2013 11:12:44

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31
HP	Power Meter	EPM-441A	GB37481494	2013-11-24	2014-11-24

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	50~54 %
ATM Pressure:	100.1 kPa


The testing was performed by Rocky Kang on 2013-12-13.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Maximum Conducted Average Output Power (dBm)	Limit (dBm)
802.11b				
Low	2412	11.37	8.73	30
Middle	2437	11.89	8.87	30
High	2462	12.03	9.02	30
802.11g				
Low	2412	15.80	9.39	30
Middle	2437	16.38	9.26	30
High	2462	16.46	8.95	30
802.11n-HT20				
Low	2412	15.91	8.69	30
Middle	2437	16.14	8.95	30
High	2462	16.55	9.17	30
802.11n-HT40				
Low	2422	15.54	8.62	30
Middle	2437	16.01	8.71	30
High	2452	16.13	8.90	30

Note: Average output power test by power meter.


802.11b, RF Peak Output Power, Low Channel

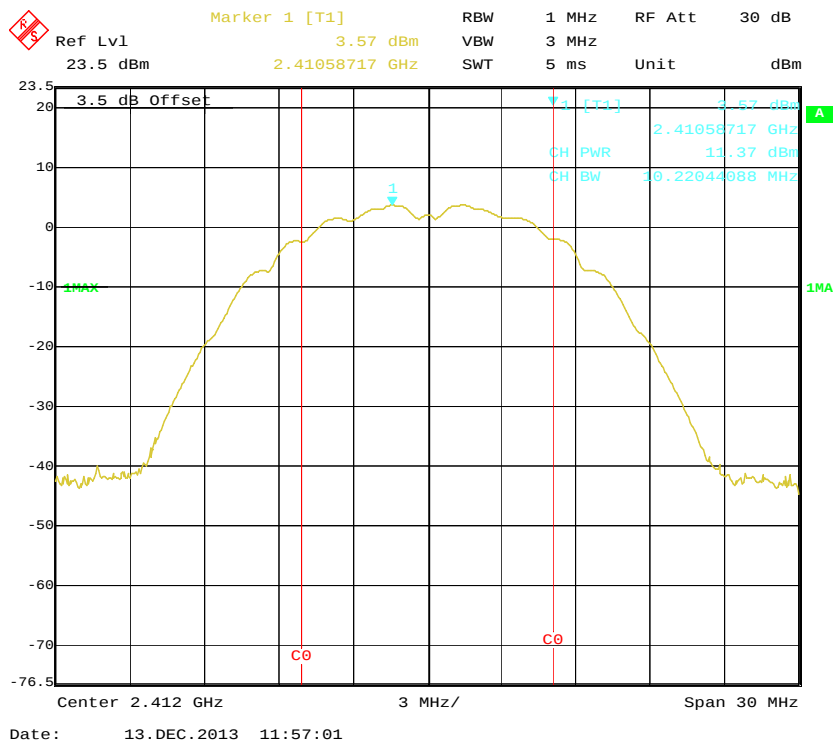


802.11b, RF Peak Output Power, Middle Channel

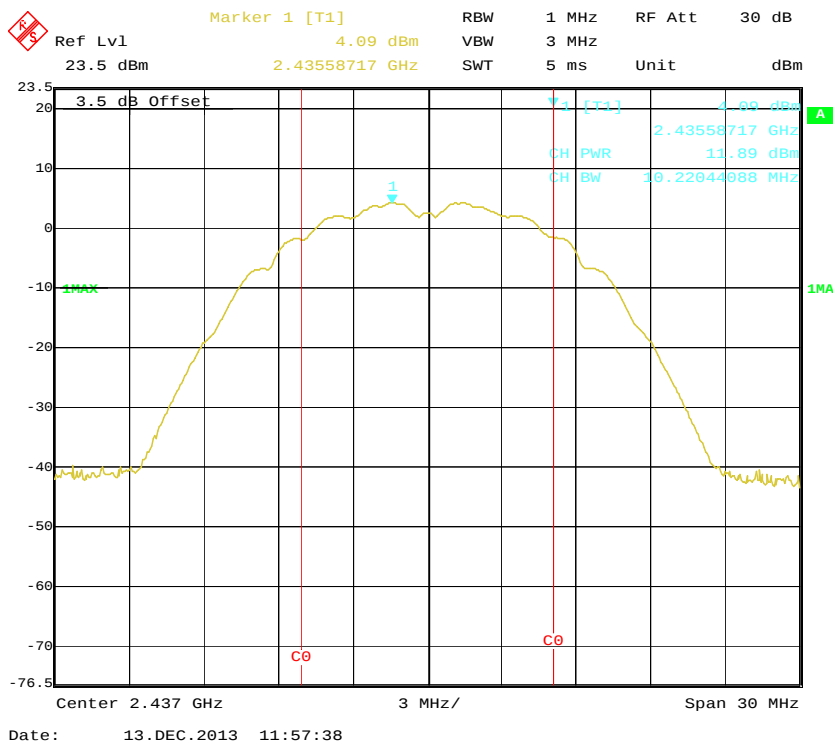


802.11b, RF Peak Output Power, High Channel

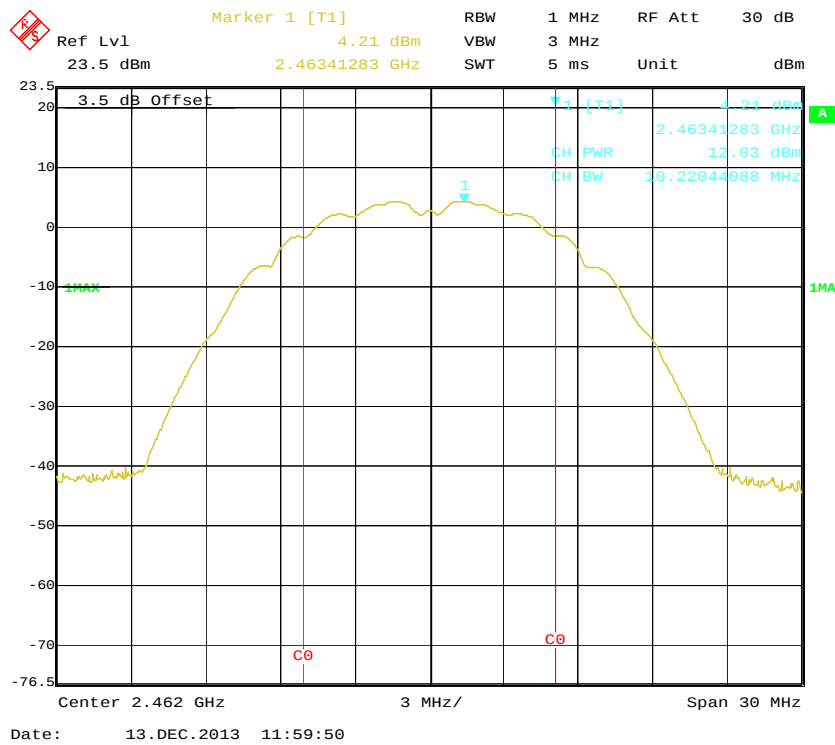


802.11g, RF Peak Output Power, Low Channel

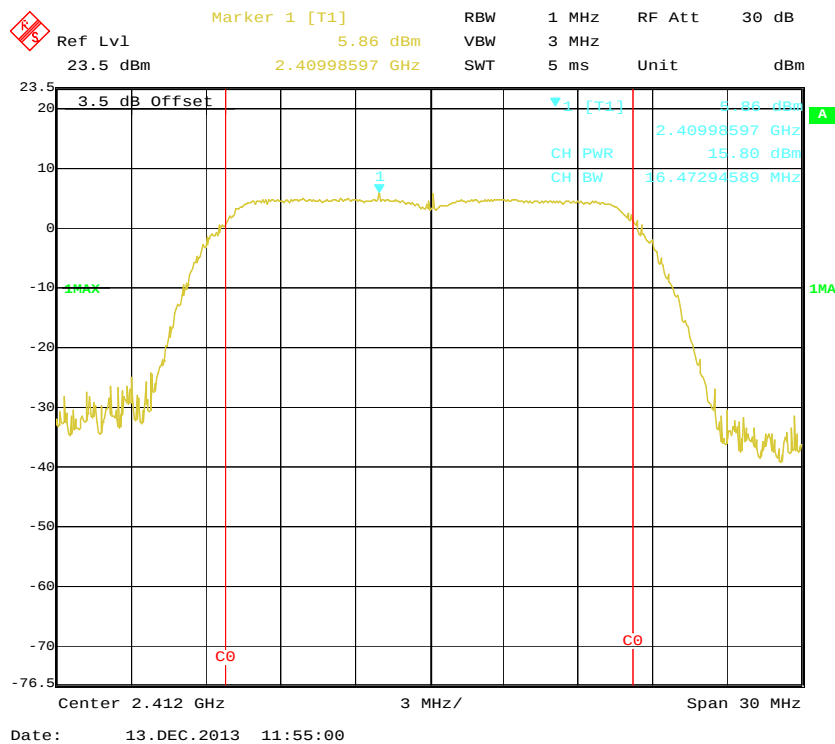


802.11g, RF Peak Output Power, Middle Channel

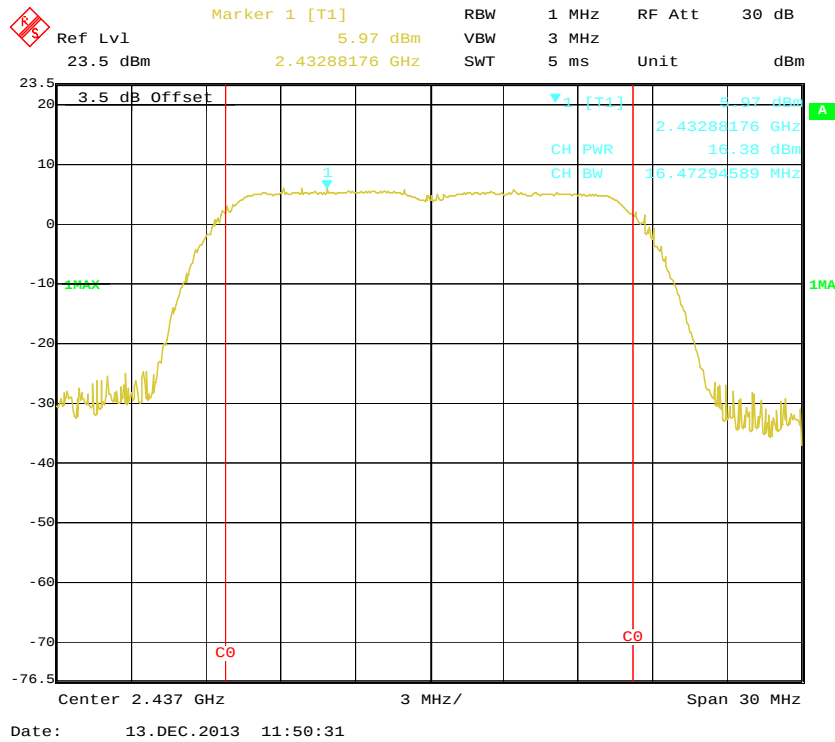


802.11g, RF Peak Output Power, High Channel

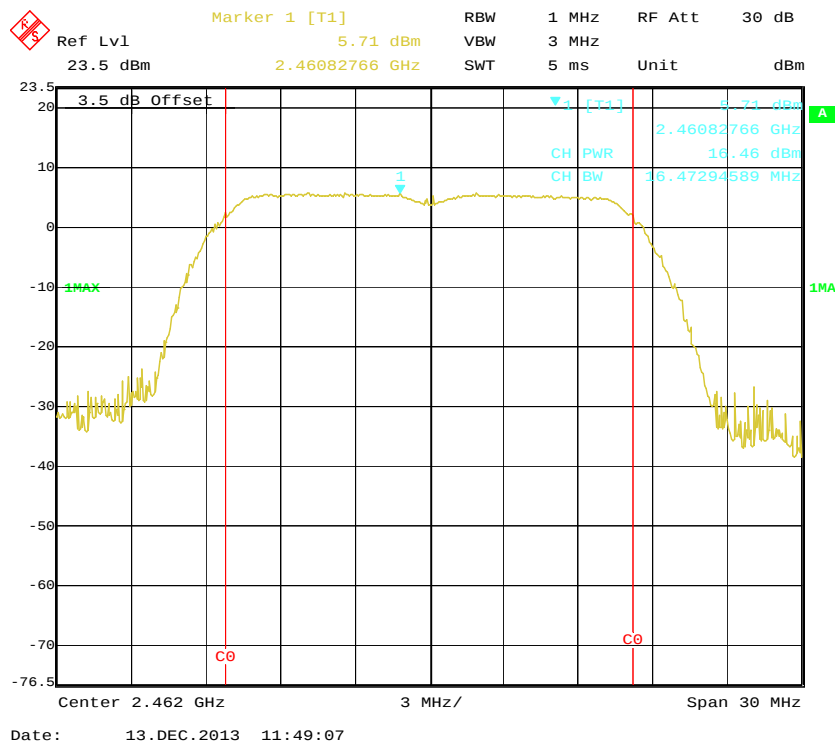


802.11n-HT20 RF Peak Output Power, Low Channel

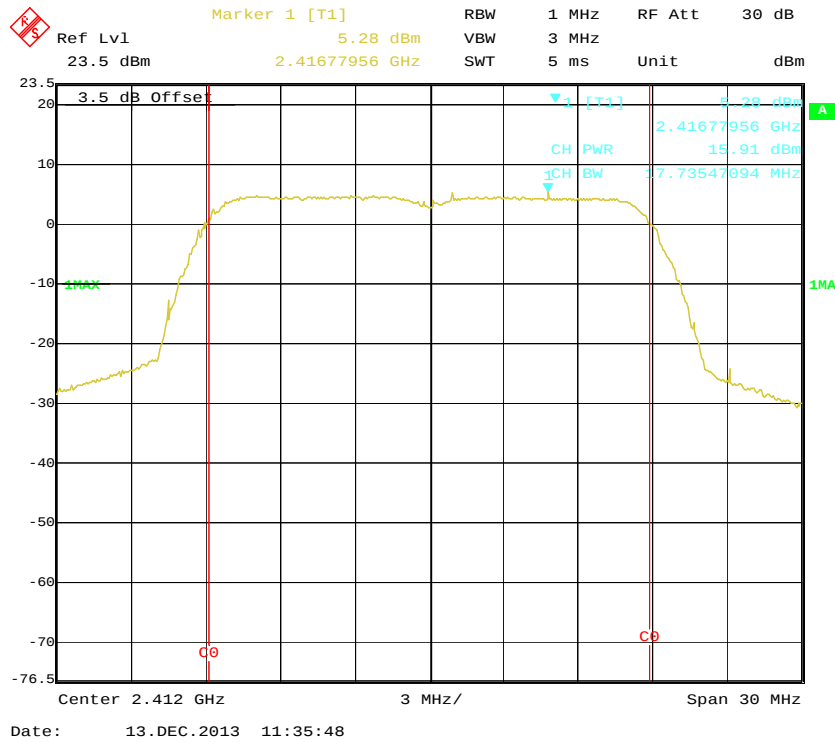


802.11n-HT20, RF Peak Output Power, Middle Channel

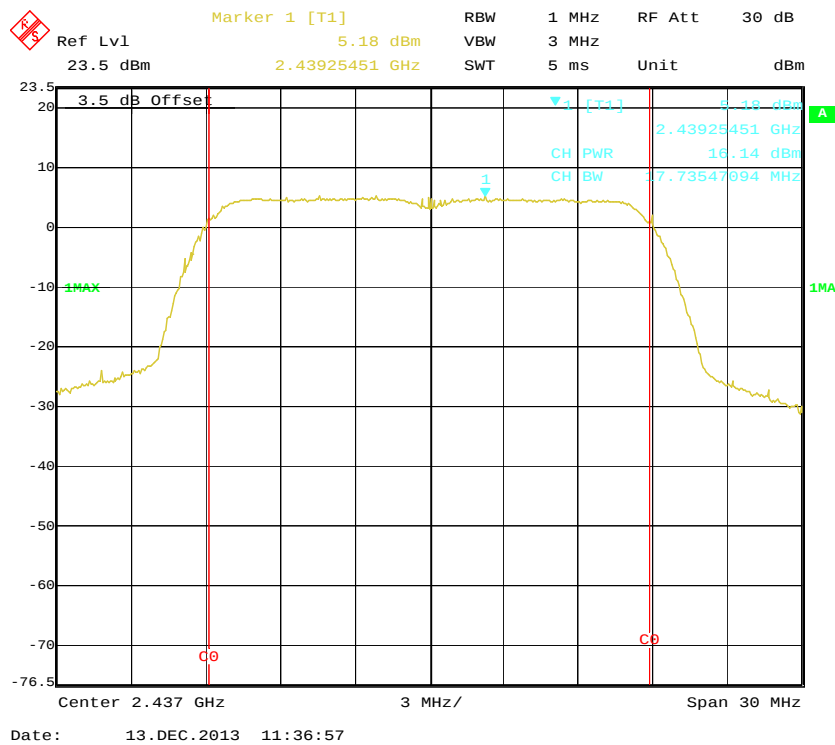


802.11n-HT20, RF Peak Output Power, High Channel

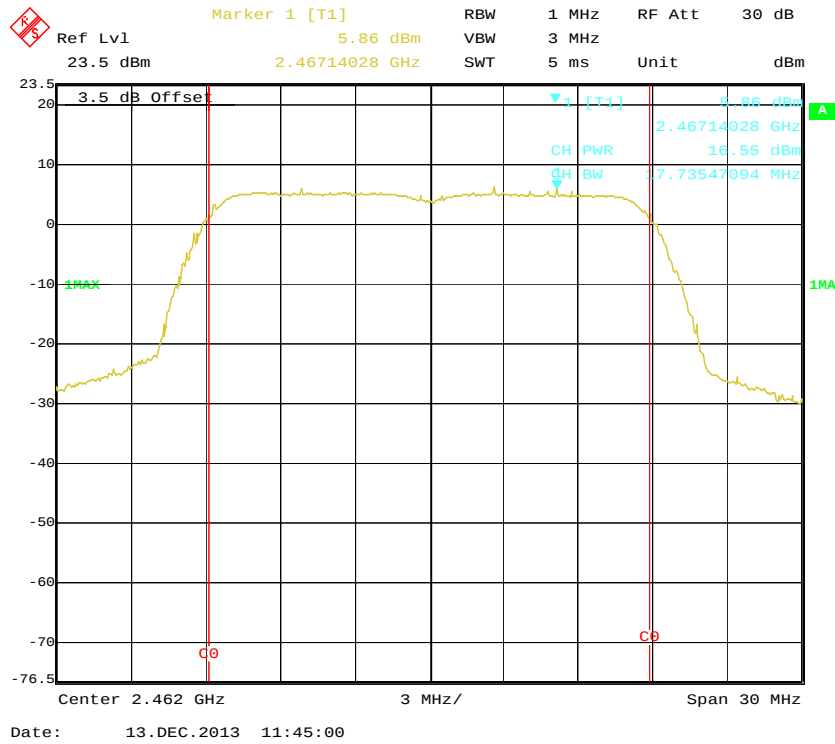


802.11n-HT40, RF Peak Output Power, Low Channel

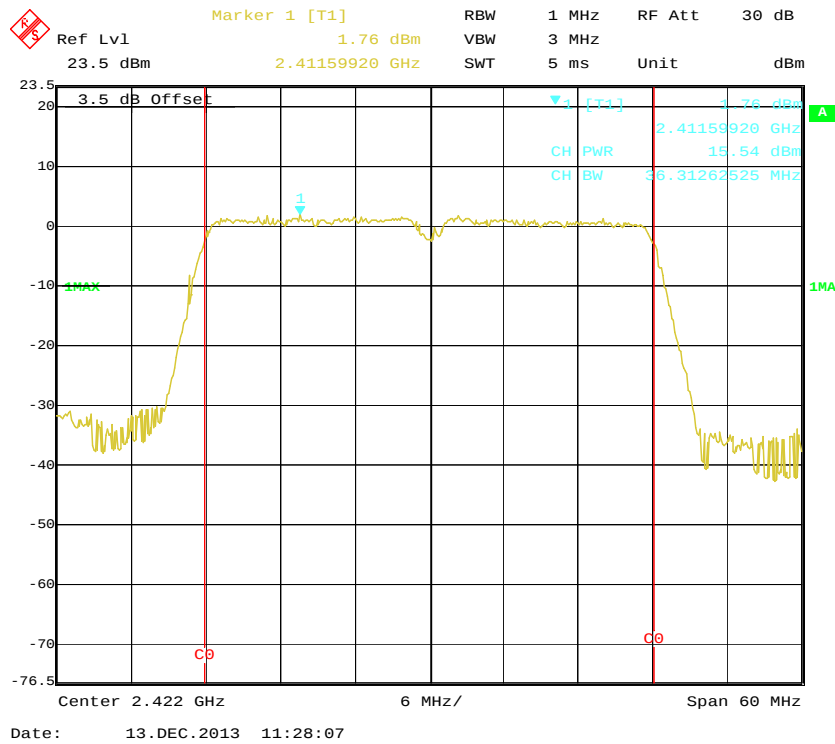

802.11n-HT40, RF Peak Output Power, Middle Channel

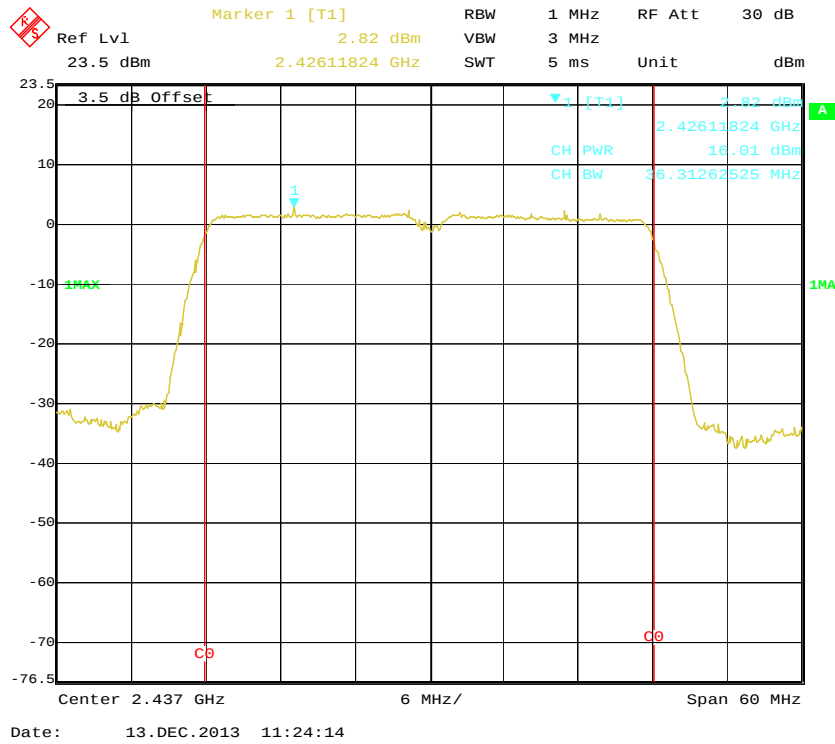

802.11n-HT40, RF Peak Output Power, High Channel

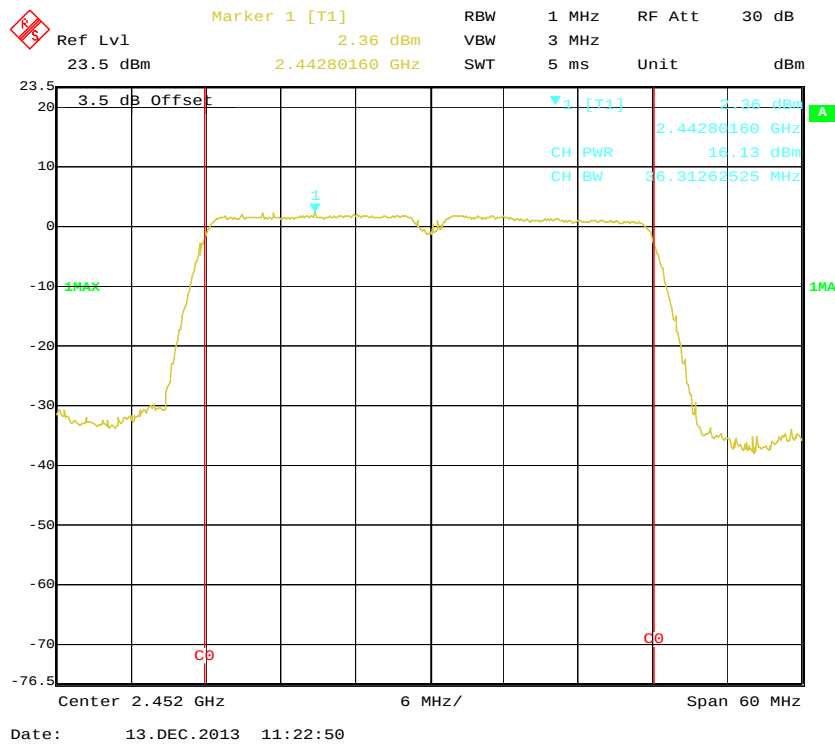

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	51 %
ATM Pressure:	100.0 kPa


The testing was performed by Rocky Kang on 2013-12-13.

Test Result: Compliance


Please refer to the following table and plots.

Frequency Band	Delta Peak to band emission (dBc)	≥Limit (dBc)	Result
802.11b mode			
Left-band	46.30	20	Pass
Right-band	47.78	20	Pass
802.11g mode			
Left-band	37.34	20	Pass
Right-band	45.28	20	Pass
802.11n-HT20 mode			
Left-band	36.19	20	Pass
Right-band	44.86	20	Pass
802.11n-HT40 mode			
Left-band	36.06	20	Pass
Right-band	39.86	20	Pass


802.11b: Band Edge, Left Side

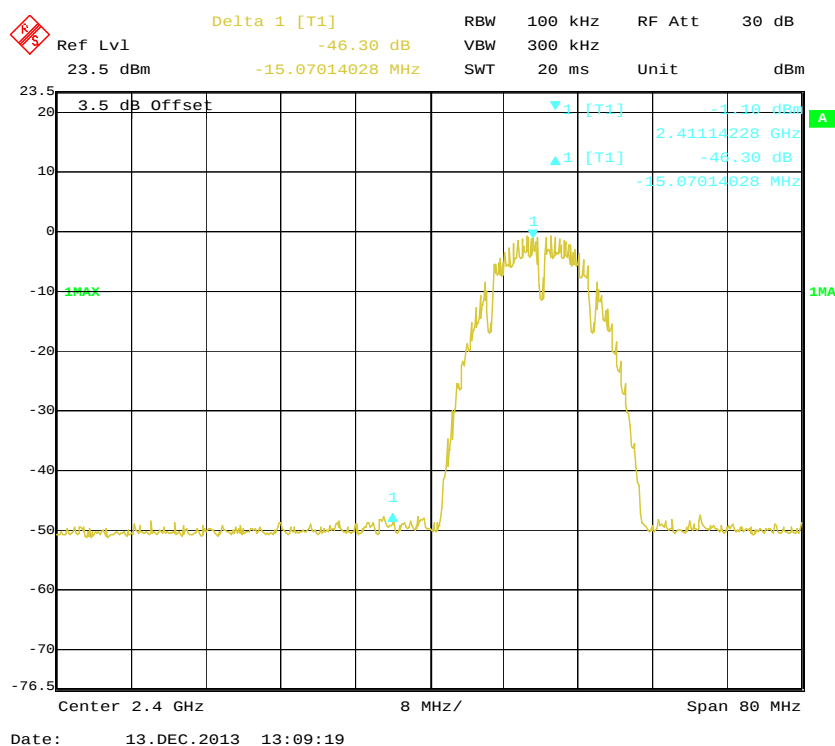


802.11b: Band Edge, Right Side

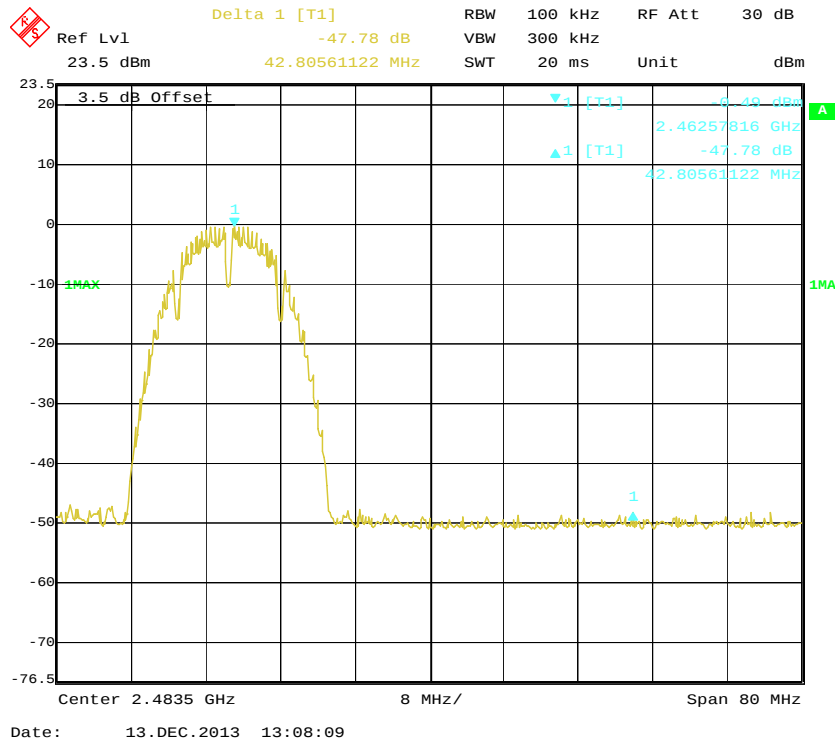


802.11g: Band Edge, Left Side

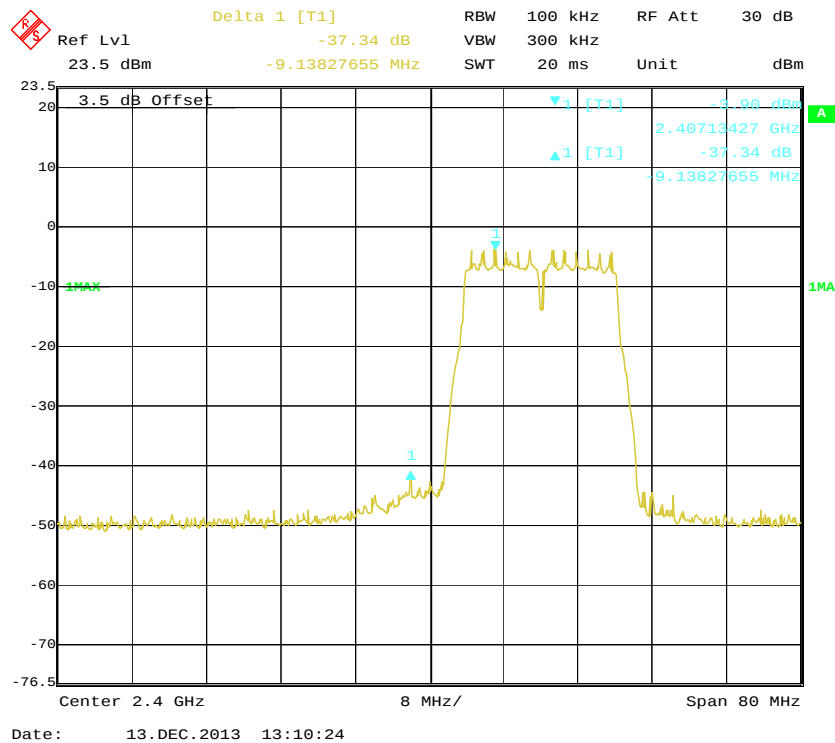


802.11g: Band Edge, Right Side

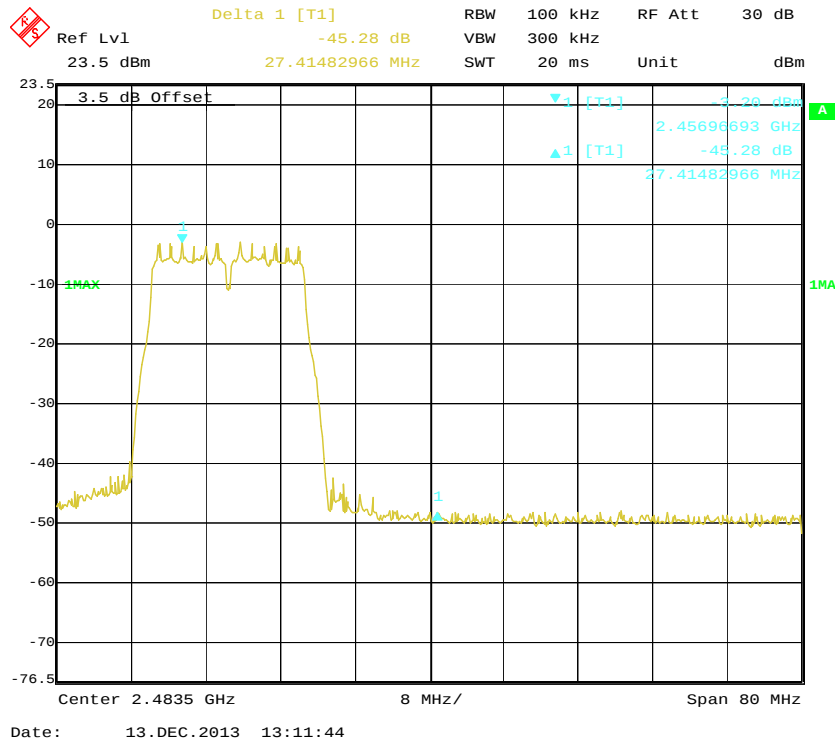


802.11n-HT20: Band Edge, Left Side

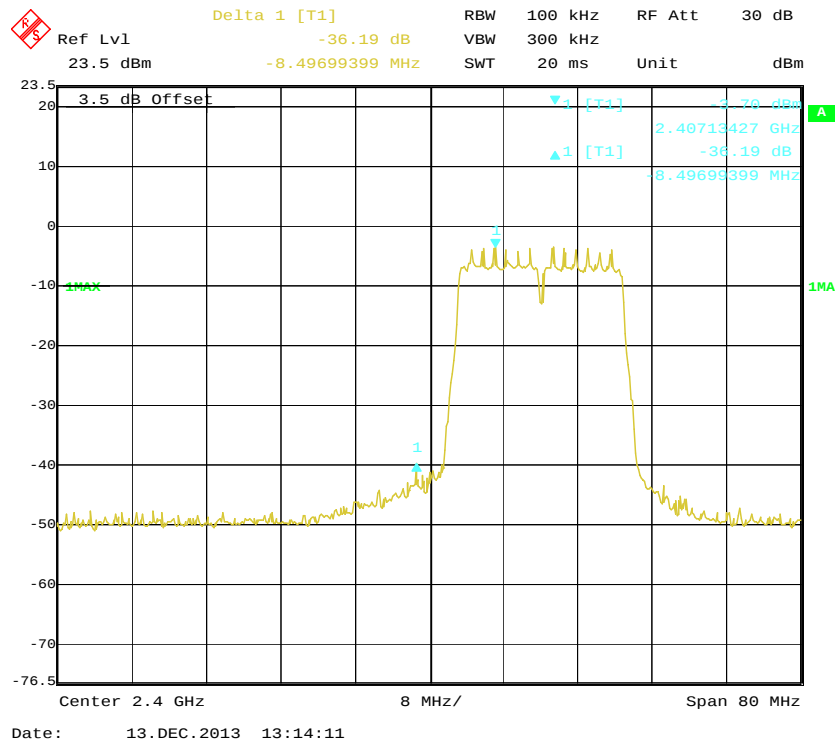


802.11n-HT20: Band Edge, Right Side

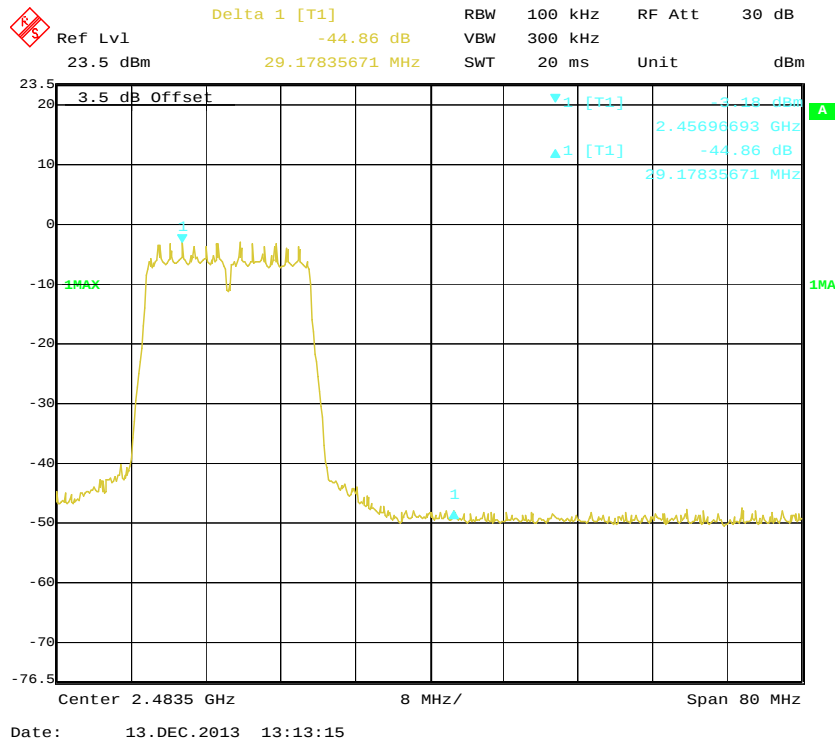

802.11n-HT40: Band Edge, Left Side

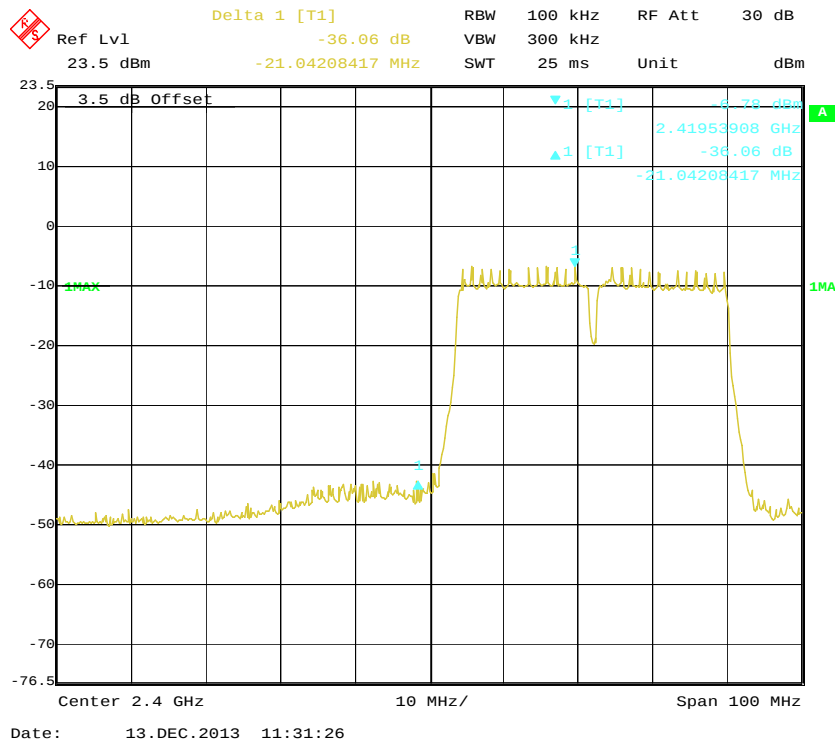

802.11n-HT40: Band Edge, Right Side

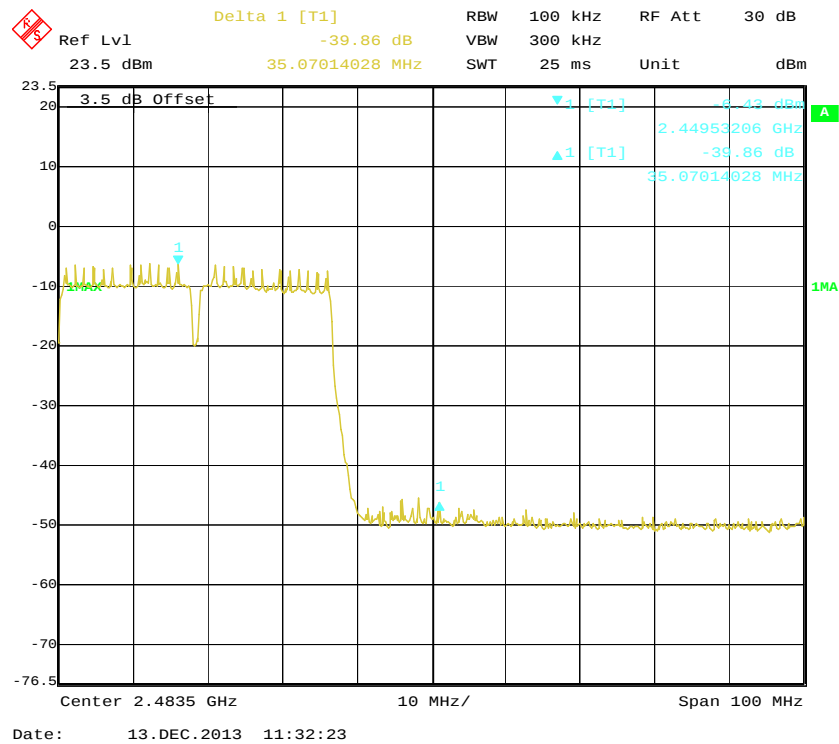

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r01

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	51 %
ATM Pressure:	100.0 kPa


The testing was performed by Rocky Kang on 2013-12-13.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-14.87	≤ 8
Middle	2437	-14.61	≤ 8
High	2462	-15.34	≤ 8
802.11g mode			
Low	2412	-17.44	≤ 8
Middle	2437	-16.64	≤ 8
High	2462	-17.60	≤ 8
802.11n-HT20 mode			
Low	2412	-18.22	≤ 8
Middle	2437	-17.95	≤ 8
High	2462	-17.60	≤ 8
802.11n-HT40 mode			
Low	2422	-21.50	≤ 8
Middle	2437	-21.67	≤ 8
High	2452	-19.98	≤ 8


Power Spectral Density, 802.11b Low Channel

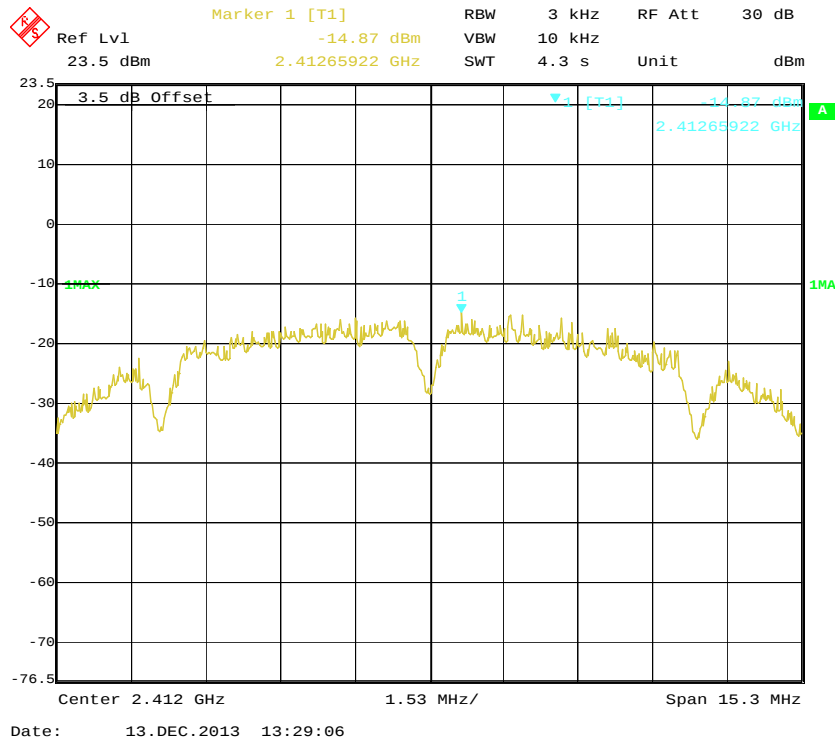


Power Spectral Density, 802.11b Middle Channel

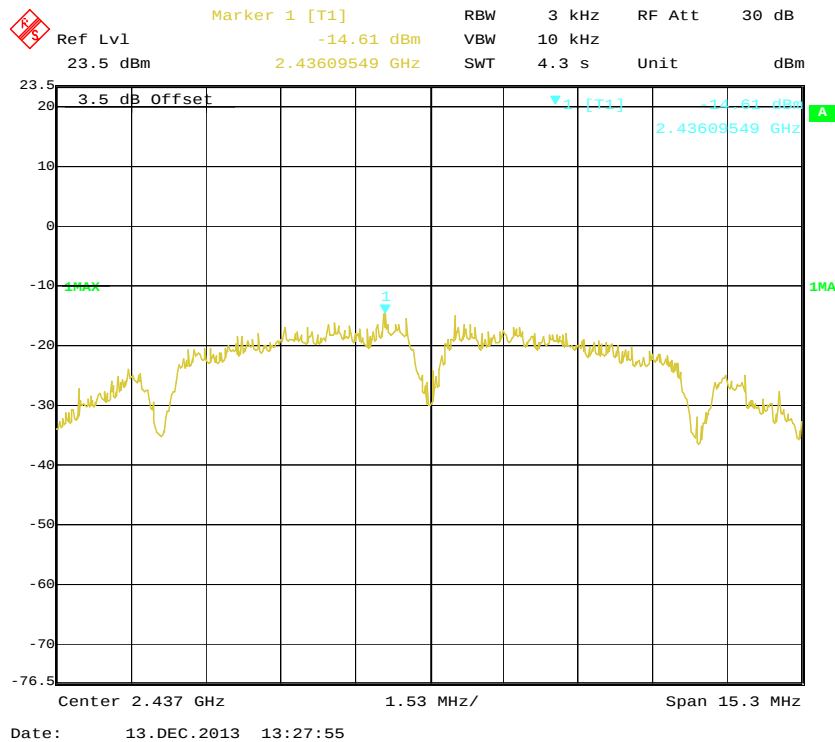


Power Spectral Density, 802.11b High Channel

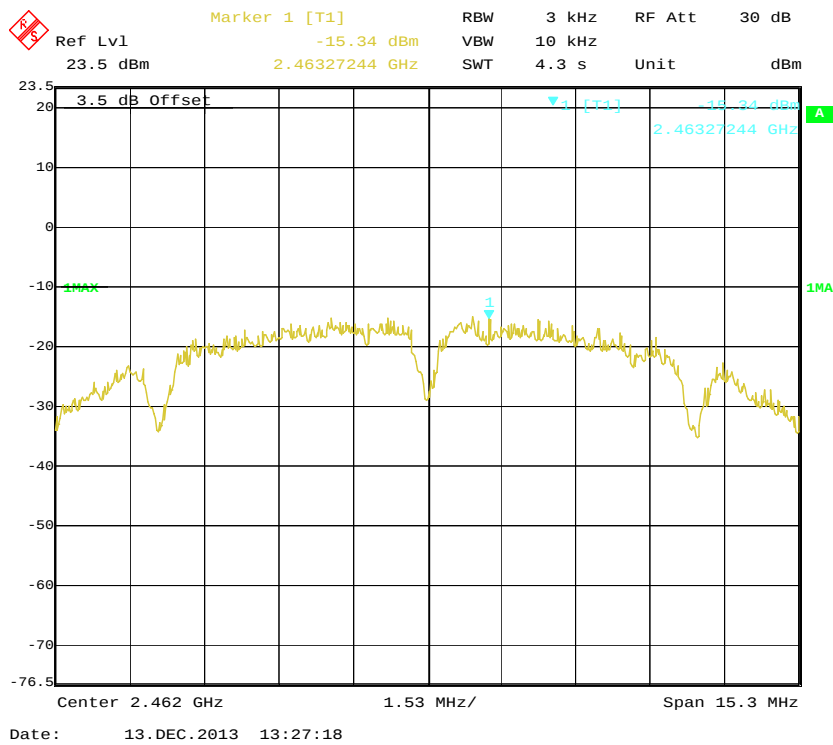


Power Spectral Density, 802.11g Low Channel

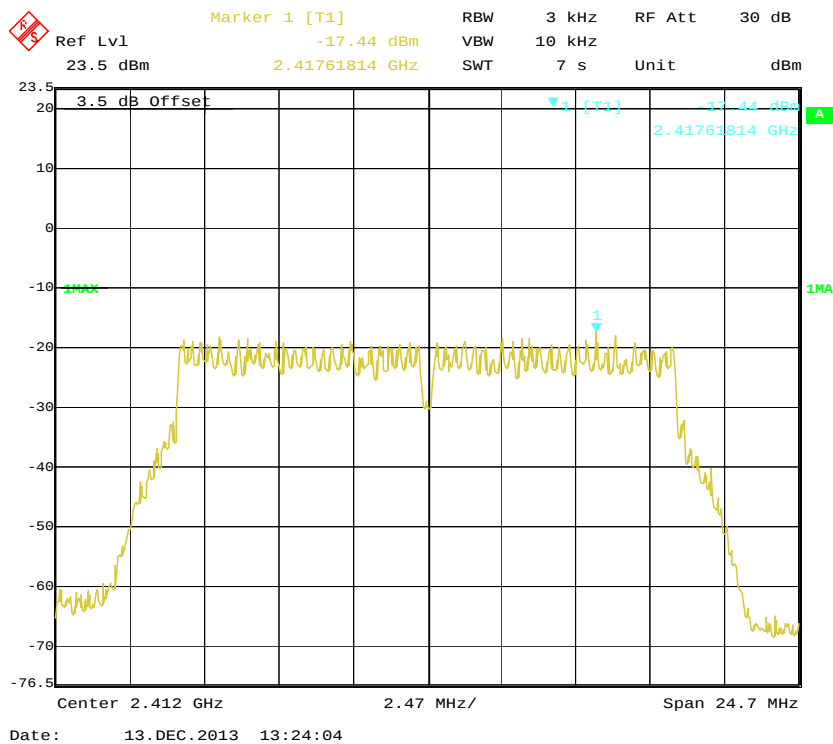


Power Spectral Density, 802.11g Middle Channel

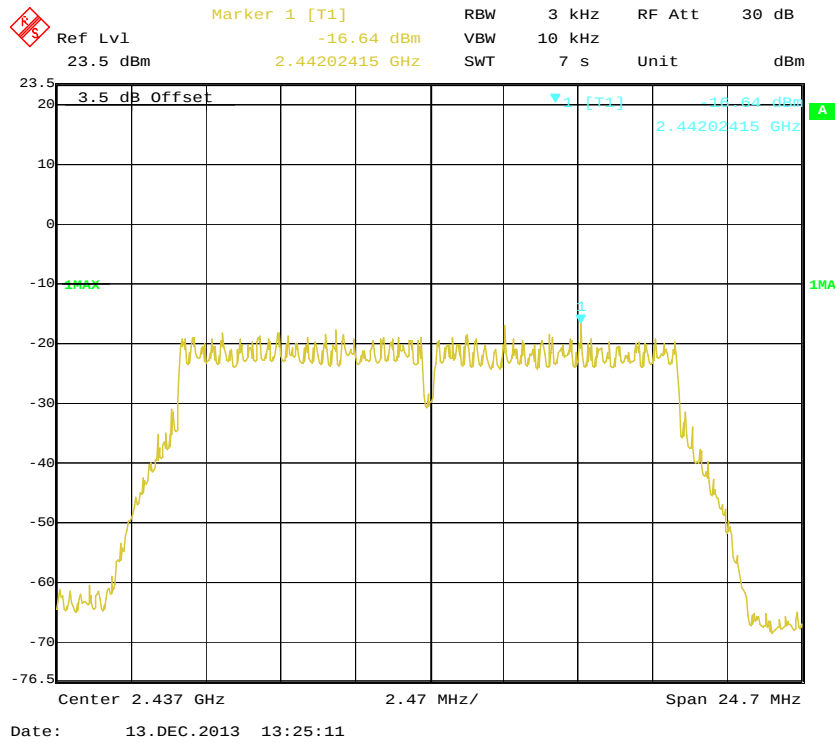


Power Spectral Density, 802.11g High Channel

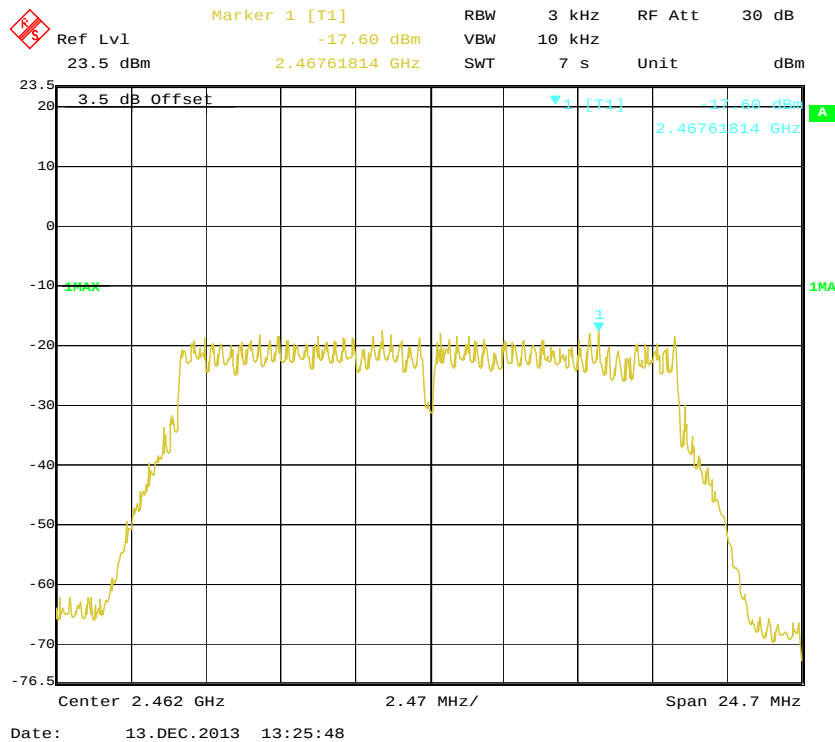


Power Spectral Density, 802.11n-HT20 Low Channel

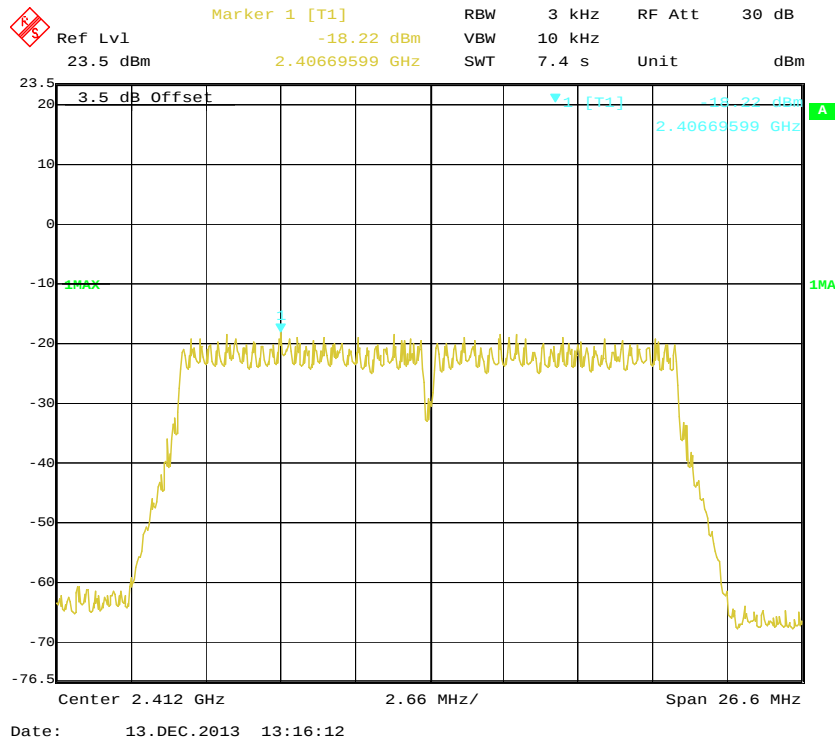


Power Spectral Density, 802.11n-HT20 Middle Channel

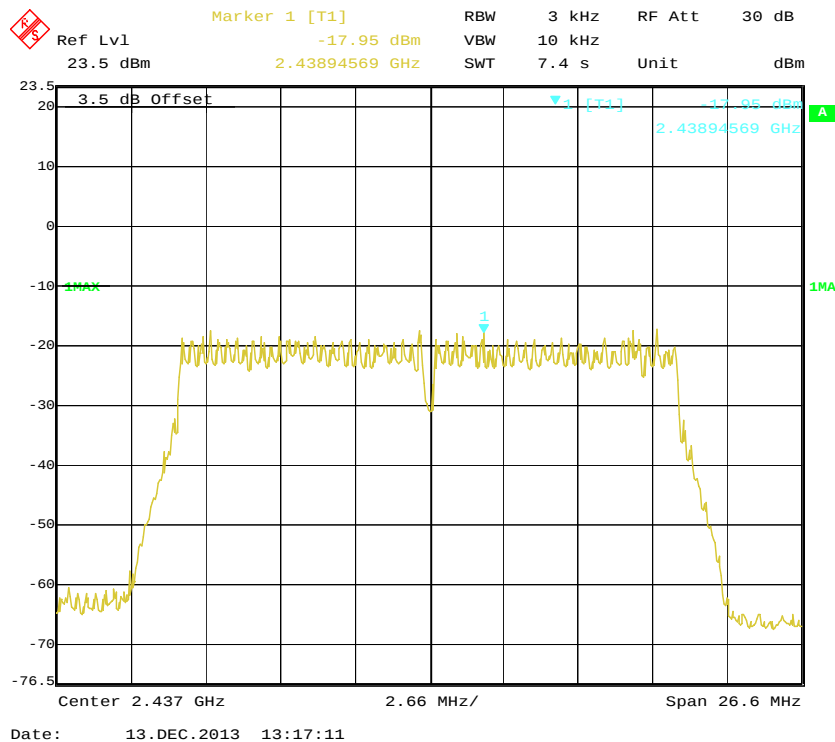


Power Spectral Density, 802.11n-HT20 High Channel

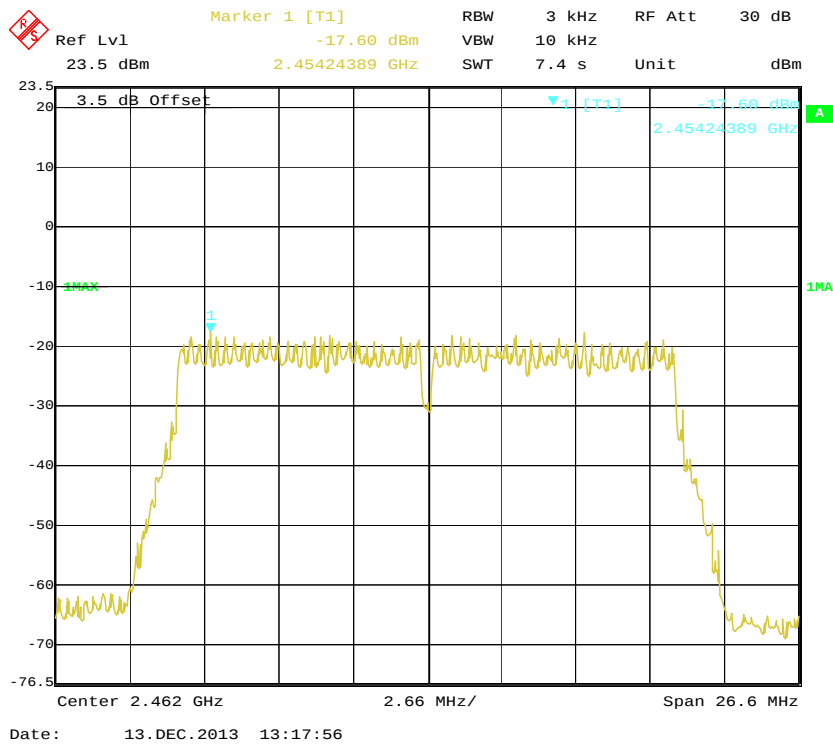


Power Spectral Density, 802.11n-HT40 Low Channel

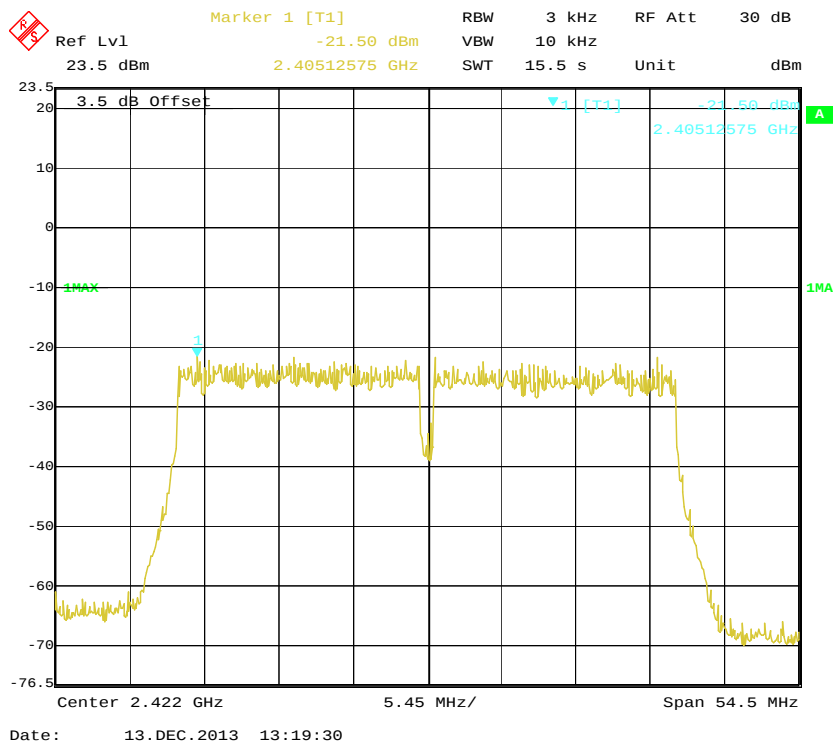

Power Spectral Density, 802.11n-HT40 Middle Channel

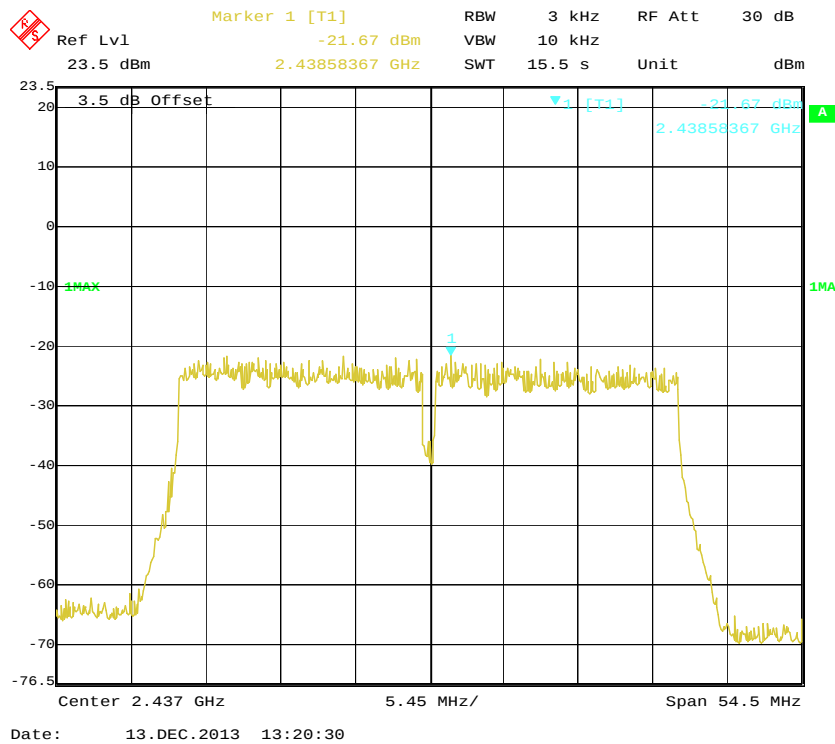

Power Spectral Density, 802.11n-HT40 High Channel

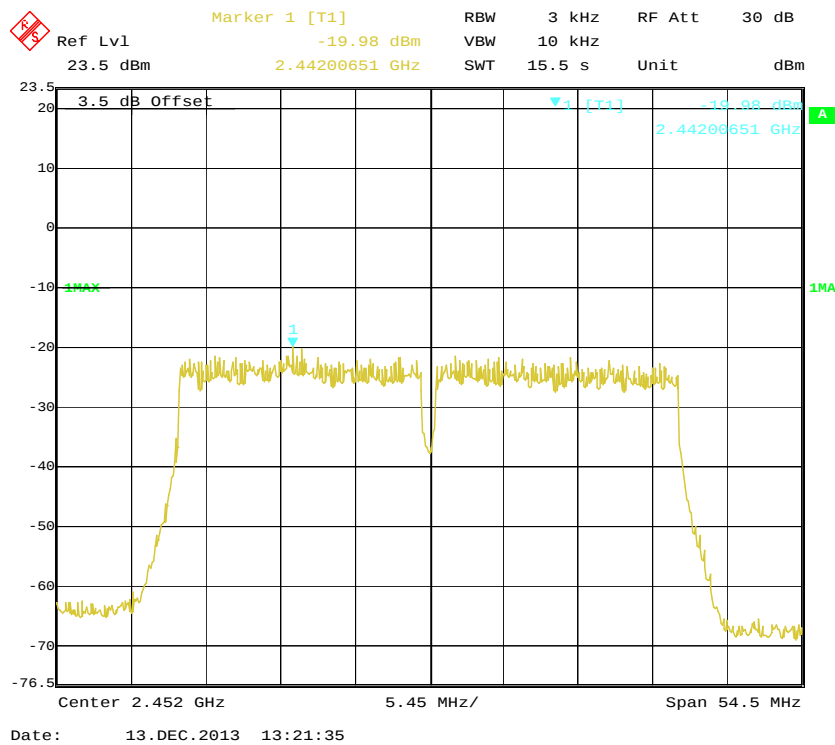

PRODUCT SIMILARITY DECLARATION LETTER



SHUOYING INDUSTRIAL(SHENZHEN)CO.,LTD.

Add: No.1 Shuoying Rd., Hebei Industry Area, Dalang, Longhua Town, Baoan, Shenzhen, China.

Tel: 0755-28177777

Fax: 0755-28177111

DECLARATION OF SIMILARITY

2013-12-06

Dear Sir or Madam:

We, SHUOYING INDUSTRIAL(SHENZHEN)CO.,LTD., hereby declare that our product: Mobile Internet Devices, models: IBT0725, IBT0725A, IBT0725B are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as PM0739, And it was tested by BACL, the results of which are featured in BACL project.

A description of the differences between the tested model and those that are declared similar areas follows:

Models: PM0739, IBT0725, IBT0725A, IBT0725B. The only difference is the model name.

Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature:

A handwritten signature in black ink, appearing to read "Wei Hua Lei", is written over a light blue grid background.

Weihua lei, Product Manager

******* END OF REPORT *******