






Radio Test Report

FCC ID: XMF-MID1108&IC: 20064-MID1108

Report No. : TBR-C-202211-0265-133
Applicant : Lightcomm Technology Co., Ltd.
Equipment Under Test (EUT)
EUT Name : 11" Tablet
Model No. : 100110027
Series Model No. : TBSPG100110027, TBGGL100110027, TBMMS100110027, TBBGD100110027, MID1108
Brand Name : onn.
Sample ID : RW-C-202211-0265-10-1#&RW-C-202211-0265-10-2#
Receipt Date : 2022-11-30
Test Date : 2022-11-30 to 2023-01-06
Issue Date : 2023-01-09
Standards : FCC Part 15 Subpart E 15.407
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 March 2019
Test Method : ANSI C63.10: 2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above.

Witness Engineer :  Wade Lv
Engineer Supervisor :  Ivan Su
Engineer Manager :  Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS	2
1. GENERAL INFORMATION ABOUT EUT	6
1.1 Client Information.....	6
1.2 General Description of EUT (Equipment Under Test)	6
1.3 Block Diagram Showing the Configuration of System Tested.....	9
1.4 Description of Support Units	9
1.5 Description of Test Mode.....	10
1.6 Description of Test Software Setting	12
1.7 Measurement Uncertainty	15
1.8 Test Facility.....	16
2. TEST SUMMARY	17
3. TEST SOFTWARE	17
4. TEST EQUIPMENT	18
5. CONDUCTED EMISSION TEST	20
5.1 Test Standard and Limit.....	20
5.2 Test Setup.....	20
5.3 Test Procedure.....	20
5.4 Deviation From Test Standard.....	21
5.5 EUT Operating Mode	21
5.6 Test Data.....	21
6. RADIATED AND CONDUCTED UNWANTED EMISSIONS	22
6.1 Test Standard and Limit.....	22
6.2 Test Setup.....	24
6.3 Test Procedure.....	25
6.4 Deviation From Test Standard.....	26
6.5 EUT Operating Mode	26
6.6 Test Data.....	26
7. RESTRICTED BANDS REQUIREMENT	27
7.1 Test Standard and Limit.....	27
7.2 Test Setup.....	28
7.3 Test Procedure.....	28
7.4 Deviation From Test Standard.....	29



7.5 EUT Operating Mode	29
7.6 Test Data	29
8. BANDWIDTH TEST	30
8.1 Test Standard and Limit.....	30
8.2 Test Setup.....	30
8.3 Test Procedure.....	30
8.4 Deviation From Test Standard.....	32
8.5 EUT Operating Mode	32
8.6 Test Data.....	32
9. MAXIMUM CONDUCTED OUTPUT POWER.....	33
9.1 Test Standard and Limit.....	33
9.2 Test Setup.....	34
9.3 Test Procedure.....	34
9.4 Deviation From Test Standard.....	34
9.5 EUT Operating Mode	34
9.6 Test Data.....	34
10. POWER SPECTRAL DENSITY TEST	35
10.1 Test Standard and Limit	35
10.2 Test Setup.....	35
10.3 Test Procedure.....	35
10.4 Deviation From Test Standard.....	36
10.5 Antenna Connected Construction.....	36
10.6 Test Data.....	36
11. FREQUENCY STABILITY	37
11.1 Test Standard and Limit	37
11.2 Test Setup.....	37
11.3 Test Procedure.....	37
11.4 Deviation From Test Standard.....	38
11.5 Antenna Connected Construction.....	38
11.6 Test Data.....	38
12. ANTENNA REQUIREMENT.....	39
12.1 Test Standard and Limit	39
12.2 Deviation From Test Standard.....	39
12.3 Antenna Connected Construction.....	39
12.4 Test Data.....	39



ATTACHMENT A-- CONDUCTED EMISSION TEST DATA40
ATTACHMENT B--UNWANTED EMISSIONS DATA42



1. General Information about EUT

1.1 Client Information

Applicant	:	Lightcomm Technology Co., Ltd.
Address	:	UNIT 1306 13/F ARION COMMERCIAL CENTRE, 2-12 QUEEN'S ROAD WEST, SHEUNG WAN HK
Manufacturer	:	Huizhou Hengdu Electronics Co., Ltd
Address	:	No.8 Huitai Road, Huinan High-tech Industrial Park, Huiao Avenue, Huizhou, Guangdong.China.

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	11" Tablet
HVIN/Models No.	:	100110027, TBSPG100110027, TBGGL100110027, TBMMS100110027, TBBGD100110027, MID1108
Model Different	:	All these models are identical in the same PCB, layout and electrical circuit, The only difference is model name and color.
Product Description	:	Operation Frequency: U-NII-1: 5180MHz~5240MHz, U-NII-2A: 5260MHz~5320MHz U-NII-2C: 5500MHz~5720MHz, U-NII-3: 5745MHz~5825MHz
	Antenna Gain:	U-NII-1: 1.7dBi FPC Antenna U-NII-2A: 1.05dBi FPC Antenna U-NII-2C: 0.59dBi FPC Antenna U-NII-3: -0.1dBi FPC Antenna
	Modulation Type:	802.11a: OFDM (QPSK, BPSK, 16QAM) 802.11n: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11ac: OFDM (QPSK, BPSK, 16QAM, 64QAM, 256QAM)
	Bit Rate of Transmitter:	802.11a: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 150Mbps 802.11ac: at most 433.3 Mbps
Power Rating	:	Adapter (LACA215) Input: 100-240V~ 50/60Hz 0.5A Output: 5V=3A, 9V=2.22A DC 3.8V by 7500mAh Rechargeable Li-ion battery



Software Version	:	TP1A.220624.014 release-keys
Hardware Version	:	MID1108MS_MT8781_LPDDR4X_MB-VER1.1
Remark: (1)The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab. (2)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. (3)Antenna information provided by the applicant.		



(4)Channel List:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5180~5240MHz (U-NII-1)	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz		

For 20 MHz Bandwidth, use channel 36, 40, 44, 48. For 40 MHz Bandwidth, use channel 38, 46.

For 80 MHz Bandwidth, use channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5260~5320 MHz (U-NII-2A)	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310MHz
	56	5280MHz	64	5320 MHz
	58	5290MHz		

For 20 MHz Bandwidth, use channel 52, 56, 60, 64. For 40 MHz Bandwidth, use channel 54, 62.

For 80 MHz Bandwidth, use channel 58.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5500~5720 MHz (U-NII-2C)	100	5500 MHz	124	5620 MHz
	102	5510 MHz	126	5630 MHz
	104	5520 MHz	128	5640 MHz
	106	5530 MHz	132	5660 MHz
	108	5540 MHz	134	5670 MHz
	110	5550 MHz	136	5680 MHz
	112	5560 MHz	138	5690 MHz
	116	5580 MHz	140	5700 MHz
	118	5590 MHz	142	5710 MHz
	120	5600 MHz	144	5720 MHz
	122	5610 MHz		

For 20 MHz Bandwidth, use channel 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144

For 40 MHz Bandwidth, use channel 102, 110, 118, 126, 134, 142

For 80 MHz Bandwidth, use channel 106, 122, 138

Note: For the protection of Environment, the5600-5650MHz band restricted in Canada. So the CH 188/120/122/124/126/128 was restricted use in Canada.




Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5745~5825MHz (U-NII-3)	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz


For 20 MHz Bandwidth, use channel 149, 153, 157, 161, 165. For 40 MHz Bandwidth, use channel 151, 159.
For 80 MHz Bandwidth, use channel 155.

1.3 Block Diagram Showing the Configuration of System Tested

Conducted Test

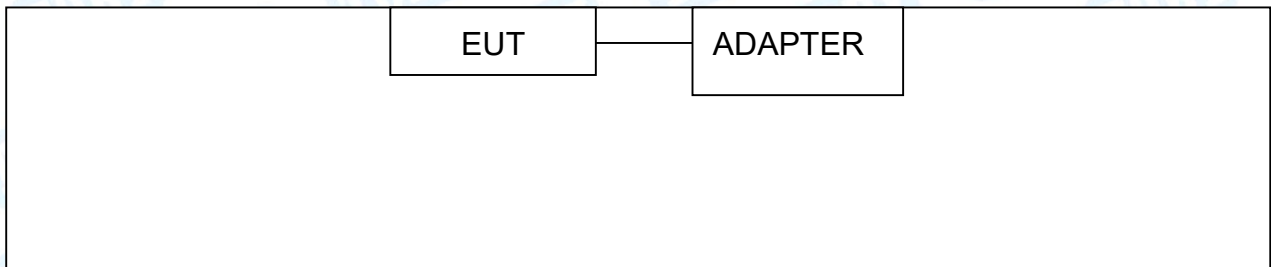

Radiated Test

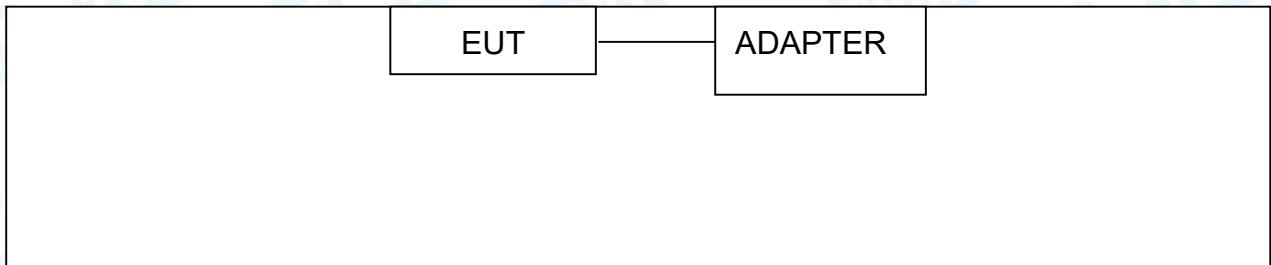

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/SDOC	Manufacturer	Used “√”
Adapter	LACA215	----	---	√
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	Yes	NO	1.0M	Accessory

Remark: the USB Cable and adapter provided by the Applicant.



1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test		
Final Test Mode	Description	
Mode 1	TX a Mode(5180MHz)	
For Radiated Test Below 1GHz		
Final Test Mode	Description	
Mode 2	TX a Mode(5180MHz)	
For Radiated Above 1GHz and RF Conducted Test		
Test Band	Final Test Mode	Description
U-NII-1	Mode 3	TX Mode 802.11a Mode Channel 36/40/48
	Mode 4	TX Mode 802.11n(HT20) Mode Channel 36/40/48
	Mode 5	TX Mode 802.11ac(VHT20) Mode Channel 36/40/48
	Mode 6	TX Mode 802.11n(HT40) Mode Channel 38/46
	Mode 7	TX Mode 802.11ac(VHT40) Mode Channel 38/46
	Mode 8	TX Mode 802.11ac(VHT80) Mode Channel 42
U-NII-2A	Mode 9	TX Mode 802.11a Mode Channel 52/56/64
	Mode 10	TX Mode 802.11n(HT20) Mode Channel 52/56/64
	Mode 11	TX Mode 802.11ac(VHT20) Mode Channel 52/56/64
	Mode 12	TX Mode 802.11n(HT40) Mode Channel 54/62
	Mode 13	TX Mode 802.11ac(VHT40) Mode Channel 54/62
	Mode 14	TX Mode 802.11ac(VHT80) Mode Channel 58
U-NII-2C	Mode 15	TX Mode 802.11a Mode Channel 100/116/144
	Mode 16	TX Mode 802.11n(HT20) Mode Channel 100/116/144
	Mode 17	TX Mode 802.11ac(VHT20) Mode Channel 100/116/144
	Mode 18	TX Mode 802.11n(HT40) Mode Channel 102/110/134
	Mode 19	TX Mode 802.11ac(VHT40) Mode Channel 102/110/134
	Mode 20	TX Mode 802.11ac(VHT80) Mode Channel 106/138



U-NII-3	Mode 21	TX Mode 802.11a Mode Channel 149/157/165
	Mode 22	TX Mode 802.11n(HT20) Mode Channel 149/157/165
	Mode 23	TX Mode 802.11ac(vHT20) Mode Channel 149/157/165
	Mode 24	TX Mode 802.11n(HT40) Mode Channel 151/159
	Mode 25	TX Mode 802.11ac(VHT40) Mode Channel 151/159
	Mode 26	TX Mode 802.11ac(VHT80) Mode Channel 155

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

- 802.11a Mode: OFDM (6 Mbps)
- 802.11n (HT20) Mode: MCS 0
- 802.11n (HT40) Mode: MCS 0
- 802.11ac(VHT20) Mode: MCS 0/ Nss1
- 802.11ac(VHT40) Mode: MCS 0/ Nss1
- 802.11ac(VHT80) Mode: MCS 0/ Nss1

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software: EngineerMode		
U-NII-1		
Mode	Frequency (MHz)	Parameters
802.11a	5180	18
	5200	18
	5240	18
802.11n(HT20)	5180	19
	5200	19
	5240	19
802.11ac(VHT20)	5180	19
	5200	19
	5240	19
802.11n(HT40)	5190	19
	5230	19
802.11ac(VHT40)	5190	19
	5230	19
802.11ac(VHT80)	5210	19



U-NII-2A		
Mode	Frequency (MHz)	Parameters
802.11a	5260	18
	5300	18
	5320	18
802.11n(HT20)	5260	19
	5300	19
	5320	19
802.11ac(VHT20)	5260	19
	5300	19
	5320	19
802.11n(HT40)	5270	19
	5310	19
802.11ac(VHT40)	5270	19
	5310	19
802.11ac(VHT80)	5290	19



U-NII-2C		
Mode	Frequency (MHz)	Parameters
802.11a	5500	18
	5580	18
	5720	18
802.11n(HT20)	5500	19
	5580	19
	5720	19
802.11ac(VHT20)	5500	19
	5580	19
	5720	19
802.11n(HT40)	5510	19
	5550	19
	5670	19
802.11ac(VHT40)	5510	19
	5550	19
	5670	19
802.11ac(VHT80)	5530	19
	5690	19



U-NII-3		
Mode	Frequency (MHz)	Parameters
802.11a	5745	18
	5785	18
	5825	18
802.11n(HT20)	5745	19
	5785	19
	5825	19
802.11ac(VHT20)	5745	19
	5785	19
	5825	19
802.11n(HT40)	5755	19
	5795	19
802.11ac(VHT40)	5755	19
	5795	19
802.11ac(VHT80)	5775	19

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB



1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351.Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.



2. Test Summary

Standard Section		Test Item	Test Sample(s)	Judgment	Remark
FCC	IC				
FCC 15.207(a)	RSS-Gen 8.8	Conducted Emission	RW-C-202211-0265-10-1#	PASS	N/A
FCC 15.209 & 15.407(b)	RSS-Gen 8.9 & RSS 247 5.5	Radiated Unwanted Emissions	RW-C-202211-0265-10-1#	PASS	N/A
FCC 15.203	RSS-247 6.8	Antenna Requirement	RW-C-202211-0265-10-2#	PASS	N/A
FCC 15.407(a)	RSS-247(6.2.1.2)	-26dB Emission Bandwidth	RW-C-202211-0265-10-2#	PASS	N/A
FCC 15.407(a)	RSS-247(6.2.1.2)	99% Occupied Bandwidth	RW-C-202211-0265-10-2#	PASS	N/A
FCC 15.407(e)	RSS-247(6.2.4.1)	-6dB Min Emission Bandwidth	RW-C-202211-0265-10-2#	PASS	N/A
FCC 15.407(a)	RSS-247(6.2.1.1& 6.2.2.1&6.2.3.1& 6.2.4.1)	Maximum Conducted Output Power	RW-C-202211-0265-10-2#	PASS	N/A
FCC 15.407(a)	RSS-247(6.2.1.1& 6.2.2.1&6.2.3.1& 6.2.4.1)	Power Spectral Density	RW-C-202211-0265-10-2#	PASS	N/A
FCC 15.407(b)& 15.205	RSS-Gen 8.10& RSS-247 5.5	Emissions in Restricted Bands	RW-C-202211-0265-10-2#	PASS	N/A
FCC 15.407(b)&15.209	RSS-Gen 8.9 & RSS 247 5.5	Conducted Unwanted Emissions	RW-C-202211-0265-10-2#	PASS	N/A
FCC 15.407(g)	RSS-Gen 8.11	Frequency Stability	RW-C-202211-0265-10-2#	PASS	N/A
/	/	On Time and Duty Cycle	RW-C-202211-0265-10-2#	/	N/A

Note: N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Radiation Emission	EZ-EMC	EZ	FA-03A2RE+
RF Conducted Measurement	MTS-8310	MWRFtest	V2.0.0.0
RF Test System	JS1120-3	Tonscend	V3.2.22



4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 23, 2022	Jun. 22, 2023
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 23, 2022	Jun. 22, 2023
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 22, 2022	Jun. 21, 2023
LISN	Rohde & Schwarz	ENV216	101131	Jun. 22, 2022	Jun. 21, 2023
ISN	SCHWARZBECK	NTFM 8131	8131-193	Jun. 22, 2022	Jun. 21, 2023
ISN	SCHWARZBECK	CAT3 8158	cat3 5158-0094	Jun. 22, 2022	Jun. 21, 2023
ISN	SCHWARZBECK	NTFM5158	NTFM5158 0145	Jun. 22, 2022	Jun. 21, 2023
ISN	SCHWARZBECK	CAT 8158	cat5 8158-179	Jun. 22, 2022	Jun. 21, 2023
Radiation Emission Test (A Site)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jun. 23, 2022	Jun. 22, 2023
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Feb. 27, 2022	Feb.26, 2024
Horn Antenna	ETS-LINDGREN	3117	00143207	Feb. 26, 2022	Feb.25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Feb. 26, 2022	Feb.25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Feb. 26, 2022	Feb.25, 2024
Pre-amplifier	SONOMA	310N	185903	Feb. 26, 2022	Feb.25, 2023
Pre-amplifier	HP	8449B	3008A00849	Feb. 26, 2022	Feb.25, 2023
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Sep. 01, 2022	Aug. 31, 2023
Radiation Emission Test (B Site)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472/008	Feb. 26, 2022	Feb.25, 2023
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Dec. 05, 2021	Dec. 04, 2023
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	Feb. 26, 2022	Feb.25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Jun. 26, 2022	Jun.25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 26, 2022	Jun.25, 2024
HF Amplifier	Tonscend	TAP9E6343	AP21C806117	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP051845	AP21C806141	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Sep. 01, 2022	Aug. 31, 2023



Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jun. 23, 2022	Jun. 22, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
MXA Signal Analyzer	KEYSIGT	N9020B	MY60110172	Sep. 01, 2022	Aug. 31, 2023
MXA Signal Analyzer	Agilent	N9020A	MY47380425	Sep. 01, 2022	Aug. 31, 2023
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 01, 2022	Aug. 31, 2023
Analog Signal Generator	Agilent	N5181A	MY48180463	Sep. 01, 2022	Aug. 31, 2023
Vector Signal Generator	KEYSIGT	N5182B	MY59101429	Sep. 01, 2022	Aug. 31, 2023
Analog Signal Generator	KEYSIGHT	N5173B	MY61252685	Dec. 15, 2022	Dec. 14, 2023
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 01, 2022	Aug. 31, 2023
RF Control Unit	Tonsced	JS0806-1	21C8060380	N/A	N/A
RF Control Unit	Tonsced	JS0806-2	21F8060439	Sep. 01, 2022	Aug. 31, 2023
Band Reject Filter Group	Tonsced	JS0806-F	21D8060414	Jun. 23, 2022	Jun. 22, 2023
Power Control Box	Tonsced	JS0806-4ADC	21C8060387	N/A	N/A
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	144382	Sep. 01, 2022	Aug. 31, 2023
Universal Radio Communication Tester	Rohde&Schwarz	CMW500	168796	Jun. 23, 2022	Jun. 22, 2023
Temperature and Humidity Chamber	ZhengHang	ZH-QTH-1500	ZH2107264	Jun. 22, 2022	Jun. 21, 2023



5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

RSS-Gen 8.8

FCC Part 15.207


5.1.2 Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

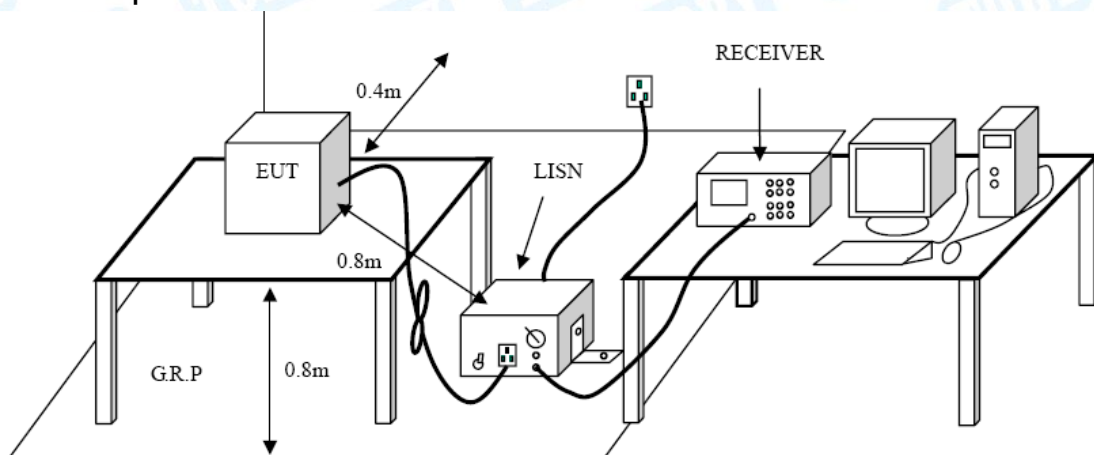

5.3 Test Procedure

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.



- LISN at least 80 cm from nearest part of EUT chassis.
- The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A inside test report.



6. Radiated and Conducted Unwanted Emissions

6.1 Test Standard and Limit

6.1.1 Test Standard

RSS-Gen 8.9 & RSS 247 5.5

FCC Part 15.209 & FCC Part 15.407(b)

6.1.2 Test Limit

General field strength limits at frequencies Below 30MHz			
Frequency (MHz)	Field Strength ($\mu\text{A/m}$)*	Field Strength (microvolt/meter)**	Measurement Distance (meters)
0.009~0.490	6.37/F (F in kHz)	2400/F(KHz)	300
0.490~1.705	63.7/F (F in kHz)	24000/F(KHz)	30
1.705~30.0	0.08	30	30

Note: 1, The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.
2, *is for RSS Standard, **is for FCC Standard.

General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 m)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

General field strength limits at frequencies Above 1000MHz		
Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54

Note:
(1) The tighter limit applies at the band edges.
(2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest




level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.




6.2 Test Setup


Radiated measurement

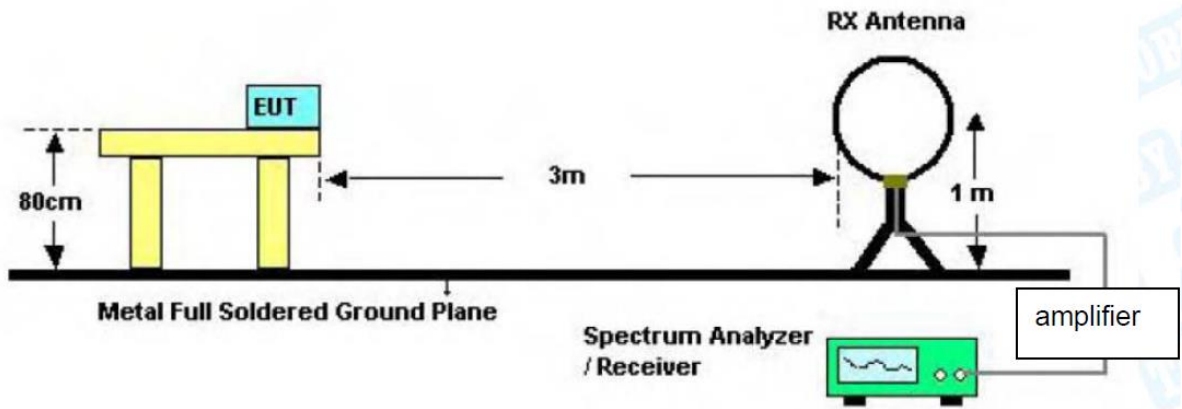


Below 30MHz Test Setup

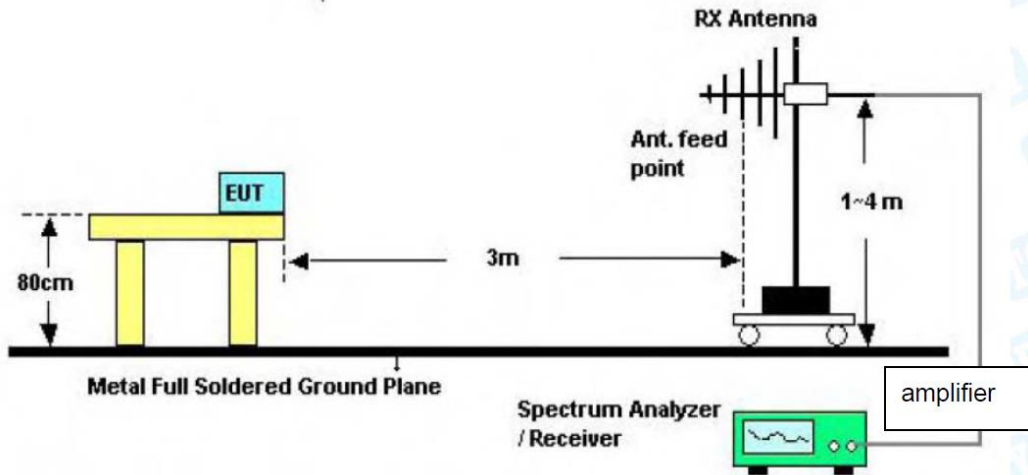

Below 1000MHz Test Setup

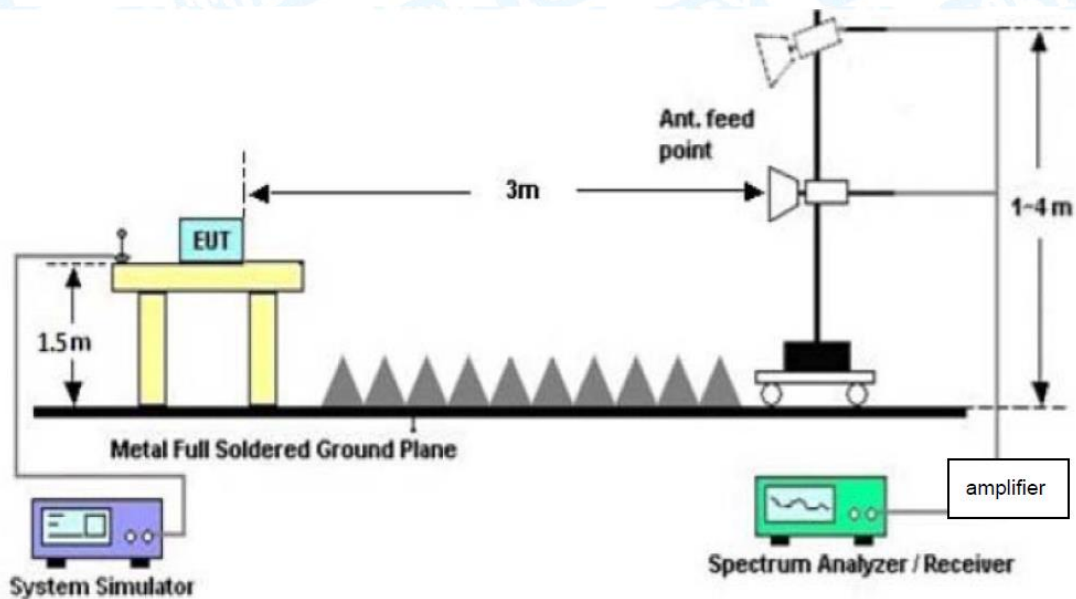

**Above 1GHz Test Setup
Conducted measurement**

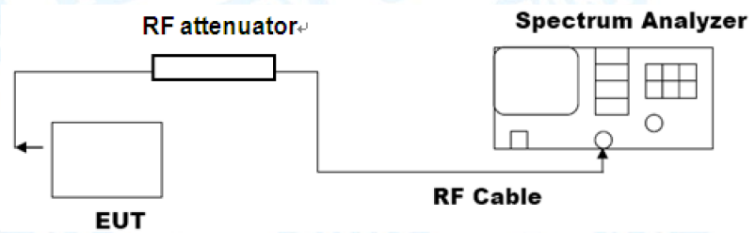

6.3 Test Procedure

---Radiated measurement

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range 30MHz-1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection. Testing frequency range 9KHz-150Hz the measuring instrument use VBW=200Hz with Quasi-peak detection. Testing frequency range 9KHz-30MHz the measuring instrument use VBW=9kHz with Quasi-peak detection.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- For the actual test configuration, please see the test setup photo.



--- Conducted measurement**● Reference level measurement**

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 * RBW]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

● Emission level measurement

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 * RBW]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Mode

Please refer to the description of test mode.

6.6 Test Data

Radiated measurement please refer to the Attachment B inside test report.

Conducted measurement please refer to the external appendix report of 5G Wi-Fi.



7. Restricted Bands Requirement

7.1 Test Standard and Limit

7.1.1 Test Standard

RSS-Gen 8.10 & RSS 247 5.5

FCC Part 15.205 & FCC Part 15.407(b)

7.1.2 Test Limit

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$


2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Note: According the ANSI C63.10 11.12.2 antenna-port conducted measurements may also be used as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions is required.




7.2 Test Setup

Radiated measurement

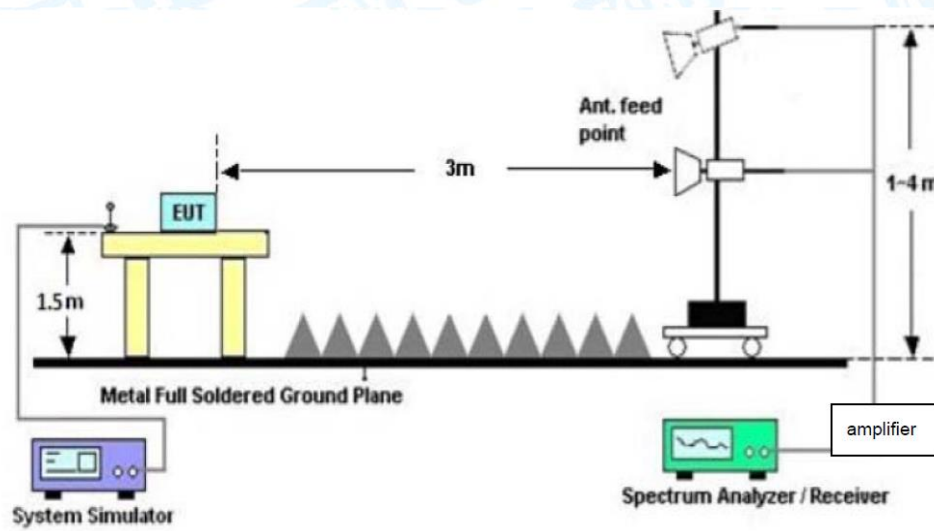

Conducted measurement

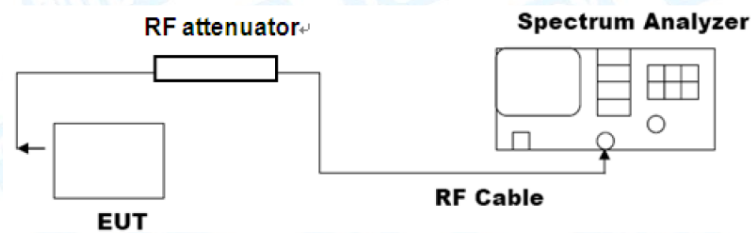

7.3 Test Procedure

---Radiated measurement

- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- The Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.



● For the actual test configuration, please see the test setup photo.

--- **Conducted measurement**

- a) Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 11.12.2.3 through 11.12.2.5 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP (see 11.12.2.6 for guidance on determining the applicable antenna gain).
- c) Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies ≤ 30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies > 1000 MHz).
- d) For MIMO devices, measure the power of each chain and sum the EIRP of all chains in linear terms (i.e., watts and mW).
- e) Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log d + 104.8$$

where

E is the electric field strength in dBuV/m

EIRP is the equivalent isotropically radiated power in dBm

d is the specified measurement distance in m

- f) Compare the resultant electric field strength level with the applicable regulatory limit.
- g) Perform the radiated spurious emission test.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Mode

Please refer to the description of test mode.

7.6 Test Data

Remark: The test uses antenna-port conducted measurements as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements.

Please refer to the external appendix report of 5G Wi-Fi.



8. Bandwidth Test

8.1 Test Standard and Limit

8.1.1 Test Standard


RSS 247 (6.2.1.2) & RSS 247 (6.2.1.4)

FCC Part 15.407(a) & FCC Part 15.407(e)

8.1.2 Test Limit

Test Item	Limit	Frequency Range (MHz)
26 Bandwidth	N/A	5150~5250
		5250~5350
		5500~5725
6 dB Bandwidth	>500kHz	5725~5850
99% Bandwidth	N/A	5150~5250
		5250~5350
		5500~5725
		5725~5850

8.2 Test Setup

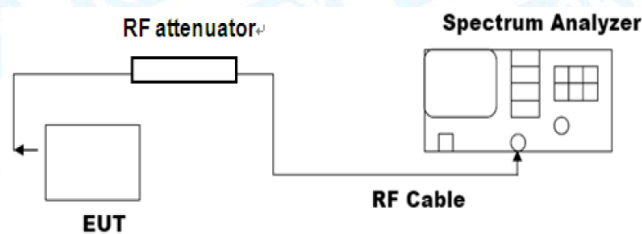

8.3 Test Procedure

---Emission bandwidth

● The procedure for this method is as follows:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

NOTE—The automatic bandwidth measurement capability of a spectrum analyzer or an EMI receiver may be employed if it implements the functionality described in the



preceding items.

---DTS bandwidth

● The steps for the first option are as follows:

- a) Set RBW = 100 kHz.
- b) Set the $VBW \geq [3 * RBW]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

---occupied bandwidth

● The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered



amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Mode

Please refer to the description of test mode.

8.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.



9. Maximum Conducted Output Power

9.1 Test Standard and Limit

9.1.1 Test Standard

RSS 247 (6.2.11&6.2.2.1&6.2.3.1&6.2.4.1)

FCC Part 15.407(a)


9.1.2 Test Limit

RSS-247				
Limit	Frequency Range(MHz)			
	5150~5250	5250~5350	5500~5725	5725~5850
Max Conducted TX Power	N/A	The maximum conducted output power shall not exceed 250 mW or 11 + 10 log10B, dBm		1 Watt (30dBm)
Max E.I.R.P	For other devices, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log10B, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.		4 W (36 dBm) with 6 dBi antenna
TPC	NO	YES, if Max_EIRP ≥ 500 mW (27 dBm) and able to lower EIRP below 24dBm NO, if Max_EIRP < 500mW (27dBm)		NO
FCC Part 15 Subpart E(15.407)				
Limit	Frequency Range(MHz)			
	5150~5250	5250~5350	5500~5725	5725~5850
Max Conducted TX Power	Master Device: 1 Watt(30dBm) Client Device: 250mW(24dBm)	24dBm (250 mW) or 11 dBm+ 10 log B, whichever is lower (B= 26-dB emission BW)		1 Watt (30dBm)
Max E.I.R.P	4 W (36 dBm) with 6 dBi antenna 200 W (53 dBm) for fixed P-t-P application with 23 dBantenna Additional rule for outdoor operation: Max_EIRP< 125 mW(21 dBm) at any elevation angle > 30°from horizon	1 W (30 dBm) with 6 dBi antenna		4 W (36 dBm) with 6 dBi antenna



TPC	NO	YES, if Max_EIRP \geq 500 mW (27 dBm) and able to lower EIRP below 24dBm	NO
		NO, if Max_EIRP < 500mW (27dBm)	

9.2 Test Setup



9.3 Test Procedure

● The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Mode

Please refer to the description of test mode.

9.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.



10. Power Spectral Density Test

10.1 Test Standard and Limit

10.1.1 Test Standard


RSS 247 (6.2.11&6.2.2.1&6.2.3.1&6.2.4.1)

FCC Part 15.407(a)

10.1.2 Test Limit

Test Item	Limit		Frequency Range(MHz)	
Power Spectral Density	FCC	Master Device: 17dBm/MHz	5150~5250	
		Client Device: 11dBm/MHz		
	IC	10dBm/MHz		
	11dBm/MHz			5250~5350
	11dBm/MHz			5500~5725
30dBm/500kHz		5725~5850		

10.2 Test Setup

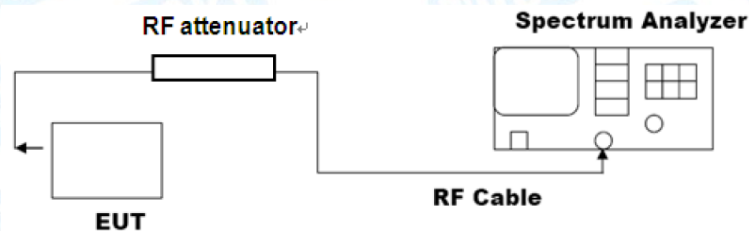

10.3 Test Procedure

● Notwithstanding that some regulatory requirements refer to peak power spectral density (PPSD), in some cases the intent is to measure the maximum value of the time average of the power spectral density during a period of continuous transmission. The procedure for this method is as follows:

- a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power..." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.)
- b) Use the peak search function on the instrument to find the peak of the spectrum.
- c) Make the following adjustments to the peak value of the spectrum, if applicable:



- 1) If method SA-2 or SA-2A was used, then add $[10 \log (1 / D)]$, where D is the duty cycle, to the peak of the spectrum.
- 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- d) The result is the PPSD.
- e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities.⁹⁵ This requirement also permits use of resolution bandwidths less than 1 MHz"provided that the measured power is integrated to show the total power over the measurement bandwidth"(i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply:
 - 1) Set $RBW \geq 1 / T$, where T is defined in 12.2 a).
 - 2) Set $VBW \geq [3 * RBW]$.
 - 3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

10.4 Deviation From Test Standard

No deviation

10.5 Antenna Connected Construction

Please refer to the description of test mode.

10.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.



11. Frequency Stability

11.1 Test Standard and Limit

11.1.1 Test Standard


RSS-Gen 8.11

FCC Part 15.407(g)

11.1.2 Test Limit

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation.

11.2 Test Setup

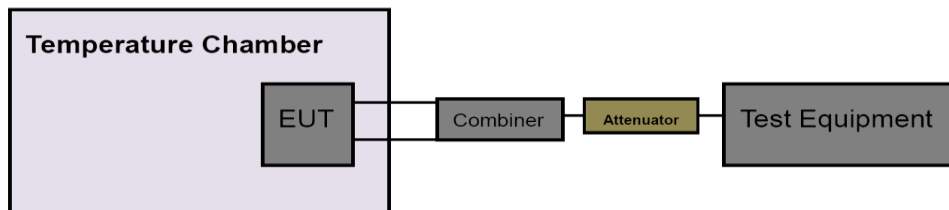

11.3 Test Procedure

● Determining compliance with the peak excursion requirement shall be done by confirming that the ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission does not exceed the regulatory requirement.⁹⁶ The procedure for this method is as follows:

a) The following guidance for limiting the number of tests applies only to peak excursion measurements:

1) Testing each modulation mode on a single channel in a single operating band is sufficient to determine compliance with the peak excursion requirement. (If all modulation modes are not available on a single channel in a single band, then testing must be extended to other channels and bands as needed to ensure that all modulation modes are tested.)

2) Tests must include all variations in signal structure, such as:

- i) All signal types [e.g., direct sequence spread spectrum (DSSS) and OFDM].
- ii) All modulation types [e.g., binary phase-shift keying (BPSK), quadrature phase-shift keying (QPSK), 16-QAM, 64-QAM, and 256-QAM].
- iii) All bandwidth modes.

iv) All variations in signal parameters (e.g., changes in subcarrier spacing or number of subcarriers).



- 3) For a given signal structure, testing of multiple error-correction coding rates is not required (e.g., 1/2, 2/3, and 3/4).
 - 4) For MIMO devices, testing of a single output port is sufficient to determine compliance with the peak excursion requirement. If a given signal structure can be exercised with various combinations of spatial multiplexing (such as different numbers of spatial streams), beamforming, and cyclic delay diversity, peak excursion tests are not required to include those variations.
- b) The procedure is as follows:
- 1) Set the span of the spectrum analyzer or EMI receiver to view the entire emission bandwidth or occupied bandwidth.
 - 2) Find the maximum of the peak-max-hold spectrum:
 - i) Set RBW = 1 MHz.
 - ii) VBW \square 3 MHz.
 - iii) Detector = peak.
 - iv) Trace mode = max-hold.
 - v) Allow the sweeps to continue until the trace stabilizes.
 - vi) Use the peak search function to find the peak of the spectrum.
 - 3) Use the procedure found in 12.5 to measure the PPSD.
 - 4) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

11.4 Deviation From Test Standard

No deviation

11.5 Antenna Connected Construction

Please refer to the description of test mode.

11.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.



12. Antenna Requirement

12.1 Test Standard and Limit

12.1.1 Test Standard

RSS 247 6.8

FCC Part 15.203

12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

12.2 Deviation From Test Standard

No deviation

12.3 Antenna Connected Construction

The gains of the antenna used for transmitting is Please refer to page 6, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

12.4 Test Data


The EUT antenna is a FPC Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna



Attachment A-- Conducted Emission Test Data

Temperature:	25.1°C	Relative Humidity:	54%
Test Voltage:	AC 120V 60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

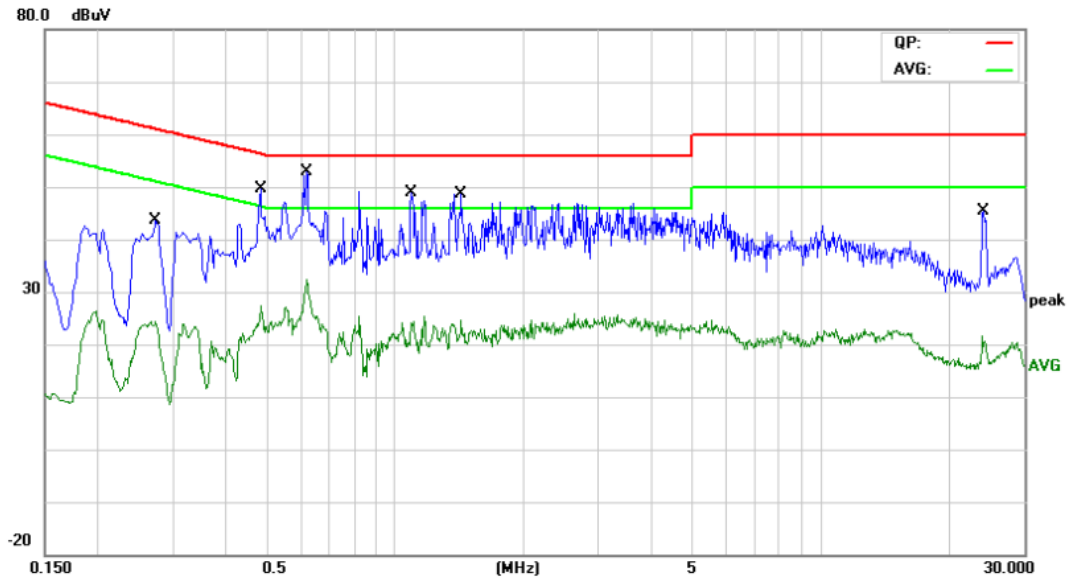


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.2740	28.40	10.89	39.29	60.99	-21.70	QP
2	0.2740	13.72	10.89	24.61	50.99	-26.38	AVG
3	0.4820	32.87	10.93	43.80	56.30	-12.50	QP
4	0.4820	16.99	10.93	27.92	46.30	-18.38	AVG
5 *	0.6180	37.44	10.91	48.35	56.00	-7.65	QP
6	0.6180	25.01	10.91	35.92	46.00	-10.08	AVG
7	1.0900	25.76	10.66	36.42	56.00	-19.58	QP
8	1.0900	11.24	10.66	21.90	46.00	-24.10	AVG
9	1.4260	26.50	10.61	37.11	56.00	-18.89	QP
10	1.4260	13.88	10.61	24.49	46.00	-21.51	AVG
11	24.0580	26.24	10.80	37.04	60.00	-22.96	QP
12	24.0580	10.66	10.80	21.46	50.00	-28.54	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



Temperature:	25.1°C	Relative Humidity:	54%
Test Voltage:	AC 120V 60Hz		
Terminal:	Neutral		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

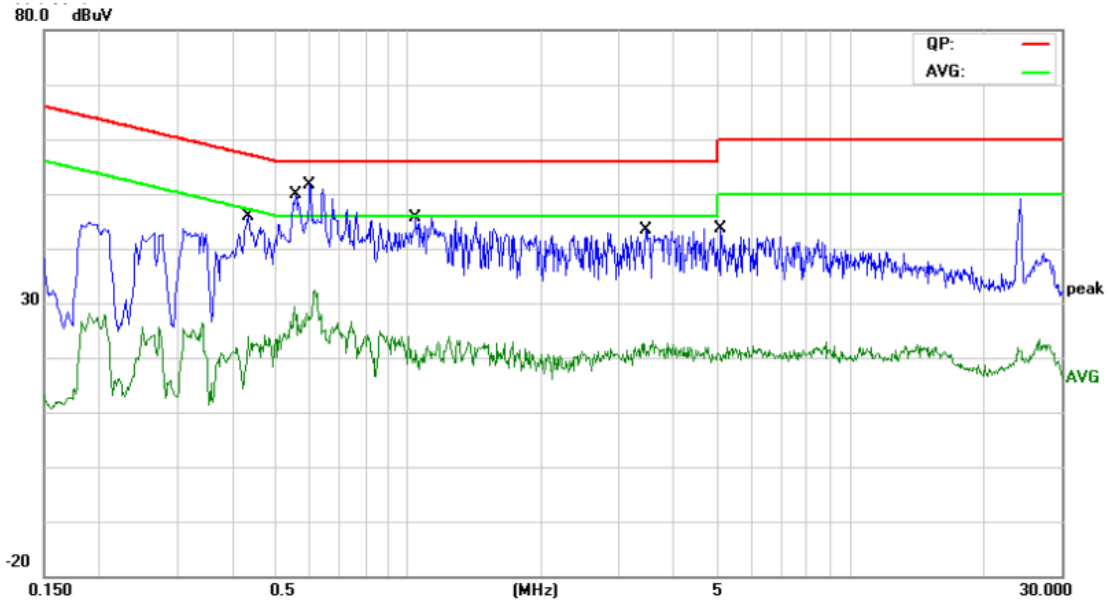

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4340	30.23	10.91	41.14	57.18	-16.04	QP
2		0.4340	12.62	10.91	23.53	47.18	-23.65	AVG
3		0.5580	31.77	10.92	42.69	56.00	-13.31	QP
4		0.5580	15.33	10.92	26.25	46.00	-19.75	AVG
5	*	0.5980	34.95	10.91	45.86	56.00	-10.14	QP
6		0.5980	17.40	10.91	28.31	46.00	-17.69	AVG
7		1.0420	27.00	10.67	37.67	56.00	-18.33	QP
8		1.0420	11.09	10.67	21.76	46.00	-24.24	AVG
9		3.4420	24.77	10.15	34.92	56.00	-21.08	QP
10		3.4420	12.18	10.15	22.33	46.00	-23.67	AVG
11		5.0980	22.99	10.02	33.01	60.00	-26.99	QP
12		5.0980	10.85	10.02	20.87	50.00	-29.13	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



Attachment B--Unwanted Emissions Data

---Radiated Unwanted Emissions

9 KHz~30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB

Below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 TX a Mode(5180MHz)		
Remark:	Only worse case is reported.		

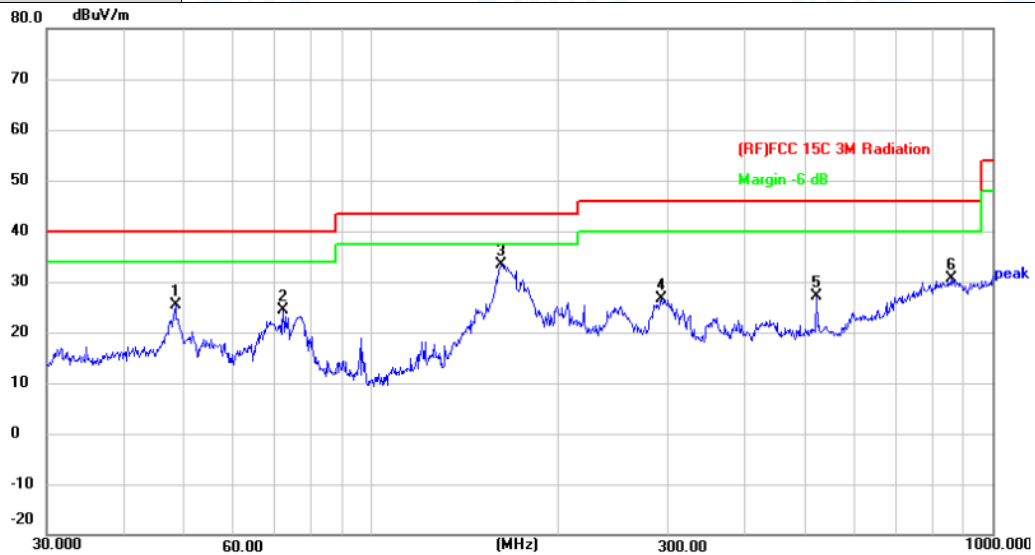

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.3316	48.00	-22.58	25.42	40.00	-14.58	peak
2	72.0843	49.40	-24.95	24.45	40.00	-15.55	peak
3 *	161.4742	55.69	-22.27	33.42	43.50	-10.08	peak
4	293.0842	47.82	-21.09	26.73	46.00	-19.27	peak
5	520.8882	41.96	-14.81	27.15	46.00	-18.85	peak
6	860.0352	38.66	-8.04	30.62	46.00	-15.38	peak


*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 TX a Mode(5180MHz)		
Remark:	Only worse case is reported.		

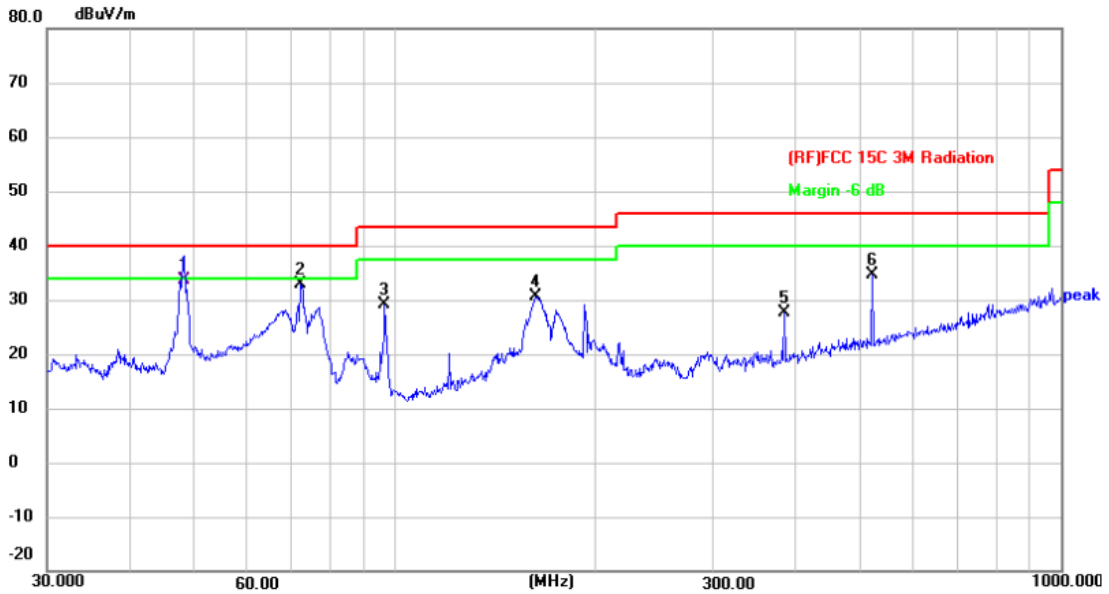

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	48.1626	56.28	-22.58	33.70	40.00	-6.30	QP
2	72.0843	57.74	-24.95	32.79	40.00	-7.21	peak
3	96.4362	55.27	-26.04	29.23	43.50	-14.27	peak
4	162.6106	53.03	-22.35	30.68	43.50	-12.82	peak
5	383.9318	46.06	-18.37	27.69	46.00	-18.31	peak
6	520.8882	49.33	-14.81	34.52	46.00	-11.48	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Above 1GHz

5180MHz-5240MHz(U-NII-1)

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10360.355	51.50	6.06	57.56	68.30	-10.74	peak
2 *	10360.754	42.56	6.06	48.62	54.00	-5.38	AVG

Remark:
Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
 5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10360.341	42.31	6.06	48.37	54.00	-5.63	AVG
2	10360.854	52.10	6.06	58.16	68.30	-10.14	peak

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
 5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.554</td> <td>50.54</td> <td>6.21</td> <td>56.75</td> <td>68.30</td> <td>-11.55</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10400.867</td> <td>41.64</td> <td>6.21</td> <td>47.85</td> <td>54.00</td> <td>-6.15</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10400.554	50.54	6.21	56.75	68.30	-11.55	peak	2 *	10400.867	41.64	6.21	47.85	54.00	-6.15	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10400.554	50.54	6.21	56.75	68.30	-11.55	peak																				
2 *	10400.867	41.64	6.21	47.85	54.00	-6.15	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.635</td> <td>51.35</td> <td>6.21</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10400.674</td> <td>41.72</td> <td>6.21</td> <td>47.93</td> <td>54.00</td> <td>-6.07</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10400.635	51.35	6.21	57.56	68.30	-10.74	peak	2 *	10400.674	41.72	6.21	47.93	54.00	-6.07	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10400.635	51.35	6.21	57.56	68.30	-10.74	peak																				
2 *	10400.674	41.72	6.21	47.93	54.00	-6.07	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10480.357	41.91	6.36	48.27	54.00	-5.73	AVG
2	10480.368	51.50	6.36	57.86	68.30	-10.44	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10480.227	51.60	6.36	57.96	68.30	-10.34	peak
2 *	10480.638	42.37	6.36	48.73	54.00	-5.27	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.445</td> <td>51.52</td> <td>6.06</td> <td>57.58</td> <td>68.30</td> <td>-10.72</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10360.498</td> <td>42.23</td> <td>6.06</td> <td>48.29</td> <td>54.00</td> <td>-5.71</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10360.445	51.52	6.06	57.58	68.30	-10.72	peak	2 *	10360.498	42.23	6.06	48.29	54.00	-5.71	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10360.445	51.52	6.06	57.58	68.30	-10.72	peak																				
2 *	10360.498	42.23	6.06	48.29	54.00	-5.71	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.678</td> <td>51.45</td> <td>6.06</td> <td>57.51</td> <td>68.30</td> <td>-10.79</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10360.732</td> <td>42.16</td> <td>6.06</td> <td>48.22</td> <td>54.00</td> <td>-5.78</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10360.678	51.45	6.06	57.51	68.30	-10.79	peak	2 *	10360.732	42.16	6.06	48.22	54.00	-5.78	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10360.678	51.45	6.06	57.51	68.30	-10.79	peak																				
2 *	10360.732	42.16	6.06	48.22	54.00	-5.78	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.567</td> <td>51.37</td> <td>6.21</td> <td>57.58</td> <td>68.30</td> <td>-10.72</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10400.977</td> <td>41.42</td> <td>6.21</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10400.567	51.37	6.21	57.58	68.30	-10.72	peak	2 *	10400.977	41.42	6.21	47.63	54.00	-6.37	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10400.567	51.37	6.21	57.58	68.30	-10.72	peak																				
2 *	10400.977	41.42	6.21	47.63	54.00	-6.37	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.857</td> <td>42.07</td> <td>6.21</td> <td>48.28</td> <td>54.00</td> <td>-5.72</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10400.969</td> <td>51.35</td> <td>6.21</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10400.857	42.07	6.21	48.28	54.00	-5.72	AVG	2	10400.969	51.35	6.21	57.56	68.30	-10.74	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10400.857	42.07	6.21	48.28	54.00	-5.72	AVG																				
2	10400.969	51.35	6.21	57.56	68.30	-10.74	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.187</td> <td>50.22</td> <td>6.36</td> <td>56.58</td> <td>68.30</td> <td>-11.72</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10480.252</td> <td>40.57</td> <td>6.36</td> <td>46.93</td> <td>54.00</td> <td>-7.07</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10480.187	50.22	6.36	56.58	68.30	-11.72	peak	2 *	10480.252	40.57	6.36	46.93	54.00	-7.07	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10480.187	50.22	6.36	56.58	68.30	-11.72	peak																				
2 *	10480.252	40.57	6.36	46.93	54.00	-7.07	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.635</td> <td>51.89</td> <td>6.36</td> <td>58.25</td> <td>68.30</td> <td>-10.05</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10480.754</td> <td>41.20</td> <td>6.36</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10480.635	51.89	6.36	58.25	68.30	-10.05	peak	2 *	10480.754	41.20	6.36	47.56	54.00	-6.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10480.635	51.89	6.36	58.25	68.30	-10.05	peak																				
2 *	10480.754	41.20	6.36	47.56	54.00	-6.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10360.512</td> <td>41.57</td> <td>6.06</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10360.612</td> <td>51.30</td> <td>6.06</td> <td>57.36</td> <td>68.30</td> <td>-10.94</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10360.512	41.57	6.06	47.63	54.00	-6.37	AVG	2	10360.612	51.30	6.06	57.36	68.30	-10.94	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10360.512	41.57	6.06	47.63	54.00	-6.37	AVG																				
2	10360.612	51.30	6.06	57.36	68.30	-10.94	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.574</td> <td>52.07</td> <td>6.06</td> <td>58.13</td> <td>68.30</td> <td>-10.17</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10360.632</td> <td>41.47</td> <td>6.06</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10360.574	52.07	6.06	58.13	68.30	-10.17	peak	2 *	10360.632	41.47	6.06	47.53	54.00	-6.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10360.574	52.07	6.06	58.13	68.30	-10.17	peak																				
2 *	10360.632	41.47	6.06	47.53	54.00	-6.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.557</td> <td>51.04</td> <td>6.21</td> <td>57.25</td> <td>68.30</td> <td>-11.05</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10400.562</td> <td>41.32</td> <td>6.21</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10400.557	51.04	6.21	57.25	68.30	-11.05	peak	2 *	10400.562	41.32	6.21	47.53	54.00	-6.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10400.557	51.04	6.21	57.25	68.30	-11.05	peak																				
2 *	10400.562	41.32	6.21	47.53	54.00	-6.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.635</td> <td>51.31</td> <td>6.21</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10400.874</td> <td>42.32</td> <td>6.21</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10400.635	51.31	6.21	57.52	68.30	-10.78	peak	2 *	10400.874	42.32	6.21	48.53	54.00	-5.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10400.635	51.31	6.21	57.52	68.30	-10.78	peak																				
2 *	10400.874	42.32	6.21	48.53	54.00	-5.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11 ac(VHT20) Mode 5240MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.578</td> <td>42.17</td> <td>6.36</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10480.684</td> <td>51.17</td> <td>6.36</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10480.578	42.17	6.36	48.53	54.00	-5.47	AVG	2	10480.684	51.17	6.36	57.53	68.30	-10.77	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10480.578	42.17	6.36	48.53	54.00	-5.47	AVG																				
2	10480.684	51.17	6.36	57.53	68.30	-10.77	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.586</td> <td>42.16</td> <td>6.36</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10480.754</td> <td>51.49</td> <td>6.36</td> <td>57.85</td> <td>68.30</td> <td>-10.45</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10480.586	42.16	6.36	48.52	54.00	-5.48	AVG	2	10480.754	51.49	6.36	57.85	68.30	-10.45	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10480.586	42.16	6.36	48.52	54.00	-5.48	AVG																				
2	10480.754	51.49	6.36	57.85	68.30	-10.45	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.689</td> <td>51.72</td> <td>6.14</td> <td>57.86</td> <td>68.30</td> <td>-10.44</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10380.874</td> <td>42.57</td> <td>6.14</td> <td>48.71</td> <td>54.00</td> <td>-5.29</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10380.689	51.72	6.14	57.86	68.30	-10.44	peak	2 *	10380.874	42.57	6.14	48.71	54.00	-5.29	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10380.689	51.72	6.14	57.86	68.30	-10.44	peak																				
2 *	10380.874	42.57	6.14	48.71	54.00	-5.29	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10380.547</td> <td>41.71</td> <td>6.14</td> <td>47.85</td> <td>54.00</td> <td>-6.15</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10380.678</td> <td>51.38</td> <td>6.14</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10380.547	41.71	6.14	47.85	54.00	-6.15	AVG	2	10380.678	51.38	6.14	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10380.547	41.71	6.14	47.85	54.00	-6.15	AVG																				
2	10380.678	51.38	6.14	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10460.674</td> <td>41.21</td> <td>6.32</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10460.682</td> <td>51.20</td> <td>6.32</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10460.674	41.21	6.32	47.53	54.00	-6.47	AVG	2	10460.682	51.20	6.32	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10460.674	41.21	6.32	47.53	54.00	-6.47	AVG																				
2	10460.682	51.20	6.32	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.667</td> <td>50.93</td> <td>6.32</td> <td>57.25</td> <td>68.30</td> <td>-11.05</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10460.857</td> <td>41.51</td> <td>6.32</td> <td>47.83</td> <td>54.00</td> <td>-6.17</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10460.667	50.93	6.32	57.25	68.30	-11.05	peak	2 *	10460.857	41.51	6.32	47.83	54.00	-6.17	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10460.667	50.93	6.32	57.25	68.30	-11.05	peak																				
2 *	10460.857	41.51	6.32	47.83	54.00	-6.17	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.596</td> <td>51.38</td> <td>6.14</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10380.654</td> <td>41.42</td> <td>6.14</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10380.596	51.38	6.14	57.52	68.30	-10.78	peak	2 *	10380.654	41.42	6.14	47.56	54.00	-6.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10380.596	51.38	6.14	57.52	68.30	-10.78	peak																				
2 *	10380.654	41.42	6.14	47.56	54.00	-6.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10380.434</td> <td>41.72</td> <td>6.14</td> <td>47.86</td> <td>54.00</td> <td>-6.14</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10380.852</td> <td>51.00</td> <td>6.14</td> <td>57.14</td> <td>68.30</td> <td>-11.16</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10380.434	41.72	6.14	47.86	54.00	-6.14	AVG	2	10380.852	51.00	6.14	57.14	68.30	-11.16	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10380.434	41.72	6.14	47.86	54.00	-6.14	AVG																				
2	10380.852	51.00	6.14	57.14	68.30	-11.16	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10460.237</td> <td>41.61</td> <td>6.32</td> <td>47.93</td> <td>54.00</td> <td>-6.07</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10460.637</td> <td>51.26</td> <td>6.32</td> <td>57.58</td> <td>68.30</td> <td>-10.72</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10460.237	41.61	6.32	47.93	54.00	-6.07	AVG	2	10460.637	51.26	6.32	57.58	68.30	-10.72	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10460.237	41.61	6.32	47.93	54.00	-6.07	AVG																				
2	10460.637	51.26	6.32	57.58	68.30	-10.72	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.275</td> <td>50.20</td> <td>6.32</td> <td>56.52</td> <td>68.30</td> <td>-11.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10460.574</td> <td>41.21</td> <td>6.32</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10460.275	50.20	6.32	56.52	68.30	-11.78	peak	2 *	10460.574	41.21	6.32	47.53	54.00	-6.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10460.275	50.20	6.32	56.52	68.30	-11.78	peak																				
2 *	10460.574	41.21	6.32	47.53	54.00	-6.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10420.428</td> <td>41.28</td> <td>6.25</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10420.637</td> <td>51.27</td> <td>6.25</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10420.428	41.28	6.25	47.53	54.00	-6.47	AVG	2	10420.637	51.27	6.25	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10420.428	41.28	6.25	47.53	54.00	-6.47	AVG																				
2	10420.637	51.27	6.25	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.554</td> <td>52.02</td> <td>6.25</td> <td>58.27</td> <td>68.30</td> <td>-10.03</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10420.637</td> <td>41.61</td> <td>6.25</td> <td>47.86</td> <td>54.00</td> <td>-6.14</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10420.554	52.02	6.25	58.27	68.30	-10.03	peak	2 *	10420.637	41.61	6.25	47.86	54.00	-6.14	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10420.554	52.02	6.25	58.27	68.30	-10.03	peak																				
2 *	10420.637	41.61	6.25	47.86	54.00	-6.14	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



5260MHz-5320MHz(U-NII-2A)

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.762</td> <td>51.47</td> <td>6.39</td> <td>57.86</td> <td>68.30</td> <td>-10.44</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10520.865</td> <td>42.13</td> <td>6.39</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10520.762	51.47	6.39	57.86	68.30	-10.44	peak	2 *	10520.865	42.13	6.39	48.52	54.00	-5.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10520.762	51.47	6.39	57.86	68.30	-10.44	peak																				
2 *	10520.865	42.13	6.39	48.52	54.00	-5.48	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.678</td> <td>52.07</td> <td>6.39</td> <td>58.46</td> <td>68.30</td> <td>-9.84</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10520.996</td> <td>42.53</td> <td>6.40</td> <td>48.93</td> <td>54.00</td> <td>-5.07</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10520.678	52.07	6.39	58.46	68.30	-9.84	peak	2 *	10520.996	42.53	6.40	48.93	54.00	-5.07	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10520.678	52.07	6.39	58.46	68.30	-9.84	peak																				
2 *	10520.996	42.53	6.40	48.93	54.00	-5.07	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10560.447</td> <td>42.14</td> <td>6.39</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10560.574</td> <td>51.46</td> <td>6.39</td> <td>57.85</td> <td>68.30</td> <td>-10.45</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10560.447	42.14	6.39	48.53	54.00	-5.47	AVG	2	10560.574	51.46	6.39	57.85	68.30	-10.45	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10560.447	42.14	6.39	48.53	54.00	-5.47	AVG																				
2	10560.574	51.46	6.39	57.85	68.30	-10.45	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10560.857</td> <td>51.43</td> <td>6.39</td> <td>57.82</td> <td>68.30</td> <td>-10.48</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10560.863</td> <td>41.90</td> <td>6.39</td> <td>48.29</td> <td>54.00</td> <td>-5.71</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10560.857	51.43	6.39	57.82	68.30	-10.48	peak	2 *	10560.863	41.90	6.39	48.29	54.00	-5.71	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10560.857	51.43	6.39	57.82	68.30	-10.48	peak																				
2 *	10560.863	41.90	6.39	48.29	54.00	-5.71	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10640.687</td> <td>41.90</td> <td>6.63</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10640.798</td> <td>51.20</td> <td>6.63</td> <td>57.83</td> <td>68.30</td> <td>-10.47</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10640.687	41.90	6.63	48.53	54.00	-5.47	AVG	2	10640.798	51.20	6.63	57.83	68.30	-10.47	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10640.687	41.90	6.63	48.53	54.00	-5.47	AVG																				
2	10640.798	51.20	6.63	57.83	68.30	-10.47	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.457</td> <td>50.90</td> <td>6.63</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10640.686</td> <td>41.64</td> <td>6.63</td> <td>48.27</td> <td>54.00</td> <td>-5.73</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10640.457	50.90	6.63	57.53	68.30	-10.77	peak	2 *	10640.686	41.64	6.63	48.27	54.00	-5.73	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10640.457	50.90	6.63	57.53	68.30	-10.77	peak																				
2 *	10640.686	41.64	6.63	48.27	54.00	-5.73	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10520.562</td> <td>41.16</td> <td>6.40</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10520.854</td> <td>51.85</td> <td>6.39</td> <td>58.24</td> <td>68.30</td> <td>-10.06</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10520.562	41.16	6.40	47.56	54.00	-6.44	AVG	2	10520.854	51.85	6.39	58.24	68.30	-10.06	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10520.562	41.16	6.40	47.56	54.00	-6.44	AVG																				
2	10520.854	51.85	6.39	58.24	68.30	-10.06	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10520.556</td> <td>41.19</td> <td>6.40</td> <td>47.59</td> <td>54.00</td> <td>-6.41</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10520.745</td> <td>51.17</td> <td>6.39</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10520.556	41.19	6.40	47.59	54.00	-6.41	AVG	2	10520.745	51.17	6.39	57.56	68.30	-10.74	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10520.556	41.19	6.40	47.59	54.00	-6.41	AVG																				
2	10520.745	51.17	6.39	57.56	68.30	-10.74	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10560.451</td> <td>50.73</td> <td>6.39</td> <td>57.12</td> <td>68.30</td> <td>-11.18</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10560.657</td> <td>40.86</td> <td>6.39</td> <td>47.25</td> <td>54.00</td> <td>-6.75</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10560.451	50.73	6.39	57.12	68.30	-11.18	peak	2 *	10560.657	40.86	6.39	47.25	54.00	-6.75	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10560.451	50.73	6.39	57.12	68.30	-11.18	peak																				
2 *	10560.657	40.86	6.39	47.25	54.00	-6.75	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10560.325</td> <td>41.82</td> <td>6.39</td> <td>48.21</td> <td>54.00</td> <td>-5.79</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10560.654</td> <td>50.86</td> <td>6.39</td> <td>57.25</td> <td>68.30</td> <td>-11.05</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10560.325	41.82	6.39	48.21	54.00	-5.79	AVG	2	10560.654	50.86	6.39	57.25	68.30	-11.05	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10560.325	41.82	6.39	48.21	54.00	-5.79	AVG																				
2	10560.654	50.86	6.39	57.25	68.30	-11.05	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10640.544</td> <td>41.89</td> <td>6.63</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10640.856</td> <td>51.26</td> <td>6.63</td> <td>57.89</td> <td>68.30</td> <td>-10.41</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10640.544	41.89	6.63	48.52	54.00	-5.48	AVG	2	10640.856	51.26	6.63	57.89	68.30	-10.41	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10640.544	41.89	6.63	48.52	54.00	-5.48	AVG																				
2	10640.856	51.26	6.63	57.89	68.30	-10.41	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.247</td> <td>51.26</td> <td>6.62</td> <td>57.88</td> <td>68.30</td> <td>-10.42</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10640.653</td> <td>41.89</td> <td>6.63</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10640.247	51.26	6.62	57.88	68.30	-10.42	peak	2 *	10640.653	41.89	6.63	48.52	54.00	-5.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10640.247	51.26	6.62	57.88	68.30	-10.42	peak																				
2 *	10640.653	41.89	6.63	48.52	54.00	-5.48	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10520.435</td> <td>41.18</td> <td>6.40</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10520.725</td> <td>51.13</td> <td>6.39</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10520.435	41.18	6.40	47.58	54.00	-6.42	AVG	2	10520.725	51.13	6.39	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10520.435	41.18	6.40	47.58	54.00	-6.42	AVG																				
2	10520.725	51.13	6.39	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.571</td> <td>51.72</td> <td>6.40</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10520.635</td> <td>41.14</td> <td>6.39</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10520.571	51.72	6.40	58.12	68.30	-10.18	peak	2 *	10520.635	41.14	6.39	47.53	54.00	-6.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10520.571	51.72	6.40	58.12	68.30	-10.18	peak																				
2 *	10520.635	41.14	6.39	47.53	54.00	-6.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10560.248</td> <td>41.14</td> <td>6.39</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10560.451</td> <td>51.13</td> <td>6.39</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10560.248	41.14	6.39	47.53	54.00	-6.47	AVG	2	10560.451	51.13	6.39	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10560.248	41.14	6.39	47.53	54.00	-6.47	AVG																				
2	10560.451	51.13	6.39	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10560.124</td> <td>41.14</td> <td>6.39</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10560.352</td> <td>51.14</td> <td>6.39</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10560.124	41.14	6.39	47.53	54.00	-6.47	AVG	2	10560.352	51.14	6.39	57.53	68.30	-10.77	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10560.124	41.14	6.39	47.53	54.00	-6.47	AVG																				
2	10560.352	51.14	6.39	57.53	68.30	-10.77	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11 ac(VHT20) Mode 5320MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10640.563</td> <td>40.90</td> <td>6.63</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10640.663</td> <td>50.90</td> <td>6.63</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10640.563	40.90	6.63	47.53	54.00	-6.47	AVG	2	10640.663	50.90	6.63	57.53	68.30	-10.77	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10640.563	40.90	6.63	47.53	54.00	-6.47	AVG																				
2	10640.663	50.90	6.63	57.53	68.30	-10.77	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.638</td> <td>50.90</td> <td>6.63</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10640.752</td> <td>40.96</td> <td>6.63</td> <td>47.59</td> <td>54.00</td> <td>-6.41</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10640.638	50.90	6.63	57.53	68.30	-10.77	peak	2 *	10640.752	40.96	6.63	47.59	54.00	-6.41	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10640.638	50.90	6.63	57.53	68.30	-10.77	peak																				
2 *	10640.752	40.96	6.63	47.59	54.00	-6.41	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.545</td> <td>51.17</td> <td>6.39</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10540.687</td> <td>41.13</td> <td>6.39</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10540.545	51.17	6.39	57.56	68.30	-10.74	peak	2 *	10540.687	41.13	6.39	47.52	54.00	-6.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10540.545	51.17	6.39	57.56	68.30	-10.74	peak																				
2 *	10540.687	41.13	6.39	47.52	54.00	-6.48	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.567</td> <td>51.12</td> <td>6.39</td> <td>57.51</td> <td>68.30</td> <td>-10.79</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10540.587</td> <td>41.14</td> <td>6.39</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10540.567	51.12	6.39	57.51	68.30	-10.79	peak	2 *	10540.587	41.14	6.39	47.53	54.00	-6.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10540.567	51.12	6.39	57.51	68.30	-10.79	peak																				
2 *	10540.587	41.14	6.39	47.53	54.00	-6.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.659</td> <td>51.35</td> <td>6.50</td> <td>57.85</td> <td>68.30</td> <td>-10.45</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10620.799</td> <td>41.05</td> <td>6.51</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10620.659	51.35	6.50	57.85	68.30	-10.45	peak	2 *	10620.799	41.05	6.51	47.56	54.00	-6.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10620.659	51.35	6.50	57.85	68.30	-10.45	peak																				
2 *	10620.799	41.05	6.51	47.56	54.00	-6.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.658</td> <td>51.02</td> <td>6.50</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10620.685</td> <td>42.02</td> <td>6.51</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10620.658	51.02	6.50	57.52	68.30	-10.78	peak	2 *	10620.685	42.02	6.51	48.53	54.00	-5.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10620.658	51.02	6.50	57.52	68.30	-10.78	peak																				
2 *	10620.685	42.02	6.51	48.53	54.00	-5.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.544</td> <td>50.92</td> <td>6.39</td> <td>57.31</td> <td>68.30</td> <td>-10.99</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10540.725</td> <td>41.47</td> <td>6.39</td> <td>47.86</td> <td>54.00</td> <td>-6.14</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10540.544	50.92	6.39	57.31	68.30	-10.99	peak	2 *	10540.725	41.47	6.39	47.86	54.00	-6.14	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10540.544	50.92	6.39	57.31	68.30	-10.99	peak																				
2 *	10540.725	41.47	6.39	47.86	54.00	-6.14	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10540.257</td> <td>40.73</td> <td>6.39</td> <td>47.12</td> <td>54.00</td> <td>-6.88</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10540.367</td> <td>51.17</td> <td>6.39</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10540.257	40.73	6.39	47.12	54.00	-6.88	AVG	2	10540.367	51.17	6.39	57.56	68.30	-10.74	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10540.257	40.73	6.39	47.12	54.00	-6.88	AVG																				
2	10540.367	51.17	6.39	57.56	68.30	-10.74	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.125</td> <td>50.74</td> <td>6.50</td> <td>57.24</td> <td>68.30</td> <td>-11.06</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10620.622</td> <td>40.08</td> <td>6.50</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10620.125	50.74	6.50	57.24	68.30	-11.06	peak	2 *	10620.622	40.08	6.50	46.58	54.00	-7.42	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10620.125	50.74	6.50	57.24	68.30	-11.06	peak																				
2 *	10620.622	40.08	6.50	46.58	54.00	-7.42	AVG																				
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10620.257</td> <td>40.65</td> <td>6.50</td> <td>47.15</td> <td>54.00</td> <td>-6.85</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10620.548</td> <td>51.02</td> <td>6.50</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10620.257	40.65	6.50	47.15	54.00	-6.85	AVG	2	10620.548	51.02	6.50	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	10620.257	40.65	6.50	47.15	54.00	-6.85	AVG																				
2	10620.548	51.02	6.50	57.52	68.30	-10.78	peak																				
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.117</td> <td>51.18</td> <td>6.38</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10580.323</td> <td>41.20</td> <td>6.38</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10580.117	51.18	6.38	57.56	68.30	-10.74	peak	2 *	10580.323	41.20	6.38	47.58	54.00	-6.42	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10580.117	51.18	6.38	57.56	68.30	-10.74	peak																				
2 *	10580.323	41.20	6.38	47.58	54.00	-6.42	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.658</td> <td>51.16</td> <td>6.38</td> <td>57.54</td> <td>68.30</td> <td>-10.76</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10580.729</td> <td>41.20</td> <td>6.38</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10580.658	51.16	6.38	57.54	68.30	-10.76	peak	2 *	10580.729	41.20	6.38	47.58	54.00	-6.42	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	10580.658	51.16	6.38	57.54	68.30	-10.76	peak																				
2 *	10580.729	41.20	6.38	47.58	54.00	-6.42	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



5500MHz-5720MHz(U-NII-2C)

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.454	49.45	8.17	57.62	68.30	-10.68	peak
2 *	11000.865	40.36	8.17	48.53	54.00	-5.47	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.635	49.29	8.17	57.46	68.30	-10.84	peak
2 *	11000.725	39.66	8.17	47.83	54.00	-6.17	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.685</td> <td>49.84</td> <td>7.84</td> <td>57.68</td> <td>68.30</td> <td>-10.62</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11160.741</td> <td>40.12</td> <td>7.84</td> <td>47.96</td> <td>54.00</td> <td>-6.04</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11160.685	49.84	7.84	57.68	68.30	-10.62	peak	2 *	11160.741	40.12	7.84	47.96	54.00	-6.04	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11160.685	49.84	7.84	57.68	68.30	-10.62	peak																				
2 *	11160.741	40.12	7.84	47.96	54.00	-6.04	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.635</td> <td>49.62</td> <td>7.84</td> <td>57.46</td> <td>68.30</td> <td>-10.84</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11160.725</td> <td>39.72</td> <td>7.84</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11160.635	49.62	7.84	57.46	68.30	-10.84	peak	2 *	11160.725	39.72	7.84	47.56	54.00	-6.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11160.635	49.62	7.84	57.46	68.30	-10.84	peak																				
2 *	11160.725	39.72	7.84	47.56	54.00	-6.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11a Mode 5720MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.759</td> <td>48.54</td> <td>8.99</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11440.916</td> <td>38.87</td> <td>8.99</td> <td>47.86</td> <td>54.00</td> <td>-6.14</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11440.759	48.54	8.99	57.53	68.30	-10.77	peak	2 *	11440.916	38.87	8.99	47.86	54.00	-6.14	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11440.759	48.54	8.99	57.53	68.30	-10.77	peak																				
2 *	11440.916	38.87	8.99	47.86	54.00	-6.14	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11a Mode 5720MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11440.376</td> <td>38.66</td> <td>8.99</td> <td>47.65</td> <td>54.00</td> <td>-6.35</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11440.965</td> <td>48.87</td> <td>8.99</td> <td>57.86</td> <td>68.30</td> <td>-10.44</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11440.376	38.66	8.99	47.65	54.00	-6.35	AVG	2	11440.965	48.87	8.99	57.86	68.30	-10.44	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11440.376	38.66	8.99	47.65	54.00	-6.35	AVG																				
2	11440.965	48.87	8.99	57.86	68.30	-10.44	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.638</td> <td>49.11</td> <td>8.17</td> <td>57.28</td> <td>68.30</td> <td>-11.02</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11000.855</td> <td>39.52</td> <td>8.17</td> <td>47.69</td> <td>54.00</td> <td>-6.31</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11000.638	49.11	8.17	57.28	68.30	-11.02	peak	2 *	11000.855	39.52	8.17	47.69	54.00	-6.31	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11000.638	49.11	8.17	57.28	68.30	-11.02	peak																				
2 *	11000.855	39.52	8.17	47.69	54.00	-6.31	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11 n(HT20) Mode 5500MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.685</td> <td>49.35</td> <td>8.17</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11000.752</td> <td>40.39</td> <td>8.17</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11000.685	49.35	8.17	57.52	68.30	-10.78	peak	2 *	11000.752	40.39	8.17	48.56	54.00	-5.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11000.685	49.35	8.17	57.52	68.30	-10.78	peak																				
2 *	11000.752	40.39	8.17	48.56	54.00	-5.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.555</td> <td>49.42</td> <td>7.84</td> <td>57.26</td> <td>68.30</td> <td>-11.04</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11160.635</td> <td>39.37</td> <td>7.84</td> <td>47.21</td> <td>54.00</td> <td>-6.79</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11160.555	49.42	7.84	57.26	68.30	-11.04	peak	2 *	11160.635	39.37	7.84	47.21	54.00	-6.79	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11160.555	49.42	7.84	57.26	68.30	-11.04	peak																				
2 *	11160.635	39.37	7.84	47.21	54.00	-6.79	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.557</td> <td>49.28</td> <td>7.84</td> <td>57.12</td> <td>68.30</td> <td>-11.18</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11160.654</td> <td>39.68</td> <td>7.84</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11160.557	49.28	7.84	57.12	68.30	-11.18	peak	2 *	11160.654	39.68	7.84	47.52	54.00	-6.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11160.557	49.28	7.84	57.12	68.30	-11.18	peak																				
2 *	11160.654	39.68	7.84	47.52	54.00	-6.48	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5720MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.557</td> <td>48.55</td> <td>8.99</td> <td>57.54</td> <td>68.30</td> <td>-10.76</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11440.863</td> <td>39.26</td> <td>8.99</td> <td>48.25</td> <td>54.00</td> <td>-5.75</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11440.557	48.55	8.99	57.54	68.30	-10.76	peak	2 *	11440.863	39.26	8.99	48.25	54.00	-5.75	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11440.557	48.55	8.99	57.54	68.30	-10.76	peak																				
2 *	11440.863	39.26	8.99	48.25	54.00	-5.75	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5720MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.527</td> <td>48.57</td> <td>8.99</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11440.567</td> <td>39.53</td> <td>8.99</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11440.527	48.57	8.99	57.56	68.30	-10.74	peak	2 *	11440.567	39.53	8.99	48.52	54.00	-5.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11440.527	48.57	8.99	57.56	68.30	-10.74	peak																				
2 *	11440.567	39.53	8.99	48.52	54.00	-5.48	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11000.637</td> <td>39.36</td> <td>8.17</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11000.678</td> <td>49.95</td> <td>8.17</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11000.637	39.36	8.17	47.53	54.00	-6.47	AVG	2	11000.678	49.95	8.17	58.12	68.30	-10.18	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11000.637	39.36	8.17	47.53	54.00	-6.47	AVG																				
2	11000.678	49.95	8.17	58.12	68.30	-10.18	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11 ac(VHT20) Mode 5500MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11000.663</td> <td>39.36</td> <td>8.17</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11000.825</td> <td>49.95</td> <td>8.17</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11000.663	39.36	8.17	47.53	54.00	-6.47	AVG	2	11000.825	49.95	8.17	58.12	68.30	-10.18	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11000.663	39.36	8.17	47.53	54.00	-6.47	AVG																				
2	11000.825	49.95	8.17	58.12	68.30	-10.18	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11 ac(VHT20) Mode 5580MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.637</td> <td>49.70</td> <td>7.84</td> <td>57.54</td> <td>68.30</td> <td>-10.76</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11160.755</td> <td>39.72</td> <td>7.84</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11160.637	49.70	7.84	57.54	68.30	-10.76	peak	2 *	11160.755	39.72	7.84	47.56	54.00	-6.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11160.637	49.70	7.84	57.54	68.30	-10.76	peak																				
2 *	11160.755	39.72	7.84	47.56	54.00	-6.44	AVG																				
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11 ac(VHT20) Mode 5580MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11160.257</td> <td>40.68</td> <td>7.84</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11160.741</td> <td>49.72</td> <td>7.84</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11160.257	40.68	7.84	48.52	54.00	-5.48	AVG	2	11160.741	49.72	7.84	57.56	68.30	-10.74	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11160.257	40.68	7.84	48.52	54.00	-5.48	AVG																				
2	11160.741	49.72	7.84	57.56	68.30	-10.74	peak																				
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11 ac(VHT20) Mode 5720MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11440.112</td> <td>39.54</td> <td>8.99</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11440.635</td> <td>48.53</td> <td>8.99</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11440.112	39.54	8.99	48.53	54.00	-5.47	AVG	2	11440.635	48.53	8.99	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11440.112	39.54	8.99	48.53	54.00	-5.47	AVG																				
2	11440.635	48.53	8.99	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11 ac(VHT20) Mode 5720MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11440.322</td> <td>38.54</td> <td>8.99</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11440.635</td> <td>48.45</td> <td>8.99</td> <td>57.44</td> <td>68.30</td> <td>-10.86</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11440.322	38.54	8.99	47.53	54.00	-6.47	AVG	2	11440.635	48.45	8.99	57.44	68.30	-10.86	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11440.322	38.54	8.99	47.53	54.00	-6.47	AVG																				
2	11440.635	48.45	8.99	57.44	68.30	-10.86	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11020.258	39.45	8.08	47.53	54.00	-6.47	AVG
2	11020.653	49.44	8.08	57.52	68.30	-10.78	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11020.655	39.45	8.08	47.53	54.00	-6.47	AVG
2	11020.748	49.44	8.08	57.52	68.30	-10.78	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.267</td> <td>49.76</td> <td>7.76</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11100.687</td> <td>39.80</td> <td>7.76</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11100.267	49.76	7.76	57.52	68.30	-10.78	peak	2 *	11100.687	39.80	7.76	47.56	54.00	-6.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11100.267	49.76	7.76	57.52	68.30	-10.78	peak																				
2 *	11100.687	39.80	7.76	47.56	54.00	-6.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.567</td> <td>50.12</td> <td>7.76</td> <td>57.88</td> <td>68.30</td> <td>-10.42</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11100.657</td> <td>40.11</td> <td>7.76</td> <td>47.87</td> <td>54.00</td> <td>-6.13</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11100.567	50.12	7.76	57.88	68.30	-10.42	peak	2 *	11100.657	40.11	7.76	47.87	54.00	-6.13	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11100.567	50.12	7.76	57.88	68.30	-10.42	peak																				
2 *	11100.657	40.11	7.76	47.87	54.00	-6.13	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11340.657	48.65	8.91	57.56	68.30	-10.74	peak
2 *	11340.657	38.83	8.91	47.74	54.00	-6.26	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11340.435	48.55	8.91	57.46	68.30	-10.84	peak
2 *	11340.574	38.67	8.91	47.58	54.00	-6.42	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.116</td> <td>49.44</td> <td>8.09</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11020.689</td> <td>39.45</td> <td>8.08</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11020.116	49.44	8.09	57.53	68.30	-10.77	peak	2 *	11020.689	39.45	8.08	47.53	54.00	-6.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11020.116	49.44	8.09	57.53	68.30	-10.77	peak																				
2 *	11020.689	39.45	8.08	47.53	54.00	-6.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11020.596</td> <td>39.46</td> <td>8.08</td> <td>47.54</td> <td>54.00</td> <td>-6.46</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11020.752</td> <td>49.44</td> <td>8.08</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11020.596	39.46	8.08	47.54	54.00	-6.46	AVG	2	11020.752	49.44	8.08	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11020.596	39.46	8.08	47.54	54.00	-6.46	AVG																				
2	11020.752	49.44	8.08	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.468</td> <td>49.76</td> <td>7.76</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11100.475</td> <td>40.80</td> <td>7.76</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11100.468	49.76	7.76	57.52	68.30	-10.78	peak	2 *	11100.475	40.80	7.76	48.56	54.00	-5.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11100.468	49.76	7.76	57.52	68.30	-10.78	peak																				
2 *	11100.475	40.80	7.76	48.56	54.00	-5.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11100.674</td> <td>39.17</td> <td>7.76</td> <td>46.93</td> <td>54.00</td> <td>-7.07</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11100.852</td> <td>49.36</td> <td>7.76</td> <td>57.12</td> <td>68.30</td> <td>-11.18</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11100.674	39.17	7.76	46.93	54.00	-7.07	AVG	2	11100.852	49.36	7.76	57.12	68.30	-11.18	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11100.674	39.17	7.76	46.93	54.00	-7.07	AVG																				
2	11100.852	49.36	7.76	57.12	68.30	-11.18	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.687</td> <td>48.61</td> <td>8.91</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11340.856</td> <td>39.02</td> <td>8.91</td> <td>47.93</td> <td>54.00</td> <td>-6.07</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11340.687	48.61	8.91	57.52	68.30	-10.78	peak	2 *	11340.856	39.02	8.91	47.93	54.00	-6.07	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11340.687	48.61	8.91	57.52	68.30	-10.78	peak																				
2 *	11340.856	39.02	8.91	47.93	54.00	-6.07	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	43%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11340.117</td> <td>38.98</td> <td>8.91</td> <td>47.89</td> <td>54.00</td> <td>-6.11</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11340.625</td> <td>49.34</td> <td>8.91</td> <td>58.25</td> <td>68.30</td> <td>-10.05</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11340.117	38.98	8.91	47.89	54.00	-6.11	AVG	2	11340.625	49.34	8.91	58.25	68.30	-10.05	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11340.117	38.98	8.91	47.89	54.00	-6.11	AVG																				
2	11340.625	49.34	8.91	58.25	68.30	-10.05	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.635</td> <td>48.94</td> <td>7.91</td> <td>56.85</td> <td>68.30</td> <td>-11.45</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11060.898</td> <td>39.62</td> <td>7.91</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11060.635	48.94	7.91	56.85	68.30	-11.45	peak	2 *	11060.898	39.62	7.91	47.53	54.00	-6.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11060.635	48.94	7.91	56.85	68.30	-11.45	peak																				
2 *	11060.898	39.62	7.91	47.53	54.00	-6.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11060.635</td> <td>39.67</td> <td>7.91</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11060.871</td> <td>49.61</td> <td>7.91</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11060.635	39.67	7.91	47.58	54.00	-6.42	AVG	2	11060.871	49.61	7.91	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11060.635	39.67	7.91	47.58	54.00	-6.42	AVG																				
2	11060.871	49.61	7.91	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.637</td> <td>48.56</td> <td>8.96</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11380.827</td> <td>38.59</td> <td>8.96</td> <td>47.55</td> <td>54.00</td> <td>-6.45</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11380.637	48.56	8.96	57.52	68.30	-10.78	peak	2 *	11380.827	38.59	8.96	47.55	54.00	-6.45	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11380.637	48.56	8.96	57.52	68.30	-10.78	peak																				
2 *	11380.827	38.59	8.96	47.55	54.00	-6.45	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz (U-NII-2C)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11380.698</td> <td>38.60</td> <td>8.96</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11380.744</td> <td>48.60</td> <td>8.96</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11380.698	38.60	8.96	47.56	54.00	-6.44	AVG	2	11380.744	48.60	8.96	57.56	68.30	-10.74	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11380.698	38.60	8.96	47.56	54.00	-6.44	AVG																				
2	11380.744	48.60	8.96	57.56	68.30	-10.74	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



5745MHz-5825MHz(U-NII-3)

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11490.457	39.22	8.99	48.21	54.00	-5.79	AVG
2	11490.645	48.53	8.99	57.52	68.30	-10.78	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	24.5°C	Relative Humidity:	52%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11490.324	38.53	8.99	47.52	54.00	-6.48	AVG
2	11490.631	48.13	8.99	57.12	68.30	-11.18	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.771</td> <td>48.84</td> <td>8.75</td> <td>57.59</td> <td>68.30</td> <td>-10.71</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11570.865</td> <td>38.81</td> <td>8.75</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11570.771	48.84	8.75	57.59	68.30	-10.71	peak	2 *	11570.865	38.81	8.75	47.56	54.00	-6.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11570.771	48.84	8.75	57.59	68.30	-10.71	peak																				
2 *	11570.865	38.81	8.75	47.56	54.00	-6.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.447</td> <td>49.36</td> <td>8.75</td> <td>58.11</td> <td>68.30</td> <td>-10.19</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11570.567</td> <td>38.83</td> <td>8.75</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11570.447	49.36	8.75	58.11	68.30	-10.19	peak	2 *	11570.567	38.83	8.75	47.58	54.00	-6.42	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11570.447	49.36	8.75	58.11	68.30	-10.19	peak																				
2 *	11570.567	38.83	8.75	47.58	54.00	-6.42	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11650.578</td> <td>38.86</td> <td>8.70</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11650.697</td> <td>48.86</td> <td>8.70</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11650.578	38.86	8.70	47.56	54.00	-6.44	AVG	2	11650.697	48.86	8.70	57.56	68.30	-10.74	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11650.578	38.86	8.70	47.56	54.00	-6.44	AVG																				
2	11650.697	48.86	8.70	57.56	68.30	-10.74	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11650.467</td> <td>39.46</td> <td>8.70</td> <td>48.16</td> <td>54.00</td> <td>-5.84</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11650.852</td> <td>49.16</td> <td>8.70</td> <td>57.86</td> <td>68.30</td> <td>-10.44</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11650.467	39.46	8.70	48.16	54.00	-5.84	AVG	2	11650.852	49.16	8.70	57.86	68.30	-10.44	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11650.467	39.46	8.70	48.16	54.00	-5.84	AVG																				
2	11650.852	49.16	8.70	57.86	68.30	-10.44	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.635</td> <td>48.44</td> <td>8.99</td> <td>57.43</td> <td>68.30</td> <td>-10.87</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11490.721</td> <td>38.54</td> <td>8.99</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11490.635	48.44	8.99	57.43	68.30	-10.87	peak	2 *	11490.721	38.54	8.99	47.53	54.00	-6.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11490.635	48.44	8.99	57.43	68.30	-10.87	peak																				
2 *	11490.721	38.54	8.99	47.53	54.00	-6.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.117</td> <td>38.54</td> <td>8.99</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11490.653</td> <td>49.43</td> <td>8.99</td> <td>58.42</td> <td>68.30</td> <td>-9.88</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11490.117	38.54	8.99	47.53	54.00	-6.47	AVG	2	11490.653	49.43	8.99	58.42	68.30	-9.88	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11490.117	38.54	8.99	47.53	54.00	-6.47	AVG																				
2	11490.653	49.43	8.99	58.42	68.30	-9.88	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.341</td> <td>39.10</td> <td>8.75</td> <td>47.85</td> <td>54.00</td> <td>-6.15</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11570.352</td> <td>49.61</td> <td>8.75</td> <td>58.36</td> <td>68.30</td> <td>-9.94</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11570.341	39.10	8.75	47.85	54.00	-6.15	AVG	2	11570.352	49.61	8.75	58.36	68.30	-9.94	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11570.341	39.10	8.75	47.85	54.00	-6.15	AVG																				
2	11570.352	49.61	8.75	58.36	68.30	-9.94	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.195</td> <td>38.81</td> <td>8.75</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11570.885</td> <td>48.87</td> <td>8.75</td> <td>57.62</td> <td>68.30</td> <td>-10.68</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11570.195	38.81	8.75	47.56	54.00	-6.44	AVG	2	11570.885	48.87	8.75	57.62	68.30	-10.68	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11570.195	38.81	8.75	47.56	54.00	-6.44	AVG																				
2	11570.885	48.87	8.75	57.62	68.30	-10.68	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.245</td> <td>48.76</td> <td>8.70</td> <td>57.46</td> <td>68.30</td> <td>-10.84</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11650.785</td> <td>39.83</td> <td>8.70</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11650.245	48.76	8.70	57.46	68.30	-10.84	peak	2 *	11650.785	39.83	8.70	48.53	54.00	-5.47	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11650.245	48.76	8.70	57.46	68.30	-10.84	peak																				
2 *	11650.785	39.83	8.70	48.53	54.00	-5.47	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11650.278</td> <td>38.89</td> <td>8.70</td> <td>47.59</td> <td>54.00</td> <td>-6.41</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11650.562</td> <td>48.83</td> <td>8.70</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11650.278	38.89	8.70	47.59	54.00	-6.41	AVG	2	11650.562	48.83	8.70	57.53	68.30	-10.77	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11650.278	38.89	8.70	47.59	54.00	-6.41	AVG																				
2	11650.562	48.83	8.70	57.53	68.30	-10.77	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.112</td> <td>48.53</td> <td>8.99</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11490.541</td> <td>39.56</td> <td>8.99</td> <td>48.55</td> <td>54.00</td> <td>-5.45</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11490.112	48.53	8.99	57.52	68.30	-10.78	peak	2 *	11490.541	39.56	8.99	48.55	54.00	-5.45	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11490.112	48.53	8.99	57.52	68.30	-10.78	peak																				
2 *	11490.541	39.56	8.99	48.55	54.00	-5.45	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.245</td> <td>39.53</td> <td>8.99</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11490.632</td> <td>48.26</td> <td>8.99</td> <td>57.25</td> <td>68.30</td> <td>-11.05</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11490.245	39.53	8.99	48.52	54.00	-5.48	AVG	2	11490.632	48.26	8.99	57.25	68.30	-11.05	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11490.245	39.53	8.99	48.52	54.00	-5.48	AVG																				
2	11490.632	48.26	8.99	57.25	68.30	-11.05	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.635</td> <td>38.77</td> <td>8.75</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11570.712</td> <td>48.79</td> <td>8.75</td> <td>57.54</td> <td>68.30</td> <td>-10.76</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11570.635	38.77	8.75	47.52	54.00	-6.48	AVG	2	11570.712	48.79	8.75	57.54	68.30	-10.76	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11570.635	38.77	8.75	47.52	54.00	-6.48	AVG																				
2	11570.712	48.79	8.75	57.54	68.30	-10.76	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.287</td> <td>38.50</td> <td>8.75</td> <td>47.25</td> <td>54.00</td> <td>-6.75</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11570.541</td> <td>47.46</td> <td>8.75</td> <td>56.21</td> <td>68.30</td> <td>-12.09</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11570.287	38.50	8.75	47.25	54.00	-6.75	AVG	2	11570.541	47.46	8.75	56.21	68.30	-12.09	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11570.287	38.50	8.75	47.25	54.00	-6.75	AVG																				
2	11570.541	47.46	8.75	56.21	68.30	-12.09	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.345</td> <td>48.82</td> <td>8.70</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11650.687</td> <td>38.52</td> <td>8.70</td> <td>47.22</td> <td>54.00</td> <td>-6.78</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11650.345	48.82	8.70	57.52	68.30	-10.78	peak	2 *	11650.687	38.52	8.70	47.22	54.00	-6.78	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11650.345	48.82	8.70	57.52	68.30	-10.78	peak																				
2 *	11650.687	38.52	8.70	47.22	54.00	-6.78	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.119</td> <td>49.42</td> <td>8.70</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11650.254</td> <td>38.51</td> <td>8.70</td> <td>47.21</td> <td>54.00</td> <td>-6.79</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11650.119	49.42	8.70	58.12	68.30	-10.18	peak	2 *	11650.254	38.51	8.70	47.21	54.00	-6.79	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11650.119	49.42	8.70	58.12	68.30	-10.18	peak																				
2 *	11650.254	38.51	8.70	47.21	54.00	-6.79	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.245</td> <td>48.45</td> <td>8.95</td> <td>57.40</td> <td>68.30</td> <td>-10.90</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11510.638</td> <td>39.57</td> <td>8.95</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11510.245	48.45	8.95	57.40	68.30	-10.90	peak	2 *	11510.638	39.57	8.95	48.52	54.00	-5.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11510.245	48.45	8.95	57.40	68.30	-10.90	peak																				
2 *	11510.638	39.57	8.95	48.52	54.00	-5.48	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.684</td> <td>38.63</td> <td>8.95</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11510.785</td> <td>48.57</td> <td>8.95</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11510.684	38.63	8.95	47.58	54.00	-6.42	AVG	2	11510.785	48.57	8.95	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11510.684	38.63	8.95	47.58	54.00	-6.42	AVG																				
2	11510.785	48.57	8.95	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.657</td> <td>49.45</td> <td>8.69</td> <td>58.14</td> <td>68.30</td> <td>-10.16</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11590.712</td> <td>38.83</td> <td>8.69</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11590.657	49.45	8.69	58.14	68.30	-10.16	peak	2 *	11590.712	38.83	8.69	47.52	54.00	-6.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11590.657	49.45	8.69	58.14	68.30	-10.16	peak																				
2 *	11590.712	38.83	8.69	47.52	54.00	-6.48	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.641</td> <td>38.83</td> <td>8.69</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11590.853</td> <td>48.84</td> <td>8.69</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11590.641	38.83	8.69	47.52	54.00	-6.48	AVG	2	11590.853	48.84	8.69	57.53	68.30	-10.77	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11590.641	38.83	8.69	47.52	54.00	-6.48	AVG																				
2	11590.853	48.84	8.69	57.53	68.30	-10.77	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.585</td> <td>48.59</td> <td>8.95</td> <td>57.54</td> <td>68.30</td> <td>-10.76</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11510.635</td> <td>38.57</td> <td>8.95</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11510.585	48.59	8.95	57.54	68.30	-10.76	peak	2 *	11510.635	38.57	8.95	47.52	54.00	-6.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11510.585	48.59	8.95	57.54	68.30	-10.76	peak																				
2 *	11510.635	38.57	8.95	47.52	54.00	-6.48	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.354</td> <td>48.57</td> <td>8.95</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11510.856</td> <td>38.93</td> <td>8.95</td> <td>47.88</td> <td>54.00</td> <td>-6.12</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11510.354	48.57	8.95	57.52	68.30	-10.78	peak	2 *	11510.856	38.93	8.95	47.88	54.00	-6.12	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11510.354	48.57	8.95	57.52	68.30	-10.78	peak																				
2 *	11510.856	38.93	8.95	47.88	54.00	-6.12	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.357</td> <td>50.09</td> <td>8.69</td> <td>58.78</td> <td>68.30</td> <td>-9.52</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11590.557</td> <td>38.87</td> <td>8.69</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11590.357	50.09	8.69	58.78	68.30	-9.52	peak	2 *	11590.557	38.87	8.69	47.56	54.00	-6.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1	11590.357	50.09	8.69	58.78	68.30	-9.52	peak																				
2 *	11590.557	38.87	8.69	47.56	54.00	-6.44	AVG																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.354</td> <td>38.89</td> <td>8.69</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11590.831</td> <td>48.83</td> <td>8.69</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11590.354	38.89	8.69	47.58	54.00	-6.42	AVG	2	11590.831	48.83	8.69	57.52	68.30	-10.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11590.354	38.89	8.69	47.58	54.00	-6.42	AVG																				
2	11590.831	48.83	8.69	57.52	68.30	-10.78	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											



Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Horizontal																										
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.654</td> <td>38.68</td> <td>8.95</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11510.834</td> <td>49.17</td> <td>8.95</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11510.654	38.68	8.95	47.63	54.00	-6.37	AVG	2	11510.834	49.17	8.95	58.12	68.30	-10.18	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11510.654	38.68	8.95	47.63	54.00	-6.37	AVG																				
2	11510.834	49.17	8.95	58.12	68.30	-10.18	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

Temperature:	24.5°C	Relative Humidity:	52%																								
Test Voltage:	DC 3.8V																										
Ant. Pol.	Vertical																										
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.227</td> <td>39.42</td> <td>8.95</td> <td>48.37</td> <td>54.00</td> <td>-5.63</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11510.685</td> <td>48.26</td> <td>8.95</td> <td>57.21</td> <td>68.30</td> <td>-11.09</td> <td>peak</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11510.227	39.42	8.95	48.37	54.00	-5.63	AVG	2	11510.685	48.26	8.95	57.21	68.30	-11.09	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																				
1 *	11510.227	39.42	8.95	48.37	54.00	-5.63	AVG																				
2	11510.685	48.26	8.95	57.21	68.30	-11.09	peak																				
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																											

-----END OF REPORT-----

