

RF TEST REPORT



Report No.: 16050015-FCC-R

Supersede Report No.:N/A

Applicant	Quectel Wireless Solutions Co., Ltd.	
Product Name	GSM/GPRS Module	
Model No.	M35	
Serial No.	N/A	
Test Standard	FCC Part 22(H), FCC Part 24(E): 2015; ANSI/TIA603 D: 2010	
Test Date	December 19 to December 31, 2015&June 06, 2016	
Issue Date	June 12, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		
<i>Winnie Zhang</i>	<i>David Huang</i>	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16050015-FCC-R
Page	3 of 48

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
6.2 RF OUTPUT POWER	10
6.3 PEAK-AVERAGE RATIO.....	15
6.4 OCCUPIED BANDWIDTH.....	18
6.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	22
6.7 SPURIOUS RADIATED EMISSIONS	27
6.8 BAND EDGE.....	31
6.9 FREQUENCY STABILITY	35
ANNEX A. TEST INSTRUMENT.....	39
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	41
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	44
ANNEX C.II. EUT OPERATING CONDITIONS.....	46
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	47
ANNEX E. DECLARATION OF SIMILARITY	48

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16050015-FCC-R	NONE	Original	May 11, 2016
16050015-FCC-R	V1	Adding GPRS data	June 12, 2016

2. Customer information

Applicant Name	Quectel Wireless Solutions Co., Ltd.
Applicant Add	RM501,Building 13,No.99 TianZhou Road,Xuhui District,Shanghai,China
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer Add	RM501,Building 13,No.99 TianZhou Road,Xuhui District,Shanghai,China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	GSM/GPRS Module
Main Model:	M35
Serial Model:	N/A
Date EUT received:	December 18,2015
Test Date(s):	December 19 to December 31, 2015&June 06, 2016
Equipment Category :	PCB
Antenna Gain:	GSM850: 1dBi PCS1900: 1dBi
Type of Modulation:	GSM / GPRS: GMSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
Maximum Conducted	GSM Vioce: GSM850: 32.08dBm PCS1900: 29.22dBm
AV Power to Antenna:	GPRS: GSM850: 32.07dBm PCS1900: 29.14dBm
ERP/EIRP:	GSM Vioce: GSM850: 30.86dBm / ERP PCS1900: 29.96dBm / EIRP GPRS:GSM850: 31.09dBm / ERP PCS1900: 29.88dBm / EIRP
Number of Channels:	GSM 850: 124CH PCS1900: 299CH
Port:	N/A

Test Report	16050015-FCC-R
Page	7 of 48

Input Power: Spec: DC 4.0V,

Trade Name : Quectel

GPRS Multi-slot class 8/10/12

FCC ID: XMR201605M35

Note: Antenna gain including cable loss must not exceed 4.95dBi of GSM 850 and 2.5dBi of PCS 1900.

Revision Number	Model	Report Number	Description of Revision	Date of Revision
0	M95	15050058-FCC-R	Original Report	December 31, 2015
1	M35	16050015-FCC-R	Amended Report	June 12, 2016

Note: This is the amended report application (16050015-FCC-R) of the device, the original submission (15050058-FCC-R) was granted on December 31, 2015. The difference between the original device and the current one was as following the detail information:

The difference of these two models is for different Model Name, FCC ID and increase GPRS data Information

All above were explained in the attached Declaration Letter. And based on the letter the difference between them will not affect any test items, in this report, we have added GPRS data , and didn' t revise any test data, , so the other test data please refer to report 15050058-FCC-R.

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c)	RF Output Power	Compliance
§ 24.232 (d)	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a)	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a)	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 Maximum Permissible Exposure (MPE)

Test Result: Pass


The EUT is a mobile device, Please refer to MPE Evaluation Report: 16050015-FCC-H.

6.2 RF Output Power

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015&June 06, 2016
Tested By :	Winnie Zhang & Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	<input checked="" type="checkbox"/>
§24.232 (c)	b)	EIRP:33dBm	<input checked="" type="checkbox"/>

Test Setup	
------------	---

Test Procedure	<p>For Conducted Power:</p> <ul style="list-style-type: none"> - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. <p>For ERP/EIRP:</p> <p>According with KDB 971168 v02r02</p> <ul style="list-style-type: none"> - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental frequency was investigated. - Remove the EUT and replace it with substitution antenna. A signal
----------------	--

Test Report	16050015-FCC-R
Page	11 of 48

	<p>generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.</p> <ul style="list-style-type: none"> - Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level - Spurious attenuation limit in dB = $43 + 10 \text{ Log}_{10} (\text{power out in Watts})$.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	32.08	32.08	32.07	32.5±1	29.21	29.22	29.21	29.5±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	32.07	32.05	32.07	32.5±1	29.14	29.09	28.91	29.5±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	31.98	31.99	31.93	32.5±1	29.02	29.1	28.91	29.5±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	29.59	29.61	29.73	29.5±1	28.85	28.96	28.88	29.5±1
<p>Remark :</p> <p>GPRS, CS1 coding scheme.</p> <p>Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link</p> <p>Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link</p> <p>Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link</p>								

Note: Since GSM mode has higher power, so the test items below were not performed to GPRS mode.

ERP & EIRP

GSM Voice

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	24.55	V	6.8	0.53	30.82	38.45
824.2	22.81	H	6.8	0.53	29.08	38.45
836.6	24.57	V	6.8	0.53	30.84	38.45
836.6	22.86	H	6.8	0.53	29.13	38.45
848.8	24.49	V	6.9	0.53	30.86	38.45
848.8	22.74	H	6.9	0.53	29.11	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	22.89	V	7.88	0.85	29.92	33
1850.2	21.22	H	7.88	0.85	28.25	33
1880	22.93	V	7.88	0.85	29.96	33
1880	21.17	H	7.88	0.85	28.20	33
1909.8	22.84	V	7.86	0.85	29.85	33
1909.8	21.29	H	7.86	0.85	28.30	33

GPRS:

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	24.82	V	6.8	0.53	31.09	38.45
824.2	22.30	H	6.8	0.53	28.57	38.45
836.6	24.12	V	6.8	0.53	30.39	38.45
836.6	22.06	H	6.8	0.53	28.33	38.45
848.8	24.10	V	6.9	0.53	30.47	38.45
848.8	22.20	H	6.9	0.53	28.57	38.45

EIRP for PCS Band (Part 24E)


Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	22.18	V	7.88	0.85	29.21	33
1850.2	22.03	H	7.88	0.85	29.06	33
1880	22.35	V	7.88	0.85	29.38	33
1880	22.85	H	7.88	0.85	29.88	33
1909.8	22.33	V	7.86	0.85	29.34	33
1909.8	22.12	H	7.86	0.85	29.13	33

6.3 Peak-Average Ratio

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015&June 06, 2016
Tested By :	Winnie Zhang & Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	<input checked="" type="checkbox"/>

Test Setup	
------------	---

Test Procedure	<p>A According with KDB 971168 v02r02</p> <p>5.7.2 Alternate procedure for PAPR</p> <p>5.1.2 Peak power measurements with a peak power meter</p> <p>The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.</p> <p>5.2.3 Average power measurement with average power meter</p> <p>As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions</p> <p>If the EUT can be configured to transmit continuously (i.e., the burst duty</p>
----------------	---

Test Report	16050015-FCC-R
Page	16 of 48

	<p>cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output power level, then a conventional wide-band RF power meter can be used. If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle $< 98\%$), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

GSM : PCS1900

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	29.94	29.21	0.73
1880	30.03	29.22	0.81
1909.8	30.02	29.21	0.81


GPRS : PCS1900

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	29.68	29.42	0.26
1880	30.18	29.69	0.49
1909.8	30.59	29.74	0.85

6.4 Occupied Bandwidth

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	December 28, 2015&June 06, 2016
Tested By :	Winnie Zhang & Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238	a)	99% Occupied Bandwidth(kHz)	<input checked="" type="checkbox"/>
	b)	26 dB Bandwidth(kHz)	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	298.96	406.7
190	836.6	297.13	420.5
251	848.8	300.22	418.1

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	290.74	360.7
661	1880.0	291.23	360.0
810	1909.8	288.95	361.0

GPRS:

Cellular Band (Part 22H) result


Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	298.93	419.0
190	836.6	298.13	415.6
251	848.8	295.97	415.5

PCS Band (Part 24E) result


Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	292.75	404.2
661	1880.0	292.75	404.2
810	1909.8	288.44	362.3

Test Plots

GMS Voice:

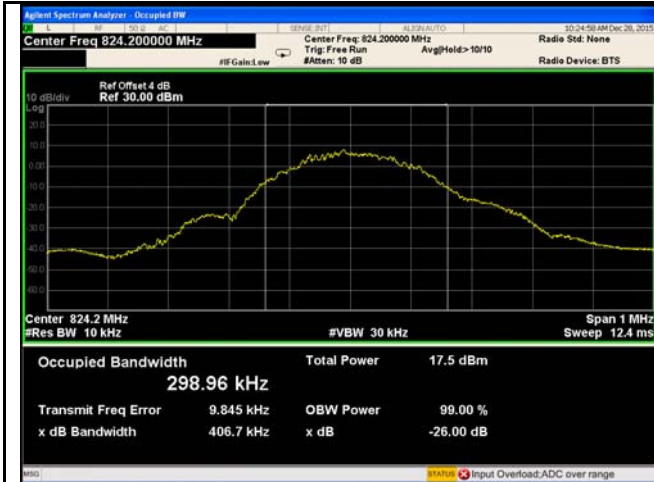

GSM 850 BW - Low CH 824.2MHz

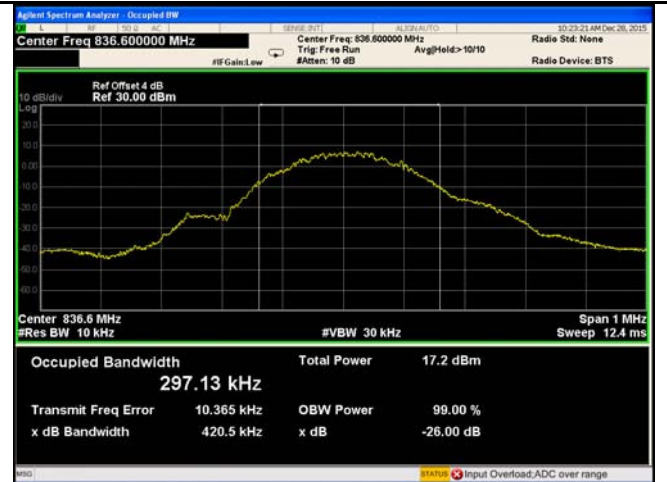


GSM 850 BW - Mid CH 836.6MHz



GSM 850 BW - High CH 848.8MHz



PCS 1900 BW - Low CH 1850.2MHz

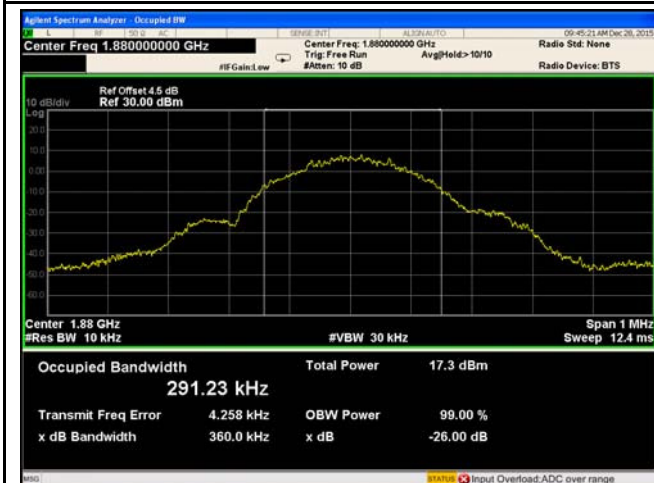


PCS 1900 BW - Mid CH 1880MHz



PCS 1900 BW - High CH 1909.8MHz


GPRS:

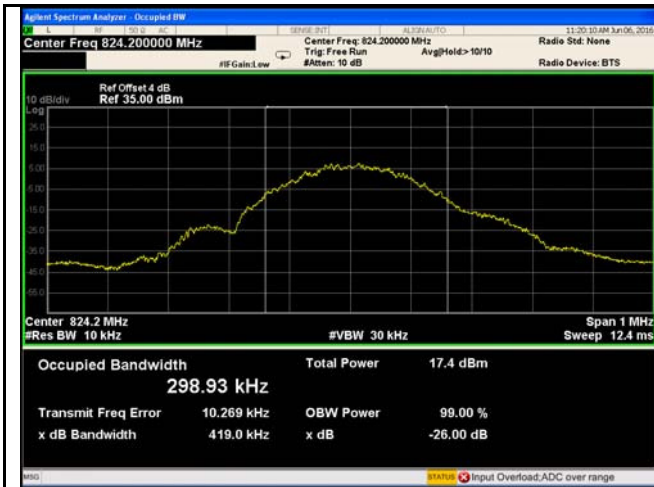

GSM 850 BW - Low CH 824.2MHz




GSM 850 BW - Mid CH 836.6MHz

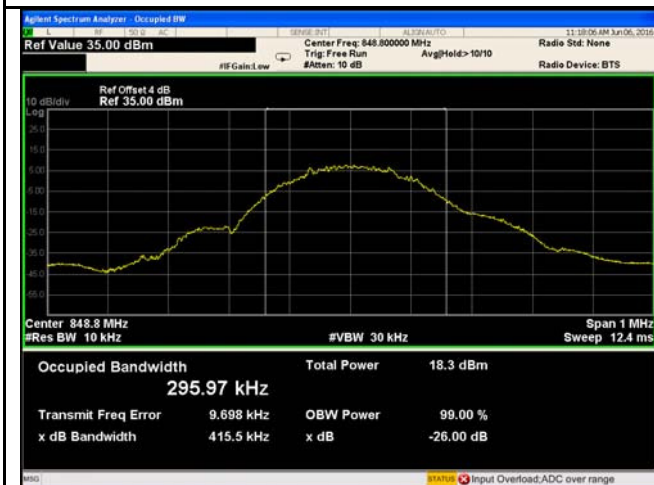


GSM 850 BW - High CH 848.8MHz



PCS 1900 BW - Low CH 1850.2MHz

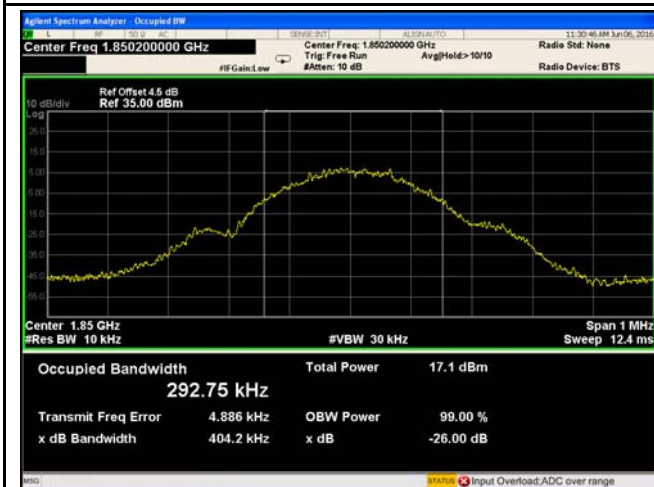

PCS 1900 BW - Mid CH 1880MHz

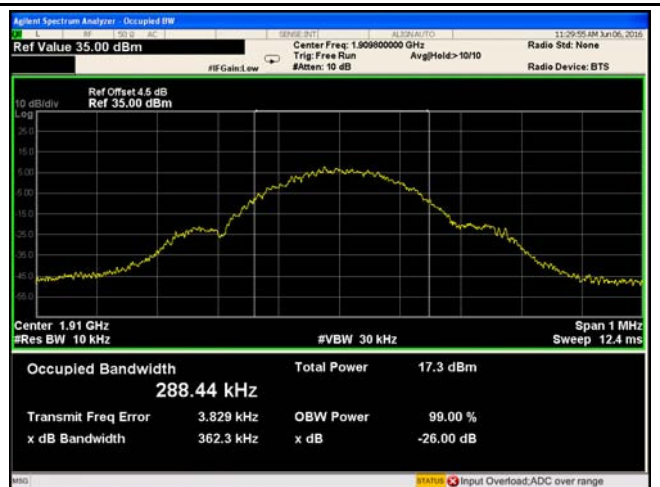


PCS 1900 BW - High CH 1909.8MHz

6.6 Spurious Emissions at Antenna Terminals

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	December 28, 2015&June 06, 2016
Tested By :	Winnie Zhang & Loren Luo

Requirement(s):


Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


Test Plots

GSM Voice:


Cellular Band (Part 22H) result

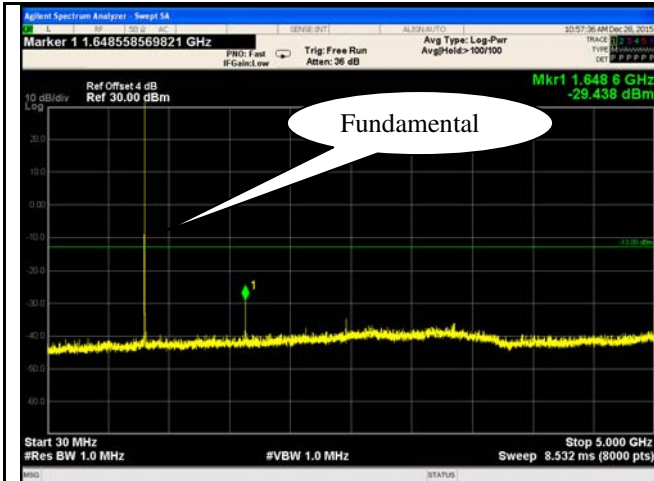


GSM 850 - Low Channel-1

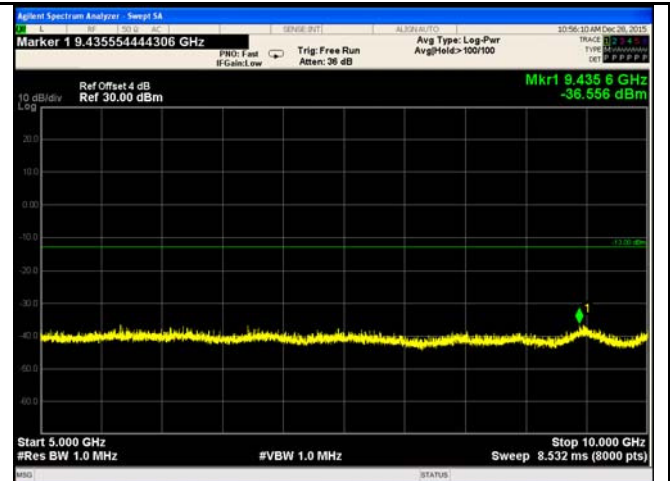


GSM 850 - Low Channel-2

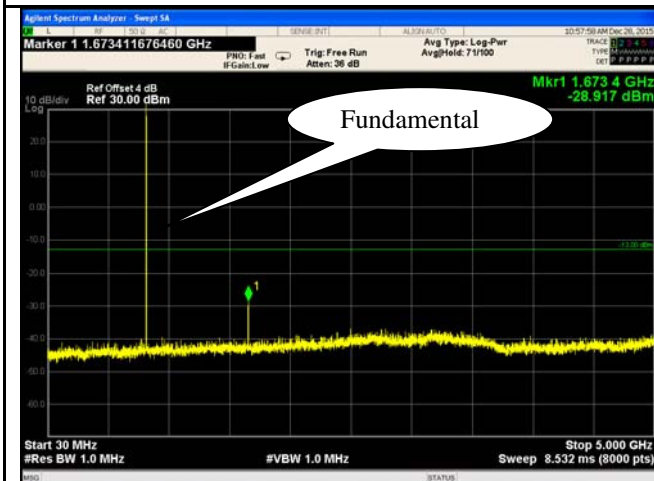

GSM 850 Middle Channel-1

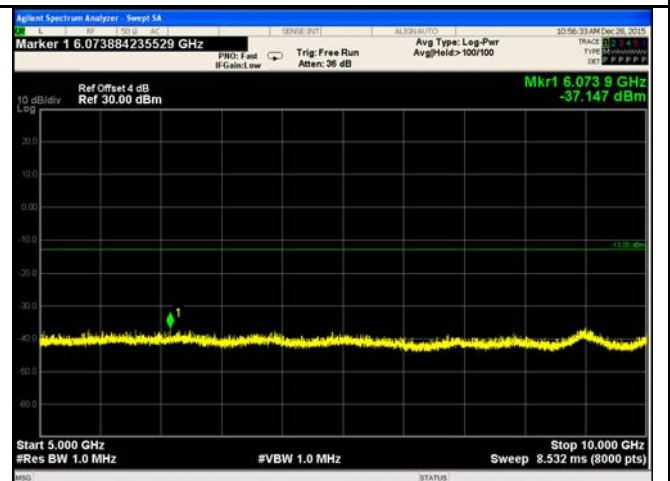

GSM 850 Middle Channel-2

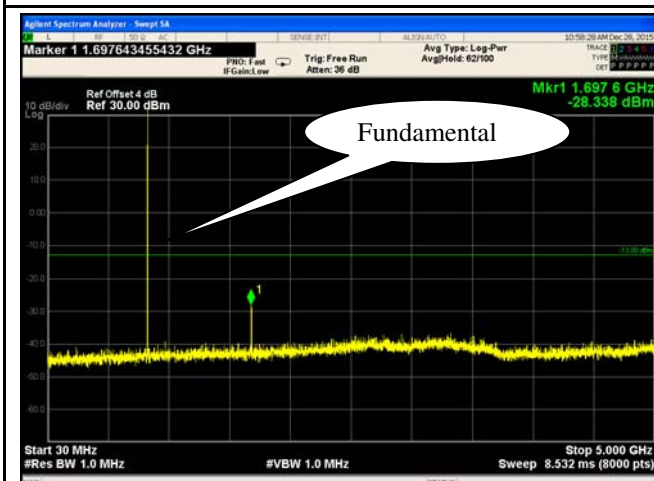


GSM 850 - High Channel-1




GSM 850 - High Channel-2


PCS Band (Part24E) result

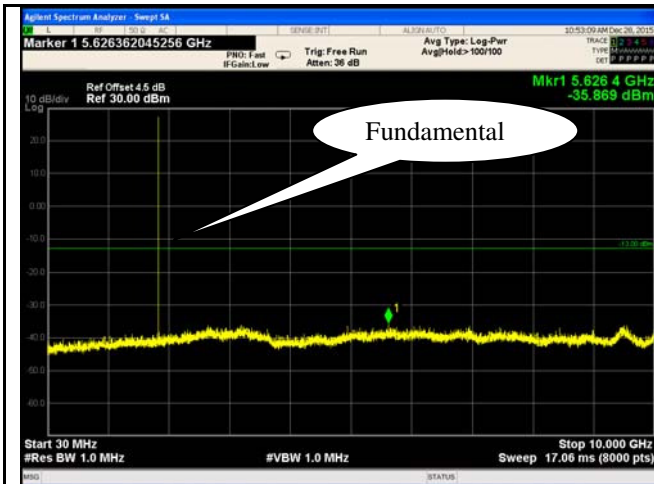


PCS1900 - Low Channel-1

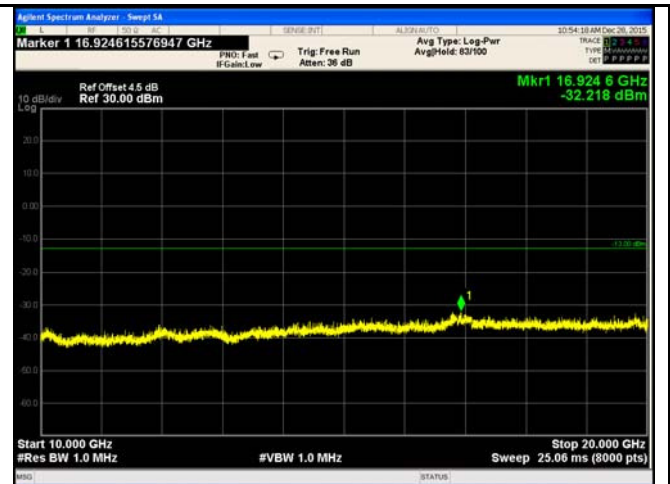


PCS 1900 - Low Channel-2

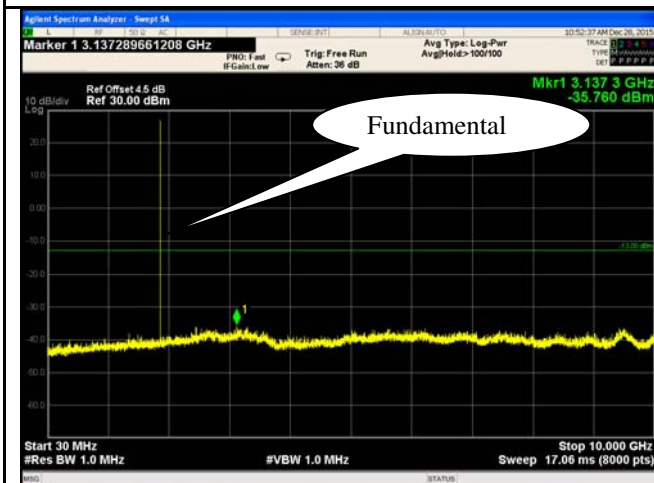


PCS1900 - Middle Channel-1

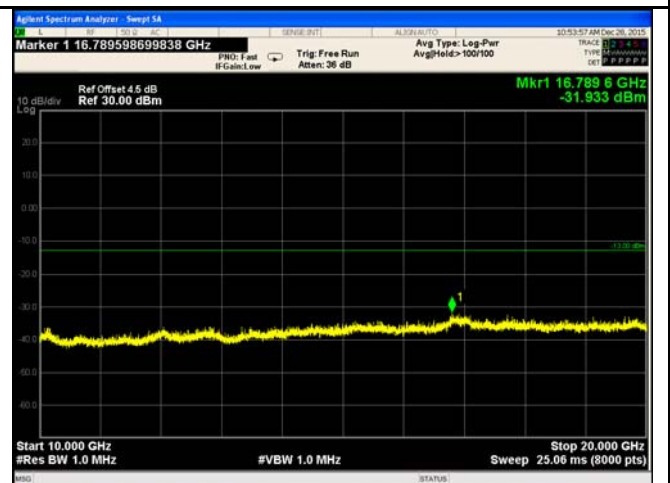

PCS 1900 - Middle Channel-2

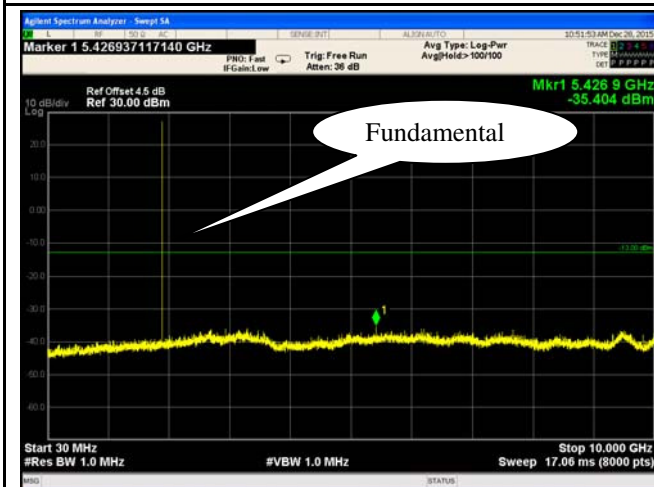


PCS1900 - High Channel-1

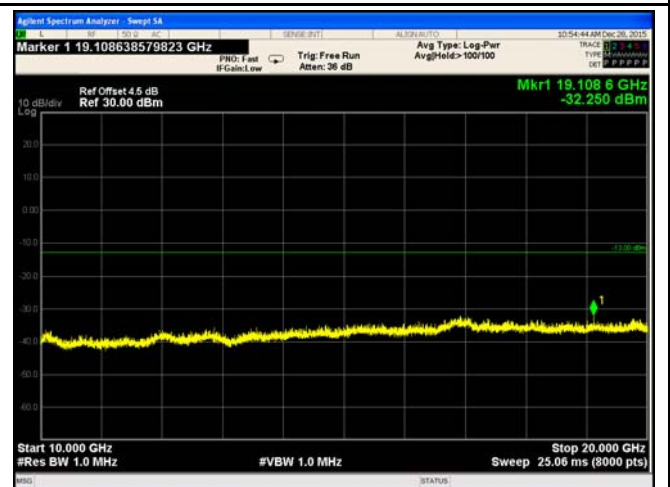


PCS 1900 - High Channel-2

GPRS:


Cellular Band (Part 22H) result

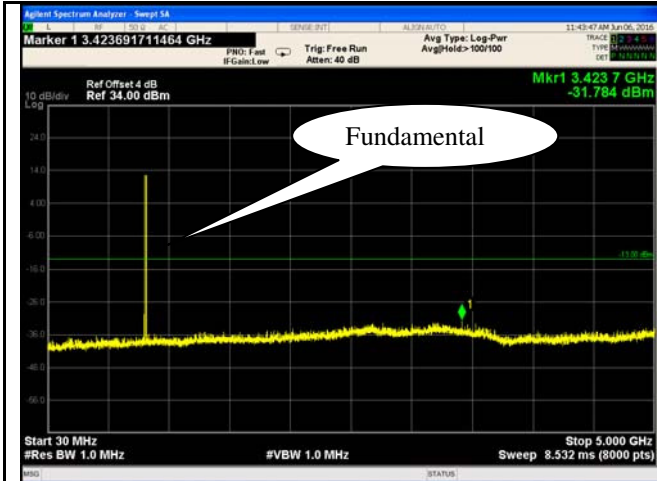


GSM 850 - Low Channel-1

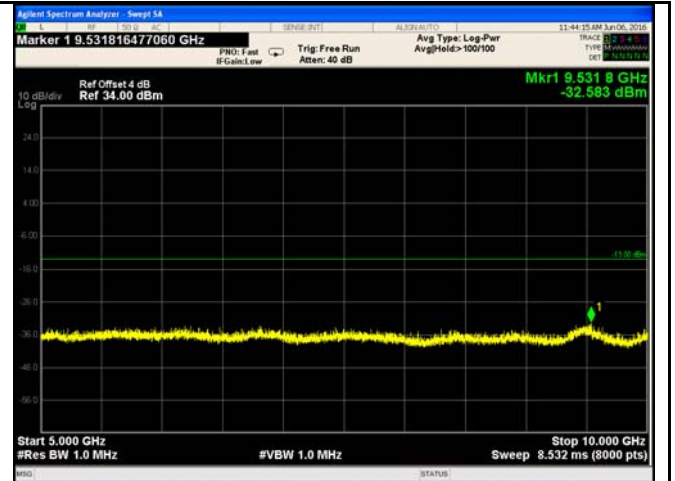


GSM 850 - Low Channel-2

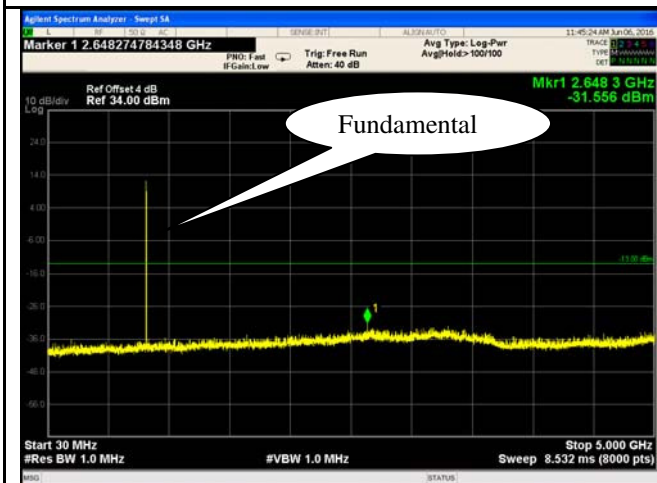


GSM 850 Middle Channel-1

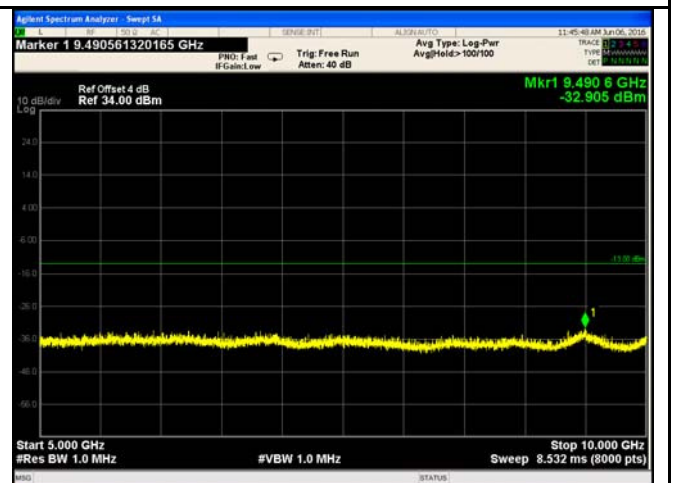

GSM 850 Middle Channel-2

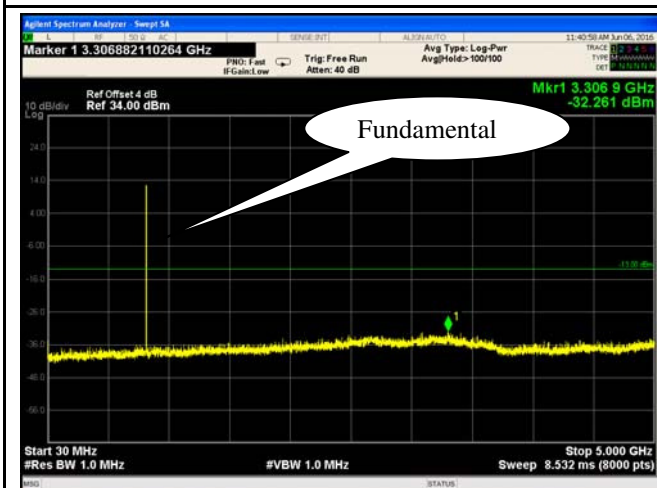


GSM 850 - High Channel-1

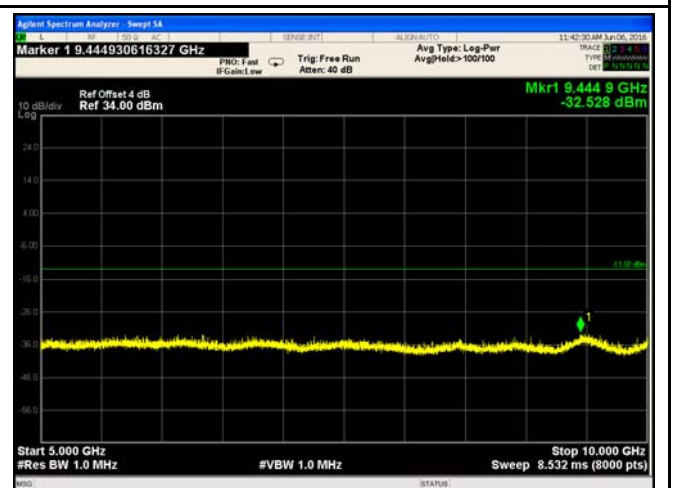


GSM 850 - High Channel-2


PCS Band (Part24E) result

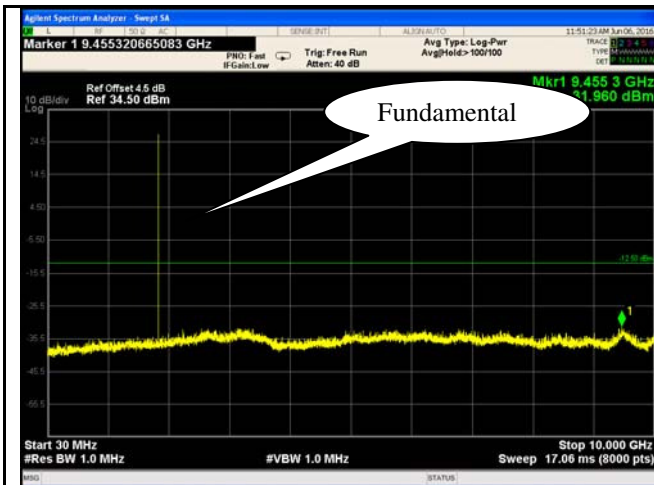


PCS1900 - Low Channel-1

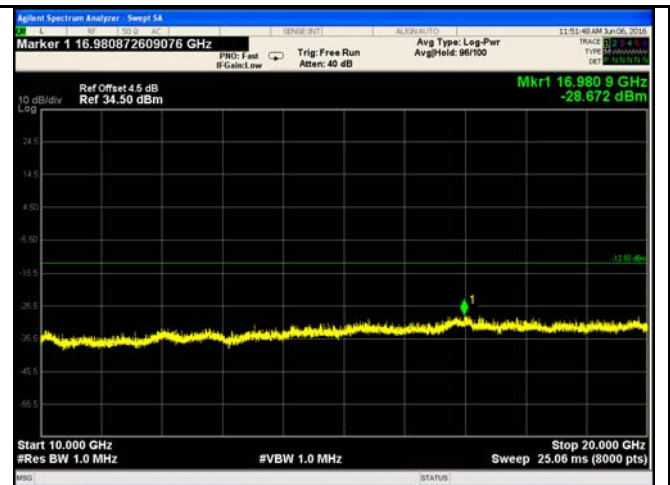


PCS 1900 - Low Channel-2

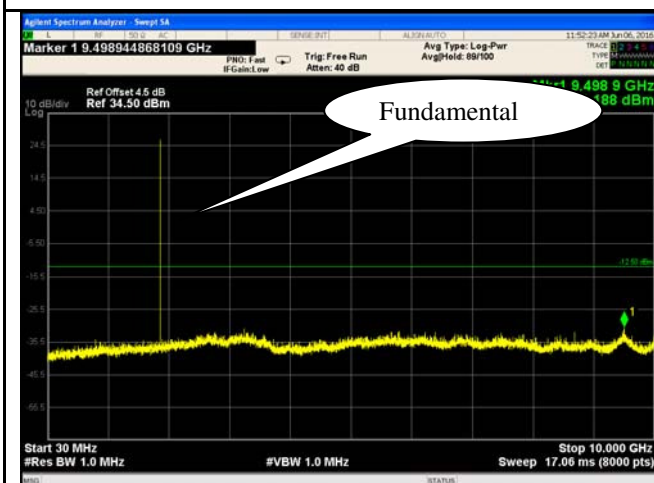


PCS1900 - Middle Channel-1

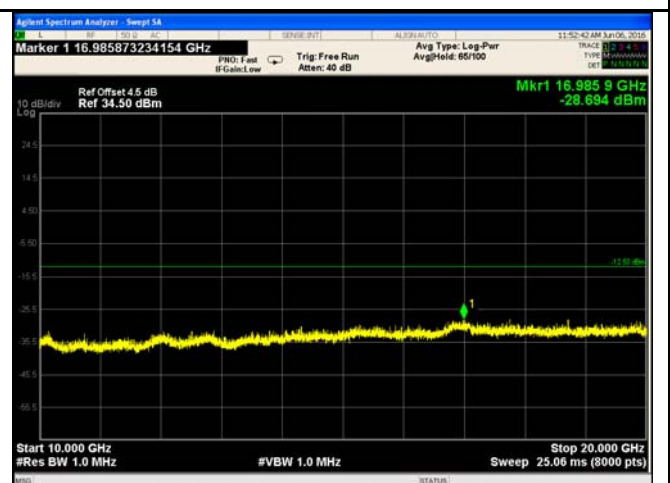

PCS 1900 - Middle Channel-2

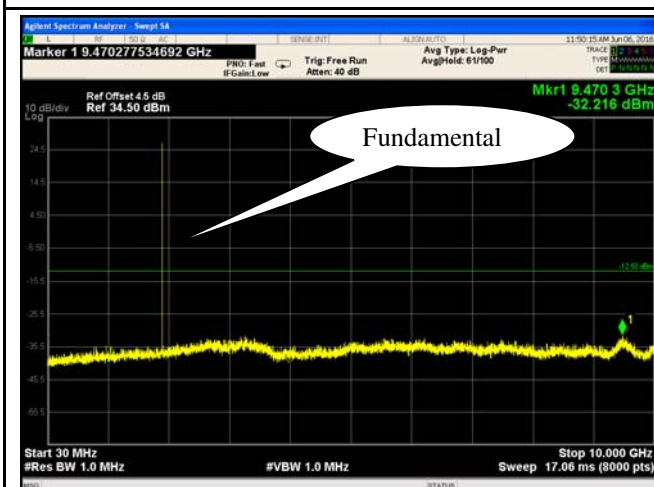

PCS1900 - High Channel-1

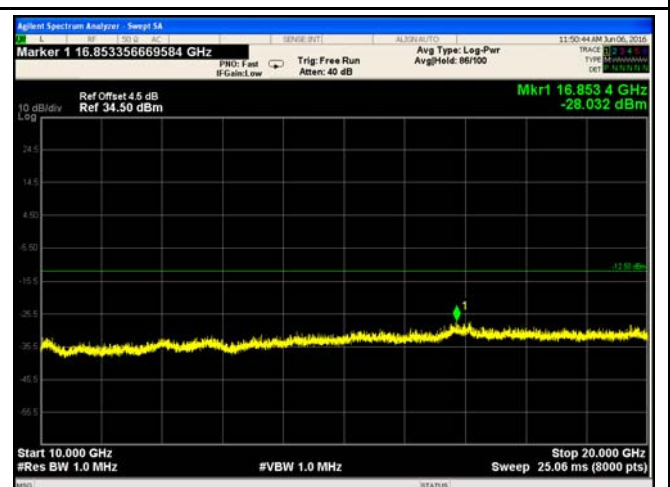


PCS 1900 - High Channel-2

6.7 Spurious Radiated Emissions

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	<input checked="" type="checkbox"/>

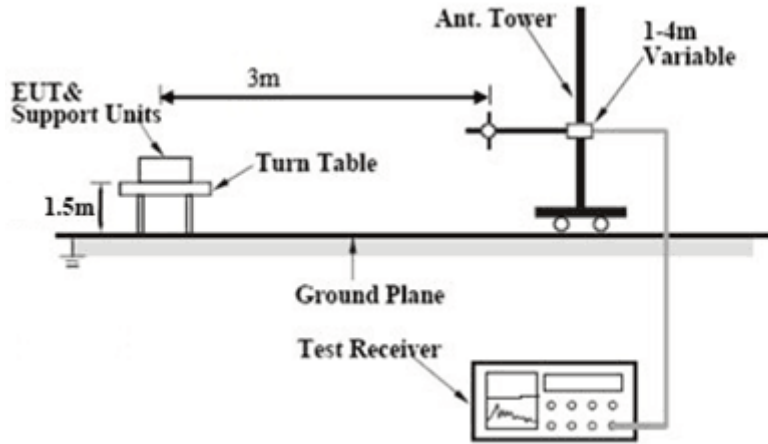Test setup	
------------	--

Test Procedure	<ol style="list-style-type: none"> The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. <p>Sample Calculation:</p> <p>EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)</p>
----------------	---

Test Report	16050015-FCC-R
Page	28 of 48

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-45.18	V	7.95	0.78	-38.01	-13	-25.01
1648.4	-45.32	H	7.95	0.78	-38.15	-13	-25.15
158.6	-46.45	V	1.6	0.18	-45.03	-13	-32.03
323.1	-51.29	H	6.3	0.26	-45.25	-13	-32.25

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-45.14	V	7.95	0.78	-37.97	-13	-24.97
1673.2	-45.28	H	7.95	0.78	-38.11	-13	-25.11
158.7	-46.37	V	1.6	0.18	-44.95	-13	-31.95
323.4	-51.22	H	6.3	0.26	-45.18	-13	-32.18

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-45.21	V	7.95	0.78	-38.04	-13	-25.04
1697.6	-45.36	H	7.95	0.78	-38.19	-13	-25.19
158.3	-46.49	V	1.6	0.18	-45.07	-13	-32.07
323.5	-51.22	H	6.3	0.26	-45.18	-13	-32.18

Note:

1, The testing has been conformed to $10 \times 848.8 \text{ MHz} = 8,488 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-46.25	V	10.25	2.73	-38.73	-13	-25.73
3700.4	-46.51	H	10.25	2.73	-38.99	-13	-25.99
156.8	-46.63	V	1.6	0.18	-45.21	-13	-32.21
324.5	-51.59	H	6.3	0.26	-45.55	-13	-32.55

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-46.31	V	10.25	2.73	-38.79	-13	-25.79
3760	-46.48	H	10.25	2.73	-38.96	-13	-25.96
156.3	-46.52	V	1.6	0.18	-45.10	-13	-32.10
324.9	-51.73	H	6.3	0.26	-45.69	-13	-32.69

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-46.25	V	10.36	2.73	-38.62	-13	-25.62
3819.6	-46.59	H	10.36	2.73	-38.96	-13	-25.96
156.5	-46.48	V	1.6	0.18	-45.06	-13	-32.06
324.1	-51.34	H	6.3	0.26	-45.30	-13	-32.30

Note:

1, The testing has been conformed to $10 \times 1909.8 \text{ MHz} = 19,098 \text{ MHz}$

2, All other emissions more than 30 dB below the limit


3, GSM voice, GPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

6.8 Band Edge

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	December 28, 2015&June 06, 2016
Tested By :	Winnie Zhang & Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>
Test setup			
Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.988	-18.611	-13
849.023	-17.019	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.995	-15.537	-13
1910.003	-16.006	-13

GPRS:

Cellular Band (Part 22H) result


Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.996	-14.493	-13
849.028	-15.420	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.999	-17.287	-13
1910.023	-18.720	-13

GSM Voice:

Test Plots

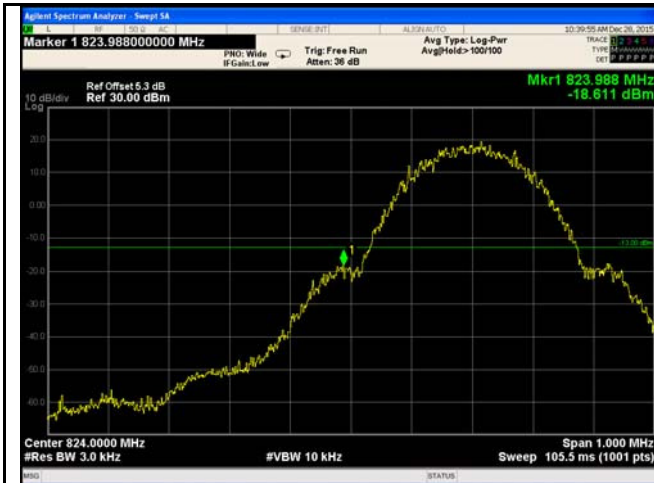


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(4.07/3)=4.0+1.3=5.3 dB



Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(4.18/3)=4.0+1.4=5.4 dB

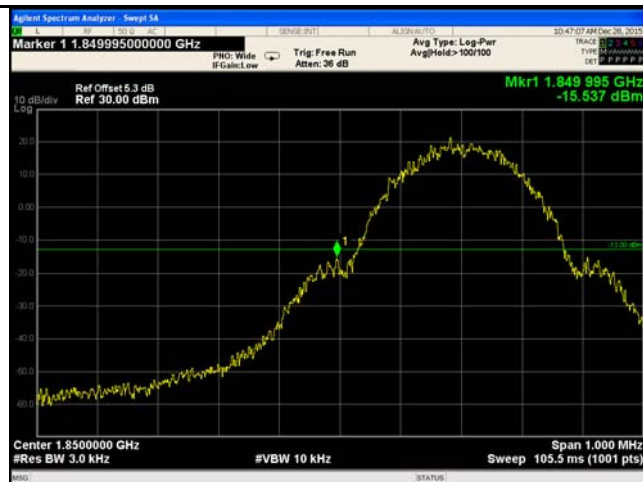

PCS Band - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(3.61/3)=4.5+0.8=5.3dB




PCS Band - High Channel

Note: Offset=Cable loss (4.5) + 10log
(3.61/3)=4.5+0.8=5.3 dB


GPRS:

Test Plots

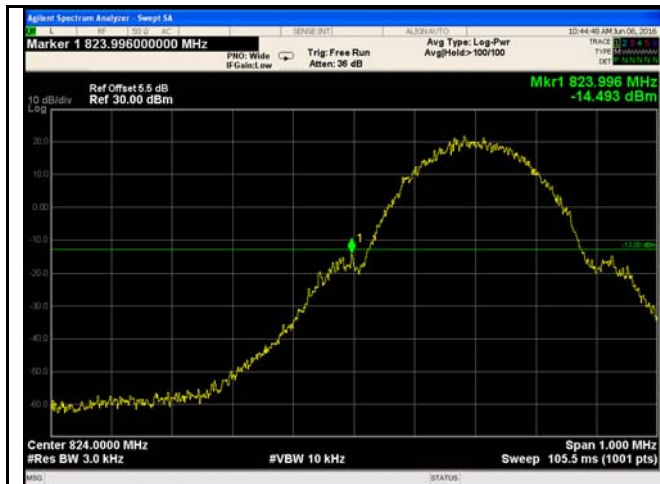


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(4.19/3)=4.0+1.5=5.5dB

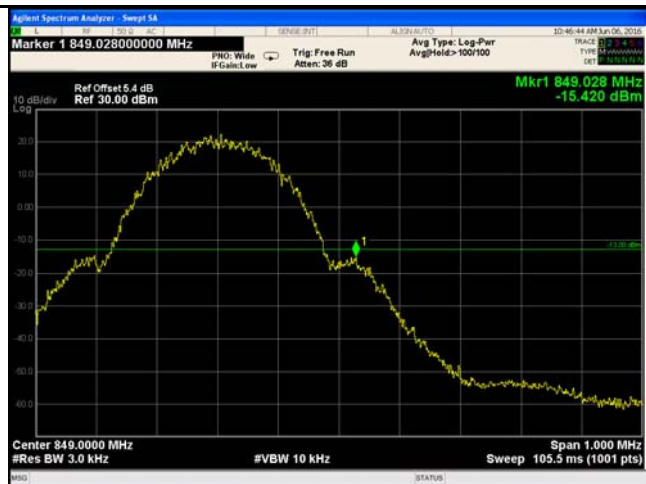


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(4.15/3)=4.0+1.4=5.4dB

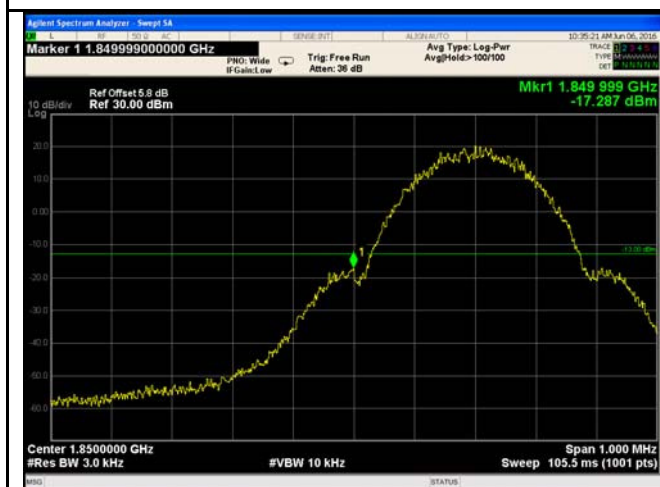

PCS Band - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(4.04/3)=4.5+1.3=5.8dB

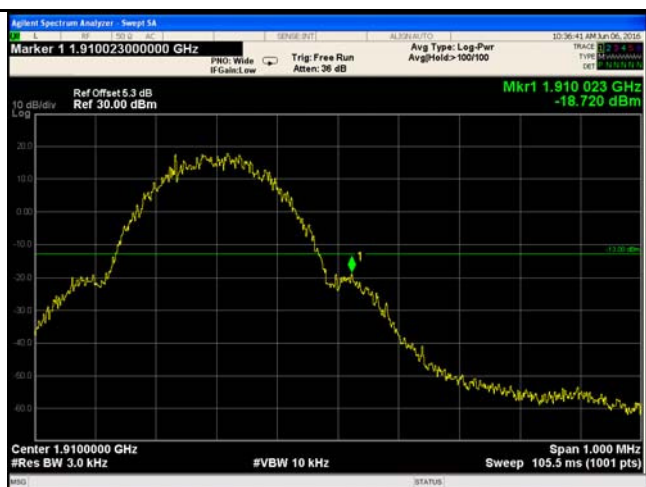


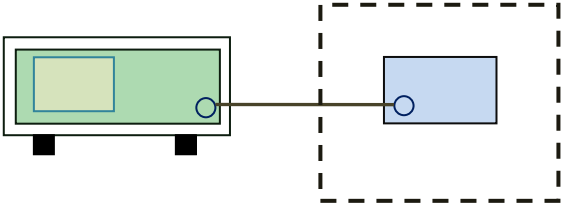
PCS Band - High Channel

Note: Offset=Cable loss (4.5) + 10log
(3.62/3)=4.5+0.8=5.3dB

6.9 Frequency Stability

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015&June 06, 2016
Tested By :	Winnie Zhang & Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235	a)	<p>According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:</p> <p>Frequency Tolerance for Transmitters in the Public Mobile Services</p> <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>450 to 512</td><td>2.5</td><td>5.0</td><td>5.0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 29.</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960.</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> <p>According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.</p>	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5.0	821 to 896	1.5	2.5	2.5	928 to 29.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
50 to 450	5.0	5.0	50.0																																
450 to 512	2.5	5.0	5.0																																
821 to 896	1.5	2.5	2.5																																
928 to 29.	5.0	N/A	N/A																																
929 to 960.	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																
Test setup																																			

Test Report	16050015-FCC-R
Page	36 of 48

Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Voice:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	20	0.0239	2.5
0		18	0.0215	2.5
10		16	0.0191	2.5
20		14	0.0167	2.5
30		16	0.0191	2.5
40		18	0.0215	2.5
50		19	0.0227	2.5
55		21	0.0251	2.5
25	4.2	22	0.0263	2.5
	3.5	24	0.0287	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	28	0.0149	2.5
0		22	0.0117	2.5
10		19	0.0101	2.5
20		15	0.0080	2.5
30		16	0.0085	2.5
40		17	0.0090	2.5
50		19	0.0101	2.5
55		20	0.0106	2.5
25	4.2	21	0.0112	2.5
	3.5	24	0.0128	2.5

GPRS:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	17	0.0203	2.5
0		18	0.0215	2.5
10		13	0.0155	2.5
20		11	0.0131	2.5
30		13	0.0155	2.5
40		14	0.0167	2.5
50		17	0.0203	2.5
55		18	0.0215	2.5
25	4.2	11	0.0131	2.5
	3.5	22	0.0263	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	25	0.0133	2.5
0		18	0.0215	2.5
10		20	0.0239	2.5
20		16	0.0191	2.5
30		13	0.0155	2.5
40		18	0.0215	2.5
50		15	0.0179	2.5
55		18	0.0215	2.5
25	4.2	19	0.0227	2.5
	3.5	20	0.0239	2.5

Annex A. TEST INSTRUMENT


Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/16/2015	09/15/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	UHL-270	001	10/09/2015	10/08/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Tunable Notch Filter	3NF-800/1000-S	AA4	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>

Test Report	16050015-FCC-R
Page	40 of 48


Tunable Notch Filter	3NF- 1000/2000-S	AM 4	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
----------------------	---------------------	------	------------	------------	-------------------------------------

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

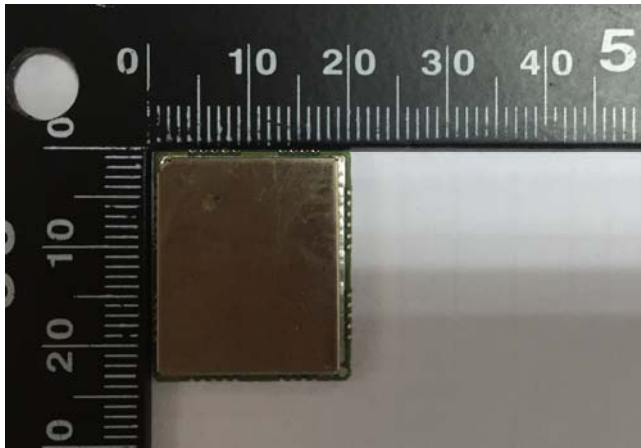


EUT - Front Side

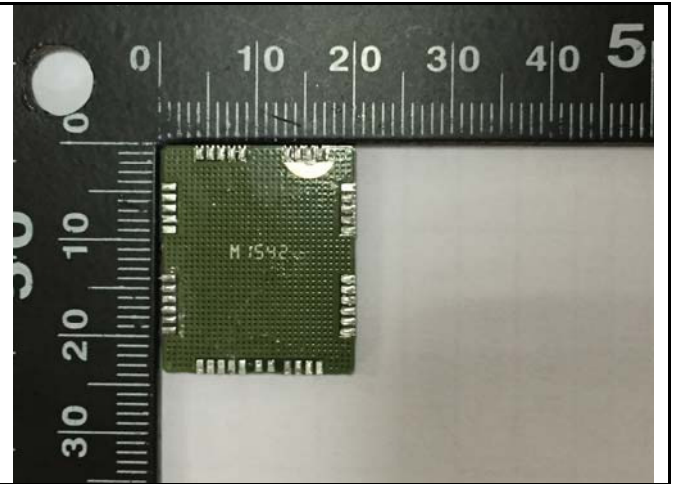


EUT -Rear Side


Annex B.ii. Photograph: EUT Internal Photo

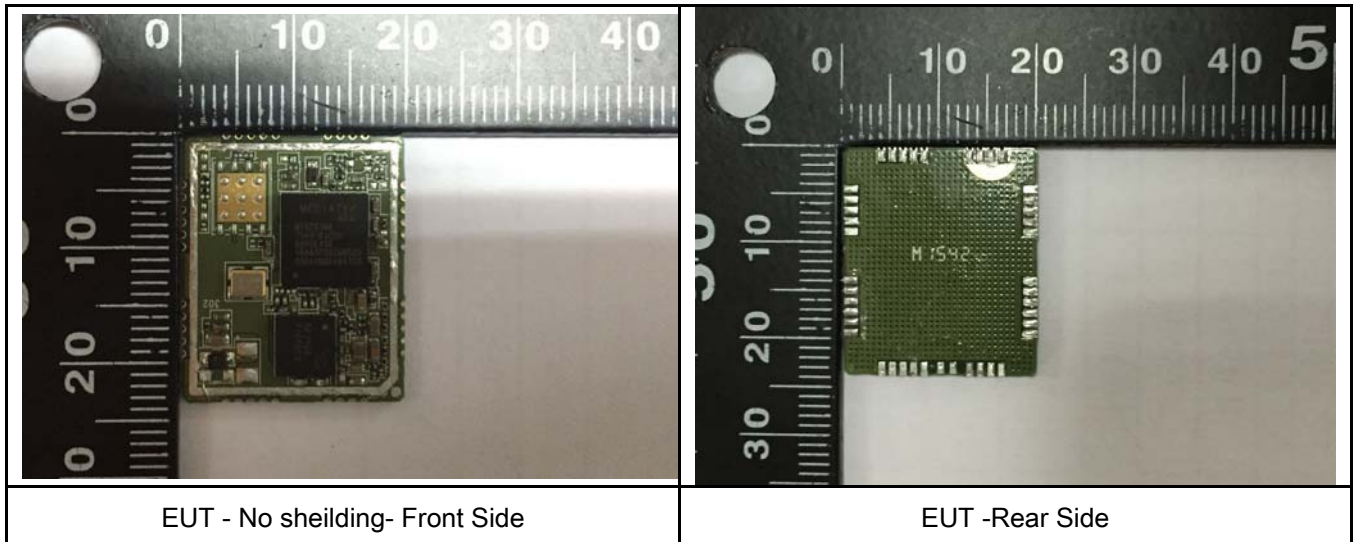

Annex B.iii. Photograph: Test Setup Photo

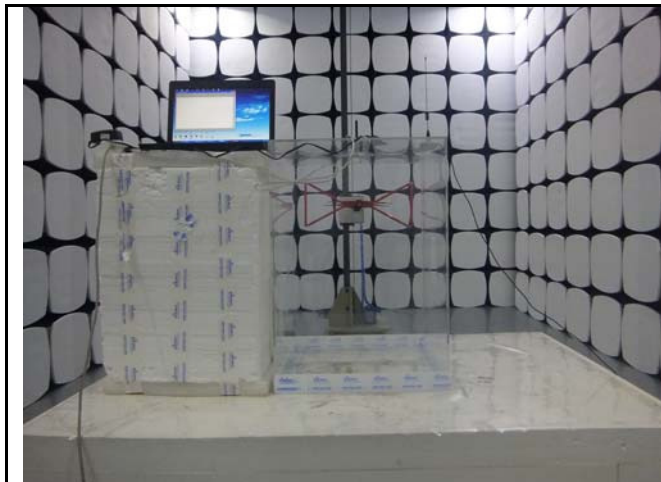

Radiated Spurious Emissions Test Setup Below 1GHz

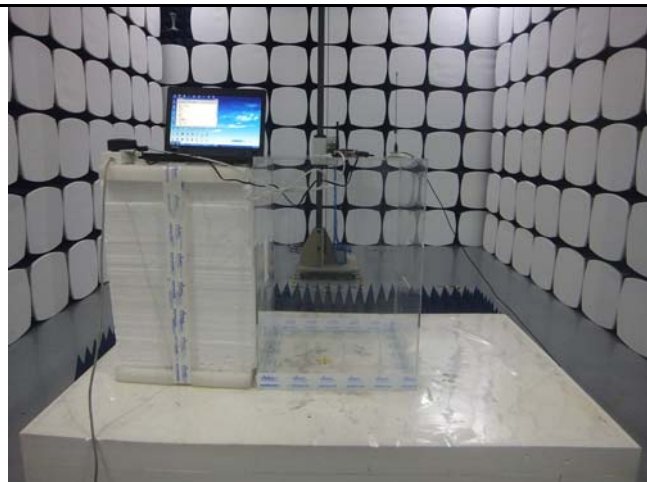


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

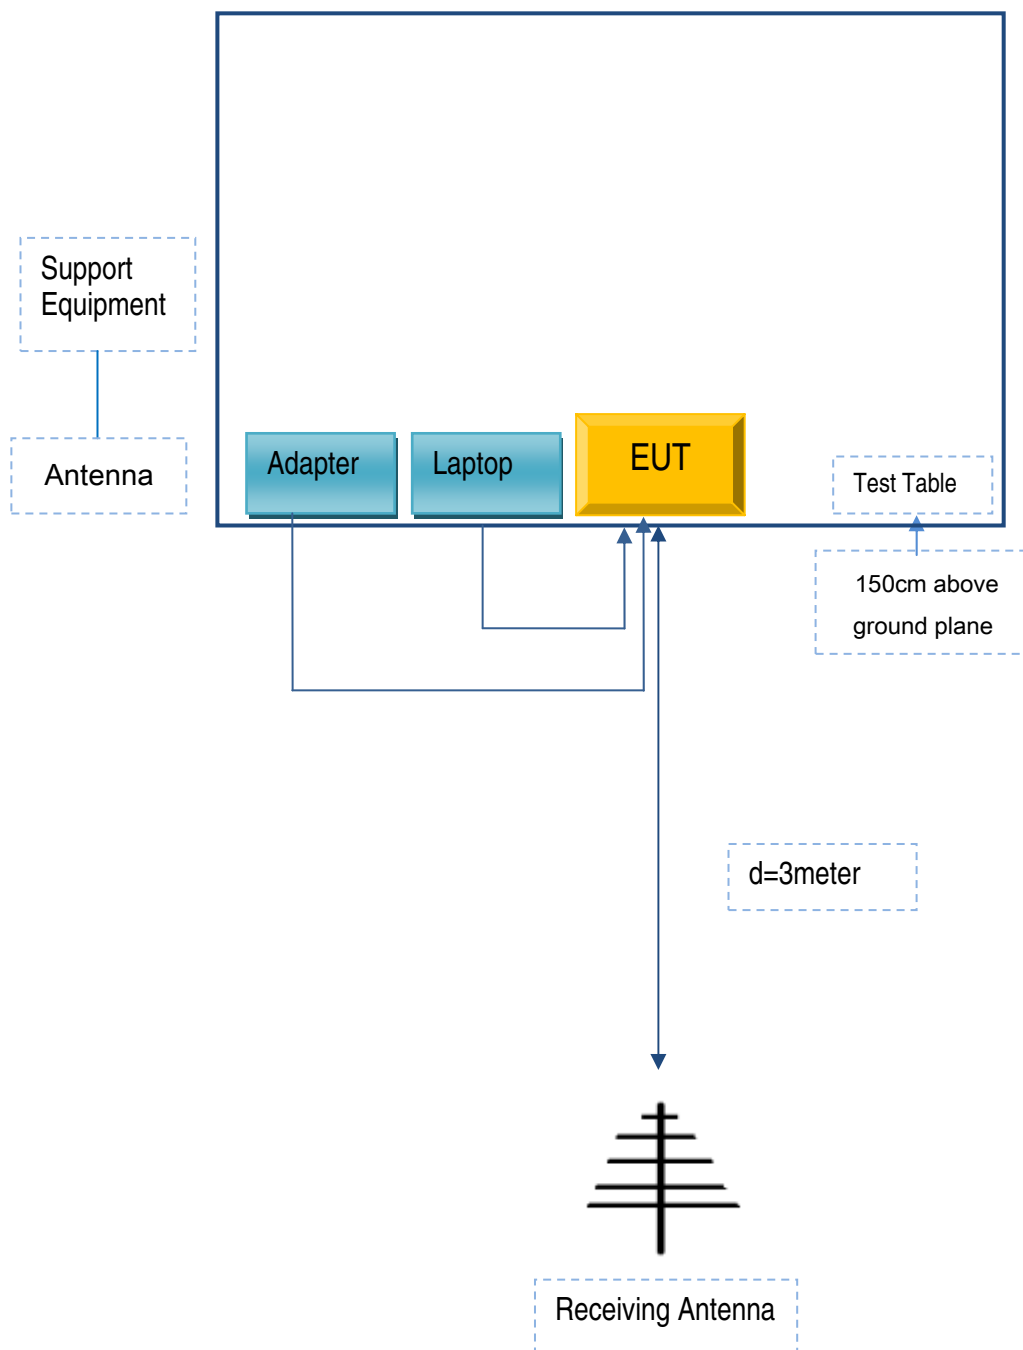

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
JINGSAI	Adapter	JS-400K	DJ54112

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB to RS-282 Cable	Un-shielding	No	1.5m	ED120051444
Power Cable	Un-shielding	No	1m	EX156327554

Test Report	16050015-FCC-R
Page	46 of 48

Annex C.ii. EUT OPERATING CONDITIONS

N/A

Test Report	16050015-FCC-R
Page	47 of 48

Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A

Annex E. DECLARATION OF SIMILARITY

Quectel Wireless Solutions Co., Ltd

To SIEMIC Inc
775 Montague Expressway
Milpitas, CA 95035,USA

Statement

We Quectel Wireless Solutions Co., Ltd agree Quectel M35 to use below information on file to apply a multiple-listing certification.

Name: GSM/GPRS Module

Model number: M95

Original report No.:15050058

Multiple listing model number: M35

We hereby state that these models are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement.

Your assistance on this matter is highly appreciated.

Sincerely,

Name: Johnny Xiang

Title: Manager

Signature: 