

FCC Test Report (Part 96: LTE Band 42)

Report No.: RF190807C25-1

FCC ID: XMR201909EG12GT

Test Model: EG12-GT

Received Date: Aug. 07, 2019

Test Date: Dec. 18, 2019 ~ Jan. 20, 2020

Issued Date: Jan. 20, 2020

Applicant: Quectel Wireless Solutions Co., Ltd.

Address: Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

**FCC Registration/
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Test Mode Applicability and Tested Channel Detail	8
3.3 Description of Support Units	9
3.3.1 Configuration of System under Test	9
3.4 General Description of Applied Standards and References.....	10
4 Test Types and Results	11
4.1 Maximum Output Power Measurement	11
4.1.1 Limits of Maximum Output Power Measurement	11
4.1.2 Test Setup.....	11
4.1.3 Test Instruments	11
4.1.4 Test Procedures.....	12
4.1.5 Deviation from Test Standard	12
4.1.6 EUT Operating Conditions.....	12
4.1.7 Test Results	13
4.2 Frequency Stability Measurement.....	17
4.2.1 Limits of Frequency Stability Measurement.....	17
4.2.2 Test Procedure	17
4.2.3 Test Setup.....	17
4.2.4 Test Results	18
4.3 Emission Bandwidth Measurement.....	19
4.3.1 Emission Bandwidth Measurement.....	19
4.3.2 Test Setup.....	19
4.3.3 Test Instruments	19
4.3.4 Test Procedure	19
4.3.5 Deviation from Test Standard	19
4.3.6 EUT Operating Conditions.....	19
4.3.7 Test Result (-26dB Bandwidth).....	20
4.3.8 Test Result (Occupied Bandwidth)	21
4.4 Peak to Average Ratio Measurement	22
4.4.1 Limits of Peak to Average Ratio Measurement	22
4.4.2 Test Setup.....	22
4.4.3 Test Procedures.....	22
4.4.4 Test Results	23
4.4.5 Limits of Conducted Spurious Emissions Measurement.....	24
4.4.6 Test Setup.....	24
4.4.7 Test Procedure	24
4.4.8 Test Results	25
4.5 Radiated Emission Measurement	34
4.5.1 Limits of Radiated Emission Measurement.....	34
4.5.2 Test Instruments	34
4.5.3 Test Procedures.....	35
4.5.4 Deviation from Test Standard	35
4.5.5 Test Set Up.....	36
4.5.6 Test Results	37
5 Pictures of Test Arrangements	41

Appendix – Information of the Testing Laboratories 42

Release Control Record

Issue No.	Description	Date Issued
RF190807C25-1	Original release.	Jan. 20, 2020

1 Certificate of Conformity

Product: LTE-A Cat 12 LGA Module

Brand: Quectel

Test Model: EG12-GT

Sample Status: Engineering sample

Applicant: Quectel Wireless Solutions Co., Ltd.

Test Date: Dec. 18, 2019 ~ Jan. 20, 2020

Standards: 47 CFR FCC Part 96

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Jan. 20, 2020
Celine Chou / Senior Specialist

Approved by : Bruce Chen , **Date:** Jan. 20, 2020
Bruce Chen / Senior Project Engineer

2 Summary of Test Results

47 CFR FCC Part 96			
FCC Clause	Test Item	Result	Remarks
2.1046 96.41(b)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1046 96.41(b)	Maximum Power Spectral Density	Pass	Meet the requirement of limit.
96.41(g)	Peak to Average Ration	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1055	Frequency Stability	Pass	Meet the requirement of limit.
2.1051 96.41(e)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 96.41(e)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -4.00dB at 7140.40MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	9 kHz ~ 30MHz	3.04 dB
	30 MHz ~ 200 MHz	3.59 dB
	200 MHz ~ 1000 MHz	3.60 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	LTE-A Cat 12 LGA Module				
Brand	Quectel				
Test Model	EG12-GT				
Status of EUT	Engineering sample				
Operating Voltage	3.3~4.3Vdc (form Host Equipment)				
Modulation Type	QPSK, 16QAM, 64QAM				
Operating Frequency	LTE Band 42	Channel Bandwidth 20MHz	TX: 3560 ~ 3590 MHz RX: 3560 ~ 3590 MHz		
Max. EIRP Power	LTE Band 42		QPSK	16QAM	64QAM
		Channel Bandwidth 20MHz	51.761mW (17.14dBm)	50.003mW (16.99dBm)	50.119mW (17.00dBm)
Emission Designator	LTE Band 42	Channel Bandwidth 20MHz	37M3G7D	37M3D7W	37M3D7W
Antenna Type	Dipole antenna with 0.14dBi gain				
Antenna Connector	SMA (M)				
Accessory Device	NA				
Data Cable Supplied	NA				

Note:

1. The EUT provides 1 completed transmitter and 4 receivers.
2. The EUT used following adapter. (for support unit only)

Adapter	
Brand	JINGSAI
Model	CLS-050200
Input Power	100-240Vac, 50/60Hz, 1.5A
Output Power	5Vdc, 2000mA
Power Line	1.1m power cable with one core attached on adapter

3.2 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below:

Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation
Maximum Output Power	43190 to 43292 43388 to 43490	43190 (3560.0MHz)+ 43388 (3579.8MHz) 43240 (3565.0MHz)+ 43438 (3584.8MHz) 43292 (3570.2MHz)+ 43490 (3590.0MHz)	20MHz	QPSK, 16QAM, 64QAM
Frequency Stability	43190 to 43292 43388 to 43490	43190 (3560.0MHz)+ 43388 (3579.8MHz)	20MHz	QPSK
Occupied Bandwidth	43190 to 43292 43388 to 43490	43190 (3560.0MHz)+ 43388 (3579.8MHz) 43240 (3565.0MHz)+ 43438 (3584.8MHz) 43292 (3570.2MHz)+ 43490 (3590.0MHz)	20MHz	QPSK, 16QAM, 64QAM
Peak to Average Ratio	43190 to 43292 43388 to 43490	43190 (3560.0MHz)+ 43388 (3579.8MHz) 43240 (3565.0MHz)+ 43438 (3584.8MHz) 43292 (3570.2MHz)+ 43490 (3590.0MHz)	20MHz	QPSK, 16QAM, 64QAM
Conducted Emission	43190 to 43292 43388 to 43490	43190 (3560.0MHz)+ 43388 (3579.8MHz) 43240 (3565.0MHz)+ 43438 (3584.8MHz) 43292 (3570.2MHz)+ 43490 (3590.0MHz)	20MHz	QPSK
Radiated Emission Below 1GHz	43190 to 43292 43388 to 43490	43190 (3560.0MHz)+ 43388 (3579.8MHz)	20MHz	QPSK
Radiated Emission Above 1GHz	43190 to 43292 43388 to 43490	43190 (3560.0MHz)+ 43388 (3579.8MHz) 43240 (3565.0MHz)+ 43438 (3584.8MHz) 43292 (3570.2MHz)+ 43490 (3590.0MHz)	20MHz	QPSK

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
Maximum Output Power	22deg. C, 66%RH	120Vac, 60Hz	Han Wu
Frequency Stability	25deg. C, 63%RH	120Vac, 60Hz	James Yang
Occupied Bandwidth	25deg. C, 63%RH	120Vac, 60Hz	James Yang
Peak to Average Ratio	25deg. C, 63%RH	120Vac, 60Hz	James Yang
Condcudeted Emission	25deg. C, 63%RH	120Vac, 60Hz	James Yang
Radiated Emission	22deg. C, 66%RH	120Vac, 60Hz	Han Wu

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Radio Communication Analyzer	Anritsu	MT8821C	6261806803	N/A	-
B.	Convertible Board	N/A	N/A	N/A	N/A	Provided by manufacturer
C.	Adapter	JINGSAI	CLS-050200	N/A	N/A	Provided by manufacturer

Note:


1. All power cords of the above support units are non-shielded (1.8m).
2. Items A acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Power Cable	1	1.1	-	1	Provided by manufacturer Attached on adapter

3.3.1 Configuration of System under Test

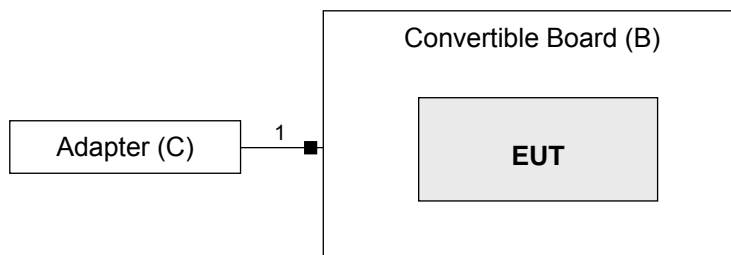

Remote site



3.4 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 96

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 940660 D01 Part 96 CBRS Eqpt v02

ANSI/TIA/EIA-603-D-2010

All test items have been performed as a reference to the above KDB test guidance.


4 Test Types and Results

4.1 Maximum Output Power Measurement

4.1.1 Limits of Maximum Output Power Measurement

Device		Maximum EIRP (dBm/10 MHz)
<input checked="" type="checkbox"/>	End User Device	23
<input type="checkbox"/>	Category A CBSD	30
<input type="checkbox"/>	Category B CBSD	47

4.1.2 Test Setup



4.1.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer KEYSIGHT	N9030A	MY53120770	Jan. 29, 2019	Jan. 28, 2020
Radio Communication Analyzer Anritsu	MT8821C	6261806803	Jan. 22, 2019	Jan. 21, 2020
RF cable	JB200	Cable-OVEN-02	NA	NA
DC-6GHz 20dB 50W Fixed attenuator Woken	MDC9331N-20	0724	Jun. 19, 2018	Jun. 18, 2020

Note: 1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.4 Test Procedures

Conducted output power measurement

1. Connect the DUT transmitter output to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
2. Set span to at least 1.5 times the OBW.
3. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
4. Set VBW $\geq 3 \times$ RBW.
5. Set number of points in sweep $\geq 2 \times$ span / RBW.
6. Sweep time = auto-couple.
7. Detector = RMS (power averaging).
8. If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
9. If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
10. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
11. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Maximum EIRP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.5 Deviation from Test Standard

No deviation.

4.1.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.1.7 Test Results

Conducted Output Power (dBm / 10MHz)

Con-figuration	Com-bination	PCC							SCC							Measurement Power		
		Band	BW (MHz)	Modu-lation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Band	BW (MHz)	Modu-lation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Tx Power with UL-CA Active (dBm)		
																PCC	SCC	Total
Intra Band Contiguous	42C	42	20	QPSK	1	0	43190	3560	42	20	QPSK	1	0	43388	3579.8	15.90	10.13	16.92
					1	99						15.47	10.55			16.68		
		42	20	16QAM	1	0	43190	3560	42	20	16QAM	1	0	43388	3579.8	15.73	10.21	16.80
					1	99						15.31	10.46			16.54		
		42	20	64QAM	1	0	43190	3560	42	20	64QAM	1	0	43388	3579.8	15.35	10.31	16.53
					1	99						14.96	10.14			16.20		
	42C	42	20	QPSK	1	0	43240	3565	42	20	QPSK	1	0	43438	3584.8	15.88	10.32	16.95
					1	99						15.56	10.77			16.80		
		42	20	16QAM	1	0	43240	3565	42	20	16QAM	1	0	43438	3584.8	15.81	10.11	16.85
					1	99						15.42	10.48			16.63		
		42	20	64QAM	1	0	43240	3565	42	20	64QAM	1	0	43438	3584.8	15.54	10.26	16.67
					1	99						15.00	10.20			16.24		
	42C	42	20	QPSK	1	0	43292	3570.2	42	20	QPSK	1	0	43490	3590	15.93	10.25	16.97
					1	99						15.58	10.44			16.74		
		42	20	16QAM	1	0	43292	3570.2	42	20	16QAM	1	0	43490	3590	15.66	10.00	16.70
					1	99						15.57	10.21			16.68		
		42	20	64QAM	1	0	43292	3570.2	42	20	64QAM	1	0	43490	3590	15.37	9.94	16.46
					1	99						14.86	10.19			16.13		

Spectrum Plot of Worst Value

CH 43292+43490



Maximum EIRP (dBm/ 10MHz)

Con- figu- re	Com- bi- na- tion	PCC							SCC							Antenna gain (dBi)	
		Band	BW (MHz)	Modu- lation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Band	BW (MHz)	Modu- lation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	0.14	EIRP
Intra Band Conti- guous	42C	42	20	QPSK	1	0	43190	3560	42	20	QPSK	1	0	43388	3579.8	17.06	
					1	99						16.82					
		42	20	16QAM	1	0	43190	3560	42	20	16QAM	1	0	43388	3579.8	16.94	
					1	99						16.68					
		42	20	64QAM	1	0	43190	3560	42	20	64QAM	1	0	43388	3579.8	16.67	
					1	99						16.34					
	42C	42	20	QPSK	1	0	43240	3565	42	20	QPSK	1	0	43438	3584.8	17.09	
					1	99						16.94					
		42	20	16QAM	1	0	43240	3565	42	20	16QAM	1	0	43438	3584.8	16.99	
					1	99						16.77					
		42	20	64QAM	1	0	43240	3565	42	20	64QAM	1	0	43438	3584.8	16.81	
					1	99						16.38					
	42C	42	20	QPSK	1	0	43292	3570.2	42	20	QPSK	1	0	43490	3590	17.11	
					1	99						16.88					
		42	20	16QAM	1	0	43292	3570.2	42	20	16QAM	1	0	43490	3590	16.84	
					1	99						16.82					
42		20	64QAM	1	0	43292	3570.2	42	20	64QAM	1	0	43490	3590	16.60		
				1	99						16.27						

*Note: EIRP (dBm / 10MHz) = Conducted Output Power (dBm / 10MHz) + Antenna Gain (0.14dBi)

Full Conducted Output Power (dBm / 40MHz)

Con-figuration	Com-bination	PCC							SCC							Measurement Power
		Band	BW (MHz)	Modu-lation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Band	BW (MHz)	Modu-lation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Tx Power with UL-CA Active (dBm)
																Total
Intra Band Contiguous	42C	42	20	QPSK	1	0	43190	3560	42	20	QPSK	1	0	43388	3579.8	16.77
					1	99						16.82				
		42	20	16QAM	1	0	43190	3560	42	20	16QAM	1	0	43388	3579.8	16.82
					1	99						16.55				
		42	20	64QAM	1	0	43190	3560	42	20	64QAM	1	0	43388	3579.8	16.55
					1	99						16.23				
	42C	42	20	QPSK	1	0	43240	3565	42	20	QPSK	1	0	43438	3584.8	16.94
					1	99						16.88				
		42	20	16QAM	1	0	43240	3565	42	20	16QAM	1	0	43438	3584.8	16.85
					1	99						16.63				
		42	20	64QAM	1	0	43240	3565	42	20	64QAM	1	0	43438	3584.8	16.86
					1	99						16.62				
	42C	42	20	QPSK	1	0	43292	3570.2	42	20	QPSK	1	0	43490	3590	17.00
					1	99						16.72				
		42	20	16QAM	1	0	43292	3570.2	42	20	16QAM	1	0	43490	3590	16.72
					1	99						16.73				
		42	20	64QAM	1	0	43292	3570.2	42	20	64QAM	1	0	43490	3590	16.49
					1	99						16.14				

Spectrum Plot of Worst Value

CH 43190+43388



Full EIRP (dBm / 40MHz)

Con- figu- re	Com- bi- na- tion	PCC							SCC							Antenna gain (dBi)	
		Band	BW (MHz)	Modu- lation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Band	BW (MHz)	Modu- lation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	0.14	EIRP
Intra Band Conti- guous	42C	42	20	QPSK	1	0	43190	3560	42	20	QPSK	1	0	43388	3579.8	16.91	
					1	99						16.96					
		42	20	16QAM	1	0	43190	3560	42	20	16QAM	1	0	43388	3579.8	16.96	
					1	99						16.69					
		42	20	64QAM	1	0	43190	3560	42	20	64QAM	1	0	43388	3579.8	16.69	
					1	99						16.37					
	42C	42	20	QPSK	1	0	43240	3565	42	20	QPSK	1	0	43438	3584.8	17.08	
					1	99						17.02					
		42	20	16QAM	1	0	43240	3565	42	20	16QAM	1	0	43438	3584.8	16.99	
					1	99						16.77					
		42	20	64QAM	1	0	43240	3565	42	20	64QAM	1	0	43438	3584.8	17.00	
					1	99						16.76					
	42C	42	20	QPSK	1	0	43292	3570.2	42	20	QPSK	1	0	43490	3590	17.14	
					1	99						16.86					
		42	20	16QAM	1	0	43292	3570.2	42	20	16QAM	1	0	43490	3590	16.86	
					1	99						16.87					
42		20	64QAM	1	0	43292	3570.2	42	20	64QAM	1	0	43490	3590	16.63		
				1	99						16.28						

*Note: Full EIRP = Full Conducted Output Power (dBm / 40MHz) + Antenna Gain (0.14dBi)

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency band.

4.2.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

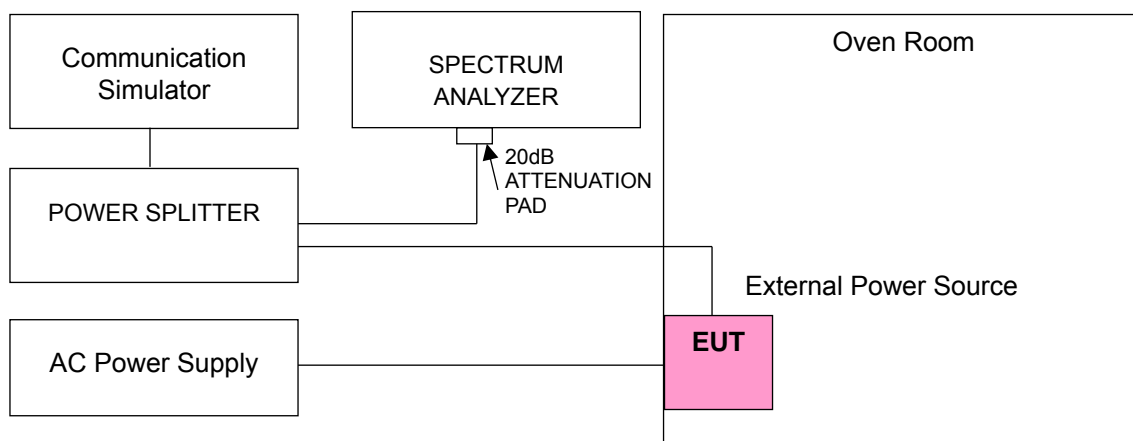

4.2.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 42, Channel Bandwidth: 20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102.0	3570.000001	0.000	3580.000002	0.001
120.0	3570.000001	0.000	3580.000002	0.001
138.0	3570.000004	0.001	3580.000002	0.001

Note: The applicant defined the normal working voltage is from 138Vac to 102Vac.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 42, Channel Bandwidth: 20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	3570.000003	0.001	3580.000002	0.001
-30	3570.000001	0.000	3580.000001	0.000
-20	3570.000002	0.000	3580.000002	0.001
-10	3570.000001	0.000	3580.000003	0.001
0	3570.000004	0.001	3580.000001	0.000
10	3570.000002	0.001	3580.000004	0.001
20	3569.999997	-0.001	3579.999996	-0.001
30	3569.999998	-0.001	3579.999997	-0.001
40	3569.999998	-0.001	3579.999999	0.000
50	3569.999998	-0.001	3579.999998	-0.001
60	3569.999997	-0.001	3579.999998	-0.001
70	3569.999998	-0.001	3579.999999	0.000
80	3569.999999	0.000	3579.999999	0.000

4.3 Emission Bandwidth Measurement

4.3.1 Emission Bandwidth Measurement

Reference only

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.3.4 Test Procedure

Occupied Bandwidth & 26dBc Bandwidth

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
2. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
3. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
NOTE—Step 1), step 2), and step 3) may require iteration to adjust within the specified tolerances.
4. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
5. Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
6. Determine the reference value by either of the following:
 - a) Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - b) Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
7. Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.

4.3.5 Deviation from Test Standard


No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 Test Result (-26dB Bandwidth)

LTE Band 42, Channel Bandwidth 20MHz				
Channel	Frequency (MHz)	26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM
		FullRB	FullRB	FullRB
43190+43388	3560.0+3579.8	38.71	38.68	38.71
43240+43438	3565.0+3584.8	38.37	38.68	38.70
43292+43490	3570.2+3590.0	38.65	38.69	38.65

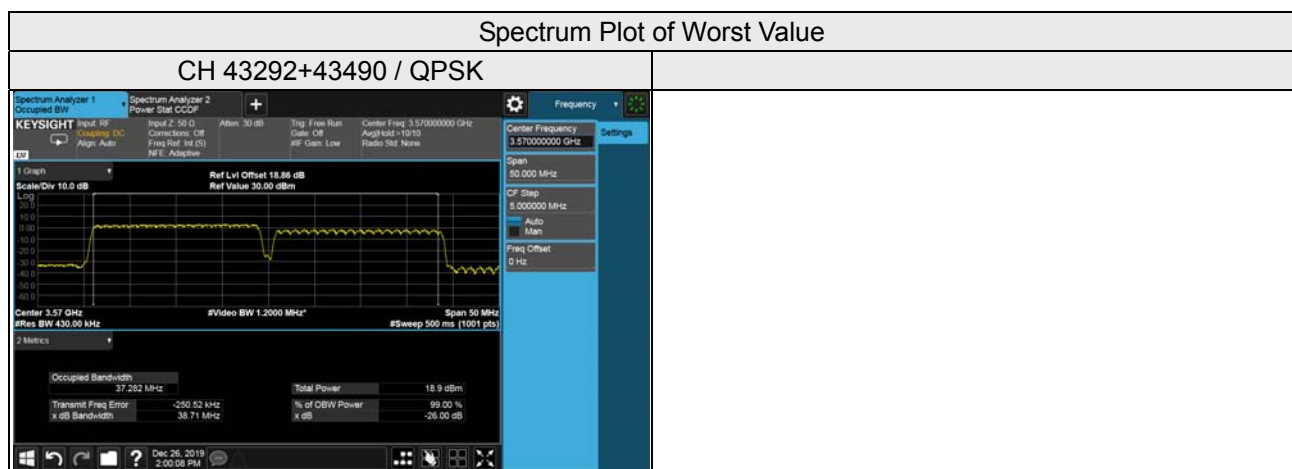

4.3.8 Test Result (Occupied Bandwidth)

LTE Band 42, Channel Bandwidth 20MHz				
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM
		FullRB	FullRB	FullRB
43190+43388	3560.0+3579.8	37.28	37.34	37.34
43240+43438	3565.0+3584.8	37.31	37.31	37.33
43292+43490	3570.2+3590.0	37.27	37.30	37.31

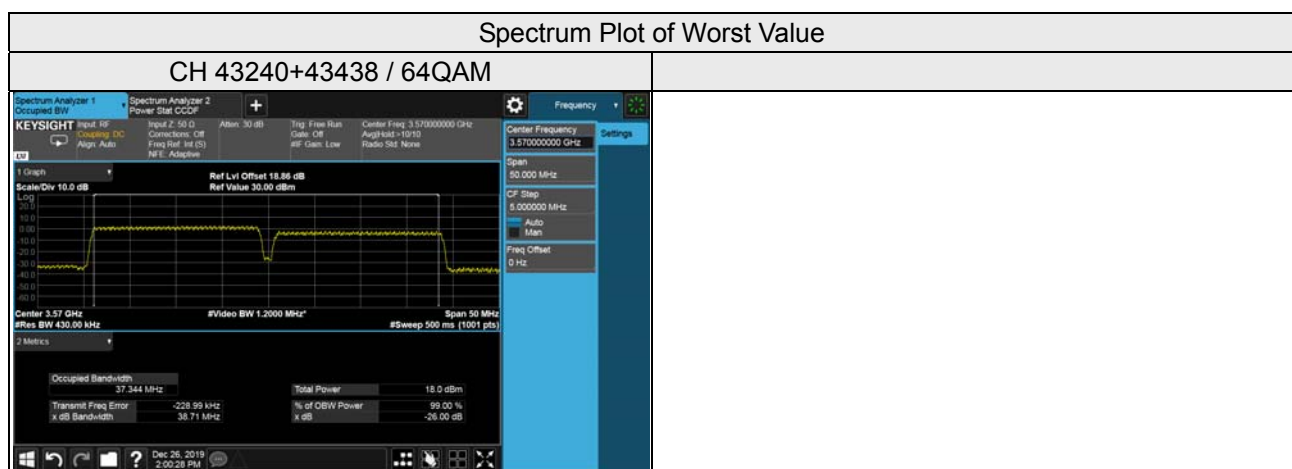


4.4 Peak to Average Ratio Measurement

4.4.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.4.2 Test Setup

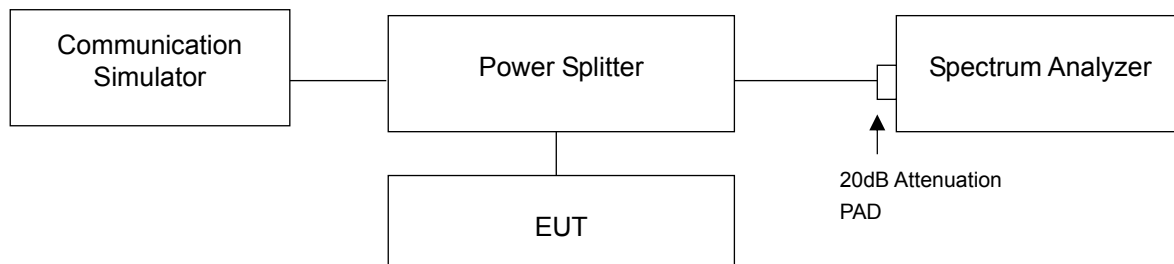


4.4.3 Test Procedures

- Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

4.4.4 Test Results


LTE Band 42, Channel Bandwidth 20MHz							
Channel	Frequency (MHz)	Peak To Average Ratio (dB)					
		QPSK		16QAM		64QAM	
		1RB0	1RB99	1RB0	1RB99	1RB0	1RB99
43190+43388	3560.0+3579.8	7.40	7.49	8.05	8.13	8.70	8.68
43240+43438	3565.0+3584.8	7.49	7.45	8.26	8.12	8.68	8.61
43292+43490	3570.2+3590.0	6.68	6.76	8.18	8.03	8.56	8.82

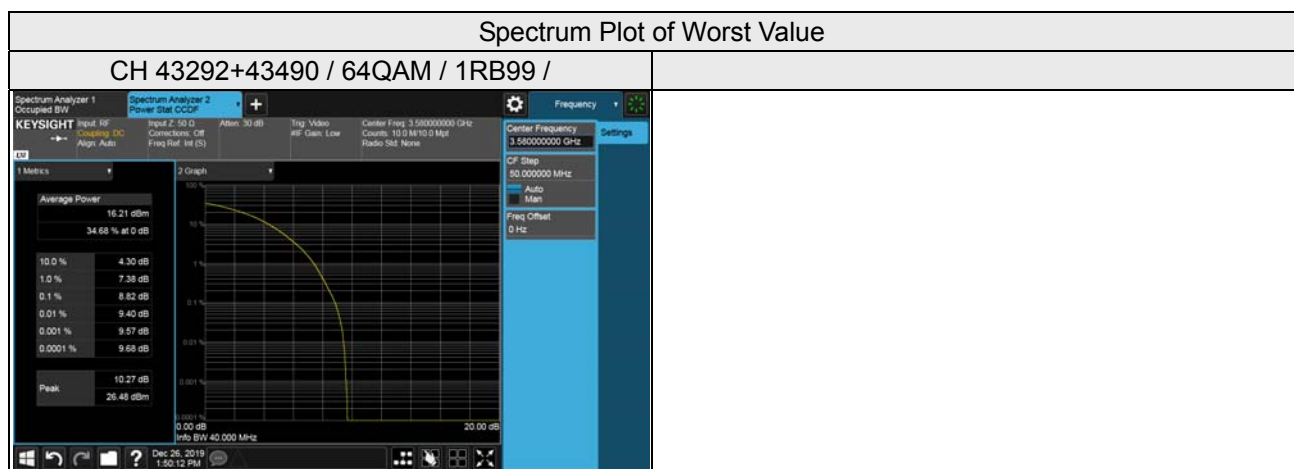

4.4.5 Limits of Conducted Spurious Emissions Measurement

Power of any emissions outside the Fundamental	Limit
Within 0-10MHz above the Assigned Channel	-13 dBm/MHz
Within 0-10MHz below the Assigned Channel	
Greater than 10MHz above the Assigned Channel	-25 dBm/MHz
Greater than 10MHz below the Assigned Channel	
Power of any emission below 3530MHz	-40 dBm/MHz
Power of any emission above 3720MHz	

4.4.6 Test Setup

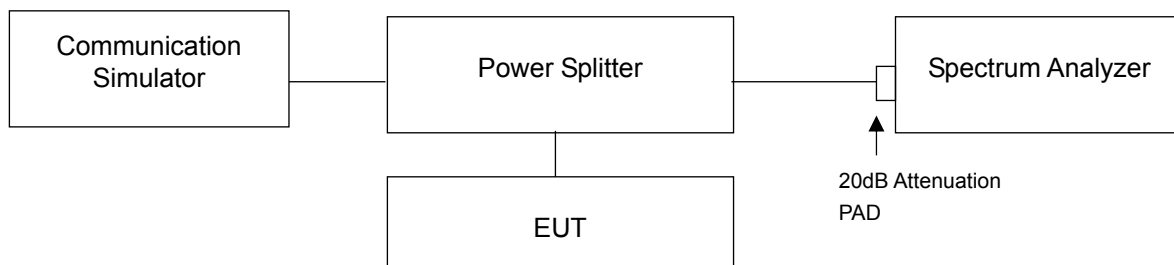

4.4.7 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 40 GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.
- Measuring frequency band edge, 20dB attenuation pad is connected with spectrum. 1% of the fundamental emission bandwidth is used for conducted emission measurement.

4.4.8 Test Results

LTE Band 42, Channel Bandwidth 20MHz

Channel 43190 (3560.0MHz) 1RB0 + Channel 43388 (3579.8MHz) 1RB0


Spectrum Analyzer 1
Spurious Emissions

Spectrum Analyzer 2
Power Stat CCDF

KEYSIGHT Input: RF Input Z: 50 Ω Atten: 30 dB Trig: Free Run
 Coupling: DC Corrections: Off Gate: Off Center Freq: 3.57000000 GHz
 Align: Auto Freq Ref: Int (S) IF Gain: Low Avg/Hold: 10/10
 NFE: Adaptive Radio Std: None

PASS

3 All Range Graph Ref Lvl Offset 18.86 dB Mkr1 3.5511 GHz
 Scale/Div 10.0 dB Ref Value 30.00 dBm 11.09 dBm

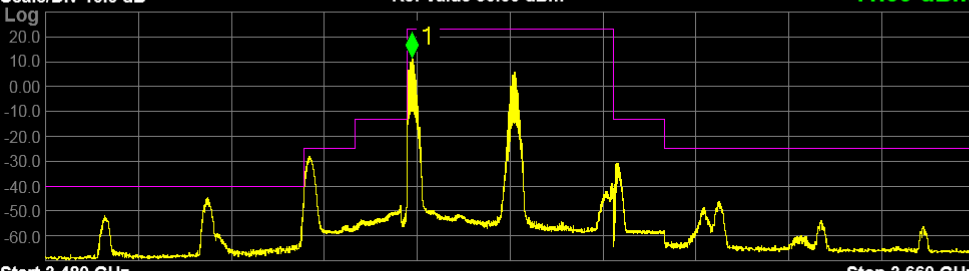

Start 3.480 GHz Stop 3.660 GHz

4 All Range Table

1	1	3.4800 GHz	3.5300 GHz	1.000 MHz	3.511666667 GHz	-44.51 dBm	-4.510 dB
2	2	3.5300 GHz	3.5400 GHz	1.000 MHz	3.531383333 GHz	-28.18 dBm	-3.184 dB
3	3	3.5400 GHz	3.5490 GHz	1.000 MHz	3.548985000 GHz	-47.90 dBm	-34.90 dB
4	4	3.5490 GHz	3.5500 GHz	200.0 kHz	3.549998333 GHz	-48.81 dBm	-35.81 dB
5	5	3.5500 GHz	3.5900 GHz	1.000 MHz	3.551133333 GHz	-11.09 dBm	-11.91 dB
6	6	3.5900 GHz	3.5910 GHz	200.0 kHz	3.590690000 GHz	-30.81 dBm	-17.81 dB
7	7	3.5910 GHz	3.6000 GHz	1.000 MHz	3.591015000 GHz	-30.86 dBm	-17.86 dB
8	8	3.6000 GHz	3.6600 GHz	1.000 MHz	3.610500000 GHz	-46.26 dBm	-21.26 dB

Meas Setup

Avg/Hold Number: 10

Averaging: On

Average Mode: Exponential

Meas Type: Examine

Spur: 5

Range: 5

Spur Report Mode: Minimum Margin

Range Settings

Meas Setup

Summary Table

Auto Couple

Meas Preset

Channel 43190 (3560.0MHz) 1RB99 + Channel 43388 (3579.8MHz) 1RB99


Spectrum Analyzer 1
Spurious Emissions

Spectrum Analyzer 2
Power Stat CCDF

KEYSIGHT Input: RF Input Z: 50 Ω Atten: 30 dB Trig: Free Run
 Coupling: DC Corrections: Off Gate: Off Center Freq: 3.57000000 GHz
 Align: Auto Freq Ref: Int (S) IF Gain: Low Avg/Hold: 10/10
 NFE: Adaptive Radio Std: None

PASS

3 All Range Graph Ref Lvl Offset 18.86 dB Mkr1 3.5690 GHz
 Scale/Div 10.0 dB Ref Value 30.00 dBm 12.59 dBm

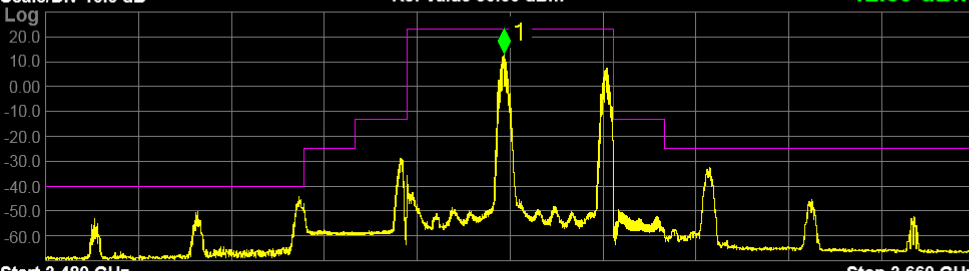

Start 3.480 GHz Stop 3.660 GHz

4 All Range Table

1	1	3.4800 GHz	3.5300 GHz	1.000 MHz	3.529166667 GHz	-44.08 dBm	-4.083 dB
2	2	3.5300 GHz	3.5400 GHz	1.000 MHz	3.530000000 GHz	-47.08 dBm	-22.08 dB
3	3	3.5400 GHz	3.5490 GHz	1.000 MHz	3.548985000 GHz	-28.97 dBm	-15.97 dB
4	4	3.5490 GHz	3.5500 GHz	200.0 kHz	3.549110000 GHz	-29.28 dBm	-16.28 dB
5	5	3.5500 GHz	3.5900 GHz	1.000 MHz	3.569000000 GHz	-12.59 dBm	-10.41 dB
6	6	3.5900 GHz	3.5910 GHz	200.0 kHz	3.590720000 GHz	-54.25 dBm	-41.25 dB
7	7	3.5910 GHz	3.6000 GHz	1.000 MHz	3.591015000 GHz	-49.46 dBm	-36.46 dB
8	8	3.6000 GHz	3.6600 GHz	1.000 MHz	3.608600000 GHz	-32.69 dBm	-7.692 dB

Meas Setup

Avg/Hold Number: 10

Averaging: On

Average Mode: Exponential

Meas Type: Examine

Spur: 5

Range: 5

Spur Report Mode: Minimum Margin

Range Settings

Meas Setup

Summary Table


Auto Couple

Meas Preset

LTE Band 42, Channel Bandwidth 20MHz, 1RB0

Channel 43190 (3560.0MHz)+Channel 43388 (3579.8MHz)


Frequency Range : 9kHz~1GHz

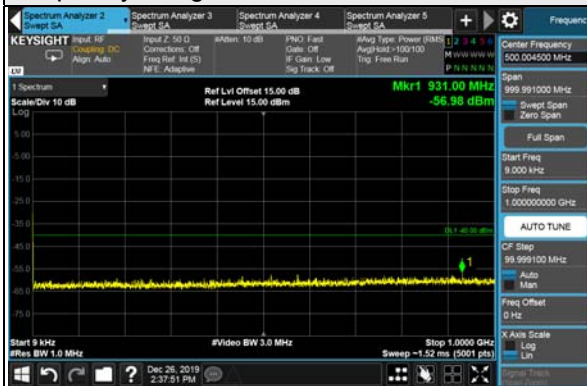

Frequency Range : 1GHz~3.5GHz



Frequency Range : 3.7GHz~18GHz

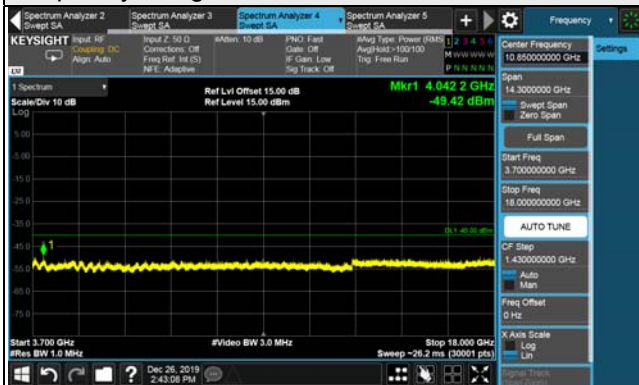

Frequency Range : 18GHz~40GHz



Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 42, Channel Bandwidth 20MHz, 1RB99

Channel 43190 (3560.0MHz)+Channel 43388 (3579.8MHz)


Frequency Range : 9kHz~1GHz



Frequency Range : 1GHz~3.5GHz



Frequency Range : 3.7GHz~18GHz

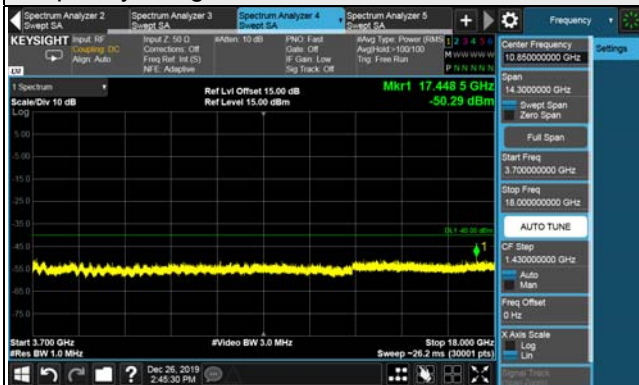

Frequency Range : 18GHz~40GHz



Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 42, Channel Bandwidth 20MHz

Channel 43240 (3565.0MHz) 1RB0 +Channel 43438 (3584.8MHz) 1RB0

Spectrum Analyzer 1 Spurious Emissions


KEYSIGHT Input: RF Coupling: DC Align: Auto

PASS

3 All Range Graph

Scale/Div 10.0 dB

Log

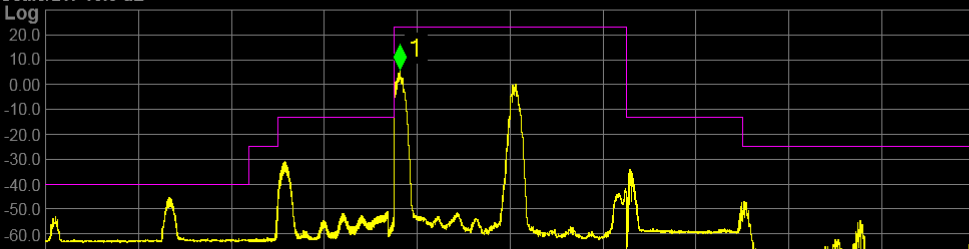

Start 3.495 GHz Stop 3.655 GHz

4 All Range Table

1	1	3.4950 GHz	3.5300 GHz	1.000 MHz	3.516350000 GHz	-45.58 dBm	-5.580 dB
2	2	3.5300 GHz	3.5350 GHz	1.000 MHz	3.534983333 GHz	-48.24 dBm	-23.24 dB
3	3	3.5350 GHz	3.5540 GHz	1.000 MHz	3.536266667 GHz	-31.05 dBm	-18.05 dB
4	4	3.5540 GHz	3.5550 GHz	200.0 kHz	3.554986667 GHz	-53.12 dBm	-40.12 dB
5	5	3.5550 GHz	3.5950 GHz	1.000 MHz	3.556200000 GHz	5.358 dBm	-17.64 dB
6	6	3.5950 GHz	3.5960 GHz	200.0 kHz	3.595676667 GHz	-34.21 dBm	-21.21 dB
7	7	3.5960 GHz	3.6150 GHz	1.000 MHz	3.596158333 GHz	-35.64 dBm	-22.64 dB
8	8	3.6150 GHz	3.6550 GHz	1.000 MHz	3.615333333 GHz	-47.07 dBm	-22.07 dB

Meas Setup

Avg/Hold Number 10

Averaging On

Average Mode Exponential

Meas Type Examine

Spur 5

Range 5

Spur Report Mode Minimum Margin

Range Settings

Meas Setup Summary Table

Auto Couple

Meas Preset

Dec 26, 2019 3:14:30 PM

Windows icons and navigation buttons

Channel 43240 (3565.0MHz) 1RB99 +Channel 43438 (3584.8MHz) 1RB99

Spectrum Analyzer 1 Spurious Emissions


KEYSIGHT Input: RF Coupling: DC Align: Auto

PASS

3 All Range Graph

Scale/Div 10.0 dB

Log

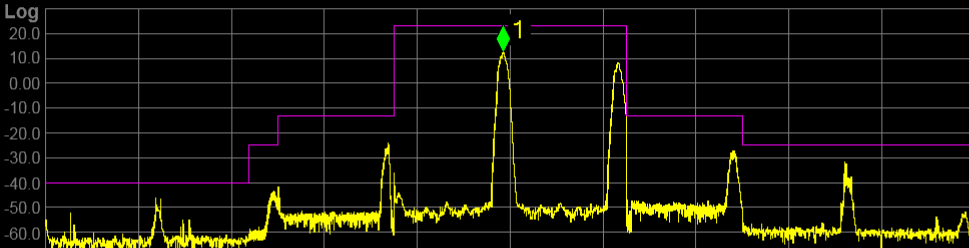

Start 3.495 GHz Stop 3.655 GHz

4 All Range Table

1	1	3.4950 GHz	3.5300 GHz	1.000 MHz	3.514133333 GHz	-46.11 dBm	-6.110 dB
2	2	3.5300 GHz	3.5350 GHz	1.000 MHz	3.534400000 GHz	-43.39 dBm	-18.39 dB
3	3	3.5350 GHz	3.5540 GHz	1.000 MHz	3.554000000 GHz	-25.94 dBm	-12.94 dB
4	4	3.5540 GHz	3.5550 GHz	200.0 kHz	3.554158333 GHz	-23.87 dBm	-10.87 dB
5	5	3.5550 GHz	3.5950 GHz	1.000 MHz	3.573866667 GHz	12.40 dBm	-10.60 dB
6	6	3.5950 GHz	3.5960 GHz	200.0 kHz	3.595050000 GHz	-45.75 dBm	-32.75 dB
7	7	3.5960 GHz	3.6150 GHz	1.000 MHz	3.613480000 GHz	-27.13 dBm	-14.13 dB
8	8	3.6150 GHz	3.6550 GHz	1.000 MHz	3.632733333 GHz	-31.75 dBm	-6.748 dB

Meas Setup

Avg/Hold Number 100

Averaging On

Average Mode Exponential

Meas Type Examine

Spur 5

Range 5

Spur Report Mode Minimum Margin

Range Settings

Meas Setup Summary Table

Auto Couple

Meas Preset


Dec 26, 2019 3:00:33 PM

Windows icons and navigation buttons

LTE Band 42, Channel Bandwidth 20MHz, 1RB0

Channel 43240 (3565.0MHz)+Channel 43438 (3584.8MHz)

Frequency Range : 9kHz~1GHz

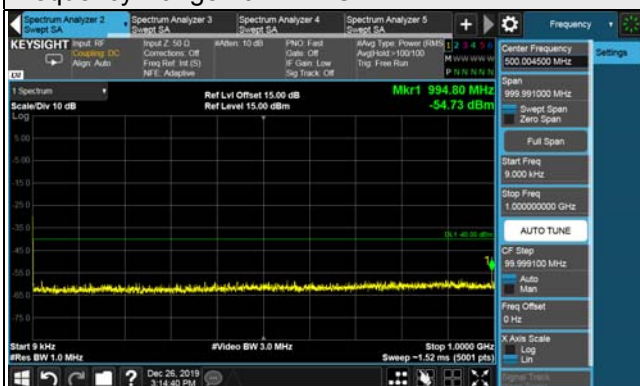


Frequency Range : 1GHz~3.5GHz



Frequency Range : 3.7GHz~18GHz




Frequency Range : 18GHz~40GHz

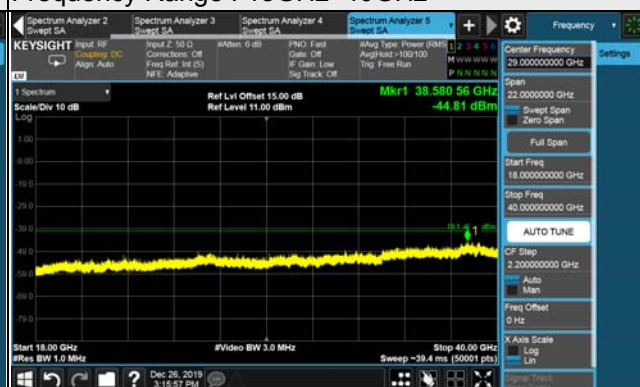

LTE Band 42, Channel Bandwidth 20MHz, 1RB99

Channel 43240 (3565.0MHz)+Channel 43438 (3584.8MHz)

Frequency Range : 9kHz~1GHz

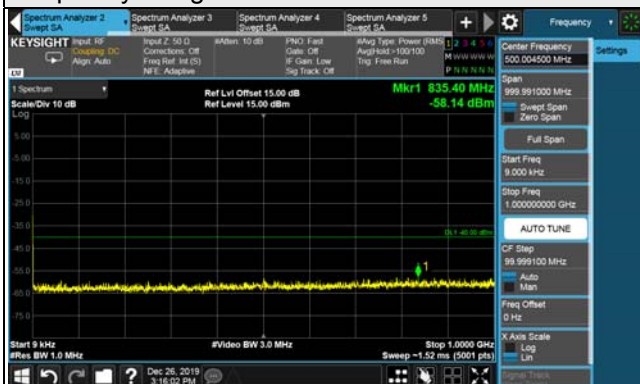


Frequency Range : 1GHz~3.5GHz



Frequency Range : 3.7GHz~18GHz



Frequency Range : 18GHz~40GHz

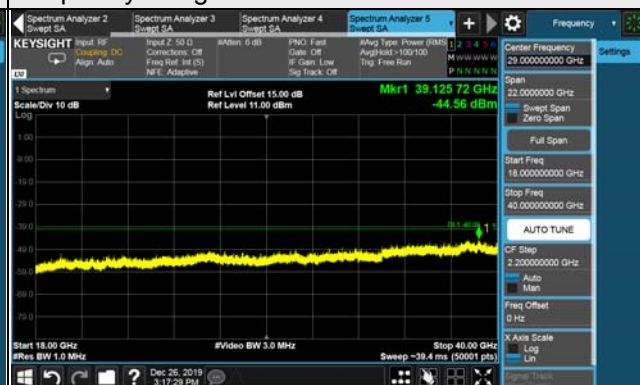

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 42, Channel Bandwidth 20MHz

Channel 43292 (3570.2MHz) 1RB0 +Channel 43490 (3590.0MHz) 1RB0

Spectrum Analyzer 1 Spurious Emissions

KEYSIGHT Input: RF Coupling: DC Align: Auto

PASS

Input Z: 50 Ω Atten: 30 dB Corrections: Off Freq Ref: Int (S) NFE: Adaptive

Trig: Free Run Gate: Off IF Gain: Low

Center Freq: 3.62500000 GHz Avg/Hold: 10/10 Radio Std: None

Avg/Hold Number: 10

Averaging: On

Average Mode: Exponential

Meas Type: Examine

Spur: 5

Range: 5

Spur Report Mode: Minimum Margin

Range Settings

Meas Setup Summary Table

Auto Couple

Meas Preset


3 All Range Graph

Scale/Div 10.0 dB

Log

Ref Lvl Offset 15.50 dB Ref Value 30.00 dBm

Mkr1 3.5614 GHz 7.73 dBm

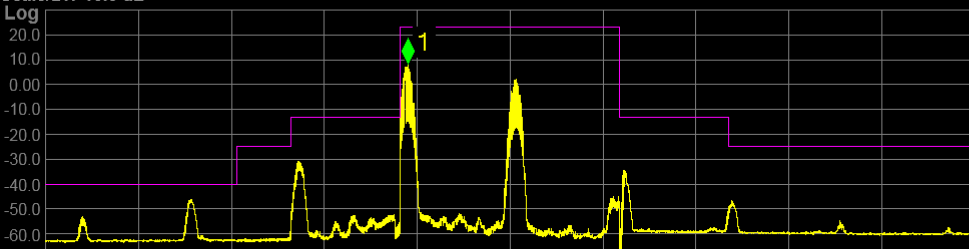

Start 3.495 GHz Stop 3.665 GHz

4 All Range Table

1	2	3	4	5	6	7	8
1	1	3.4950 GHz	3.5300 GHz	1.000 MHz	3.521833333 GHz	-46.39 dBm	-6.394 dB
2	2	3.5300 GHz	3.5400 GHz	1.000 MHz	3.539983333 GHz	-54.29 dBm	-29.29 dB
3	3	3.5400 GHz	3.5590 GHz	1.000 MHz	3.541425000 GHz	-31.04 dBm	-18.04 dB
4	4	3.5590 GHz	3.5600 GHz	200.0 kHz	3.559993333 GHz	-53.73 dBm	-40.73 dB
5	5	3.5600 GHz	3.6000 GHz	1.000 MHz	3.561400000 GHz	7.727 dBm	-15.27 dB
6	6	3.6000 GHz	3.6010 GHz	200.0 kHz	3.600888333 GHz	-34.66 dBm	-21.66 dB
7	7	3.6010 GHz	3.6200 GHz	1.000 MHz	3.601063333 GHz	-35.00 dBm	-22.00 dB
8	8	3.6200 GHz	3.6650 GHz	1.000 MHz	3.620600000 GHz	-46.73 dBm	-21.73 dB

Channel 43292 (3570.2MHz) 1RB99 +Channel 43490 (3590.0MHz) 1RB99

Spectrum Analyzer 1 Spurious Emissions

KEYSIGHT Input: RF Coupling: DC Align: Auto

PASS

Input Z: 50 Ω Atten: 30 dB Corrections: Off Freq Ref: Int (S) NFE: Adaptive

Trig: Free Run Gate: Off IF Gain: Low

Center Freq: 3.62500000 GHz Avg/Hold: 10/10 Radio Std: None

Avg/Hold Number: 10

Averaging: On

Average Mode: Exponential

Meas Type: Examine

Spur: 5

Range: 5

Spur Report Mode: Minimum Margin

Range Settings

Meas Setup Summary Table

Auto Couple

Meas Preset


3 All Range Graph

Scale/Div 10.0 dB

Log

Ref Lvl Offset 15.50 dB Ref Value 30.00 dBm

Mkr1 3.5790 GHz 6.26 dBm

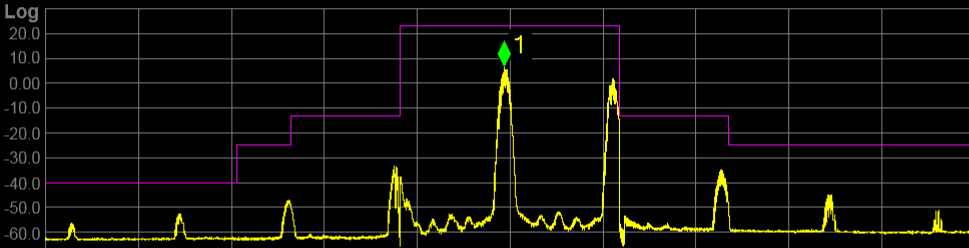

Start 3.495 GHz Stop 3.665 GHz


4 All Range Table

1	2	3	4	5	6	7	8
1	1	3.4950 GHz	3.5300 GHz	1.000 MHz	3.519616667 GHz	-52.75 dBm	-12.75 dB
2	2	3.5300 GHz	3.5400 GHz	1.000 MHz	3.539583333 GHz	-47.16 dBm	-22.16 dB
3	3	3.5400 GHz	3.5590 GHz	1.000 MHz	3.558968333 GHz	-33.23 dBm	-20.23 dB
4	4	3.5590 GHz	3.5600 GHz	200.0 kHz	3.559301667 GHz	-33.89 dBm	-20.89 dB
5	5	3.5600 GHz	3.6000 GHz	1.000 MHz	3.579000000 GHz	6.260 dBm	-16.74 dB
6	6	3.6000 GHz	3.6010 GHz	200.0 kHz	3.600283333 GHz	-54.37 dBm	-41.37 dB
7	7	3.6010 GHz	3.6200 GHz	1.000 MHz	3.618765000 GHz	-34.99 dBm	-21.99 dB
8	8	3.6200 GHz	3.6650 GHz	1.000 MHz	3.638300000 GHz	-44.95 dBm	-19.95 dB


LTE Band 42, Channel Bandwidth 20MHz, 1RB0

Channel 43292 (3570.2MHz)+Channel 43490 (3590.0MHz)


Frequency Range : 9kHz~1GHz

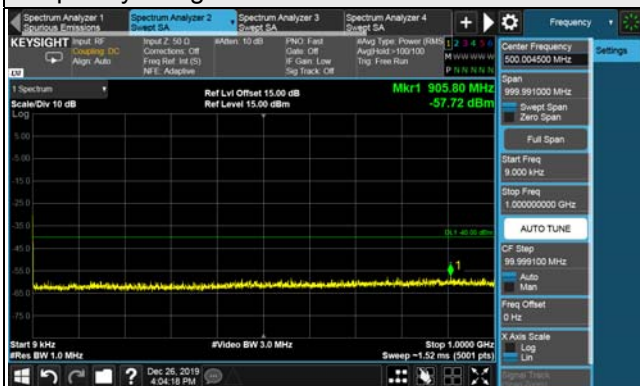

Frequency Range : 1GHz~3.5GHz

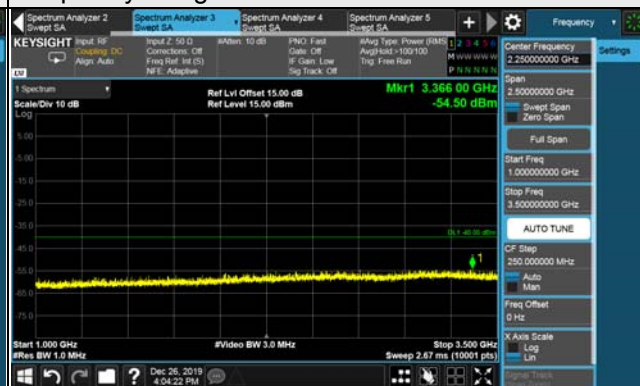

Frequency Range : 3.7GHz~18GHz

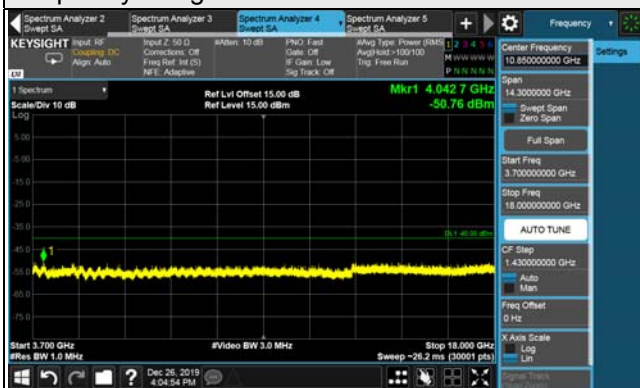

Frequency Range : 18GHz~40GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 42, Channel Bandwidth 20MHz, 1RB99

Channel 43292 (3570.2MHz)+Channel 43490 (3590.0MHz)


Frequency Range : 9kHz~1GHz

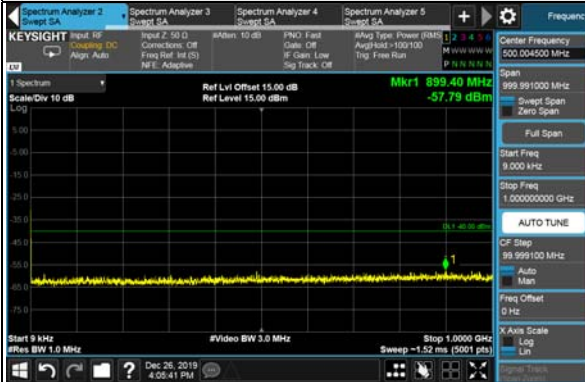

Frequency Range : 1GHz~3.5GHz



Frequency Range : 3.7GHz~18GHz

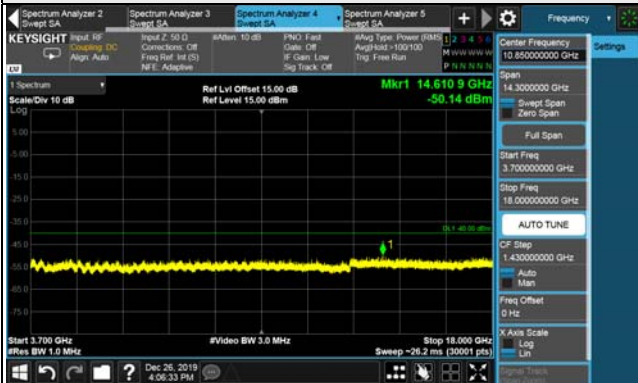

Frequency Range : 18GHz~40GHz



Note: The signal at 9 kHz is IF signal from spectrum analyzer.

4.5 Radiated Emission Measurement

4.5.1 Limits of Radiated Emission Measurement

The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz .

4.5.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 15, 2019	Apr. 14, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2019	Jun. 11, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 07, 2019	Nov. 06, 2020
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jul. 11, 2019	Jul. 10, 2020
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 19, 2019	Feb. 18, 2020
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM80 00	CABLE-CH9-02 (248780+171006)	Jan. 19, 2019	Jan. 18, 2020
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Jul. 11, 2019	Jul. 10, 2020
RF signal cable Woken	8D-FB	Cable-CH9-01	Jul. 30, 2019	Jul. 29, 2020
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 05, 2019	Sep. 04, 2020
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 03, 2019	Jun. 02, 2020
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	May 21, 2019	May 20, 2020
AC Power Source EEC	6905S	1991553	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 9.

4.5.3 Test Procedures

- a. Substitution method is used for EIRP measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. ERP power can be calculated form EIRP power by subtracting the gain of dipole, $ERP \text{ power} = EIRP \text{ power} - 2.15\text{dBi}$.


Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.5.4 Deviation from Test Standard


No deviation.

4.5.5 Test Set Up

<Frequency Range below 1GHz>

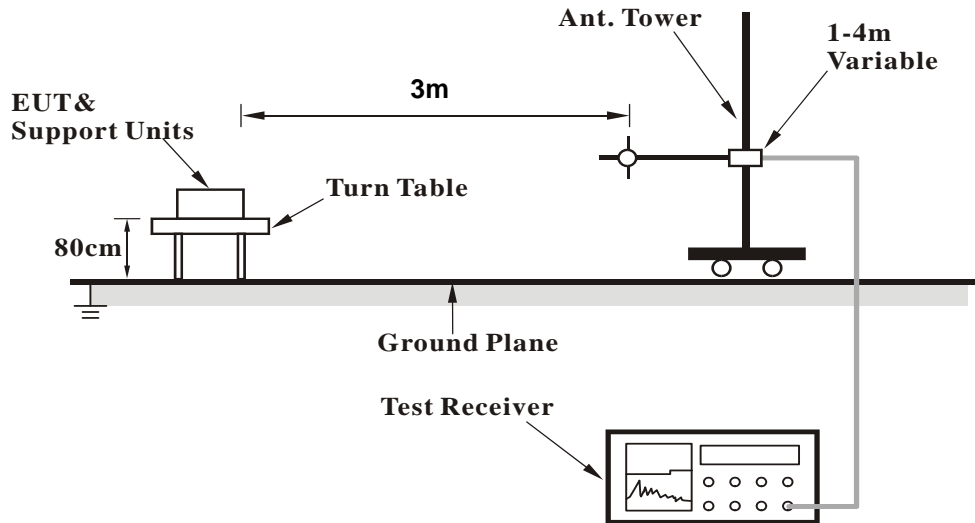

<Frequency Range above 1GHz>

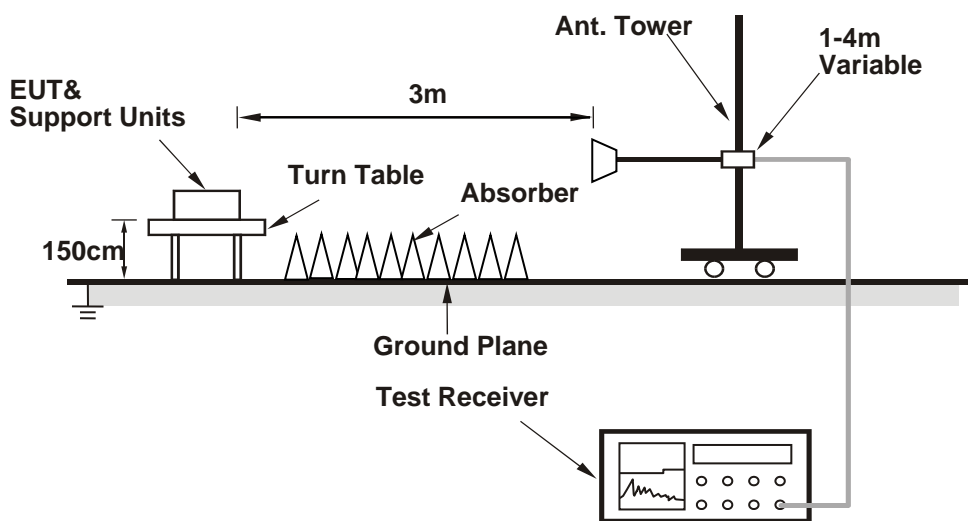

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.5.6 Test Results

Test was done with 50ohm terminator on antenna port.

Below 1GHz Data


LTE Band 42, Channel Bandwidth 20MHz, 1RB99

Mode	TX channel 43190 (3560.0MHz)+ TX channel 43388 (3579.8MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz (System)
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-60.30	-52.30	-1.70	-54.00	-40.00	-14.00
2	58.13	-56.80	-48.80	-1.70	-50.50	-40.00	-10.50
3	94.99	-50.90	-42.90	-1.70	-44.60	-40.00	-4.60
4	137.67	-60.40	-52.40	-1.70	-54.10	-40.00	-14.10
5	193.93	-56.70	-48.70	-1.70	-50.40	-40.00	-10.40
6	455.83	-70.40	-62.40	-1.70	-64.10	-40.00	-24.10

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

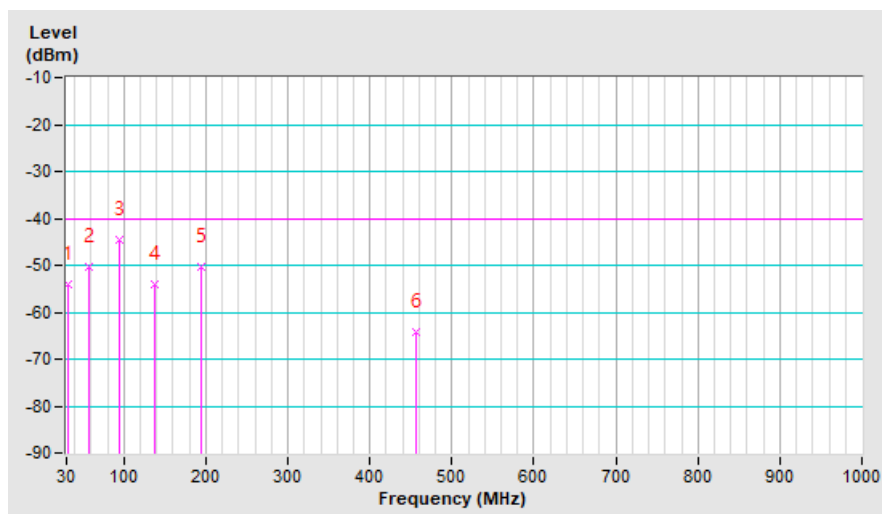


Mode	TX channel 43190 (3560.0MHz)+ TX channel 43388 (3579.8MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz (System)
Tested By	Han Wu		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	53.28	-55.60	-47.10	-1.70	-48.80	-40.00	-8.80
2	84.32	-57.30	-48.80	-1.70	-50.50	-40.00	-10.50
3	93.05	-54.90	-46.40	-1.70	-48.10	-40.00	-8.10
4	122.15	-58.40	-49.90	-1.70	-51.60	-40.00	-11.60
5	199.75	-59.70	-51.20	-1.70	-52.90	-40.00	-12.90
6	372.41	-56.60	-48.10	-1.70	-49.80	-40.00	-9.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

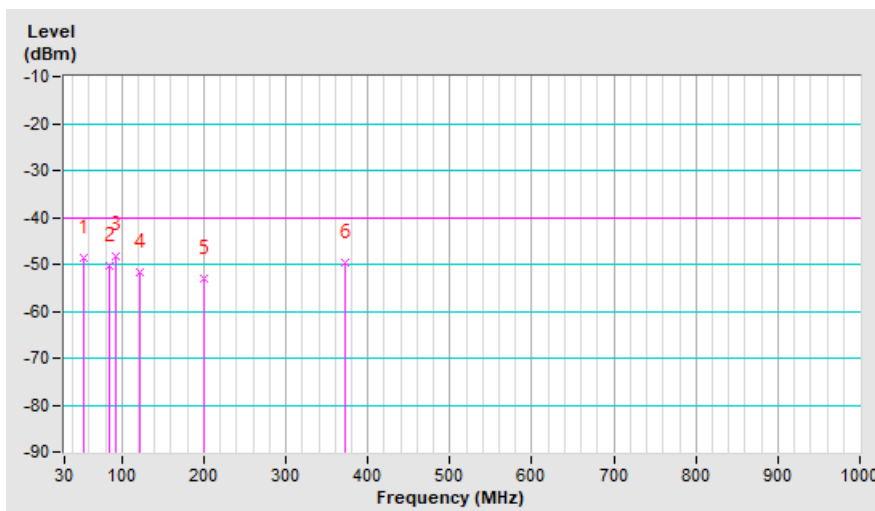

Above 1GHz

LTE Band 42, Channel Bandwidth 20MHz, 1RB99

Mode	TX channel 43190 (3560.0MHz)+ TX channel 43388 (3579.8MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz (System)
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	7120.00	-63.00	-45.00	0.70	-44.30	-40.00	-4.30
2	7159.60	-63.70	-45.90	0.80	-45.10	-40.00	-5.10

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	7120.00	-63.00	-45.30	0.70	-44.60	-40.00	-4.60
2	7159.60	-63.50	-45.70	0.80	-44.90	-40.00	-4.90

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 42, Channel Bandwidth 20MHz, 1RB0

Mode	TX channel 43240 (3565.0MHz)+ TX channel 43438 (3584.8MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz (System)
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	7130.00	-63.60	-45.60	0.70	-44.90	-40.00	-4.90
2	7169.60	-64.00	-46.20	0.80	-45.40	-40.00	-5.40

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	7130.00	-62.90	-45.10	0.70	-44.40	-40.00	-4.40
2	7169.60	-63.70	-45.90	0.80	-45.10	-40.00	-5.10

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 42, Channel Bandwidth 20MHz, 1RB0

Mode	TX channel 43292 (3570.2MHz)+ TX channel 43490 (3590.0MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz (System)
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	7140.40	-63.70	-45.80	0.80	-45.00	-40.00	-5.00
2	7180.00	-63.20	-45.40	0.80	-44.60	-40.00	-4.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	7140.40	-62.50	-44.80	0.80	-44.00	-40.00	-4.00
2	7180.00	-63.40	-45.60	0.80	-44.80	-40.00	-4.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---