



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd
FCC ID XMR202008EG95NAXD
Product LTE Module
Brand Quectel
Model EG95-NAXD
Report No. R2006A0378-R5
Issue Date July 8, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 24E (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Testing Location	4
2. General Description of Equipment under Test.....	5
3. Applied Standards.....	6
4. Test Configuration.....	7
5. Test Case Results.....	9
5.1. RF Power Output.....	9
5.2. Effective Isotropic Radiated Power	14
5.3. Occupied Bandwidth	18
5.4. Band Edge Compliance.....	27
5.5. Peak-to-Average Power Ratio (PAPR)	37
5.6. Frequency Stability	40
5.7. Spurious Emissions at Antenna Terminals	46
5.8. Radiates Spurious Emission	58
6. Main Test Instruments	66

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	Refer to the original
2	Effective Isotropic Radiated power	24.232(c)	Refer to the original
3	Occupied Bandwidth	2.1049	Refer to the original
4	Band Edge Compliance	2.1051 /24.238(a)	Refer to the original
5	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	Refer to the original
6	Frequency Stability	2.1055 / 24.235	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	Refer to the original
8	Radiates Spurious Emission	2.1053 / 24.238(a)	Only tested the worst case of LTE Band 2

Date of Testing: May 25, 2018 ~ June 27, 2018 and June 29, 2020

Note: PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

EG95-NAXD (Report No.: R2006A0378-R5) is a variant of the EG95-NAX (Report No.: R1907A0407-R5). Test values duplicated from Original for variant. There is only tested Radiates Spurious Emission of LTE Band 2 middle channel and Frequency Stability for variant in this report. The detailed product change description please refers to the Statement letter_EG95-NAX & EG95-NAXD.

EG95-NAX (Report No.: R1907A0407-R5) is a variant of the EG95-NA (Report No.: R1805A0249-R2).Test values duplicated from Original for variant. There is no test for variant in this report.



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

General information

EUT Description			
Model	EG95-NAXD		
IMEI	863071010199125		
Hardware Version	R1.0		
Software Version	EG95NAXDGAR07A01M1G		
Power Supply	External Power Supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Antenna Gain	Frequency(MHz)	Gain(dBi)	
	1860	1.25	
	1880	1.38	
	1900	1.59	
Test Mode(s)	WCDMA Band II; LTE Band 2;		
Test Modulation	(WCDMA) BPSK,QPSK,16QAM;(LTE)QPSK,16QAM		
HSDPA UE Category	24		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
LTE Category	4		
Maximum E.I.R.P	WCDMA Band II:	25.32dBm	
	LTE Band 2:	25.63dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C Highest: +85°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
Note: The information of the EUT is declared by the manufacturer.			

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 24E (2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

	Test items	Modes/Modulation
		WCDMA Band II
Conducted Test cases	RF power output	RMC HSDPA/HSUPA DC-HSDPA
	Occupied Bandwidth	RMC
	Band Edge Compliance	RMC
	Peak-to-Average Power Ratio	RMC
	Frequency Stability	RMC
	Spurious Emissions at Antenna Terminals	RMC
Radiated Test cases	Effective Isotropic Radiated power	RMC
	Radiates Spurious Emission	RMC



Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Effective Isotropic Radiated power	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Occupied Bandwidth	○	○	○	○	○	○	○	○	-	-	○	○	○	○
Band Edge Compliance	○	○	○	○	○	○	○	○	○	-	○	○	-	○
Peak-to-Average Power Ratio	○	○	○	○	○	○	○	○	-	-	○	○	○	○
Frequency Stability	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Conducted Spurious Emissions	○	○	○	○	○	○	○	-	○	-	-	○	○	○
Radiates Spurious Emission	○	-	○	-	-	○	○	-	○	-	-	○	○	○
Note	1. The mark "○" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case Results

5.1.RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

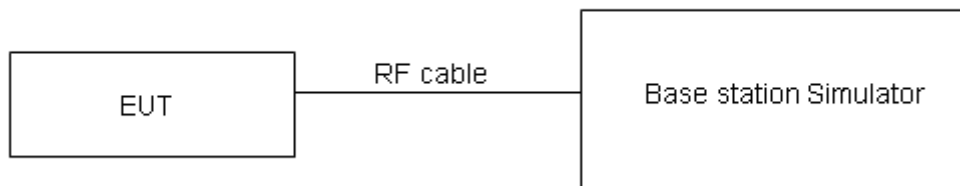

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

**Test Results**

WCDMA Band II		Conducted Power(dBm)		
		Channel 9262	Channel 9400	Channel 9538
		1852.4(MHz)	1880(MHz)	1907.6(MHz)
RMC	12.2k	23.46	23.35	23.37
	64k	23.40	23.23	23.21
	144k	23.31	23.18	23.20
	384k	23.30	23.19	23.21
HSDPA	Sub - Test 1	22.53	22.33	22.47
	Sub - Test 2	22.02	21.81	21.92
	Sub - Test 3	22.04	21.86	21.77
	Sub - Test 4	22.02	21.80	21.80
HSUPA	Sub - Test 1	22.51	22.36	22.36
	Sub - Test 2	22.54	22.39	22.41
	Sub - Test 3	22.45	22.40	22.43
	Sub - Test 4	21.97	21.78	21.81
	Sub - Test 5	22.07	21.87	21.86
DC-HSDPA	Sub - Test 1	23.39	23.24	23.26
	Sub - Test 2	23.38	23.23	23.25
	Sub - Test 3	22.87	22.72	22.74
	Sub - Test 4	22.86	22.81	22.72



LTE Band 2				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18607/1850.7	18900/1880	19193/1909.3
1.4MHz	QPSK	1	0	23.89	23.84	23.81
		1	2	23.90	23.83	23.90
		1	5	23.70	23.74	23.66
		3	0	23.90	23.79	23.70
		3	2	23.68	23.51	23.61
		3	3	23.80	23.52	23.74
		6	0	22.77	22.80	22.90
	16QAM	1	0	23.57	23.52	22.66
		1	2	23.57	23.32	22.92
		1	5	23.45	23.41	22.82
		3	0	22.89	22.67	22.75
		3	2	22.73	22.76	22.71
		3	3	22.81	22.83	22.65
		6	0	21.87	21.88	21.77
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18615/1851.5	18900/1880	19185/1908.5
3MHz	QPSK	1	0	23.91	23.88	23.84
		1	7	23.93	23.88	23.94
		1	14	23.73	23.79	23.70
		8	0	23.00	22.91	22.83
		8	4	22.80	22.61	22.73
		8	7	22.90	22.63	22.84
		15	0	22.80	22.84	22.93
	16QAM	1	0	23.60	23.54	22.69
		1	7	23.60	23.37	22.96
		1	14	23.47	23.45	22.85
		8	0	22.00	21.80	21.87
		8	4	21.84	21.89	21.83
		8	7	21.91	21.95	21.78
		15	0	21.90	21.92	21.80
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18625/1852.5	18900/1880	19175/1907.5
5MHz	QPSK	1	0	23.88	23.86	23.80
		1	13	23.91	23.84	23.91
		1	24	23.70	23.74	23.66
		12	0	22.97	22.86	22.79



	16QAM	12	6	22.78	22.57	22.68
		12	13	22.88	22.61	22.80
		25	0	22.78	22.83	22.91
		1	0	23.57	23.50	22.66
		1	13	23.57	23.35	22.93
		1	24	23.44	23.43	22.81
		12	0	21.98	21.76	21.84
		12	6	21.81	21.84	21.79
		12	13	21.88	21.90	21.74
		25	0	21.88	21.88	21.75
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18650/1855	18900/1880	19150/1905
10MHz	QPSK	1	0	23.90	23.87	23.83
		1	25	23.94	23.89	23.95
		1	49	23.72	23.78	23.69
		25	0	23.00	22.91	22.83
		25	13	22.81	22.62	22.72
		25	25	22.90	22.65	22.85
		50	0	22.86	22.85	22.95
	16QAM	1	0	23.59	23.53	22.68
		1	25	23.60	23.39	22.96
		1	49	23.47	23.45	22.84
		25	0	22.01	21.81	21.88
		25	13	21.83	21.88	21.82
		25	25	21.91	21.95	21.78
		50	0	21.91	21.93	21.79
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18675/1857.5	18900/1880	19125/1902.5
15MHz	QPSK	1	0	23.89	23.83	23.81
		1	38	23.92	23.88	23.92
		1	74	23.69	23.73	23.65
		36	0	22.98	22.87	22.80
		36	18	22.78	22.57	22.68
		36	39	22.87	22.62	22.81
		75	0	22.84	22.81	22.90
	16QAM	1	0	23.54	23.51	22.66
		1	38	23.58	23.36	22.94
		1	74	23.44	23.41	22.81
		36	0	21.98	21.79	21.85
		36	18	21.80	21.83	21.78



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18700/1860	18900/1880	19100/1900
		36	39	21.89	21.91	21.75
		75	0	21.88	21.88	21.75
20MHz	QPSK	1	0	23.86	23.79	23.78
		1	50	23.91	23.84	23.90
		1	99	23.67	23.72	23.62
		50	0	22.95	22.82	22.76
		50	25	22.76	22.53	22.65
		50	50	22.84	22.57	22.77
		100	0	22.81	22.76	22.86
	16QAM	1	0	23.52	23.47	22.61
		1	50	23.54	23.34	22.90
		1	99	23.42	23.38	22.79
		50	0	21.95	21.75	21.82
		50	25	21.77	21.81	21.75
		50	50	21.86	21.86	21.71
		100	0	21.86	21.84	21.72

5.2. Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $ERP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$
where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

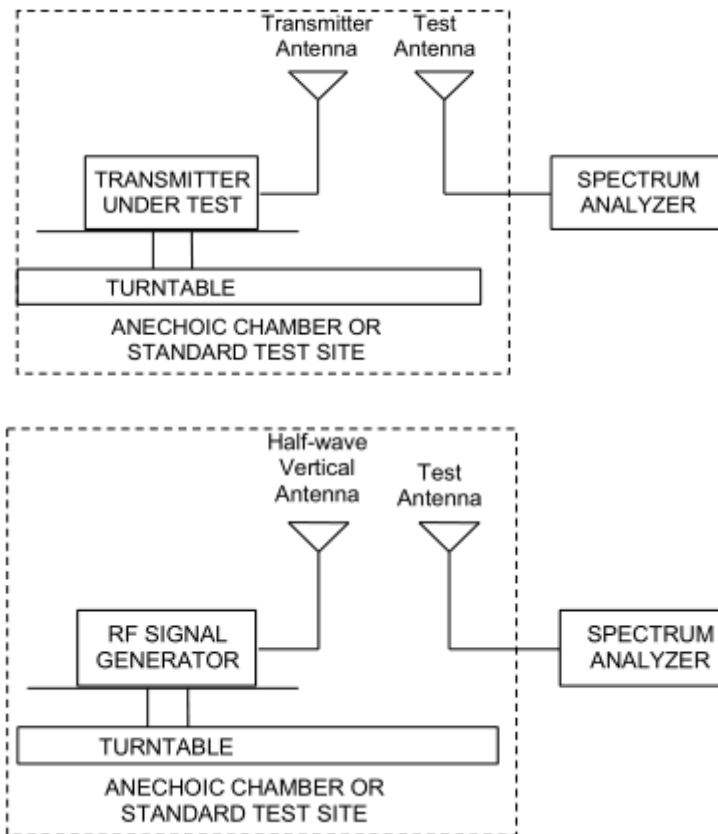

Limits

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2\text{ W}$ (33 dBm)
-------	----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19\text{ dB}$

Test Results:

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
WCDMA Band II	Low	1852.4	Horizontal	25.32	33	Pass
	Mid	1880	Horizontal	25.12	33	Pass
	High	1907.6	Horizontal	25.18	33	Pass

LTE Band 2						
bandwidth	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	1850.7	Horizontal	25.15	33	Pass
	Mid	1880	Horizontal	25.31	33	Pass
	High	1909.3	Horizontal	25.15	33	Pass
3 MHz (QPSK)	Low	1851.5	Horizontal	25.25	33	Pass
	Mid	1880	Horizontal	25.51	33	Pass
	High	1908.5	Horizontal	25.60	33	Pass
5 MHz (QPSK)	Low	1852.5	Horizontal	25.08	33	Pass
	Mid	1880	Horizontal	25.63	33	Pass
	High	1907.5	Horizontal	25.43	33	Pass
10 MHz (QPSK)	Low	1855	Horizontal	25.05	33	Pass
	Mid	1880	Horizontal	25.24	33	Pass
	High	1905	Horizontal	24.65	33	Pass
15 MHz (QPSK)	Low	1857.5	Horizontal	25.18	33	Pass
	Mid	1880	Horizontal	25.29	33	Pass
	High	1902.5	Horizontal	24.88	33	Pass
20 MHz (QPSK)	Low	1860	Horizontal	25.33	33	Pass
	Mid	1880	Horizontal	25.46	33	Pass
	High	1900	Horizontal	25.02	33	Pass
1.4 MHz (16QAM)	Low	1850.7	Horizontal	24.70	33	Pass
	Mid	1880	Horizontal	24.86	33	Pass
	High	1909.3	Horizontal	24.90	33	Pass
3 MHz (16QAM)	Low	1851.5	Horizontal	24.95	33	Pass
	Mid	1880	Horizontal	25.18	33	Pass
	High	1908.5	Horizontal	25.31	33	Pass
5 MHz (16QAM)	Low	1852.5	Horizontal	24.73	33	Pass
	Mid	1880	Horizontal	25.28	33	Pass
	High	1907.5	Horizontal	25.08	33	Pass
10 MHz (16QAM)	Low	1855	Horizontal	24.71	33	Pass
	Mid	1880	Horizontal	24.68	33	Pass



LTE Band 2						
bandwidth	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
15 MHz (16QAM)	High	1905	Horizontal	24.58	33	Pass
	Low	1857.5	Horizontal	24.44	33	Pass
	Mid	1880	Horizontal	24.51	33	Pass
	High	1902.5	Horizontal	24.58	33	Pass
20 MHz (16QAM)	Low	1860	Horizontal	24.86	33	Pass
	Mid	1880	Horizontal	25.11	33	Pass
	High	1900	Horizontal	24.84	33	Pass

5.3.Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II,


RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2(1.4MHz),

RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 2(3MHz/5MHz),

RBW is set to 300kHz,VBW is set to 1MHz for LTE Band 2(10MHz/15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

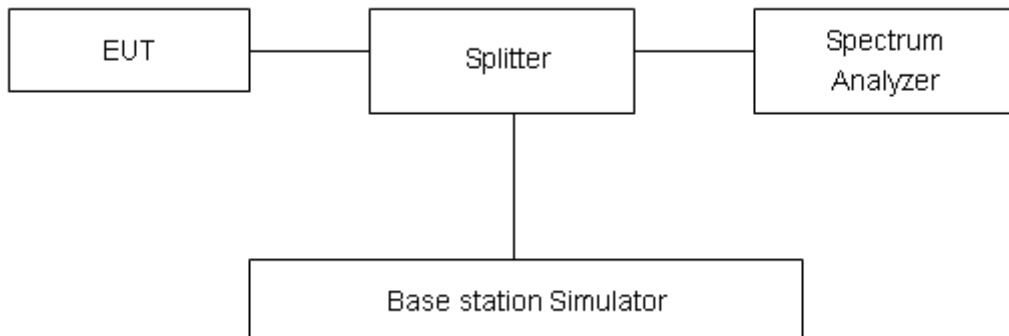

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.



Test Result


Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
WCDMA Band II (RMC)	9262	1852.4	4.1367	4.698
	9400	1880	4.1201	4.692
	9538	1907.6	4.135	4.69

LTE Band 2						
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)	
QPSK	1.4	18607	1850.7	1.1257	1.345	
		18900	1880.0	1.1328	1.344	
		19193	1909.3	1.1144	1.338	
	3	18615	1851.5	2.7424	3.06	
		18900	1880	2.7347	3.053	
		19185	1908.5	2.7321	3.053	
	5	18625	1852.5	4.5299	5.031	
		18900	1880	4.5307	5.031	
		19175	1907.5	4.5335	5.063	
	10	18650	1855	9.0476	10.01	
		18900	1880	9.018	9.916	
		19150	1905	9.0078	9.985	
	15	18675	1857.5	13.442	14.72	
		18900	1880	13.45	14.68	
		19125	1902.5	13.409	14.57	
	20	18700	1860	17.842	19.18	
		18900	1880	17.869	19.14	
		19100	1900	17.836	19.19	
	16QAM	1.4	18607	1850.7	1.1114	1.328
			18900	1880.0	1.1249	1.345
			19193	1909.3	1.1286	1.323
3		18615	1851.5	2.7448	3.069	
		18900	1880	2.7366	3.049	




		19185	1908.5	2.7386	3.067
5		18625	1852.5	4.5149	4.991
		18900	1880	4.532	5.048
		19175	1907.5	4.5341	5.007
10		18650	1855	9.015	10.06
		18900	1880	9.0187	10.04
		19150	1905	9.0093	9.954
15		18675	1857.5	13.468	14.75
		18900	1880	13.419	14.64
		19125	1902.5	13.41	14.61
20		18700	1860	17.881	19.07
		18900	1880	17.847	19.23
		19100	1900	17.815	19.18


WCDMA Band II RMC CH-LOW






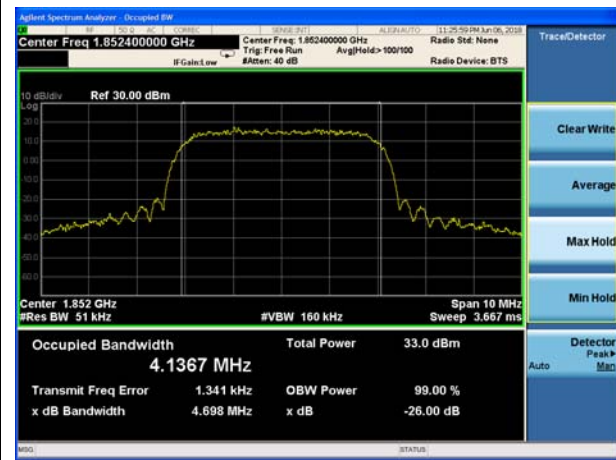








WCDMA Band II RMC CH-Middle






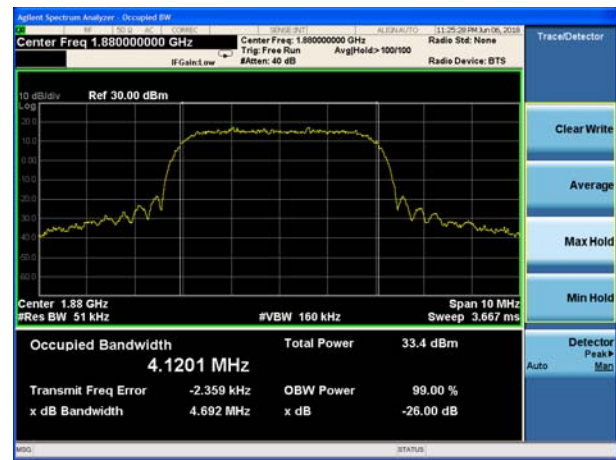








WCDMA Band II RMC CH-High






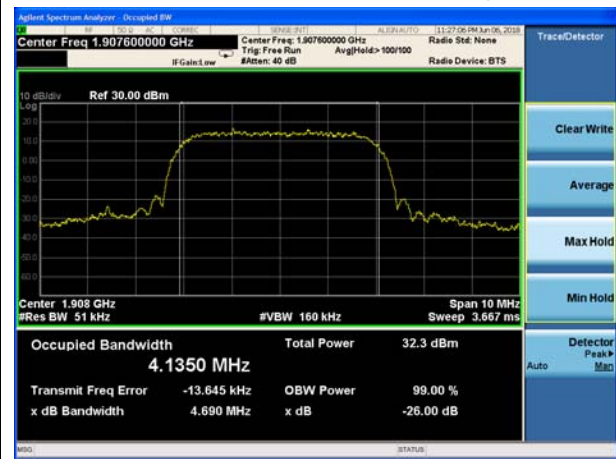


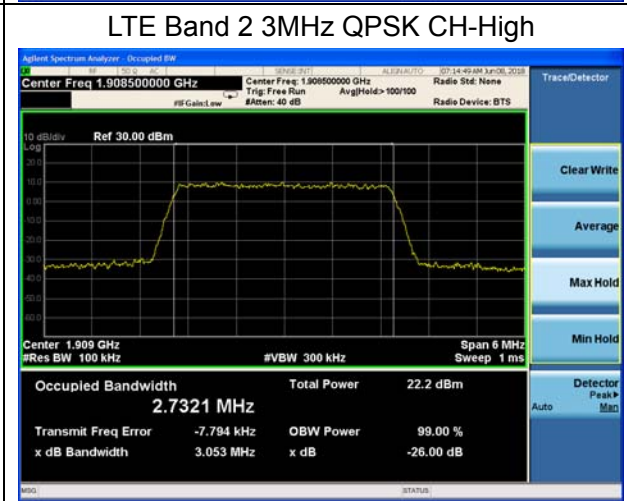
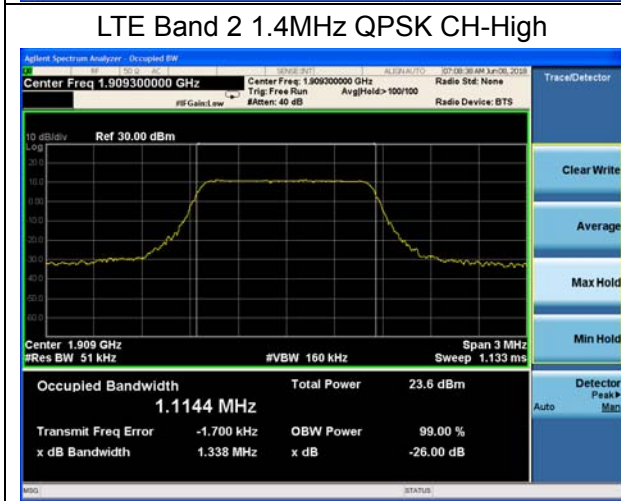
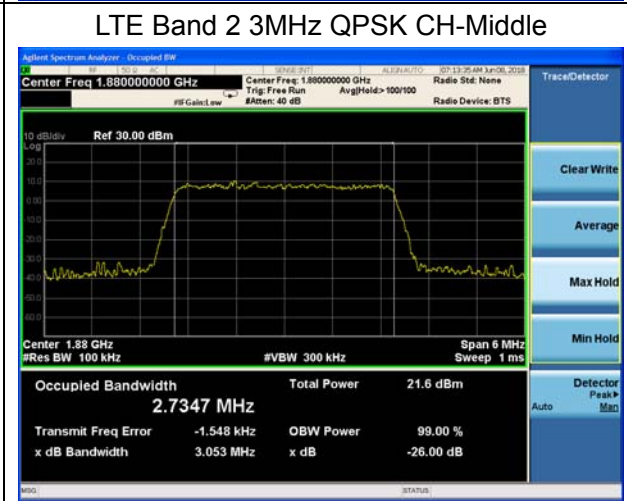
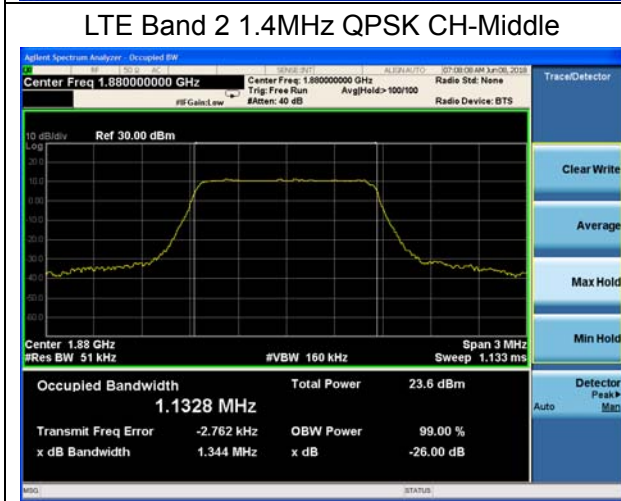
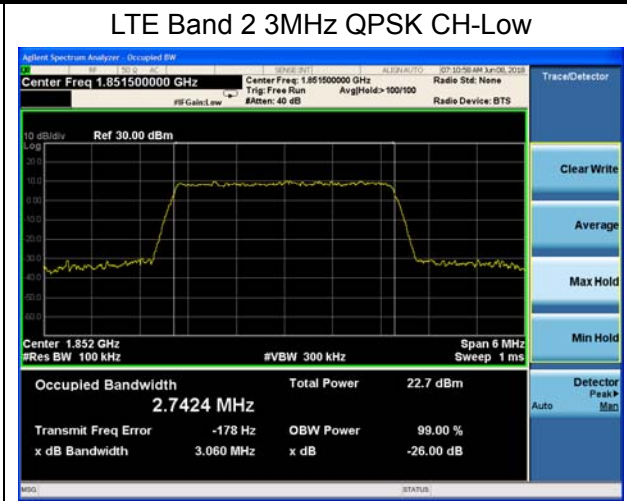
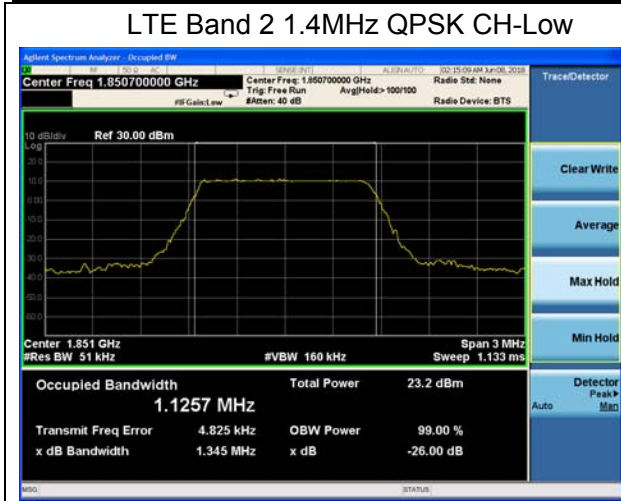


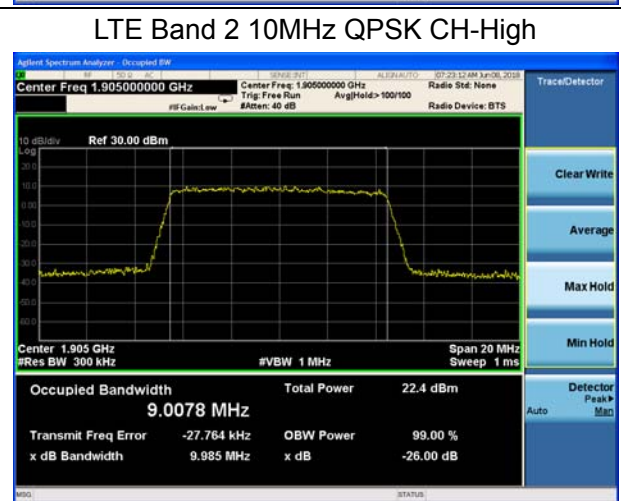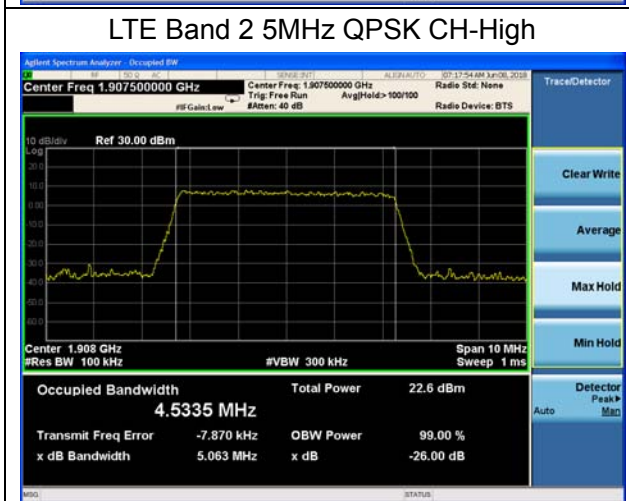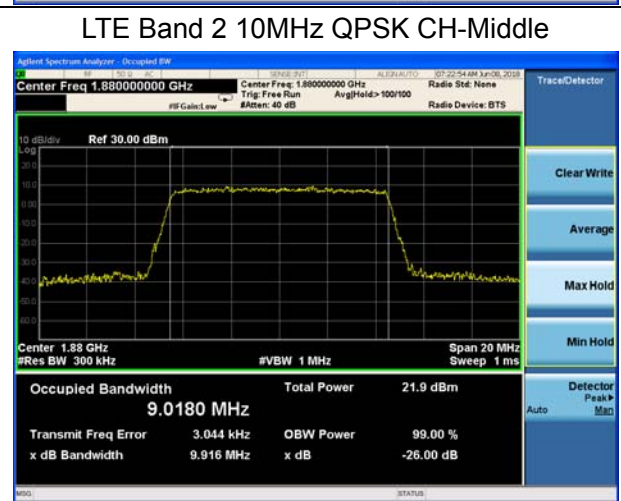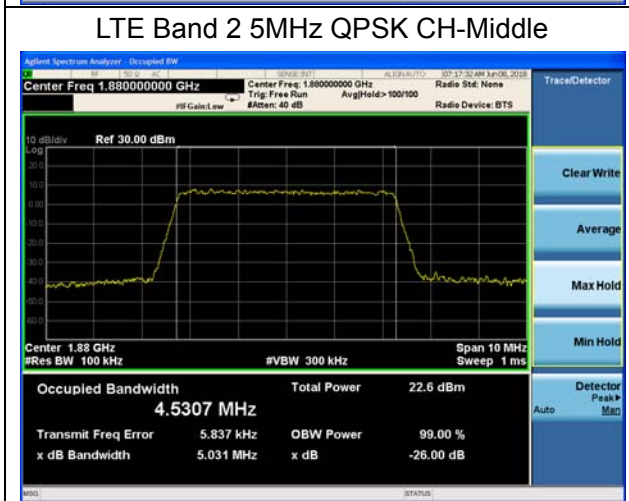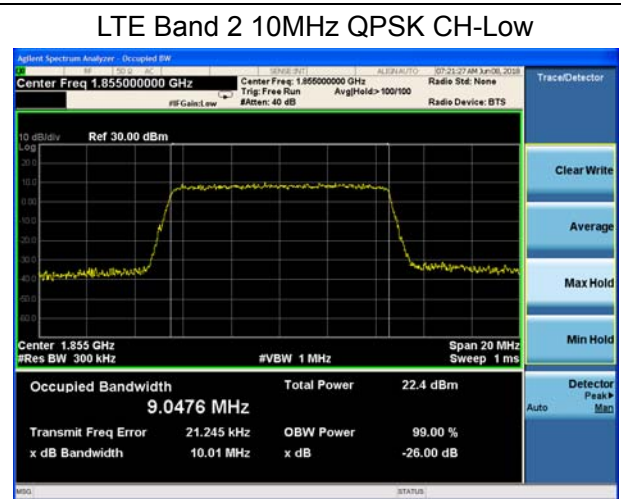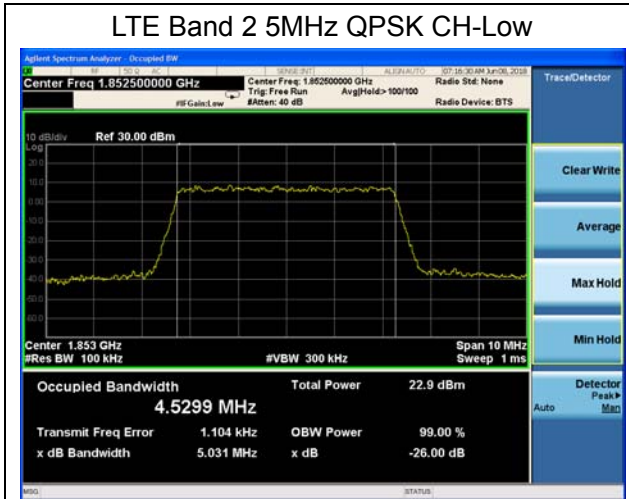

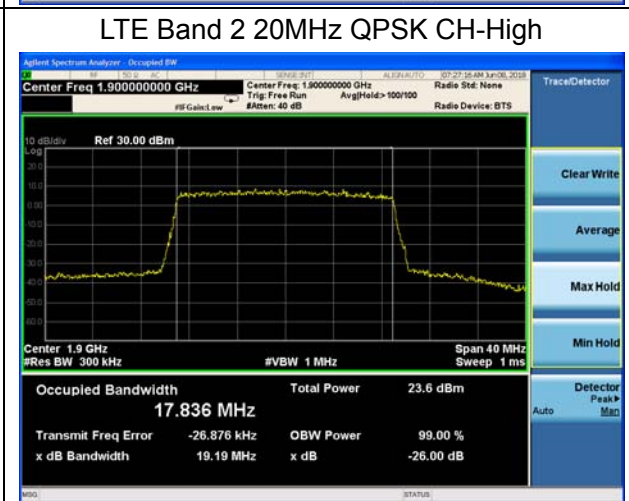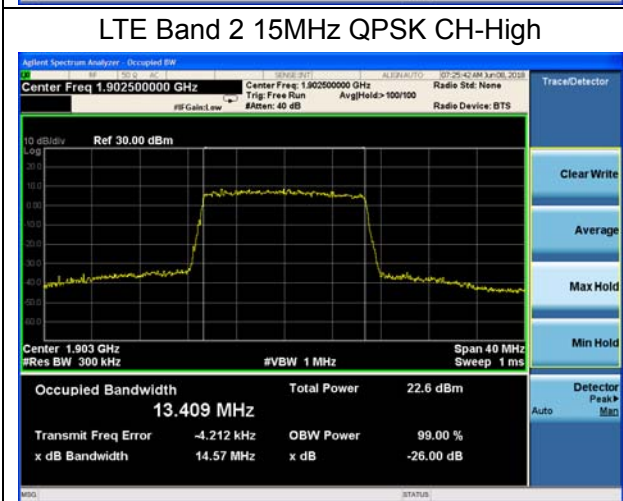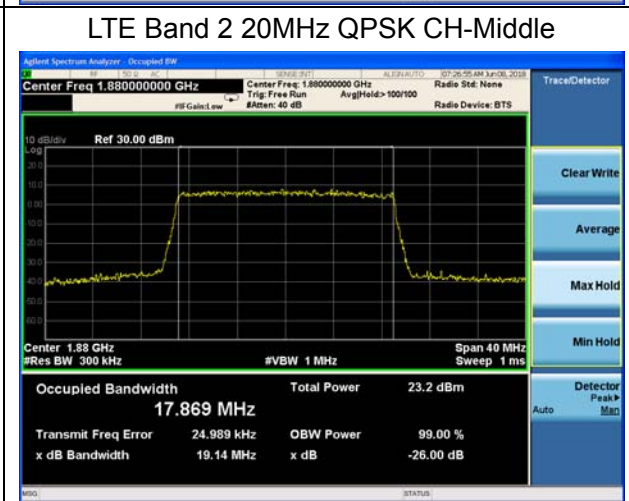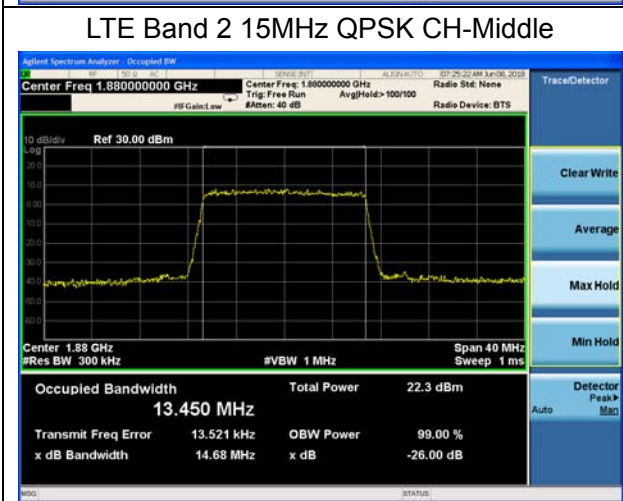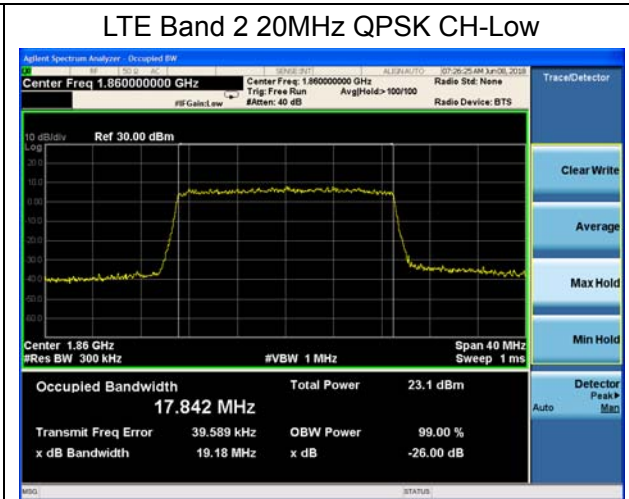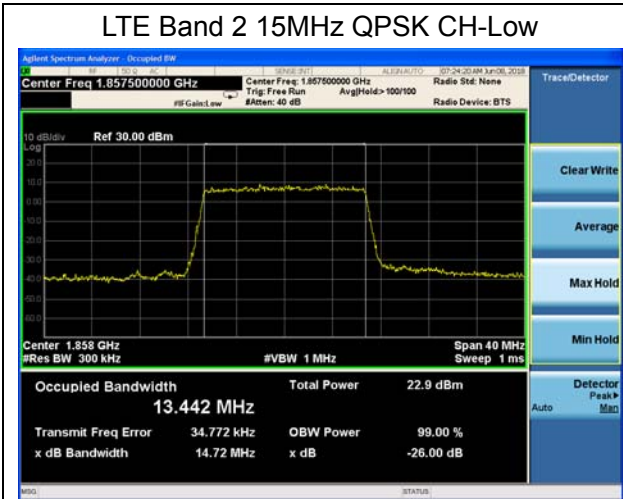

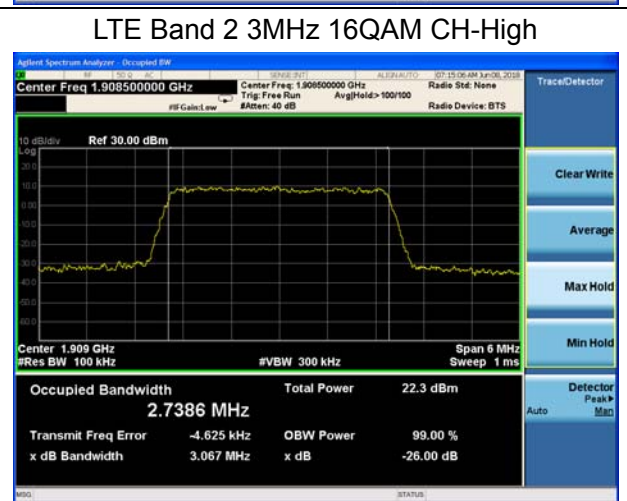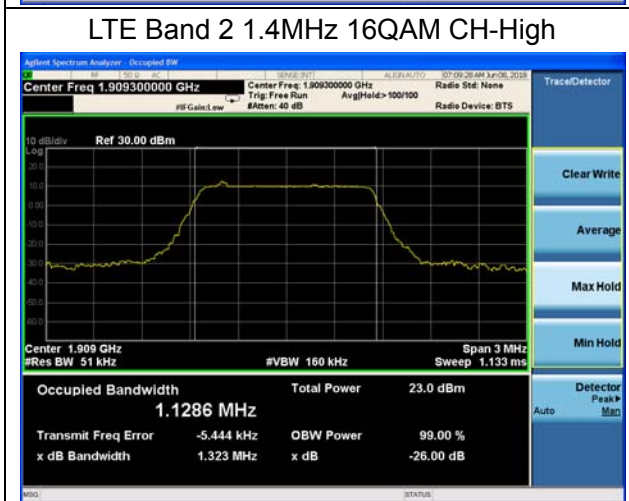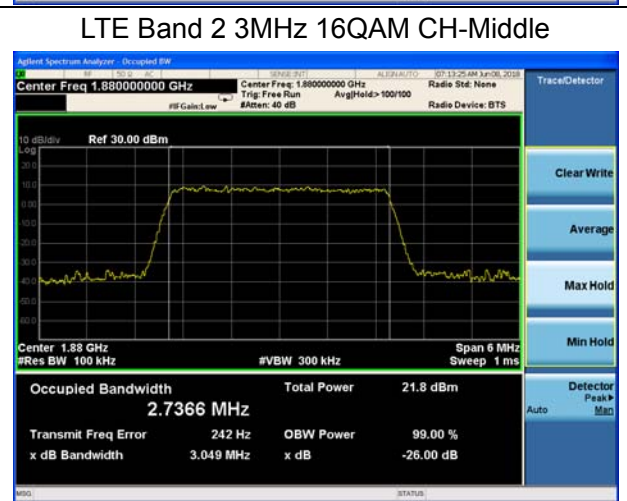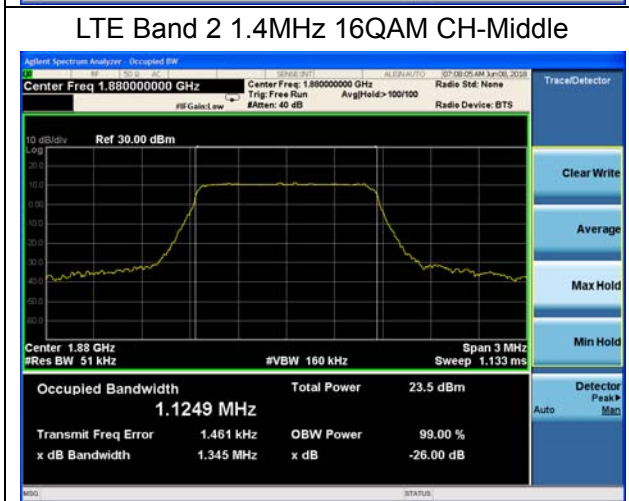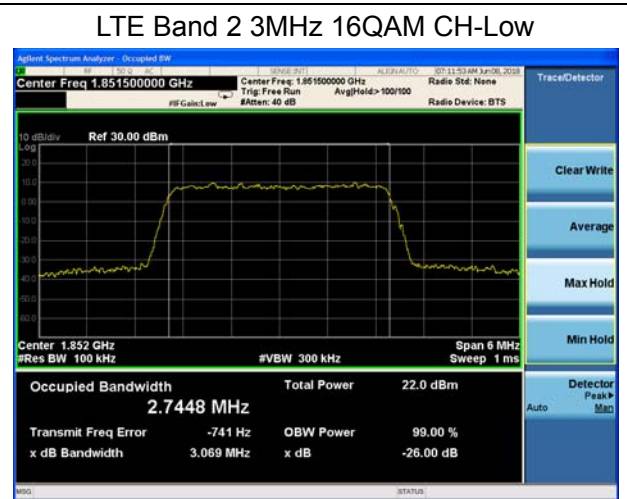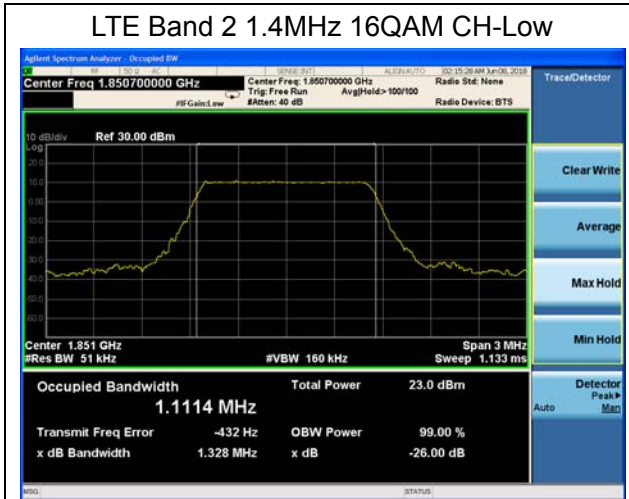

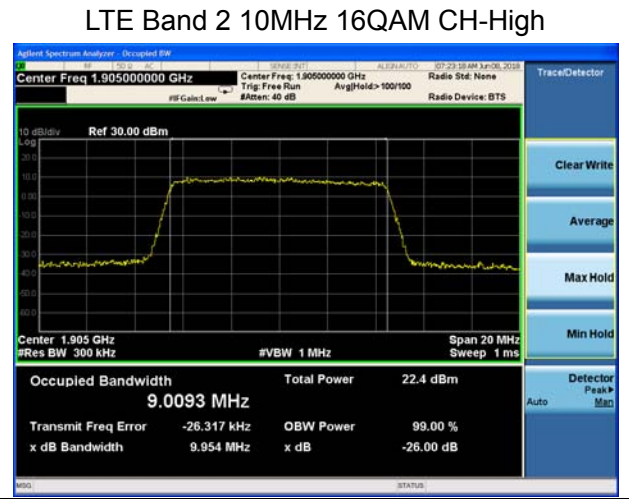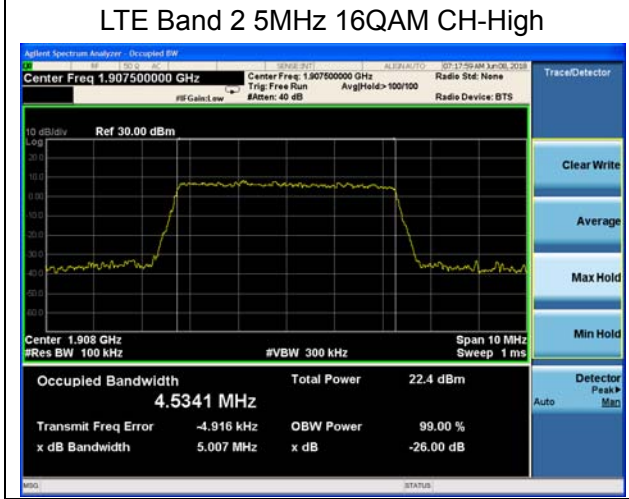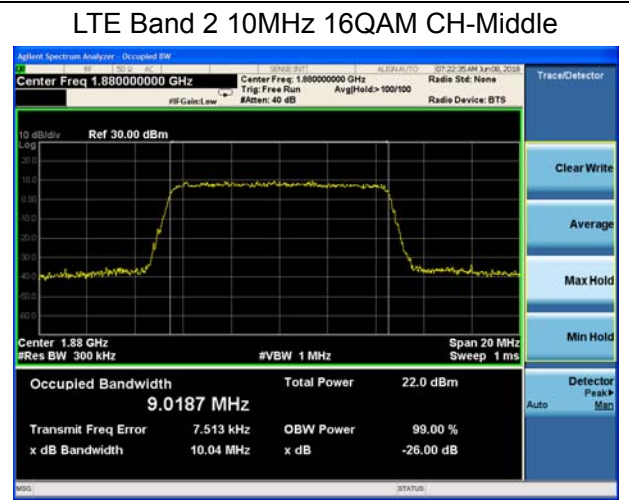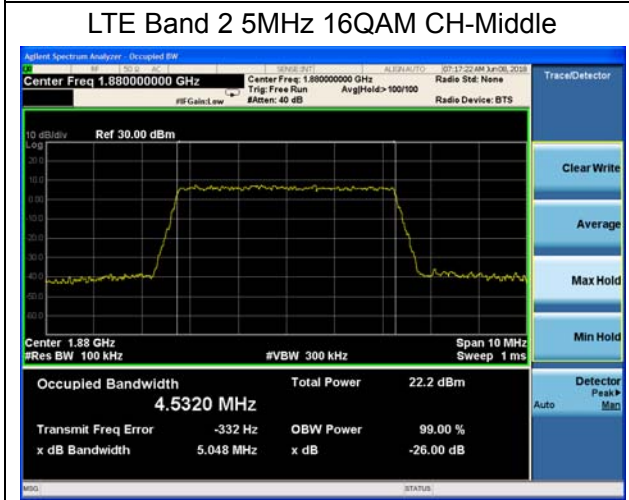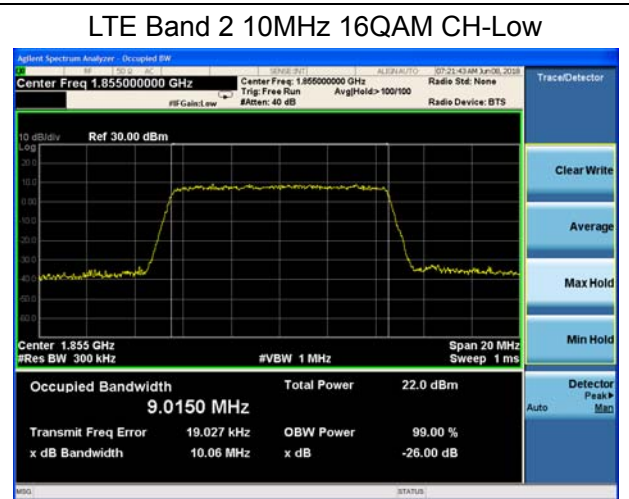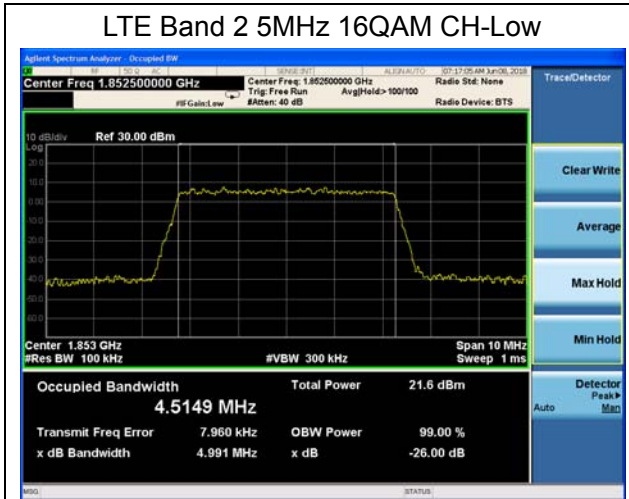

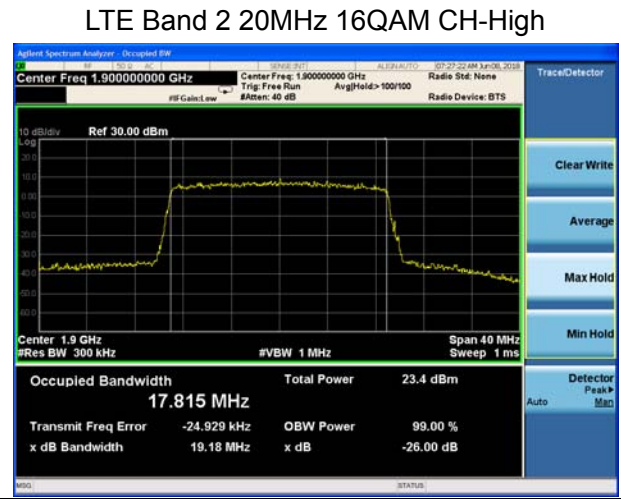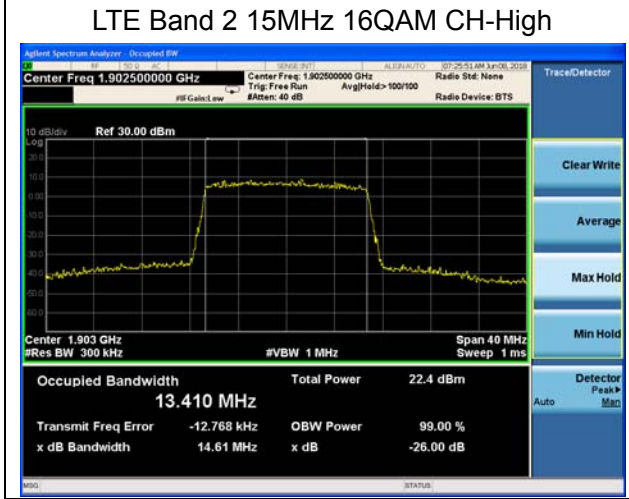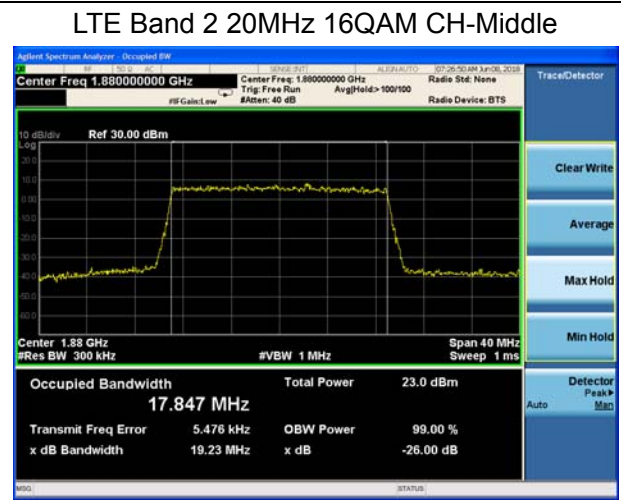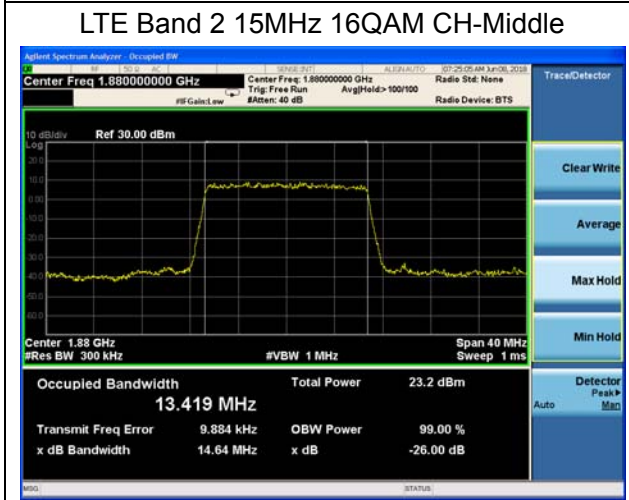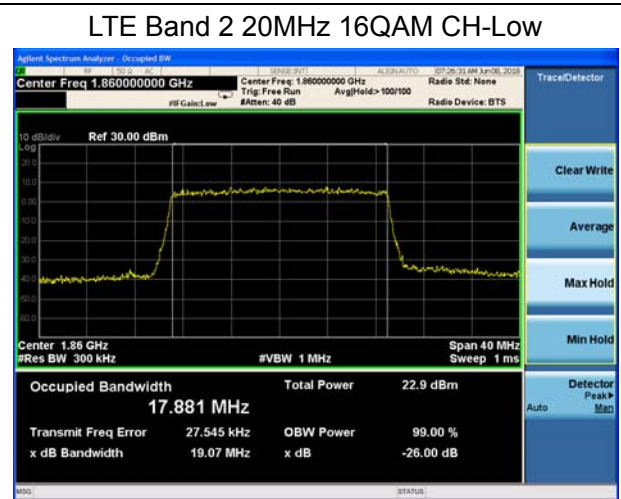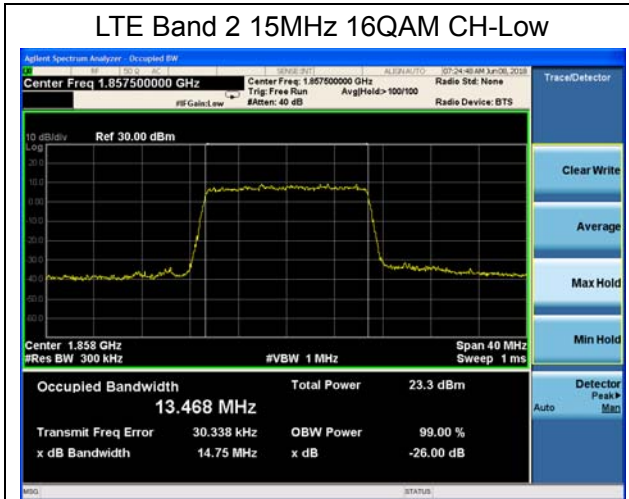

5.4. Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II, RBW is set to 15kHz, VBW is set to 51kHz for LTE Band 2(1.4MHz), RBW is set to 30kHz,VBW is set to 100kHz for LTE Band 2(3MHz), RBW is set to 51kHz,VBW is set to 160kHz for LTE Band 2(5MHz), RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 2(10MHz), RBW is set to 150kHz,VBW is set to 510kHz for LTE Band 2(15MHz), RBW is set to 200kHz,VBW is set to 620kHz for LTE Band 2(20MHz). Spectrum analyzer plots are included on the following pages.

Test Setup

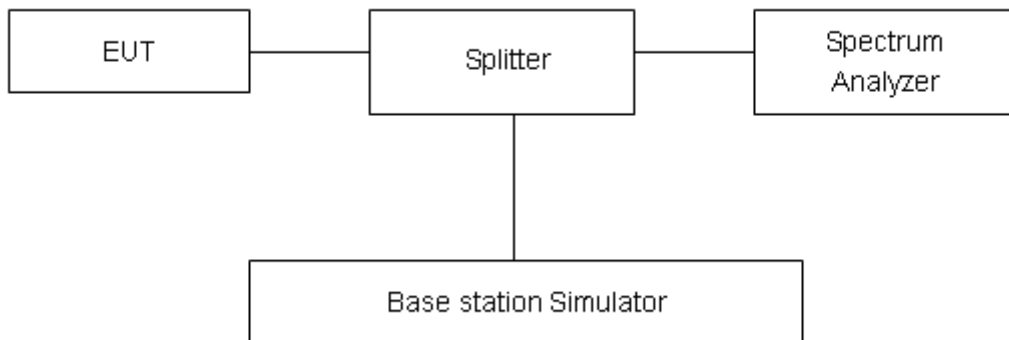

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log₁₀ (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

WCDMA Band II RMC CH-Low



WCDMA Band II RMC CH-High




LTE Band 2 1.4MHz QPSK 1RB CH-Low



LTE Band 2 1.4MHz QPSK 1RB CH-High




LTE Band 2 1.4MHz QPSK 100%RB CH-Low

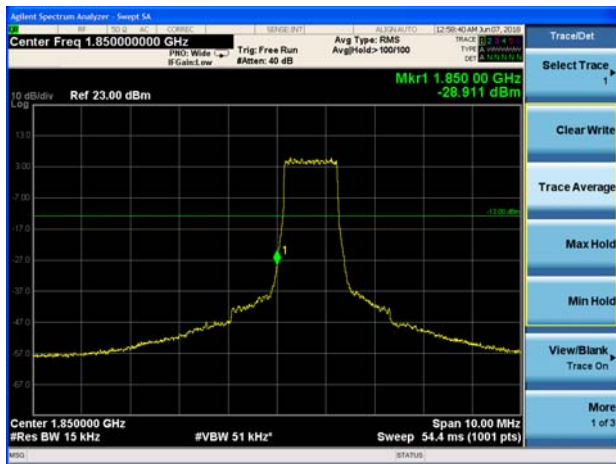


LTE Band 2 1.4MHz QPSK 100%RB CH-High



LTE Band 2 3MHz QPSK 1RB CH-Low

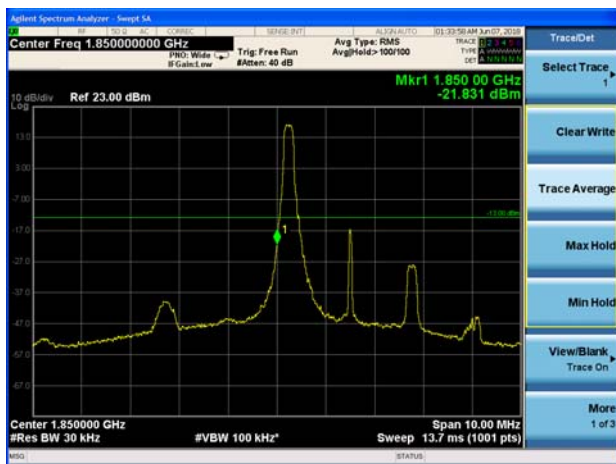


LTE Band 2 3MHz QPSK 1RB CH-High

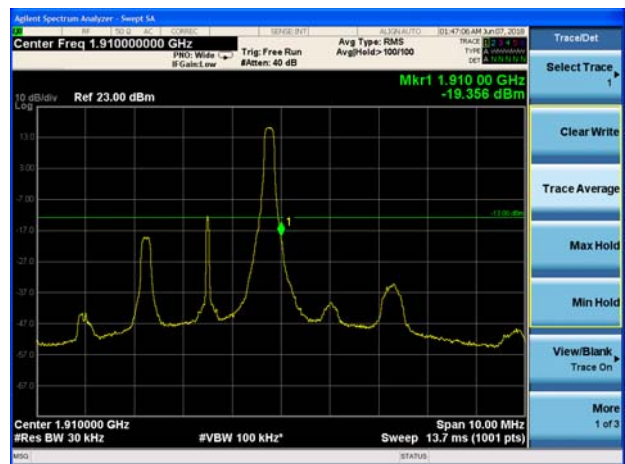




LTE Band 2 3MHz QPSK 100%RB CH-Low

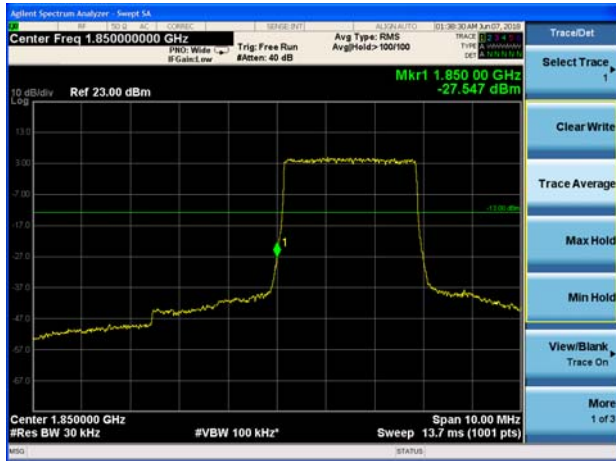


LTE Band 2 3MHz QPSK 100%RB CH-High




LTE Band 2 5MHz QPSK 1RB CH-Low

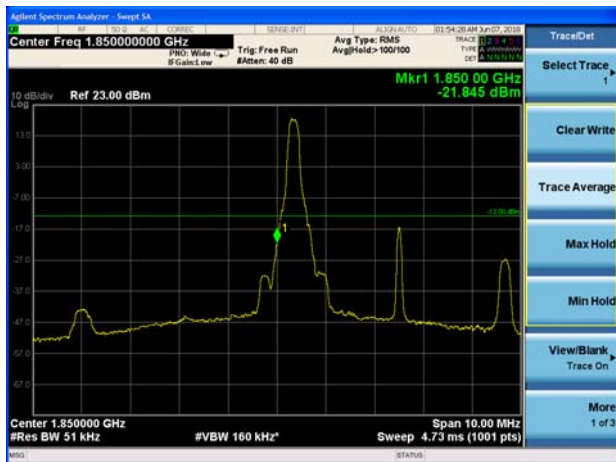

LTE Band 2 5MHz QPSK 1RB CH-High

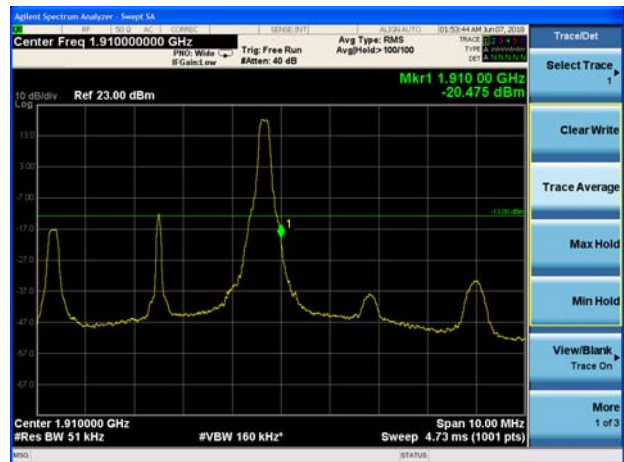


LTE Band 2 5MHz QPSK 100%RB CH-Low

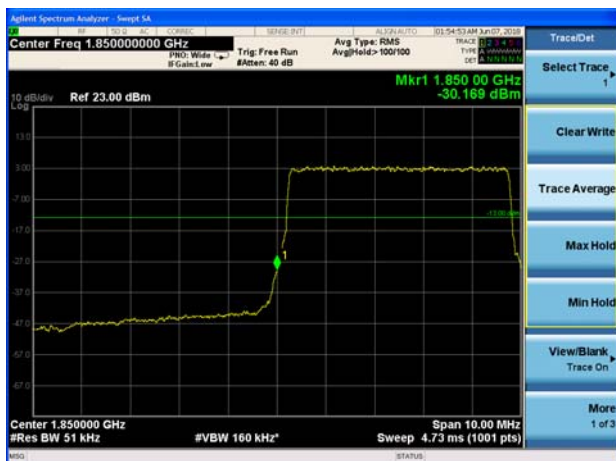


LTE Band 2 5MHz QPSK 100%RB CH-High




LTE Band 2 10MHz QPSK 1RB CH-Low

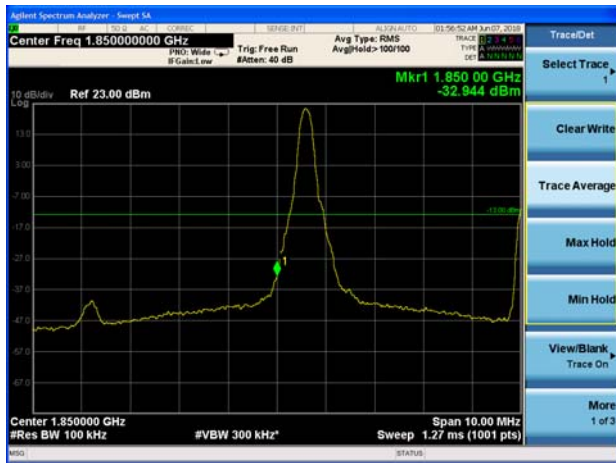


LTE Band 2 10MHz QPSK 1RB CH-High

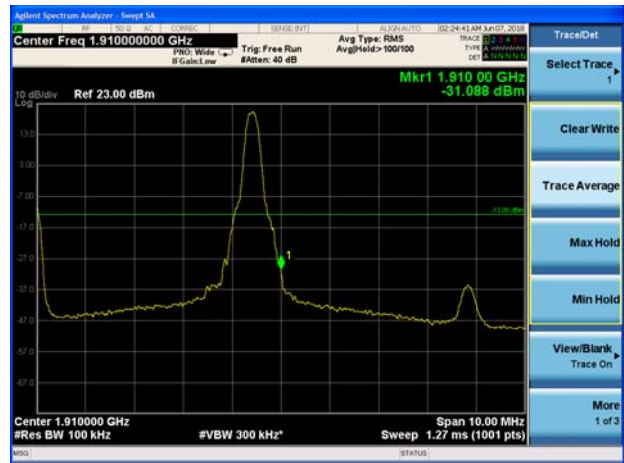


LTE Band 2 10MHz QPSK 100%RB CH-Low

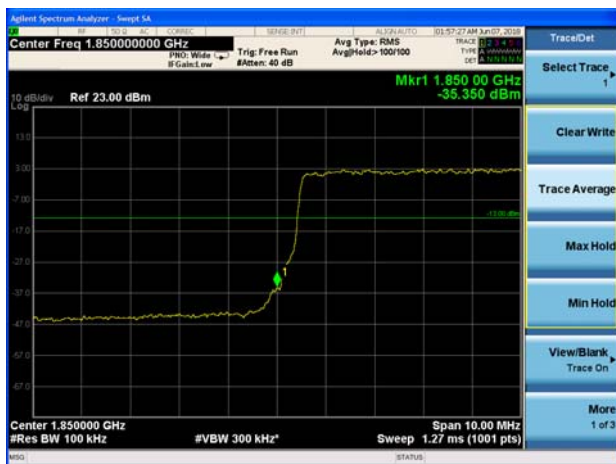


LTE Band 2 10MHz QPSK 100%RB CH-High

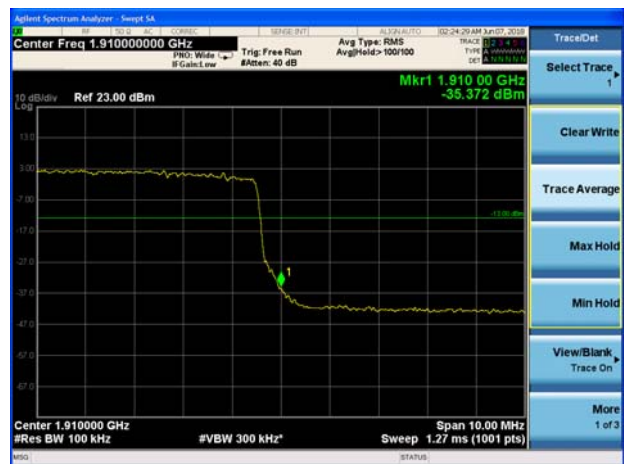

LTE Band 2 15MHz QPSK 1RB CH-Low

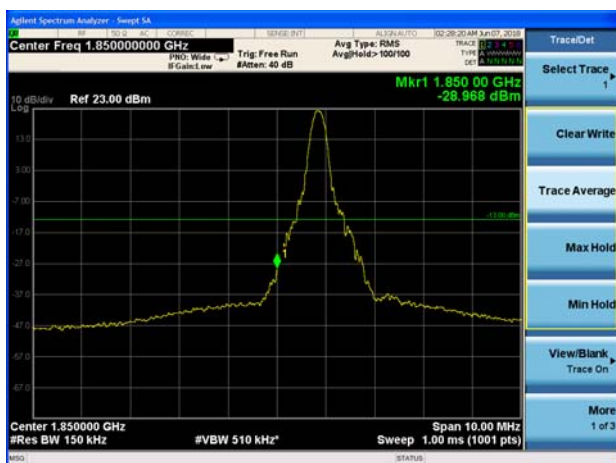

LTE Band 2 15MHz QPSK 1RB CH-High

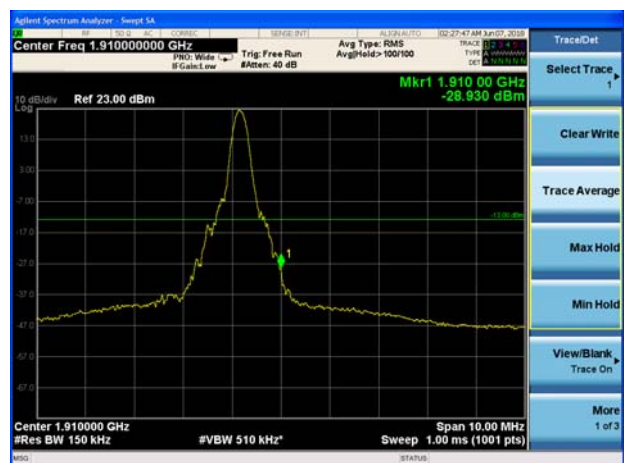




LTE Band 2 15MHz QPSK 100%RB CH-Low




LTE Band 2 15MHz QPSK 100%RB CH-High



LTE Band 2 20MHz QPSK 1RB CH-Low

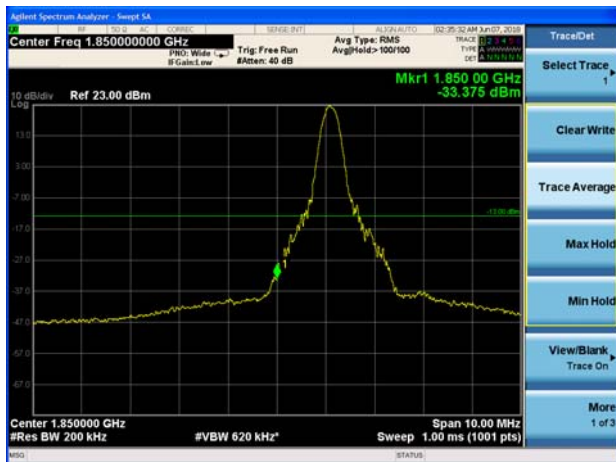

LTE Band 2 20MHz QPSK 1RB CH-High

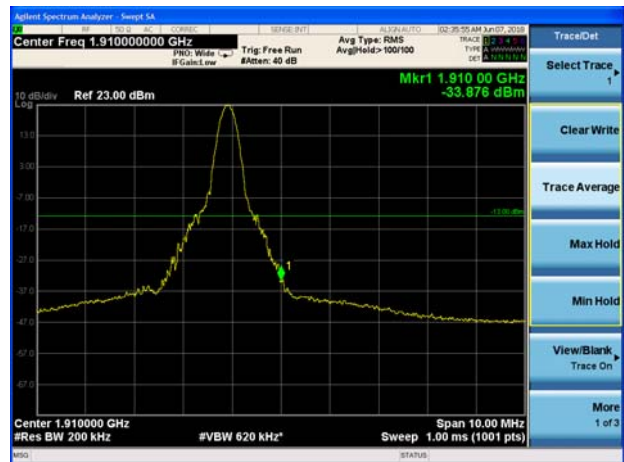

LTE Band 2 20MHz QPSK 100%RB CH-Low




LTE Band 2 20MHz QPSK 100%RB CH-High







LTE Band 2 1.4MHz 16QAM 1RB CH-Low

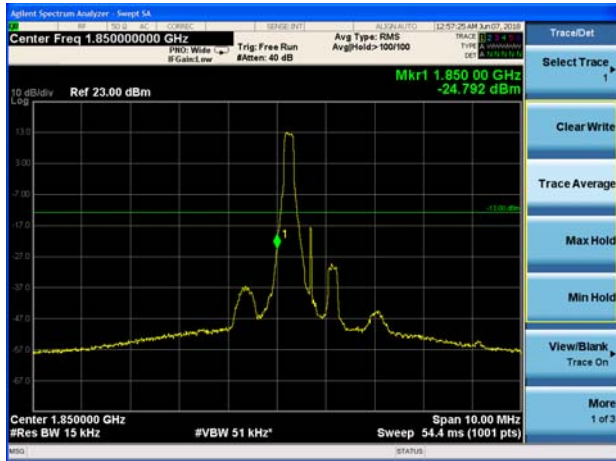


LTE Band 2 1.4MHz 16QAM 1RB CH-High

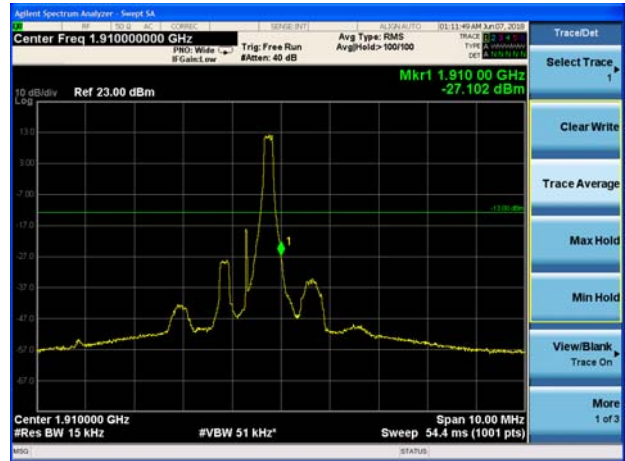


LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

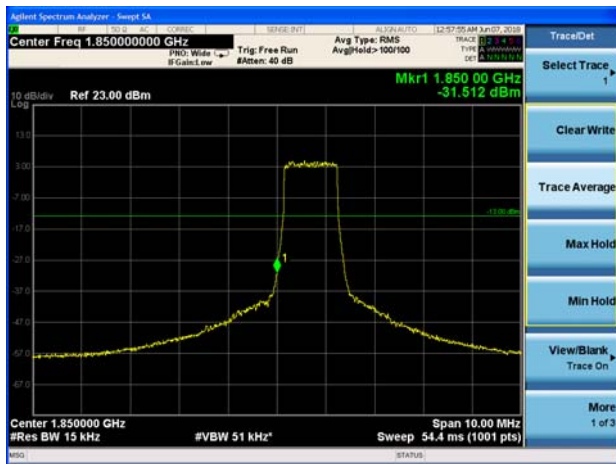


LTE Band 2 1.4MHz 16QAM 100%RB CH-High

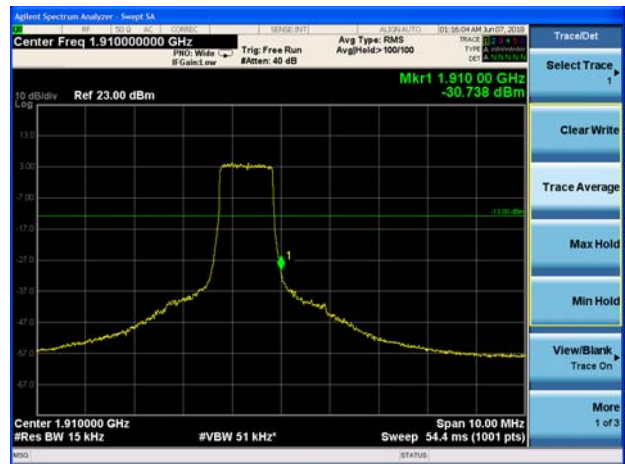

LTE Band 2 3MHz 16QAM 1RB CH-Low

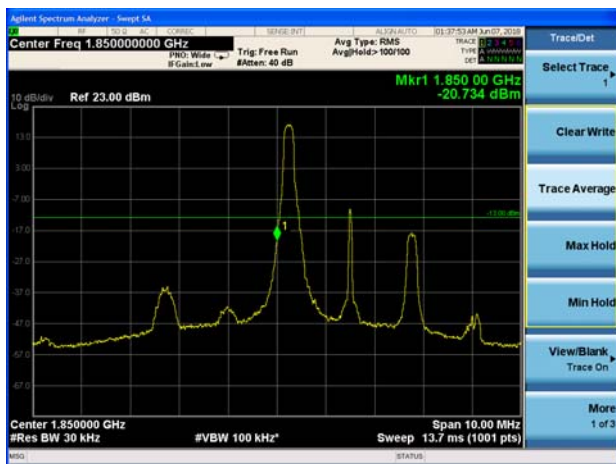


LTE Band 2 3MHz 16QAM 1RB CH-High

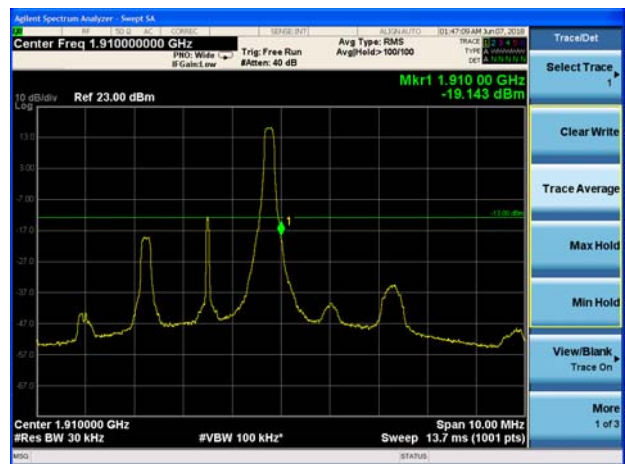




LTE Band 2 3MHz 16QAM 100%RB CH-Low

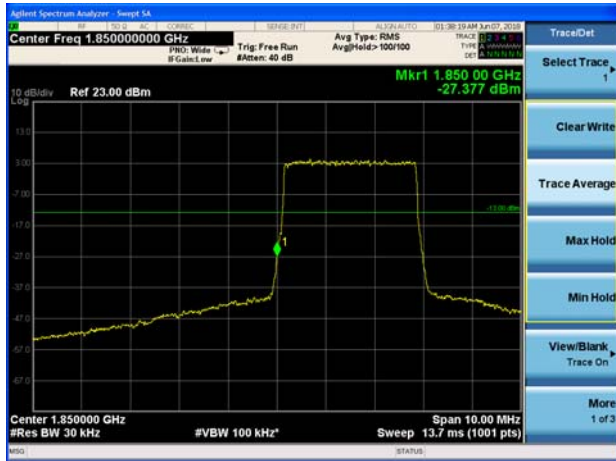


LTE Band 2 3MHz 16QAM 100%RB CH-High




LTE Band 2 5MHz 16QAM 1RB CH-Low

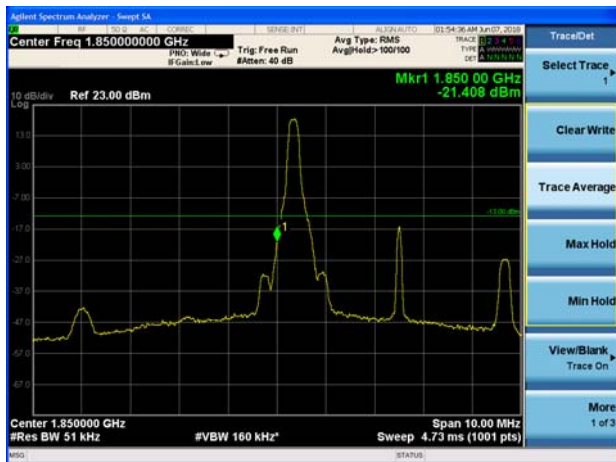

LTE Band 2 5MHz 16QAM 1RB CH-High

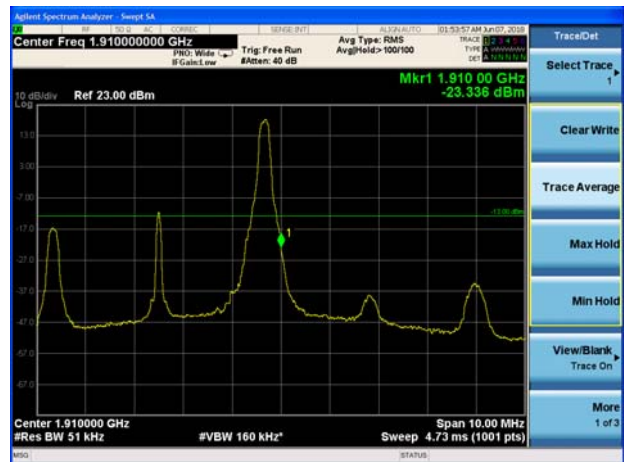

LTE Band 2 5MHz 16QAM 100%RB CH-Low

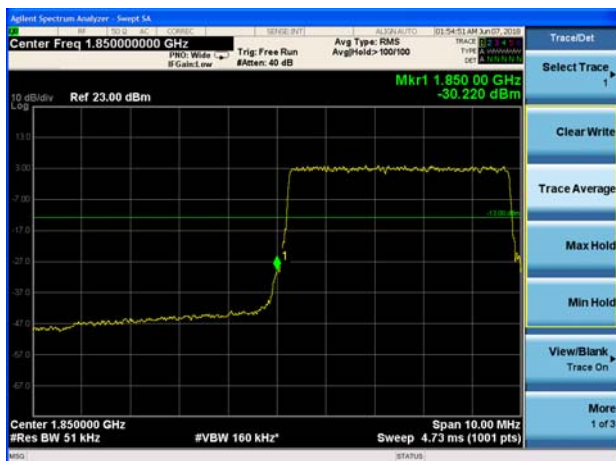


LTE Band 2 5MHz 16QAM 100%RB CH-High







LTE Band 2 10MHz 16QAM 1RB CH-Low

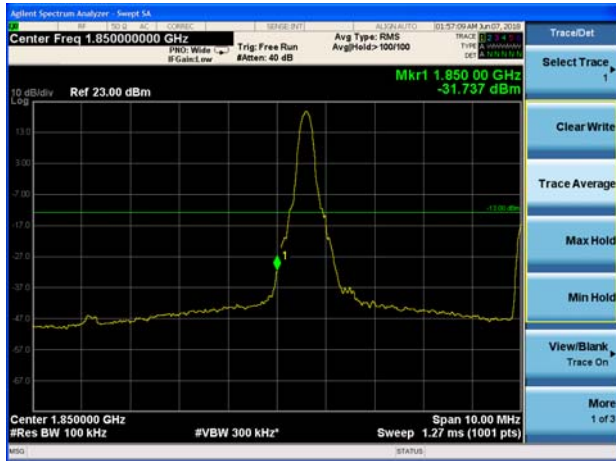


LTE Band 2 10MHz 16QAM 1RB CH-High

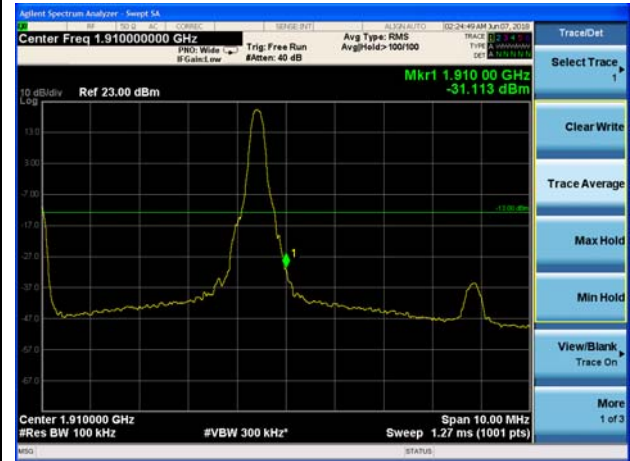


LTE Band 2 10MHz 16QAM 100%RB CH-Low

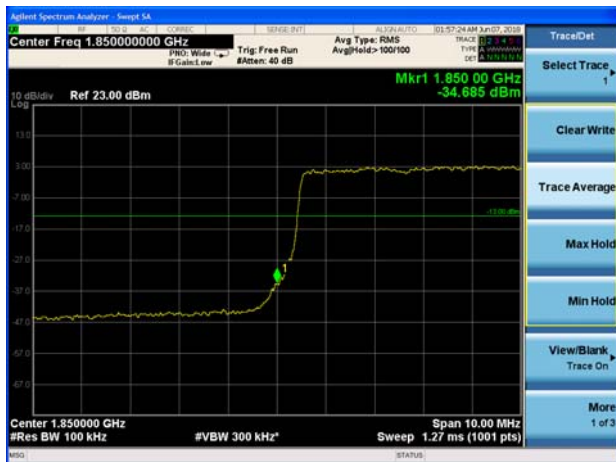


LTE Band 2 10MHz 16QAM 100%RB CH-High

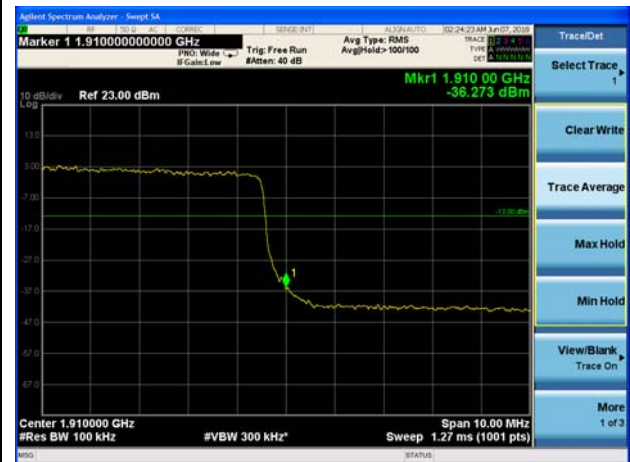

LTE Band 2 15MHz 16QAM 1RB CH-Low

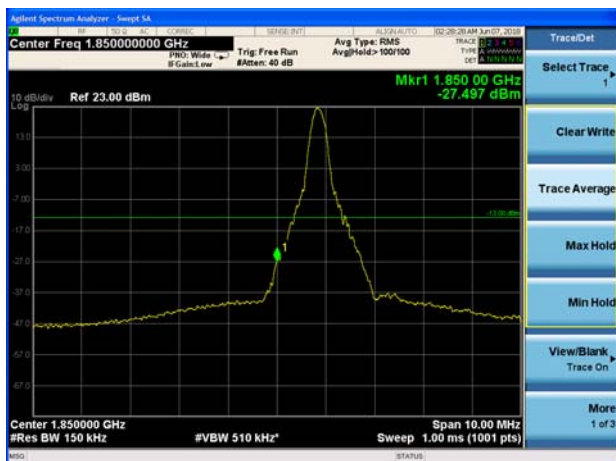

LTE Band 2 15MHz 16QAM 1RB CH-High

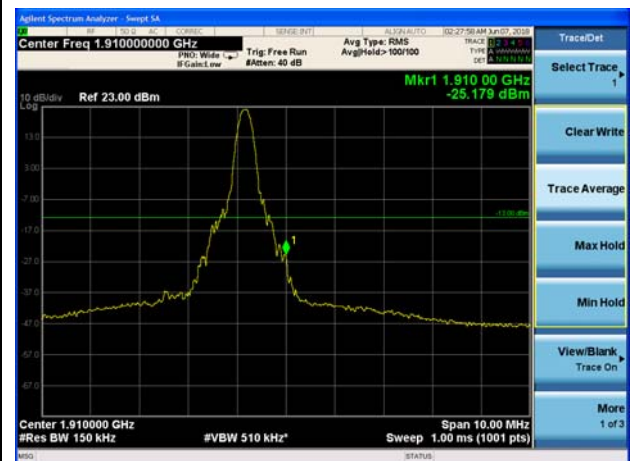




LTE Band 2 15MHz 16QAM 100%RB CH-Low




LTE Band 2 15MHz 16QAM 100%RB CH-High




LTE Band 2 20MHz 16QAM 1RB CH-Low

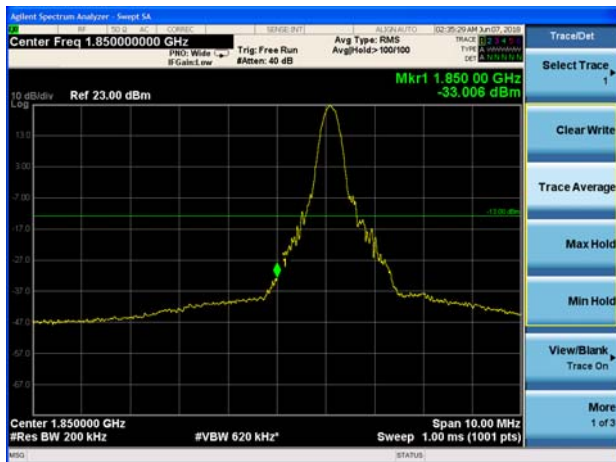

LTE Band 2 20MHz 16QAM 1RB CH-High

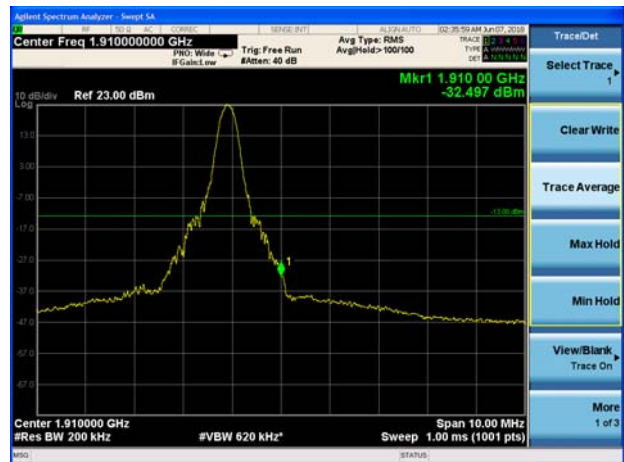

LTE Band 2 20MHz 16QAM 100%RB CH-Low

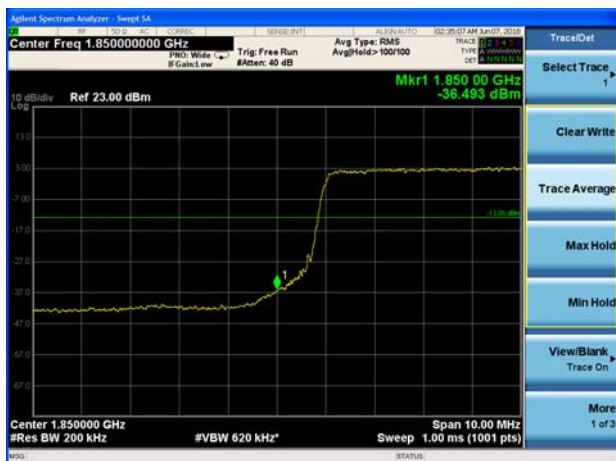

LTE Band 2 20MHz 16QAM 100%RB CH-High



5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

Test Setup

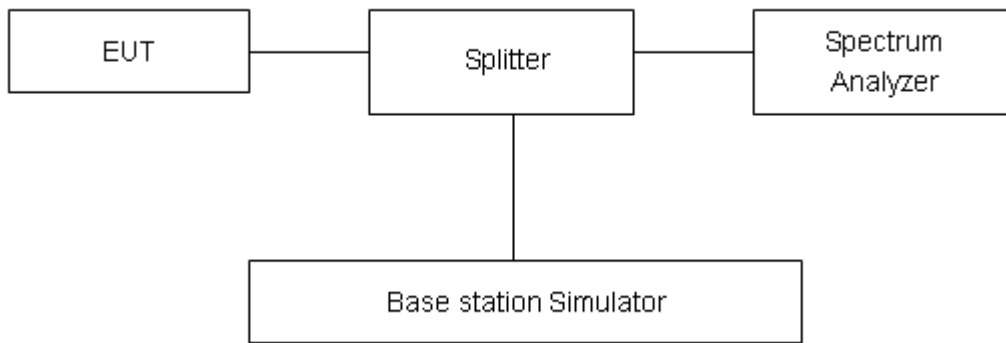

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
WCDMA Band II (RMC)	9262	1852.4	26.48	23.46	3.02	≤13	PASS
	9400	1880	26.37	23.35	3.02	≤13	PASS
	9538	1907.6	26.36	23.37	2.99	≤13	PASS

LTE Band 2									
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion	
QPSK	1.4	18607	1850.7	28.20	22.77	5.43	≤13	PASS	
		18900	1880.0	27.01	22.80	4.21	≤13	PASS	
		19193	1909.3	29.03	22.90	6.13	≤13	PASS	
	3	18615	1851.5	27.94	22.80	5.14	≤13	PASS	
		18900	1880	29.41	22.84	6.57	≤13	PASS	
		19185	1908.5	26.21	22.93	3.28	≤13	PASS	
	5	18625	1852.5	27.69	22.78	4.91	≤13	PASS	
		18900	1880	28.52	22.83	5.69	≤13	PASS	
		19175	1907.5	28.24	22.91	5.33	≤13	PASS	
	10	18650	1855	28.72	22.86	5.86	≤13	PASS	
		18900	1880	29.32	22.85	6.47	≤13	PASS	
		19150	1905	29.14	22.95	6.19	≤13	PASS	
	15	18675	1857.5	28.08	22.84	5.24	≤13	PASS	
		18900	1880	29.12	22.81	6.31	≤13	PASS	
		19125	1902.5	29.14	22.90	6.24	≤13	PASS	
	20	18700	1860	28.42	22.81	5.61	≤13	PASS	
		18900	1880	27.83	22.76	5.07	≤13	PASS	
		19100	1900	28.94	22.86	6.08	≤13	PASS	
	16QAM	1.4	18607	1850.7	28.39	21.87	6.52	≤13	PASS
			18900	1880.0	26.88	21.88	5.00	≤13	PASS
			19193	1909.3	27.95	21.77	6.18	≤13	PASS
		3	18615	1851.5	27.30	21.90	5.40	≤13	PASS
			18900	1880	28.04	21.92	6.12	≤13	PASS
			19185	1908.5	27.23	21.80	5.43	≤13	PASS
5		18625	1852.5	27.89	21.88	6.01	≤13	PASS	
		18900	1880	27.68	21.88	5.80	≤13	PASS	
		19175	1907.5	26.79	21.75	5.04	≤13	PASS	
10		18650	1855	28.28	21.91	6.37	≤13	PASS	
		18900	1880	28.63	21.93	6.70	≤13	PASS	
		19150	1905	26.88	21.79	5.09	≤13	PASS	
15		18675	1857.5	28.72	21.88	6.84	≤13	PASS	



		18900	1880	27.82	21.88	5.94	≤13	PASS
		19125	1902.5	28.18	21.75	6.43	≤13	PASS
	20	18700	1860	26.93	21.86	5.07	≤13	PASS
		18900	1880	27.93	21.84	6.09	≤13	PASS
		19100	1900	27.12	21.72	5.40	≤13	PASS

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

Test setup

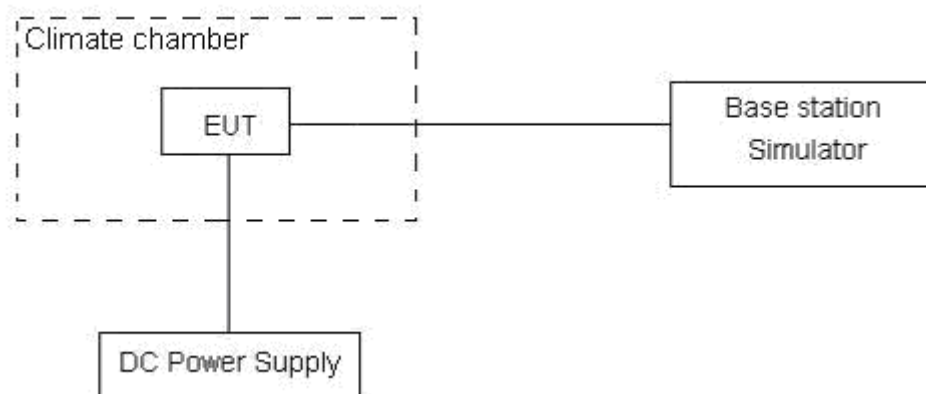



Limits

No specific frequency stability requirements in part 24.235

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

WCDMA Band II						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal (25°C)	Normal	13.59	16.18	0.00723	0.00861	PASS
Extreme (85°C)		14.34	11.98	0.00763	0.00637	PASS
Extreme (80°C)		1.53	15.54	0.00081	0.00827	PASS
Extreme (70°C)		11.98	15.02	0.00637	0.00799	PASS
Extreme (60°C)		12.84	7.25	0.00683	0.00385	PASS
Extreme (50°C)		13.48	11.11	0.00717	0.00591	PASS
Extreme (40°C)		2.98	8.64	0.00159	0.00459	PASS
Extreme (30°C)		4.09	6.63	0.00217	0.00353	PASS
Extreme (20°C)		7.12	4.96	0.00379	0.00264	PASS
Extreme (10°C)		4.19	1.82	0.00223	0.00097	PASS
Extreme (0°C)		1.40	15.60	0.00075	0.00830	PASS
Extreme (-10°C)		9.46	14.74	0.00503	0.00784	PASS
Extreme (-20°C)		13.25	8.71	0.00705	0.00463	PASS
Extreme (-30°C)		12.64	16.60	0.00672	0.00883	PASS
Extreme (-40°C)		7.34	13.90	0.00390	0.00739	PASS
25°C	LV	6.86	14.24	0.00365	0.00757	PASS
	HV	2.61	1.82	0.00139	0.00097	PASS

LTE Band 2						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	4.26	3.39	0.00227	0.00180	PASS
Extreme (85°C)		4.63	13.74	0.00246	0.00731	PASS
Extreme (80°C)		1.82	3.05	0.00097	0.00162	PASS
Extreme (70°C)		15.31	7.20	0.00814	0.00383	PASS
Extreme (60°C)		4.98	14.38	0.00265	0.00765	PASS
Extreme (50°C)		9.17	14.79	0.00488	0.00787	PASS
Extreme (40°C)		9.02	11.43	0.00480	0.00608	PASS
Extreme (30°C)		1.97	4.11	0.00105	0.00219	PASS
Extreme (20°C)		10.01	10.35	0.00533	0.00550	PASS
Extreme (10°C)		2.50	6.89	0.00133	0.00366	PASS
Extreme (0°C)		13.09	4.74	0.00696	0.00252	PASS



Extreme (-10°C)		4.68	6.81	0.00249	0.00362	PASS
Extreme (-20°C)		9.20	2.26	0.00489	0.00120	PASS
Extreme (-30°C)		17.12	16.18	0.00911	0.00861	PASS
Extreme (-40°C)		8.10	4.04	0.00431	0.00215	PASS
25°C	LV	1.39	13.52	0.00074	0.00719	PASS
	HV	7.23	1.12	0.00385	0.00060	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	4.31	1.99	0.00229	0.00106	PASS
Extreme (85°C)		2.03	2.01	0.00108	0.00107	PASS
Extreme (80°C)		9.85	11.91	0.00524	0.00634	PASS
Extreme (70°C)		2.72	9.54	0.00145	0.00507	PASS
Extreme (60°C)		3.85	1.79	0.00205	0.00095	PASS
Extreme (50°C)		16.80	1.31	0.00893	0.00070	PASS
Extreme (40°C)		12.75	10.35	0.00678	0.00551	PASS
Extreme (30°C)		17.05	12.37	0.00907	0.00658	PASS
Extreme (20°C)		17.61	5.63	0.00937	0.00299	PASS
Extreme (10°C)		8.65	17.73	0.00460	0.00943	PASS
Extreme (0°C)		6.20	9.71	0.00330	0.00516	PASS
Extreme (-10°C)		5.59	3.08	0.00297	0.00164	PASS
Extreme (-20°C)		8.95	7.56	0.00476	0.00402	PASS
Extreme (-30°C)		15.23	16.84	0.00810	0.00896	PASS
Extreme (-40°C)		5.52	9.22	0.00293	0.00490	PASS
25°C	LV	15.95	10.74	0.00848	0.00571	PASS
	HV	4.67	1.86	0.00248	0.00099	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	14.46	15.48	0.00769	0.00823	PASS
Extreme (85°C)		1.30	5.72	0.00069	0.00304	PASS
Extreme (80°C)		8.24	10.81	0.00439	0.00575	PASS
Extreme (70°C)		10.83	5.41	0.00576	0.00288	PASS
Extreme (60°C)		15.09	6.68	0.00803	0.00355	PASS
Extreme (50°C)		1.21	6.41	0.00064	0.00341	PASS
Extreme (40°C)		13.07	14.28	0.00695	0.00759	PASS
Extreme (30°C)		9.51	1.87	0.00506	0.00099	PASS
Extreme (20°C)		4.67	5.15	0.00249	0.00274	PASS
Extreme (10°C)		15.68	16.77	0.00834	0.00892	PASS
Extreme (0°C)		15.47	2.13	0.00823	0.00113	PASS



Extreme (-10°C)		14.53	4.88	0.00773	0.00260	PASS
Extreme (-20°C)		17.71	15.53	0.00942	0.00826	PASS
Extreme (-30°C)		8.37	3.63	0.00445	0.00193	PASS
Extreme (-40°C)		15.51	6.90	0.00825	0.00367	PASS
25°C	LV	15.74	12.93	0.00837	0.00688	PASS
	HV	12.17	17.29	0.00647	0.00920	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	10.38	1.63	0.00552	0.00086	PASS
Extreme (85°C)		9.75	1.09	0.00519	0.00058	PASS
Extreme (80°C)		5.45	17.63	0.00290	0.00938	PASS
Extreme (70°C)		15.68	14.08	0.00834	0.00749	PASS
Extreme (60°C)		8.18	15.04	0.00435	0.00800	PASS
Extreme (50°C)		2.63	6.72	0.00140	0.00357	PASS
Extreme (40°C)		13.18	14.36	0.00701	0.00764	PASS
Extreme (30°C)		15.03	17.30	0.00799	0.00920	PASS
Extreme (20°C)		8.98	14.79	0.00478	0.00787	PASS
Extreme (10°C)		15.79	15.00	0.00840	0.00798	PASS
Extreme (0°C)		8.79	4.36	0.00468	0.00232	PASS
Extreme (-10°C)		8.57	11.28	0.00456	0.00600	PASS
Extreme (-20°C)		16.00	15.46	0.00851	0.00823	PASS
Extreme (-30°C)		8.21	15.92	0.00437	0.00847	PASS
Extreme (-40°C)		17.47	16.25	0.00929	0.00864	PASS
25°C		LV	11.94	2.79	0.00635	0.00149
	HV	9.41	6.20	0.00501	0.00330	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	4.28	4.48	0.00227	0.00238	PASS
Extreme (85°C)		10.84	7.22	0.00577	0.00384	PASS
Extreme (80°C)		6.40	8.55	0.00340	0.00455	PASS
Extreme (70°C)		12.15	2.71	0.00646	0.00144	PASS
Extreme (60°C)		15.70	5.00	0.00835	0.00266	PASS
Extreme (50°C)		15.09	3.70	0.00803	0.00197	PASS
Extreme (40°C)		2.75	10.58	0.00147	0.00563	PASS
Extreme (30°C)		7.58	12.16	0.00403	0.00647	PASS
Extreme (20°C)		8.95	3.61	0.00476	0.00192	PASS
Extreme (10°C)		14.99	14.81	0.00797	0.00788	PASS
Extreme (0°C)		13.63	1.74	0.00725	0.00092	PASS



Extreme (-10°C)		7.34	10.45	0.00391	0.00556	PASS
Extreme (-20°C)		8.20	15.90	0.00436	0.00846	PASS
Extreme (-30°C)		4.19	10.41	0.00223	0.00554	PASS
Extreme (-40°C)		14.03	2.69	0.00746	0.00143	PASS
25°C	LV	7.18	7.00	0.00382	0.00372	PASS
	HV	3.25	7.93	0.00173	0.00422	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	9.68	4.42	0.00515	0.00235	PASS
Extreme (85°C)		15.22	12.99	0.00810	0.00691	PASS
Extreme (80°C)		9.65	9.06	0.00514	0.00482	PASS
Extreme (70°C)		7.27	4.98	0.00386	0.00265	PASS
Extreme (60°C)		14.21	17.88	0.00756	0.00951	PASS
Extreme (50°C)		5.44	10.53	0.00290	0.00560	PASS
Extreme (40°C)		14.16	13.20	0.00753	0.00702	PASS
Extreme (30°C)		4.98	5.45	0.00265	0.00290	PASS
Extreme (20°C)		8.99	7.29	0.00478	0.00388	PASS
Extreme (10°C)		2.25	7.52	0.00120	0.00400	PASS
Extreme (0°C)		13.08	4.54	0.00696	0.00242	PASS
Extreme (-10°C)		4.77	5.86	0.00254	0.00312	PASS
Extreme (-20°C)		5.18	11.41	0.00276	0.00607	PASS
Extreme (-30°C)		1.35	13.87	0.00072	0.00738	PASS
Extreme (-40°C)	14.21	4.87	0.00756	0.00259	PASS	
25°C	LV	3.44	10.01	0.00183	0.00533	PASS
	HV	13.95	1.53	0.00742	0.00081	PASS

5.7.Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

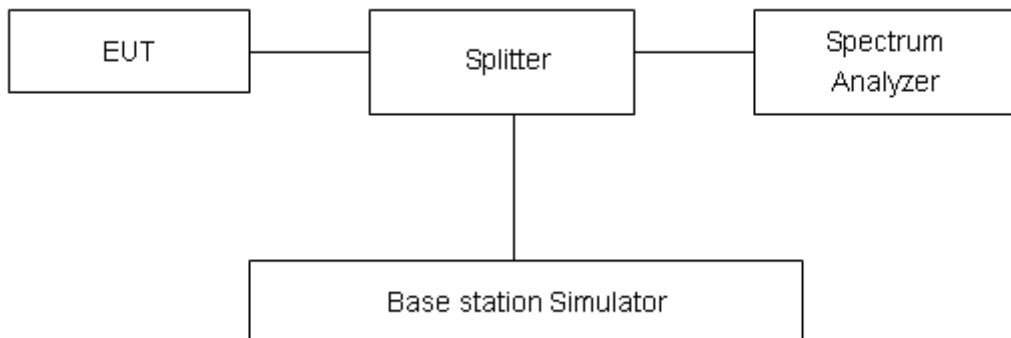

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log₁₀ (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

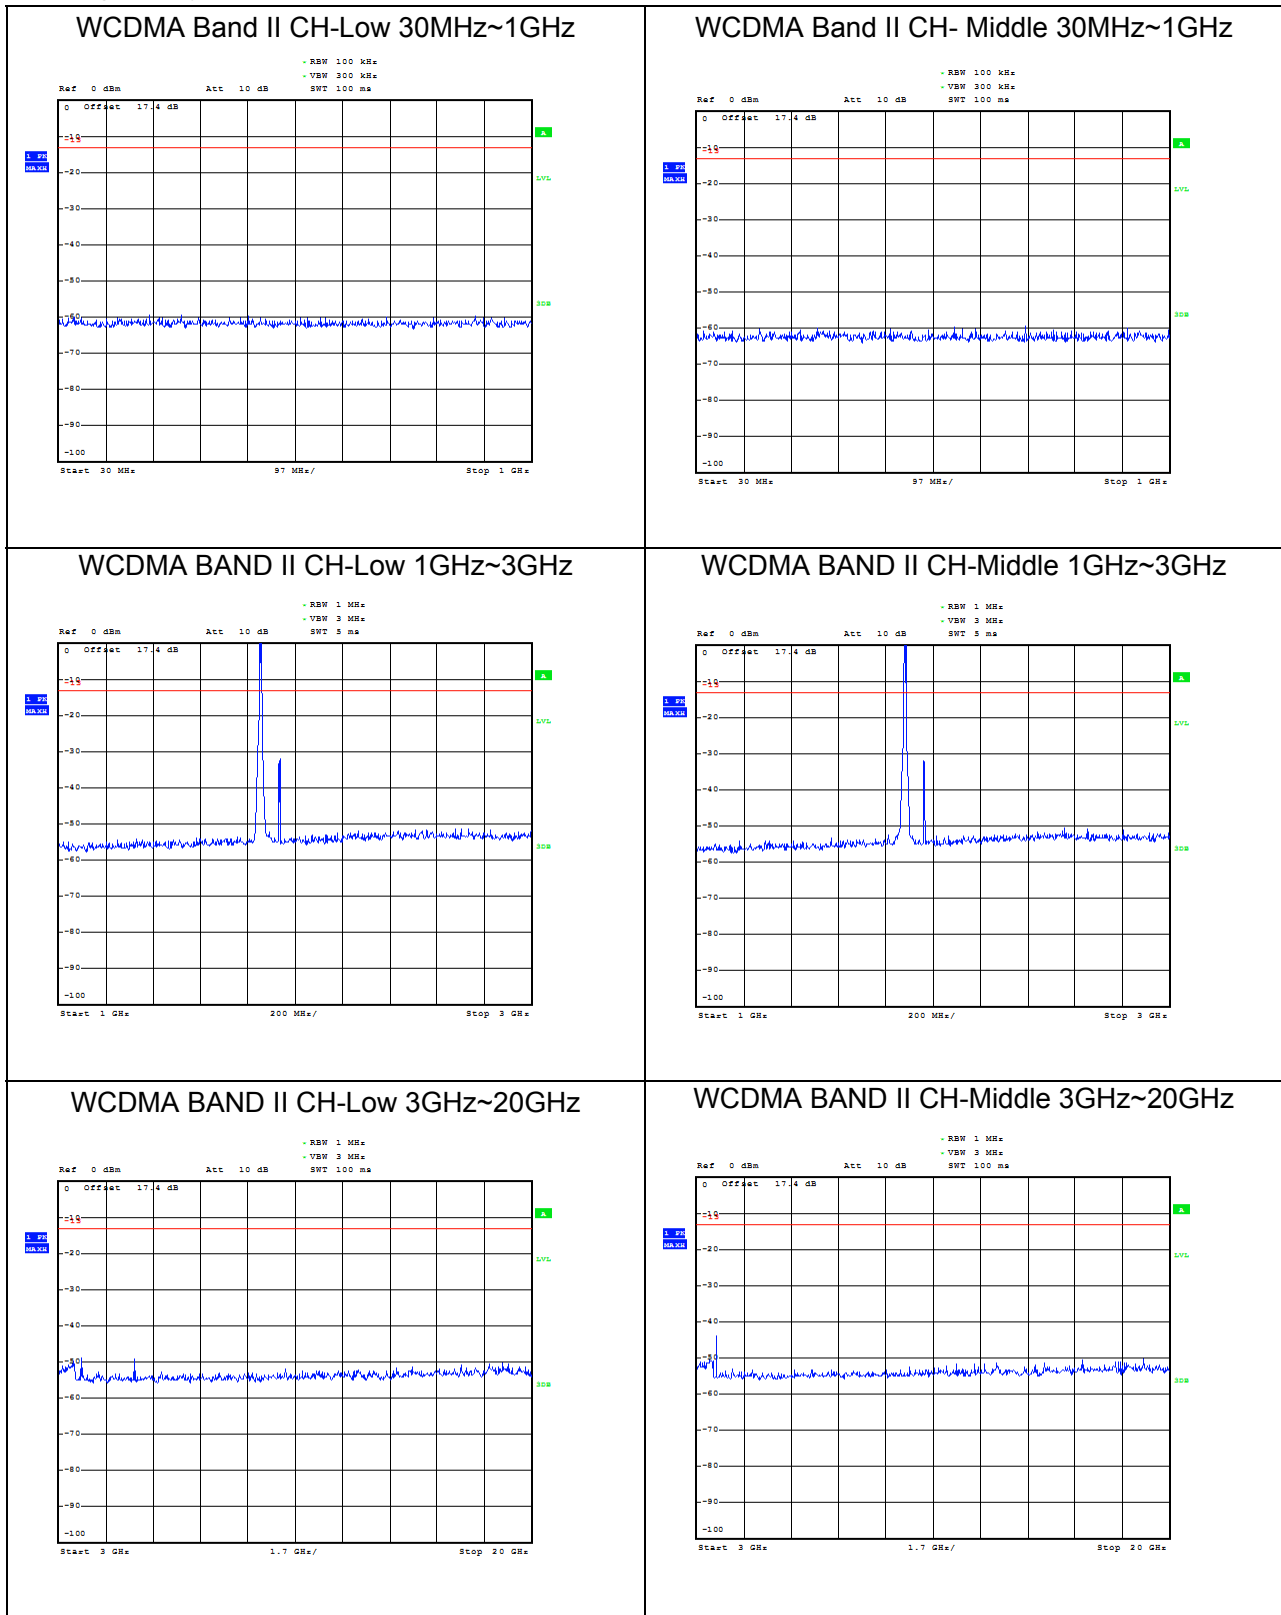





WCDMA Band II CH- High 30MHz~1GHz

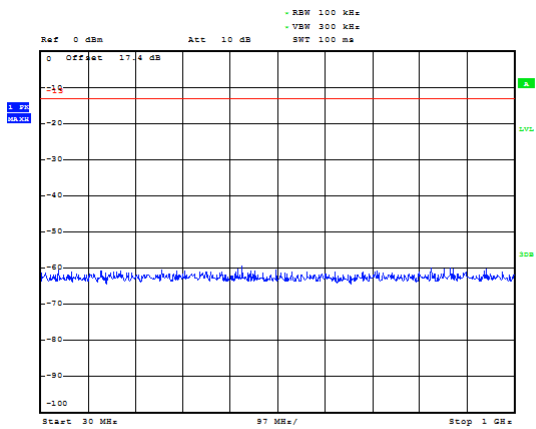

WCDMA BAND II CH-High 1GHz~3GHz

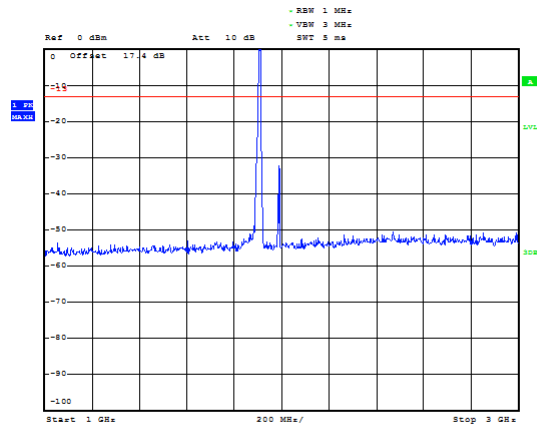


WCDMA BAND II CH-High 3GHz~20GHz

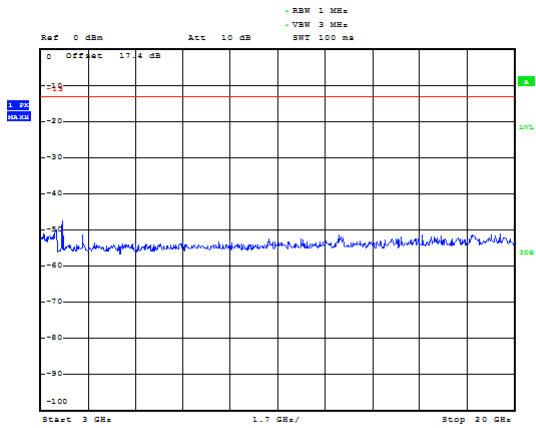





LTE Band 2 1.4MHz CH-Low 30MHz~1GHz

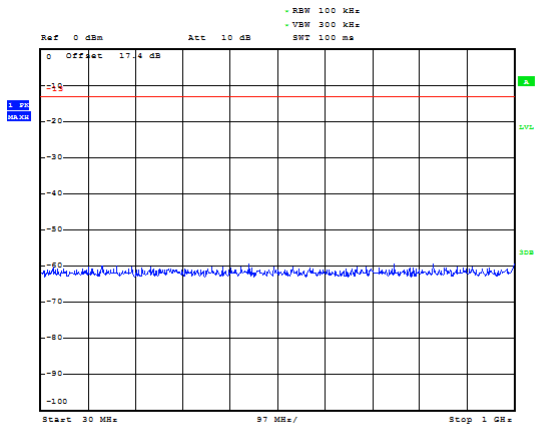


LTE Band 2 1.4MHz CH-Middle 30MHz~1GHz

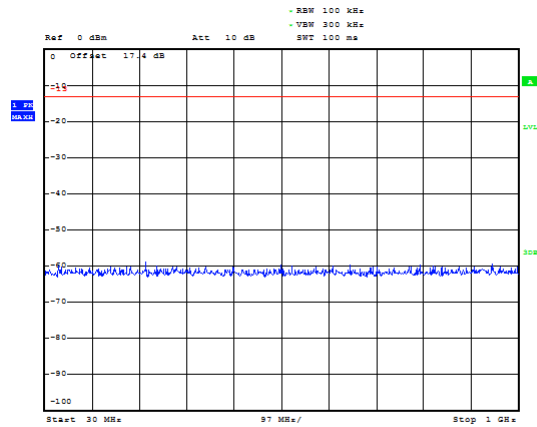


LTE Band 2 1.4MHz CH-Low 1GHz~3GHz

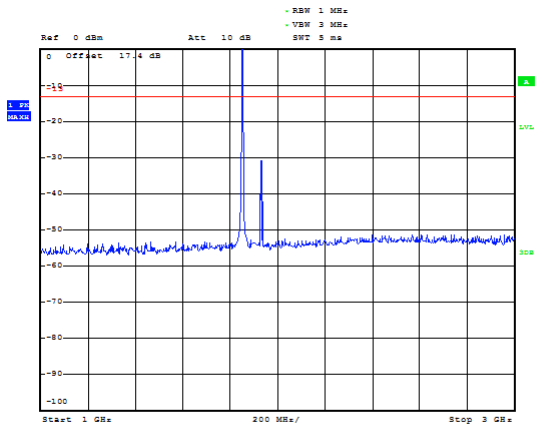


LTE Band 2 1.4MHz CH-Middle 1GHz~3GHz

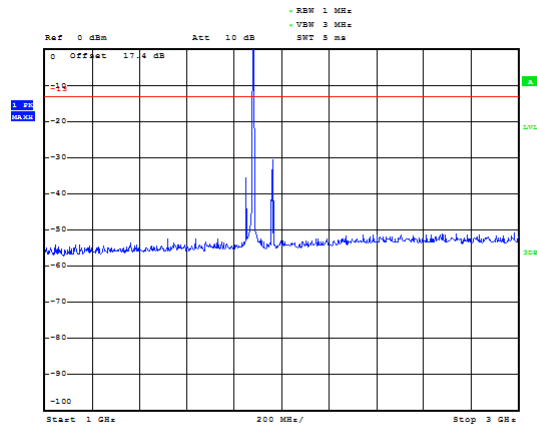

LTE Band 2 1.4MHz CH-Low 3GHz~20GHz

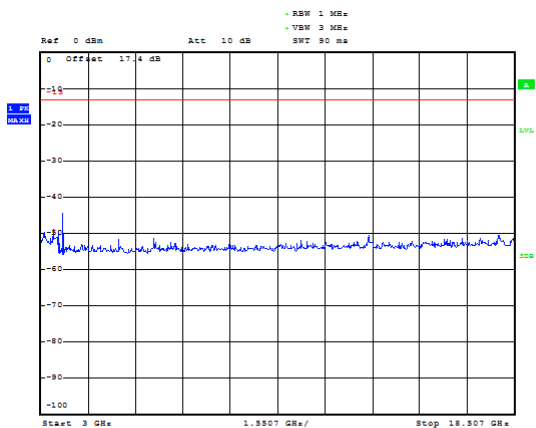


LTE Band 2 1.4MHz CH-Middle 3GHz~20GHz

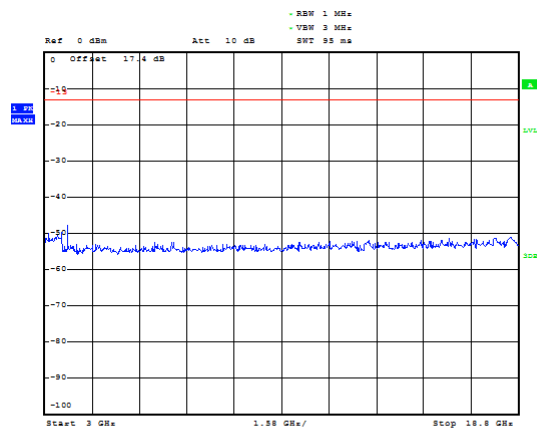





LTE Band 2 1.4MHz CH-High 30MHz~1GHz

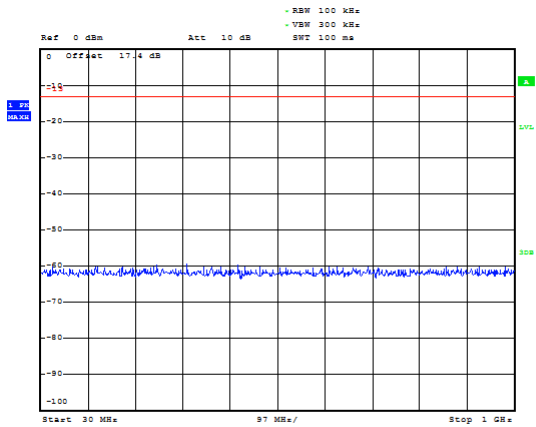


LTE Band 2 3MHz CH-Low 30MHz~1GHz

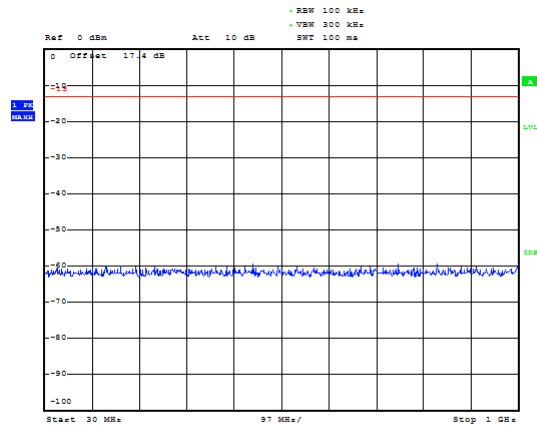


LTE Band 2 1.4MHz CH-High 1GHz~3GHz

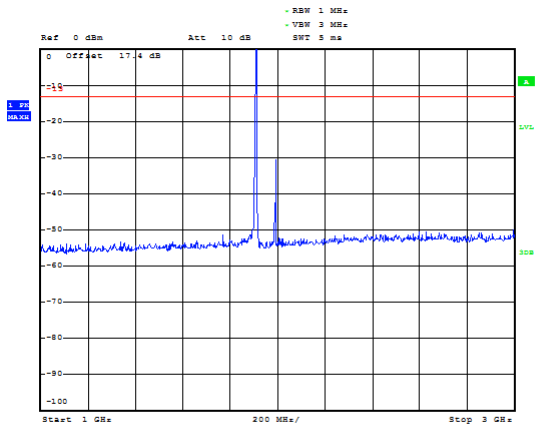


LTE Band 2 3MHz CH-Low 1GHz~3GHz

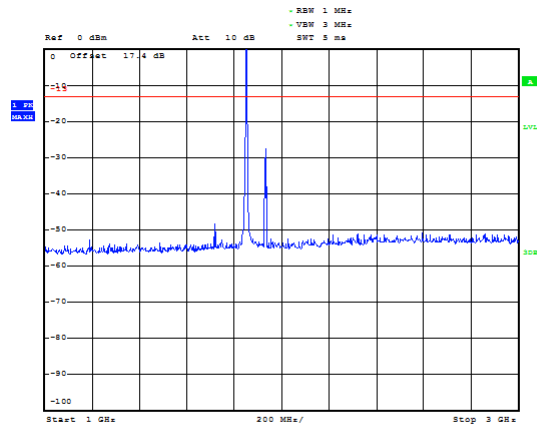

LTE Band 2 1.4MHz CH-High 3GHz~20GHz

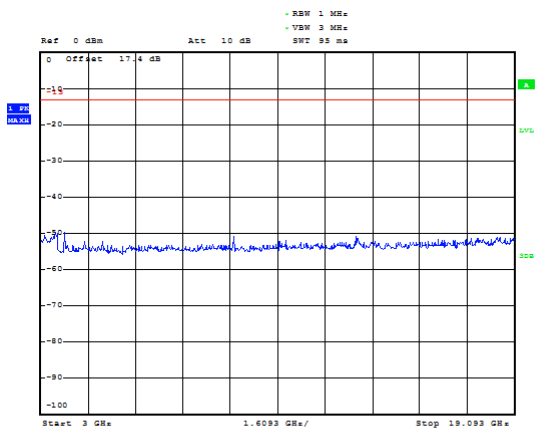


LTE Band 2 3MHz CH-Low 3GHz~20GHz

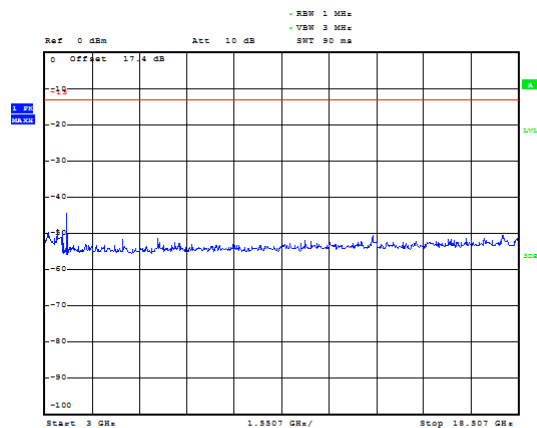





LTE Band 2 3MHz CH-Middle 30MHz~1GHz

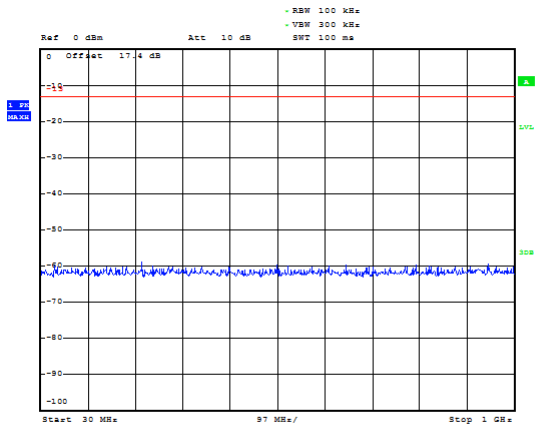


LTE Band 2 3MHz CH-High 30MHz~1GHz

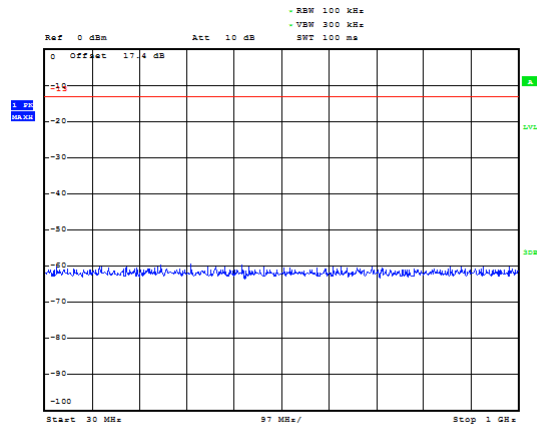


LTE Band 2 3MHz CH-Middle 1GHz~3GHz

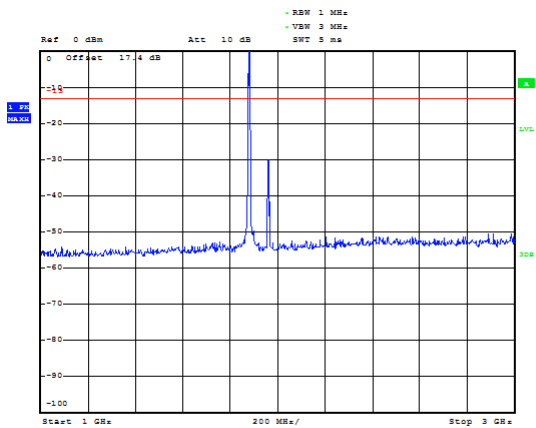


LTE Band 2 3MHz CH-High 1GHz~3GHz

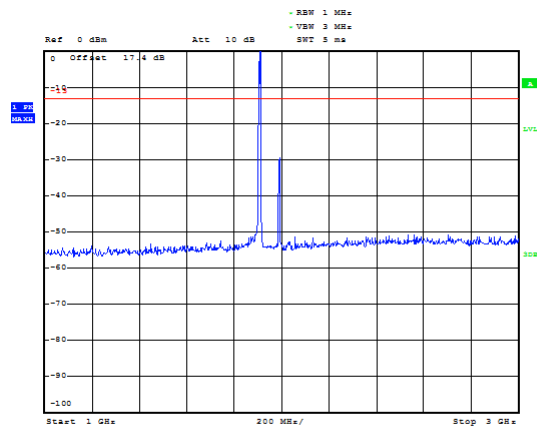

LTE Band 2 3MHz CH-Middle 3GHz~20GHz

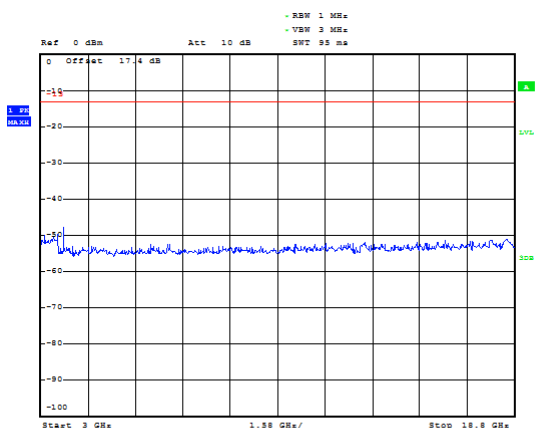


LTE Band 2 3MHz CH-High 3GHz~20GHz

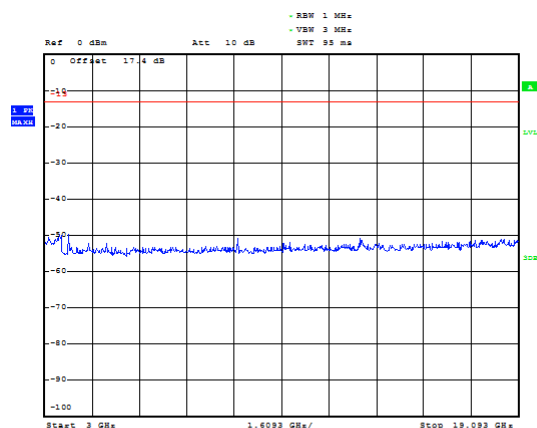





LTE Band 2 5MHz CH-Low 30MHz~1GHz

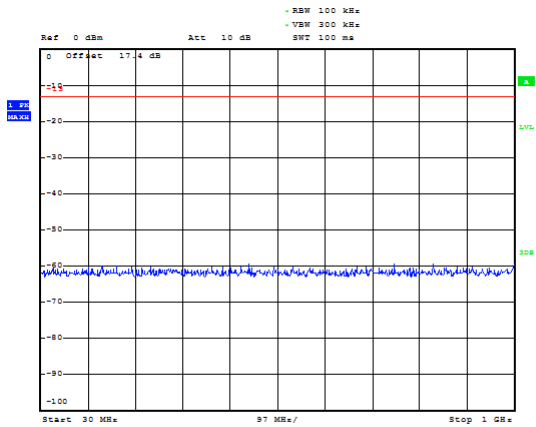


LTE Band 2 5MHz CH-Middle 30MHz~1GHz

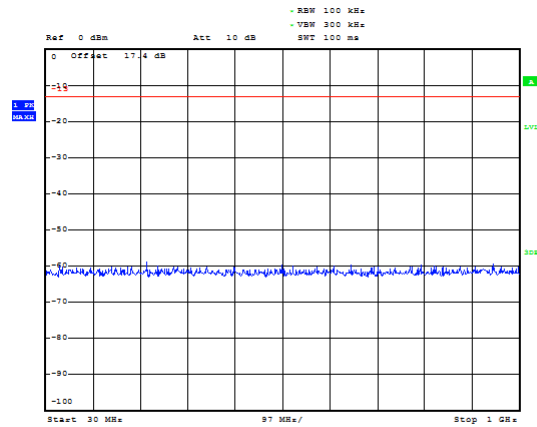


LTE Band 2 5MHz CH-Low 1GHz~3GHz

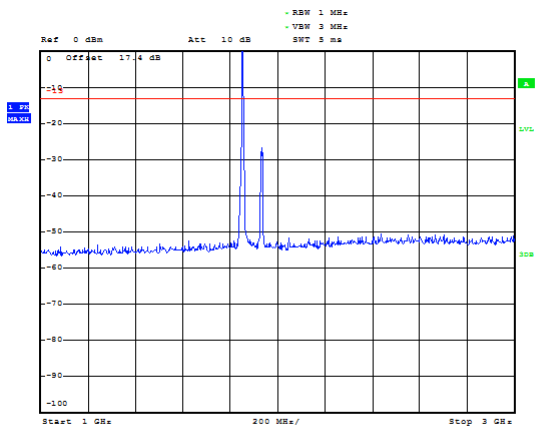


LTE Band 2 5MHz CH-Middle 1GHz~3GHz

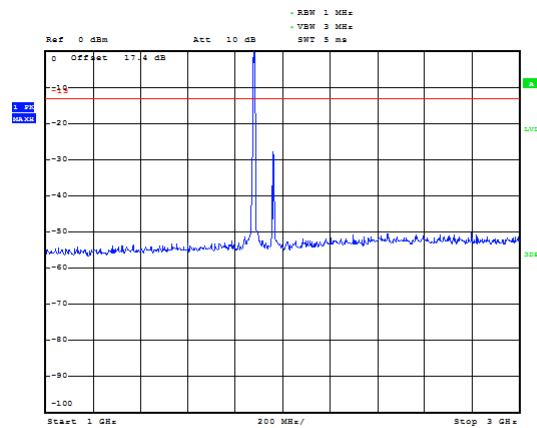

LTE Band 2 5MHz CH-Low 3GHz~20GHz

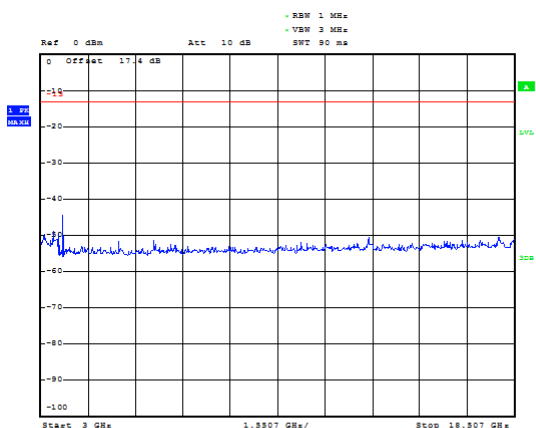


LTE Band 2 5MHz CH-Middle 3GHz~20GHz

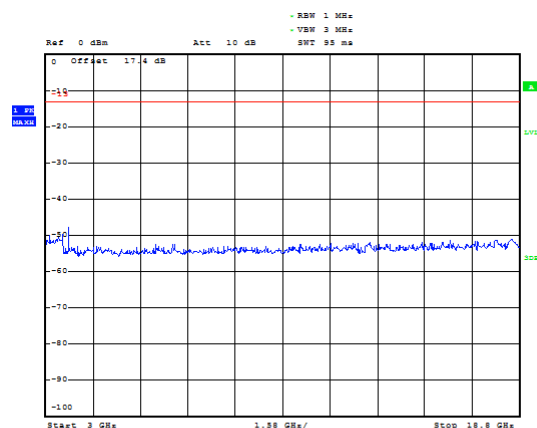





LTE Band 2 5MHz CH-High 30MHz~1GHz

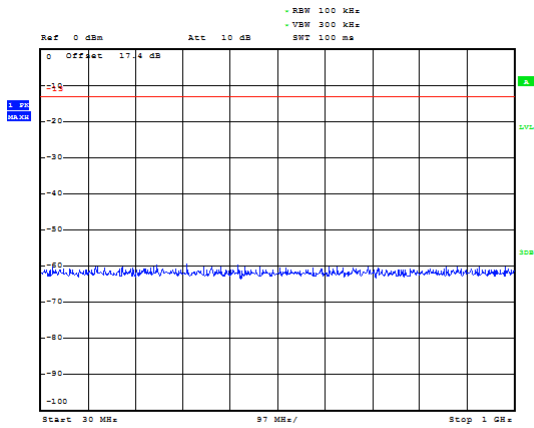


LTE Band 2 10MHz CH-Low 30MHz~1GHz

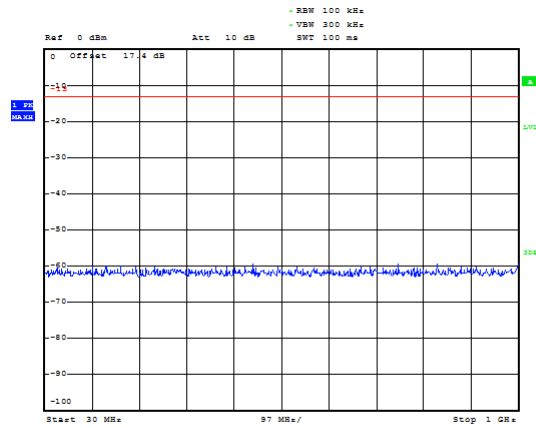


LTE Band 2 5MHz CH-High 1GHz~3GHz

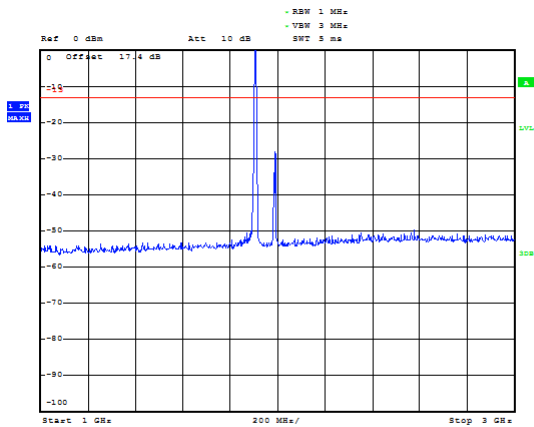


LTE Band 2 10MHz CH-Low 1GHz~3GHz

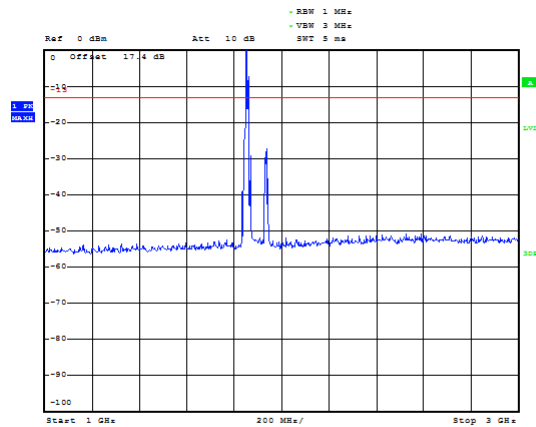

LTE Band 2 5MHz CH-High 3GHz~20GHz

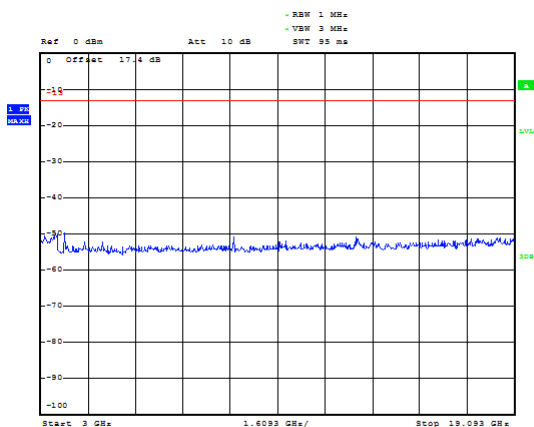


LTE Band 2 10MHz CH-Low 3GHz~20GHz

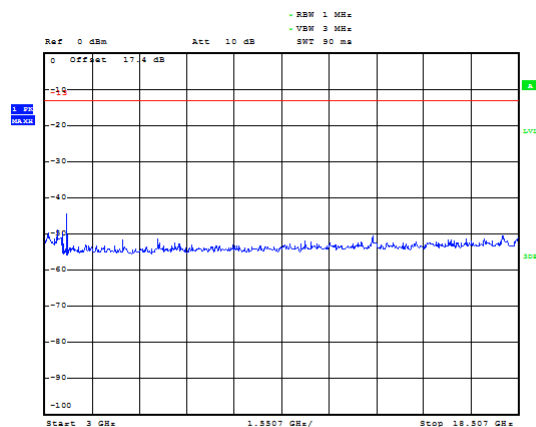





LTE Band 2 10MHz CH-Middle 30MHz~1GHz

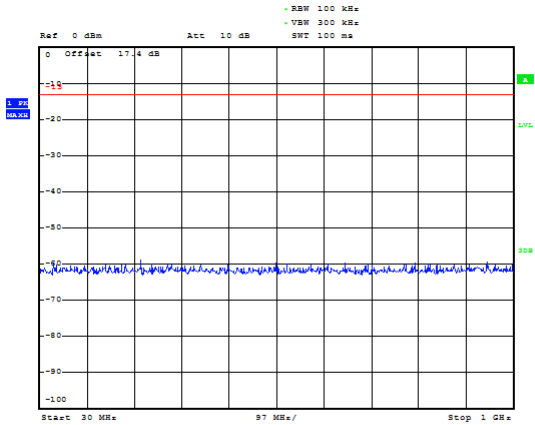


LTE Band 2 10MHz CH-High 30MHz~1GHz

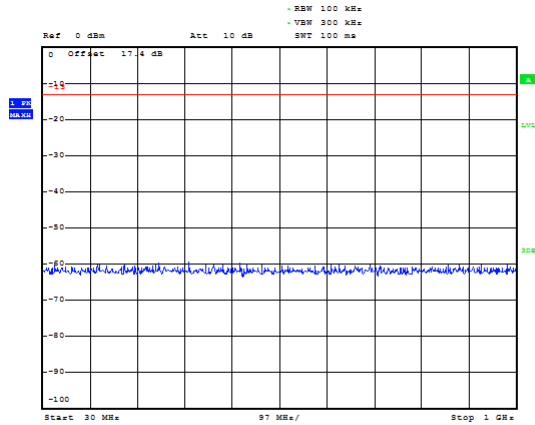


LTE Band 2 10MHz CH-Middle 1GHz~3GHz

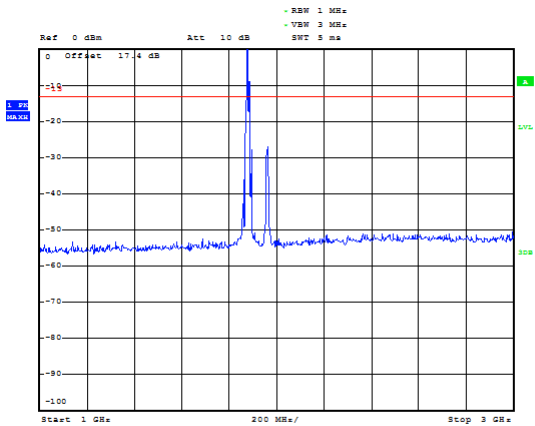


LTE Band 2 10MHz CH-High 1GHz~3GHz

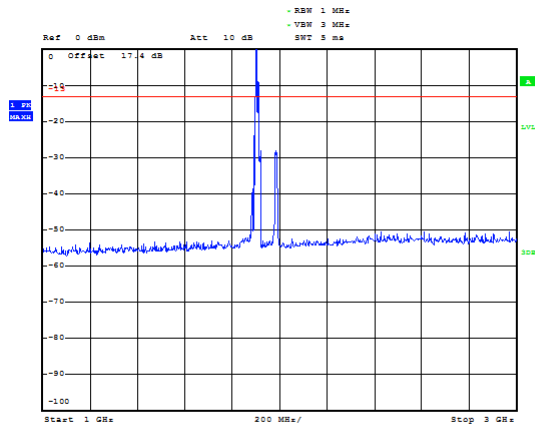

LTE Band 2 10MHz CH-Middle 3GHz~20GHz

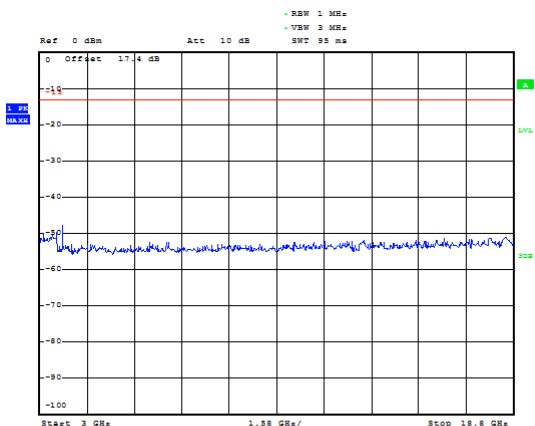


LTE Band 2 10MHz CH-High 3GHz~20GHz

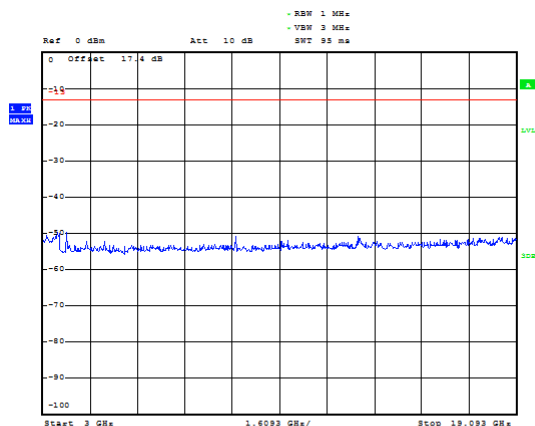





LTE Band 2 15MHz CH-Low 30MHz~1GHz

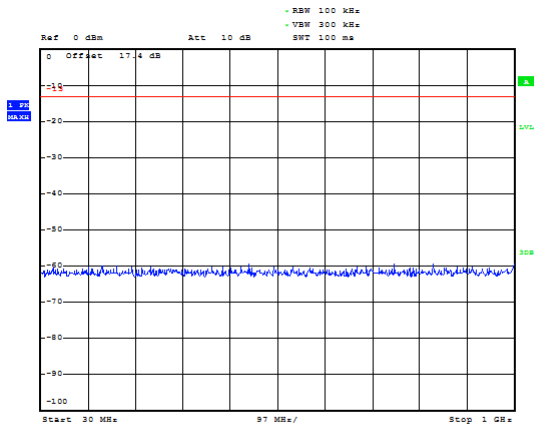


LTE Band 2 15MHz CH-Middle 30MHz~1GHz

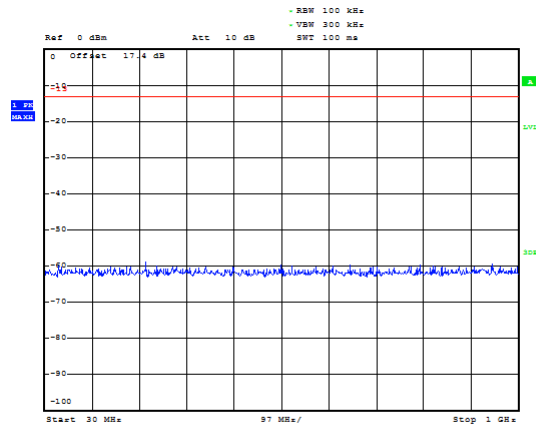


LTE Band 2 15MHz CH-Low 1GHz~3GHz

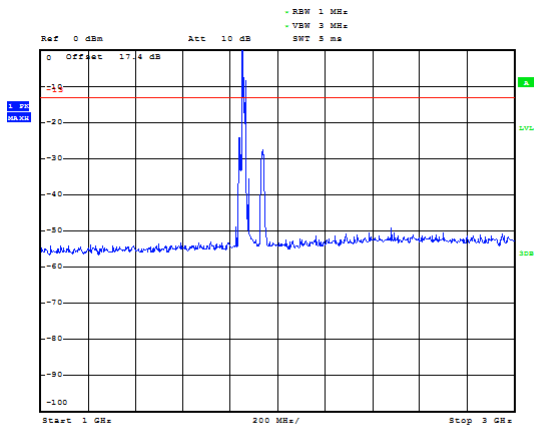


LTE Band 2 15MHz CH-Middle 1GHz~3GHz

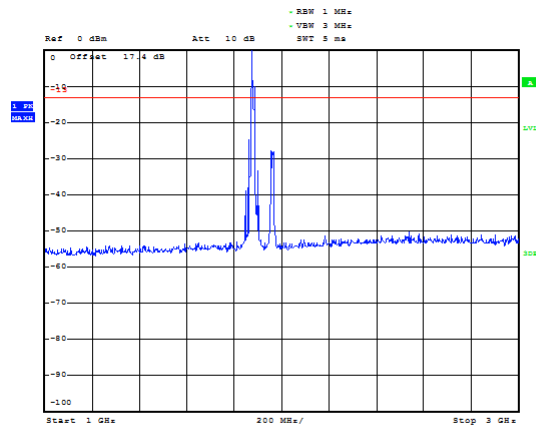

LTE Band 2 15MHz CH-Low 3GHz~20GHz

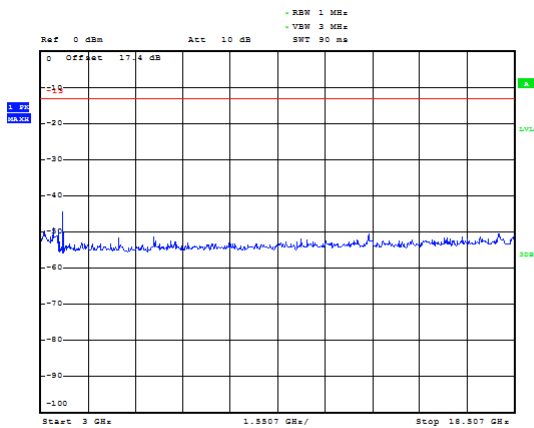


LTE Band 2 15MHz CH-Middle 3GHz~20GHz

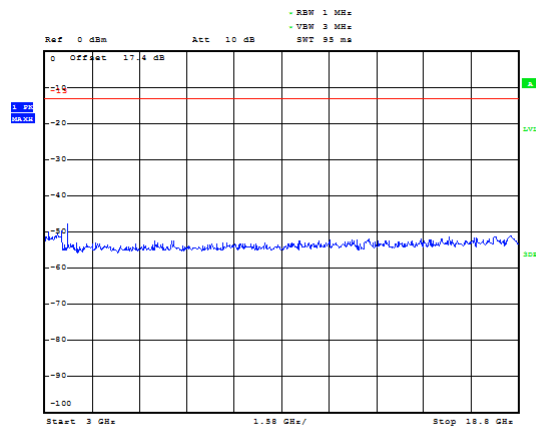





LTE Band 2 15MHz CH-High 30MHz~1GHz

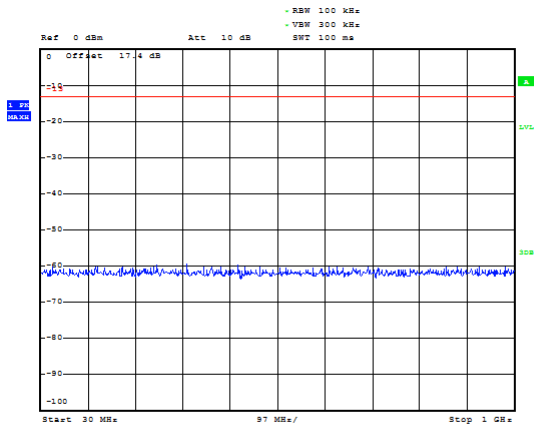


LTE Band 2 20MHz CH-Low 30MHz~1GHz

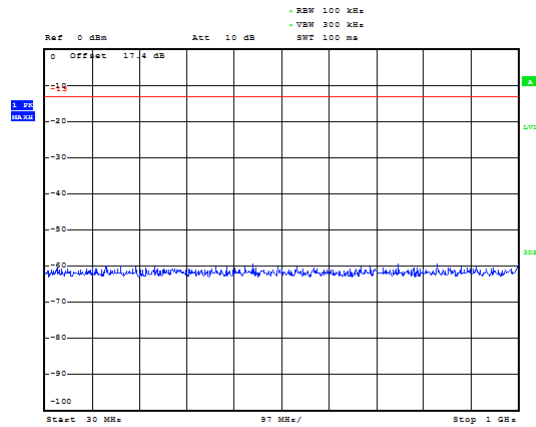


LTE Band 2 15MHz CH-High 1GHz~3GHz

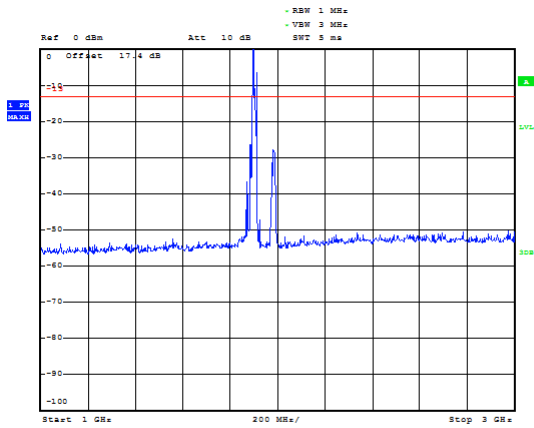


LTE Band 2 20MHz CH-Low 1GHz~3GHz

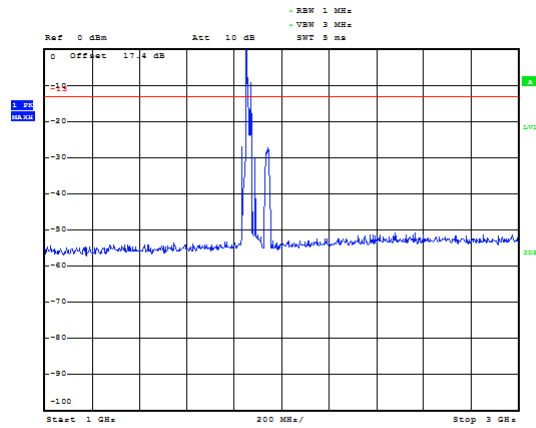

LTE Band 2 15MHz CH-High 3GHz~20GHz

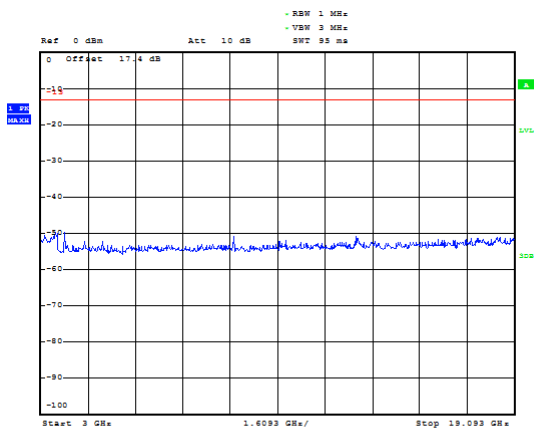


LTE Band 2 20MHz CH-Low 3GHz~20GHz

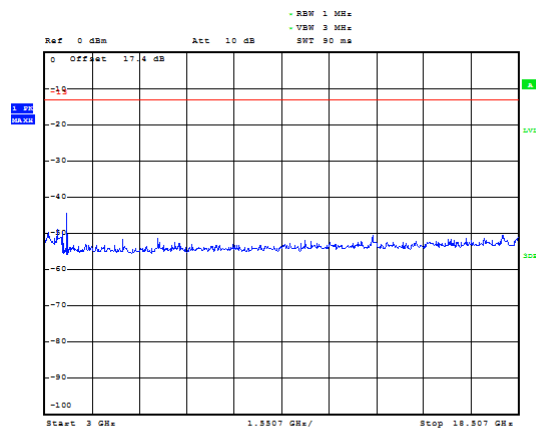





LTE Band 2 20MHz CH-Middle 30MHz~1GHz

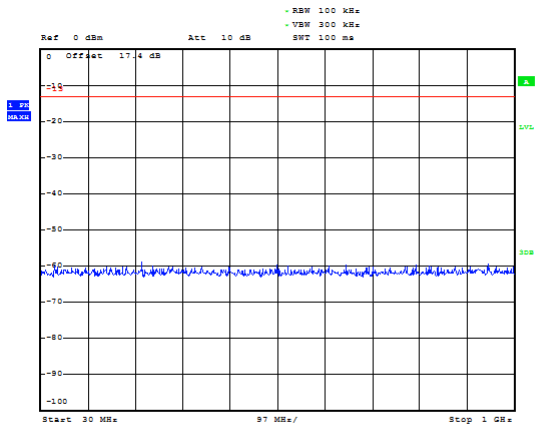


LTE Band 2 20MHz CH-High 30MHz~1GHz

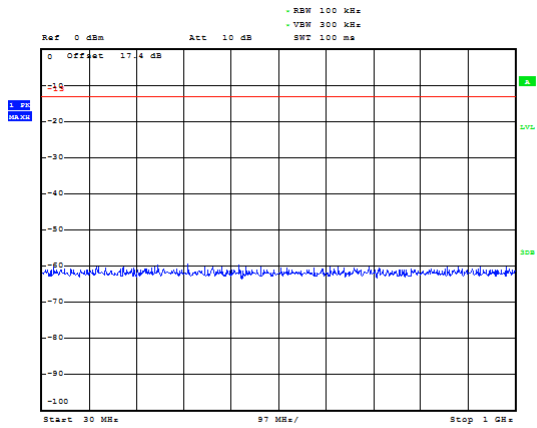


LTE Band 2 20MHz CH-Middle 1GHz~3GHz

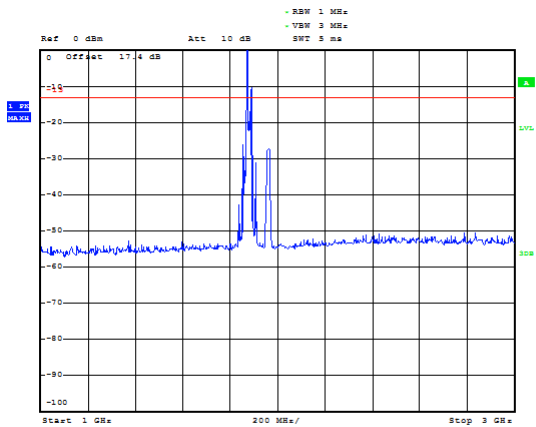


LTE Band 2 20MHz CH-High 1GHz~3GHz

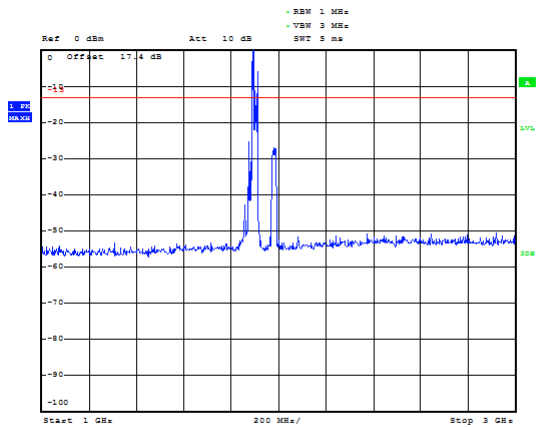

LTE Band 2 20MHz CH-Middle 3GHz~20GHz

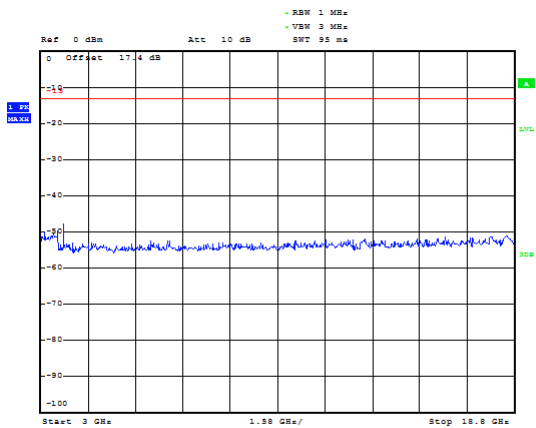

LTE Band 2 20MHz CH-High 3GHz~20GHz

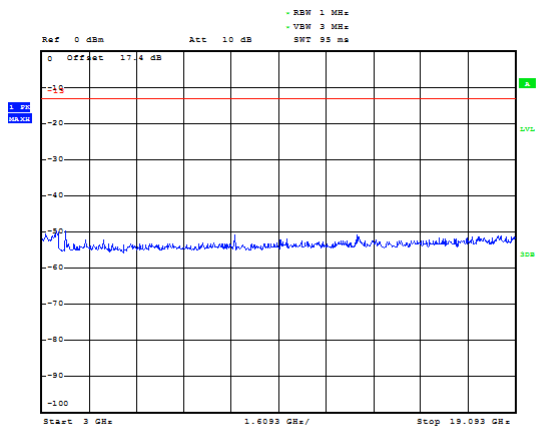

5.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).
2. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~~~ 1GHz

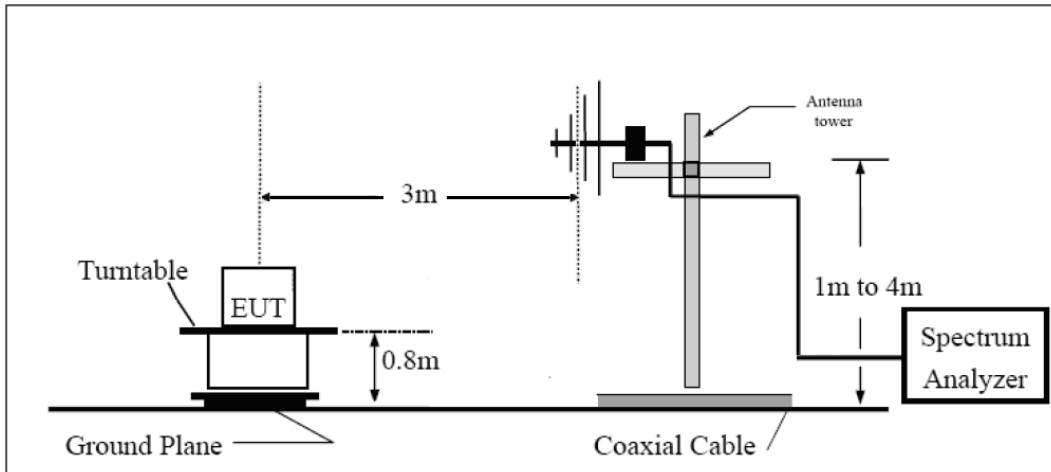

Above 1GHz

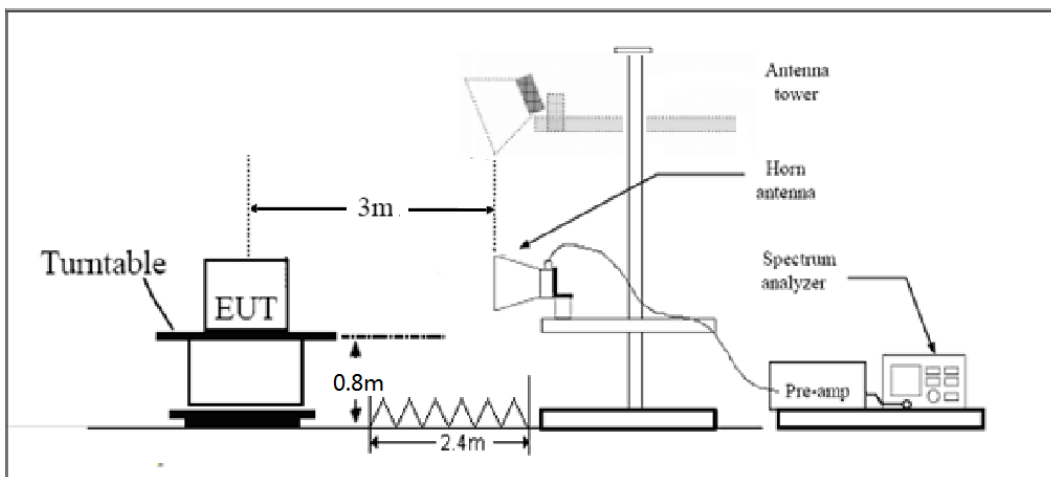

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

WCDMA Band II CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3704.8	-55.75	5.1	11.05	Horizontal	-49.8	-13.0	36.8	90
3	5553.8	-53.83	5.42	12.65	Horizontal	-46.6	-13.0	33.6	270
4	7409.6	-53.55	6.7	13.85	Horizontal	-46.4	-13.0	33.4	45
5	9262.0	-51.94	7.01	14.75	Horizontal	-44.2	-13.0	31.2	180
6	11114.4	-48.77	7.48	15.95	Horizontal	-40.3	-13.0	27.3	270
7	12966.8	-50.64	7.51	16.55	Horizontal	-41.6	-13.0	28.6	315
8	14819.2	-45.71	8.24	15.35	Horizontal	-38.6	-13.0	25.6	90
9	16671.6	-47.24	8.41	14.95	Horizontal	-40.7	-13.0	27.7	135
10	18524.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-50.85	5.1	11.05	Horizontal	-44.9	-13.0	31.9	225
3	5640.0	-52.23	5.42	12.65	Horizontal	-45.0	-13.0	32.0	135
4	7520.0	-54.25	6.7	13.85	Horizontal	-47.1	-13.0	34.1	135
5	9400.0	-52.04	7.01	14.75	Horizontal	-44.3	-13.0	31.3	180
6	11280.0	-51.97	7.48	15.95	Horizontal	-43.5	-13.0	30.5	45
7	13160.0	-50.84	7.51	16.55	Horizontal	-41.8	-13.0	28.8	0
8	15040.0	-48.71	8.24	15.35	Horizontal	-41.6	-13.0	28.6	225
9	16920.0	-46.14	8.41	14.95	Horizontal	-39.6	-13.0	26.6	90
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



WCDMA Band II CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3815.2	-50.25	5.1	11.05	Horizontal	-44.3	-13.0	31.3	225
3	5726.3	-50.13	5.42	12.65	Horizontal	-42.9	-13.0	29.9	135
4	7630.4	-54.25	6.7	13.85	Horizontal	-47.1	-13.0	34.1	180
5	9538.0	-54.44	7.01	14.75	Horizontal	-46.7	-13.0	33.7	180
6	11445.6	-50.77	7.48	15.95	Horizontal	-42.3	-13.0	29.3	225
7	13353.2	-50.74	7.51	16.55	Horizontal	-41.7	-13.0	28.7	45
8	15260.8	-47.31	8.24	15.35	Horizontal	-40.2	-13.0	27.2	90
9	17168.4	-45.94	8.41	14.95	Horizontal	-39.4	-13.0	26.4	270
10	19076.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.5	-48.85	5.1	11.05	Horizontal	-42.9	-13.0	29.9	135
3	5550.8	-47.63	5.42	12.65	Horizontal	-40.4	-13.0	27.4	225
4	7402.8	-52.95	6.7	13.85	Horizontal	-45.8	-13.0	32.8	180
5	9253.5	-53.24	7.01	14.75	Horizontal	-45.5	-13.0	32.5	225
6	11104.2	-51.37	7.48	15.95	Horizontal	-42.9	-13.0	29.9	45
7	12954.9	-50.84	7.51	16.55	Horizontal	-41.8	-13.0	28.8	0
8	14805.6	-45.51	8.24	15.35	Horizontal	-38.4	-13.0	25.4	315
9	16656.3	-47.14	8.41	14.95	Horizontal	-40.6	-13.0	27.6	270
10	18507.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.0	-52.05	5.10	11.05	Horizontal	-46.10	-13.00	33.10	90
3	5638.9	-48.48	5.42	12.65	Horizontal	-41.25	-13.00	28.25	135
4	7520.0	-55.22	6.70	13.85	Horizontal	-48.07	-13.00	35.07	45
5	9400.0	-51.72	7.01	14.75	Horizontal	-43.98	-13.00	30.98	225
6	11280.0	-51.80	7.48	15.95	Horizontal	-43.33	-13.00	30.33	315
7	13160.0	-50.81	7.51	16.55	Horizontal	-41.77	-13.00	28.77	45
8	15040.0	-48.31	8.24	15.35	Horizontal	-41.20	-13.00	28.20	0
9	16920.0	-46.63	8.41	14.95	Horizontal	-40.09	-13.00	27.09	180
10	18800.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3817.5	-47.05	5.10	11.05	Horizontal	-41.1	-13.0	28.1	45
3	5726.6	-43.23	5.42	12.65	Horizontal	-36.0	-13.0	23.0	135
4	7637.2	-52.25	6.70	13.85	Horizontal	-45.1	-13.0	32.1	180
5	9546.5	-53.14	7.01	14.75	Horizontal	-45.4	-13.0	32.4	270
6	11455.8	-50.67	7.48	15.95	Horizontal	-42.2	-13.0	29.2	315
7	13365.1	-51.84	7.51	16.55	Horizontal	-42.8	-13.0	29.8	45
8	15274.4	-48.71	8.24	15.35	Horizontal	-41.6	-13.0	28.6	90
9	17183.7	-47.44	8.41	14.95	Horizontal	-40.9	-13.0	27.9	0
10	19093.0	/	/	/	/	/	/	/	/

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 5MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3705.0	-50.35	5.10	11.05	Horizontal	-44.4	-13.0	31.4	135
3	5557.5	-48.83	5.42	12.65	Horizontal	-41.6	-13.0	28.6	135
4	7410.0	-52.45	6.70	13.85	Horizontal	-45.3	-13.0	32.3	45
5	9262.5	-52.14	7.01	14.75	Horizontal	-44.4	-13.0	31.4	180
6	11115.0	-50.87	7.48	15.95	Horizontal	-42.4	-13.0	29.4	270
7	12967.5	-51.24	7.51	16.55	Horizontal	-42.2	-13.0	29.2	90
8	14820.0	-46.51	8.24	15.35	Horizontal	-39.4	-13.0	26.4	225
9	16672.5	-48.04	8.41	14.95	Horizontal	-41.5	-13.0	28.5	0
10	18525.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3755.6	-53.50	5.10	11.05	Horizontal	-47.55	-13.00	34.55	135
3	5633.6	-49.07	5.42	12.65	Horizontal	-41.84	-13.00	28.84	225
4	7520.0	-53.58	6.70	13.85	Horizontal	-46.43	-13.00	33.43	90
5	9400.0	-50.71	7.01	14.75	Horizontal	-42.97	-13.00	29.97	180
6	11280.0	-52.08	7.48	15.95	Horizontal	-43.61	-13.00	30.61	0
7	13160.0	-51.28	7.51	16.55	Horizontal	-42.24	-13.00	29.24	180
8	15040.0	-48.61	8.24	15.35	Horizontal	-41.50	-13.00	28.50	90
9	16920.0	-46.75	8.41	14.95	Horizontal	-40.21	-13.00	27.21	315
10	18800.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 5MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3815.0	-47.65	5.10	11.05	Horizontal	-41.7	-13.0	28.7	135
3	5722.5	-43.03	5.42	12.65	Horizontal	-35.8	-13.0	22.8	135
4	7630.0	-52.65	6.70	13.85	Horizontal	-45.5	-13.0	32.5	45
5	9537.5	-54.44	7.01	14.75	Horizontal	-46.7	-13.0	33.7	90
6	11445.0	-50.67	7.48	15.95	Horizontal	-42.2	-13.0	29.2	225
7	13352.5	-50.94	7.51	16.55	Horizontal	-41.9	-13.0	28.9	135
8	15260.0	-47.91	8.24	15.35	Horizontal	-40.8	-13.0	27.8	370
9	17167.5	-46.24	8.41	14.95	Horizontal	-39.7	-13.0	26.7	0
10	19075.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 20MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3720.0	-49.05	5.10	11.05	Horizontal	-43.1	-13.0	30.1	90
3	5580.0	-48.03	5.42	12.65	Horizontal	-40.8	-13.0	27.8	135
4	7440.0	-52.75	6.70	13.85	Horizontal	-45.6	-13.0	32.6	370
5	9300.0	-50.44	7.01	14.75	Horizontal	-42.7	-13.0	29.7	0
6	11160.0	-51.37	7.48	15.95	Horizontal	-42.9	-13.0	29.9	45
7	13020.0	-52.54	7.51	16.55	Horizontal	-43.5	-13.0	30.5	90
8	14880.0	-46.21	8.24	15.35	Horizontal	-39.1	-13.0	26.1	135
9	16740.0	-47.34	8.41	14.95	Horizontal	-40.8	-13.0	27.8	0
10	18600.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3742.1	-53.38	5.10	11.05	Horizontal	-47.43	-13.00	34.43	370
3	5613.4	-54.96	5.42	12.65	Horizontal	-47.73	-13.00	34.73	0
4	7484.6	-51.75	6.70	13.85	Horizontal	-44.60	-13.00	31.60	0
5	9400.0	-51.26	7.01	14.75	Horizontal	-43.52	-13.00	30.52	180
6	11280.0	-49.13	7.48	15.95	Horizontal	-40.66	-13.00	27.66	90
7	13160.0	-50.44	7.51	16.55	Horizontal	-41.40	-13.00	28.40	315
8	15040.0	-46.32	8.24	15.35	Horizontal	-39.21	-13.00	26.21	45
9	16920.0	-46.16	8.41	14.95	Horizontal	-39.62	-13.00	26.62	0
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 20MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3800.0	-50.55	5.10	11.05	Horizontal	-44.6	-13.0	31.6	0
3	5700.0	-45.13	5.42	12.65	Horizontal	-37.9	-13.0	24.9	180
4	7600.0	-53.45	6.70	13.85	Horizontal	-46.3	-13.0	33.3	90
5	9500.0	-53.64	7.01	14.75	Horizontal	-45.9	-13.0	32.9	315
6	11400.0	-50.47	7.48	15.95	Horizontal	-42.0	-13.0	29.0	45
7	13300.0	-51.14	7.51	16.55	Horizontal	-42.1	-13.0	29.1	90
8	15200.0	-46.41	8.24	15.35	Horizontal	-39.3	-13.0	26.3	135
9	17100.0	-45.34	8.41	14.95	Horizontal	-38.8	-13.0	25.8	0
10	19000.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Date of Testing: May 25, 2018 ~ June 27, 2018

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2018-05-13	2019-05-12
Base Station Simulator	R&S	CMW500	113645	2018-05-13	2019-05-12
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	NA	NA
Spectrum Analyzer	Agilent	N9010A	MY47191109	2018-05-20	2019-05-19
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Signal generator	R&S	SMB 100A	102594	2018-05-13	2019-05-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2014-12-06	2019-12-05
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Climatic Chamber	Re Ce	PT-30B	20101891	2015-07-18	2018-07-17
Horn Antenna	ETS-Lindgren	3160-09	00102644	2015-01-30	2020-01-29
RF Cable	Agilent	SMA 15cm	0001	2018-02-03	2018-08-02
Preampfier	R&S	SCU18	102327	2018-05-20	2019-05-19
Software	R&S	EMC32	V 8.52.0	NA	NA
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-07	2019-05-06



Date of Testing: June 29, 2020

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2020-05-17	2021-05-16
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****