


## RF TEST REPORT

**Applicant**      Quectel Wireless Solutions Co., Ltd.  
**FCC ID**          XMR2021BG951AGL  
**Product**        LTE Cat M1/NB Module  
**Brand**            Quectel  
**Model**            BG951A-GL  
**Report No.**      R2301A0026-R7  
**Issue Date**     March 21, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2022)/ FCC CFR 47 Part 90S (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

---

**TA Technology (Shanghai) Co., Ltd.**

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the Test Report .....	4
1.2. Test Facility .....	4
1.3. Testing Location .....	4
2. General Description of Equipment Under Test .....	5
2.3. Applicant and Manufacturer Information .....	5
2.4. General Information .....	5
3. Applied Standards .....	6
4. Test Configuration .....	7
5. Test Case .....	8
5.1. RF Power Output and Effective Radiated Power .....	8
5.2. Occupied Bandwidth .....	9
5.3. Emission Mask .....	10
5.4. Peak-to-Average Power Ratio (PAPR) .....	11
5.5. Frequency Stability .....	12
5.6. Spurious Emissions at Antenna Terminals .....	14
5.7. Radiated Spurious Emission .....	15
6. Test Results .....	18
6.1. RF Power Output and Effective Radiated Power .....	18
6.2. Occupied Bandwidth .....	19
6.3. Emission Mask .....	22
6.4. Peak-to-Average Power Ratio (PAPR) .....	28
6.5. Frequency Stability .....	29
6.6. Spurious Emissions at Antenna Terminals .....	31
6.7. Radiated Spurious Emission .....	33
7. Main Test Instruments .....	35
ANNEX A: The EUT Appearance .....	36
ANNEX B: Test Setup Photos .....	37
ANNEX C: Product Change Description (Variant 1) .....	38
ANNEX D: Product Change Description (Variant 2) .....	39

## Summary of Measurement Results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046/90.635(b)	PASS
2	Occupied Bandwidth	2.1049/ 90.209	PASS
3	Emission Masks	2.1051 / 90.691	PASS
4	Peak-to-Average Power Ratio	KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 90.213	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 90.691	PASS
7	Radiated Spurious Emission	2.1053 /90.691	PASS
Date of Testing: July 21, 2021 ~ August 5, 2021			
Date of Sample Received: July 20, 2021			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

**BG951A-GL (Report No.: R2301A0026-R7) is a variant model (Variant 2) of BG951A-GL (Report No.: R2111A0947-R7V2). BG951A-GL supports from Cat NB1 (3GPP R13) to Cat NB2 (3GPP R14) only by FW updating, the hardware remains the same.**

The detailed product change description please refers to following table:

Module	BG951A-GL (Cat NB1)	BG951A-GL (Cat NB2)
Category	Cat M1 & NB1	Cat M1 & NB2
Frequency Bands	Cat M1 Band 2/4/5/12/13/25/26/66 Cat NB1 Band 2/4/5/12/13/17/25/66	Cat M1 Band 2/4/5/12/13/25/26/66 Cat NB2 Band 2/4/5/12/13/17/25/66
Others	The same	

There is only verified RF Power Output; Occupied Bandwidth; Spurious Emissions at Antenna Terminals, and did not worsen, so they were not recorded in the report.

The detailed product change description please refers to the *Difference Declaration Letter (Variant 2)*.

**BG951A (Report No.: R2111A0947-R7V2) is a variant model (Variant 1) of BG950A (Report No.: R2107A0607-R7V1). The product only change mode, Software version, Hardware version, product name and FCC ID. There is no test in this report. The detailed product change description please refers to the *Difference Declaration Letter (Variant 1)*.**

## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test Facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment Under Test

### 2.3. Applicant and Manufacturer Information

Applicant	Quectel Wireless Solutions Co., Ltd.
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China, 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China, 200233

### 2.4. General Information

EUT Description			
Model	BG951A-GL		
IMEI	(Original) 869410050002659		
Hardware Version	R1.5		
Software Version	BG951AGLAAR02A01		
Power Supply	External power supply		
Antenna Type	External Antenna		
Antenna Gain	Mode	Frequency (MHz)	Gain (dBi)
	LTE eMTC Band 26	810	3.19
		820	2.53
Test Mode(s)	LTE eMTC Band 26;		
Test Modulation	QPSK, 16QAM;		
LTE Category	M1		
Maximum E.R.P.	LTE eMTC Band 26:	24.88dBm	
Rated Power Supply Voltage	3.3V		
Operating Voltage	Minimum: 2.2V    Maximum: 4.35V		
Operating Temperature	Lowest: -35°C    Highest: +75°C		
Testing Temperature	Lowest: -35°C    Highest: +75°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE eMTC Band 26	814 ~ 824	859 ~ 869
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 90S (2022)**

**FCC CFR47 Part 2 (2022)**

**Reference standard:**

**ANSI C63.26-2015**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X, Y axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions were investigated.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen as the worst case configuration below for LTE eMTC Band 26

Test items	Bandwidth (MHz)					Modulation		RB			Test Channel		
	1.4	3	5	10	15	QPSK	16QAM/ 64QAM	1	50%	100%	L	M	H
RF Power Output and Effective Radiated Power	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	-	-	O	O	O	O
Emission Mask	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	-	-	-	O	-
Spurious Emissions at Antenna Terminals	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	O	O	O	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.												

## 5. Test Case

### 5.1. RF Power Output and Effective Radiated Power

#### Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

#### Methods of Measurement


During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.

ERP can then be calculated as follows:

$EIRP \text{ (dBm)} = \text{Output Power (dBm)} + \text{Antenna Gain (dBi)}$

$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

#### Test Setup

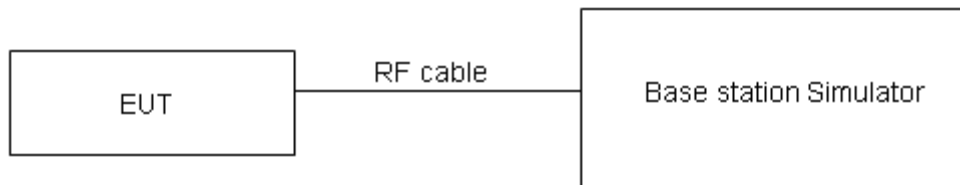

#### Limits

Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts.

Rule Part 90.635(b) specifies that “The maximum output power of the transmitter for mobile stations is 100 watts”.

Limit	$\leq 100 \text{ W}$ (50 dBm)
-------	-------------------------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4 \text{ dB}$  for RF power output,  $k = 2$ ,  $U = 1.19 \text{ dB}$  for ERP.

#### Test Results

Refer to the section 6.1 of this report for test data.



## 5.2. Occupied Bandwidth

### Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%


### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to  $\geq 1\%EBW$ , VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

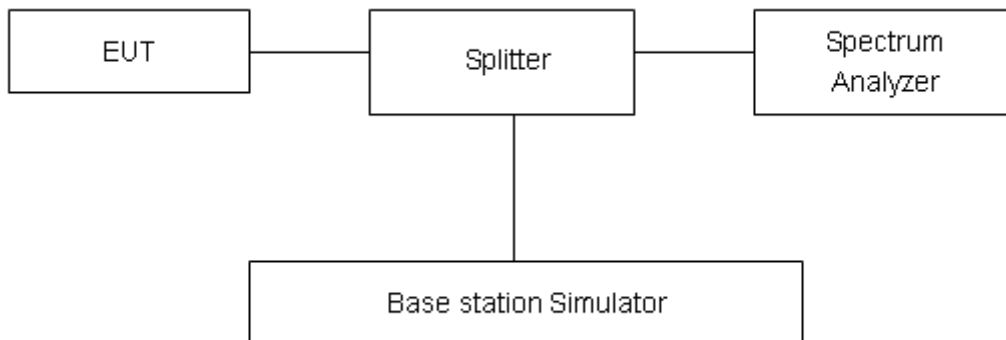

### Limits

No specific occupied bandwidth requirements in part 2.1049.

Part 90.209 (a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where part 2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .

### Test Results

Refer to the section 6.2 of this report for test data.

### 5.3. Emission Mask

#### Ambient Condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. For Section 90.691(a) compliance testing, use RBW = 300 Hz for offsets less than 37.5 kHz from a channel edge; RBW = 100 kHz for offsets greater than 37.5 kHz is allowed.

Spectrum analyzer plots are included on the following pages.

#### Test Setup

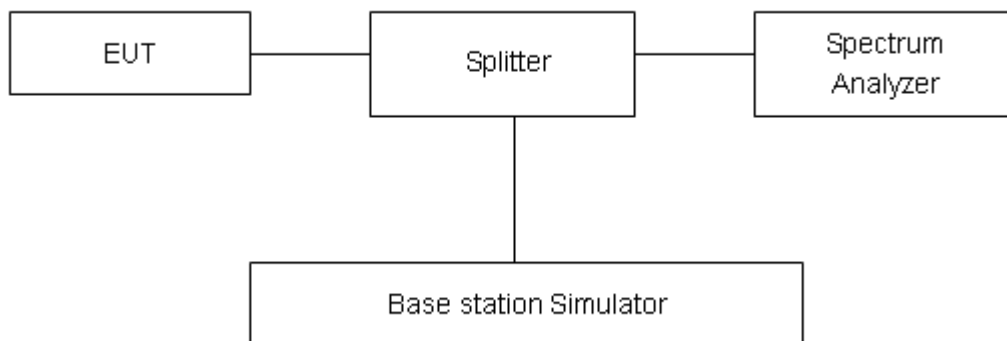

#### Limits

Rule Part 90.691(a) specifies that “ For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}_{10}(f/6.1)$  decibels or  $50 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.”

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684\text{dB}$ .

#### Test Results

Refer to the section 6.3 of this report for test data.

## 5.4. Peak-to-Average Power Ratio (PAPR)

### Ambient Condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

### Methods of Measurement

Measure the total peak power and record as PPK. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

### Test Setup

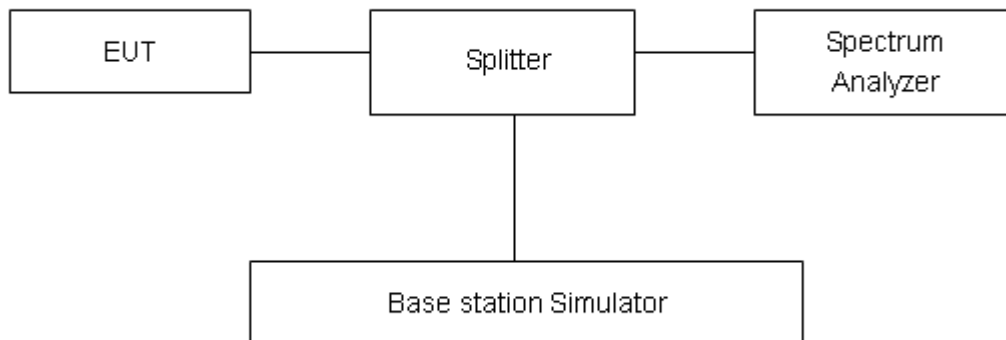

### Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

### Test Results

Refer to the section 6.4 of this report for test data.

## 5.5. Frequency Stability

### Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

#### 1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -35°C to +75°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -35°C to +75°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


#### 2. Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

**Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 2.2V and 4.35 V, with a nominal voltage of 3.3V.

### Test Setup

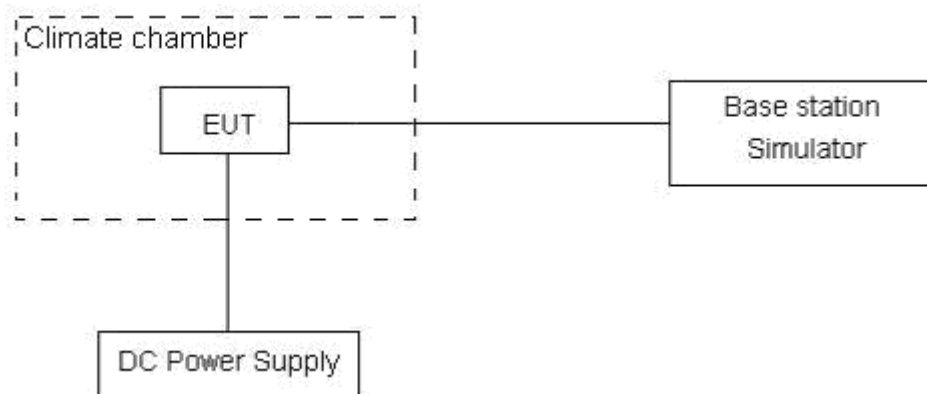

## Limits

According to the Sec. 90.213.(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Minimum Frequency Stability

[Parts per million (ppm)]

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
814 ~ 824	1.5	2.5	2.5

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01\text{ppm}$ .

## Test Results

Refer to the section 6.5 of this report for test data.

## 5.6. Spurious Emissions at Antenna Terminals

### Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

Sweep is set to ATUO.

### Test Setup

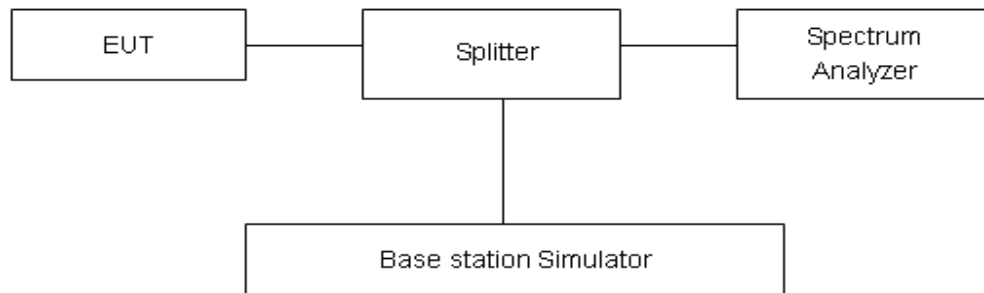

### Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm
-------	---------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-12.75GHz	1.407 dB

### Test Results

Refer to the section 6.6 of this report for test data.

## 5.7. Radiated Spurious Emission

### Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

- The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26-2015.
- Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
- A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz,VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below:  


$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
 The measurement results are amend as described below:  

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

**Test Setup**


**9KHz~ 30MHz**

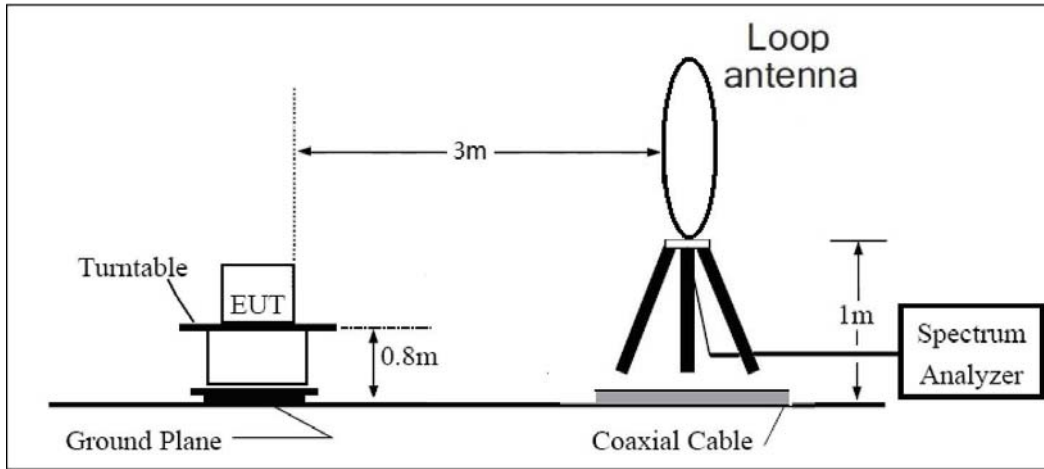

**30MHz~ 1GHz**

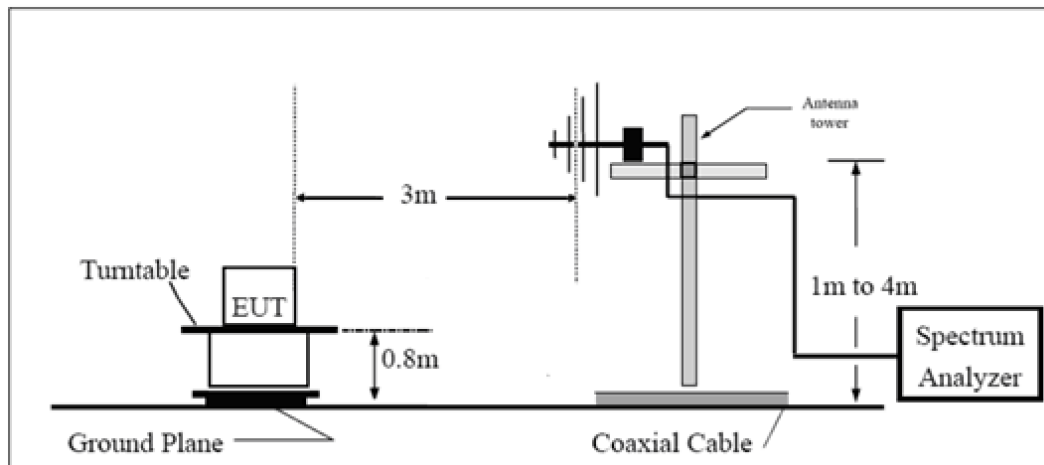

**Above 1GHz**

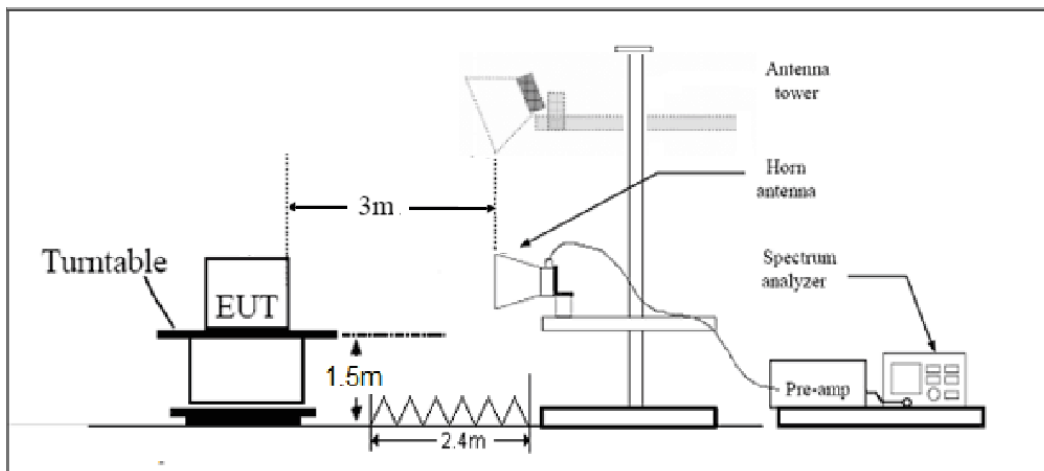

Note: Area side: 2.4mX3.6m



## Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.”

Limit	-13 dBm
-------	---------

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

## Test Results

Refer to the section 6.7 of this report for test data.

## 6. Test Results

### 6.1. RF Power Output and Effective Radiated Power

LTE eMTC Band 26	Channel/ Frequency(MHz)	Index	RB#		Maximum Output Power (dBm)		ERP (dBm)	
			RBstart		QPSK	16QAM	QPSK	16QAM
1.4MHz	26697/814.7	0	1#0	1#0	23.84	22.79	24.88	23.83
		0	6#0	5#0	22.43	22.02	23.47	23.06
	26740/819	0	1#0	1#0	23.92	22.87	24.30	23.25
		0	6#0	5#0	22.39	22.04	22.77	22.42
	26783/823.3	0	1#5	1#5	23.07	22.89	23.45	23.27
		0	6#0	5#0	22.41	22.05	22.79	22.43
3MHz	26705/815.5	0	1#0	1#0	23.67	23.10	24.05	23.48
		0	6#0	5#0	22.25	22.02	22.63	22.40
	26740/819	0	1#0	1#0	23.69	23.20	24.07	23.58
		0	6#0	5#0	22.31	21.87	22.69	22.25
	26775/822.5	1	1#5	1#5	22.97	23.21	23.35	23.59
		0	6#0	5#0	22.34	22.12	22.72	22.50
5MHz	26715/816.5	3	1#0	1#0	23.95	23.99	24.33	24.37
		0	6#0	5#0	23.31	22.00	23.69	22.38
	26740/819	0	1#0	1#0	23.97	23.46	24.35	23.84
		0	6#0	5#0	23.15	22.20	23.53	22.58
	26765/821.5	0	1#5	1#5	23.70	23.14	24.08	23.52
		0	6#0	5#0	23.24	22.02	23.62	22.40
10MHz	26740/819	0	1#0	1#0	22.76	23.24	23.14	23.62
		0	4#0	4#0	23.05	23.12	23.43	23.50

## 6.2. Occupied Bandwidth

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Bandwidth(MHz)	
				99% Power	-26dBc
LTE eMTC Band 26	1.4MHz	QPSK	26740/819	1.107	1.326
		16QAM	26740/819	0.961	1.299
	3MHz	QPSK	26740/819	1.097	1.337
		16QAM	26740/819	0.955	1.300
	5MHz	QPSK	26740/819	1.106	1.334
		16QAM	26740/819	0.978	1.301
	10MHz	QPSK	26740/819	1.107	1.335
		16QAM	26740/819	0.994	1.321

LTE eMTC Band 26 QPSK 1.4MHz CH-Middle



LTE eMTC Band 26 16QAM 1.4MHz CH-Middle



LTE eMTC Band 26 QPSK 3MHz CH-Middle



LTE eMTC Band 26 16QAM 3MHz CH-Middle




LTE eMTC Band 26 QPSK 5MHz CH-Middle









LTE eMTC Band 26 16QAM 5MHz CH-Middle




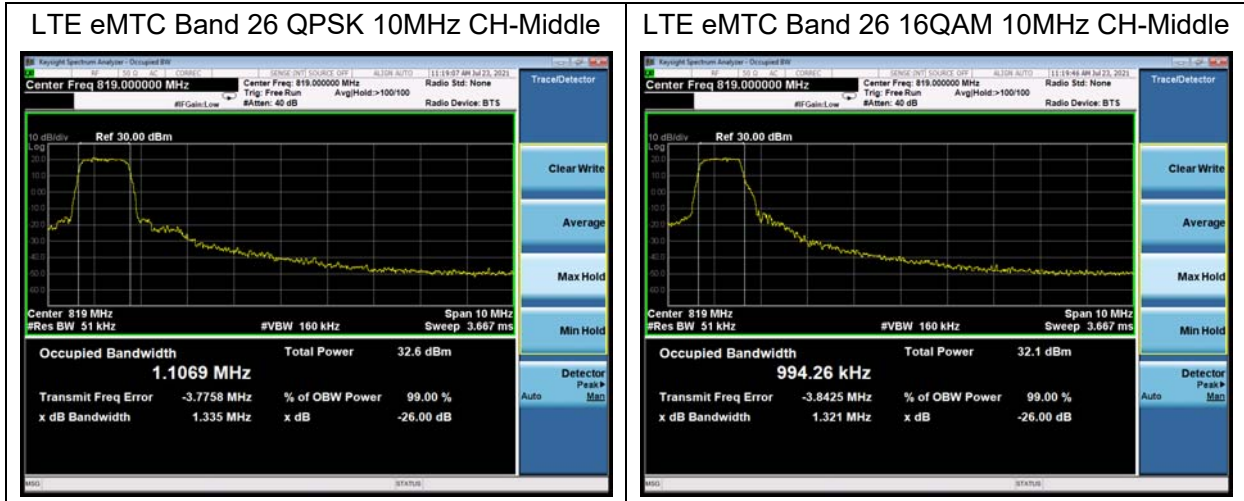

### 6.3. Emission Mask

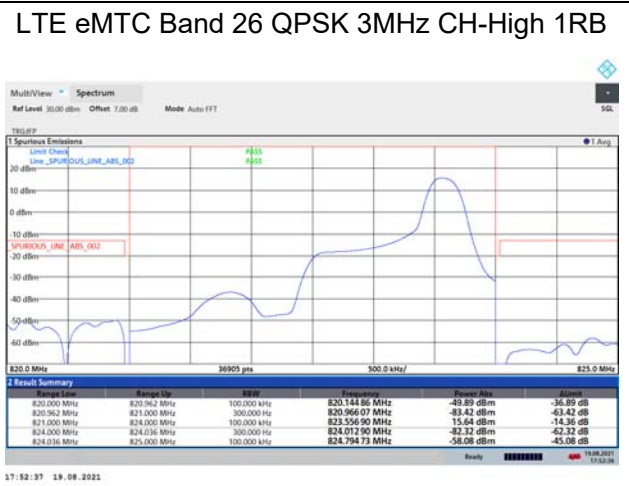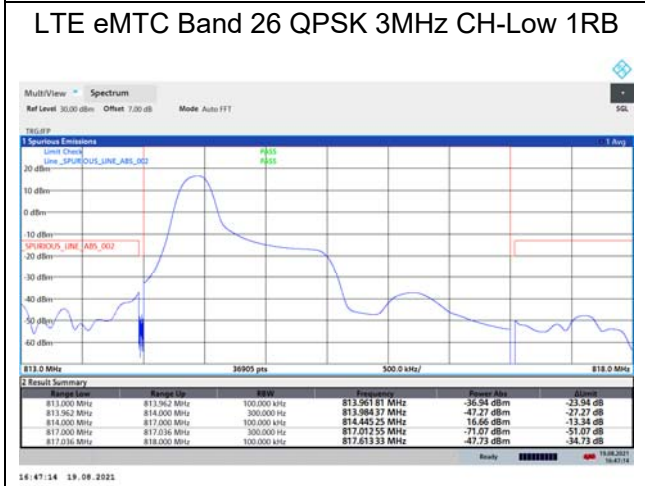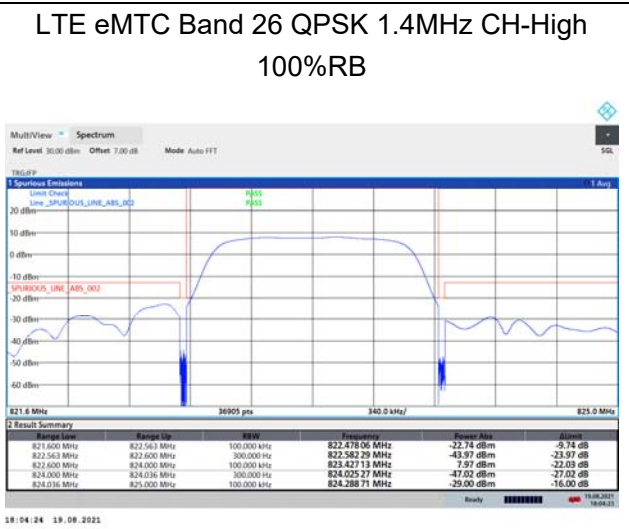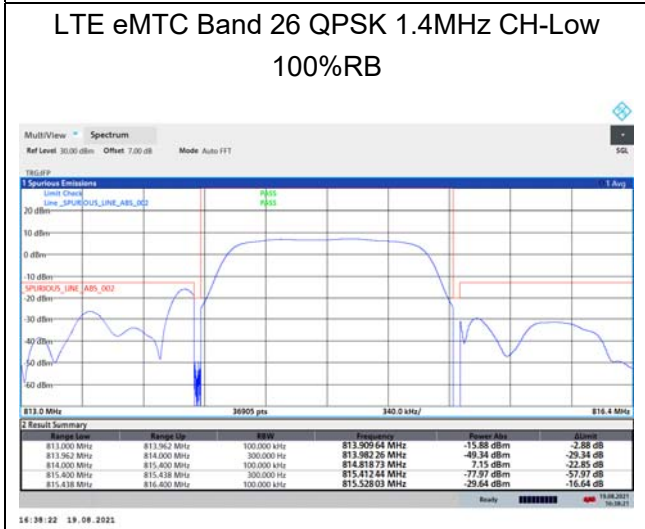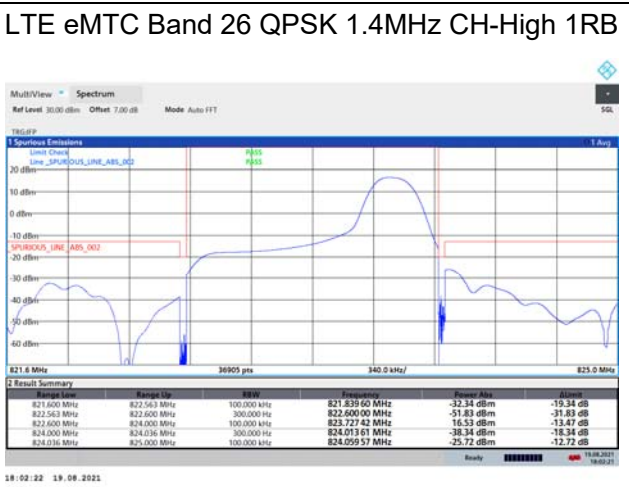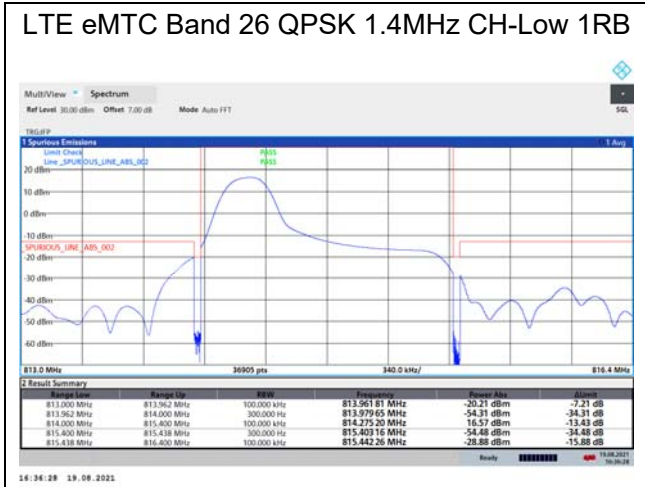

LTE eMTC Band 26 QPSK 3MHz CH-Low  
100%RB

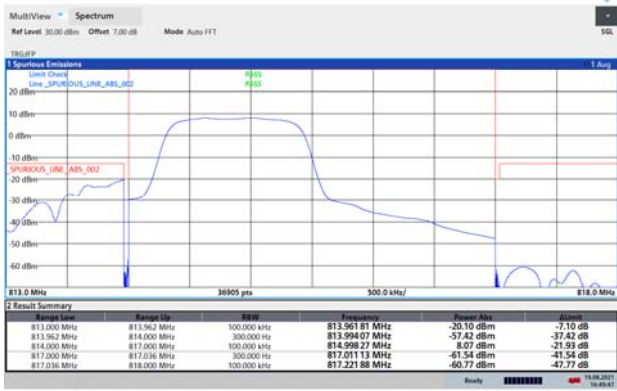


16:49:47 19.08.2021

LTE eMTC Band 26 QPSK 3MHz CH-High  
100%RB




17:55:47 19.08.2021

LTE eMTC Band 26 QPSK 5MHz CH-Low 1RB

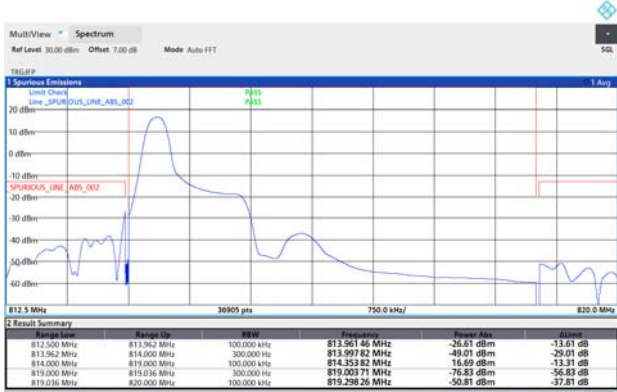

16:53:27 19.08.2021

LTE eMTC Band 26 QPSK 5MHz CH-High 1RB

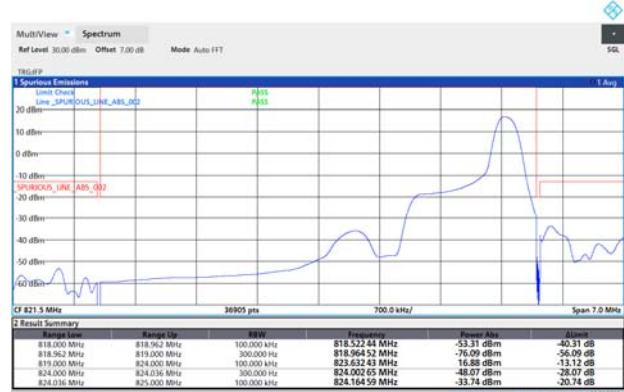

17:45:05 19.08.2021

LTE eMTC Band 26 QPSK 5MHz CH-Low  
100%RB



16:54:48 19.08.2021

LTE eMTC Band 26 QPSK 5MHz CH-High  
100%RB




17:48:27 19.08.2021


LTE eMTC Band 26 QPSK 10MHz CH-Low 1RB



LTE eMTC Band 26 QPSK 10MHz CH-High 1RB

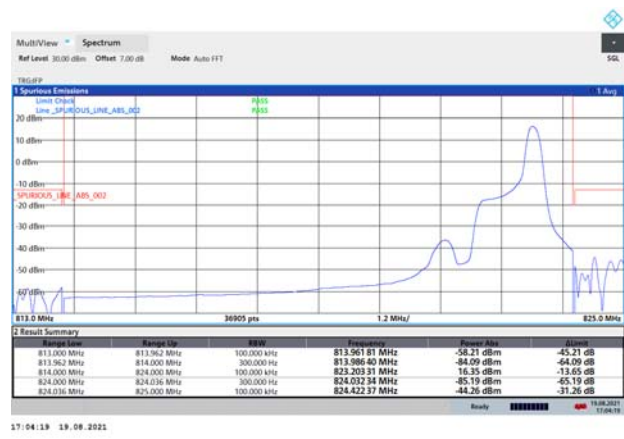

LTE eMTC Band 26 QPSK 10MHz CH-Low 100%RB

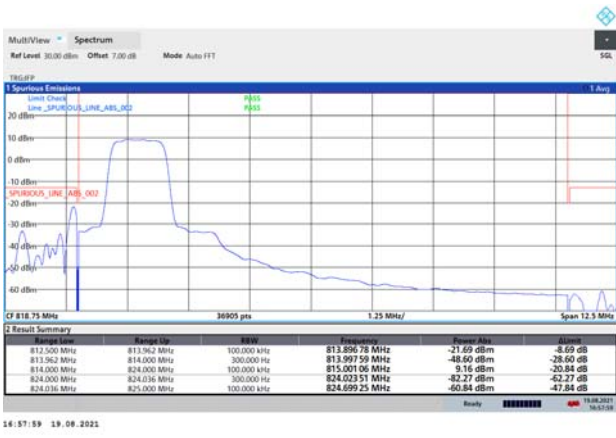

LTE eMTC Band 26 QPSK 10MHz CH-High 100%RB



LTE eMTC Band 26 16QAM 1.4MHz CH-Low 1RB



LTE eMTC Band 26 16QAM 1.4MHz CH-High 1RB







LTE eMTC Band 26 16QAM 1.4MHz CH-Low  
100%RB




LTE eMTC Band 26 16QAM 1.4MHz CH-High  
100%RB

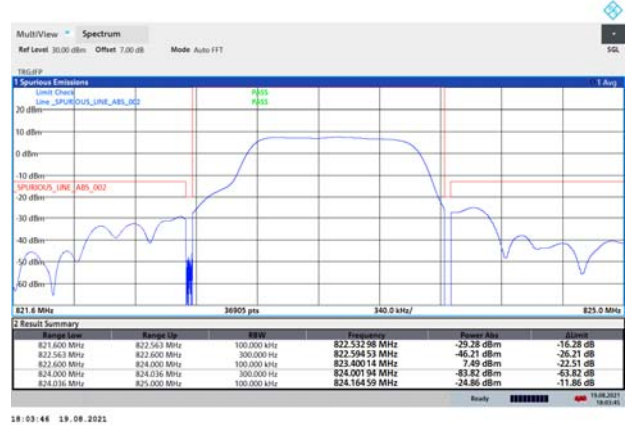


LTE eMTC Band 26 16QAM 3MHz CH-Low 1RB

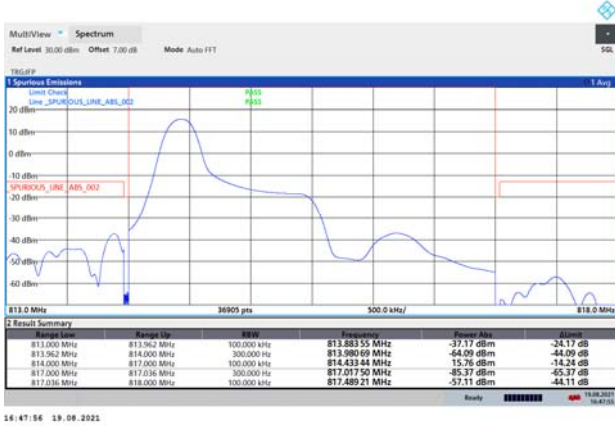

LTE eMTC Band 26 16QAM 3MHz CH-High 1RB

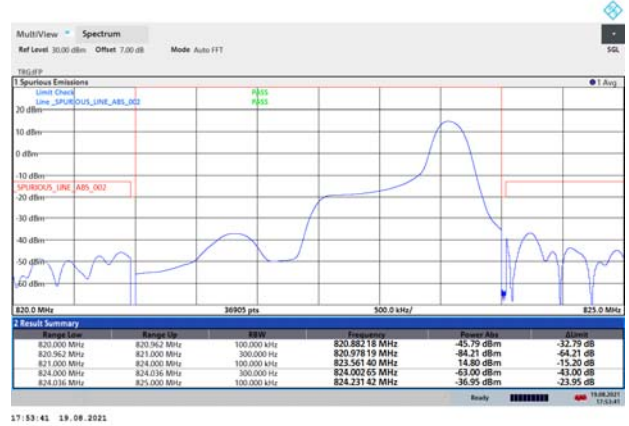


LTE eMTC Band 26 16QAM 3MHz CH-Low  
100%RB

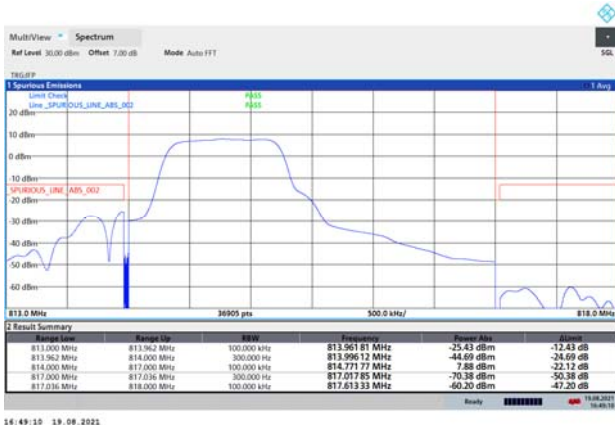

LTE eMTC Band 26 16QAM 3MHz CH-High  
100%RB



LTE eMTC Band 26 16QAM 5MHz CH-Low 1RB

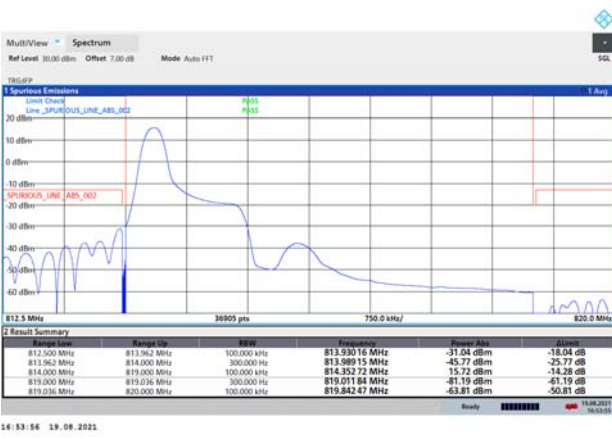

LTE eMTC Band 26 16QAM 5MHz CH-High 1RB




LTE eMTC Band 26 16QAM 5MHz CH-Low 100%RB



LTE eMTC Band 26 16QAM 5MHz CH-High 100%RB




LTE eMTC Band 26 16QAM 10MHz CH-Low 1RB

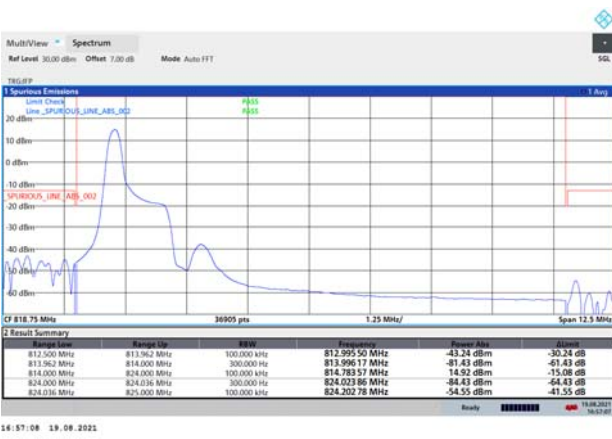

LTE eMTC Band 26 16QAM 10MHz CH-High 1RB




LTE eMTC Band 26 16QAM 10MHz CH-Low  
100%RB

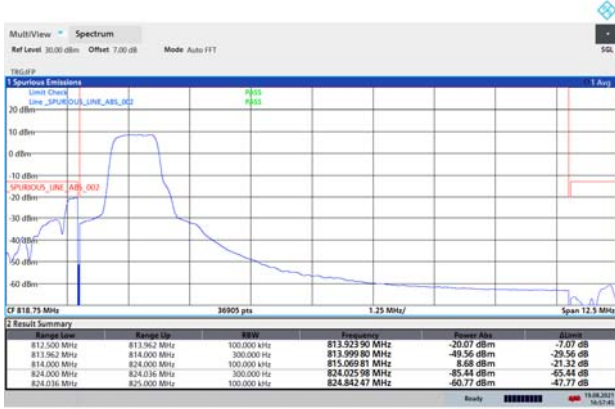

16:57:48 19. 08. 2021

LTE eMTC Band 26 16QAM 10MHz CH-High  
100%RB

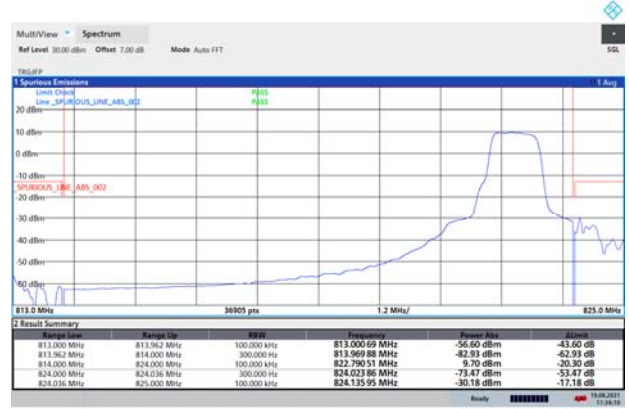

17:34:10 19. 08. 2021

#### 6.4. Peak-to-Average Power Ratio (PAPR)

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
LTE eMTC Band26	1.4MHz	QPSK	26740/819	27.47	17.45	10.02	≤13	PASS
		16QAM	26740/819	27.99	16.30	11.69	≤13	PASS
	3MHz	QPSK	26740/819	27.29	16.78	10.51	≤13	PASS
		16QAM	26740/819	28.07	17.82	10.25	≤13	PASS
	5MHz	QPSK	26740/819	28.20	18.49	9.71	≤13	PASS
		16QAM	26740/819	28.21	16.97	11.24	≤13	PASS
	10MHz	QPSK	26740/819	28.18	18.55	9.63	≤13	PASS
		16QAM	26740/819	28.84	17.71	11.13	≤13	PASS

### 6.5. Frequency Stability


LTE eMTC Band26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	11.01	1.72	0.01344	0.00210	PASS
Extreme (75°C)		7.85	8.68	0.00958	0.01060	PASS
Extreme (70°C)		11.55	9.83	0.01410	0.01200	PASS
Extreme (60°C)		13.09	6.64	0.01598	0.00811	PASS
Extreme (50°C)		11.51	8.51	0.01405	0.01039	PASS
Extreme (40°C)		14.61	7.21	0.01783	0.00881	PASS
Extreme (30°C)		6.70	8.08	0.00818	0.00986	PASS
Extreme (20°C)		16.03	6.48	0.01957	0.00792	PASS
Extreme (10°C)		17.96	17.29	0.02193	0.02111	PASS
Extreme (0°C)		7.00	11.04	0.00854	0.01348	PASS
Extreme (-10°C)		8.20	17.32	0.01001	0.02114	PASS
Extreme (-20°C)		13.06	3.86	0.01594	0.00472	PASS
Extreme (-30°C)		6.62	9.72	0.00808	0.01187	PASS
Extreme (-35°C)		14.64	13.50	0.01788	0.01648	PASS
25°C		LV	6.98	1.51	0.00852	0.00185
	HV	16.31	9.93	0.01992	0.01212	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	2.71	1.50	0.00331	0.00183	PASS
Extreme (75°C)		12.50	6.45	0.01527	0.00787	PASS
Extreme (70°C)		15.85	13.19	0.01935	0.01611	PASS
Extreme (60°C)		9.51	18.00	0.01162	0.02198	PASS
Extreme (50°C)		10.18	13.28	0.01244	0.01621	PASS
Extreme (40°C)		2.00	8.25	0.00244	0.01007	PASS
Extreme (30°C)		10.65	3.60	0.01300	0.00440	PASS
Extreme (20°C)		3.30	7.06	0.00403	0.00863	PASS
Extreme (10°C)		9.20	17.83	0.01124	0.02177	PASS
Extreme (0°C)		1.61	1.60	0.00197	0.00196	PASS
Extreme (-10°C)		2.00	2.68	0.00244	0.00327	PASS
Extreme (-20°C)		14.28	6.95	0.01744	0.00849	PASS
Extreme (-30°C)		2.19	12.16	0.00267	0.01485	PASS
Extreme (-35°C)		15.79	13.12	0.01929	0.01602	PASS
25°C		LV	17.12	11.93	0.02090	0.01457

Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					Verdict
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	11.20	2.12	0.01367	0.00259	PASS
Extreme (75°C)		7.33	17.91	0.00895	0.02187	PASS
Extreme (70°C)		10.22	8.72	0.01248	0.01064	PASS
Extreme (60°C)		8.38	16.18	0.01024	0.01976	PASS
Extreme (50°C)		15.56	5.13	0.01900	0.00626	PASS
Extreme (40°C)		3.59	2.03	0.00438	0.00248	PASS
Extreme (30°C)		10.21	17.06	0.01246	0.02083	PASS
Extreme (20°C)		7.29	11.02	0.00890	0.01345	PASS
Extreme (10°C)		2.97	13.19	0.00363	0.01610	PASS
Extreme (0°C)		3.18	5.81	0.00389	0.00709	PASS
Extreme (-10°C)		2.31	15.36	0.00282	0.01875	PASS
Extreme (-20°C)		17.70	4.48	0.02161	0.00547	PASS
Extreme (-30°C)		15.06	12.71	0.01839	0.01552	PASS
Extreme (-35°C)		13.70	5.80	0.01673	0.00709	PASS
25°C		LV	11.50	16.80	0.01404	0.02052
	HV	6.02	8.89	0.00735	0.01086	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					Verdict
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	1.55	7.22	0.00189	0.00882	PASS
Extreme (75°C)		4.19	14.94	0.00511	0.01824	PASS
Extreme (70°C)		7.36	4.14	0.00899	0.00506	PASS
Extreme (60°C)		10.01	15.94	0.01222	0.01946	PASS
Extreme (50°C)		1.59	15.85	0.00194	0.01936	PASS
Extreme (40°C)		2.82	9.61	0.00344	0.01173	PASS
Extreme (30°C)		5.91	5.07	0.00722	0.00619	PASS
Extreme (20°C)		10.53	16.33	0.01285	0.01994	PASS
Extreme (10°C)		4.11	16.21	0.00502	0.01979	PASS
Extreme (0°C)		1.00	11.83	0.00122	0.01445	PASS
Extreme (-10°C)		15.98	17.00	0.01951	0.02075	PASS
Extreme (-20°C)		2.05	10.16	0.00251	0.01241	PASS
Extreme (-30°C)		3.14	6.09	0.00383	0.00743	PASS
Extreme (-35°C)		5.86	13.94	0.00715	0.01702	PASS
25°C		LV	10.20	17.26	0.01245	0.02108
	HV	12.43	7.20	0.01517	0.00879	PASS


### 6.6. Spurious Emissions at Antenna Terminals

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.  
The signal beyond the limit is carrier.


LTE eMTC Band 26 1.4MHz CH Low  
9kHz~30GHz

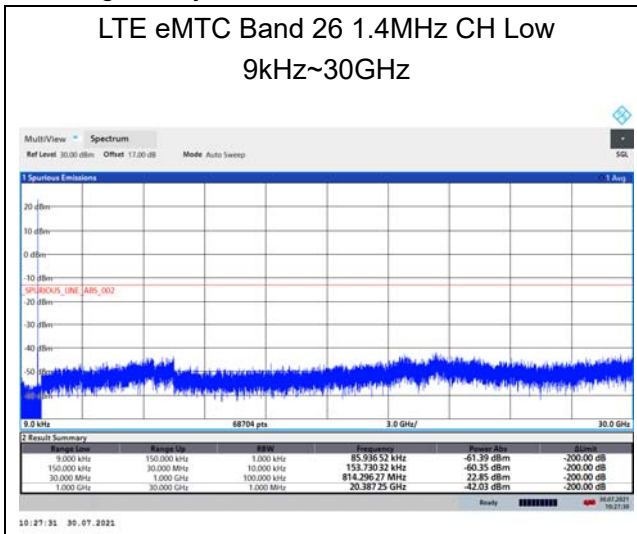


LTE eMTC Band 26 3MHz CH Low 9kHz~30GHz

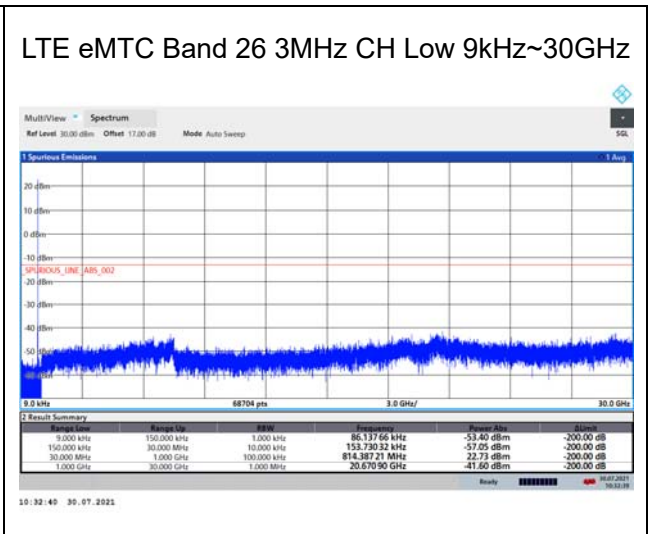


LTE eMTC Band 26 1.4MHz CH Middle  
9kHz~30GHz

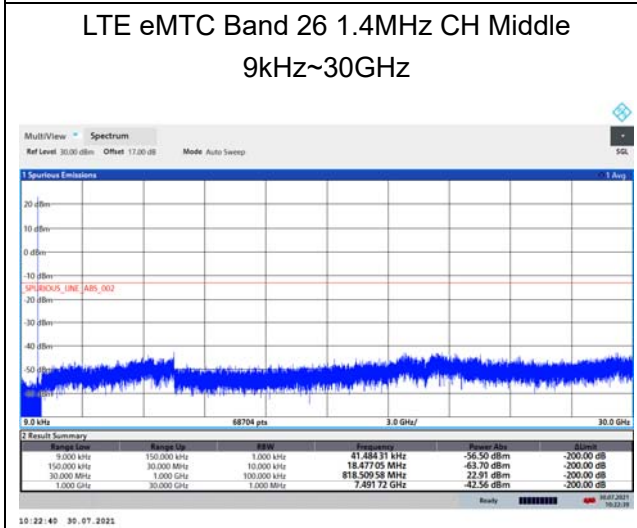


LTE eMTC Band 26 3MHz CH Middle  
9kHz~30GHz




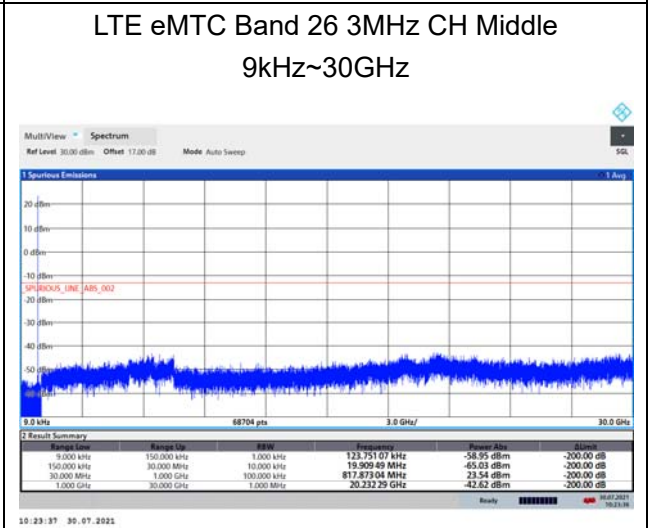


LTE eMTC Band 26 1.4MHz CH High  
9kHz~30GHz

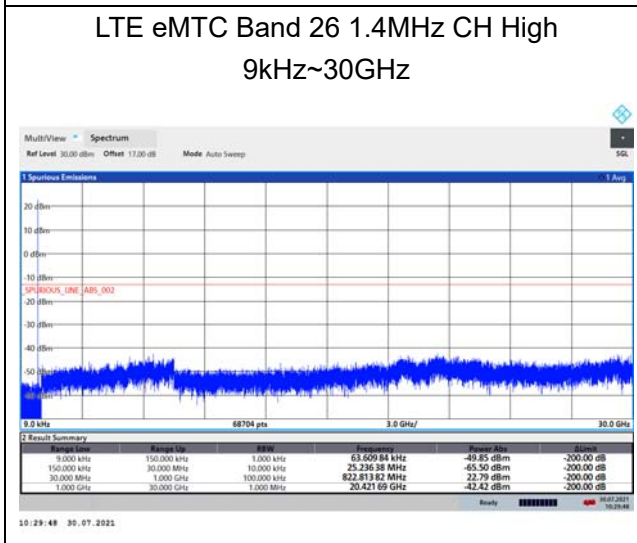

LTE eMTC Band 26 3MHz CH High 9kHz~30GHz

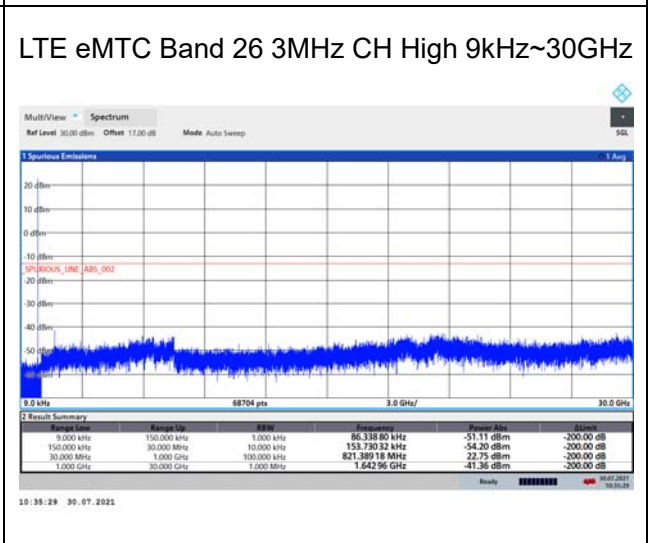

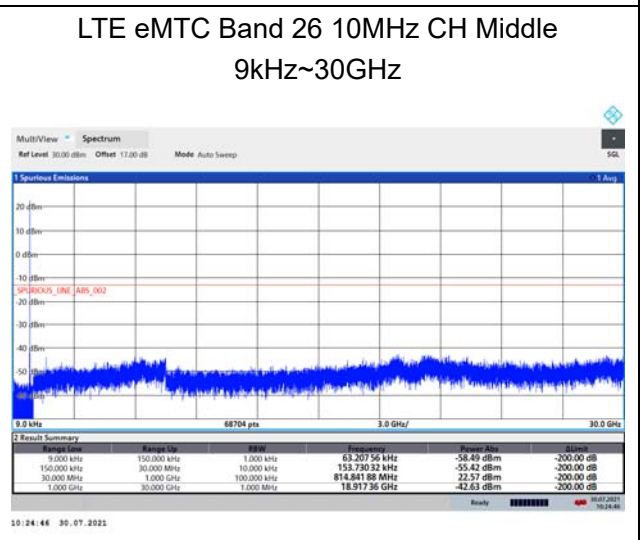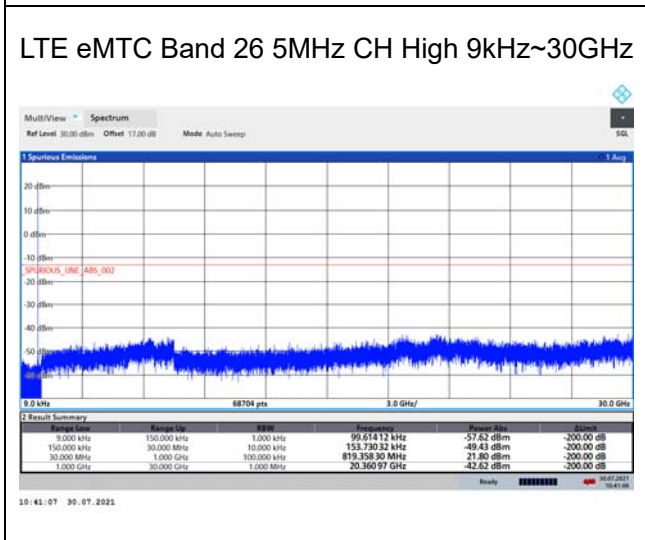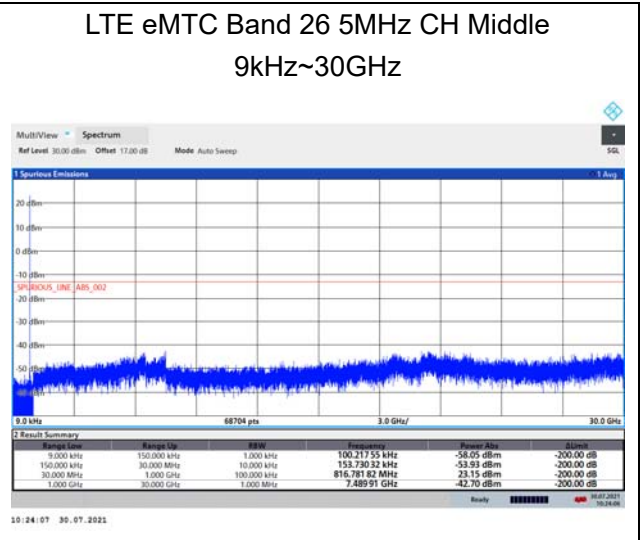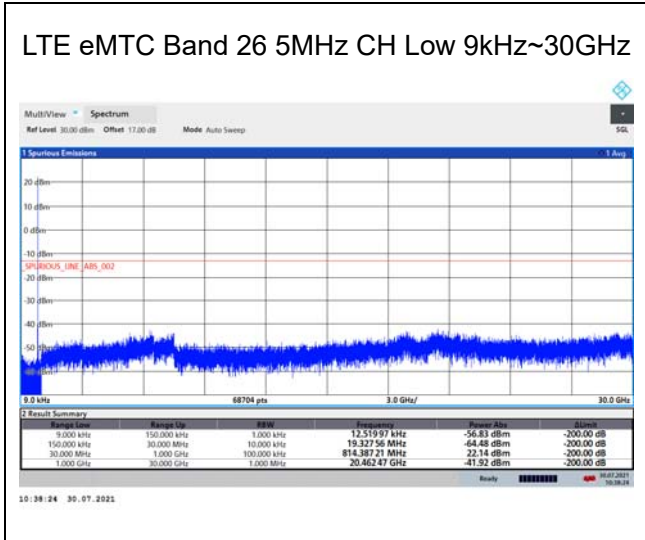



## 6.7. Radiated Spurious Emission

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE eMTC Band 26 1.4MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.00	-62.87	1.70	8.70	Horizontal	-58.02	-13.00	45.02	225
3	2457.00	-57.47	2.30	12.00	Horizontal	-49.92	-13.00	36.92	90
4	3276.00	-63.35	2.20	13.10	Horizontal	-54.60	-13.00	41.60	45
5	4095.00	-55.29	3.00	12.50	Horizontal	-47.94	-13.00	34.94	135
6	4914.00	-41.56	3.10	12.50	Horizontal	-34.31	-13.00	21.31	135
7	5733.00	-45.45	3.40	12.50	Horizontal	-38.50	-13.00	25.50	315
8	6552.00	-51.73	3.80	11.50	Horizontal	-46.18	-13.00	33.18	90
9	7371.00	-54.70	4.20	12.20	Horizontal	-48.85	-13.00	35.85	90
10	8190.00	-54.25	4.30	12.30	Horizontal	-48.40	-13.00	35.40	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

LTE eMTC Band 26 5MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.00	-62.63	1.70	8.70	Horizontal	-57.78	-13.00	44.78	225
3	2457.00	-57.57	2.30	12.00	Horizontal	-50.02	-13.00	37.02	90
4	3269.63	-63.42	2.20	13.10	Horizontal	-54.67	-13.00	41.67	90
5	4086.00	-57.83	3.00	12.50	Horizontal	-50.48	-13.00	37.48	90
6	4903.00	-43.21	3.10	12.50	Horizontal	-35.96	-13.00	22.96	270
7	5720.00	-47.18	3.40	12.50	Horizontal	-40.23	-13.00	27.23	180
8	6538.00	-52.19	3.80	11.50	Horizontal	-46.64	-13.00	33.64	45
9	7355.00	-55.57	4.20	12.20	Horizontal	-49.72	-13.00	36.72	180
10	8172.50	-53.29	4.30	12.30	Horizontal	-47.44	-13.00	34.44	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

LTE eMTC Band 26 10MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.00	-63.52	1.70	8.70	Horizontal	-58.67	-13.00	45.67	315
3	2457.00	-56.38	2.30	12.00	Horizontal	-48.83	-13.00	35.83	45
4	3259.00	-65.45	2.20	13.10	Horizontal	-56.70	-13.00	43.70	180
5	4070.00	-55.34	3.00	12.50	Horizontal	-47.99	-13.00	34.99	45
6	4884.00	-42.65	3.10	12.50	Horizontal	-35.40	-13.00	22.40	0
7	5698.00	-46.12	3.40	12.50	Horizontal	-39.17	-13.00	26.17	225
8	6512.00	-52.28	3.80	11.50	Horizontal	-46.73	-13.00	33.73	45
9	7326.00	-55.77	4.20	12.20	Horizontal	-49.92	-13.00	36.92	180
10	8140.00	-52.90	4.30	12.30	Horizontal	-47.05	-13.00	34.05	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## 7. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2021-05-15	2022-05-14
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Climate Chamber	Weiss	VT4002	58226119450 010	2021-05-15	2022-05-14
Spectrum Analyzer	Key sight	N9010A	MY50210259	2021-05-15	2022-05-14
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2021-05-15	2022-05-14
Signal Analyzer	R&S	FSV3030	101411	2020-12-13	2021-12-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2021-12-15
Horn Antenna	R&S	HF907	102723	2020-08-11	2023-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2023-06-19
Signal generator	R&S	SMB 100A	180235	2021-05-15	2022-05-14
Climatic Chamber	ESPEC	SU-242	93000506	2020-12-13	2021-12-12
Preamplifier	R&S	SCU18	102327	2021-05-15	2022-05-14
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2021-05-15	2022-05-14
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*

## ANNEX A: The EUT Appearance

The EUT Appearance is submitted separately.

## ANNEX B: Test Setup Photos

The Test Setup Photos is submitted separately.

## **ANNEX C: Product Change Description (Variant 1)**

The Product Change Description are submitted separately.

## **ANNEX D: Product Change Description (Variant 2)**

The Product Change Description are submitted separately.