

# RF MEASUREMENT REPORT

---

**FCC ID:** XMR2022RG502NA  
**Application:** Quectel Wireless Solutions Co., Ltd  
**Product:** 5G Sub-6 GHz LGA Module  
**Model No.:** RG520N-NA  
**Brand Name:** Quectel  
**FCC Rule Part(s):** Part 90 Subpart S  
**Test Procedure(s):** ANSI C63.26: 2015  
**Result:** Complies  
**Test Date:** 2022-04-26 ~ 2022-06-15

**Reviewed By:**

\_\_\_\_\_  
Sunny Sun

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

### Revision History

Report No.	Version	Description	Issue Date	Note
2203RSU046-U8	Rev. 01	Initial Report	2022-08-07	Valid

---

## CONTENTS

Description	Page
<b>1. General Information.....</b>	<b>5</b>
1.1. Applicant.....	5
1.2. Manufacturer.....	5
1.3. Testing Facility.....	5
1.4. Product Information.....	6
1.5. Radio Specification under Test.....	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology.....	8
1.8. Device Capabilities.....	9
<b>2. Test Configuration.....</b>	<b>10</b>
2.1. Test Mode.....	10
2.2. Test System Connection Diagram.....	10
2.3. Test Environment Condition.....	10
<b>3. Measuring Instrument.....</b>	<b>11</b>
<b>4. Decision Rules and Measurement Uncertainty.....</b>	<b>13</b>
4.1. Decision Rules.....	13
4.2. Measurement Uncertainty.....	13
<b>5. Test Result.....</b>	<b>14</b>
5.1. Summary.....	14
5.2. Occupied Bandwidth Measurement.....	15
5.2.1. Test Limit.....	15
5.2.2. Test Procedure.....	15
5.2.3. Test Setting.....	15
5.2.4. Test Setup.....	15
5.2.5. Test Result.....	15
5.3. Frequency Stability Measurement.....	16
5.3.1. Test Limit.....	16
5.3.2. Test Procedure.....	16
5.3.3. Test Setting.....	16
5.3.4. Test Setup.....	17
5.3.5. Test Result.....	17
5.4. Conducted Output Power Measurement.....	18
5.4.1. Test Limit.....	18
5.4.2. Test Procedure.....	18

5.4.3.	Test Setting .....	18
5.4.4.	Test Setup .....	18
5.4.5.	Test Result .....	18
5.5.	Band Edge Measurement .....	19
5.5.1.	Test Limit .....	19
5.5.2.	Test Procedure .....	19
5.5.3.	Test Setting .....	19
5.5.4.	Test Setup .....	20
5.5.5.	Test Result .....	20
5.6.	Conducted Spurious Emissions Measurement .....	21
5.6.1.	Test Limit .....	21
5.6.2.	Test Procedure .....	21
5.6.3.	Test Setting .....	21
5.6.4.	Test Setup .....	22
5.6.5.	Test Result .....	22
5.7.	Radiated Spurious Emissions Measurement .....	23
5.7.1.	Test Limit .....	23
5.7.2.	Test Procedure .....	23
5.7.3.	Test Setting .....	23
5.7.4.	Test Setup .....	24
5.7.5.	Test Result .....	24
<b>Appendix A - Test Result .....</b>		<b>25</b>
A.1	Occupied Bandwidth Test Result .....	25
A.2	Frequency Stability Test Result .....	29
A.3	Conducted Output Power Test Result .....	30
A.4	Band Edge Test Result .....	48
A.5	Conducted Spurious Emissions Test Result .....	51
A.6	Radiated Spurious Emissions Test Result .....	54
<b>Appendix B - Test Setup Photograph .....</b>		<b>55</b>
<b>Appendix C - EUT Photograph .....</b>		<b>56</b>



#### 1.4. Product Information

Product Name	5G Sub-6 GHz LGA Module
Model No.	RG520N-NA
Brand Name	Quectel
IMEI	Conducted Measurement 1: 863109050007421 Conducted Measurement 2: 863109050005151 Radiated Measurement: 863109050007306
E-UTRA Band	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
5G NR Band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n66, n71, n77, n78
Operating Temperature	-30 ~ 75 °C
Power Type	3.3 ~ 4.4Vdc, typical 3.8Vdc
Remark: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.	

#### 1.5. Radio Specification under Test

Single Band	n26
EN-DC Band	n26
FDD T <sub>x</sub> Frequency Range	814 ~ 824 MHz
FDD R <sub>x</sub> Frequency Range	859 ~ 869 MHz
Support Bandwidth	5, 10, 15, 20MHz
SCS for NR cell	FDD Band: 15kHz
Modulation	UL up to 256QAM, DL up to 256QAM
Remark: <ol style="list-style-type: none"> <li>For other features of this EUT, test report will be issued separately.</li> <li>LTE band 26 transmit frequency for part 90 rule is 814 ~ 824MHz and part 22 rule is 824 ~ 849MHz. ERP over 15MHz bandwidth complies the ERP limit line of part 22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.</li> </ol>	

**1.6. Description of Available Antennas**

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
n2	1850 ~ 1910	Dipole	1.37
n5	824 ~ 849		1.18
n7	2500 ~ 2570		2.07
n12	699 ~ 716		1.18
n13	777 ~ 787		1.18
n14	788 ~ 798		1.37
n25	1850 ~ 1915		1.18
n26	814-849		1.11
n30	2305 ~ 2315		2.07
n38	2570 ~ 2620		1.37
n41	2496 ~ 2690		1.18
n66	1710 ~ 1780		1.37
n71	663 ~ 698		1.18
n77	3700 ~ 3980		0.58
n78	3300 ~ 3800		0.58

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

### **1.7. Test Methodology**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP



### **1.8. Device Capabilities**

PI/2 BPSK modulation applied for 5G NR band frequencies and has the same tune up power as QPSK modulations.

The DFT-s-OFDM and CP-OFDM waveforms were investigated, and DFT-s-OFDM was found to be the worst case.

The worst-case scenario for all measurements is based on an engineering evaluation and QPSK was observed as the worst one and set for all conducted and radiated. Output power measurements were measured on PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM modulations.


For EN-DC mode, 5G NR FR1 bands are tested in this report (Output Power, Conducted Band Edge, Radiated Spurious Emissions), all the other RF bands are tested in the other reports separately.

## 2. Test Configuration

### 2.1. Test Mode

Test Item	Test Channel	Channel Bandwidth (MHz)	Modulation Type	RB#
Output Power & EIRP	L, M, H	5, 10, 15, 20	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1/Half/Full RB
Emission Bandwidth	M	5, 10, 15, 20	QPSK, 16QAM, 64QAM, 256QAM	Full RB
Frequency Stability	M	20	QPSK	Full RB
Band Edge / Mask	L, H	5, 10, 15, 20	QPSK	1 RB/Full RB
Conducted Spurious Emissions	L, M, H	5, 10, 15, 20	QPSK	1 RB
Radiated Spurious Emissions	L, M, H	5	QPSK	1 RB

### 2.2. Test System Connection Diagram

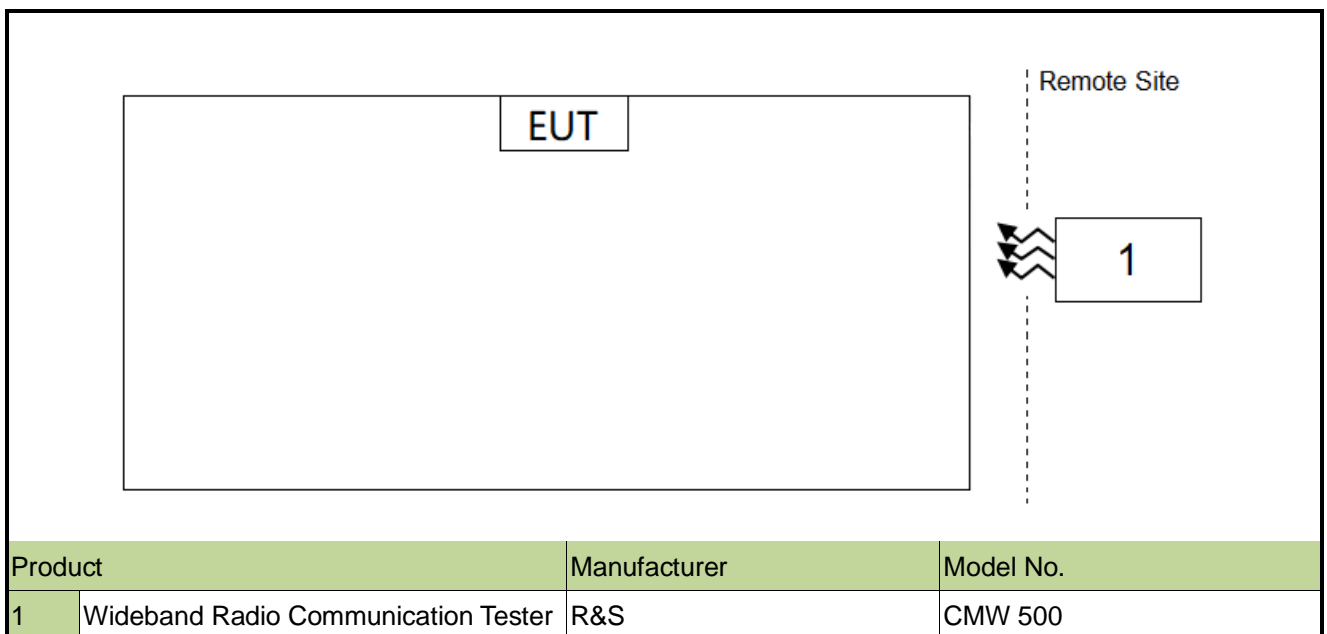

### 2.3. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

### 3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2022-12-09	SIP-SR1
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2023-06-01	SIP-SR1
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2022-10-31	SIP-SR1
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2022-09-07	SIP-SR1
Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2022-09-07	SIP-SR1
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2022-10-10	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06453	1 year	2023-06-01	SIP-SR1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2023-01-06	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06903	1 year	2022-11-23	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06904	1 year	2022-11-23	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06905	N/A	N/A	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06906	N/A	N/A	SIP-SR1
Low-Profile Modular Power System Mainframe	Keysight	N6700C	MRTSUE06907	N/A	N/A	SIP-SR1
FR1 Switching Unit	Keysight	C8880A	MRTSUE06908	N/A	N/A	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2022-12-29	SIP-SR1
Temperature Chamber	BAOYT	BYG-80CL	MRTSUE06932	1 year	2023-02-27	SIP-SR1
Shielding Room	MIX-BEP	SIP-SR1	MRTSUE06948	N/A	N/A	SIP-SR1
Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06954	3 years	2024-06-02	SIP-SR1
Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06955	3 years	2024-06-02	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06956	1 year	2023-06-01	SIP-SR1
Common Interface Unit	Keysight	E7770A	MRTSUE06957	N/A	N/A	SIP-SR1
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2023-06-08	SIP-AC3
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022-12-29	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2023-06-01	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2022-11-09	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2022-10-31	SIP-AC3
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2022-09-07	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2022-09-12	SIP-AC3
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2023-06-01	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2022-11-02	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2022-11-28	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2023-01-13	SIP-AC3

Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2023-01-13	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2022-08-26	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2022-12-23	SIP-AC3
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2023-03-14	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2022-12-09	SIP-AC3
Directional Coupler	ar	DC7200A	MRTSUE06147	N/A	N/A	SIP
Directional Coupler	ar	DC6080A	MRTSUE06148	N/A	N/A	SIP
Directional Coupler	narda	4226-10	MRTSUE06564	1 year	2022-10-11	SIP
Directional Coupler	PULSAR	CS10-23-436/20	MRTSUE06846	1 year	2023-06-02	SIP
Directional Coupler	PULSAR	CS10-23-436/20	MRTSUE06848	1 year	2023-06-02	SIP
Attenuator	MVE	MVE2213	MRTSUE11055	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11056	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11057	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11058	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11059	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11060	1 year	2023-06-09	SIP

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software

## 4. Decision Rules and Measurement Uncertainty

### 4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Radiated Spurious Emissions</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
<b>Conducted Spurious Emissions</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%
<b>Frequency Stability</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 76.2Hz

## 5. Test Result

### 5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
2.1049	Occupied Bandwidth	Conducted	Pass
2.1055, 90.213	Frequency Stability		Pass
90.635	Conducted Output Power		Pass
2.1051, 90.691(a)	Band Edge		Pass
2.1051, 90.691(a)	Spurious Emission		Pass
2.1053, 90.691(a)	Spurious Emissions	Radiated	Pass

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

## 5.2. Occupied Bandwidth Measurement

### 5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

### 5.2.4. Test Setup

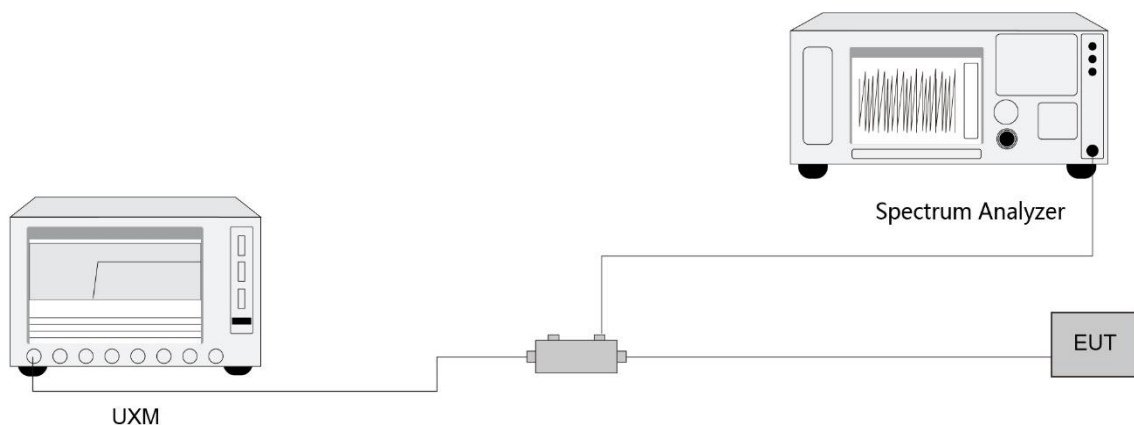

### 5.2.5. Test Result

Refer to Appendix A.1.

### 5.3. Frequency Stability Measurement

#### 5.3.1. Test Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 5.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.6

#### 5.3.3. Test Setting

##### **Frequency Stability Under Temperature Variations:**

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.


##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.



### 5.3.4. Test Setup

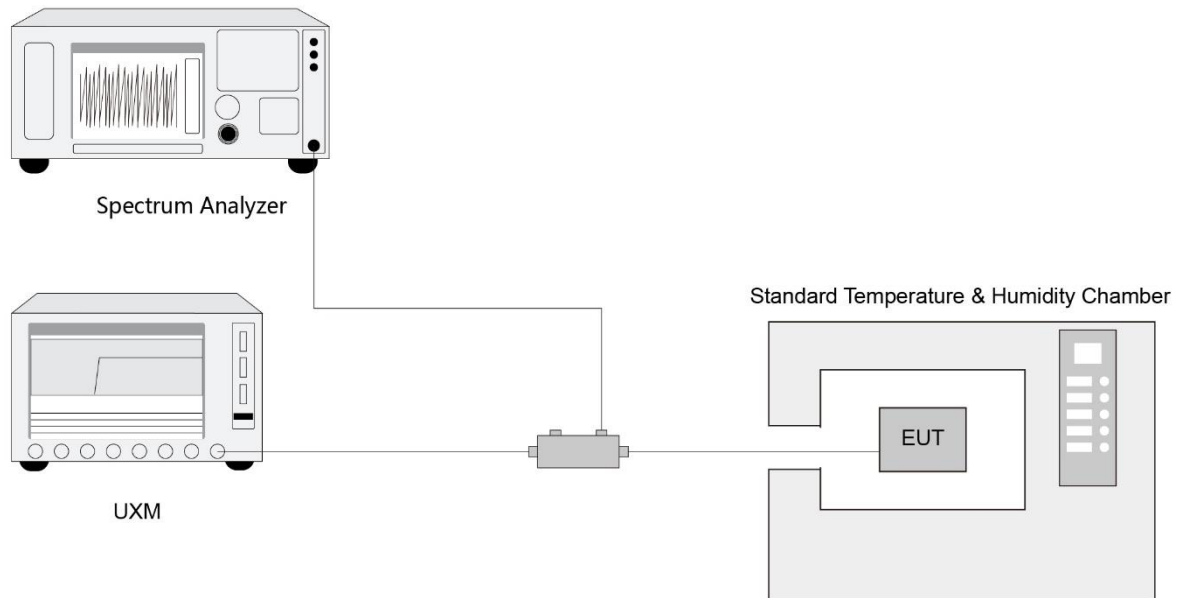

### 5.3.5. Test Result

Refer to Appendix A.2.

## 5.4. Conducted Output Power Measurement

### 5.4.1. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).


### 5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

### 5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 5.4.4. Test Setup

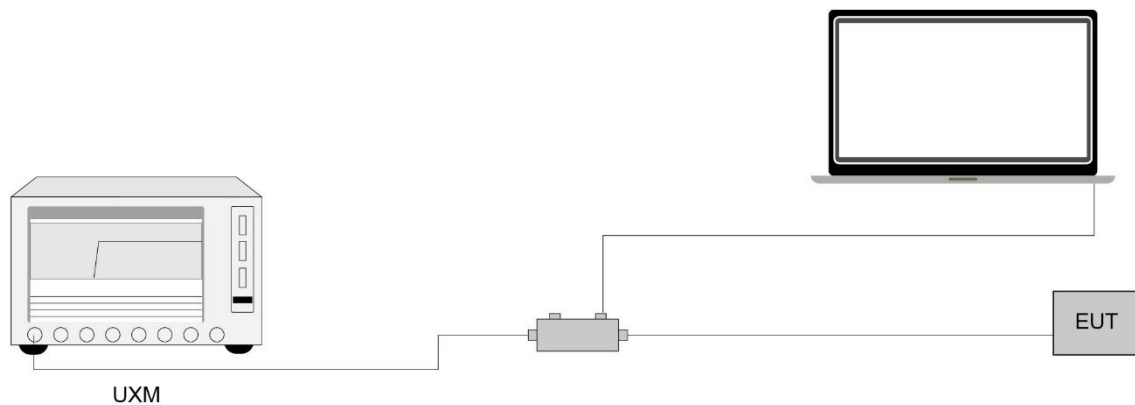

### 5.4.5. Test Result

Refer to Appendix A.3.

## 5.5. Band Edge Measurement

### 5.5.1. Test Limit

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}(f/6.1)$  decibels or  $50 + 10 \text{ Log}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

### 5.5.2. Test Procedure


ANSI C63.26-2015 - Section 5.7

### 5.5.3. Test Setting

1. Set the analyzer frequency to low or high channel
2.  $\text{RBW} \geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3.  $\text{VBW} \geq 3 \cdot \text{RBW}$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to “free run.”
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to

increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

#### 5.5.4. Test Setup

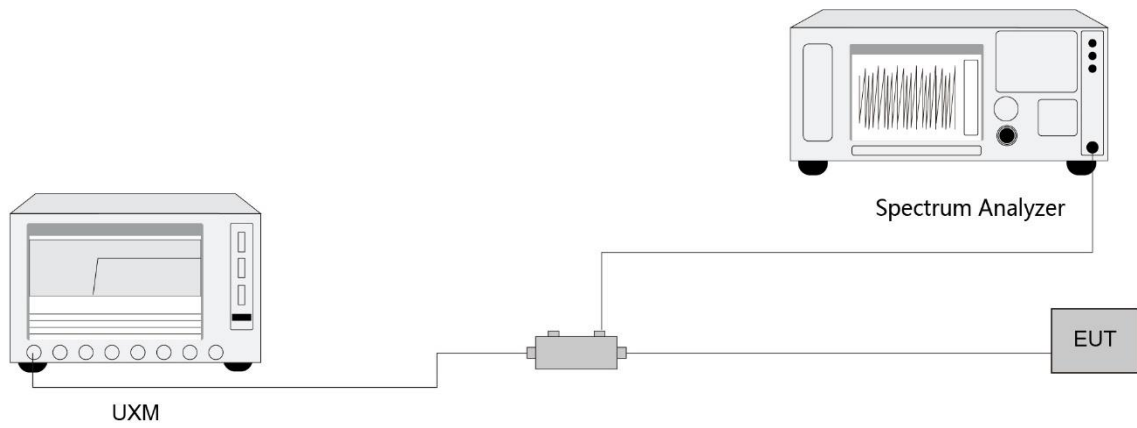

#### 5.5.5. Test Result

Refer to Appendix A.4.

## **5.6. Conducted Spurious Emissions Measurement**

### **5.6.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


### **5.6.2. Test Procedure**

ANSI C63.26-2015 - Section 5.7

### **5.6.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq$  3\*RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.6.4. Test Setup

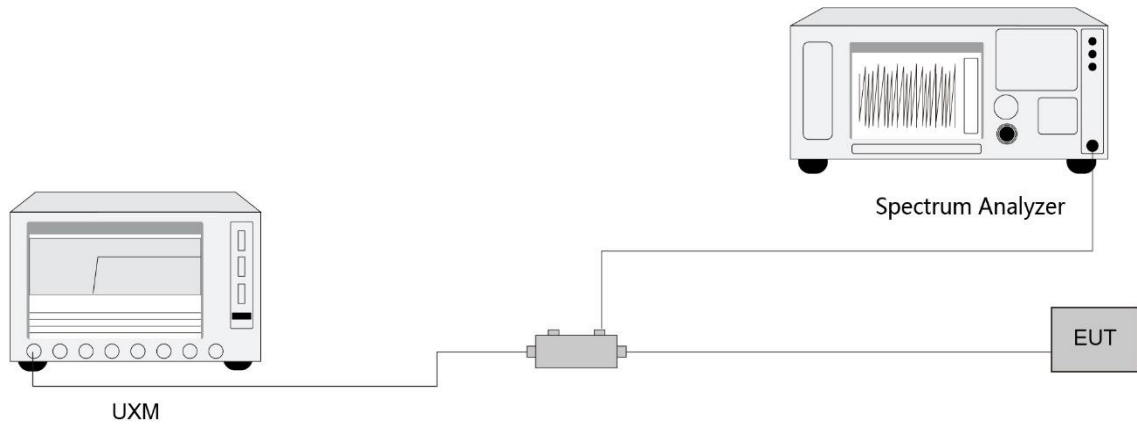

### 5.6.5. Test Result

Refer to Appendix A.5.

## **5.7. Radiated Spurious Emissions Measurement**

### **5.7.1. Test Limit**

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

$E$  (dB $\mu$ V/m) = EIRP (dBm) -  $20 \log D$  + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu$ V/m.

### **5.7.2. Test Procedure**


ANSI C63.26-2015 - Section 5.2.7 & 5.5

### **5.7.3. Test Setting**


1. RBW = 1MHz
2. VBW  $\geq 3 \times$  RBW
3. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

### 5.7.4. Test Setup

#### Below 1GHz Test Setup:

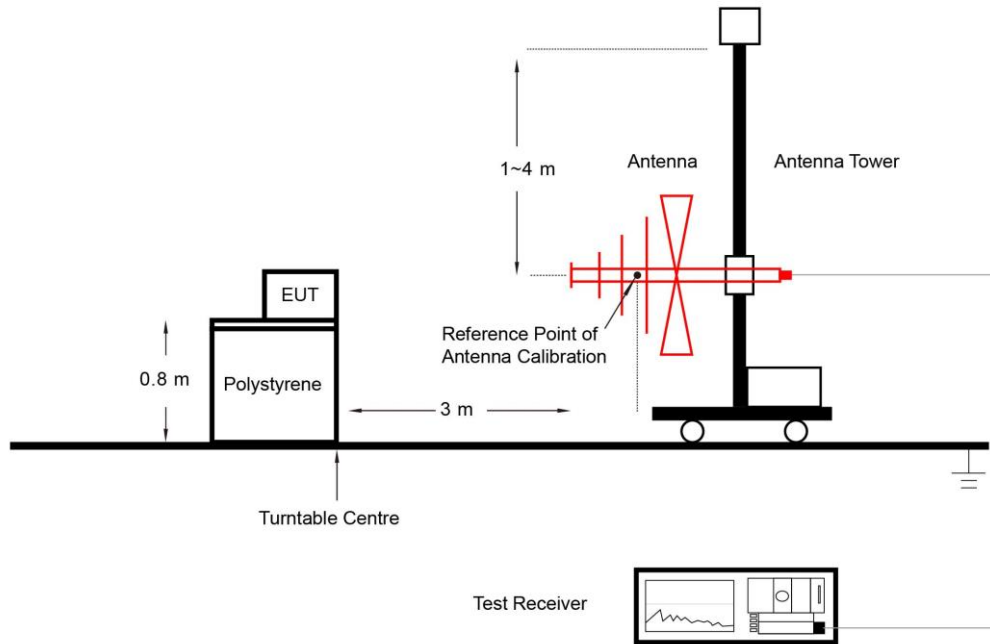

#### Above 1GHz Test Setup:

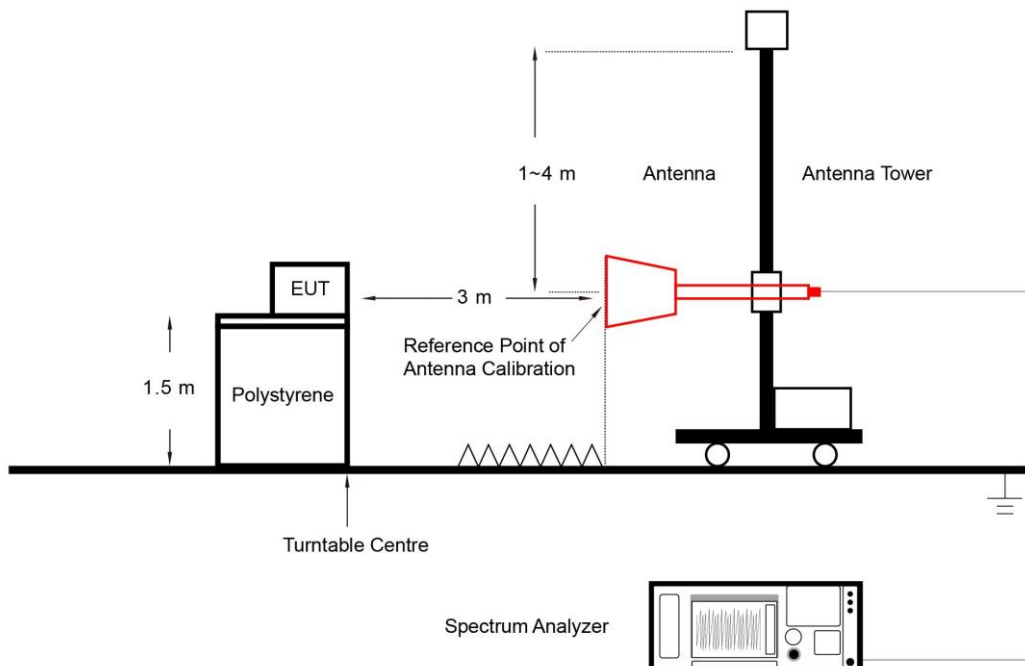

### 5.7.5. Test Result

Refer to Appendix A.6.



## Appendix A - Test Result


### A.1 Occupied Bandwidth Test Result

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/09	Test Band	NR n26


Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
<b>PI/2 BPSK</b>		
819.0	5	4.48
819.0	10	8.92
821.5	15	13.39
824.0	20	17.83
<b>QPSK</b>		
819.0	5	4.47
819.0	10	8.93
821.5	15	13.46
824.0	20	17.80
<b>16QAM</b>		
819.0	5	4.47
819.0	10	8.93
821.5	15	13.41
824.0	20	17.84
<b>64QAM</b>		
819.0	5	4.47
819.0	10	8.92
821.5	15	13.39
824.0	20	17.81
<b>256QAM</b>		
819.0	5	4.48
819.0	10	8.92
821.5	15	13.40
824.0	20	17.81

99% Bandwidth - PI/2 BPSK


5MHz Channel Bandwidth

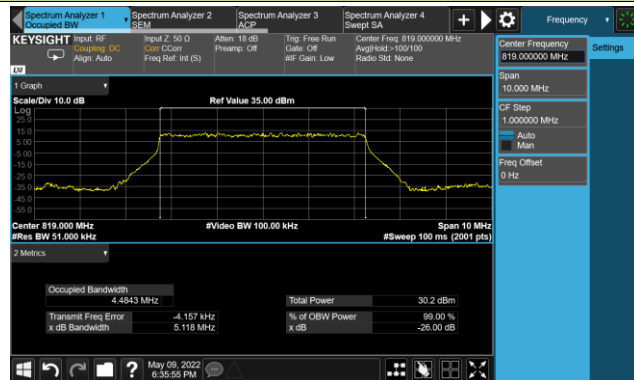


10MHz Channel Bandwidth

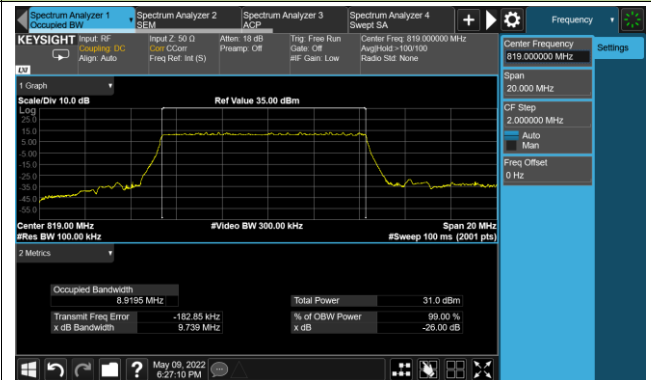

15MHz Channel Bandwidth

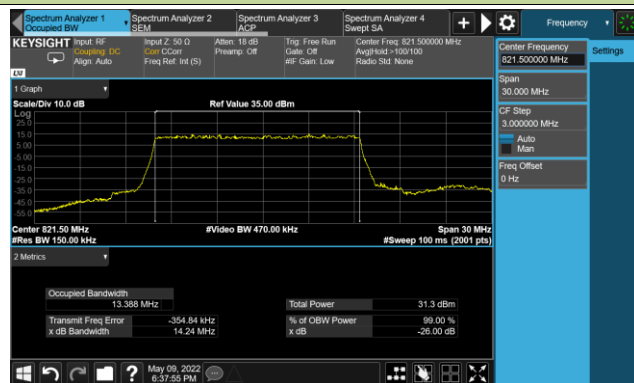


20MHz Channel Bandwidth

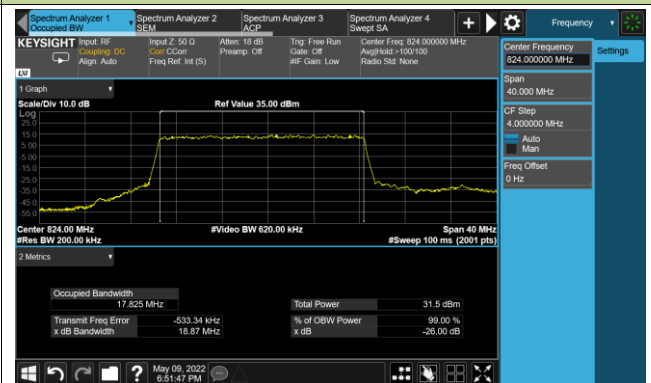


99% Bandwidth - QPSK


5MHz Channel Bandwidth

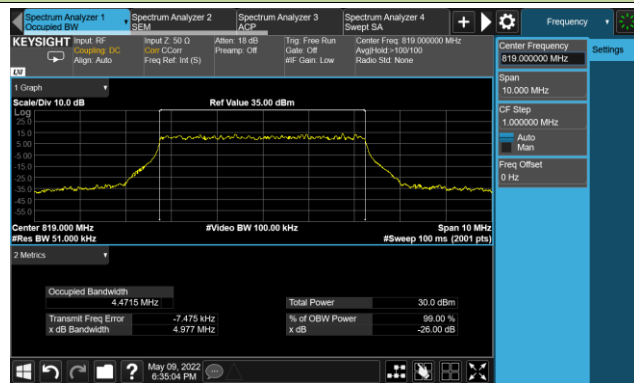


10MHz Channel Bandwidth

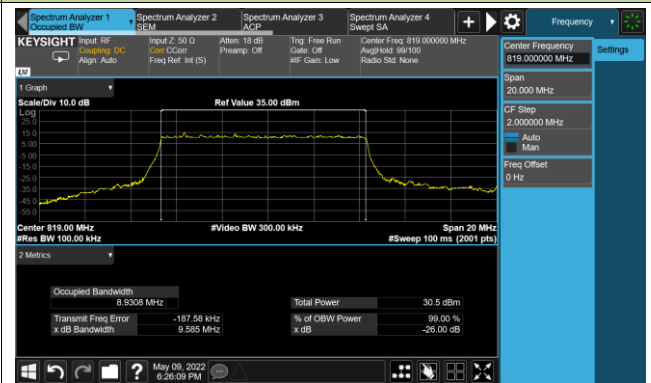

15MHz Channel Bandwidth

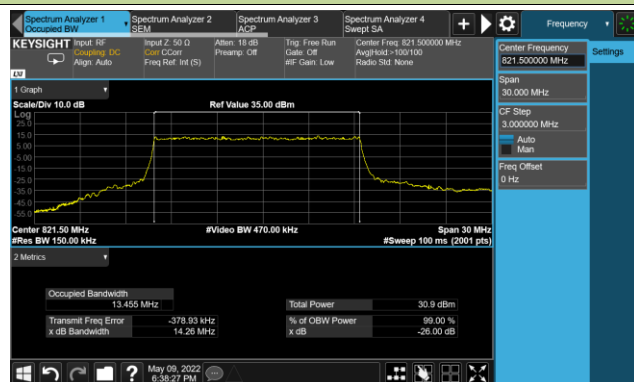


20MHz Channel Bandwidth

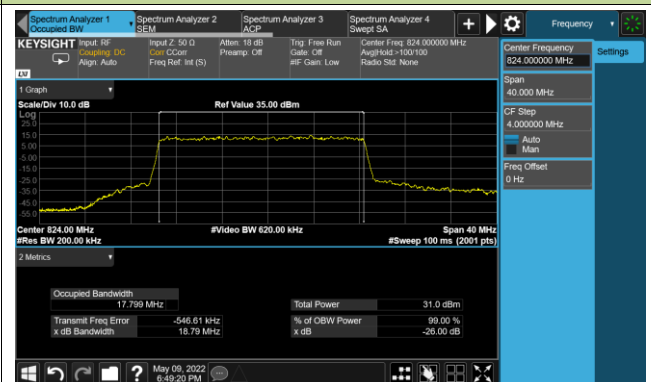


99% Bandwidth - 16QAM


5MHz Channel Bandwidth

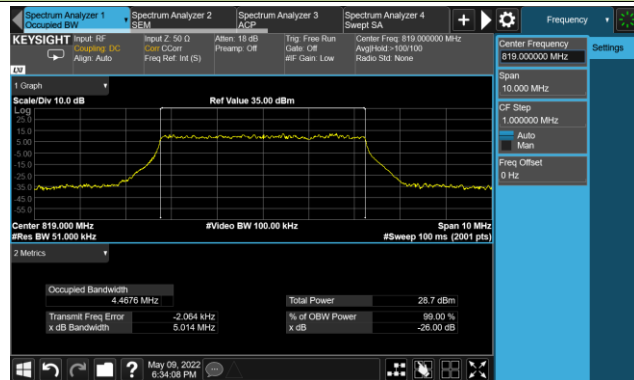


10MHz Channel Bandwidth

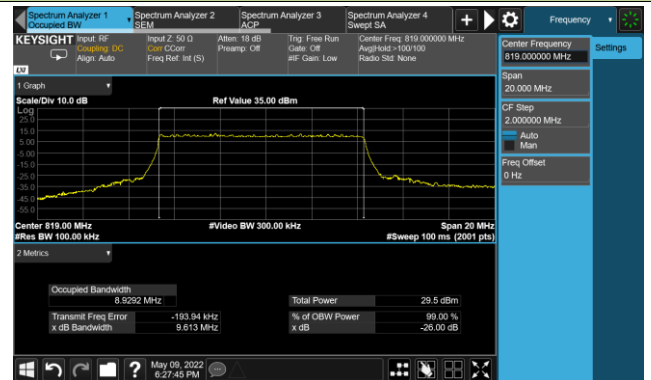

15MHz Channel Bandwidth

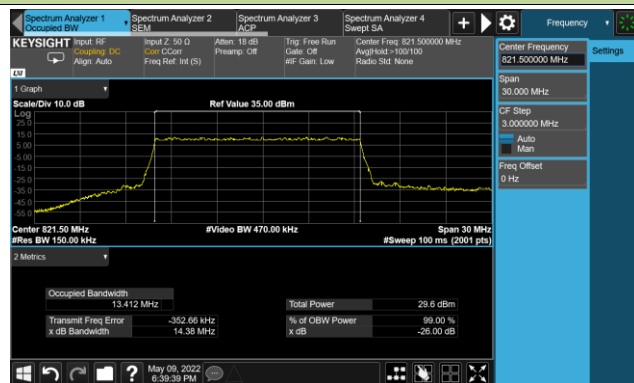


20MHz Channel Bandwidth

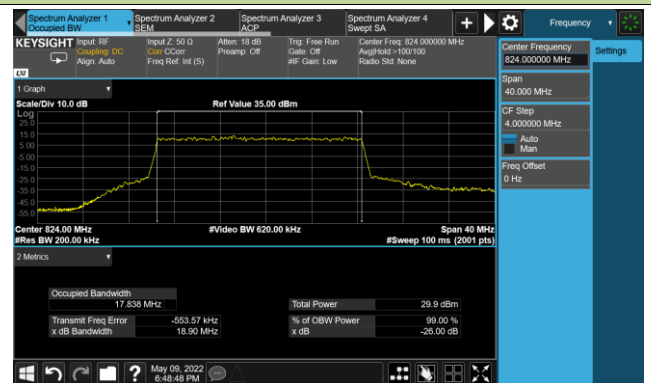


99% Bandwidth - 64QAM


5MHz Channel Bandwidth

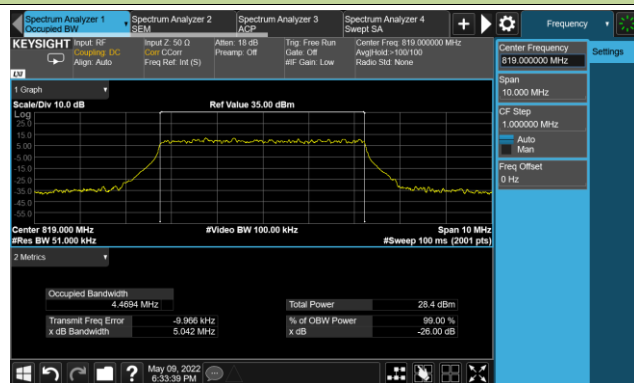


10MHz Channel Bandwidth

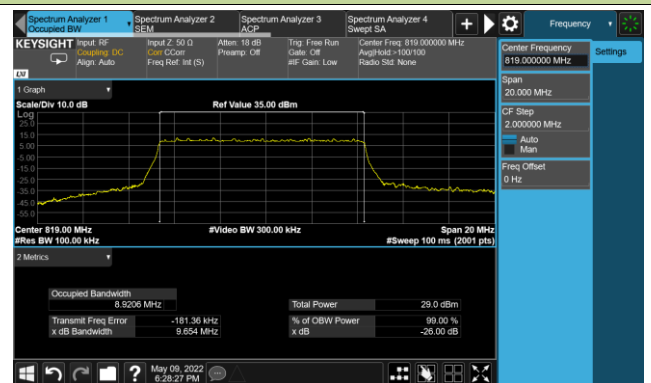

15MHz Channel Bandwidth

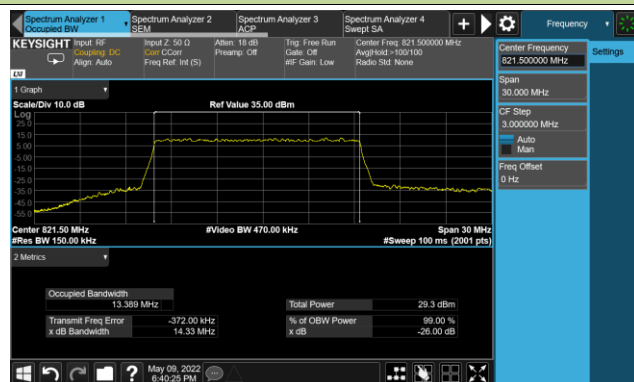


20MHz Channel Bandwidth

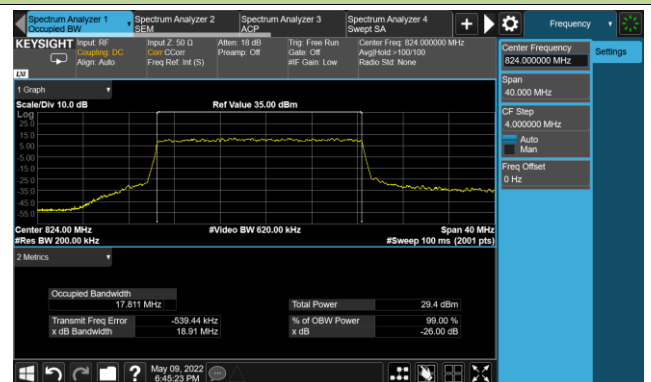


## 99% Bandwidth - 256QAM


## 5MHz Channel Bandwidth

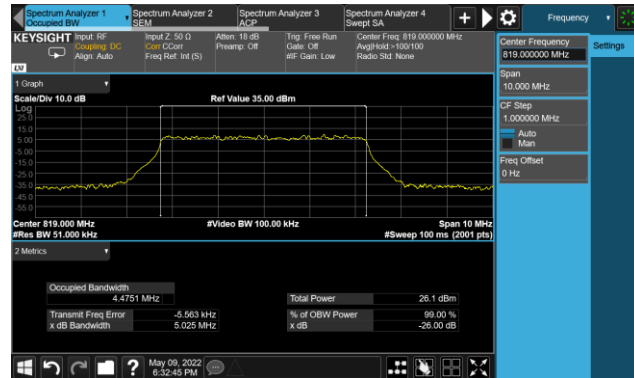


## 10MHz Channel Bandwidth

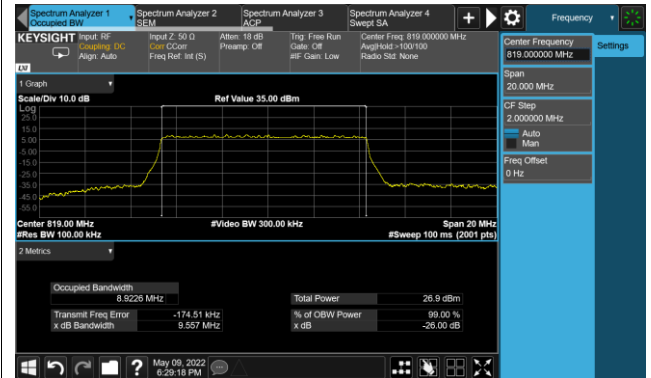

## 15MHz Channel Bandwidth

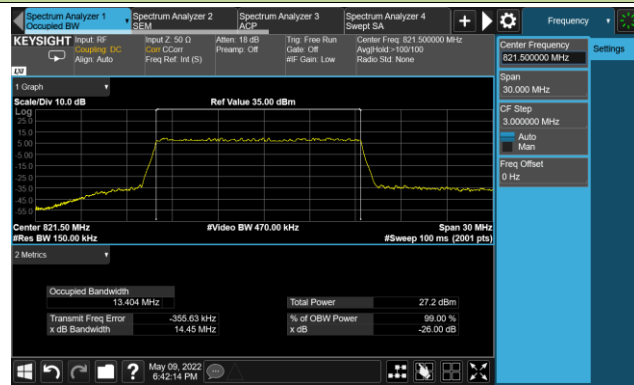

## 20MHz Channel Bandwidth

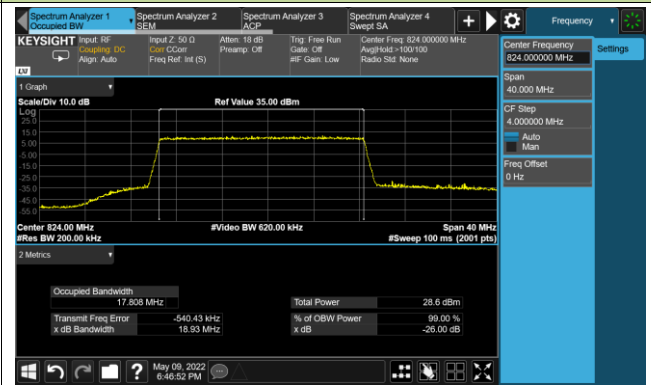

**A.2 Frequency Stability Test Result**

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/09	Test Band	NR n26

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0142
	- 20	-0.0122
	- 10	-0.0080
	0	-0.0118
	+ 10	-0.0128
	+ 20	-0.0142
	+ 30	-0.0122
	+ 40	-0.0080
4.4	+ 20	-0.0128
3.3	+ 20	-0.0142

**A.3 Conducted Output Power Test Result**

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/21	Test Band	NR n26

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)	
<b>DFT-s-OFDM PI/2 BPSK</b>							
5	816.5	12	6	22.82	0.1914	<100	
		1	1	22.82	0.1914	<100	
		1	23	22.82	0.1914	<100	
		25	0	22.86	0.1932	<100	
		1	24	22.86	0.1932	<100	
		1	6	22.86	0.1932	<100	
	819.0	12	6	22.84	0.1923	<100	
		1	1	22.89	0.1945	<100	
		1	23	22.88	0.1941	<100	
		25	0	22.94	0.1968	<100	
		1	24	23.02	0.2004	<100	
		1	6	22.81	0.1910	<100	
	821.5	12	6	22.78	0.1897	<100	
		1	1	22.84	0.1923	<100	
		1	23	22.89	0.1945	<100	
		25	0	22.97	0.1982	<100	
		1	24	22.99	0.1991	<100	
		1	6	22.94	0.1968	<100	
	10	819.0	25	12	22.79	0.1901	<100
			1	1	22.88	0.1941	<100
			1	50	22.89	0.1945	<100
50			0	22.85	0.1928	<100	
1			51	22.82	0.1914	<100	
1			0	22.96	0.1977	<100	

15	821.5	36	18	22.96	0.1977	<100
		1	1	22.97	0.1982	<100
		1	77	23.05	0.2018	<100
		75	0	22.95	0.1972	<100
		1	78	23.01	0.2000	<100
		1	0	23.01	0.2000	<100
20	824.0	50	25	23.01	0.2000	<100
		1	1	22.97	0.1982	<100
		1	104	22.93	0.1963	<100
		100	0	22.93	0.1963	<100
		1	105	23.13	0.2056	<100
		1	0	23.07	0.2028	<100

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)	
DFT-s-OFDM QPSK							
5	816.5	12	6	22.45	0.1758	<100	
		1	1	22.98	0.1986	<100	
		1	23	23.02	0.2004	<100	
		25	0	22.40	0.1738	<100	
		1	24	22.42	0.1746	<100	
		1	6	22.87	0.1936	<100	
	819.0	12	6	22.39	0.1734	<100	
		1	1	23.06	0.2023	<100	
		1	23	22.85	0.1928	<100	
		25	0	22.49	0.1774	<100	
		1	24	22.36	0.1722	<100	
		1	6	22.93	0.1963	<100	
	821.5	12	6	22.36	0.1722	<100	
		1	1	22.75	0.1884	<100	
		1	23	23.09	0.2037	<100	
		25	0	22.39	0.1734	<100	
		1	24	22.44	0.1754	<100	
		1	6	23.03	0.2009	<100	
	10	819.0	25	12	22.43	0.1750	<100
			1	1	22.76	0.1888	<100
			1	50	22.86	0.1932	<100
50			0	22.37	0.1726	<100	
1			51	22.39	0.1734	<100	
1			0	22.92	0.1959	<100	



15	821.5	36	18	22.36	0.1722	<100
		1	1	22.90	0.1950	<100
		1	77	22.88	0.1941	<100
		75	0	22.42	0.1746	<100
		1	78	22.56	0.1803	<100
		1	0	23.02	0.2004	<100
20	824.0	50	25	22.43	0.1750	<100
		1	1	22.94	0.1968	<100
		1	104	22.82	0.1914	<100
		100	0	22.32	0.1706	<100
		1	105	22.59	0.1816	<100
		1	0	23.15	0.2065	<100

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)	
DFT-s-OFDM 16QAM							
5	816.5	12	6	21.26	0.1337	<100	
		1	1	22.26	0.1683	<100	
		1	23	22.18	0.1652	<100	
		25	0	21.31	0.1352	<100	
		1	24	21.44	0.1393	<100	
		1	6	22.54	0.1795	<100	
	819.0	12	6	21.33	0.1358	<100	
		1	1	22.24	0.1675	<100	
		1	23	22.34	0.1714	<100	
		25	0	21.42	0.1387	<100	
		1	24	21.49	0.1409	<100	
		1	6	22.51	0.1782	<100	
	821.5	12	6	21.24	0.1330	<100	
		1	1	22.28	0.1690	<100	
		1	23	22.34	0.1714	<100	
		25	0	21.33	0.1358	<100	
		1	24	21.47	0.1403	<100	
		1	6	22.54	0.1795	<100	
	10	819.0	25	12	21.24	0.1330	<100
			1	1	22.22	0.1667	<100
			1	50	22.32	0.1706	<100
50			0	21.31	0.1352	<100	
1			51	21.36	0.1368	<100	
1			0	22.30	0.1698	<100	

15	821.5	36	18	21.28	0.1343	<100
		1	1	22.37	0.1726	<100
		1	77	22.41	0.1742	<100
		75	0	21.37	0.1371	<100
		1	78	21.58	0.1439	<100
		1	0	22.56	0.1803	<100
20	824.0	50	25	21.44	0.1393	<100
		1	1	22.34	0.1714	<100
		1	104	22.27	0.1687	<100
		100	0	21.31	0.1352	<100
		1	105	21.55	0.1429	<100
		1	0	22.61	0.1824	<100

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)	
DFT-s-OFDM 64QAM							
5	816.5	12	6	20.70	0.1175	<100	
		1	1	20.65	0.1161	<100	
		1	23	20.68	0.1169	<100	
		25	0	20.64	0.1159	<100	
		1	24	20.90	0.1230	<100	
		1	6	20.84	0.1213	<100	
	819.0	12	6	20.63	0.1156	<100	
		1	1	20.74	0.1186	<100	
		1	23	20.75	0.1189	<100	
		25	0	20.74	0.1186	<100	
		1	24	20.96	0.1247	<100	
		1	6	20.81	0.1205	<100	
	821.5	12	6	20.70	0.1175	<100	
		1	1	20.69	0.1172	<100	
		1	23	20.74	0.1186	<100	
		25	0	20.66	0.1164	<100	
		1	24	21.03	0.1268	<100	
		1	6	20.91	0.1233	<100	
	10	819.0	25	12	21.18	0.1312	<100
			1	1	21.14	0.1300	<100
			1	50	21.13	0.1297	<100
50			0	21.13	0.1297	<100	
1			51	20.83	0.1211	<100	
1			0	21.01	0.1262	<100	

15	821.5	36	18	21.02	0.1265	<100
		1	1	20.87	0.1222	<100
		1	77	20.87	0.1222	<100
		75	0	20.88	0.1225	<100
		1	78	21.02	0.1265	<100
		1	0	20.99	0.1256	<100
20	824.0	50	25	21.27	0.1340	<100
		1	1	21.33	0.1358	<100
		1	104	21.32	0.1355	<100
		100	0	21.31	0.1352	<100
		1	105	21.17	0.1309	<100
		1	0	21.07	0.1279	<100

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)	
DFT-s-OFDM 256QAM							
5	816.5	12	6	18.55	0.0716	<100	
		1	1	18.64	0.0731	<100	
		1	23	18.54	0.0714	<100	
		25	0	18.49	0.0706	<100	
		1	24	18.82	0.0762	<100	
		1	6	18.75	0.0750	<100	
	819.0	12	6	18.55	0.0716	<100	
		1	1	18.55	0.0716	<100	
		1	23	18.61	0.0726	<100	
		25	0	18.60	0.0724	<100	
		1	24	18.79	0.0757	<100	
		1	6	18.73	0.0746	<100	
	821.5	12	6	18.57	0.0719	<100	
		1	1	18.54	0.0714	<100	
		1	23	18.64	0.0731	<100	
		25	0	18.63	0.0729	<100	
		1	24	18.93	0.0782	<100	
		1	6	18.91	0.0778	<100	
	10	819.0	25	12	18.51	0.0710	<100
			1	1	18.51	0.0710	<100
			1	50	18.60	0.0724	<100
50			0	18.56	0.0718	<100	
1			51	18.83	0.0764	<100	
1			0	18.81	0.0760	<100	

15	821.5	36	18	18.68	0.0738	<100
		1	1	18.65	0.0733	<100
		1	77	18.75	0.0750	<100
		75	0	18.73	0.0746	<100
		1	78	18.97	0.0789	<100
		1	0	18.97	0.0789	<100
20	824.0	50	25	18.69	0.0740	<100
		1	1	18.65	0.0733	<100
		1	104	18.64	0.0731	<100
		100	0	18.64	0.0731	<100
		1	105	19.20	0.0832	<100
		1	0	19.05	0.0804	<100

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
CP-OFDM QPSK						
5	816.5	12	6	20.34	0.1081	<100
		1	1	21.65	0.1462	<100
		1	23	21.89	0.1545	<100
		25	0	20.49	0.1119	<100
		1	24	20.41	0.1099	<100
		1	6	21.67	0.1469	<100
	819.0	12	6	20.32	0.1076	<100
		1	1	21.64	0.1459	<100
		1	23	21.80	0.1514	<100
		25	0	20.38	0.1091	<100
		1	24	20.39	0.1094	<100
		1	6	21.78	0.1507	<100
	821.5	12	6	20.25	0.1059	<100
		1	1	21.60	0.1445	<100
		1	23	21.80	0.1514	<100
		25	0	20.31	0.1074	<100
		1	24	20.43	0.1104	<100
		1	6	21.81	0.1517	<100
10	819.0	25	12	20.35	0.1084	<100
		1	1	21.80	0.1514	<100
		1	50	21.85	0.1531	<100
		50	0	20.37	0.1089	<100
		1	51	20.38	0.1091	<100
		1	0	21.95	0.1567	<100



15	821.5	36	18	20.42	0.1102	<100
		1	1	21.75	0.1496	<100
		1	77	21.89	0.1545	<100
		75	0	20.39	0.1094	<100
		1	78	20.56	0.1138	<100
		1	0	22.03	0.1596	<100
20	824.0	50	25	20.45	0.1109	<100
		1	1	21.79	0.1510	<100
		1	104	21.88	0.1542	<100
		100	0	20.37	0.1089	<100
		1	105	20.67	0.1167	<100
		1	0	22.15	0.1641	<100

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
CP-OFDM 16QAM						
5	816.5	12	6	20.39	0.1094	<100
		1	1	21.24	0.1330	<100
		1	23	21.30	0.1349	<100
		25	0	20.31	0.1074	<100
		1	24	20.45	0.1109	<100
		1	6	21.51	0.1416	<100
	819.0	12	6	20.36	0.1086	<100
		1	1	21.24	0.1330	<100
		1	23	21.40	0.1380	<100
		25	0	20.42	0.1102	<100
		1	24	20.41	0.1099	<100
		1	6	21.48	0.1406	<100
	821.5	12	6	20.28	0.1067	<100
		1	1	21.28	0.1343	<100
		1	23	21.40	0.1380	<100
		25	0	20.35	0.1084	<100
		1	24	20.39	0.1094	<100
		1	6	21.50	0.1413	<100
10	819.0	25	12	20.33	0.1079	<100
		1	1	21.26	0.1337	<100
		1	50	21.44	0.1393	<100
		50	0	20.30	0.1072	<100
		1	51	20.36	0.1086	<100
		1	0	21.33	0.1358	<100

15	821.5	36	18	20.18	0.1042	<100
		1	1	21.59	0.1442	<100
		1	77	21.70	0.1479	<100
		75	0	20.14	0.1033	<100
		1	78	20.46	0.1112	<100
		1	0	21.45	0.1396	<100
20	824.0	50	25	20.40	0.1096	<100
		1	1	21.29	0.1346	<100
		1	104	21.51	0.1416	<100
		100	0	20.30	0.1072	<100
		1	105	20.66	0.1164	<100
		1	0	21.56	0.1432	<100

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
CP-OFDM 64QAM						
5	816.5	12	6	19.66	0.0925	<100
		1	1	19.60	0.0912	<100
		1	23	19.62	0.0916	<100
		25	0	19.64	0.0920	<100
		1	24	19.89	0.0975	<100
		1	6	19.84	0.0964	<100
	819.0	12	6	19.73	0.0940	<100
		1	1	19.59	0.0910	<100
		1	23	19.72	0.0938	<100
		25	0	19.74	0.0942	<100
		1	24	19.84	0.0964	<100
		1	6	19.85	0.0966	<100
	821.5	12	6	19.55	0.0902	<100
		1	1	19.64	0.0920	<100
		1	23	19.72	0.0938	<100
		25	0	19.66	0.0925	<100
		1	24	20.02	0.1005	<100
		1	6	19.95	0.0989	<100
10	819.0	25	12	19.91	0.0979	<100
		1	1	19.85	0.0966	<100
		1	50	19.99	0.0998	<100
		50	0	19.97	0.0993	<100
		1	51	19.92	0.0982	<100
		1	0	19.92	0.0982	<100


15	821.5	36	18	19.79	0.0953	<100
		1	1	19.81	0.0957	<100
		1	77	19.87	0.0971	<100
		75	0	19.82	0.0959	<100
		1	78	20.01	0.1002	<100
		1	0	20.00	0.1000	<100
20	824.0	50	25	20.11	0.1026	<100
		1	1	20.02	0.1005	<100
		1	104	20.03	0.1007	<100
		100	0	19.92	0.0982	<100
		1	105	20.17	0.1040	<100
		1	0	20.20	0.1047	<100

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)	
CP-OFDM 256QAM							
5	816.5	12	6	16.62	0.0459	<100	
		1	1	16.68	0.0466	<100	
		1	23	16.76	0.0474	<100	
		25	0	16.83	0.0482	<100	
		1	24	16.59	0.0456	<100	
		1	6	16.46	0.0443	<100	
	819.0	12	6	16.64	0.0461	<100	
		1	1	16.58	0.0455	<100	
		1	23	16.83	0.0482	<100	
		25	0	16.72	0.0470	<100	
		1	24	16.71	0.0469	<100	
		1	6	16.50	0.0447	<100	
	821.5	12	6	16.77	0.0475	<100	
		1	1	16.78	0.0476	<100	
		1	23	16.77	0.0475	<100	
		25	0	16.79	0.0478	<100	
		1	24	16.66	0.0463	<100	
		1	6	16.58	0.0455	<100	
	10	819.0	25	12	16.92	0.0492	<100
			1	1	17.01	0.0502	<100
			1	50	17.05	0.0507	<100
50			0	17.00	0.0501	<100	
1			51	16.62	0.0459	<100	
1			0	16.52	0.0449	<100	

15	821.5	36	18	16.94	0.0494	<100
		1	1	16.86	0.0485	<100
		1	77	16.98	0.0499	<100
		75	0	16.99	0.0500	<100
		1	78	16.78	0.0476	<100
		1	0	16.86	0.0485	<100
20	824.0	50	25	17.19	0.0524	<100
		1	1	17.14	0.0518	<100
		1	104	17.26	0.0532	<100
		100	0	17.16	0.0520	<100
		1	105	16.77	0.0475	<100
		1	0	16.71	0.0469	<100

### A.4 Band Edge Test Result


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/05/09	Test Band	NR n26

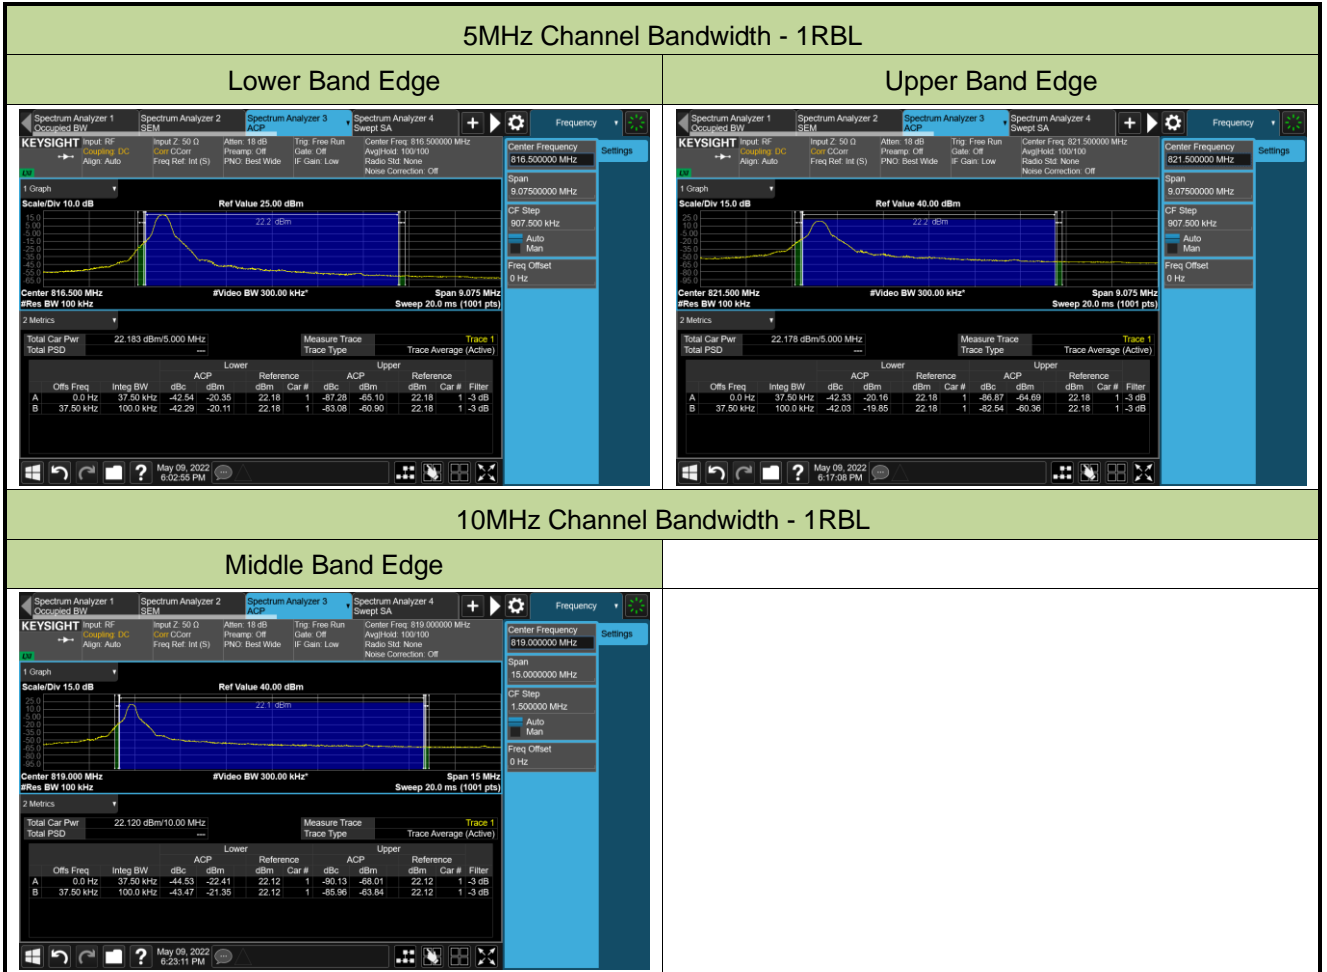




### 5MHz Channel Bandwidth - 1RBH

#### Lower Band Edge

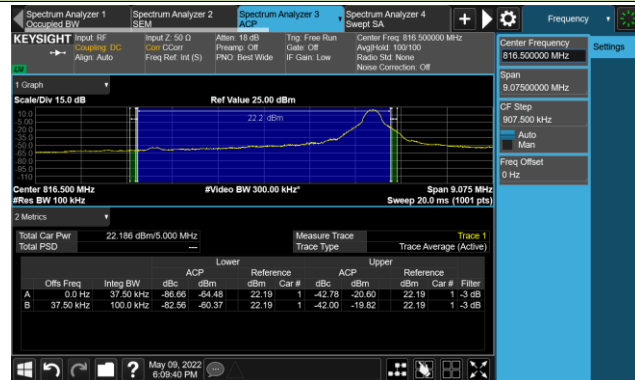


#### Upper Band Edge

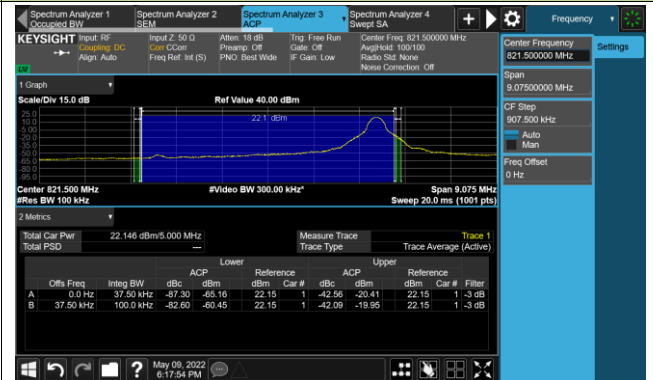


### 10MHz Channel Bandwidth - 1RBH

#### Middle Band Edge

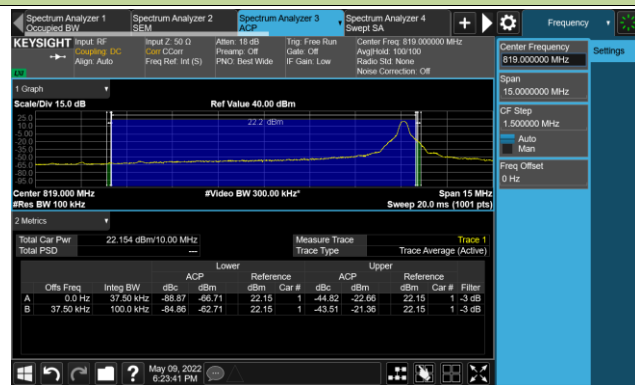


### 5MHz Channel Bandwidth - Full RB

#### Lower Band Edge

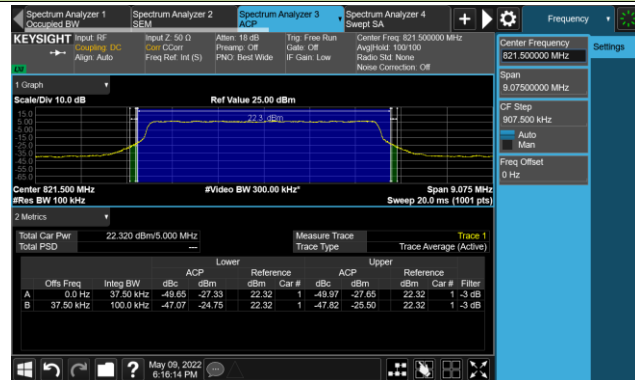


#### Upper Band Edge

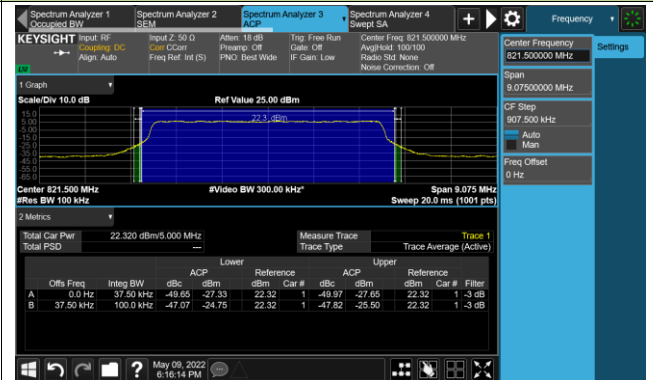

### 10MHz Channel Bandwidth - Full RB


#### Middle Band Edge

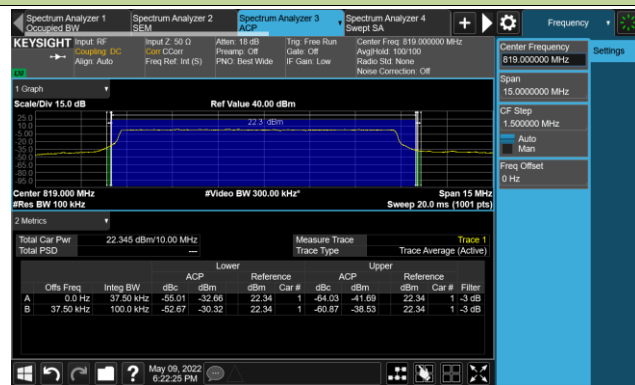

**A.5 Conducted Spurious Emissions Test Result**


Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/17	Test Band	LTE Band 26

Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
QPSK					
816.5	5	30 ~ 10000	-38.48	≤ -13.00	Pass
819.0	5	30 ~ 10000	-33.71	≤ -13.00	Pass
821.5	5	30 ~ 10000	-29.42	≤ -13.00	Pass
819.0	10	30 ~ 10000	-38.23	≤ -13.00	Pass
821.5	15	30 ~ 10000	-38.65	≤ -13.00	Pass
824.0	20	30 ~ 10000	-38.28	≤ -13.00	Pass

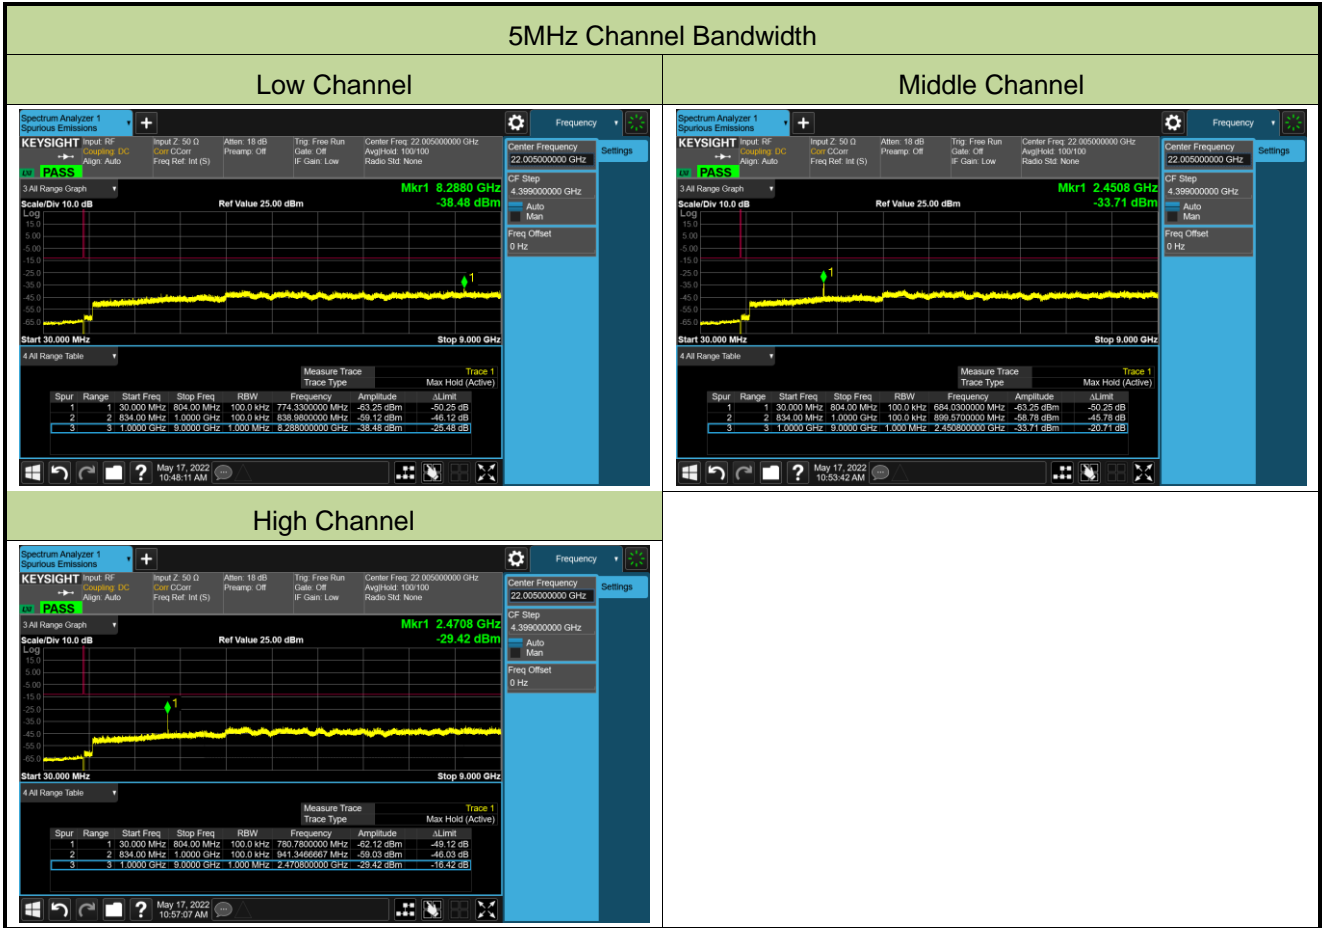


### 10MHz Channel Bandwidth

#### Middle Channel

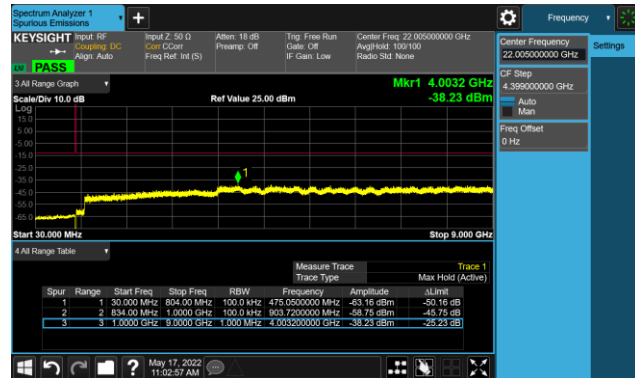


### 15MHz Channel Bandwidth

#### Middle Channel

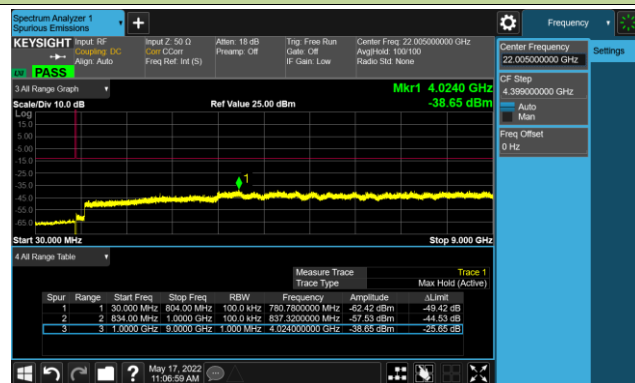

### 20MHz Channel Bandwidth

#### Middle Channel

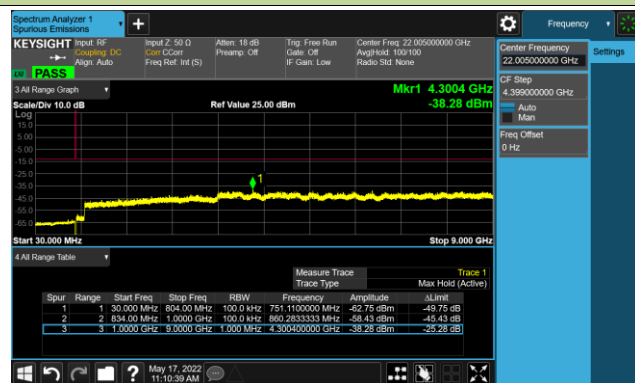

**A.6 Radiated Suprious Emissions Test Result**

Test Site	WZ-AC2	Test Engineer	Lucas Wang
Test Date	2022/05/22	Test Band	NR n26, 5MHz, 1RB

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
46.5	14.3	20.6	34.9	82.3	-47.4	Peak	Horizontal
893.3	16.1	31.1	47.2	82.3	-35.1	Peak	Horizontal
56.7	14.9	20.1	35.0	82.3	-47.3	Peak	Vertical
989.8	15.7	31.8	47.5	82.3	-34.8	Peak	Vertical
11072.5	35.1	16.8	51.9	82.3	-30.4	Peak	Horizontal
14243.0	33.8	20.0	53.8	82.3	-28.5	Peak	Horizontal
11081.0	34.6	16.7	51.3	82.3	-31.0	Peak	Vertical
14149.5	34.5	19.4	53.9	82.3	-28.4	Peak	Vertical
<b>Middle Channel</b>							
56.7	14.9	20.1	35.0	82.3	-47.3	Peak	Horizontal
720.2	17.4	28.7	46.1	82.3	-36.2	Peak	Horizontal
50.4	14.3	20.8	35.1	82.3	-47.2	Peak	Vertical
718.7	17.0	28.7	45.7	82.3	-36.6	Peak	Vertical
11242.5	33.5	17.2	50.7	82.3	-31.6	Peak	Horizontal
14897.5	33.9	19.7	53.6	82.3	-28.7	Peak	Horizontal
11081.0	34.1	16.7	50.8	82.3	-31.5	Peak	Vertical
14362.0	34.3	19.3	53.6	82.3	-28.7	Peak	Vertical
<b>High Channel</b>							
55.7	14.3	20.2	34.5	82.3	-47.8	Peak	Horizontal
716.3	17.4	28.7	46.1	82.3	-36.2	Peak	Horizontal
32.4	18.7	17.5	36.2	82.3	-46.1	Peak	Vertical
723.1	16.6	28.8	45.4	82.3	-36.9	Peak	Vertical
11514.5	34.0	17.6	51.6	82.3	-30.7	Peak	Horizontal
14574.5	33.8	19.6	53.4	82.3	-28.9	Peak	Horizontal
11514.5	34.0	17.6	51.6	82.3	-30.7	Peak	Vertical
14702.0	34.2	19.9	54.1	82.3	-28.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

## **Appendix B - Test Setup Photograph**

Refer to "2204RSU037-UT" file.

## Appendix C - EUT Photograph

Refer to "2204RSU037-UE" file.