


RF TEST REPORT

Applicant	Quectel Wireless Solutions Co., Ltd.
FCC ID	XMR2023BG773AGL
Product	LTE Module
Brand	Quectel
Model	BG773A-GL
Report No.	R2211A1099-R3
Issue Date	March 21, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2022)/ FCC CFR 47 Part 22H (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the Test Report	5
1.2. Test facility	5
1.3. Testing Location	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. General Information	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. RF Power Output and Effective Radiated Power	9
5.2. Occupied Bandwidth	11
5.3. Band Edge Compliance	15
5.4. Peak-to-Average Power Ratio (PAPR).....	23
5.5. Frequency Stability.....	25
5.6. Spurious Emissions at Antenna Terminals.....	28
5.7. Radiates Spurious Emission	33
6. Main Test Instruments.....	38
ANNEX A: The EUT Appearance	39
ANNEX B: Test Setup Photos	40
ANNEX C: Product Change Description (Variant 1)	41
ANNEX D: Product Change Description (Variant 2)	42

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 / 22.917(a)	PASS
4	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: April 21, 2021 ~ May 14, 2021 Date of Sample Received: April 16, 2021			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

BG773A-GL (Report No.: R2211A1099-R3) is a variant model (Variant 2) of BG770A-GL (Report No.: R2207A0656-R3V1). This report verifies only the power, the power of new variant are varied due to measurement uncertainty, and sample tolerance of the acceptance range. Test values all duplicated from Original for variant.

The detailed product change description please refers to following table:

Module	BG770A-GL	BG773A-GL
BB Chip	ALT1250	ALT1250
Category	Cat M1 /NB2/GNSS	Cat M1 /NB2/GNSS
Frequency Bands	Cat M1 LTE-HD-FDD: B2/B4/B5 /B12/B13/B25/B26/B66 Cat NB2 LTE-HD-FDD: B2/B4/B5/B12/B13/B17/ B25/B66	Cat M1 LTE-HD-FDD: B2/B4/B5 /B12/B13/B25/B26/B66 Cat NB2 LTE-HD-FDD: B2/B4/B5/B12/B13/B17/ B25/B66
GNSS	GPS, GLONASS	GPS, GLONASS
iSIM	N/A	Supported

The detailed product change description please refers to the *Difference Declaration Letter (Variant 2)*.

BG770A-GL (Report No.: R2207A0656-R3V1) is a variant model (Variant 1) of BG770A-GL (Report No.: R2104A0331-R3). Test values all duplicated from Original for variant. There is no test for variant in this report. BG770A-GL supports from Cat NB1 (3GPP R13) to Cat NB2 (3GPP R14) only by FW updating, the hardware remains the same.

The detailed product change description please refers to following table:

Module	BG770A-GL (Cat NB1)	BG770A-GL (Cat NB2)
Category	Cat M1 & NB1	Cat M1 & NB2
Frequency Bands	Cat M1 LTE-HD-FDD: B2/B4/B5 /B12/B13/B25/B26/B66 Cat NB1 LTE-HD-FDD: B2/B4/B5/B12/B13/B17/ B25/B66	Cat M1 LTE-HD-FDD: B2/B4/B5 /B12/B13/B25/B26/B66 Cat NB2 LTE-HD-FDD: B2/B4/B5/B12/B13/B17/ B25/B66
Others	The same	

The detailed product change description please refers to the *Difference Declaration Letter (Variant 1)*.

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233 China
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233 China

2.2. General Information

EUT Description			
Model	BG773A-GL		
IMEI	Original: 863593050006733		
Hardware Version	R1.1		
Software Version	BG773AGLAAR02A01		
Power Supply	External power supply		
Antenna Type	External Antenna		
Antenna Gain	Band	Frequency (MHz)	Gain (dBi)
	LTE eMTC Band 26	810	3.19
		820	2.53
		860	2.54
870		3.01	
Test Mode(s)	LTE eMTC Band 26		
Test Modulation	QPSK, 16QAM;		
LTE Category	M1		
Maximum E.R.P.	LTE eMTC Band 26:	24.03dBm	
Rated Power Supply Voltage	3.3V		
Operating Voltage	Minimum: 3.1V Maximum: 4.2V		
Operating Temperature	Lowest: -35°C Highest: +75°C		
Extreme Temperature	Lowest: -30°C Highest: +50°C		
Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE eMTC Band 26	824 ~ 849	869 ~ 894
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2022)

FCC CFR47 Part 2 (2022)

Reference standard:

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated. Subsequently, only the worst case emissions are reported.

The following testing in LTE eMTC is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test modes are chosen as the worst case configuration below for LTE eMTC Band 26

Test items	Modes	Bandwidth (MHz)					Modulation		RB			Test Channel			
		1.4	3	5	10	15	QPSK	16QAM	1	50%	100%	L	M	H	
RF power output and Effective Radiated power	LTE eMTC 26	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Occupied Bandwidth	LTE eMTC 26	○	○	○	○	○	○	○	-	-	○	○	○	○	○
Band Edge Compliance	LTE eMTC 26	○	○	○	○	○	○	○	○	-	○	○	-	○	○
Peak-to-Average Power Ratio	LTE eMTC 26	○	○	○	○	○	○	○	-	-	○	○	○	○	○
Frequency Stability	LTE eMTC 26	○	○	○	○	○	○	○	○	-	-	-	○	-	-
Spurious Emissions at Antenna Terminals	LTE eMTC 26	○	○	○	○	○	○	-	○	-	-	○	○	○	○
Radiates Spurious Emission	LTE eMTC 26	○	-	○	-	○	○	-	○	-	-	-	○	-	-
Note	1. The mark "○" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.														

5. Test Case Results

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB)}.$$

Test Setup

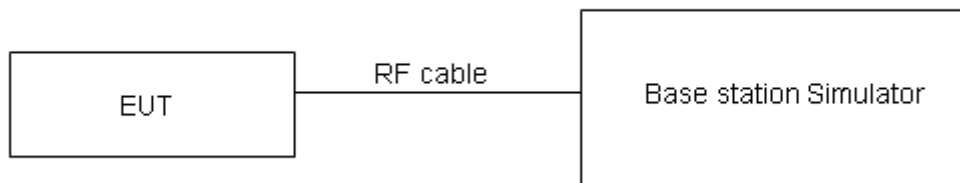

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	≤ 7 W (38.45 dBm)
-------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for ERP.

Test Results

LTE eMTC Band 26	Channel/ Frequency(MHz)	Index	RB#	RB#	Maximum Output Power (dBm)		ERP (dBm)	
			RBstart QPSK	RBstart 16QAM	QPSK	16QAM	QPSK	16QAM
1.4MHz	26797/824.7	0	1#0	1#0	23.65	22.25	24.03	22.63
		0	6#0	5#0	22.15	21.59	22.53	21.97
	26915/836.5	0	1#0	1#0	23.73	22.33	23.47	22.07
		0	6#0	5#0	22.12	21.67	21.86	21.41
	27033/848.3	0	1#5	1#5	23.65	22.25	23.79	22.39
		0	6#0	5#0	22.08	21.56	22.22	21.70
3MHz	26805/825.5	0	1#0	1#0	23.53	22.63	23.51	22.61
		0	6#0	5#0	21.87	21.67	21.85	21.65
	26915/836.5	0	1#0	1#0	23.54	22.58	23.28	22.32
		0	6#0	5#0	21.93	21.77	21.67	21.51
	27025/847.5	1	1#5	1#5	23.71	22.51	23.85	22.65
		1	6#0	5#0	21.82	21.61	21.96	21.75
5MHz	26815/826.5	3	1#0	1#0	23.50	23.62	23.48	23.60
		0	6#0	5#0	22.99	21.71	22.97	21.69
	26915/836.5	0	1#0	1#0	23.77	23.63	23.51	23.37
		0	6#0	5#0	23.15	21.77	22.89	21.51
	27015/846.5	0	1#5	1#5	23.70	23.55	23.84	23.69
		3	6#0	5#0	22.88	21.73	23.02	21.87
10MHz	26840/829	3	1#0	1#0	23.46	23.67	23.44	23.65
		0	4#0	4#0	23.69	22.79	23.67	22.77
	26915/836.5	0	1#0	1#0	23.77	23.61	23.51	23.35
		0	4#0	4#0	23.73	22.82	23.47	22.56
	26990/844	4	1#5	1#5	23.60	23.49	23.34	23.23
		7	4#2	4#2	23.37	21.97	23.11	21.71
15MHz	26865/831.5	3	1#0	1#0	23.80	23.71	23.78	23.69
		0	6#0	5#0	23.67	23.76	23.65	23.74
	26915/836.5	0	1#0	1#0	23.80	23.69	23.54	23.43
		0	6#0	5#0	23.63	23.79	23.37	23.53
	26965/841.5	8	1#5	1#5	23.62	23.54	23.36	23.28
		11	6#0	5#0	23.61	23.73	23.35	23.47

5.2. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for LTE eMTC Band 26.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

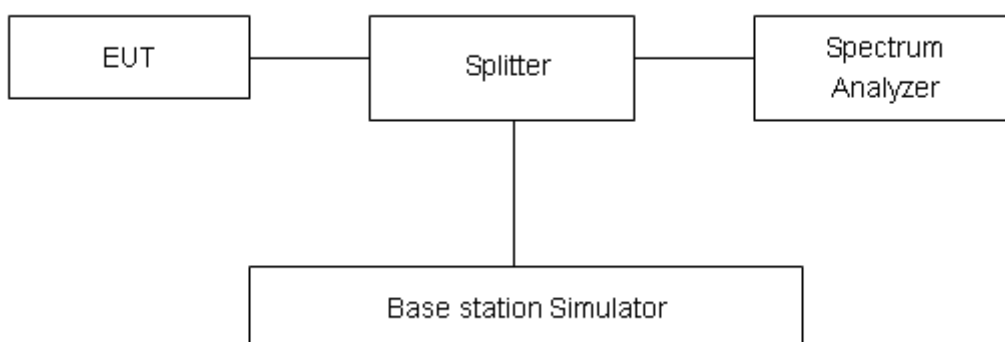

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Bandwidth(MHz)	
				99% Power	-26dBc
LTE eMTC Band 26	1.4MHz	QPSK	26915/836.5	1.1074	1.327
		16QAM	26915/836.5	0.9615	1.299
	3MHz	QPSK	26915/836.5	1.1031	1.334
		16QAM	26915/836.5	0.9709	1.290
	5MHz	QPSK	26915/836.5	1.1048	1.340
		16QAM	26915/836.5	0.9673	1.286
	10MHz	QPSK	26915/836.5	1.1080	1.338
		16QAM	26915/836.5	0.9907	1.310
15MHz	QPSK	26915/836.5	1.1103	1.327	
	16QAM	26915/836.5	0.9905	1.325	

LTE eMTC Band 26 QPSK 1.4MHz CH-Middle



LTE eMTC Band 26 QPSK 3MHz CH-Middle



LTE eMTC Band 26 QPSK 5MHz CH-Middle



LTE eMTC Band 26 QPSK 10MHz CH-Middle



LTE eMTC Band 26 QPSK 15MHz CH-Middle




LTE eMTC Band 26 16QAM 1.4MHz CH-Middle




LTE eMTC Band 26 16QAM 3MHz CH-Middle




LTE eMTC Band 26 16QAM 5MHz CH-Middle

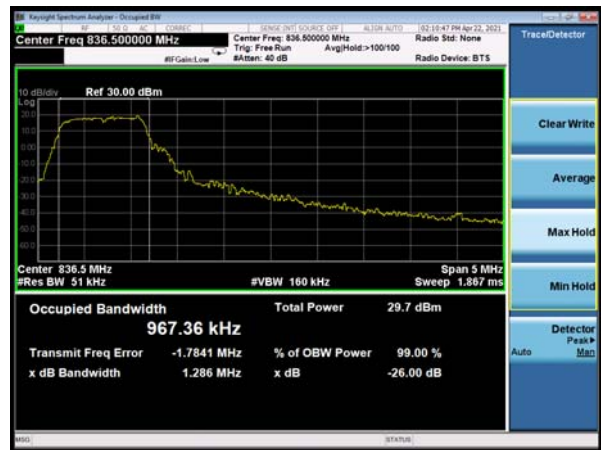

LTE eMTC Band 26 16QAM 10MHz CH-Middle

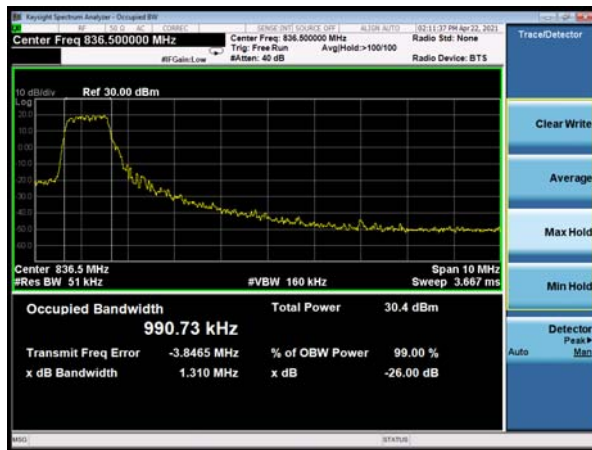

LTE eMTC Band 26 16QAM 15MHz CH-Middle

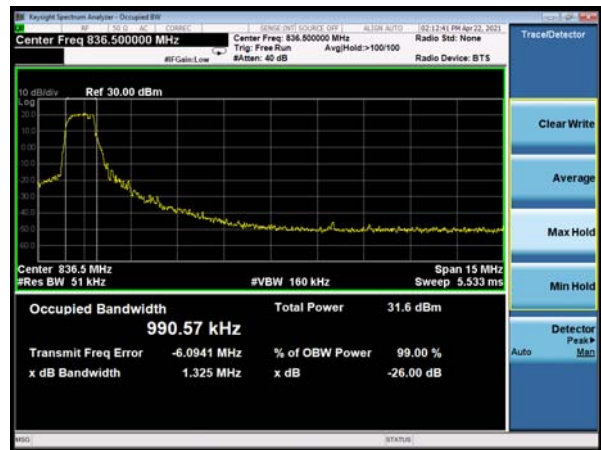

5.3. Band Edge Compliance


Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to 51kHz,VBW is set to 160kHz for LTE eMTC Band 26. Spectrum analyzer plots are included on the following pages.

Test Setup

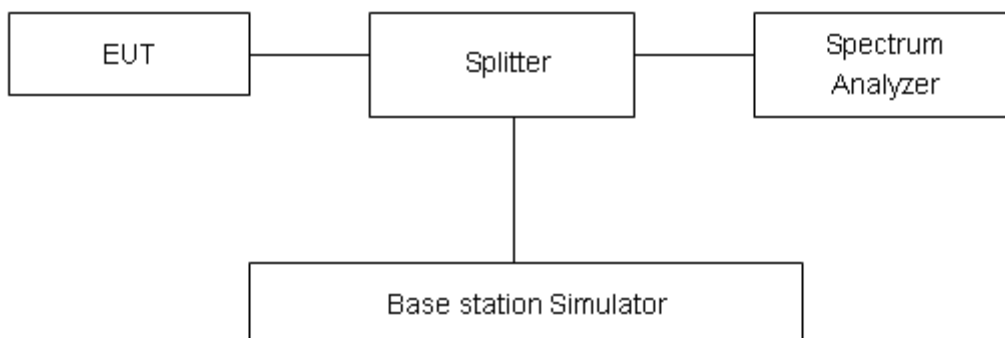

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.

Test Result:


LTE eMTC Band 26 QPSK 1.4MHz CH-Low 1RB




LTE eMTC Band 26 QPSK 1.4MHz CH-High 1RB

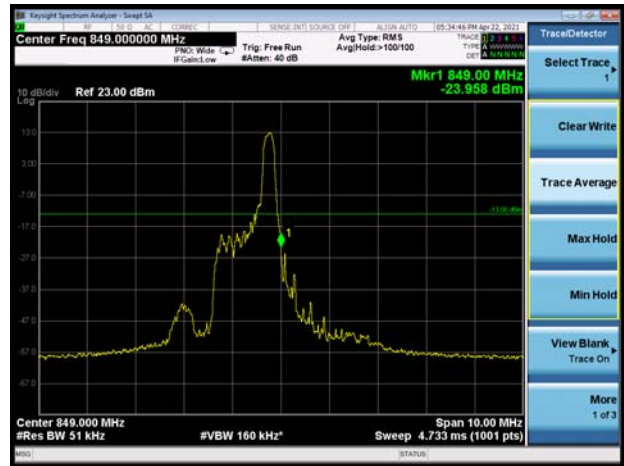

LTE eMTC Band 26 QPSK 1.4MHz CH-Low
100%RB

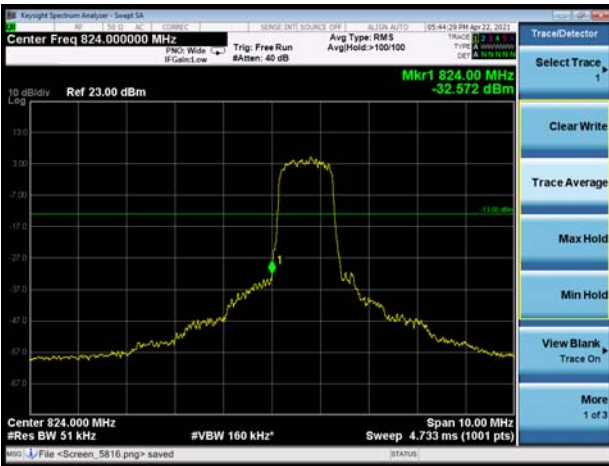

LTE eMTC Band 26 QPSK 1.4MHz CH-High
100%RB

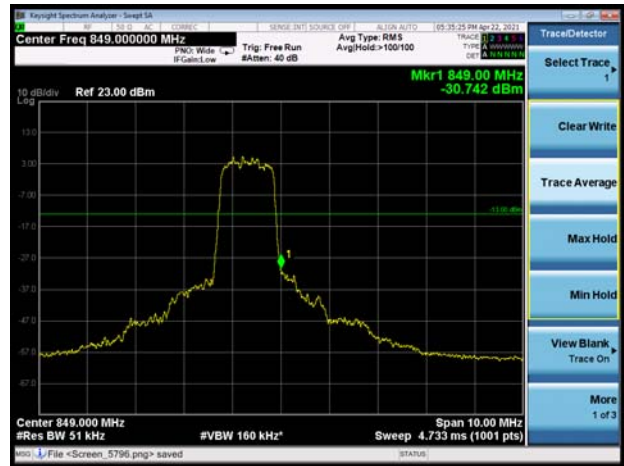


LTE eMTC Band 26 QPSK 3MHz CH-Low 1RB




LTE eMTC Band 26 QPSK 3MHz CH-High 1RB



LTE eMTC Band 26 QPSK 3MHz CH-Low
100%RB

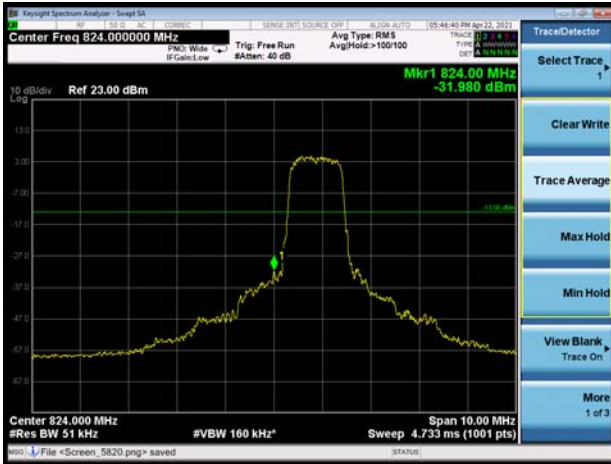

LTE eMTC Band 26 QPSK 3MHz CH-High
100%RB

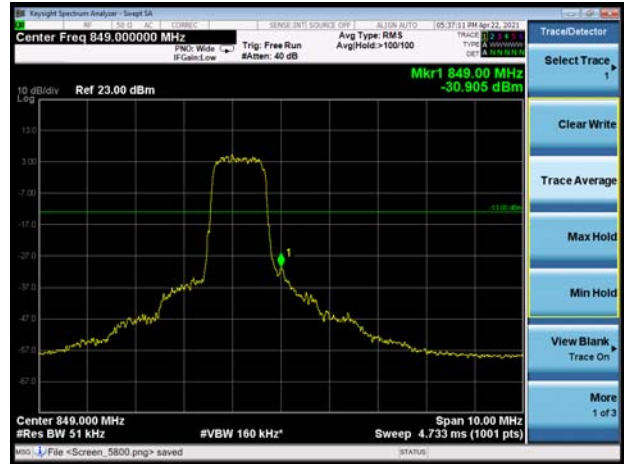


LTE eMTC Band 26 QPSK 5MHz CH-Low 1RB



LTE eMTC Band 26 QPSK 5MHz CH-High 1RB




LTE eMTC Band 26 QPSK 5MHz CH-Low
100%RB

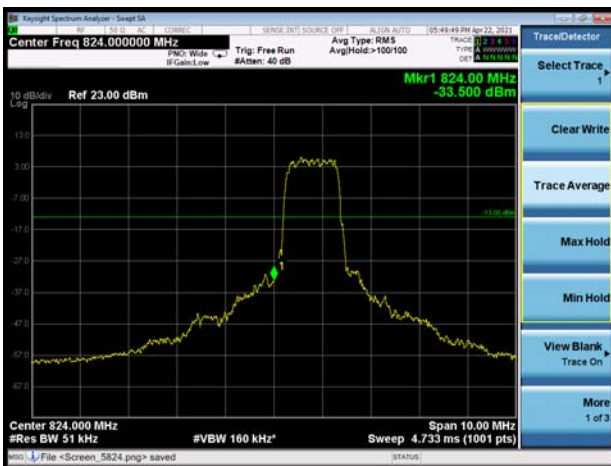


LTE eMTC Band 26 QPSK 5MHz CH-High
100%RB



LTE eMTC Band 26 QPSK 10MHz CH-Low 1RB

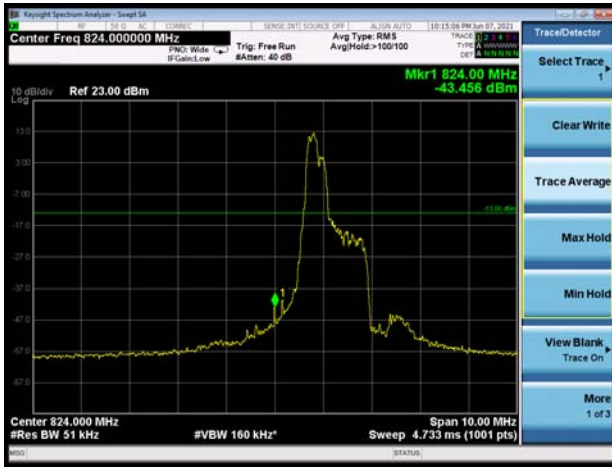

LTE eMTC Band 26 QPSK 10MHz CH-High 1RB

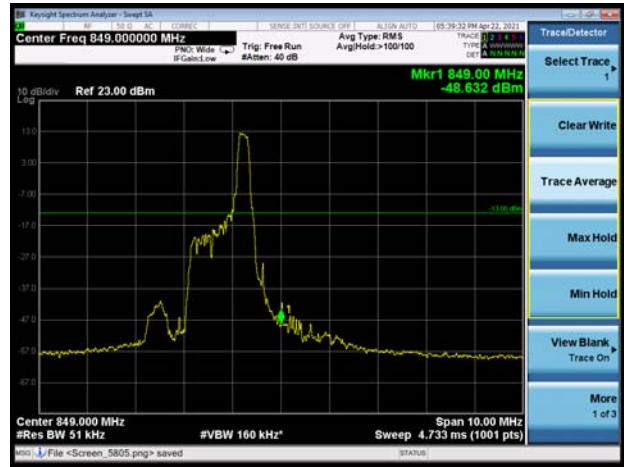

LTE eMTC Band 26 QPSK 10MHz CH-Low 100%RB




LTE eMTC Band 26 QPSK 10MHz CH-High 100%RB



LTE eMTC Band 26 QPSK 15MHz CH-Low 1RB



LTE eMTC Band 26 QPSK 15MHz CH-High 1RB

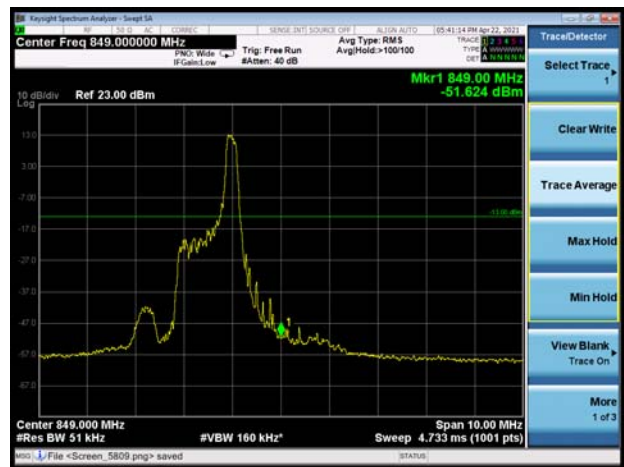

LTE eMTC Band 26 QPSK 15MHz CH-Low
100%RB



LTE eMTC Band 26 QPSK 15MHz CH-High
100%RB




LTE eMTC Band 26 16QAM 1.4MHz CH-Low
1RB




LTE eMTC Band 26 16QAM 1.4MHz CH-High
1RB



LTE eMTC Band 26 16QAM 1.4MHz CH-Low
100%RB

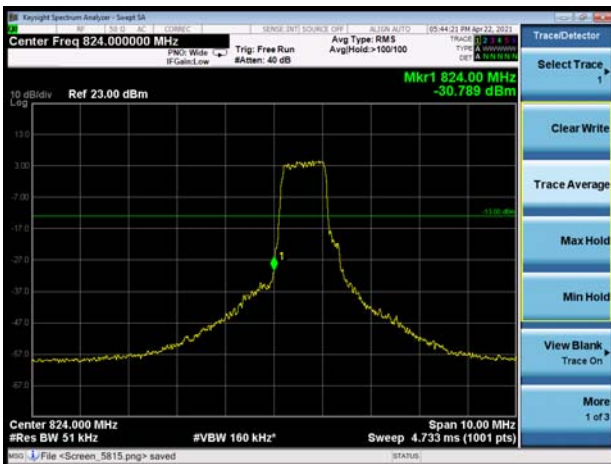

LTE eMTC Band 26 16QAM 1.4MHz CH-High
100%RB

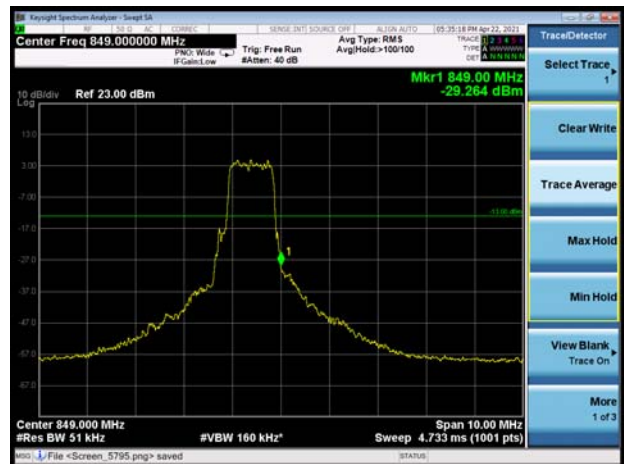


LTE eMTC Band 26 16QAM 3MHz CH-Low 1RB




LTE eMTC Band 26 16QAM 3MHz CH-High 1RB




LTE eMTC Band 26 16QAM 3MHz CH-Low 100%RB

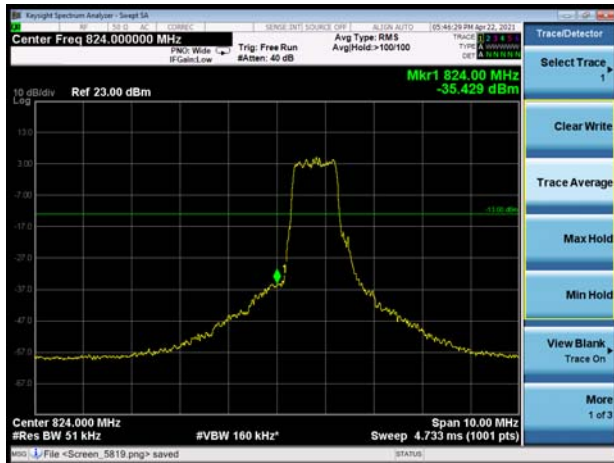

LTE eMTC Band 26 16QAM 3MHz CH-High 100%RB

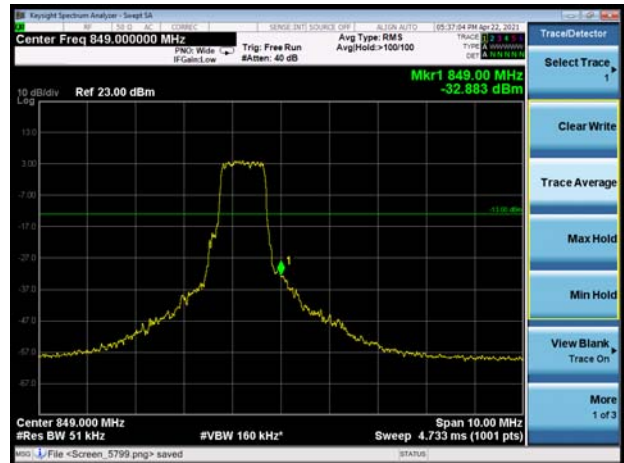


LTE eMTC Band 26 16QAM 5MHz CH-Low 1RB

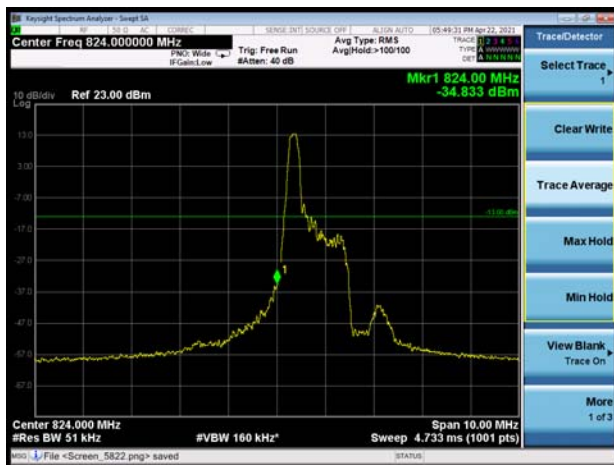


LTE eMTC Band 26 16QAM 5MHz CH-High 1RB




LTE eMTC Band 26 16QAM 5MHz CH-Low
100%RB

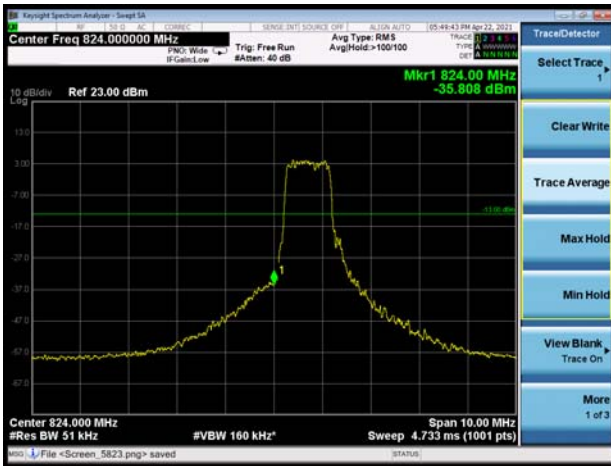

LTE eMTC Band 26 16QAM 5MHz CH-High
100%RB

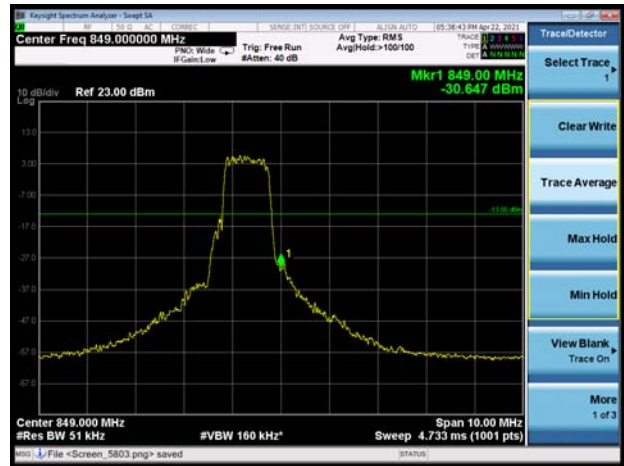


LTE eMTC Band 26 16QAM 10MHz CH-Low
1RB

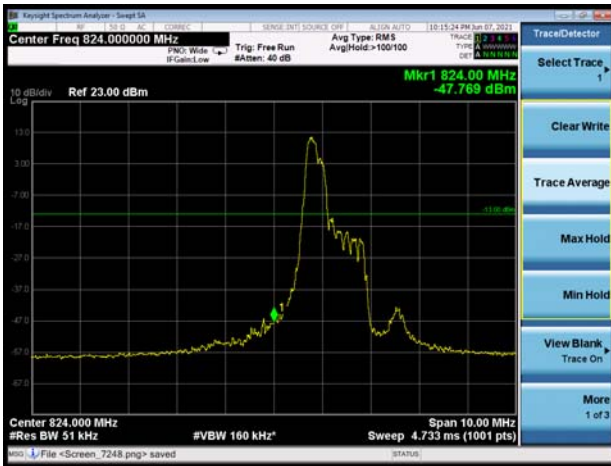

LTE eMTC Band 26 16QAM 10MHz CH-High
1RB



LTE eMTC Band 26 16QAM 10MHz CH-Low
100%RB

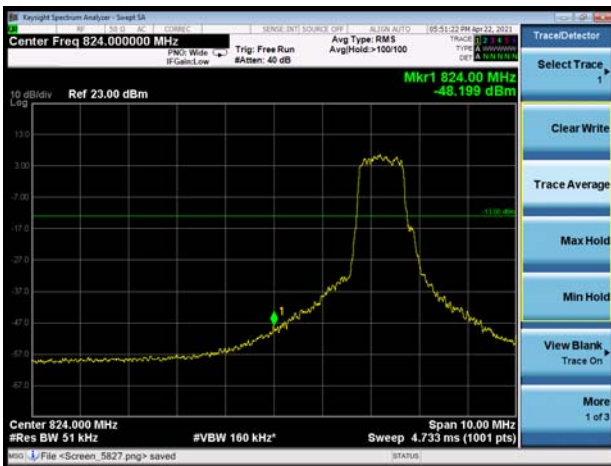


LTE eMTC Band 26 16QAM 10MHz CH-High
100%RB




LTE eMTC Band 26 16QAM 15MHz CH-Low
1RB




LTE eMTC Band 26 16QAM 15MHz CH-High
1RB

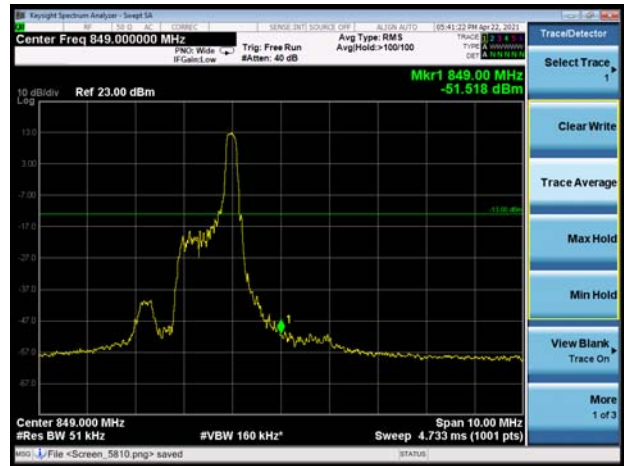

LTE eMTC Band 26 16QAM 15MHz CH-Low
100%RB

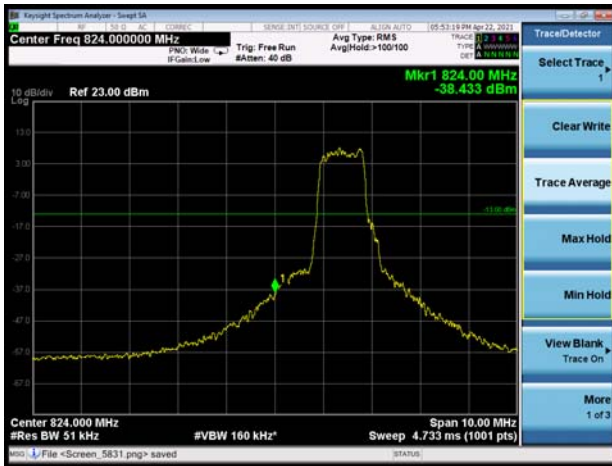

LTE eMTC Band 26 16QAM 15MHz CH-High
100%RB

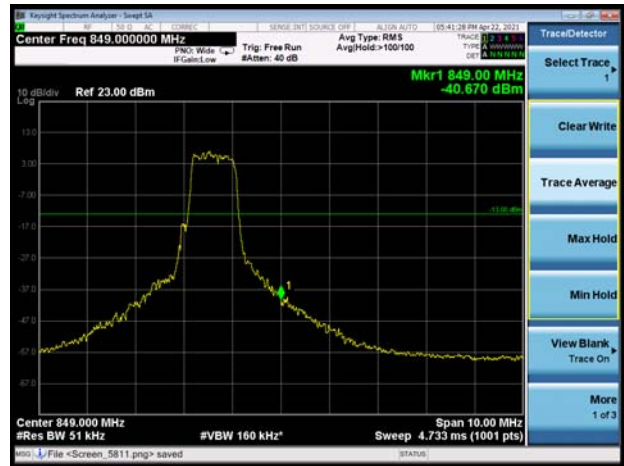

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

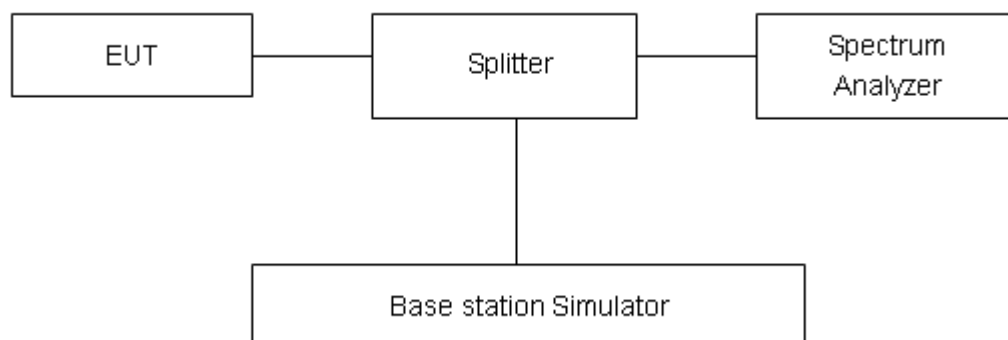

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
LTE eMTC Band 26	1.4MHz	QPSK	26740/819	26.34	16.24	10.10	≤13	PASS
		16QAM	26740/819	26.88	15.32	11.56	≤13	PASS
	3MHz	QPSK	26740/819	26.12	15.94	10.18	≤13	PASS
		16QAM	26740/819	26.99	15.22	11.77	≤13	PASS
	5MHz	QPSK	26740/819	27.26	17.35	9.91	≤13	PASS
		16QAM	26740/819	27.11	15.37	11.74	≤13	PASS
	10MHz	QPSK	26740/819	27.42	17.35	10.07	≤13	PASS
		16QAM	26740/819	28.14	17.26	10.88	≤13	PASS
	15MHz	QPSK	26740/819	28.39	18.76	9.63	≤13	PASS
		16QAM	26740/819	28.97	17.60	11.37	≤13	PASS

5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.


(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.1 V and 4.2 V, with a nominal voltage of 3.3V.

Test setup

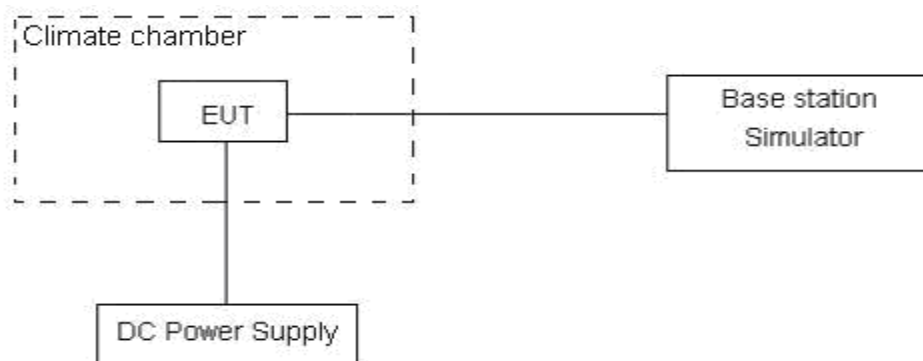

Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

LTE eMTC Band 26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	2.87	3.83	0.00153	0.00204	PASS
Extreme (50°C)		7.63	15.02	0.00406	0.00799	PASS
Extreme (40°C)		5.14	6.22	0.00273	0.00331	PASS
Extreme (30°C)		14.65	4.81	0.00779	0.00256	PASS
Extreme (20°C)		4.74	10.39	0.00252	0.00553	PASS
Extreme (10°C)		12.65	1.14	0.00673	0.00061	PASS
Extreme (0°C)		2.33	6.58	0.00124	0.00350	PASS
Extreme (-10°C)		11.80	13.86	0.00628	0.00737	PASS
Extreme (-20°C)		7.10	13.38	0.00377	0.00712	PASS
Extreme (-30°C)		5.84	15.21	0.00310	0.00809	PASS
25°C		LV	15.06	7.81	0.00801	0.00416
	HV	17.60	9.50	0.00936	0.00505	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	4.33	2.13	0.00230	0.00113	PASS
Extreme (50°C)		7.88	16.37	0.00419	0.00871	PASS
Extreme (40°C)		12.81	4.21	0.00681	0.00224	PASS
Extreme (30°C)		10.73	6.62	0.00571	0.00352	PASS
Extreme (20°C)		2.27	11.19	0.00121	0.00595	PASS
Extreme (10°C)		6.42	8.46	0.00342	0.00450	PASS
Extreme (0°C)		7.28	3.09	0.00387	0.00165	PASS
Extreme (-10°C)		14.60	2.19	0.00777	0.00116	PASS
Extreme (-20°C)		14.07	15.52	0.00748	0.00825	PASS
Extreme (-30°C)		7.34	17.11	0.00391	0.00910	PASS
25°C		LV	16.63	6.27	0.00885	0.00333
	HV	3.81	5.12	0.00203	0.00272	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	15.92	8.80	0.00847	0.00468	PASS
Extreme (50°C)		6.82	14.86	0.00363	0.00790	PASS
Extreme (40°C)		7.19	9.26	0.00382	0.00492	PASS

Extreme (30°C)		8.80	13.31	0.00468	0.00708	PASS
Extreme (20°C)		1.10	17.96	0.00058	0.00955	PASS
Extreme (10°C)		16.64	16.22	0.00885	0.00863	PASS
Extreme (0°C)		2.69	7.26	0.00143	0.00386	PASS
Extreme (-10°C)		14.31	15.49	0.00761	0.00824	PASS
Extreme (-20°C)		13.45	7.38	0.00715	0.00393	PASS
Extreme (-30°C)		4.93	2.54	0.00262	0.00135	PASS
25°C	LV	8.16	16.72	0.00434	0.00889	PASS
	HV	12.16	6.44	0.00647	0.00343	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	2.20	9.69	0.00117	0.00516	PASS
Extreme (50°C)		5.65	7.58	0.00301	0.00403	PASS
Extreme (40°C)		4.87	4.51	0.00259	0.00240	PASS
Extreme (30°C)		16.84	4.84	0.00896	0.00258	PASS
Extreme (20°C)		11.36	4.81	0.00604	0.00256	PASS
Extreme (10°C)		5.36	9.25	0.00285	0.00492	PASS
Extreme (0°C)		15.44	14.62	0.00821	0.00778	PASS
Extreme (-10°C)		13.12	17.65	0.00698	0.00939	PASS
Extreme (-20°C)		9.32	17.55	0.00496	0.00934	PASS
Extreme (-30°C)		2.57	2.60	0.00137	0.00139	PASS
25°C		LV	11.82	3.61	0.00629	0.00192
	HV	14.33	14.47	0.00762	0.00770	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	6.47	7.65	0.00344	0.00407	PASS
Extreme (50°C)		15.72	15.83	0.00836	0.00842	PASS
Extreme (40°C)		15.04	3.78	0.00800	0.00201	PASS
Extreme (30°C)		11.22	6.21	0.00597	0.00330	PASS
Extreme (20°C)		11.88	17.94	0.00632	0.00954	PASS
Extreme (10°C)		15.11	6.81	0.00804	0.00362	PASS
Extreme (0°C)		4.95	15.65	0.00263	0.00833	PASS
Extreme (-10°C)		6.23	16.58	0.00331	0.00882	PASS
Extreme (-20°C)		6.62	1.63	0.00352	0.00087	PASS
Extreme (-30°C)		9.93	11.87	0.00528	0.00631	PASS
25°C		LV	5.05	10.23	0.00269	0.00544
	HV	11.47	1.29	0.00610	0.00068	PASS

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

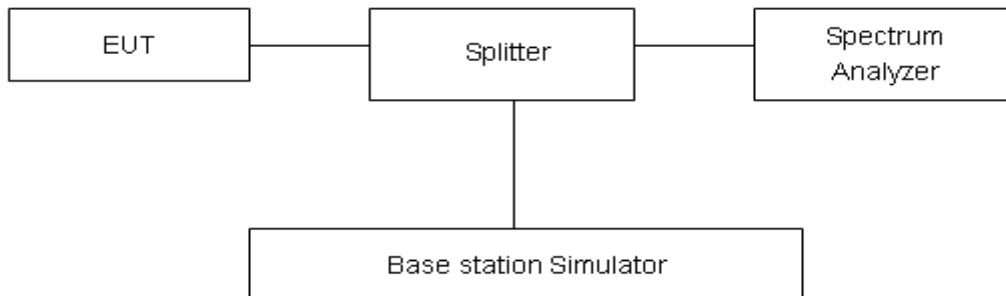

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm
-------	---------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported. The signal beyond the limit is carrier.

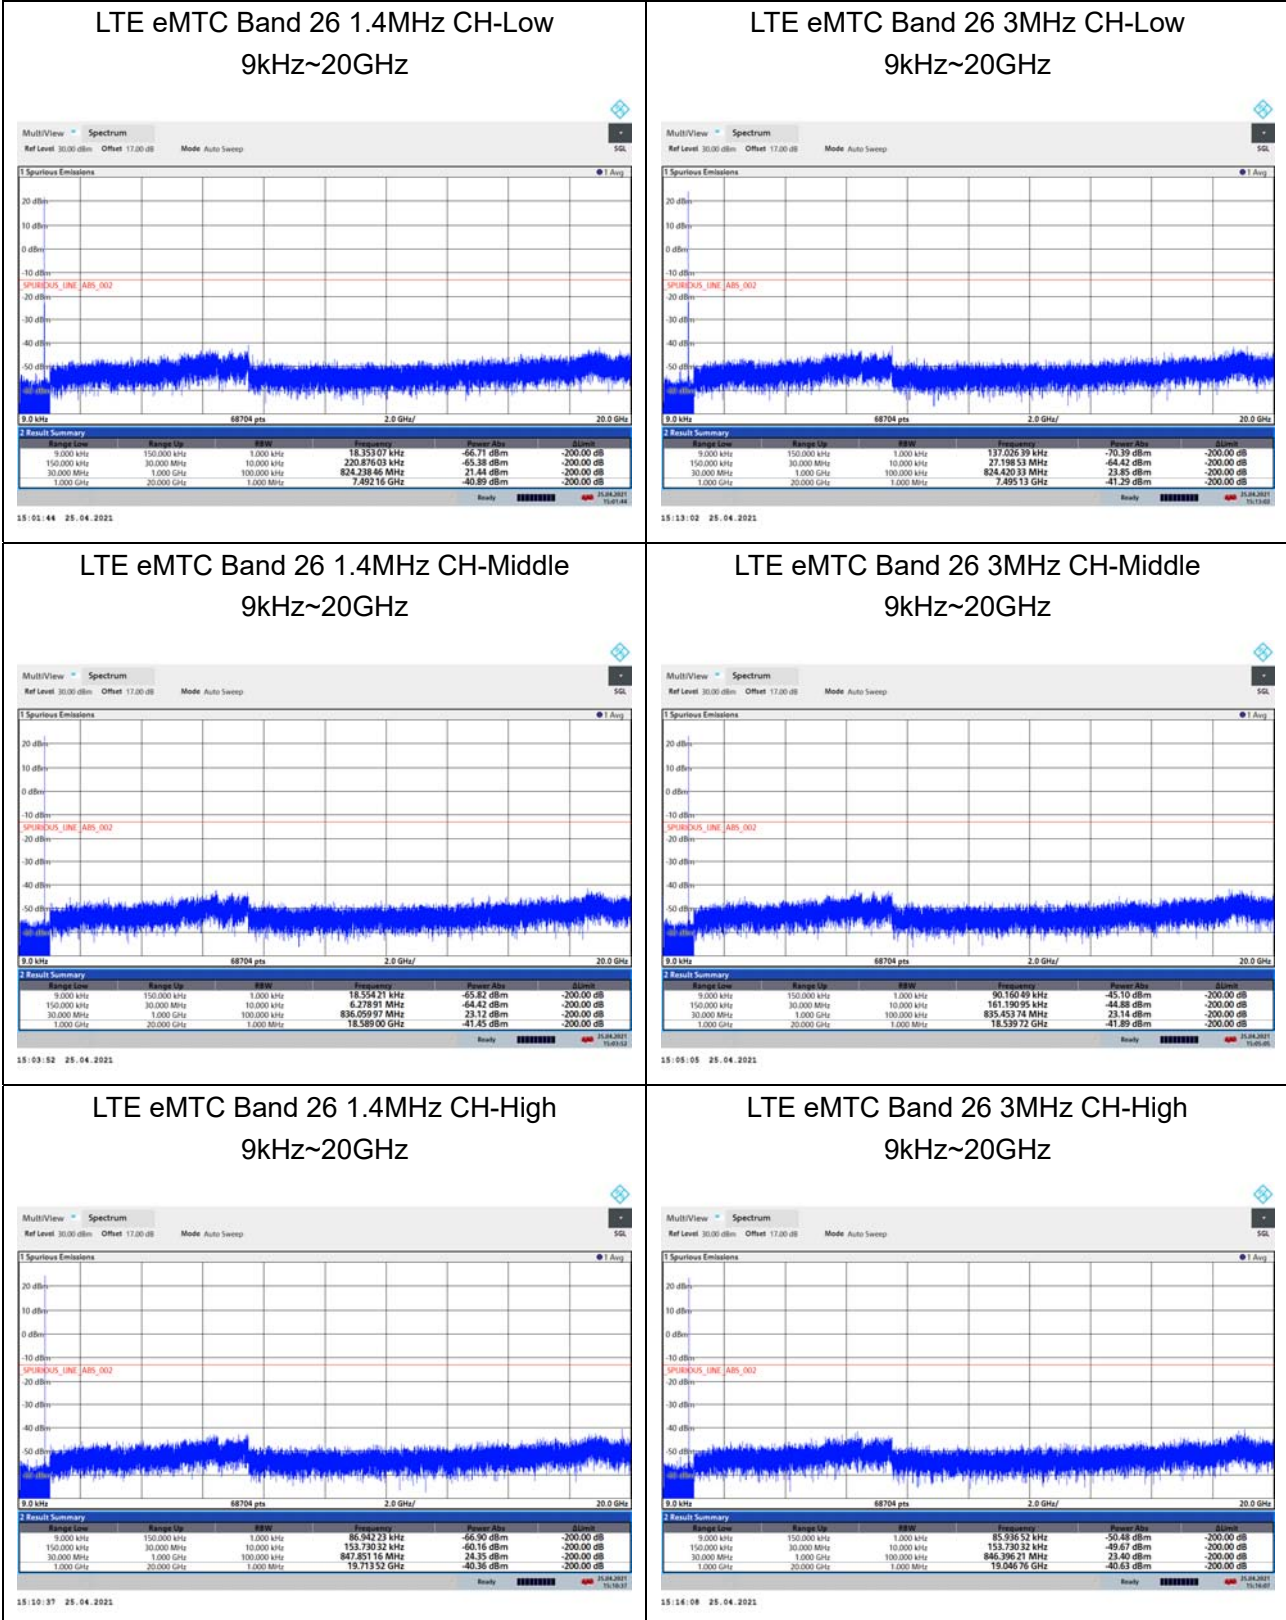


LTE eMTC Band 26 5MHz CH-Low
9kHz~20GHz

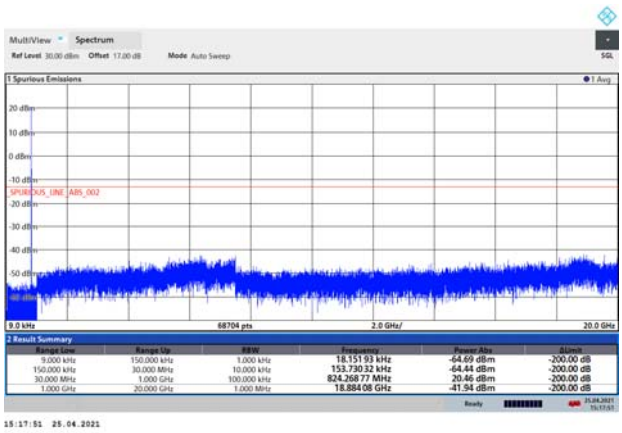


LTE eMTC Band 26 10MHz CH-Low
9kHz~20GHz

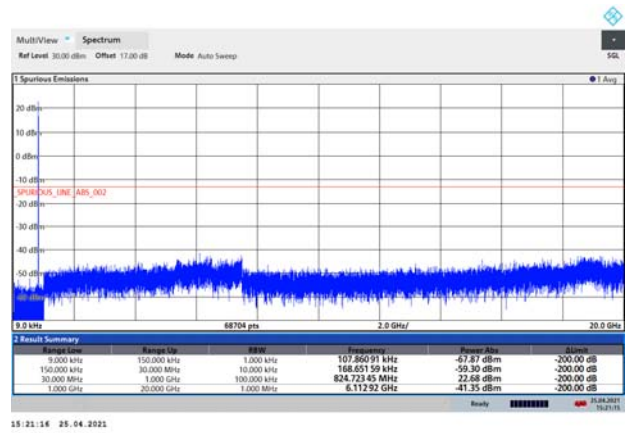


LTE eMTC Band 26 5MHz CH-Middle
9kHz~20GHz

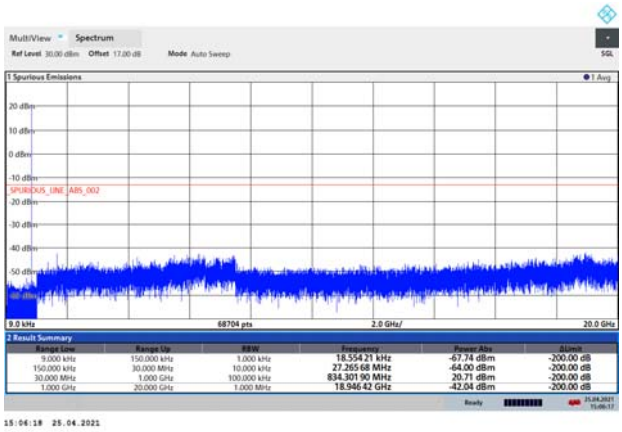


LTE eMTC Band 26 10MHz CH-Middle
9kHz~20GHz

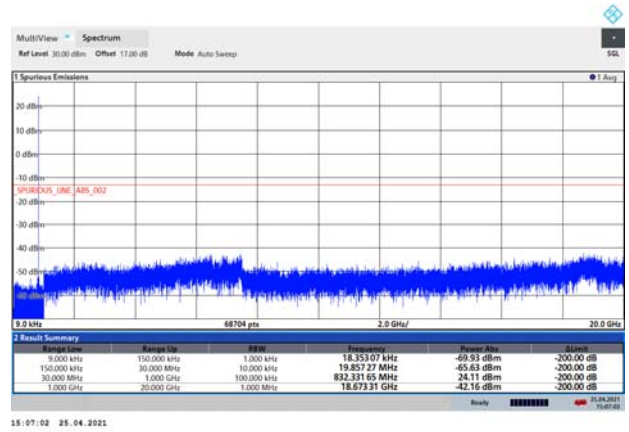


LTE eMTC Band 26 5MHz CH-High
9kHz~20GHz

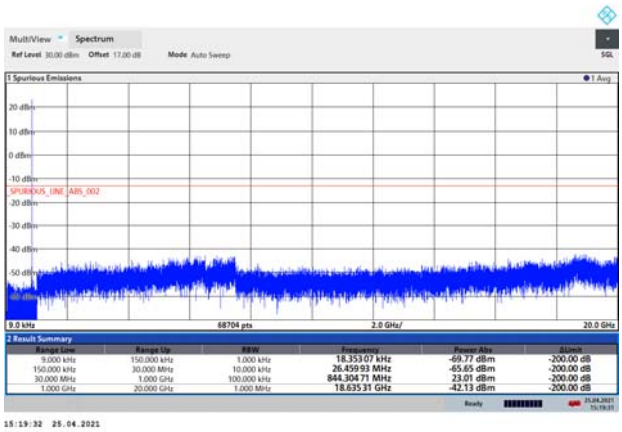


LTE eMTC Band 26 10MHz CH-High
9kHz~20GHz

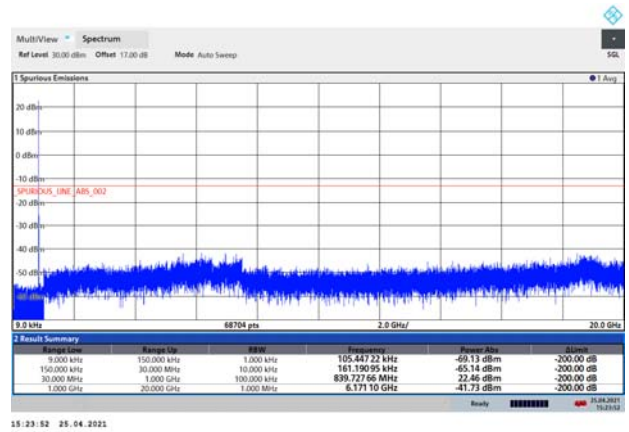


LTE eMTC Band 26 15MHz CH-Low 9kHz~20GHz

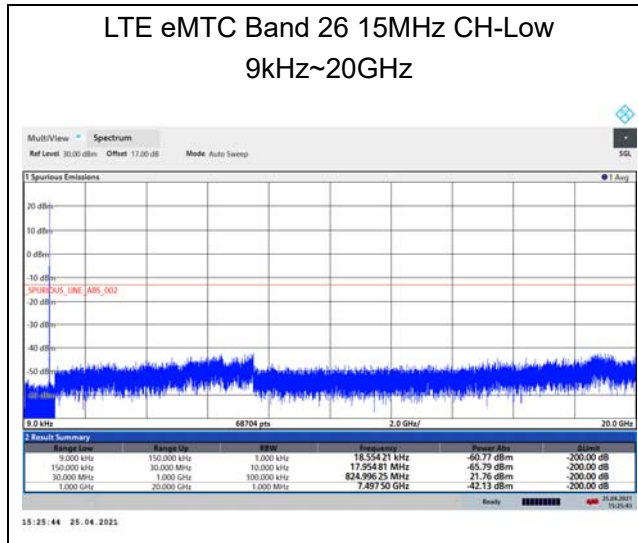

LTE eMTC Band 26 15MHz CH-Middle 9kHz~20GHz

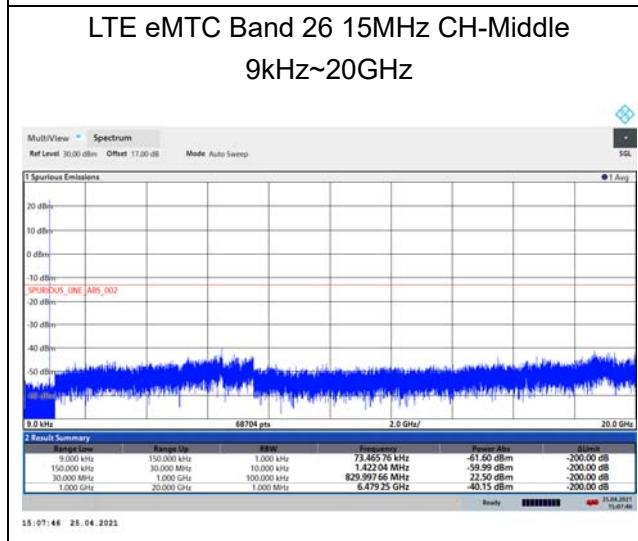

LTE eMTC Band 26 15MHz CH-High 9kHz~20GHz

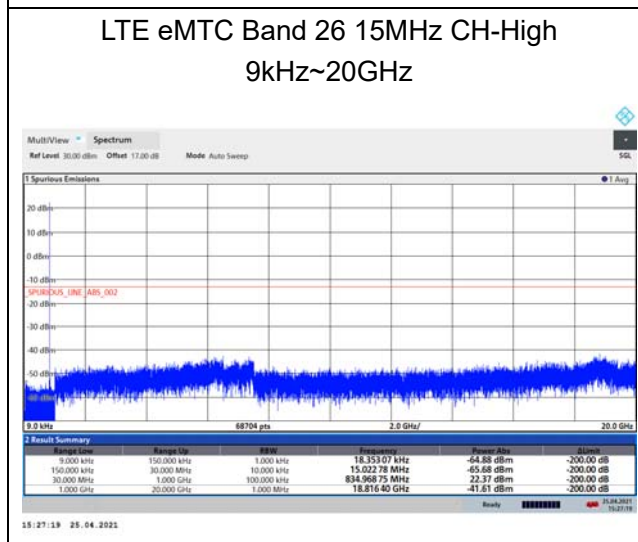

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz,VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
 The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

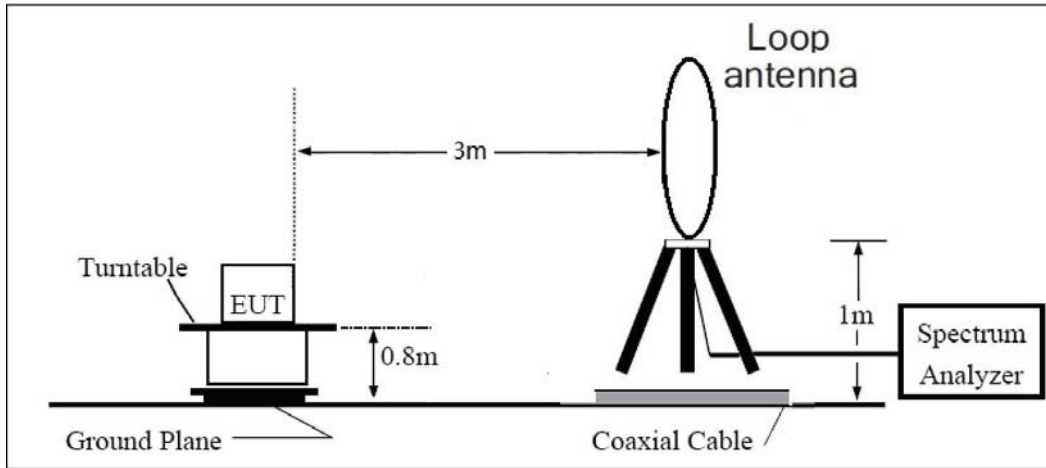

30MHz ~ 1GHz

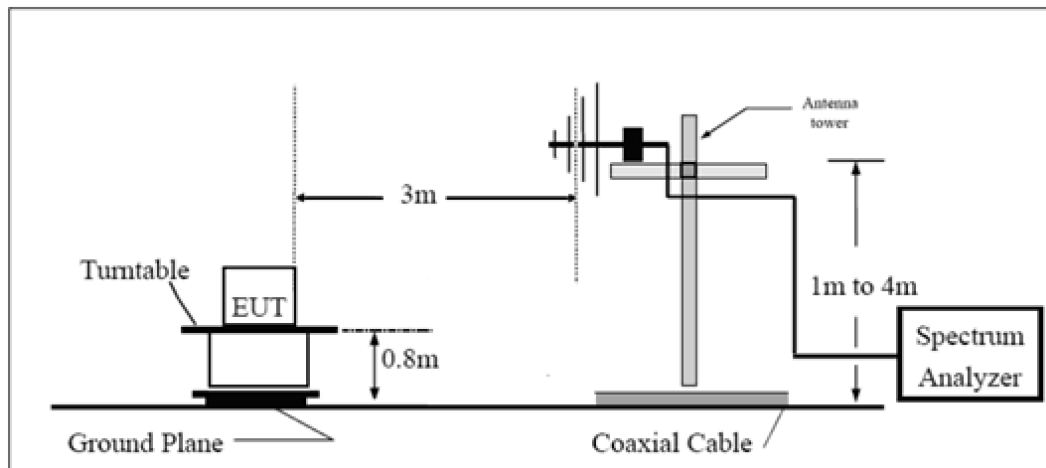

Above 1GHz

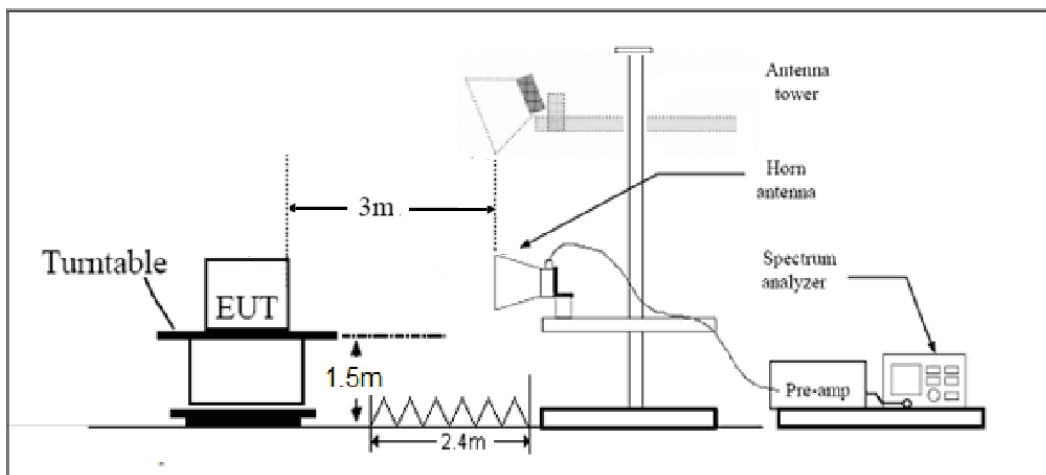

Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE eMTC Band 26 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1672.2	-48.45	1.70	8.70	Horizontal	-43.60	-13.00	30.60	225
3	2508.3	-48.56	2.30	12.00	Horizontal	-41.01	-13.00	28.01	270
4	3344.4	-60.92	2.70	12.70	Horizontal	-53.07	-13.00	40.07	225
5	4180.5	-63.42	3.00	12.50	Horizontal	-56.07	-13.00	43.07	0
6	5016.6	-58.97	3.40	12.50	Horizontal	-52.02	-13.00	39.02	45
7	5852.7	-59.03	3.40	12.80	Horizontal	-51.78	-13.00	38.78	315
8	6688.8	-58.36	4.10	11.50	Horizontal	-53.11	-13.00	40.11	90
9	7524.9	-54.08	4.20	12.20	Horizontal	-48.23	-13.00	35.23	45
10	8361.0	-55.92	4.30	12.50	Horizontal	-49.87	-13.00	36.87	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

LTE eMTC Band 26 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.6	-50.07	1.70	8.70	Horizontal	-45.22	-13.00	32.22	315
3	2502.9	-49.33	2.30	12.00	Horizontal	-41.78	-13.00	28.78	270
4	3337.2	-65.04	2.70	12.70	Horizontal	-57.19	-13.00	44.19	45
5	4171.5	-60.74	3.00	12.50	Horizontal	-53.39	-13.00	40.39	135
6	5005.8	-60.18	3.40	12.50	Horizontal	-53.23	-13.00	40.23	180
7	5840.1	-58.88	3.40	12.80	Horizontal	-51.63	-13.00	38.63	90
8	6674.4	-57.23	4.10	11.50	Horizontal	-51.98	-13.00	38.98	45
9	7508.7	-55.02	4.20	12.20	Horizontal	-49.17	-13.00	36.17	315
10	8343.0	-54.87	4.30	12.50	Horizontal	-48.82	-13.00	35.82	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

LTE eMTC Band 26 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1660.0	-50.36	2.00	10.75	Horizontal	-43.76	-13.00	30.76	180
3	2490.0	-46.32	2.51	11.05	Horizontal	-39.93	-13.00	26.93	270
4	3320.0	-61.99	4.20	11.15	Horizontal	-57.19	-13.00	44.19	135
5	4150.0	-59.59	5.20	11.15	Horizontal	-55.79	-13.00	42.79	45
6	4980.0	-57.37	5.50	11.95	Horizontal	-53.07	-13.00	40.07	315
7	5810.0	-57.97	5.70	13.55	Horizontal	-52.27	-13.00	39.27	0
8	6640.0	-55.71	6.30	13.75	Horizontal	-50.41	-13.00	37.41	45
9	7470.0	-52.91	6.80	13.85	Horizontal	-48.01	-13.00	35.01	270
10	8300.0	-55.15	6.90	14.25	Horizontal	-49.95	-13.00	36.95	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2020-12-13	2021-12-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2021-12-15
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2020-12-13	2021-12-12
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2021-5-15	2022-5-14
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

ANNEX C: Product Change Description (Variant 1)

The Product Change Description are submitted separately.

ANNEX D: Product Change Description (Variant 2)

The Product Change Description are submitted separately.