



RF Test Report

Applicant: Quectel Wireless Solutions Co., Ltd.
Address: Building 5, Shanghai Business Park Phase III (Area B), No.1016
Tianlin Road, Minhang District, Shanghai, 200233, China
Product: Wi-Fi & Bluetooth Module
Model No.: FCS852R
Brand Name: QUECTEL
FCC ID: XMR2023FCS852R
Standards: FCC CFR47 Part 15C
Report No.: PD20230218RF09
Issue Date: 2024/03/01
Test Result: PASS *

* The above equipment has been tested and compliance with the requirement of the relative standards by Hefei Panwin Technology Co., Ltd.

Charlie Wang

Alec Yang

Reviewed By: Charlie Wang

Approved By: Alec Yang

Hefei Panwin Technology Co., Ltd.

Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin
Avenue, High-tech Zone, Hefei City, Anhui Province, China
TEL: +86-0551-63811775

Revision History

Report No.	Version	Description	Issue Date	Note
PD20230218RF09	1	Initial Report	2024/03/01	Valid

CONTENTS

1 General Information	5
1.1 Notes of the Test Report	5
1.2 Test Facility	5
1.3 Testing Laboratory	5
2 General Description of Equipment under Test	6
2.1 Details of Application	6
2.2 General Information	6
2.3 Applicable Standard(s)	7
3 Test Condition	8
3.1 Test Configuration	8
3.2 Carrier Frequency and Channel	9
3.3 Equipment List	10
3.4 Support Equipment List	11
3.5 Test Uncertainty	11
4 Test Items Description	12
4.1 Output Power Measurement	12
4.2 6dB and 99% Bandwidth Measurement	14
4.3 Power Spectral Density Measurement	15
4.4 Conducted Band Edges and Spurious Emission Measurement	17
4.5 Radiated Band Edges and Spurious Emission Measurement	18
4.6 AC Conducted Emission Measurement	22
4.7 Antenna Requirements	24
Appendix A – Test Results of Conducted Test	26
Appendix B – Test Results of Radiated Test	39
Appendix C – The EUT Appearance	48
Appendix D – Test Setup Photograph	48

Test Summary

No.	Test Case	FCC Rules	Verdict
1	Output Power Measurement	15.247(b)	PASS
2	6dB and 99% Bandwidth Measurement	15.247(a)(2)	PASS
3	Power Spectral Density Measurement	15.247(e)	PASS
4	Conducted Band Edges and Spurious Emission Measurement	15.247(d)	PASS
5	Radiated Band Edges and Spurious Emission Measurement	15.247(d)	PASS
6	AC Conducted Emission Measurement	15.207	PASS
7	Antenna Requirements	15.203 & 15.247(b)	PASS

Date of Testing: 2023/12/16 to 2024/01/27

Date of Sample Received: 2023/12/07

- We, Hefei Panwin Technology Co., Ltd., would like to declare that the tested sample has been evaluated in accordance with the procedures given in applied standard(s) in **Section 2.3** of this report and shown compliance with the applicable technical standards.

- All indications of PASS/FAIL in this report are based on interpretations and/or observations of test results.

Measurement Uncertainties were not taken into account and are published for informational purposes only.

1 General Information

1.1 Notes of the Test Report

This report is invalid without signature of auditor and approver or with any alterations. The report shall not be partially reproduced without written approval of the testing company. Entrusted test results are only responsible for incoming samples. If there is any objection to the testing report, it shall be raised to the testing company within 15 days from the date of receiving the report. In the test results, "NA" means "not applicable", and the test items marked with "Δ" are subcontracted projects.

1.2 Test Facility

FCC (Designation number: CN1361, Test Firm Registration Number: 473156)

Hefei Panwin Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 6849.01)

Hefei Panwin Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Laboratory

Company Name	Hefei Panwin Technology Co., Ltd.
Address	Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China
Telephone	+86-0551-63811775
Post Code	230031

2 General Description of Equipment under Test

2.1 Details of Application

Applicant	Quectel Wireless Solutions Co., Ltd.
Applicant Address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer Address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

2.2 General Information

Product	Wi-Fi & Bluetooth Module
Model	FCS852R
SN	1. E1823K90Q000124 2. E1823K90Q000148
Hardware Version	R1.0
Software Version	NA
Antenna Type	External Antenna
Antenna Gain	-0.10dBi
Additional Beamforming Gain	NA
Max. Conducted Power	BLE: 8.10dBm
Operating voltage range	3.1 V to 3.6 V; Rated Power Supply Voltage 3.3V
Type of Modulation	Bluetooth LE 5.3: GFSK
Operating Frequency Range(s)	Bluetooth LE: 2402 to 2480MHz

Note: The declared of product specification for EUT and/or Antenna presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

2.3 Applicable Standard(s)

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 Test Condition

3.1 Test Configuration

Test mode

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The worst cases were recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes (Z, X, Y axis), receiver antenna polarization (horizontal and vertical), the worst emission was found in Z position and the worst case was recorded.

Test Mode	Data Rate
Bluetooth LE	125kbps
	500kbps
	1Mbps
	2Mbps

3.2 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq.(MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

3.3 Equipment List

Conducted

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
Spectrum Analyzer	KEYSIGHT	N9020B	PWC0055	1 Year	2024/10/11
DC Power	KEYSIGHT	E3640A	PWC0046	1 Year	2024/10/11
RF Control Unit	Tonseced	JS0806-2	PWC0055	/	/
Shielded Chamber	Maorui	MR543	PWC0041	3 Years	2026/08/26
Test Software	Tonseced	JS1120-3 V3.2.22	/	/	/

Radiated

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
EMI Test Receiver	R&S	ESR7	PWB0023	1 Year	2024/10/11
Spectrum Analyzer	R&S	FSV3044	PWB0024	1 Year	2024/10/11
Loop Antenna	R&S	HFH2-Z2E	PWB0026	1 Year	2024/10/21
TRILOG Broadband Antenna	Schwarzbeck	VULB9162	PWB0029	1 Year	2024/10/14
Double-Ridged Guide Antenna	ETS-Lindgren	3117	PWB0031	1 Year	2024/10/12
k Type Horn Antenna	Steatite Antennas	QMS-00880	PWB0035	1 Year	2024/10/17
Anechoic Chamber	ETS.LINDGREN	Fact 3-2m	PWB0003	3 Years	2026/06/05
Pre-Amplifier	R&S	SCU18F	PWB0034	1 Year	2024/10/11
Pre-Amplifier	R&S	SCU40F1	PWB0036	1 Year	2024/10/11
Pre-Amplifier	COM-MW	DLNA8	PWB0094	1 Year	2024/11/08
Test Software	R&S	ELEKTRA 4.20.2	/	/	/

3.4 Support Equipment List

Equipment	Manufacturer	Description	Model	Serial Number
EVB	QUECTEL	/	/	/
USB Cable	/	/	/	/
Adapter	Xiamen Xinsenhai Electronics Co., Ltd	Output:12V 60W	P60EB120500	/
External Antenna	QUECTEL	/	/	/

3.5 Test Uncertainty

No.	Parameter	Uncertainty
1	DTS Bandwidth	1.9 %
2	Occupied channel bandwidth	1.9 %
3	Duty Cycle	0.11 %
4	Maximum Conducted Output Power	1.18 dB
5	Maximum Power Spectral Density Level	0.98 dB
6	Band-edge Compliance	1.21 dB
7	Unwanted Emissions In Non-restricted Frequency Bands	9kHz-7GHz: 1.21 dB 7GHz-40GHz: 3.31 dB
8	Radiated Band Edges and Spurious Emission	Below 1GHz: 4.88 dB Above 1GHz: 5.06 dB
9	Temperature	3 °C
10	Humidity	1.3 %
11	Supply Voltages	0.006 V

4 Test Items Description

Ambient condition

Shielded Chamber

Temperature [°C]	21.1 to 23.0
Humidity [%RH]	32 to 33
Pressure [kPa]	103.1 to 103.2

Anechoic Chamber

Temperature [°C]	20.1 to 24.3
Humidity [%RH]	36 to 48
Pressure [kPa]	101.1 to 103.6

4.1 Output Power Measurement

4.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


4.1.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.

4.1.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.1 instrument with a resolution bandwidth that is greater than the DTS bandwidth.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle.

4.1.4 Test Setup

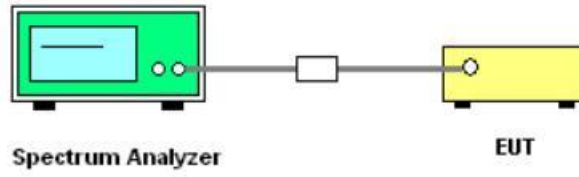

4.1.5 Test Results

See Appendix A.1.

4.2 6dB and 99% Bandwidth Measurement

4.2.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz


4.2.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.

4.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

4.2.4 Test Setup

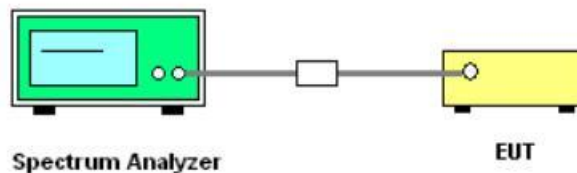

4.2.5 Test Results

See Appendix A.2.

4.3 Power Spectral Density Measurement

4.3.1 Limit of Power Spectral Density

Rule Part 15.247(e) specifies that " For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.

4.3.3 Test Procedures


The testing follows ANSI C63.10-2013 clause 11.10.5.

Method AVGPSD-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction.

The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$):

1. Measure the duty cycle (D) of the transmitter output signal as described in 11.6.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
5. Set VBW $\geq [3 \times \text{RBW}]$.
6. Detector = power averaging (rms) or sample detector (when rms not available).
7. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
8. Sweep time = auto couple.
9. Do not use sweep triggering; allow sweep to "free run."
10. Employ trace averaging (rms) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
13. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

4.3.4 Test Setup

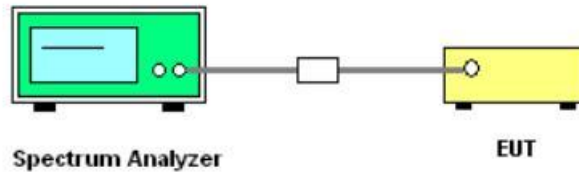

4.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.3.

4.4 Conducted Band Edges and Spurious Emission Measurement

4.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band. In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


4.4.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test

4.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

4.4.4 Test Setup

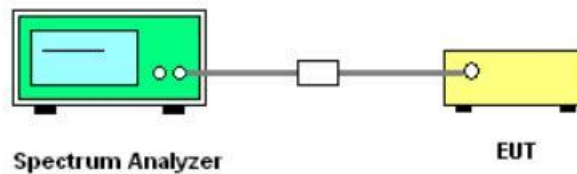

4.4.5 Test Result

Please refer to Appendix A.4.

4.5 Radiated Band Edges and Spurious Emission Measurement

4.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30-88	100	3
88 -216	150	3
216 - 960	200	3
Above 960	500	3

4.5.2 Measuring Instruments


The section 3.3 of List of Measuring Equipment of this test report is used for test.

4.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level -Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured.
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
 - (3) Set RBW = 1 MHz, VBW= 3MHz for ≥ 1 GHz for peak measurement
 For average measurement:
 VBW= 10 Hz, when duty cycle is no less than 98 percent.
 $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.5.4 Test Setup


For radiated emissions below 30MHz

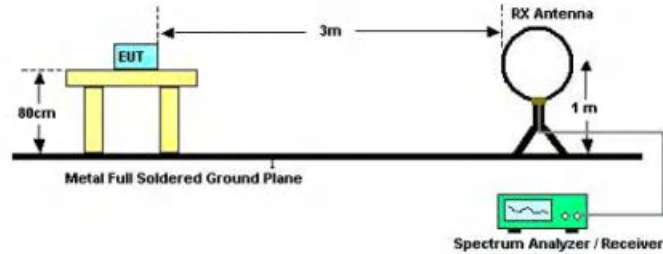

For radiated emissions from 30MHz to 1GHz

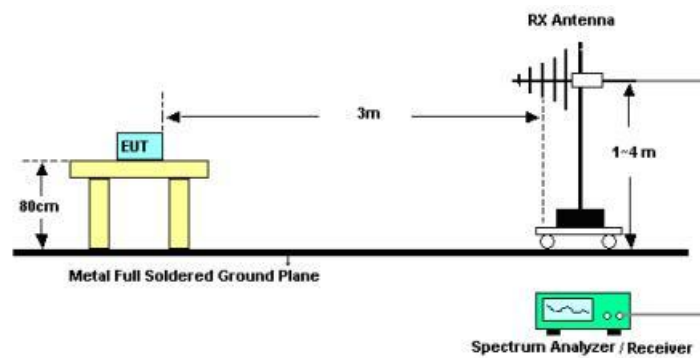

For radiated emissions above 1GHz

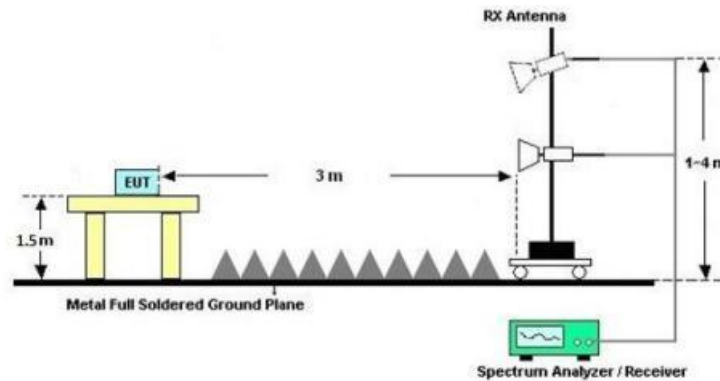

4.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

4.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.1.

4.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz whichever is lower)

Please refer to Appendix B.1.

4.5.8 Duty Cycle

Please refer to Appendix B.2.

4.6 AC Conducted Emission Measurement

4.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Decreases with the logarithm of the frequency.

4.6.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.


4.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth =9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.6.4 Test Equipment

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
EMI Test Receiver	R&S	ESR 3	PWB0061	1 Year	2024/10/11
LISN	R&S	ENV216	PWB0062	1 Year	2024/10/11
Shielded Chamber	MIX-BEP	SR 433	PWB0002	3 Years	2024/08/08
Test Software	R&S	ELEKTRA V4.20.2	/	/	/

4.6.5 Test Setup

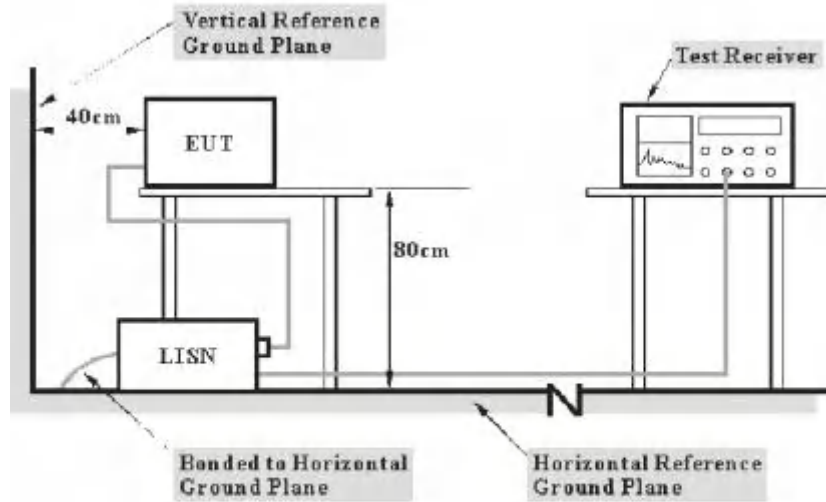

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

4.6.6 Test Result

Test Site	EMC 02 Shielding Room	Test Time	2024/01/30
Engineer	Kane sun	Test Voltage	120Vac/60Hz

Ambient condition


Temperature	Relative humidity	Pressure
20.3°C to 20.7°C	40%RH to 41%RH	101.89kPa to 102.09kPa

4.6.7 Test Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line
0.182	45.24	64.42	19.18	33.82	54.42	20.60	9.52	L1
0.267	42.17	61.21	19.05	31.11	51.21	20.10	9.52	L1
0.420	40.68	57.45	16.77	29.54	47.45	17.90	9.52	L1
0.555	33.43	56.00	22.57	20.82	46.00	25.18	9.52	L1
1.505	30.25	56.00	25.75	13.46	46.00	32.54	9.53	L1
5.987	26.34	60.00	33.66	6.62	50.00	43.38	9.56	L1
0.200	46.16	63.63	17.47	34.15	53.63	19.48	9.52	N
0.258	44.50	61.50	16.99	32.85	51.50	18.65	9.53	N

0.438	41.87	57.10	15.23	27.70	47.10	19.40	9.53	N
0.951	29.41	56.00	26.59	15.57	46.00	30.43	9.53	N
5.064	26.63	60.00	33.37	6.12	50.00	43.88	9.56	N
25.634	19.76	60.00	40.24	8.67	50.00	41.33	9.67	N

Test Graphs

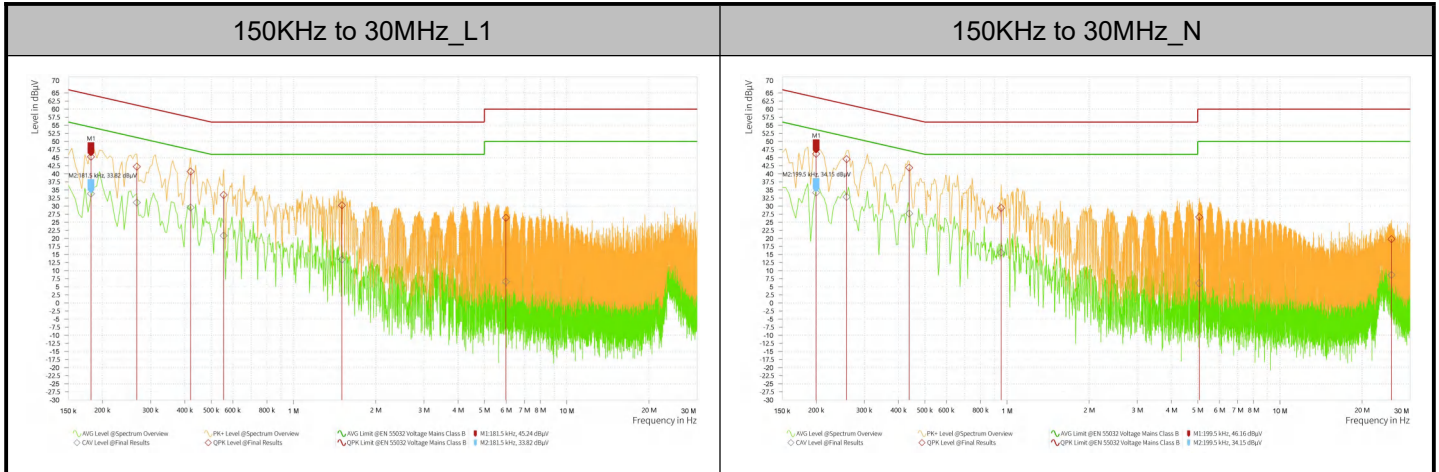

4.6.8 Uncertainty Measurement

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT. The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

CASE	Uncertainty
Continuous Emission (AC port)	2.92 dB

4.7 Antenna Requirements

4.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

4.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

4.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

Appendix A – Test Results of Conducted Test

A.1 Conducted Output Power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	7.83	≤30	7.73	≤36	PASS
BLE_1M	Ant1	2440	8.05	≤30	7.95	≤36	PASS
BLE_1M	Ant1	2480	7.38	≤30	7.28	≤36	PASS
BLE_2M	Ant1	2402	7.94	≤30	7.84	≤36	PASS
BLE_2M	Ant1	2440	8.07	≤30	7.97	≤36	PASS
BLE_2M	Ant1	2480	7.44	≤30	7.34	≤36	PASS
BLE_125K	Ant1	2402	7.91	≤30	7.81	≤36	PASS
BLE_125K	Ant1	2440	7.99	≤30	7.89	≤36	PASS
BLE_125K	Ant1	2480	7.32	≤30	7.22	≤36	PASS
BLE_500K	Ant1	2402	7.96	≤30	7.86	≤36	PASS
BLE_500K	Ant1	2440	8.10	≤30	8.00	≤36	PASS
BLE_500K	Ant1	2480	7.41	≤30	7.31	≤36	PASS

A.2 6dB and 99% Bandwidth

Test Result 6dB Bandwidth

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.504	2401.740	2402.244	0.5	PASS
BLE_1M	Ant1	2440	0.504	2439.740	2440.244	0.5	PASS
BLE_1M	Ant1	2480	0.504	2479.744	2480.248	0.5	PASS
BLE_2M	Ant1	2402	0.852	2401.492	2402.344	0.5	PASS
BLE_2M	Ant1	2440	0.852	2439.492	2440.344	0.5	PASS
BLE_2M	Ant1	2480	0.848	2479.492	2480.340	0.5	PASS
BLE_125K	Ant1	2402	0.600	2401.768	2402.368	0.5	PASS
BLE_125K	Ant1	2440	0.600	2439.768	2440.368	0.5	PASS
BLE_125K	Ant1	2480	0.600	2479.768	2480.368	0.5	PASS
BLE_500K	Ant1	2402	0.656	2401.744	2402.400	0.5	PASS
BLE_500K	Ant1	2440	0.656	2439.744	2440.400	0.5	PASS
BLE_500K	Ant1	2480	0.660	2479.744	2480.404	0.5	PASS

Test Result 99% Bandwidth

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0206	2401.5720	2402.5926	---	---
BLE_1M	Ant1	2440	1.0223	2439.5715	2440.5938	---	---
BLE_1M	Ant1	2480	1.0241	2479.5712	2480.5953	---	---
BLE_2M	Ant1	2402	2.0410	2401.0769	2403.1179	---	---
BLE_2M	Ant1	2440	2.0426	2439.0760	2441.1186	---	---
BLE_2M	Ant1	2480	2.0419	2479.0765	2481.1184	---	---
BLE_125K	Ant1	2402	1.0426	2401.5440	2402.5866	---	---
BLE_125K	Ant1	2440	1.0446	2439.5431	2440.5877	---	---
BLE_125K	Ant1	2480	1.0438	2479.5451	2480.5889	---	---
BLE_500K	Ant1	2402	1.0118	2401.5618	2402.5736	---	---
BLE_500K	Ant1	2440	1.0172	2439.5596	2440.5768	---	---
BLE_500K	Ant1	2480	1.0161	2479.5612	2480.5773	---	---

Test Graphs_6dB Bandwidth



BLE_2M-Ant1-2440-PASS



BLE_2M-Ant1-2480-PASS



BLE_125K-Ant1-2402-PASS



BLE_125K-Ant1-2440-PASS



BLE_125K-Ant1-2480-PASS



BLE_500K-Ant1-2402-PASS



BLE_500K-Ant1-2440-PASS




BLE_500K-Ant1-2480-PASS



Test Graphs_99% Bandwidth

<p style="text-align: center;">BLE_1M-Ant1-2402</p>	<p style="text-align: center;">BLE_1M-Ant1-2440</p>
<p style="text-align: center;">BLE_1M-Ant1-2480</p>	<p style="text-align: center;">BLE_2M-Ant1-2402</p>
<p style="text-align: center;">BLE_2M-Ant1-2440</p>	<p style="text-align: center;">BLE_2M-Ant1-2480</p>
<p style="text-align: center;">BLE_125K-Ant1-2402</p>	<p style="text-align: center;">BLE_125K-Ant1-2440</p>

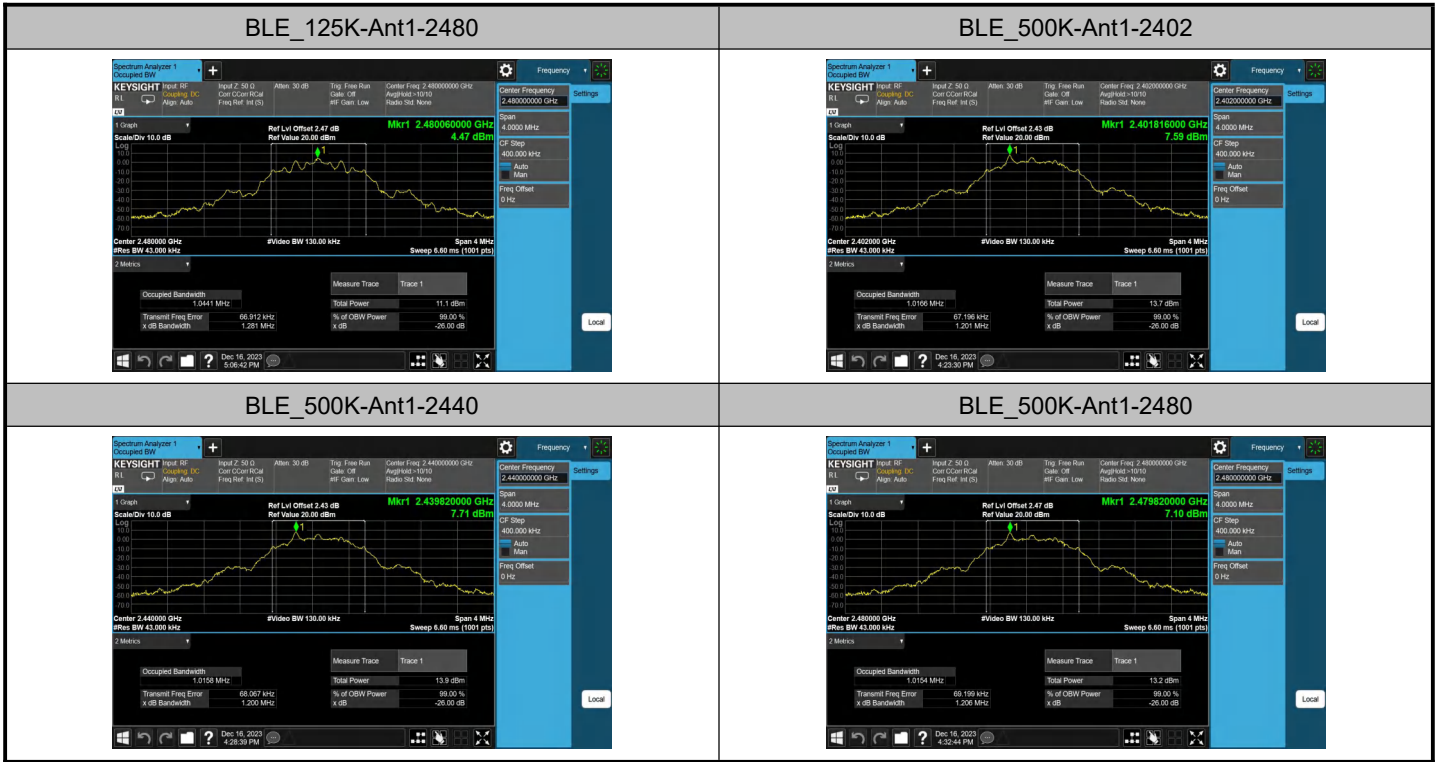


A.3 Power Spectral Density


Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.76	≤8.00	PASS
BLE_1M	Ant1	2440	-10.10	≤8.00	PASS
BLE_1M	Ant1	2480	-10.27	≤8.00	PASS
BLE_2M	Ant1	2402	-11.80	≤8.00	PASS
BLE_2M	Ant1	2440	-11.60	≤8.00	PASS
BLE_2M	Ant1	2480	-12.30	≤8.00	PASS
BLE_125K	Ant1	2402	1.43	≤8.00	PASS
BLE_125K	Ant1	2440	1.52	≤8.00	PASS
BLE_125K	Ant1	2480	0.89	≤8.00	PASS
BLE_500K	Ant1	2402	1.66	≤8.00	PASS
BLE_500K	Ant1	2440	1.84	≤8.00	PASS
BLE_500K	Ant1	2480	1.18	≤8.00	PASS


Test Graphs

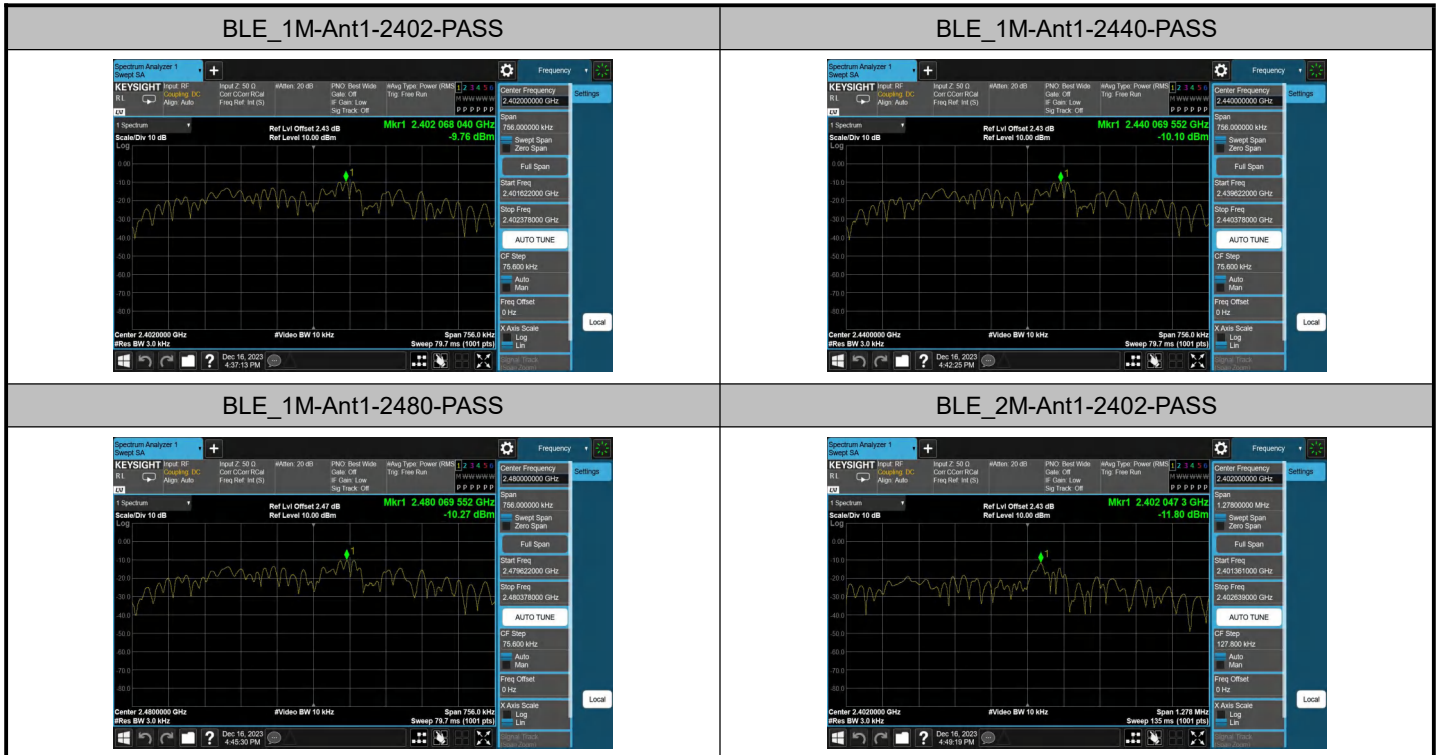


BLE_2M-Ant1-2440-PASS

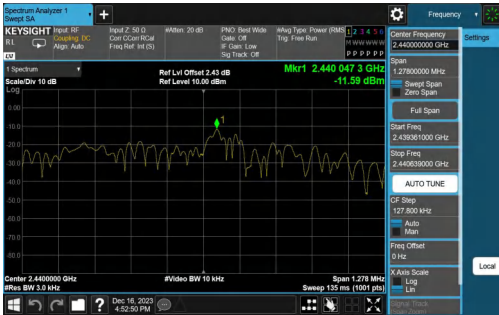

BLE_2M-Ant1-2480-PASS

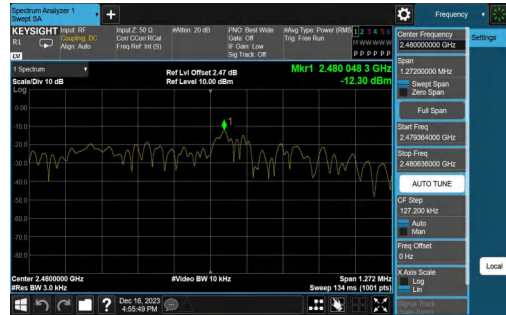


BLE_125K-Ant1-2402-PASS

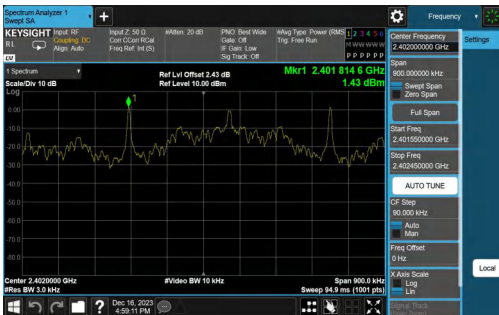


BLE_125K-Ant1-2440-PASS




BLE_125K-Ant1-2480-PASS

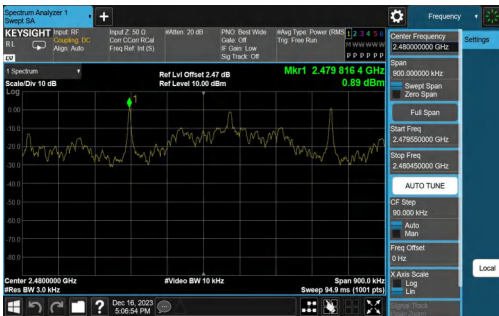


BLE_500K-Ant1-2402-PASS

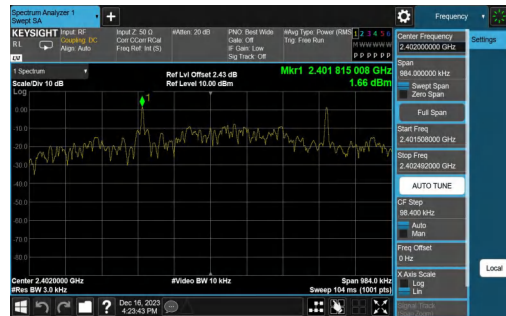

BLE_500K-Ant1-2440-PASS

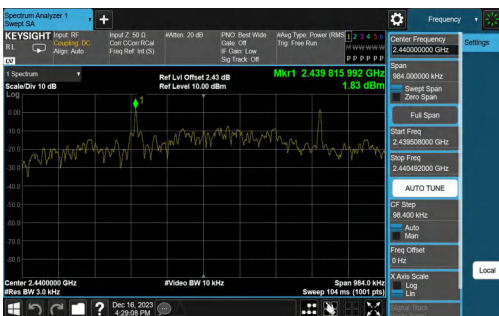

BLE_500K-Ant1-2480-PASS

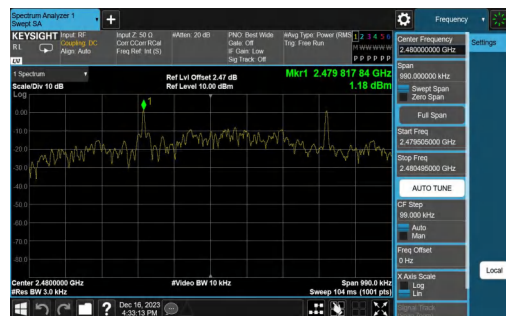

A.4 Conducted Band Edges and Spurious Emission

Test Result

Band Edges


Test Mode	Antenna	Ch Name	Frequency [MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	7.89	-54.13	≤-12.11	PASS
BLE_1M	Ant1	High	2480	7.31	-53.68	≤-12.69	PASS
BLE_2M	Ant1	Low	2402	7.69	-27.71	≤-12.31	PASS
BLE_2M	Ant1	High	2480	7.21	-54.02	≤-12.79	PASS
BLE_125K	Ant1	Low	2402	7.61	-52.79	≤-12.39	PASS
BLE_125K	Ant1	High	2480	6.95	-54.37	≤-13.05	PASS
BLE_500K	Ant1	Low	2402	7.73	-54.22	≤-12.27	PASS
BLE_500K	Ant1	High	2480	7.22	-54.1	≤-12.78	PASS

Spurious Emission

Test Mode	Antenna	Frequency[MHz]	Freq Range [MHz]	Ref Level [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	7.89	-57.63	≤-12.11	PASS
BLE_1M	Ant1	2402	1000~26500	7.89	-55.43	≤-12.11	PASS
BLE_1M	Ant1	2440	30~1000	7.53	-68.58	≤-12.47	PASS
BLE_1M	Ant1	2440	1000~26500	7.53	-55.09	≤-12.47	PASS
BLE_1M	Ant1	2480	30~1000	7.31	-69.14	≤-12.69	PASS
BLE_1M	Ant1	2480	1000~26500	7.31	-54.83	≤-12.69	PASS
BLE_2M	Ant1	2402	30~1000	7.69	-68.9	≤-12.31	PASS
BLE_2M	Ant1	2402	1000~26500	7.69	-55.05	≤-12.31	PASS
BLE_2M	Ant1	2440	30~1000	7.83	-69.15	≤-12.17	PASS
BLE_2M	Ant1	2440	1000~26500	7.83	-54.11	≤-12.17	PASS
BLE_2M	Ant1	2480	30~1000	7.21	-68.28	≤-12.79	PASS
BLE_2M	Ant1	2480	1000~26500	7.21	-54.5	≤-12.79	PASS
BLE_125K	Ant1	2402	30~1000	7.61	-68.35	≤-12.39	PASS
BLE_125K	Ant1	2402	1000~26500	7.61	-55.39	≤-12.39	PASS
BLE_125K	Ant1	2440	30~1000	7.66	-68.82	≤-12.34	PASS
BLE_125K	Ant1	2440	1000~26500	7.66	-54.4	≤-12.34	PASS
BLE_125K	Ant1	2480	30~1000	6.95	-68.93	≤-13.05	PASS
BLE_125K	Ant1	2480	1000~26500	6.95	-55.06	≤-13.05	PASS
BLE_500K	Ant1	2402	30~1000	7.73	-61.54	≤-12.27	PASS
BLE_500K	Ant1	2402	1000~26500	7.73	-54.52	≤-12.27	PASS
BLE_500K	Ant1	2440	30~1000	7.86	-59.93	≤-12.14	PASS

BLE_500K	Ant1	2440	1000~26500	7.86	-55.17	≤-12.14	PASS
BLE_500K	Ant1	2480	30~1000	7.22	-68.55	≤-12.78	PASS
BLE_500K	Ant1	2480	1000~26500	7.22	-54.5	≤-12.78	PASS


Test Graphs Band Edges

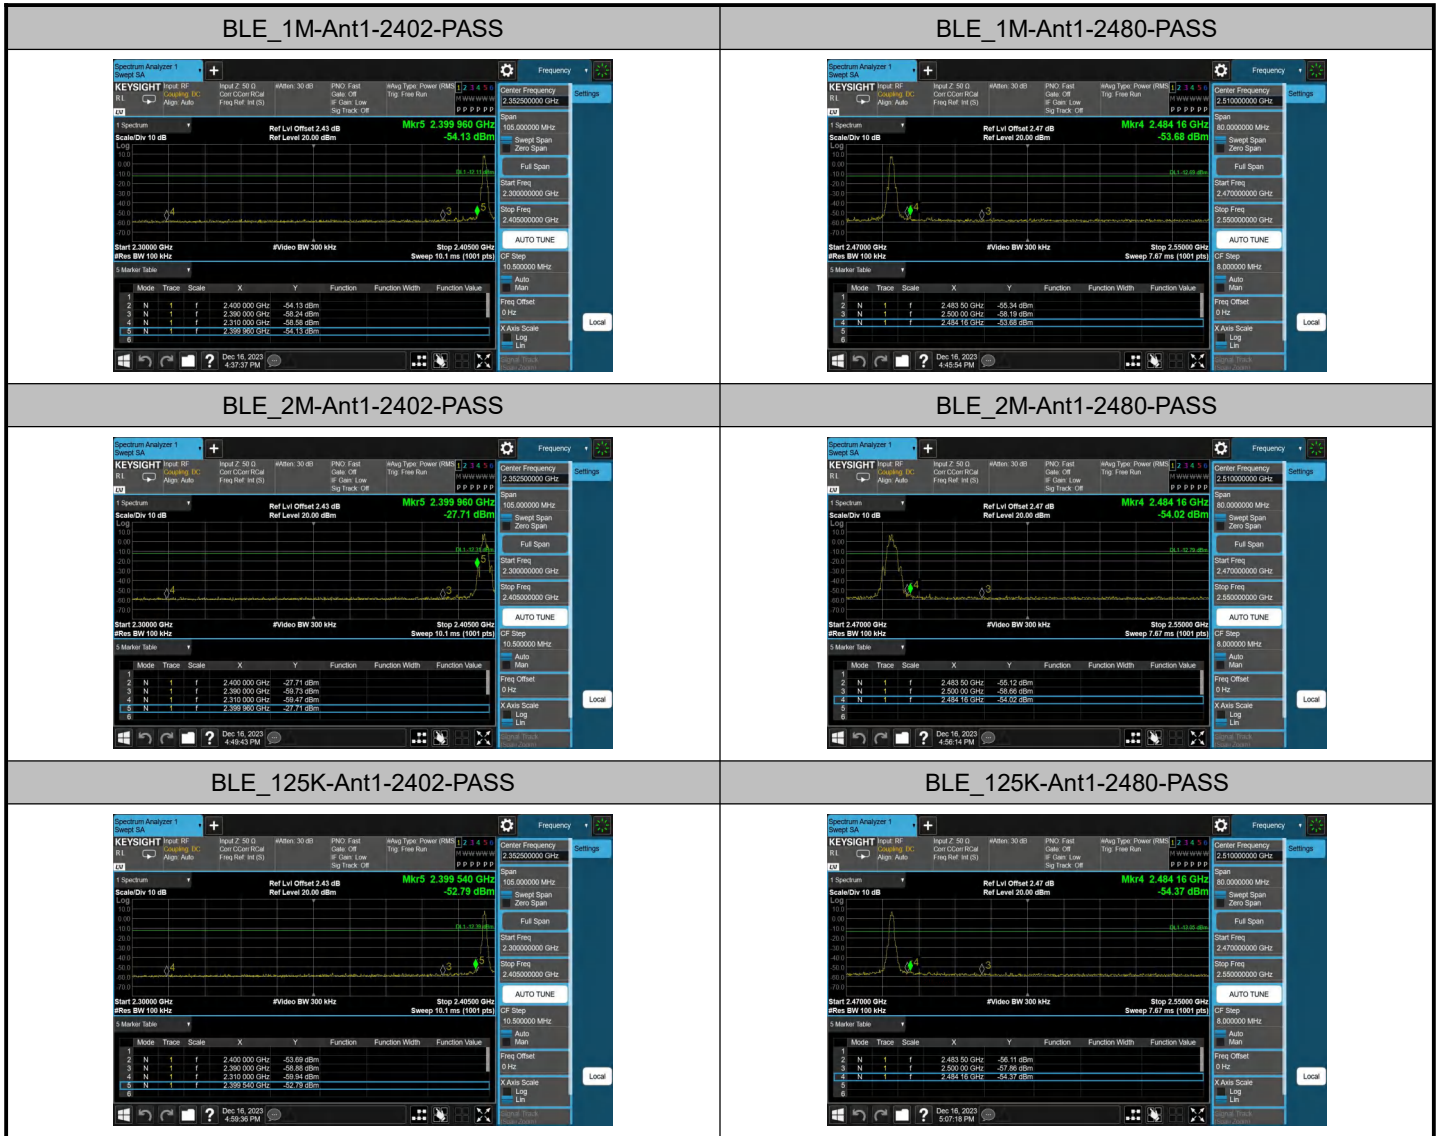

BLE_500K-Ant1-2402-PASS




BLE_500K-Ant1-2480-PASS

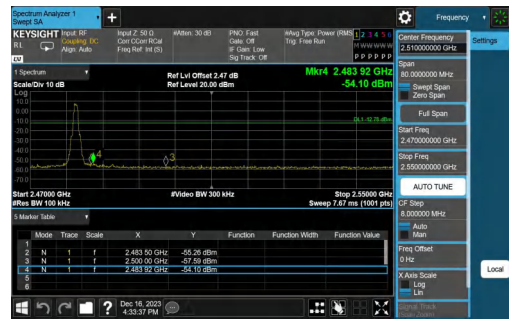

Spurious Emission


BLE_1M-Ant1-2402-30~1000-PASS

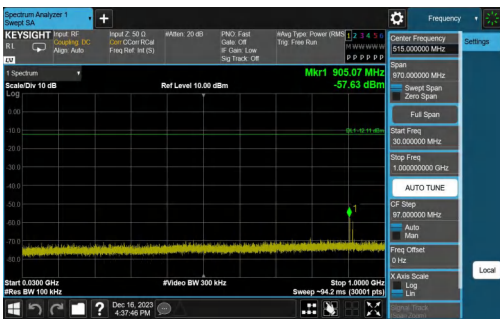

BLE_1M-Ant1-2402-1000~26500-PASS




BLE_1M-Ant1-2440-30~1000-PASS

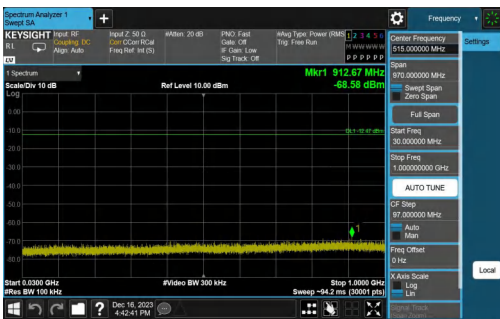


BLE_1M-Ant1-2440-1000~26500-PASS




BLE_1M-Ant1-2480-30~1000-PASS

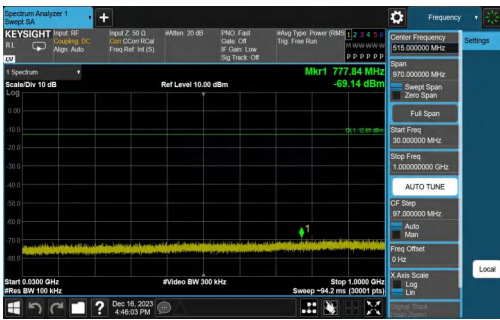

BLE_1M-Ant1-2480-1000~26500-PASS

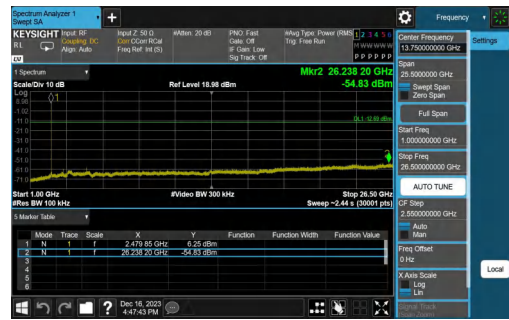


BLE_2M-Ant1-2402-30~1000-PASS

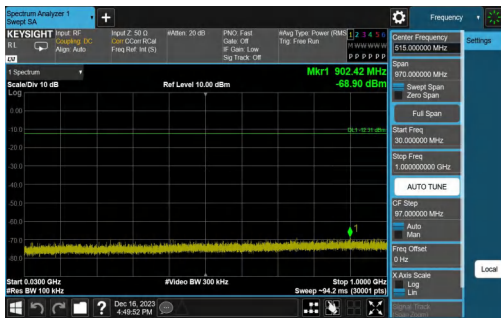

BLE_2M-Ant1-2402-1000~26500-PASS




BLE_2M-Ant1-2440-30~1000-PASS

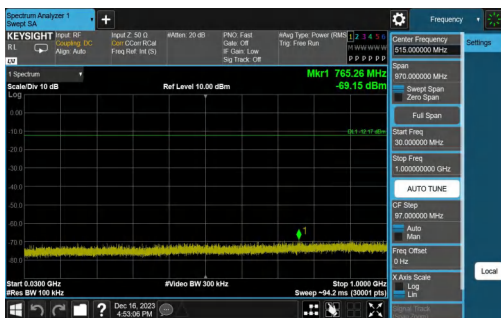

BLE_2M-Ant1-2440-1000~26500-PASS




BLE_2M-Ant1-2480-30~1000-PASS

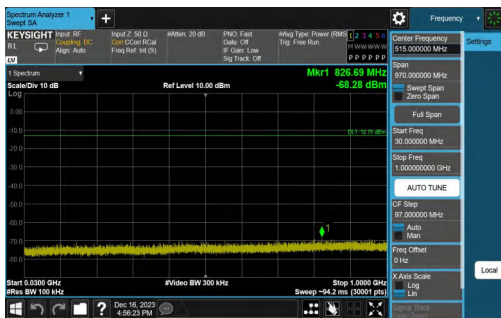

BLE_2M-Ant1-2480-1000~26500-PASS



BLE_125K-Ant1-2402-30~1000-PASS

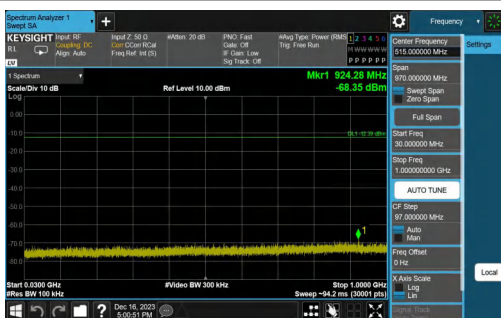



BLE_125K-Ant1-2402-1000~26500-PASS




BLE_125K-Ant1-2440-30~1000-PASS BLE_125K-Ant1-2440-1000~26500-PASS



BLE_125K-Ant1-2480-30~1000-PASS BLE_125K-Ant1-2480-1000~26500-PASS

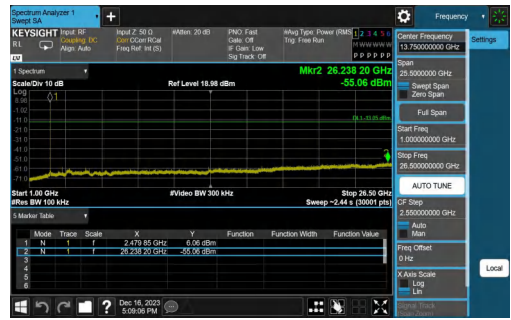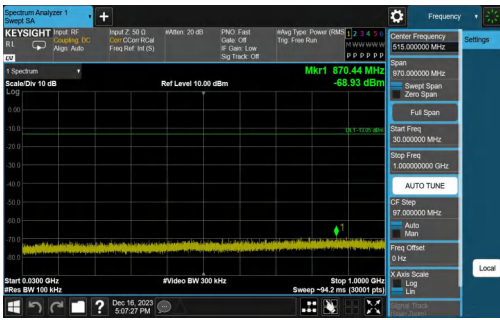

BLE_500K-Ant1-2402-30~1000-PASS BLE_500K-Ant1-2402-1000~26500-PASS

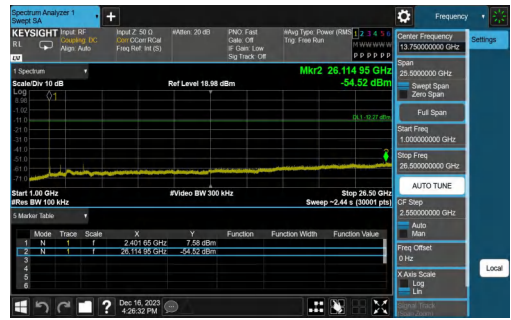

BLE_500K-Ant1-2440-30~1000-PASS BLE_500K-Ant1-2440-1000~26500-PASS



BLE_500K-Ant1-2480-30~1000-PASS



BLE_500K-Ant1-2480-1000~26500-PASS




Appendix B – Test Results of Radiated Test


B.1 Radiated Band Edges and Spurious Emission

Test Result_Band Edges

Test Mode & Test Freq.[MHz]	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Polarization	Azimuth [deg]
BLE_1M_2402	2,389.325	59.21	74.00	14.79	46.07	54.00	7.93	H	7.5
BLE_1M_2480	2,482.900	59.75	74.00	14.25	46.44	54.00	7.56	V	155
BLE_2M_2402	2,389.325	59.49	74.00	14.51	46.06	54.00	7.94	H	1.5
BLE_2M_2480	2,482.900	64.02	74.00	9.98	50.51	54.00	3.49	V	143.1
BLE_125K_2402	2,388.850	59.42	74.00	14.58	46.04	54.00	7.96	H	360
BLE_125K_2480	2,483.375	59.47	74.00	14.53	46.35	54.00	7.65	H	130
BLE_500K_2402	2,388.850	59.35	74.00	14.65	46.07	54.00	7.93	H	316.5
BLE_500K_2480	2,483.375	60.23	74.00	13.77	46.45	54.00	7.55	V	167

Test Graphs_Band Edges

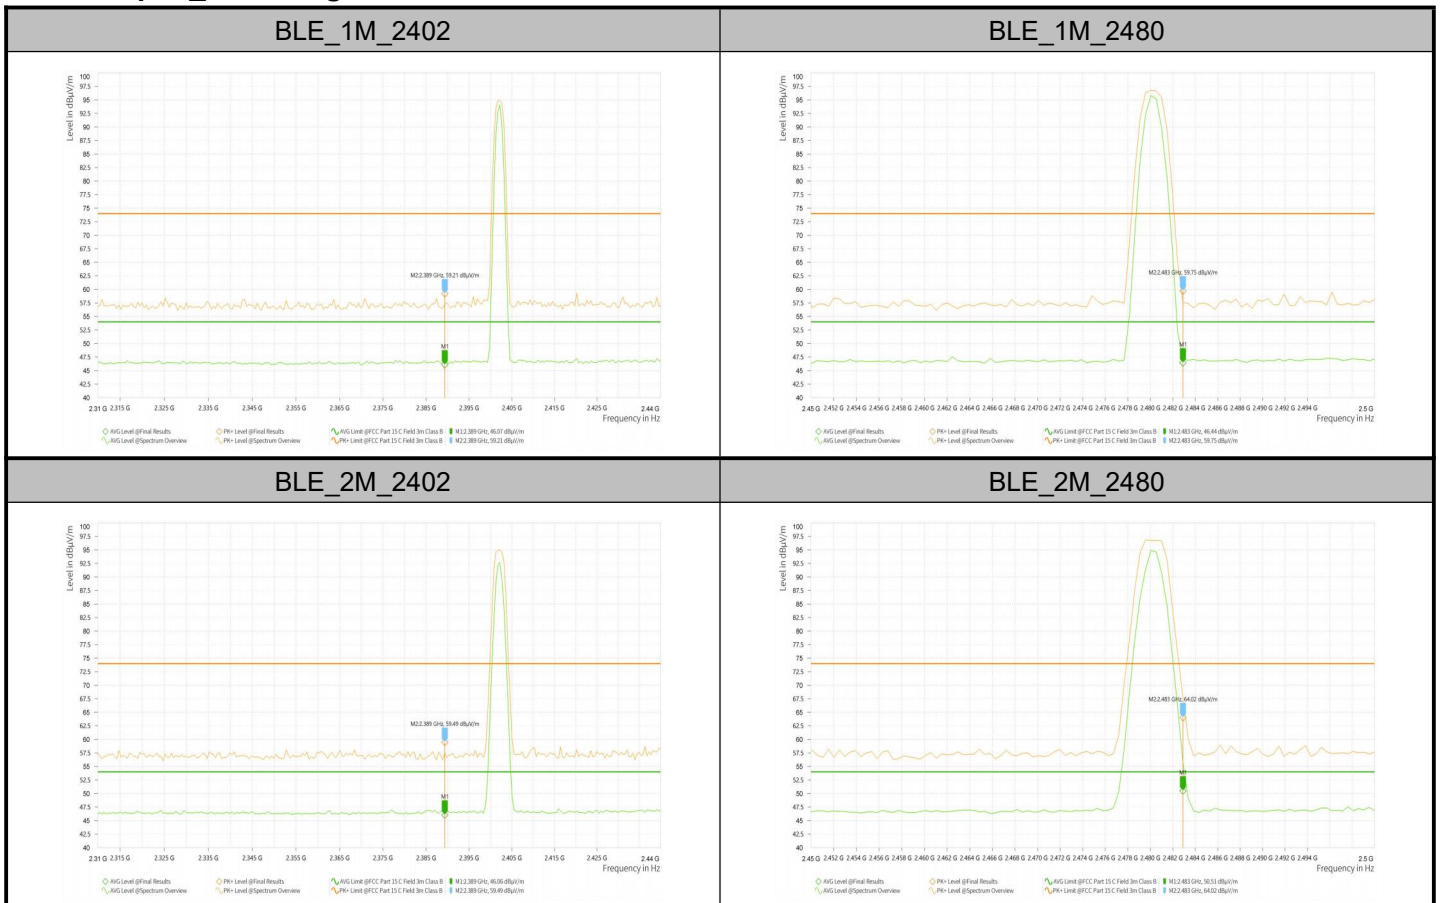

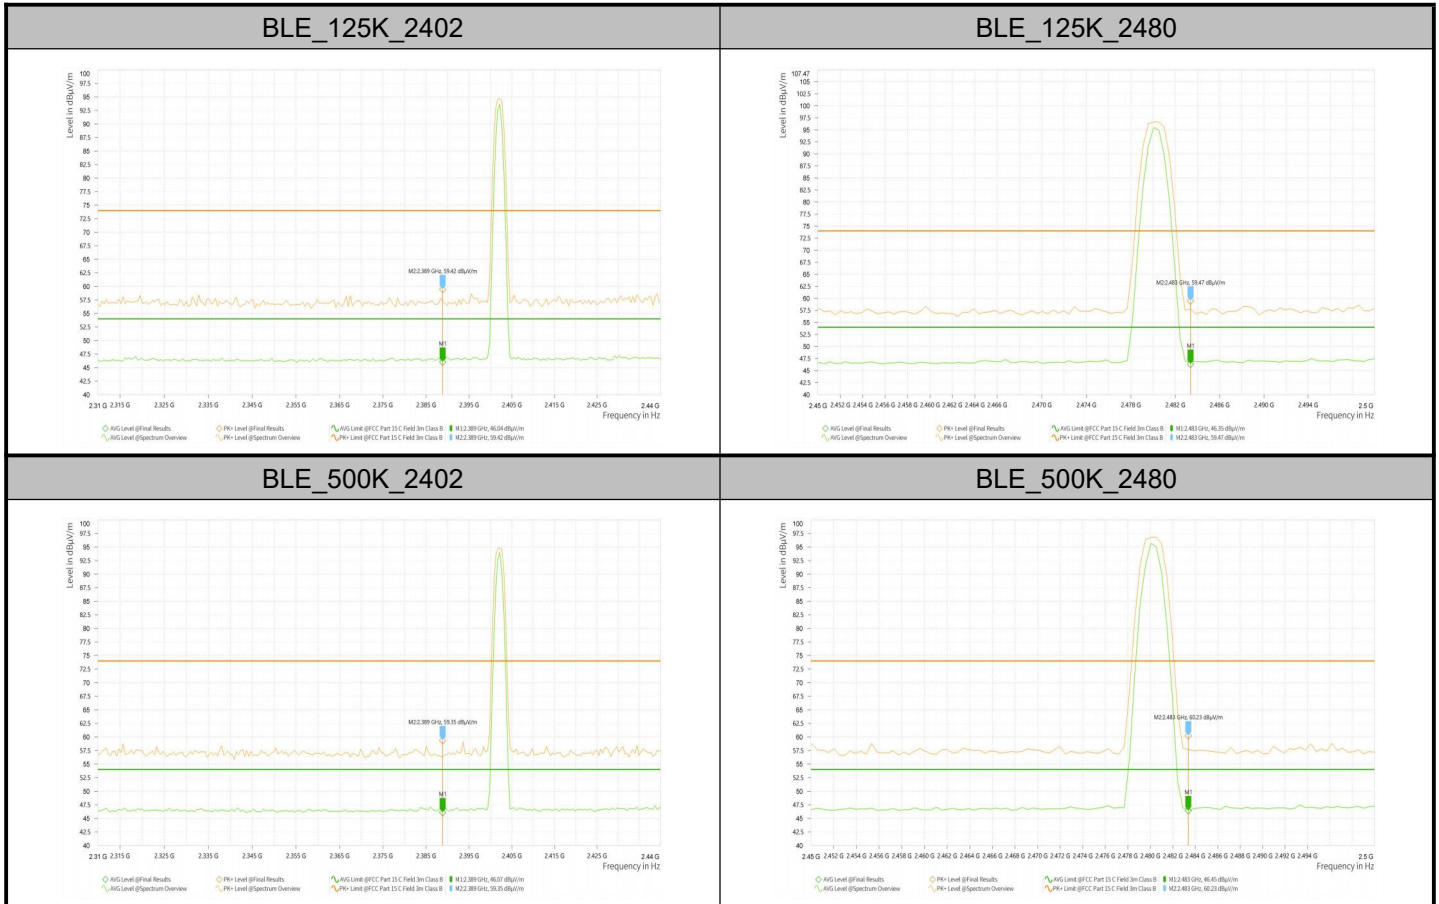

Test Result_Spurious Emission

Note1: Test result Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier the Emissions in the frequency band 9kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.

Note2: 'Low' indicates a frequency range below 1GHz, and 'High' indicates a frequency range above 1GHz.


Test Mode & Test Freq.[MHz]	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Polarization	Azimuth [deg]
BLE_1M_2402_High	4,804.000	53.29	74.00	20.71	40.46	54.00	13.54	V	358.9
	7,206.000	55.72	74.00	18.28	42.97	54.00	11.03	H	94.1
	9,608.000	39.88	74.00	34.12	27.23	54.00	26.77	H	144.3
	12,010.000	40.53	74.00	33.47	28.24	54.00	25.76	H	144.3
	14,412.000	43.23	74.00	30.77	30.24	54.00	23.76	H	360
BLE_1M_2440_High	16,814.000	49.20	74.00	24.80	36.60	54.00	17.40	H	144.3
	4,880.000	53.26	74.00	20.74	40.71	54.00	13.29	V	107.3
	7,320.000	55.65	74.00	18.35	43.41	54.00	10.59	H	0.5
	9,760.000	41.11	74.00	32.89	28.52	54.00	25.48	V	154.7


	12,200.000	40.79	74.00	33.21	28.47	54.00	25.53	H	76.2
	14,640.000	43.72	74.00	30.28	30.91	54.00	23.09	V	360
	17,080.000	49.82	74.00	24.18	36.84	54.00	17.16	V	144.3
BLE_1M_2480_High	4,960.000	52.78	74.00	21.22	40.65	54.00	13.35	H	1.4
	7,440.000	56.19	74.00	17.81	43.50	54.00	10.50	H	28.3
	9,920.000	40.71	74.00	33.29	28.48	54.00	25.52	H	360
	12,400.000	40.60	74.00	33.40	28.52	54.00	25.48	V	204
	14,880.000	43.73	74.00	30.27	30.99	54.00	23.01	H	0
	17,360.000	48.72	74.00	25.28	36.32	54.00	17.68	H	0
BLE_2M_2402_High	4,804.000	53.32	74.00	20.68	40.33	54.00	13.67	H	175.4
	7,206.000	55.10	74.00	18.90	42.89	54.00	11.11	V	157.4
	9,608.000	39.92	74.00	34.08	27.28	54.00	26.72	V	13.8
	12,010.000	40.57	74.00	33.43	28.31	54.00	25.69	H	344.9
	14,412.000	43.36	74.00	30.64	30.18	54.00	23.82	H	359.9
	16,814.000	49.28	74.00	24.72	36.73	54.00	17.27	V	360
BLE_2M_2440_High	4,880.000	53.10	74.00	20.90	40.51	54.00	13.49	H	1.1
	7,320.000	56.00	74.00	18.00	43.32	54.00	10.68	H	359.1
	9,760.000	41.10	74.00	32.90	28.51	54.00	25.49	H	0
	12,200.000	41.14	74.00	32.86	28.36	54.00	25.64	H	13.7
	14,640.000	44.52	74.00	29.48	30.98	54.00	23.02	V	0
	17,080.000	49.46	74.00	24.54	36.72	54.00	17.28	V	347.6
BLE_2M_2480_High	4,960.000	53.05	74.00	20.95	40.60	54.00	13.40	H	174.2
	7,440.000	55.77	74.00	18.23	43.61	54.00	10.39	H	255.4
	9,920.000	47.29	74.00	26.71	34.66	54.00	19.34	H	77.3
	12,400.000	48.92	74.00	25.08	36.40	54.00	17.60	H	0
	14,880.000	49.87	74.00	24.13	37.45	54.00	16.55	H	0
	17,360.000	52.64	74.00	21.36	39.88	54.00	14.12	H	13.8
BLE_125K_2402_High	4,804.500	52.67	74.00	21.33	40.40	54.00	13.60	H	360
	7,207.500	55.38	74.00	18.62	43.02	54.00	10.98	H	276.6
	9,609.000	46.90	74.00	27.10	34.54	54.00	19.46	H	352.7
	12,101.500	49.11	74.00	24.89	36.46	54.00	17.54	H	159.4
	14,414.500	50.00	74.00	24.00	37.06	54.00	16.94	V	0
	16,813.500	53.82	74.00	20.18	41.15	54.00	12.85	V	354.4
BLE_125K_2440_High	4,880.000	53.23	74.00	20.77	40.50	54.00	13.50	H	23.6
	7,314.500	55.66	74.00	18.34	43.20	54.00	10.80	H	13.1
	9,759.500	40.91	74.00	33.09	28.50	54.00	25.50	V	5.6
	12,203.000	41.20	74.00	32.80	28.31	54.00	25.69	V	360
	14,652.500	43.64	74.00	30.36	30.69	54.00	23.31	V	294.6
	17,078.500	49.28	74.00	24.72	36.83	54.00	17.17	V	227.7

BLE_125K_2480_High	4,960.000	53.15	74.00	20.85	40.46	54.00	13.54	H	360
	7,442.000	55.39	74.00	18.61	43.20	54.00	10.80	H	360
	9,915.500	40.46	74.00	33.54	28.47	54.00	25.53	H	0
	12,401.000	41.70	74.00	32.30	28.30	54.00	25.70	H	360
	14,882.500	43.76	74.00	30.24	30.96	54.00	23.04	H	360
	17,363.000	50.03	74.00	23.97	36.27	54.00	17.73	H	134.6
BLE_500K_2402_High	4,805.000	53.04	74.00	20.96	40.37	54.00	13.63	V	22.4
	7,205.500	55.23	74.00	18.77	42.83	54.00	11.17	H	0
	9,607.000	39.57	74.00	34.43	27.23	54.00	26.77	V	4.7
	12,012.000	41.45	74.00	32.55	28.34	54.00	25.66	V	355.2
	14,412.500	42.36	74.00	31.64	30.23	54.00	23.77	H	360
	16,812.500	49.10	74.00	24.90	36.46	54.00	17.54	H	0
BLE_500K_2440_High	4,880.000	53.13	74.00	20.87	40.55	54.00	13.45	V	360
	7,320.000	56.49	74.00	17.51	43.34	54.00	10.66	V	77.4
	9,760.000	40.84	74.00	33.16	28.45	54.00	25.55	H	360
	12,200.000	40.80	74.00	33.20	28.48	54.00	25.52	V	354.4
	14,640.000	43.68	74.00	30.32	30.93	54.00	23.07	H	0
	17,080.000	49.51	74.00	24.49	36.68	54.00	17.32	V	360
BLE_500K_2480_High	4,960.000	53.75	74.00	20.25	40.78	54.00	13.22	V	107.3
	7,440.000	55.79	74.00	18.21	43.50	54.00	10.50	H	254.3
	9,920.000	40.82	74.00	33.18	28.45	54.00	25.55	H	77.4
	12,400.000	41.26	74.00	32.74	28.42	54.00	25.58	H	360
	14,880.000	43.51	74.00	30.49	30.93	54.00	23.07	V	360
	17,360.000	48.81	74.00	25.19	36.33	54.00	17.67	H	143.1

Test Mode & Test Freq.[MHz]	Frequency [MHz]	QPK Level [dB μ V/m]	QPK Limit [dB μ V/m]	QPK Margin [dB]	Polarization	Azimuth [deg]
BLE_500K_2440_Low	47.945	23.84	40.00	16.16	V	3.8
	56.298	22.93	40.00	17.07	V	140.6
	108.031	25.27	43.50	18.23	V	221.7
	119.994	32.67	43.50	10.83	V	221.7
	594.001	23.79	46.00	22.21	V	252.9
	958.182	20.12	46.00	25.88	H	1.4

Test Graphs_Spurious Emission

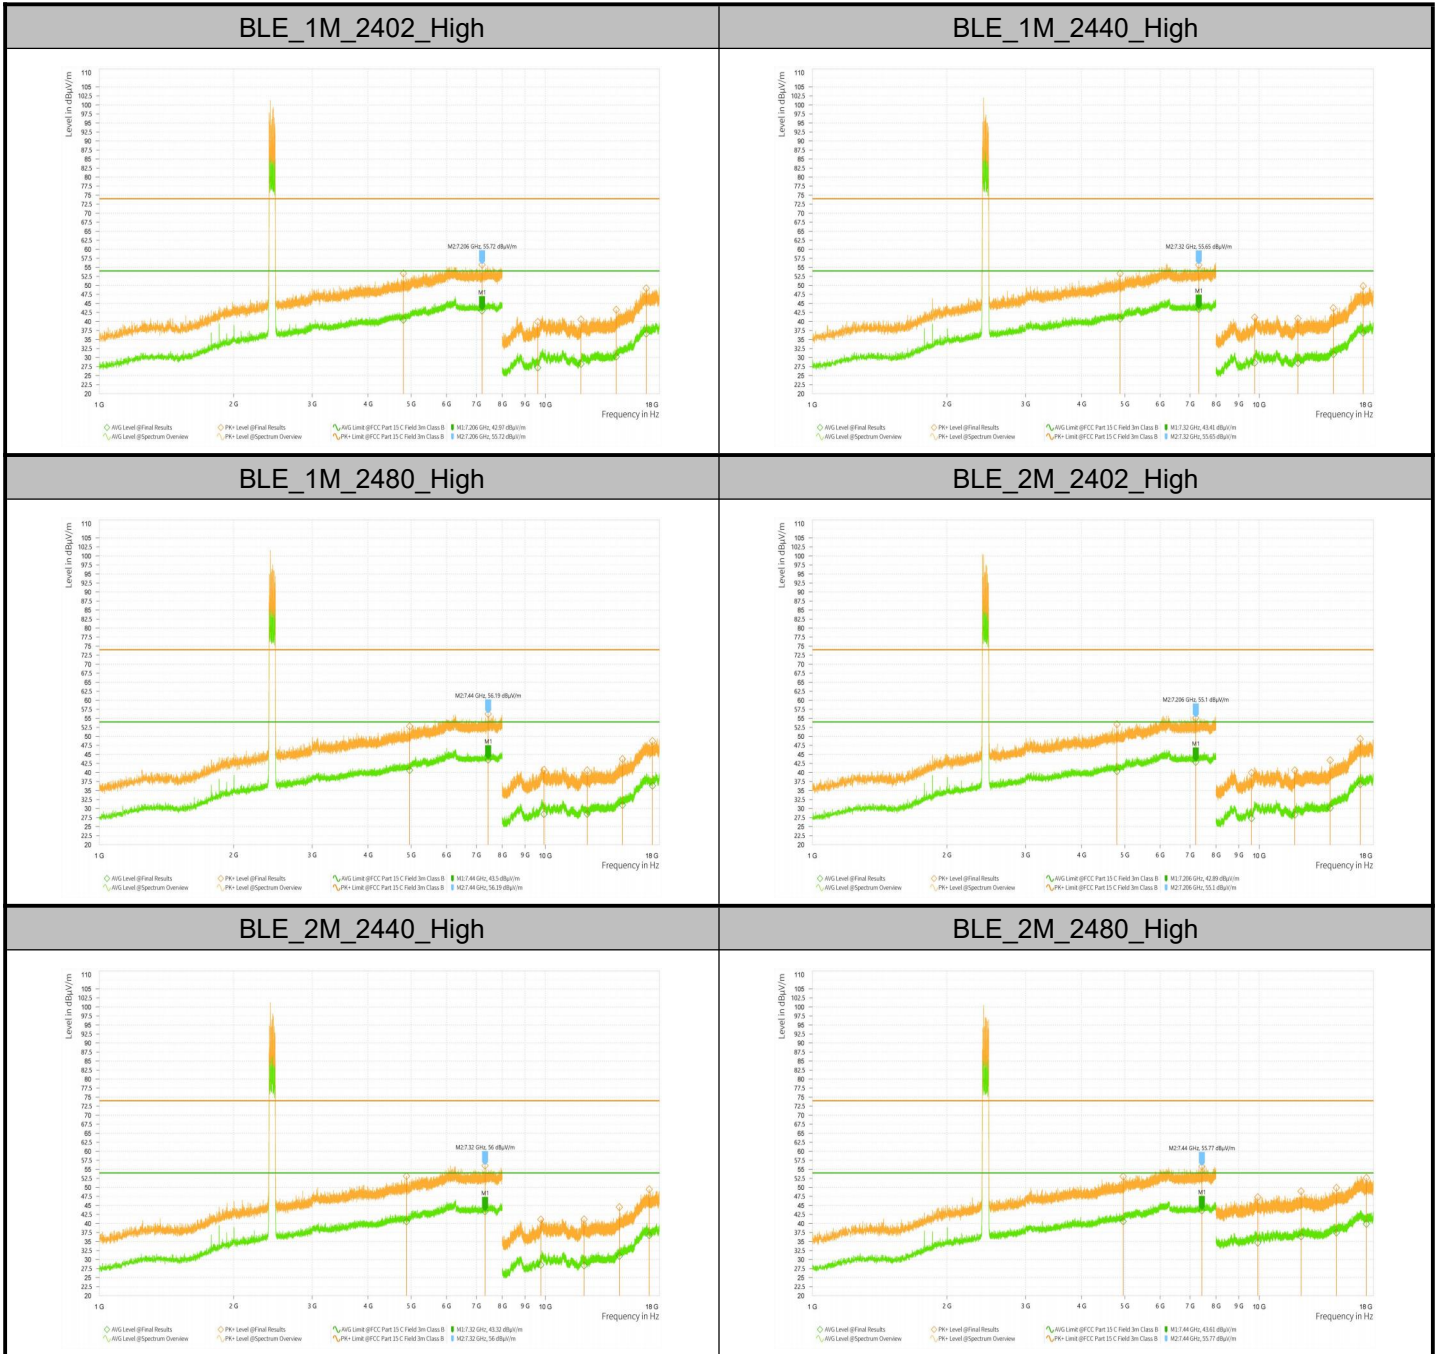

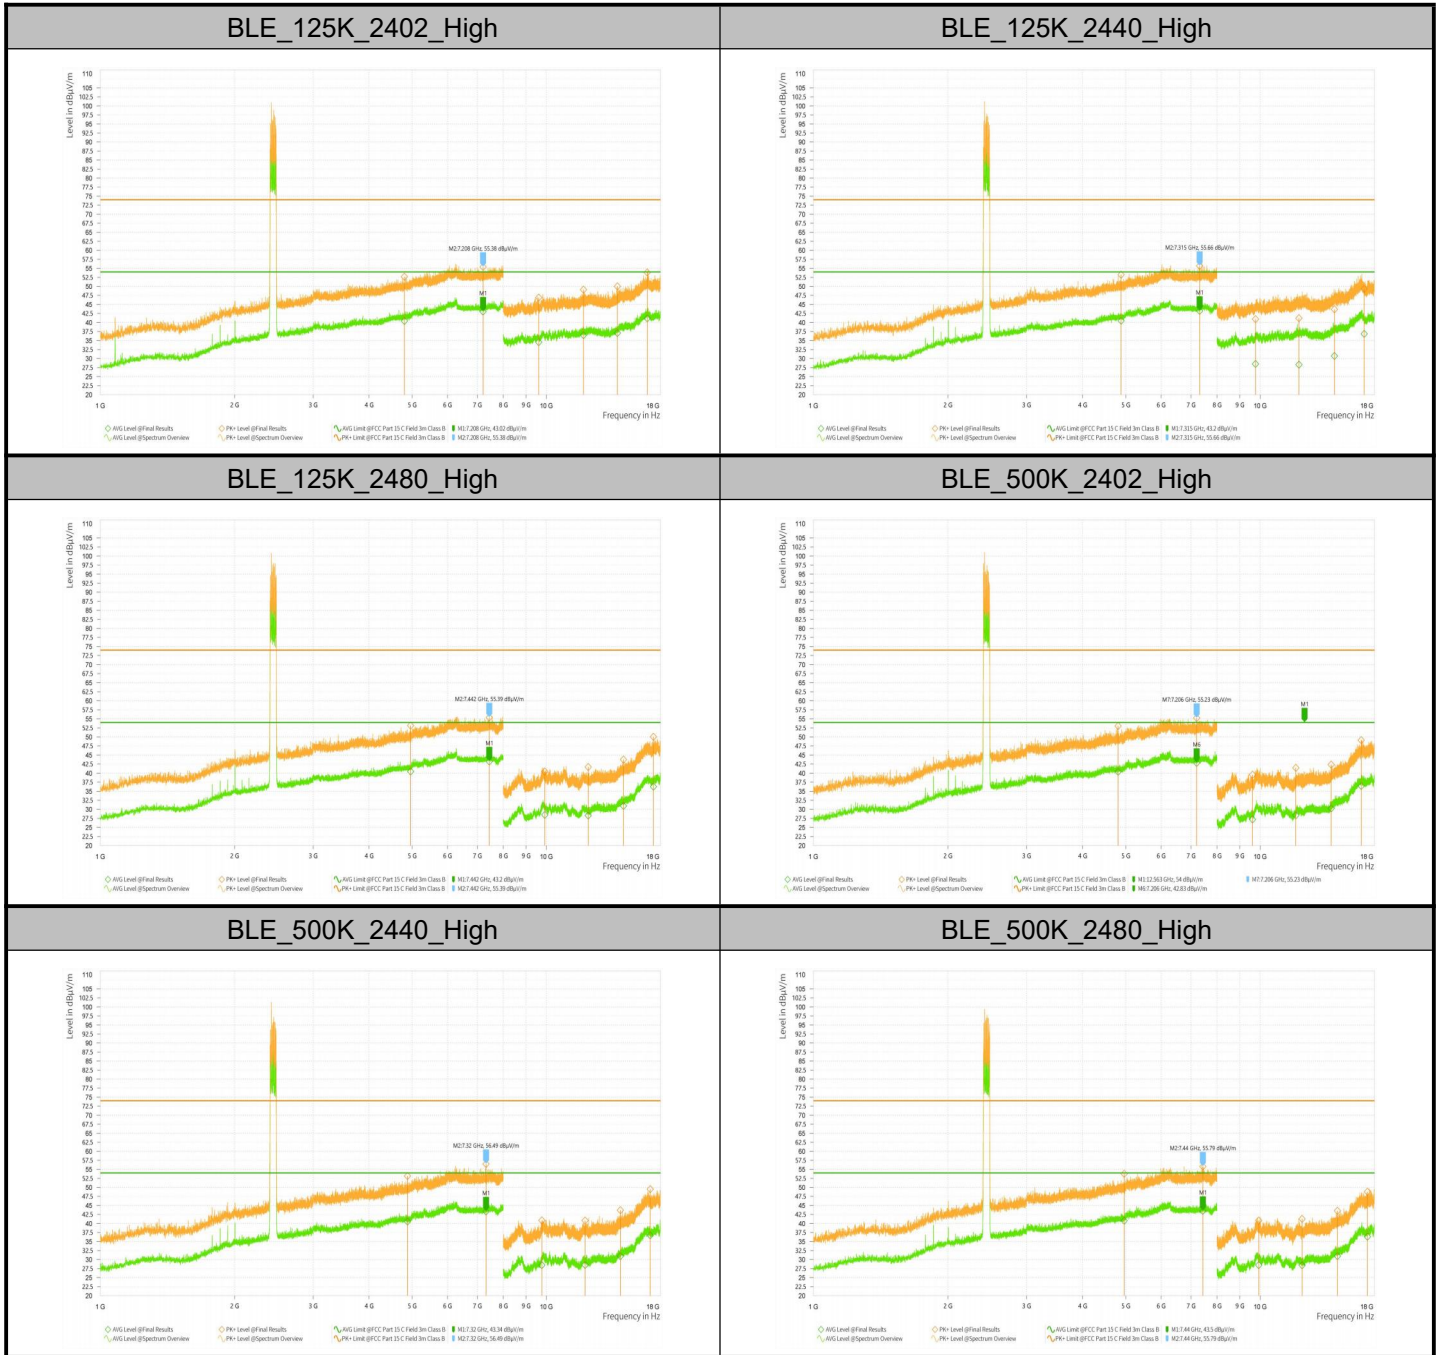


B.2 Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.10	0.63	15.87	7.99
BLE_1M	Ant1	2440	0.10	0.63	15.87	7.99
BLE_1M	Ant1	2480	0.10	0.63	15.87	7.99
BLE_2M	Ant1	2402	0.06	0.63	9.52	10.21
BLE_2M	Ant1	2440	0.06	0.63	9.52	10.21
BLE_2M	Ant1	2480	0.06	0.63	9.52	10.21
BLE_125K	Ant1	2402	0.74	1.25	59.20	2.28
BLE_125K	Ant1	2440	0.74	1.25	59.20	2.28
BLE_125K	Ant1	2480	0.74	1.25	59.20	2.28
BLE_500K	Ant1	2402	0.48	1.25	38.40	4.16
BLE_500K	Ant1	2440	0.48	1.25	38.40	4.16
BLE_500K	Ant1	2480	0.48	1.25	38.40	4.16

Test Graphs

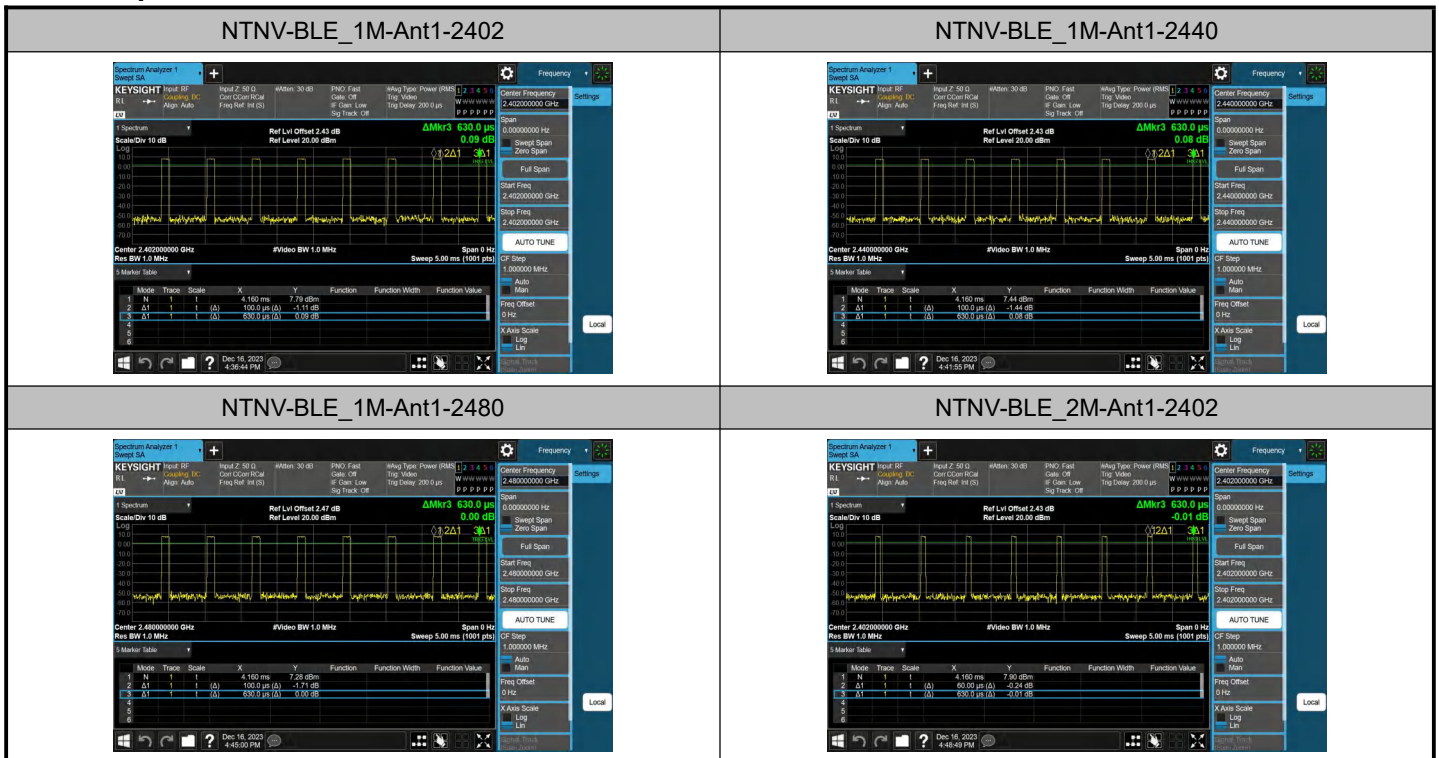


NTNV-BLE_2M-Ant1-2440




NTNV-BLE_2M-Ant1-2480



NTNV-BLE_125K-Ant1-2402

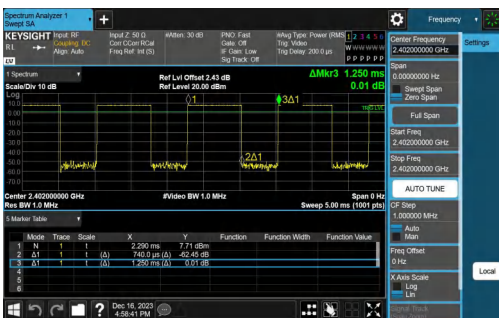


NTNV-BLE_125K-Ant1-2440

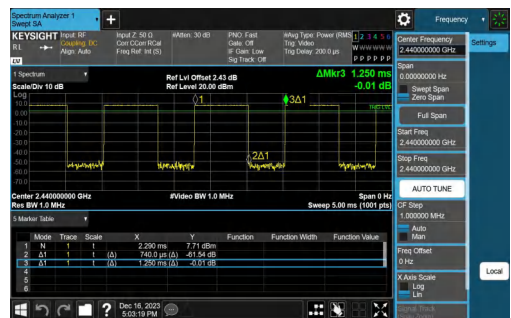


NTNV-BLE_125K-Ant1-2480




NTNV-BLE_500K-Ant1-2402

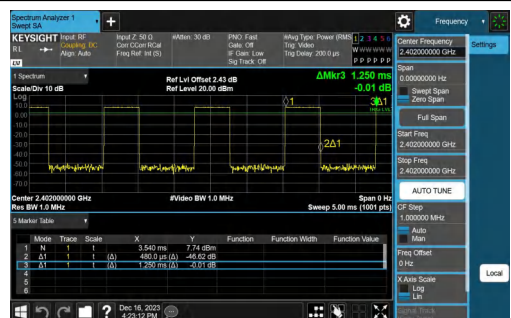

NTNV-BLE_500K-Ant1-2440

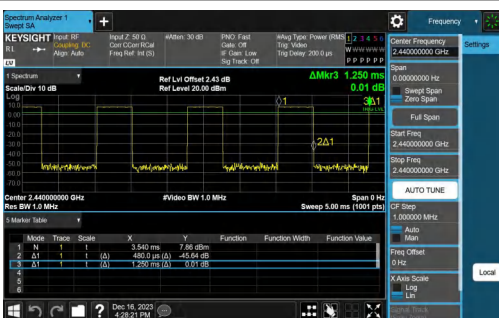

NTNV-BLE_500K-Ant1-2480

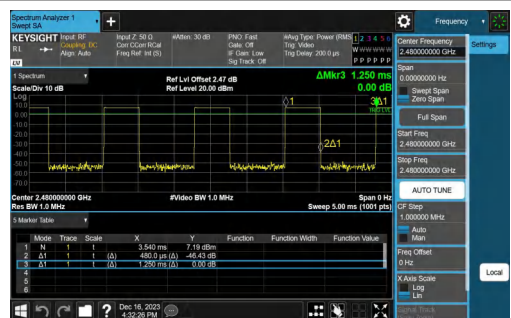

Appendix C – The EUT Appearance

Refer to “Attachment 1: External Photograph” and “ Attachment 2: Internal Photograph” file.

Appendix D – Test Setup Photograph

Refer to “Attachment 5: RF Test Setup Photograph” file.

*****End of the Report*****