

FCC Part 15
EMI TEST REPORT
(Part 1 – 802.11b/g/n)

of

E.U.T. : Smart Kid Scale

Model No. : WS-40

FCC ID. : XNA-WS-40

for

APPLICANT : Withings

ADDRESS : 20, rue Rouget de Lisle, 92130 Issy les
Moulineaux, FRANCE

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5, DINGFU VIL., LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C

Tel : (02)26023052 Fax : (02)26010910

<http://www.etc.org.tw> ; e-mail: emc@etc.org.tw

Report Number : 12-10-RBF-028-05

TEST REPORT CERTIFICATION

Applicant : Withings
20, rue Rouget de Lisle, 92130 Issy les Moulineaux, FRANCE

Manufacturer : Withings
20, rue Rouget de Lisle, 92130 Issy les Moulineaux, FRANCE

Description of EUT

- a) Type of EUT : Smart Kid Scale
- b) Trade Name : Withings
- c) Model No. : WS-40
- d) Power Supply : DC1.5V Battery*4

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Summary of Tests


Test	Results
Radiated Emission	Pass
Conducted Emission	N/A
Hopping Channel Separation	Pass
Number of Hopping frequencies used	Pass
Hopping Channel Bandwidth	Pass
Dwell Time of each frequency	Pass
Output Power Requirement	Pass
100 kHz Bandwidth of Frequency Band Edges Requirement	Pass
Out-of-Band Conducted Emission Requirement	Pass

Date Test Item Received : Oct. 17, 2012

Date Test Campaign Completed : Nov. 04, 2012

Date of Issue : Nov. 05, 2012

Test Engineer :

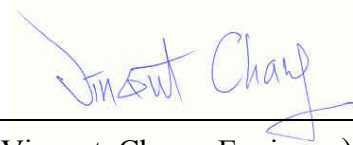

(Vincent Chang, Engineer)

Approve & Authorized :



S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1 GENERAL INFORMATION.....	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology	1
1.4 Test Facility.....	1
2 PROVISIONS APPLICABLE.....	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement.....	5
2.5 User Information	6
3. SYSTEM TEST CONFIGURATION.....	7
3.1 Justification	7
3.2 Devices for Tested System.....	7
4 RADIATED EMISSION MEASUREMENT	8
4.1 Applicable Standard.....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument	10
4.4 Radiated Emission Data	11
4.5 Field Strength Calculation	27
4.6 Photos of Radiation Measuring Setup.....	28
5 CONDUCTED EMISSION MEASUREMENT.....	29
5.1 Description.....	29
6 ANTENNA REQUIREMENT	30
6.1 Standard Applicable.....	30
6.2 Antenna Construction and Directional Gain.....	30
7 EMISSION BANDWIDTH MEASUREMENT	31
7.1 Standard Applicable.....	31
7.2 Measurement Procedure.....	31
7.3 Measurement Equipment	31
7.4 Measurement Data	32
8 OUTPUT POWER MEASUREMENT.....	42
8.1 Standard Applicable.....	42
8.2 Measurement Procedure.....	42

8.3 Measurement Equipment	42
8.4 Measurement Data	43
9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT	53
9.1 Standard Applicable	53
9.2 Measurement Procedure	53
9.3 Measurement Equipment	53
9.4 Measurement Data	54
10 POWER DENSITY MEASUREMENT	61
10.1 Standard Applicable	61
10.2 Measurement Procedure	61
10.3 Measurement Equipment	61
10.4 Measurement Data	62
11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT	72
11.1 Standard Applicable	72
11.2 Measurement Procedure	72
11.3 Measurement Equipment	72
11.4 Measurement Data	73

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Smart Kid Scale
- b) Trade Name : Withings
- c) Model No. : WS-40
- d) Power Supply : DC1.5V Battery*4

1.2 Characteristics of Device

Size of EUT	: 558mm x 300mm x 72mm
Frequency band	: IEEE 802.11b/g/n HT-20: 2412MHz~2462MHz
Number of channels	: IEEE 802.11b / g / n HT-20: 11 channels
Channel spacing	: 5MHz
Transmitter antenna source	: Integrated antenna

1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (2003). Other required measurements were illustrated in separate sections of this test report for details.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at NO. 34. LIN 5, DINGFU VIL., LINKOU DIST., NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Jan. 11, 2011.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

(7) Power Density Requirement

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the cables connected to EUT to maximize the emission from EUT.

For conducted and radiated spurious emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 1 by transmitting mode.

3.2 Devices for Tested System

Device	Manufacture	Model / FCC ID	Cable Description
Smart Kid Scale *	Withings	WS-40 / XNA-WS-40	---

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


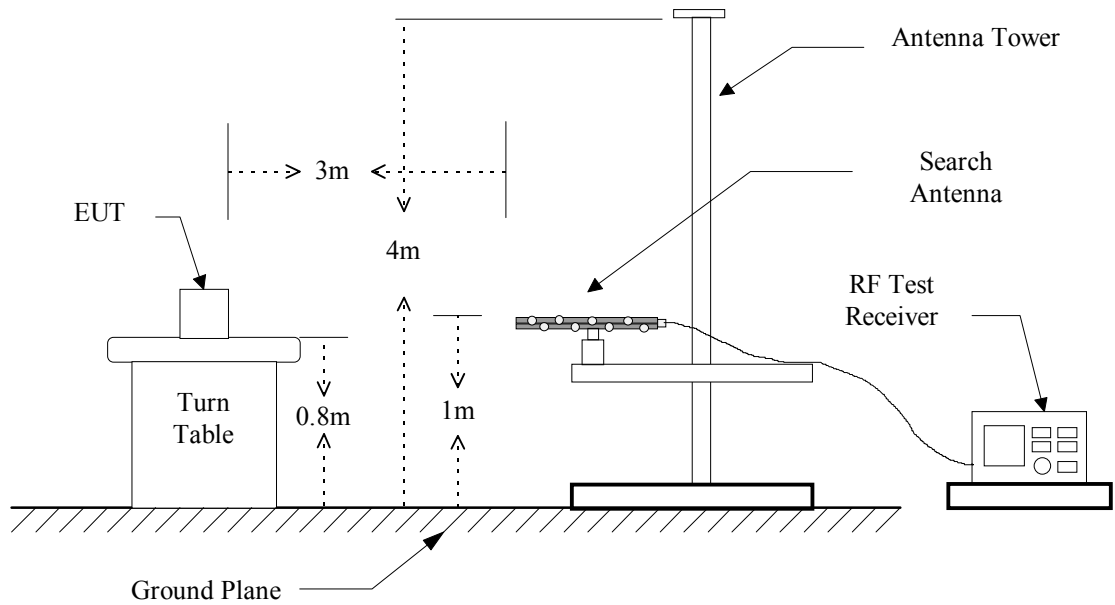


Figure 2 : Frequencies measured above 1 GHz configuration

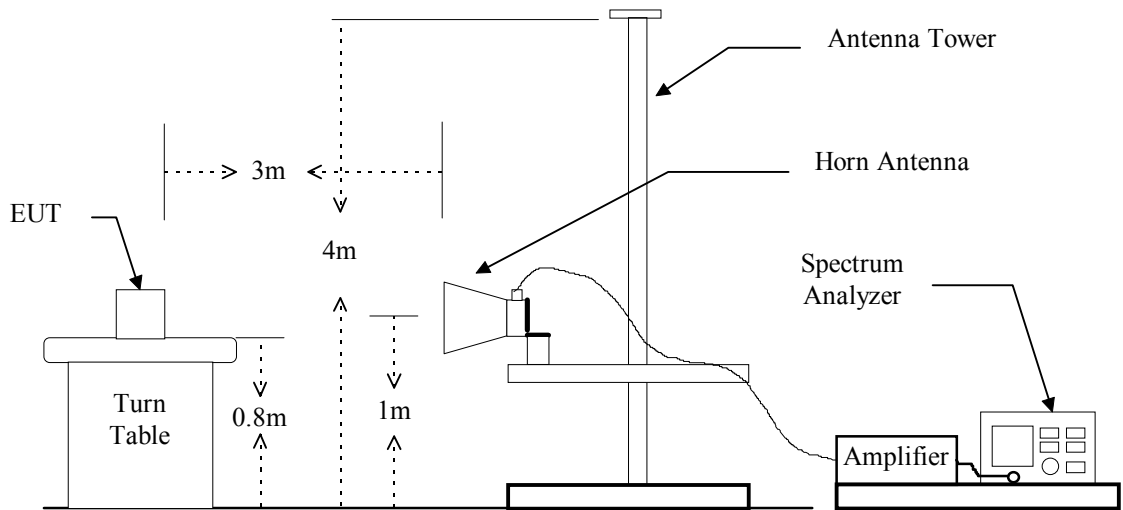

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESVS30	2012/05/07	2013/05/07
EMI Test Receiver	Rohde & Schwarz	ESL	2012/07/30	2013/07/30
Bi-Log Antenna	ETC	MCTD 2756	2012/01/10	2013/01/09
Log-periodic Antenna	EMCO	3146	2011/11/04	2012/11/03
Double Ridged Guide Horn Antenna	EMCO	3116	2012/10/26	2013/10/29
Biconical Antenna	EMCO	3110B	2011/11/18	2012/11/17
Double Ridged Antenna	EMCO	3115	2012/05/18	2013/05/18
Amplifier	HP	8449B	2011/12/28	2012/12/27
Amplifier	HP	83051A	2012/05/16	2013/05/16
Amplifier	HP	8447D	2012/05/16	2013/05/16
Spectrum	Rohde & Schwarz	FSP40	2012/09/20	2012/09/20


Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

4.4 Radiated Emission Data

4.4.1 RF Portion

A. (802.11b)

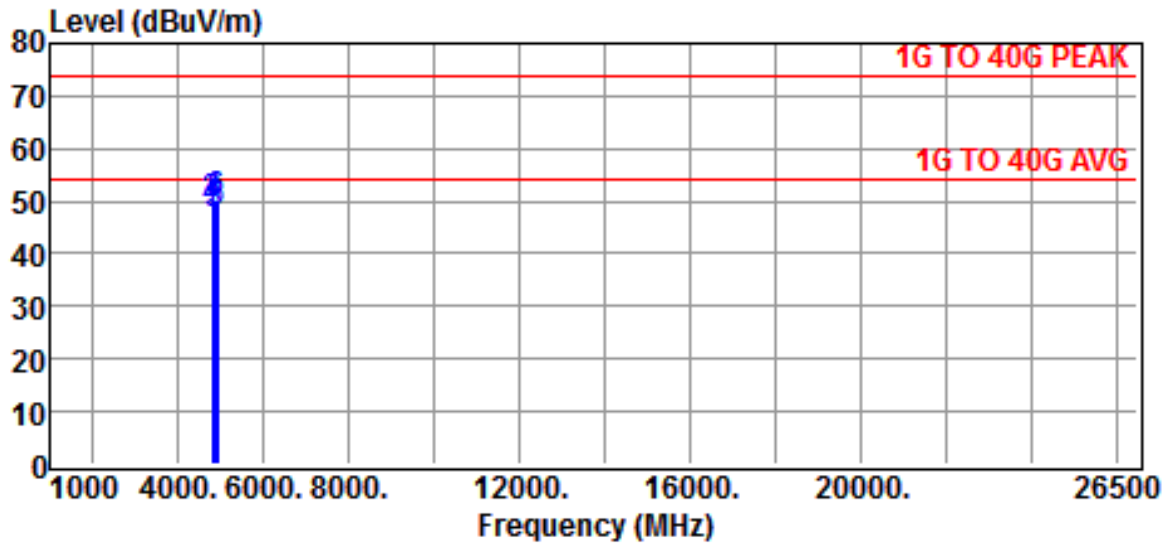


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	: HORIZONTAL
EUT	:2.4GHz	Engineer	:VC
Detector	: 802.11b	Humi.	:65 %
Temp.	:26 °C		
Memo	:TX RX-CHLo:2412MHz,Mi:2437MHz,Hi:2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	46.9	0.6	47.5	54.0	-6.5	Average
4824.0000	48.7	0.6	49.3	74.0	-24.7	Peak
4874.0000	46.8	0.7	47.5	54.0	-6.5	Average
4874.0000	48.8	0.7	49.5	74.0	-24.5	Peak
4924.0000	46.7	1.0	47.7	54.0	-6.3	Average
4924.0000	48.6	1.0	49.6	74.0	-24.4	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

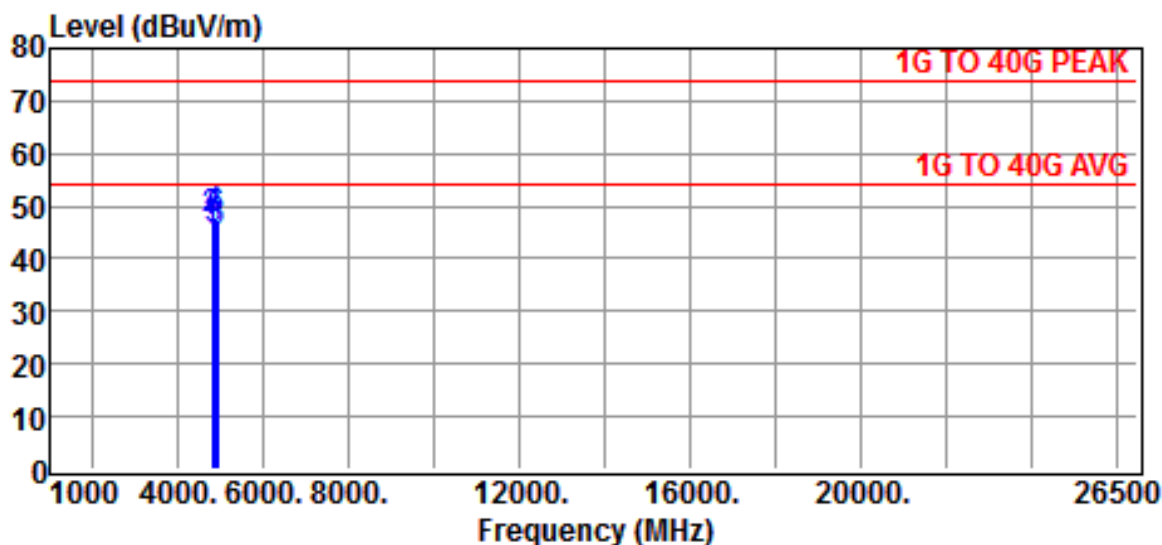

Limit :1G TO 40G PEAK
 Site :chamber #2
 EUT :2.4GHz
 Detector : 802.11b
 Temp. :26 °C
 Memo :TX RX-CHLo:2412MHz,Mi:2437MHz,Hi:2462MHz


Date :2012-10-31
 Ant. Pol. :VERTICAL
 Engineer :VC
 Humi. :65 %

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	44.6	0.6	45.2	54.0	-8.8	Average
4824.0000	46.9	0.6	47.5	74.0	-26.5	Peak
4874.0000	44.6	0.7	45.3	54.0	-8.7	Average
4874.0000	47.0	0.7	47.7	74.0	-26.3	Peak
4924.0000	44.2	1.0	45.2	54.0	-8.8	Average
4924.0000	46.2	1.0	47.2	74.0	-26.8	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

B. (802.11g)

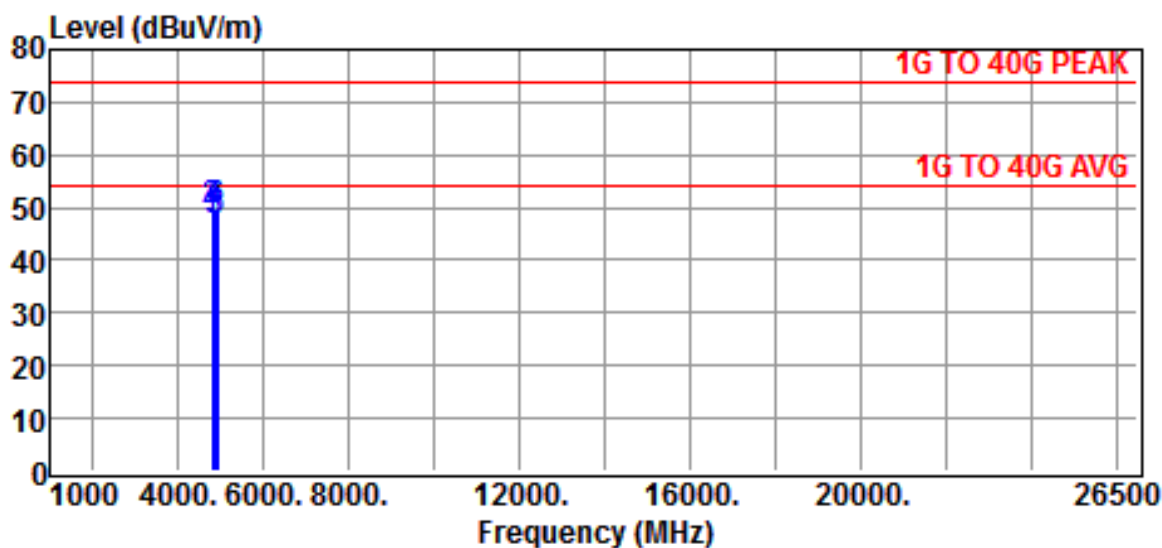


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:HORIZONTAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11g	Humi.	:65 %
Temp.	:26 °C		
Memo	:TX RX-CHLo:2412MHz,Mi:2437MHz,Hi:2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	46.9	0.6	47.5	54.0	-6.5	Average
4824.0000	48.7	0.6	49.3	74.0	-24.7	Peak
4874.0000	46.6	0.7	47.3	54.0	-6.7	Average
4874.0000	48.8	0.7	49.5	74.0	-24.5	Peak
4924.0000	46.2	1.0	47.2	54.0	-6.8	Average
4924.0000	48.3	1.0	49.3	74.0	-24.7	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

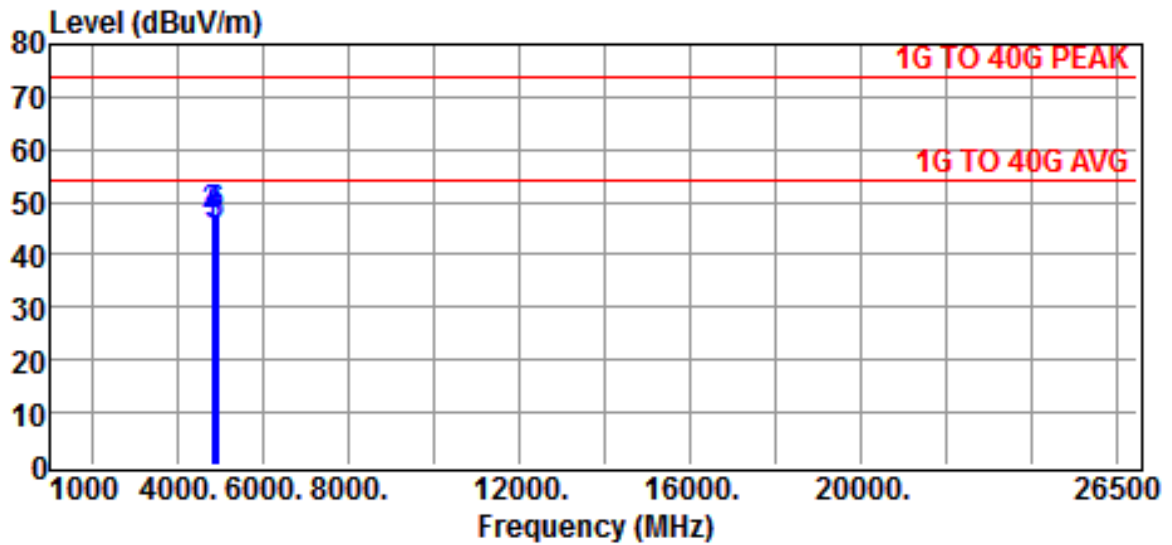


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:VERTICAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11g	Humi.	:65 %
Temp.	:26 °C		
Memo	:TX RX-CHLo:2412MHz,Mi:2437MHz,Hi:2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	44.6	0.6	45.2	54.0	-8.8	Average
4824.0000	46.7	0.6	47.3	74.0	-26.7	Peak
4874.0000	44.6	0.7	45.3	54.0	-8.7	Average
4874.0000	46.9	0.7	47.6	74.0	-26.4	Peak
4924.0000	44.3	1.0	45.3	54.0	-8.7	Average
4924.0000	46.6	1.0	47.6	74.0	-26.4	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

C. (802.11n HT-20)

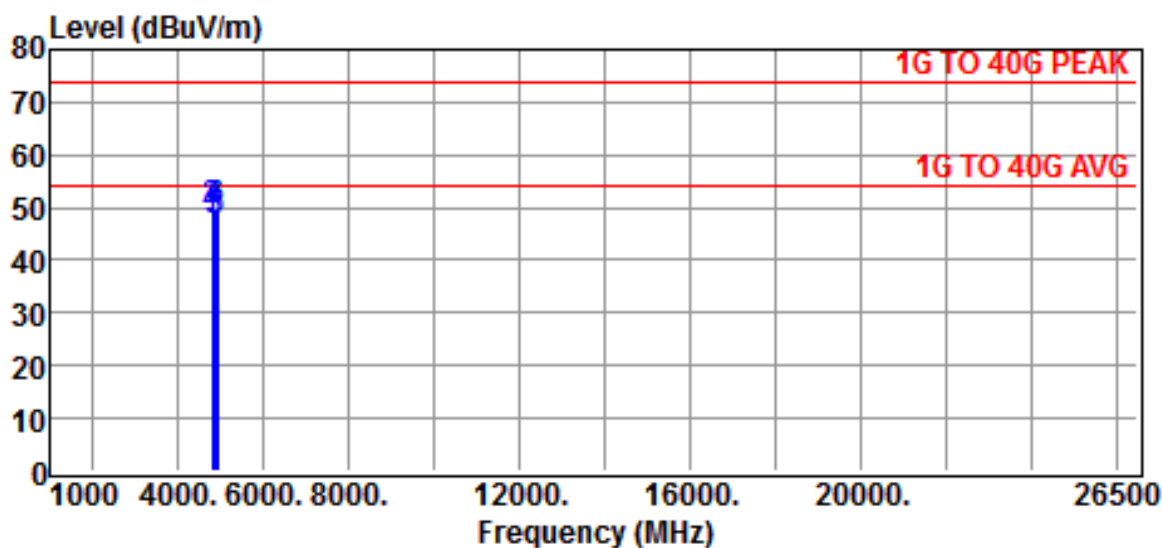


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:HORIZONTAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11n HT-20	Humi.	:65 %
Temp.	:26 °C		
Memo	:TX RX-CHLo:2412MHz,Mi:2437MHz,Hi:2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	46.8	0.6	47.4	54.0	-6.6	Average
4824.0000	48.5	0.6	49.1	74.0	-24.9	Peak
4874.0000	46.5	0.7	47.2	54.0	-6.8	Average
4874.0000	48.6	0.7	49.3	74.0	-24.7	Peak
4924.0000	46.1	1.0	47.1	54.0	-6.9	Average
4924.0000	48.1	1.0	49.1	74.0	-24.9	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

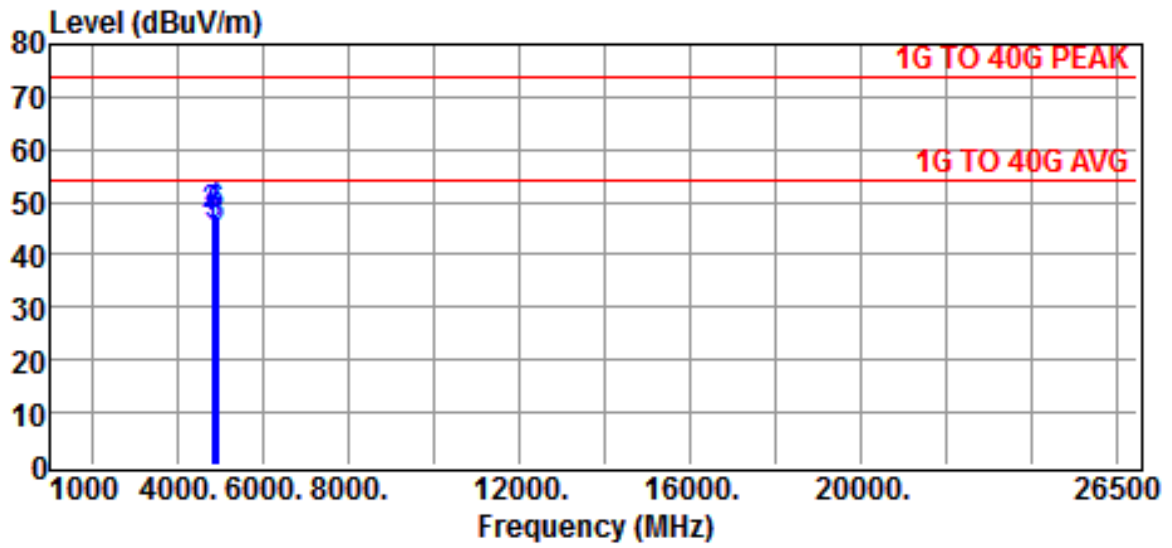

Limit :1G TO 40G PEAK
 Site :chamber #2
 EUT :2.4GHz
 Detector :802.11n HT-20
 Temp. :26 °C
 Memo :TX RX-CHLo:2412MHz,Mi:2437MHz,Hi:2462MHz
 Date :2012-10-31
 Ant. Pol. :VERTICAL
 Engineer :VC
 Humi. :65 %


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	44.4	0.6	45.0	54.0	-9.0	Average
4824.0000	46.8	0.6	47.4	74.0	-26.6	Peak
4874.0000	44.5	0.7	45.2	54.0	-8.8	Average
4874.0000	47.1	0.7	47.8	74.0	-26.2	Peak
4924.0000	44.3	1.0	45.3	54.0	-8.7	Average
4924.0000	46.1	1.0	47.1	74.0	-26.9	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

4.4.2 Radiated Emission of Restricted bands

A. (802.11b)

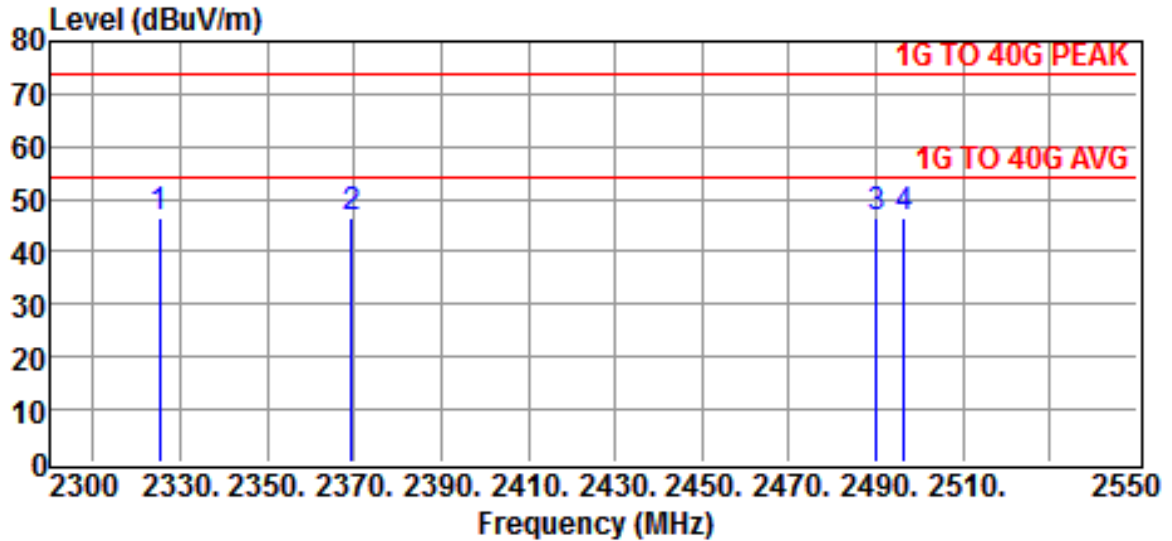


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:HORIZONTAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11b	Humi.	:65 %
Temp.	:26 ° C		
Memo	:CH LO & HI - Restricted Bands		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2325.3500	52.9	-6.4	46.5	74.0	-27.5	Peak
2369.5400	52.6	-6.3	46.3	74.0	-27.7	Peak
2489.9900	52.4	-5.9	46.5	74.0	-27.5	Peak
2496.3300	52.6	-5.9	46.7	74.0	-27.3	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

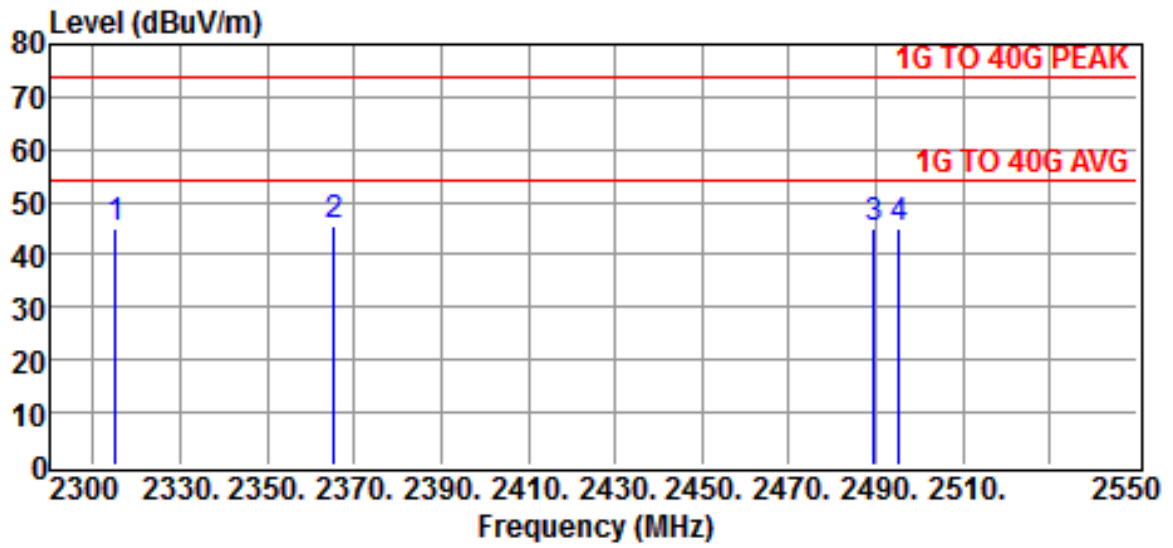


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:VERTICAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11b	Humi.	:65 %
Temp.	:26 °C		
Memo	:CH LO & HI - Restricted Bands		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2315.2500	51.6	-6.4	45.2	74.0	-28.8	Peak
2365.4500	51.8	-6.3	45.5	74.0	-28.5	Peak
2489.6500	51.1	-5.9	45.2	74.0	-28.8	Peak
2495.3600	51.1	-5.9	45.2	74.0	-28.8	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

B. (802.11g)

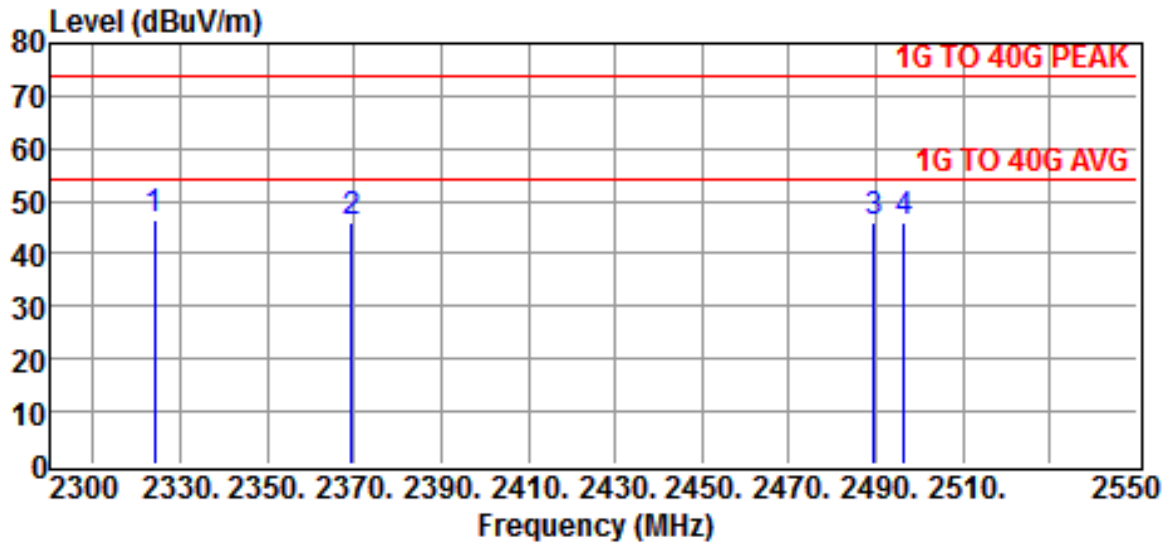


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:HORIZONTAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11g	Humi.	:65 %
Temp.	:26 °C		
Memo	:CH LO & HI - Restricted Bands		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2324.2100	52.7	-6.4	46.3	74.0	-27.7	Peak
2369.5400	52.5	-6.3	46.2	74.0	-27.8	Peak
2489.5500	52.0	-5.9	46.1	74.0	-27.9	Peak
2496.3500	52.1	-5.9	46.2	74.0	-27.8	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

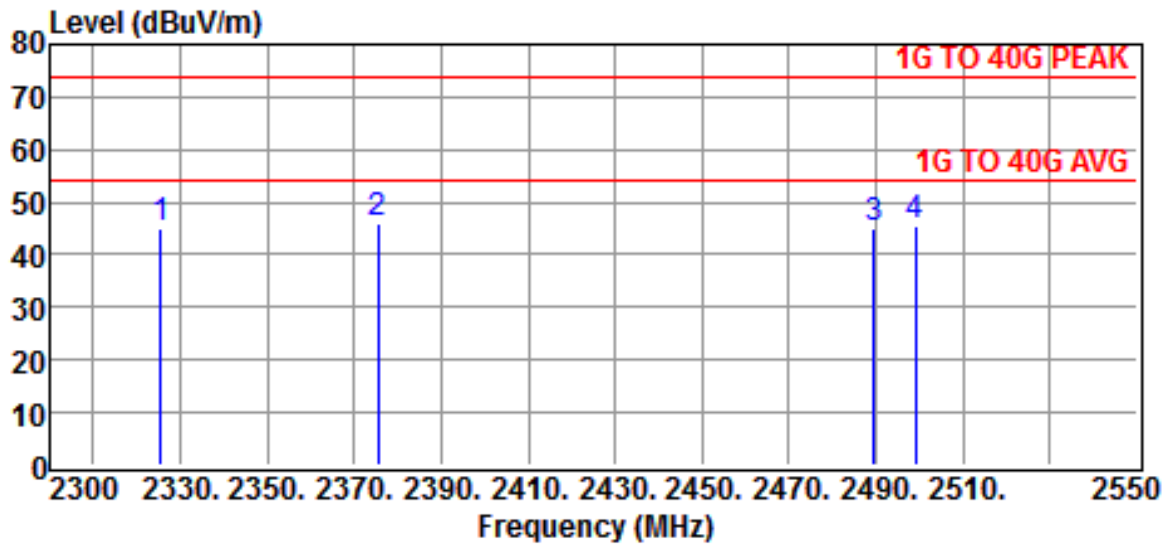


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:VERTICAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11g	Humi.	:65 %
Temp.	:26 °C		
Memo	:CH LO & HI - Restricted Bands		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2325.4400	51.6	-6.4	45.2	74.0	-28.8	Peak
2375.4100	52.1	-6.3	45.8	74.0	-28.2	Peak
2489.4500	51.1	-5.9	45.2	74.0	-28.8	Peak
2498.9900	51.2	-5.9	45.3	74.0	-28.7	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

C. (802.11n HT-20)

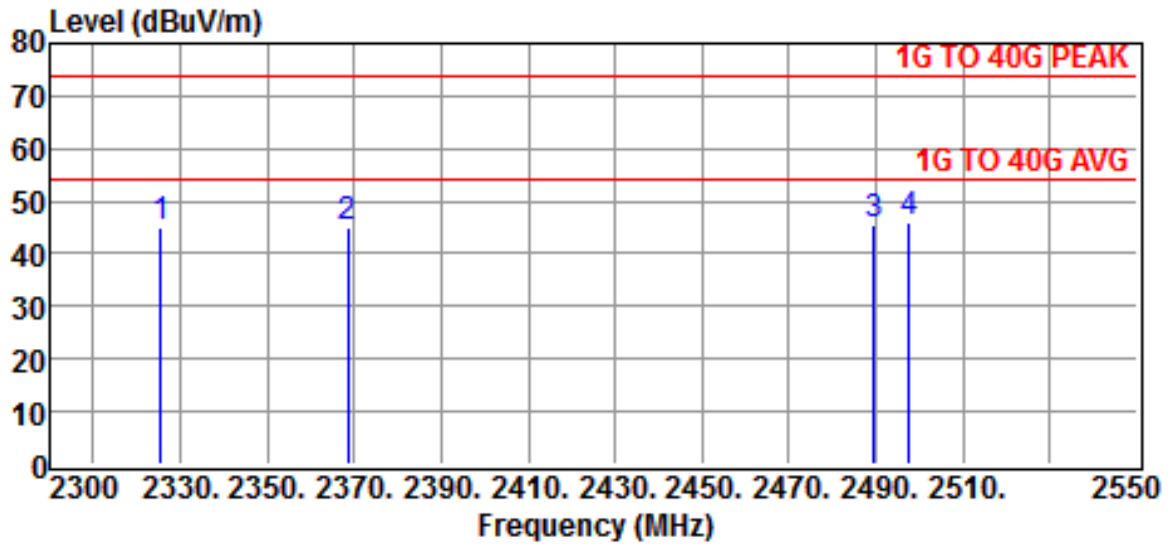


Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:HORIZONTAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11n HT-20	Humi.	:65 %
Temp.	:26 °C		
Memo	:CH LO & HI - Restricted Bands		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2325.5600	51.6	-6.4	45.2	74.0	-28.8	Peak
2368.6400	51.4	-6.3	45.1	74.0	-28.9	Peak
2489.6600	51.5	-5.9	45.6	74.0	-28.4	Peak
2497.6500	51.7	-5.9	45.8	74.0	-28.2	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

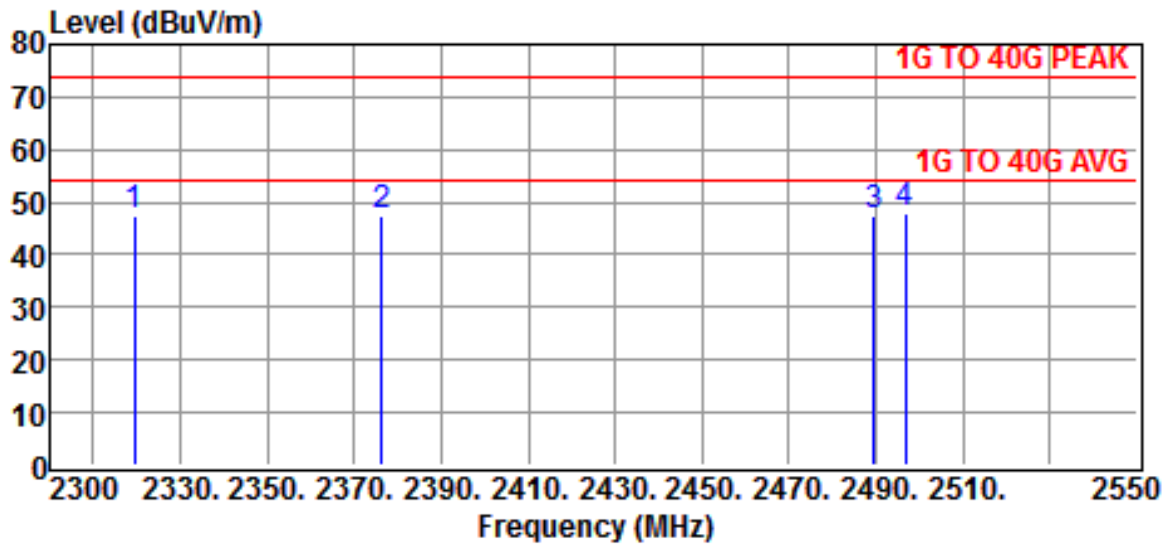

Limit	:1G TO 40G PEAK	Date	:2012-10-31
Site	:chamber #2	Ant. Pol.	:VERTICAL
EUT	:2.4GHz	Engineer	:VC
Detector	:802.11n HT-20	Humi.	:65 %
Temp.	:26 °C		
Memo	:CH LO & HI - Restricted Bands		


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2319.5200	53.7	-6.4	47.3	74.0	-26.7	Peak
2376.4500	53.6	-6.3	47.3	74.0	-26.7	Peak
2489.6500	53.2	-5.9	47.3	74.0	-26.7	Peak
2496.7500	53.7	-5.9	47.8	74.0	-26.2	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

4.4.3 Other Emission

a) Emission frequencies below 1 GHz

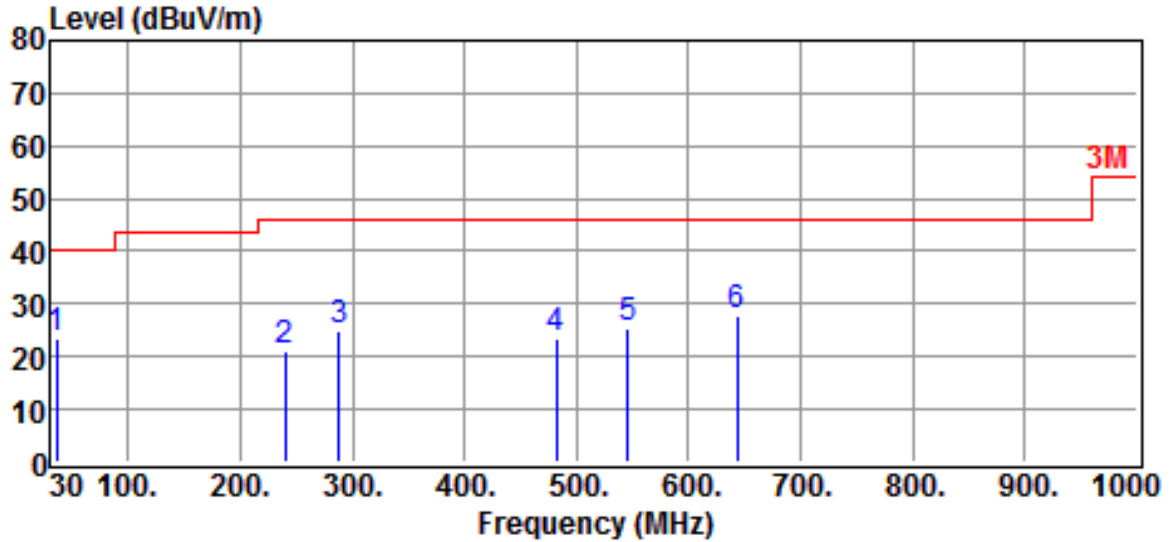


Site	:OPEN SITE	Date	:2012-11-01
Limit	:3M	Ant. Pol.	:HORIZONTAL
EUT	:Smart Kid Scale	Temp.	:25°C
Power Rating	:DC 1.5V*4	Humi.	:65%
Model	:WS-40	Engineer.	:VC
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correctio n Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector	AH (m) HOR	DRT VER
35.8200	9.3	14.0	23.3	40.0	-16.7	QP	1.5	79
239.5200	1.8	19.3	21.1	46.0	-24.9	QP	1.5	85
288.0200	1.3	23.5	24.8	46.0	-21.2	QP	1.5	74
482.0200	2.3	21.2	23.5	46.0	-22.5	QP	1.5	94
546.0400	3.1	22.2	25.3	46.0	-20.7	QP	1.5	83
643.0400	3.5	24.1	27.6	46.0	-18.4	QP	1.5	92

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

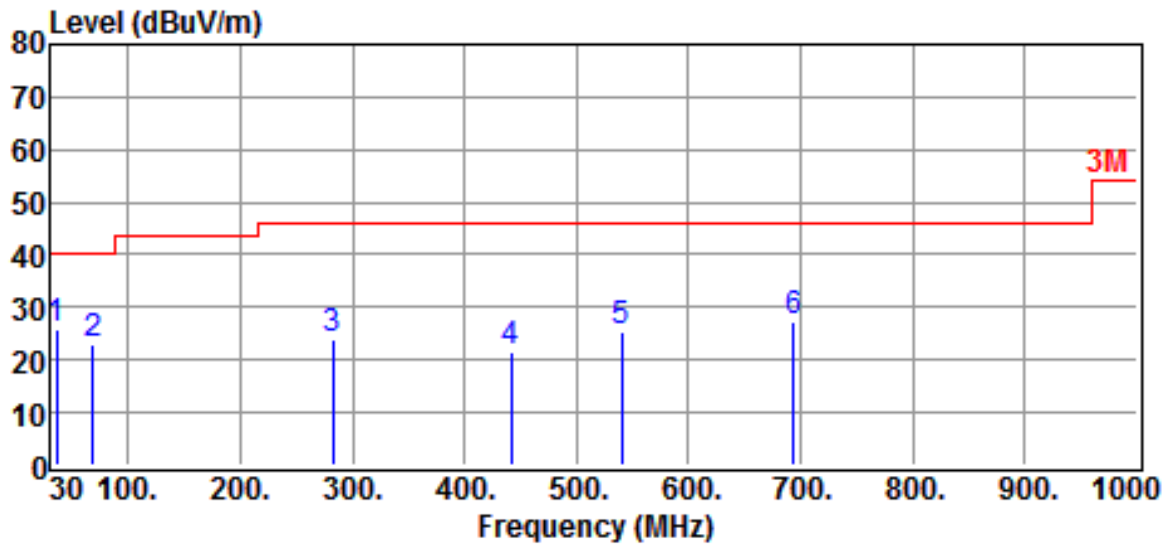


Site	:OPEN SITE	Date	:2012-11-01
Limit	:3M	Ant. Pol.	:VERTICAL
EUT	:Smart Kid Scale	Temp.	:25°C
Power Rating	:DC 1.5V*4	Humi.	:65%
Model	:WS-40	Engineer.	:VC
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector	AH (m) HOR	DRT VER
35.8200	12.1	14.0	26.1	40.0	-13.9	QP	1.0	188
68.8000	12.5	10.5	23.0	40.0	-17.0	QP	1.0	178
282.2000	0.8	23.0	23.8	46.0	-22.2	QP	1.0	192
441.2800	1.5	20.1	21.6	46.0	-24.4	QP	1.0	181
540.2200	3.3	22.1	25.4	46.0	-20.6	QP	1.0	178
693.4800	2.3	25.1	27.4	46.0	-18.6	QP	1.0	183

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

b) Emission frequencies above 1 GHz

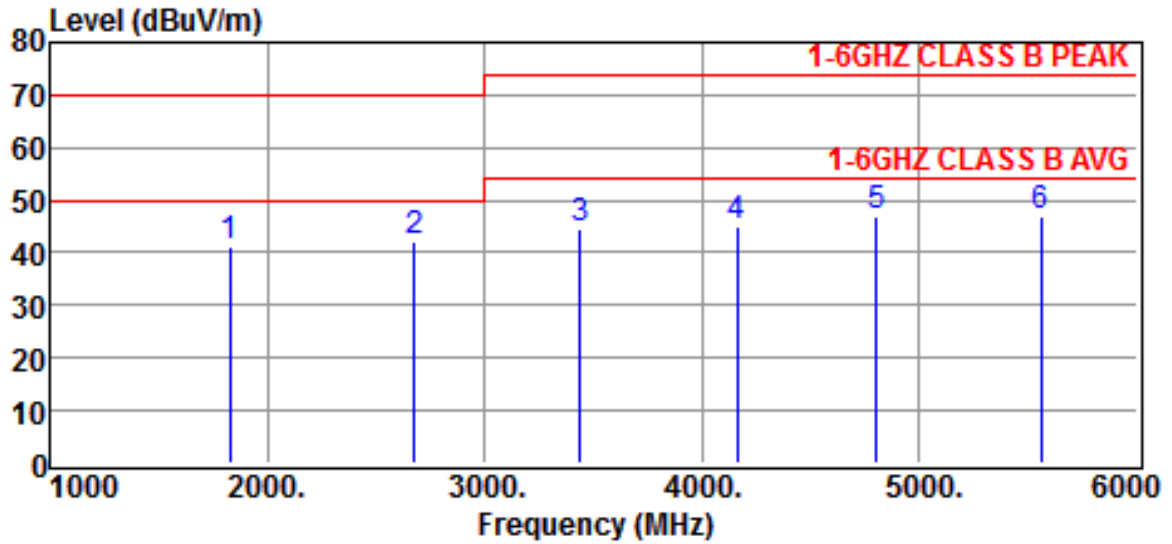


Site	:CHAMBER #2	Date	:2012-11-01
Limit	:1-6GHZ CLASS B PEAK	Ant. Pol.	:HORIZONTAL
EUT	:Smart Kid Scale	Temp.	:25°C
Power Rating	:DC 1.5V*4	Humi.	:65%
Model	:WS-40	Engineer.	:VC
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
1830.0000	49.1	-8.0	41.1	70.0	-28.9	Peak
2680.0000	47.0	-4.9	42.1	70.0	-27.9	Peak
3440.0000	46.8	-2.2	44.6	74.0	-29.4	Peak
4160.0000	45.1	0.0	45.1	74.0	-28.9	Peak
4800.0000	45.9	1.2	47.1	74.0	-26.9	Peak
5560.0000	44.3	2.7	47.0	74.0	-27.0	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

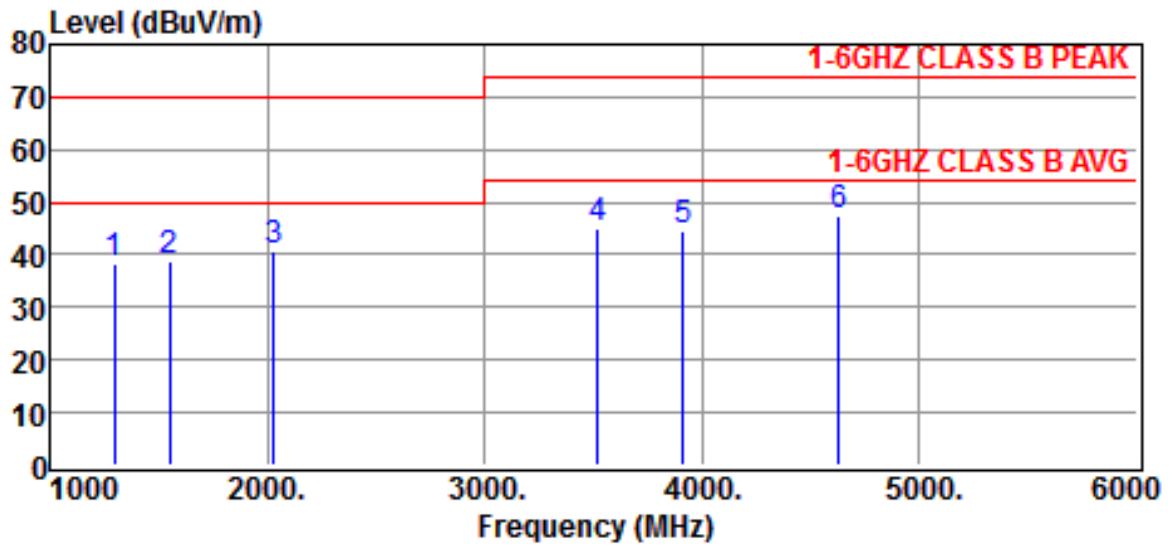

Site	:CHAMBER #2	Date	:2012-11-01
Limit	:1-6GHZ CLASS B PEAK	Ant. Pol.	:VERTICAL
EUT	:Smart Kid Scale	Temp.	:25°C
Power Rating	:DC 1.5V*4	Humi.	:65%
Model	:WS-40	Engineer.	:VC
Test Mode	:OPERATION MODE	:	:

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
1300.0000	49.0	-10.8	38.2	70.0	-31.8	Peak
1550.0000	48.7	-9.7	39.0	70.0	-31.0	Peak
2030.0000	47.7	-7.1	40.6	70.0	-29.4	Peak
3520.0000	47.1	-2.1	45.0	74.0	-29.0	Peak
3910.0000	45.2	-0.4	44.8	74.0	-29.2	Peak
4630.0000	46.8	0.6	47.4	74.0	-26.6	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\mathbf{Result = Reading + Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup



5 CONDUCTED EMISSION MEASUREMENT

5.1 Description

This EUT is excused from investigation of conducted emission, for it is powered by DC battery only. According to §15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

Please see photos submitted in Exhibit B.

The antenna was integrated on the PCB. No consideration of replacement. The antenna gain is 3.3dBi. No need to reduce the peak output power.

7 EMISSION BANDWIDTH MEASUREMENT


7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.

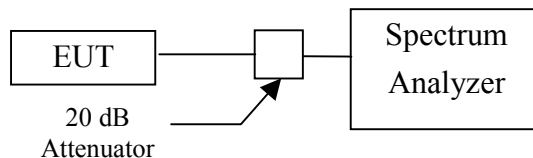

7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2012/09/20	2013/09/20

7.4 Measurement Data

Test Date : Nov. 04, 2012 Temperature : 25 °C Humidity : 65 %

A 802.11b

- a) Channel Low: 6 dB Emission Bandwidth is 10.7 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 10.7 MHz
- c) Channel High: 6 dB Emission Bandwidth is 10.7 MHz

B 802.11g

- a) Channel Low: 6 dB Emission Bandwidth is 16.7 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 16.7 MHz
- c) Channel High: 6 dB Emission Bandwidth is 16.7 MHz

C 802.11n HT-20


- a) Channel Low: 6 dB Emission Bandwidth is 17.8 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 17.8 MHz
- c) Channel High: 6 dB Emission Bandwidth is 17.8 MHz


Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ ($1 \text{ GHz} < f \leq 18 \text{ GHz}$).


802.11b



Ref 10 dBm Att 10 dB SWT 2.5 ms 10.70000000 MHz
*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 0.32 dB

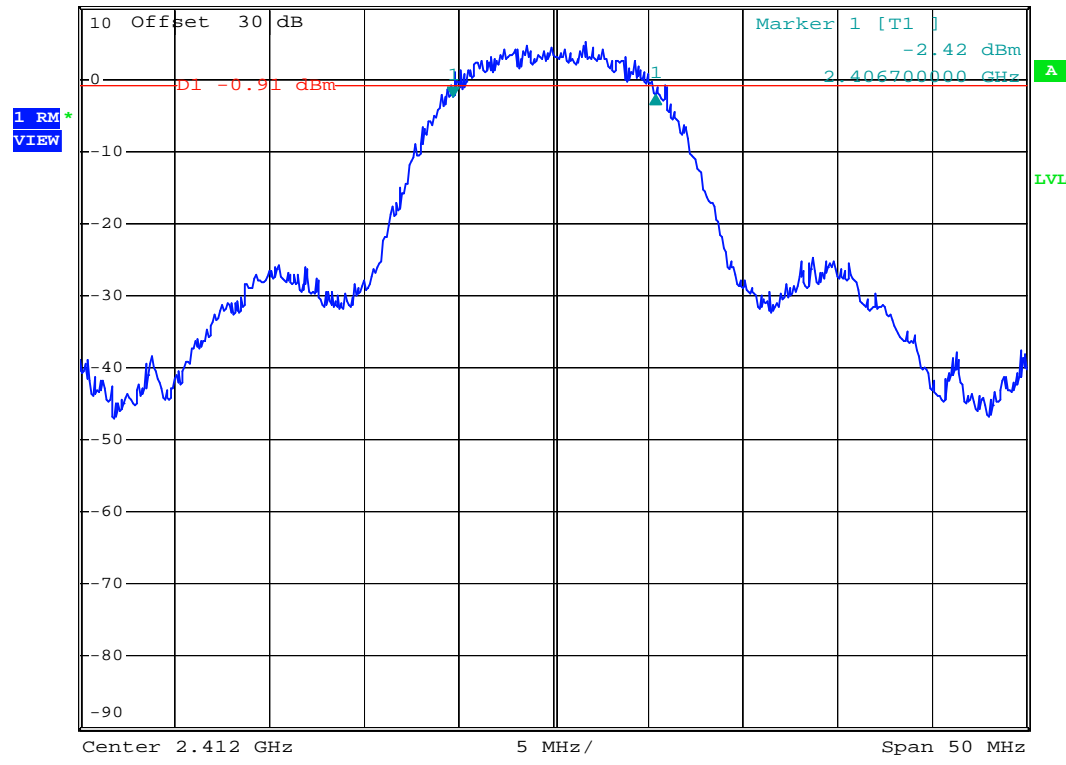

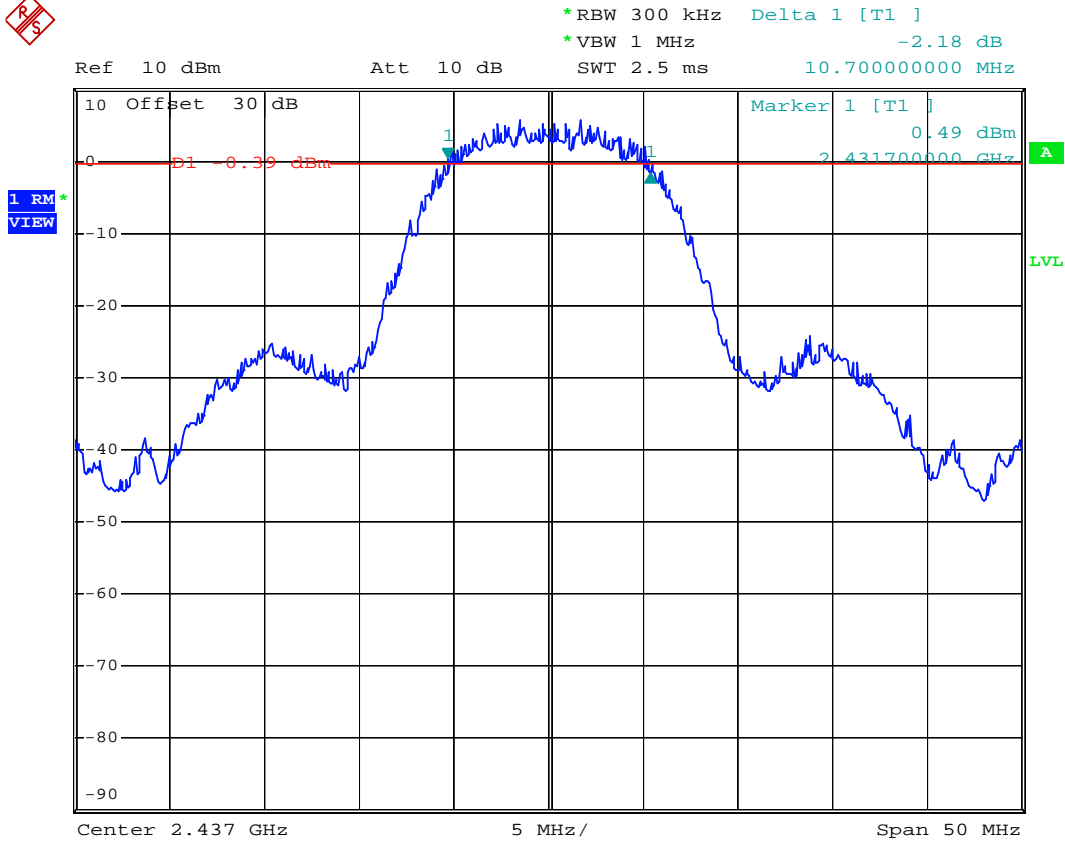


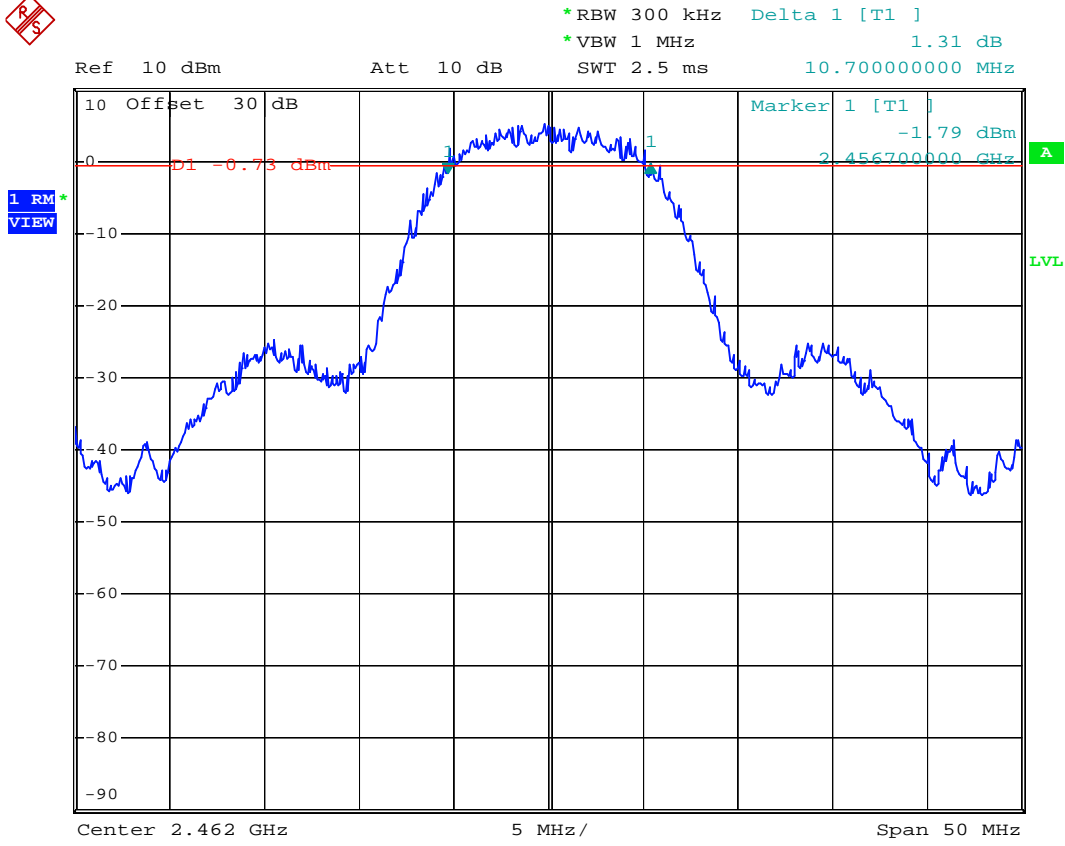



802.11g



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz -3.06 dB
Ref 10 dBm Att 10 dB SWT 2.5 ms 16.700000000 MHz

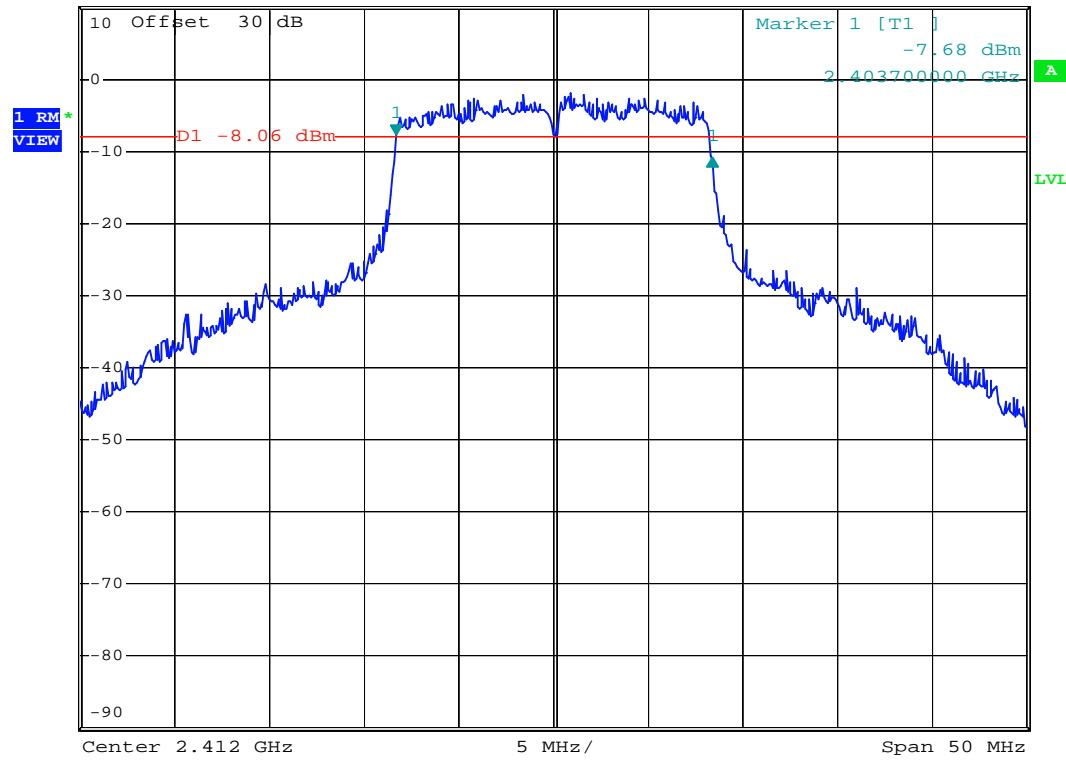

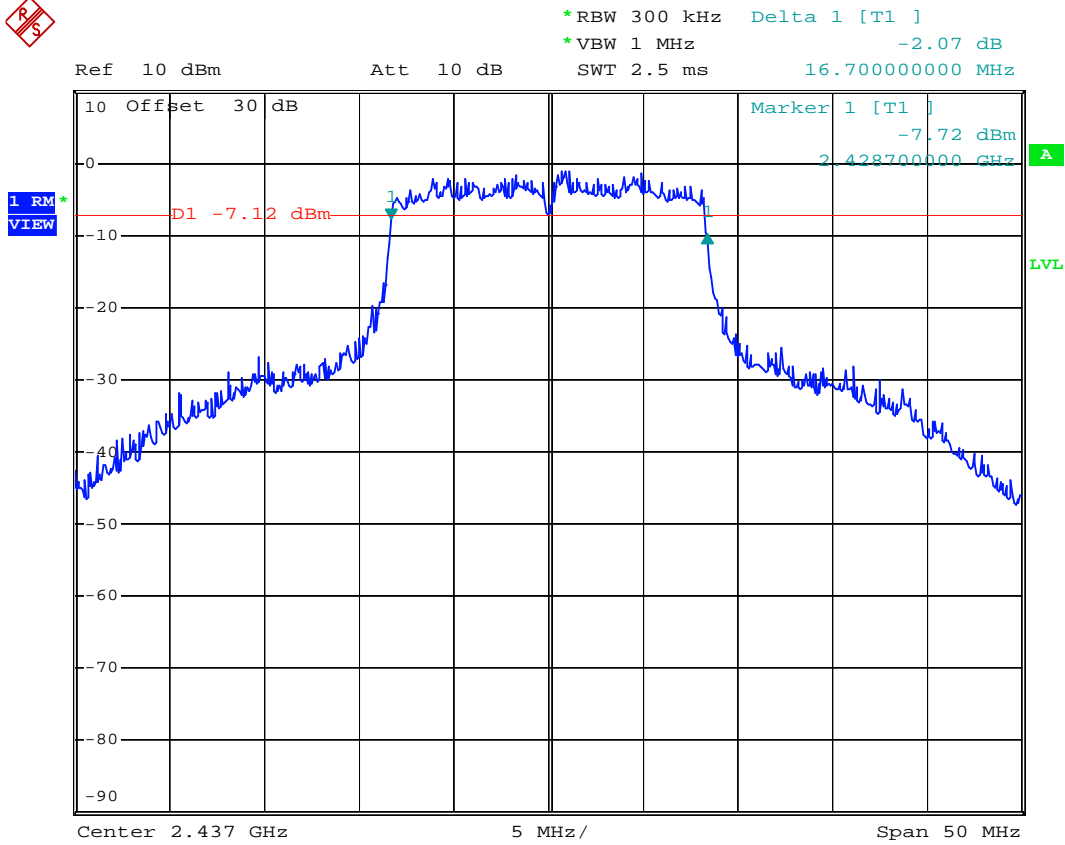


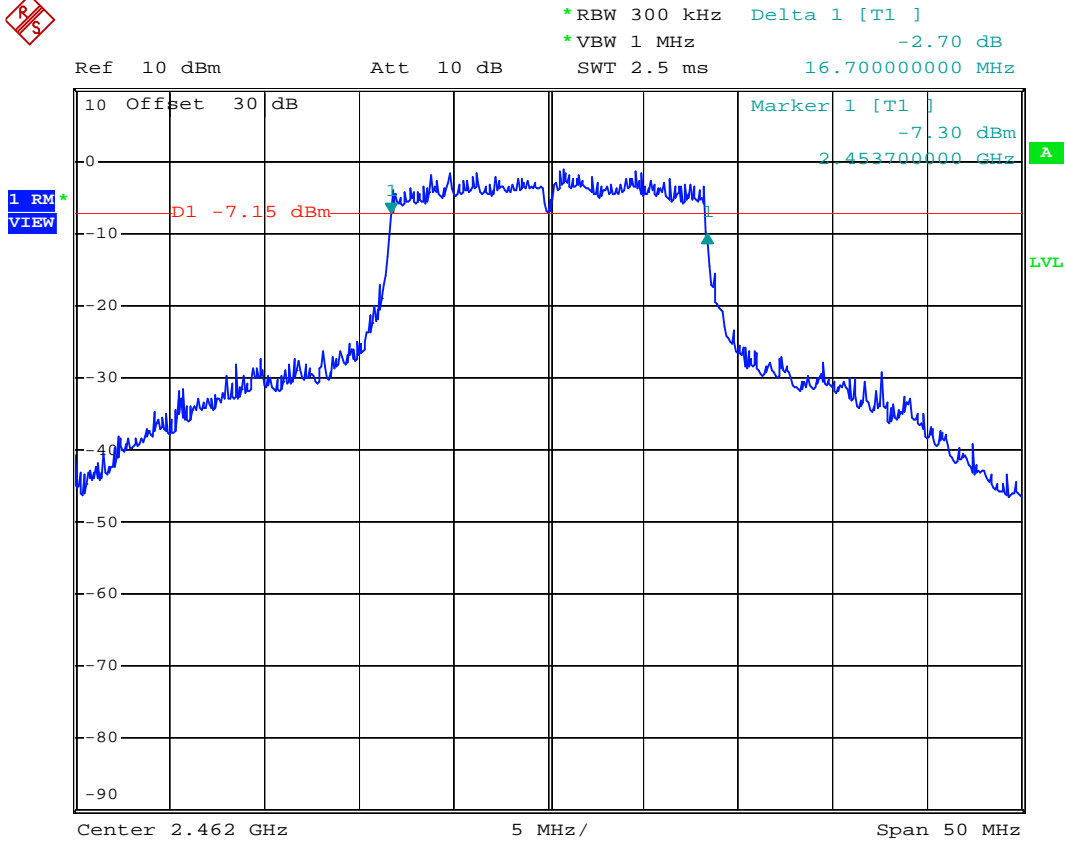



802.11n HT-20



Ref 10 dBm Att 10 dB *RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 1.96 dB
SWT 2.5 ms 17.800000000 MHz

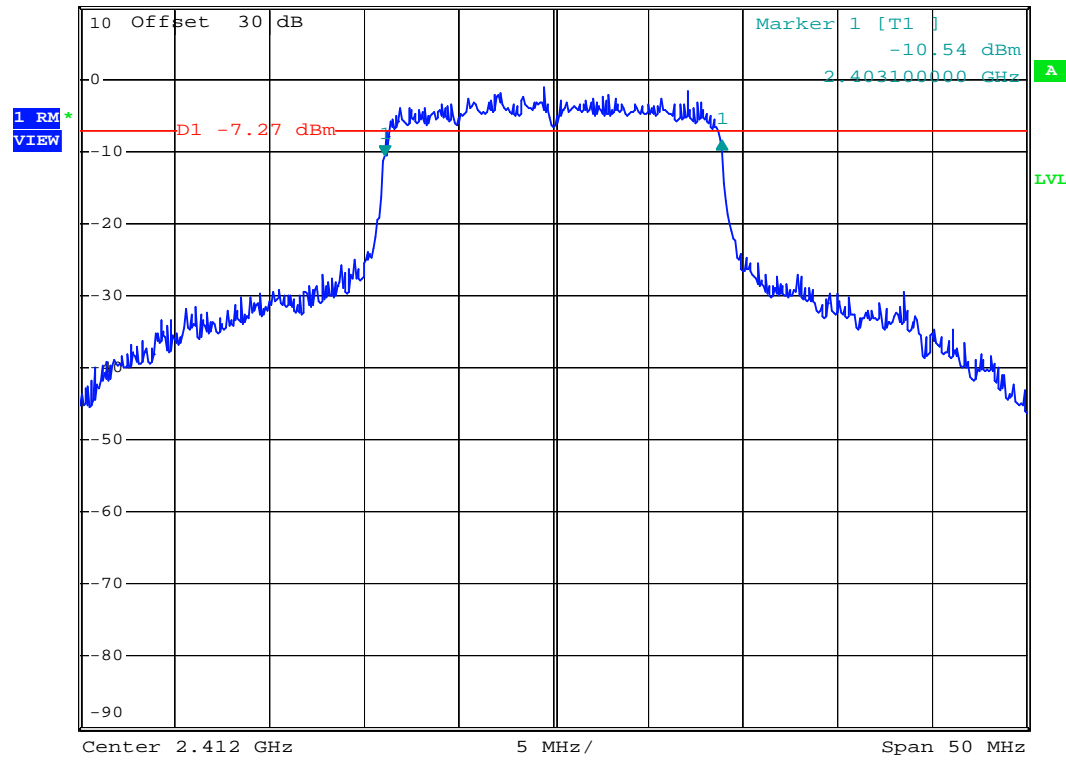

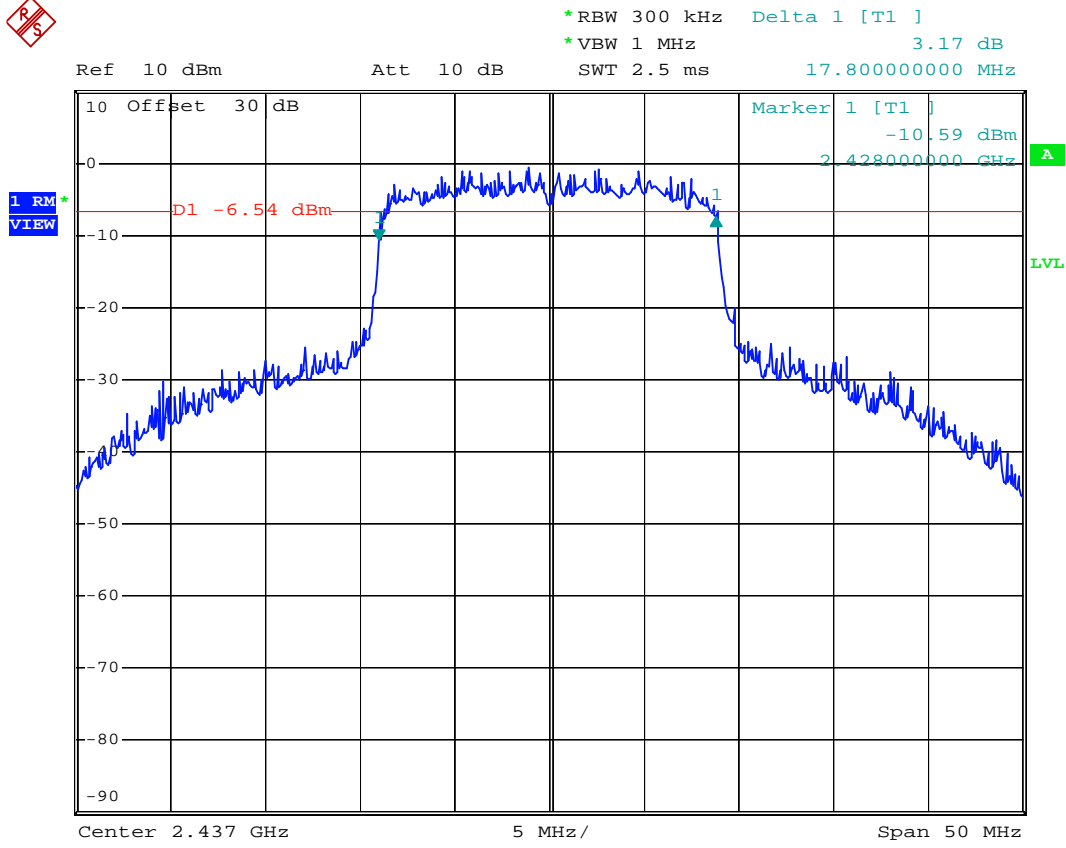

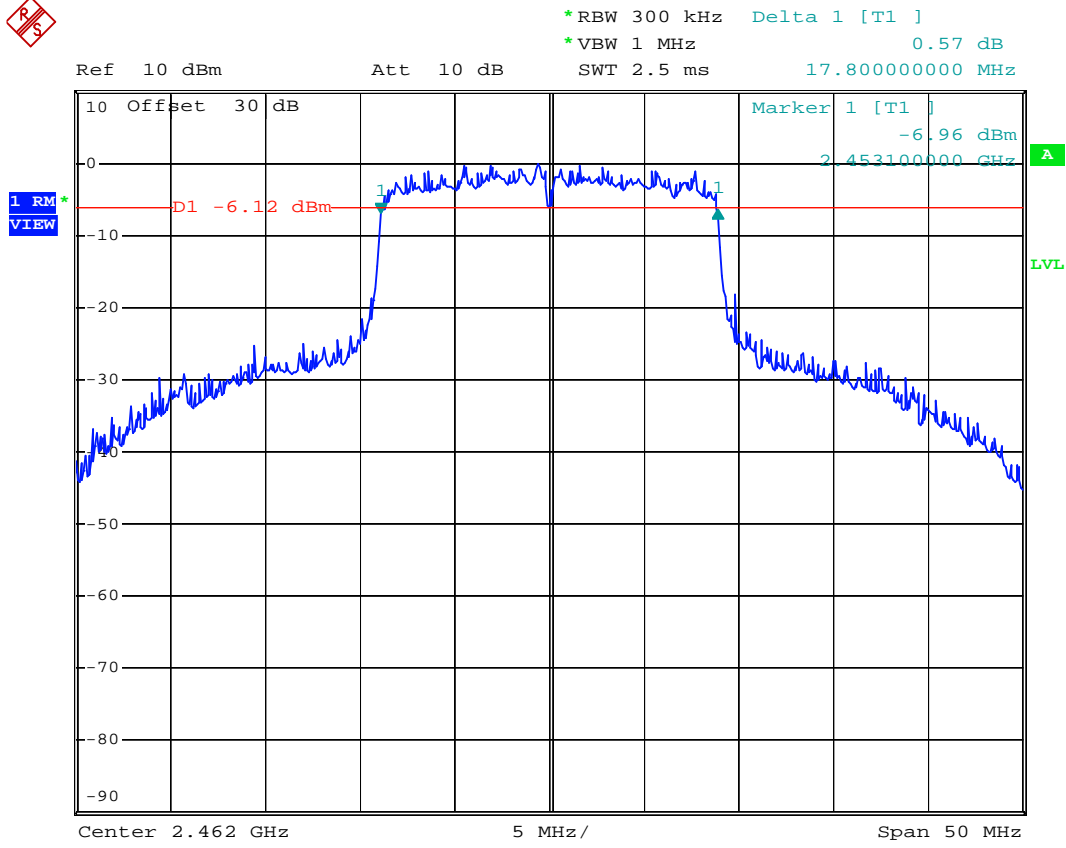

8 OUTPUT POWER MEASUREMENT


8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Use channel power function and record the level displayed.
5. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
POWER METER+SENSOR	ANRITSU	ML2487A+MA2491A	2011/12/28	2012/12/27

8.4 Measurement Data

Test Date : Nov. 04, 2012 Temperature : 25 °C Humidity : 65 %

A 802.11b

- a) Channel Low: Output Peak Power is 14.90 dBm **30.903** mW
- b) Channel Mid: Output Peak Power is 14.09 dBm **25.645** mW
- c) Channel High: Output Peak Power is 14.20 dBm **26.303** mW

B 802.11g

- a) Channel Low: Output Peak Power is 11.74 dBm **14.928** mW
- b) Channel Mid: Output Peak Power is 12.10 dBm **16.218** mW
- c) Channel High: Output Peak Power is 12.30 dBm **16.982** mW

C.1 802.11n HT-20


- a) Channel Low: Output Peak Power is 11.41 dBm **13.836** mW
- b) Channel Mid: Output Peak Power is 12.00 dBm **15.849** mW
- c) Channel High: Output Peak Power is 11.90 dBm **15.488** mW


Note : The expanded uncertainty: 2dB.


802.11b



* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

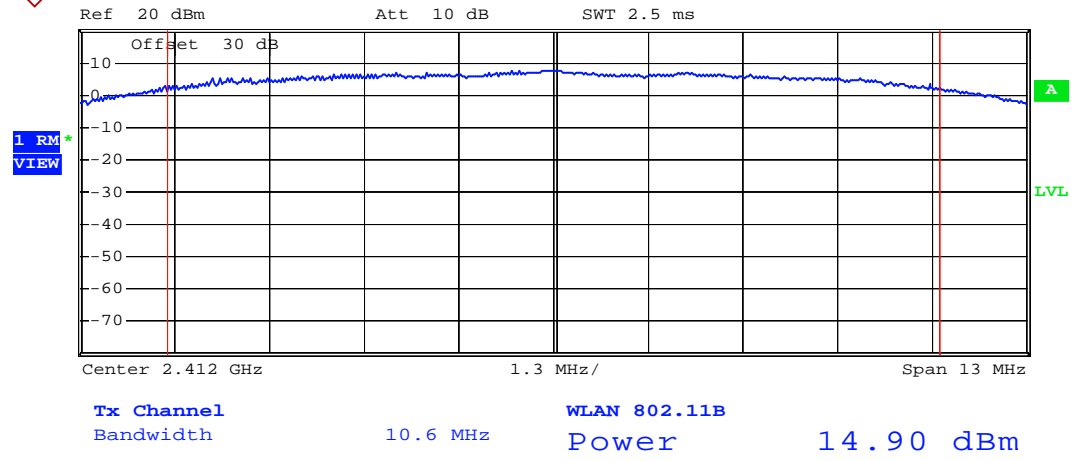

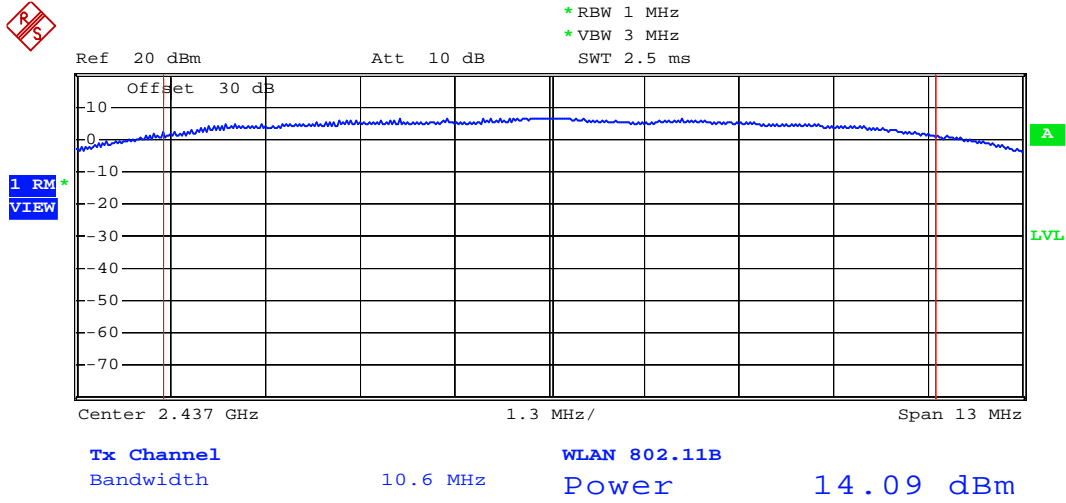


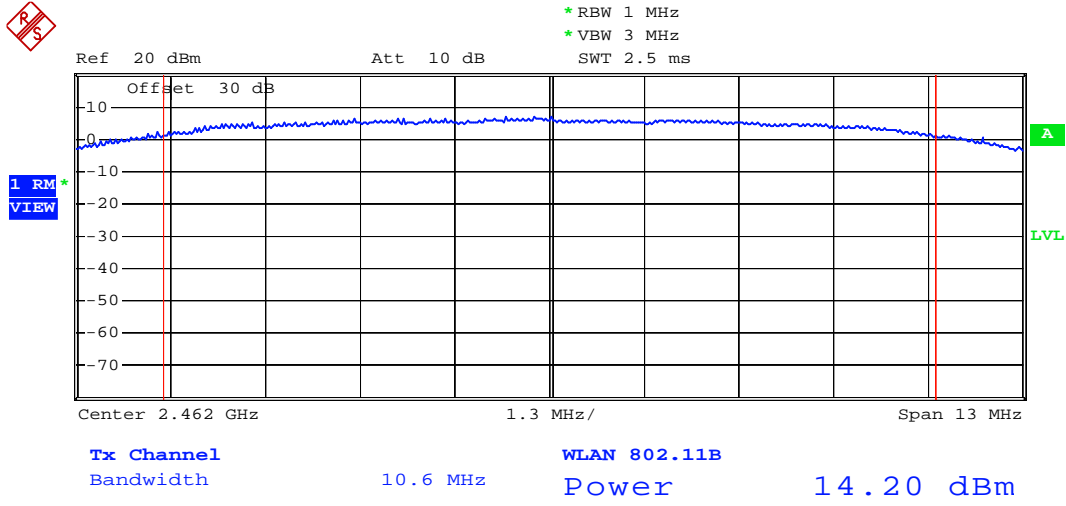



802.11g



* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

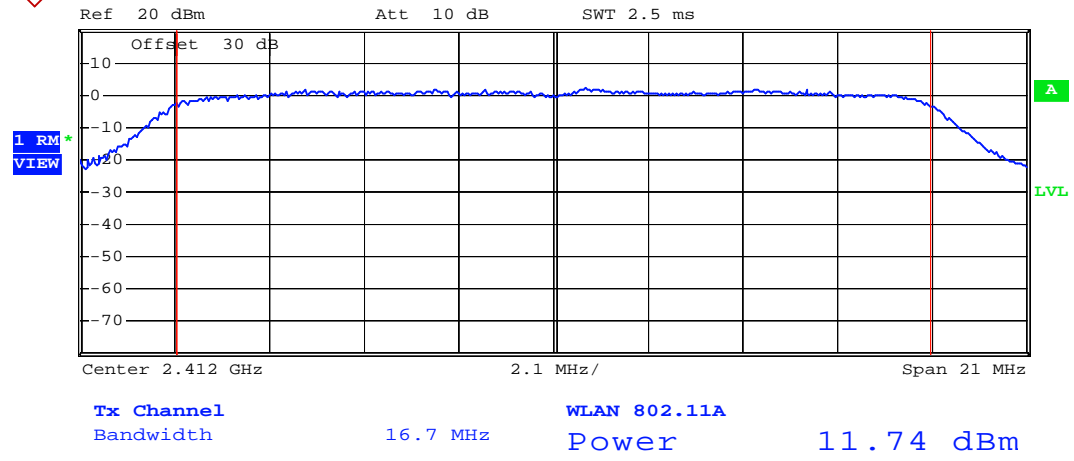

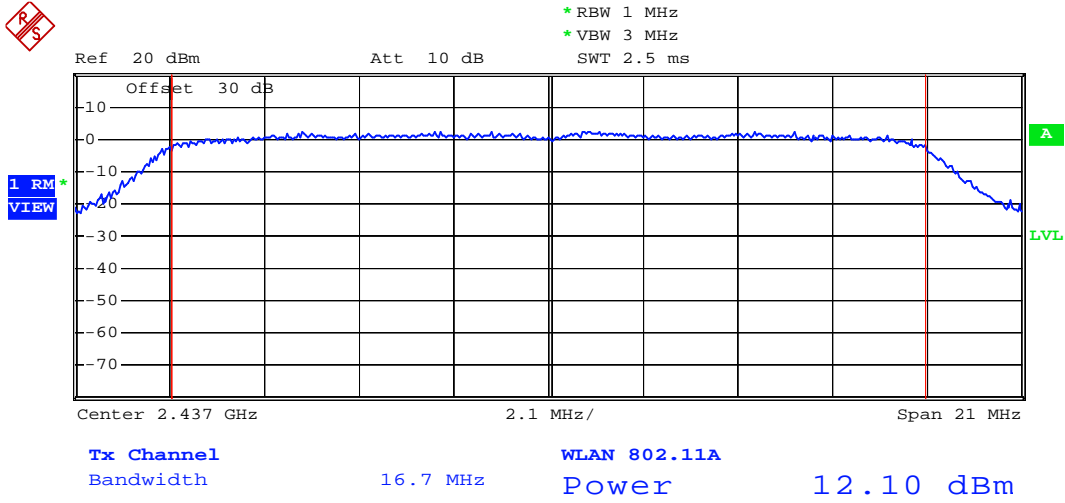


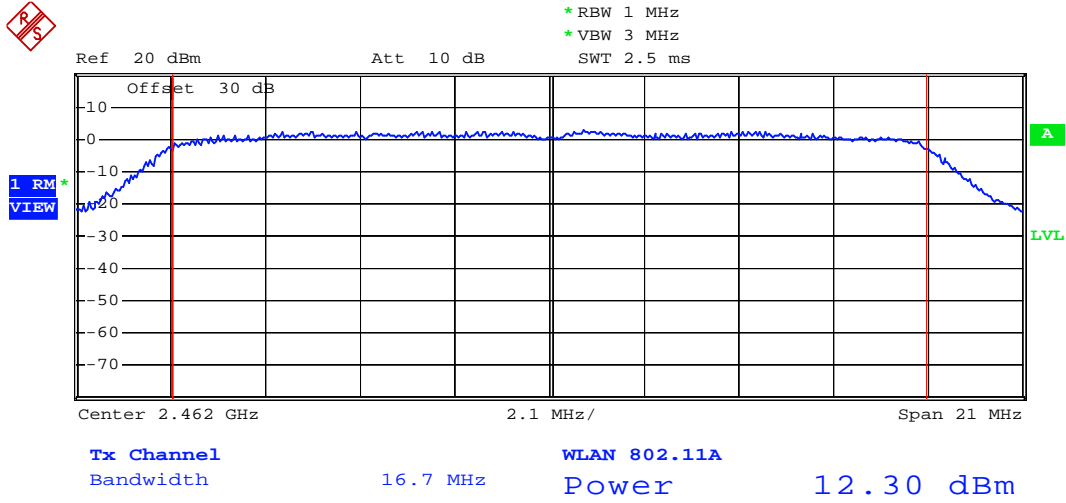



802.11n HT-20



* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

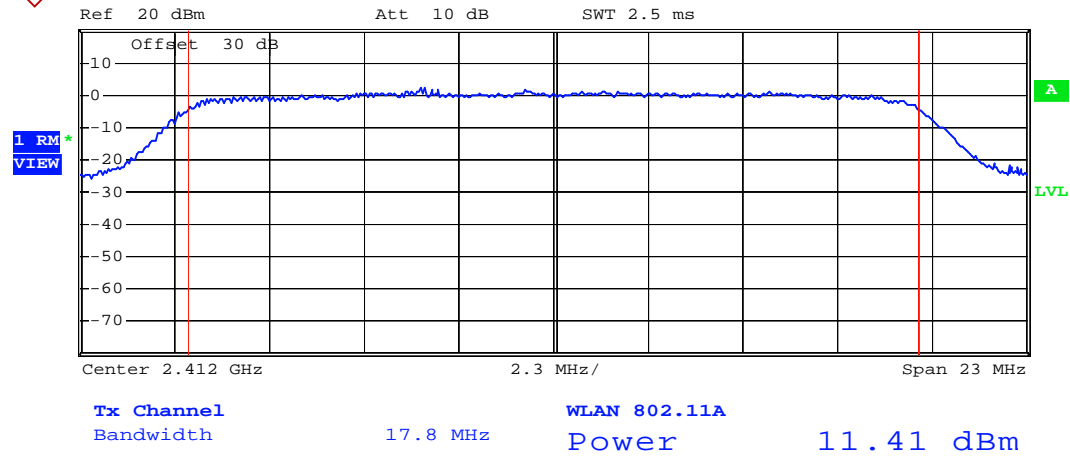

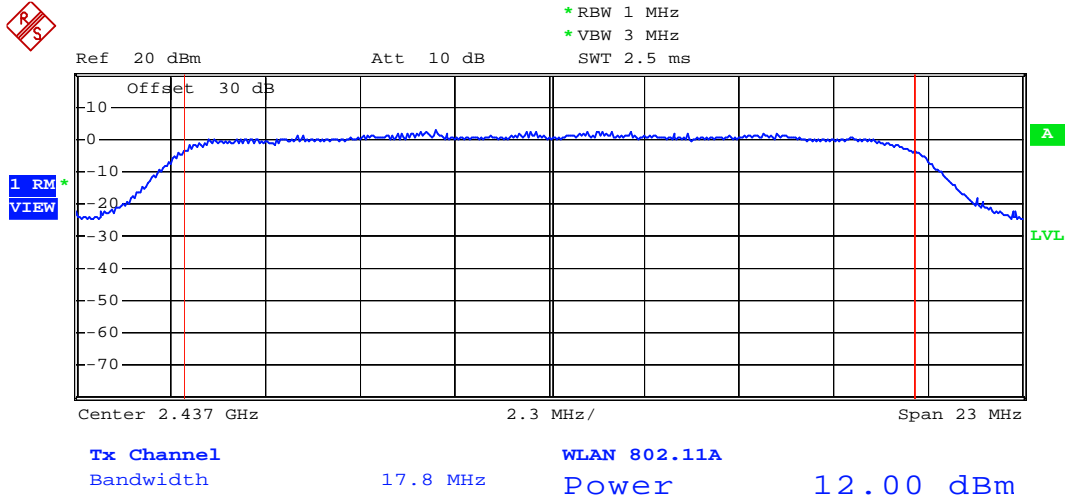

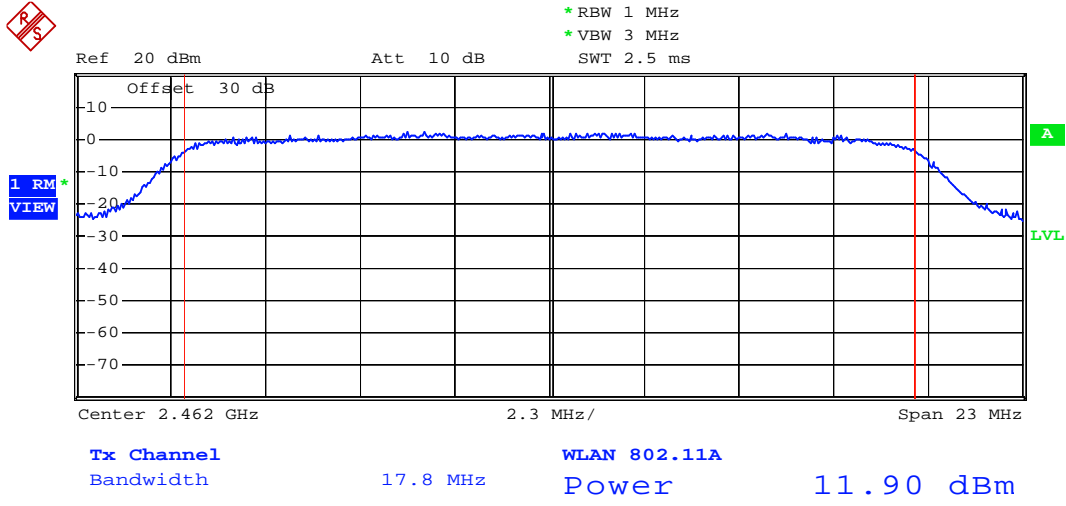

9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW of spectrum analyzer to 100kHz and VBW to 1 MHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2012/09/20	2013/09/20

9.4 Measurement Data

Test Date : Nov. 04, 2012 Temperature : 25 °C Humidity : 65 %

A 802.11b

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

B 802.11g

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

C 802.11n HT-20


- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.


Note : The expanded uncertainty: 2dB.

802.11b



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -54.11 dBm
SWT 10 ms 2.369200000 GHz

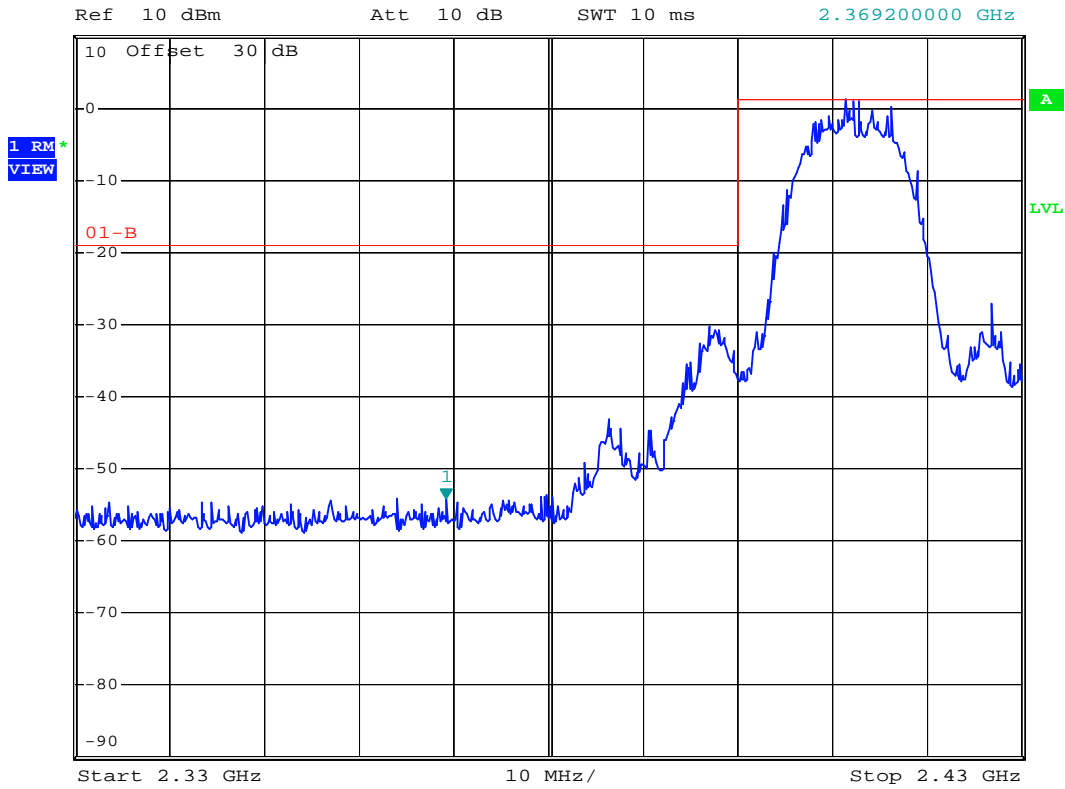

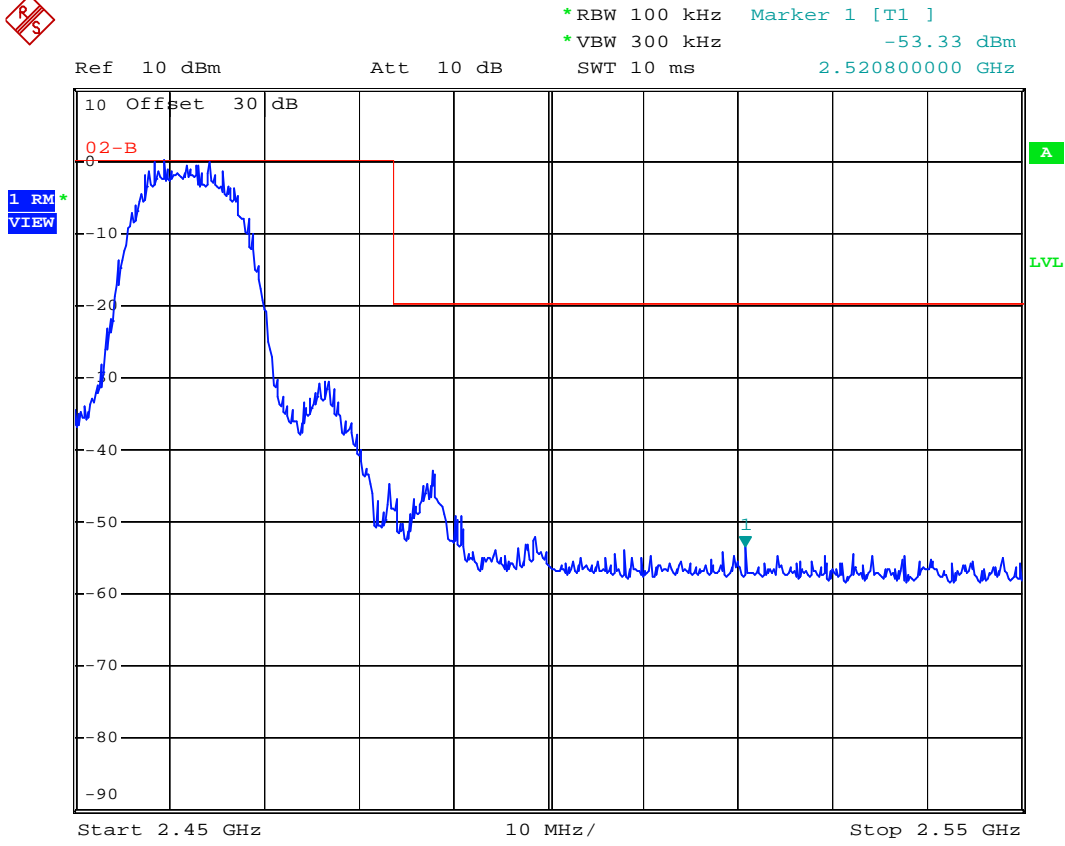


802.11g




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -54.51 dBm
SWT 10 ms 2.346200000 GHz

Ref 10 dBm

Att 10 dB

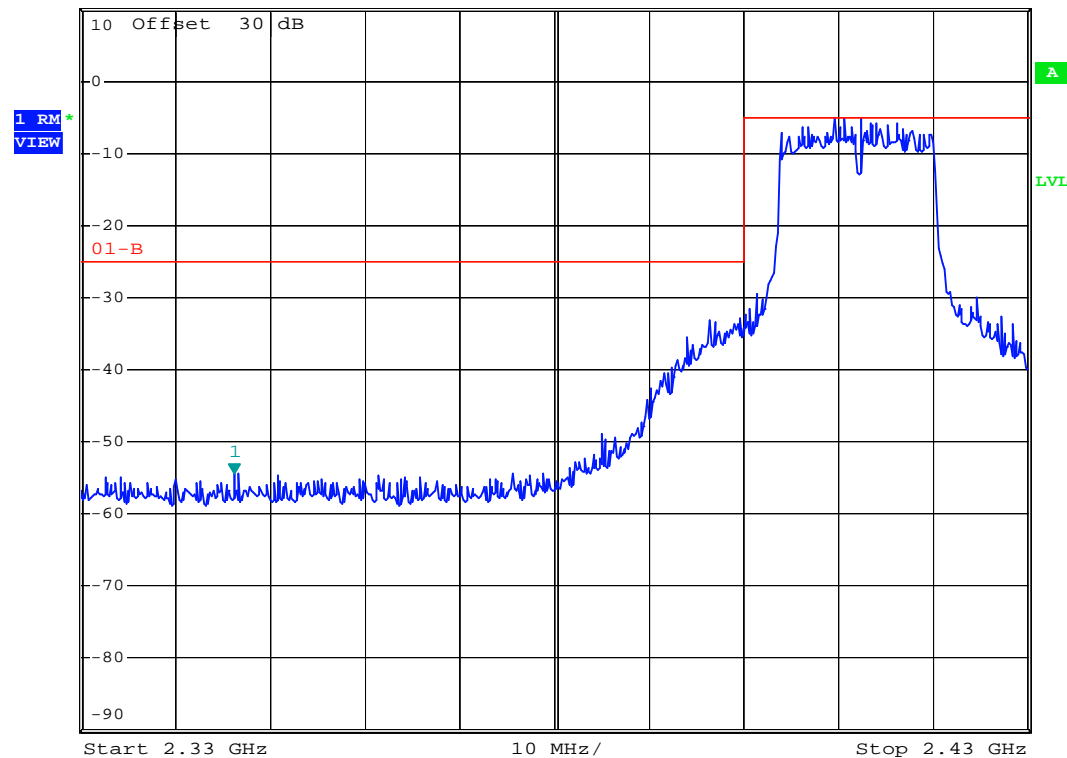


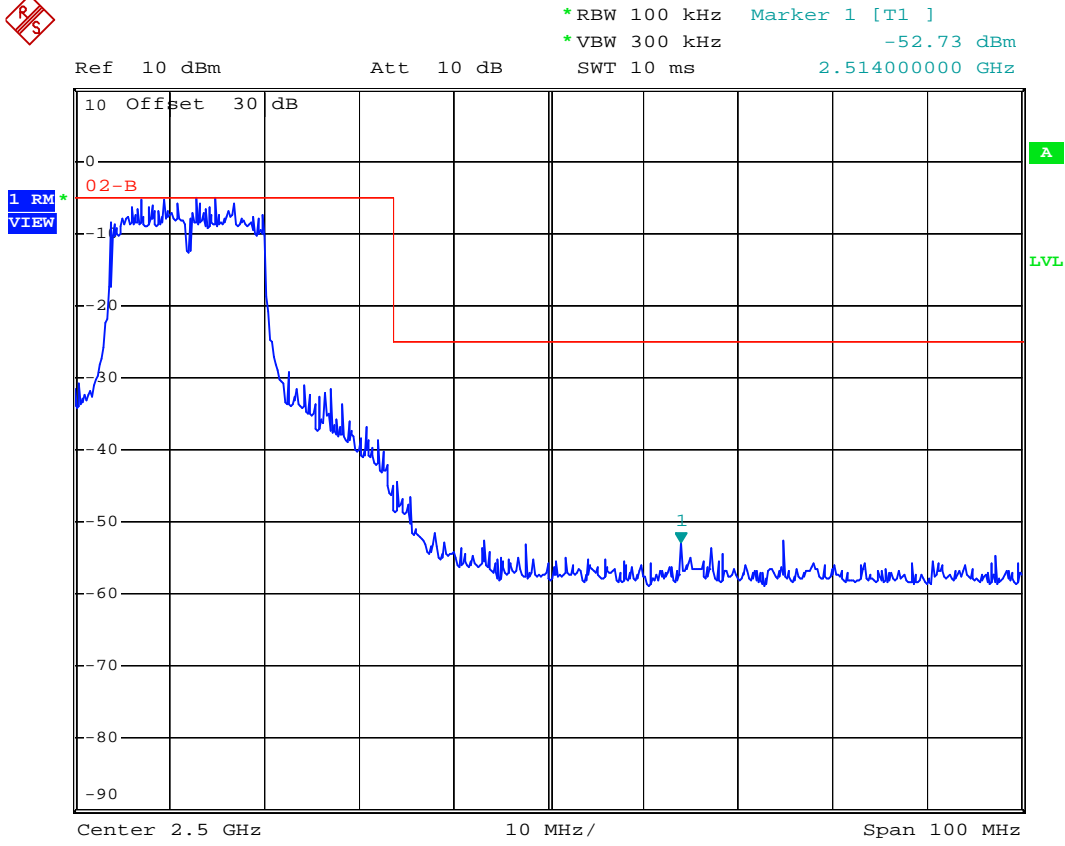


802.11n 20M



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -54.58 dBm
SWT 10 ms 2.361400000 GHz

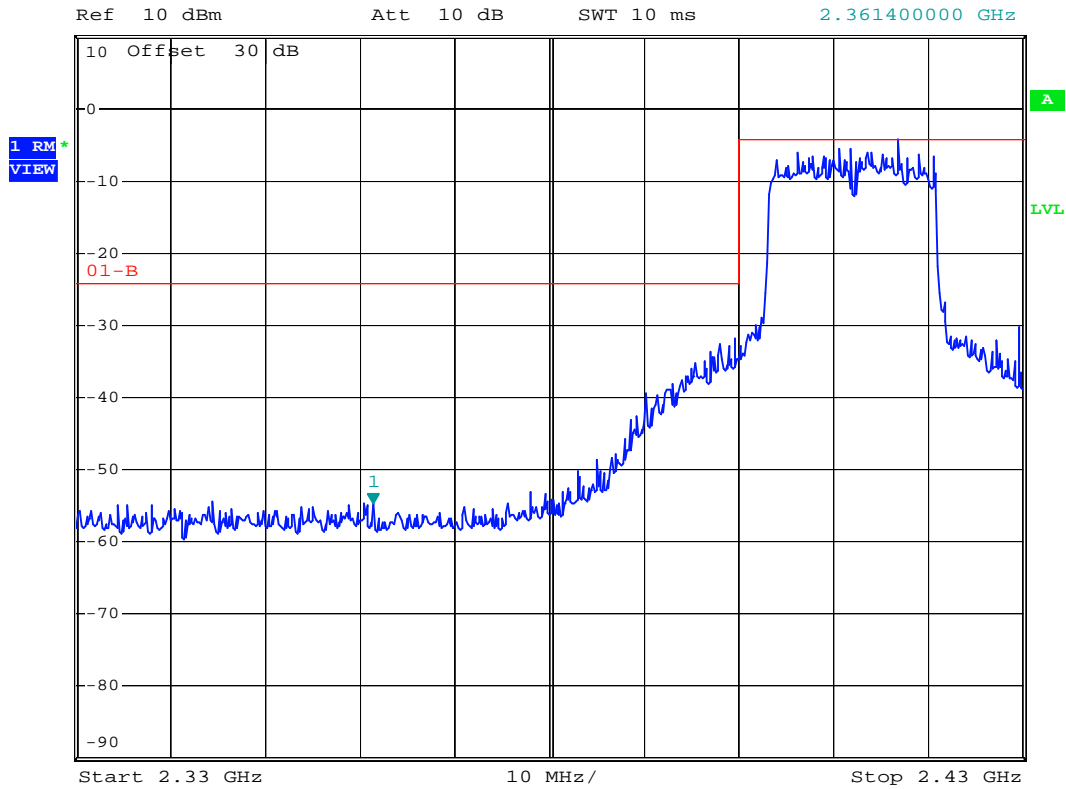

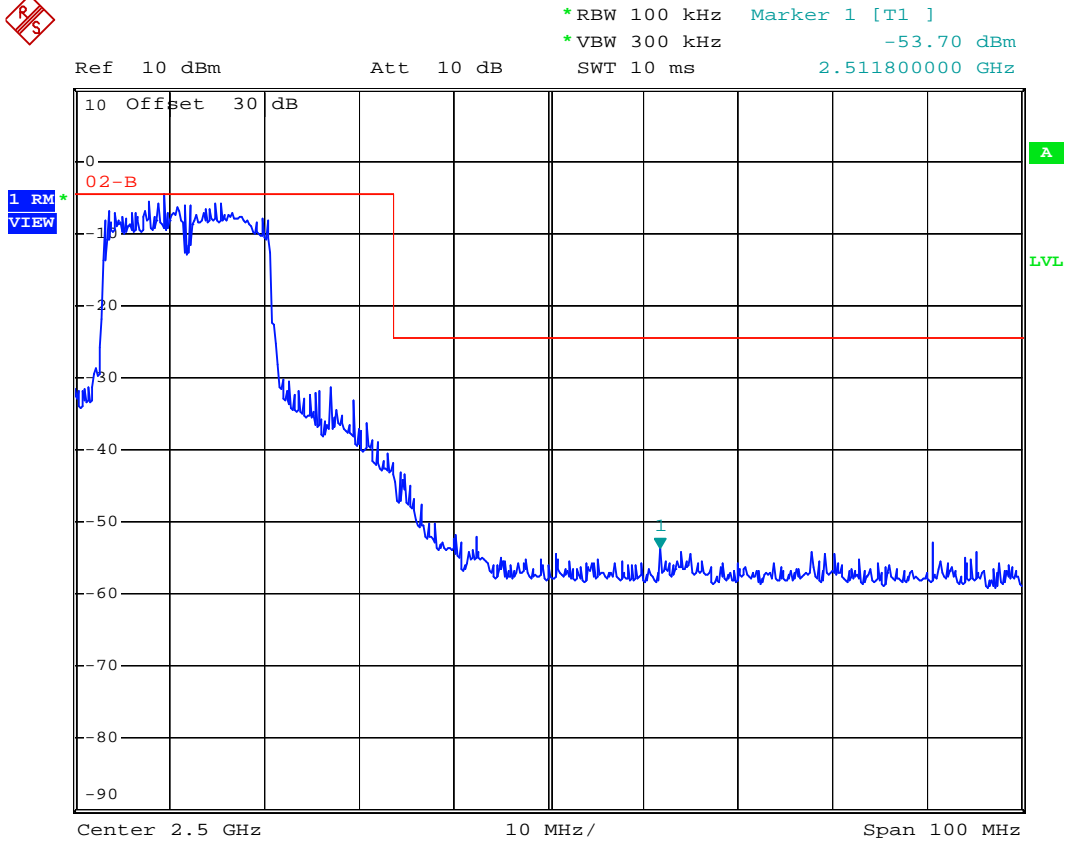

10 POWER DENSITY MEASUREMENT

10.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on highest level appearing on spectral display within a 300 kHz frequency span.
4. Set the spectrum analyzer on a 3 kHz resolution bandwidth and 300 kHz video bandwidth as well as max hold function.
5. Repeat above procedures until all measured frequencies were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2012/09/20	2013/09/20

10.4 Measurement Data

Test Date : Nov. 04, 2012 Temperature : 25 °C Humidity : 65 %

A 802.11b

- a) Channel Low: Maximun Power Density of 3 kHz Bandwidth is 5.50 dBm
- b) Channel Mid: Maximun Power Density of 3 kHz Bandwidth is 5.56 dBm
- c) Channel High: Maximun Power Density of 3 kHz Bandwidth is 5.60 dBm

B 802.11g

- a) Channel Low: Maximun Power Density of 3 kHz Bandwidth is -3.08 dBm
- b) Channel Mid: Maximun Power Density of 3 kHz Bandwidth is -3.89 dBm
- c) Channel High: Maximun Power Density of 3 kHz Bandwidth is -2.71 dBm

C 802.11n HT-20


- a) Channel Low: Maximun Power Density of 3 kHz Bandwidth is -2.80 dBm
- b) Channel Mid: Maximun Power Density of 3 kHz Bandwidth is -2.07 dBm
- c) Channel High: Maximun Power Density of 3 kHz Bandwidth is -2.23 dBm


Note : The expanded uncertainty: 2dB.


802.11b



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 5.50 dBm
SWT 2.5 ms 2.411974000 GHz

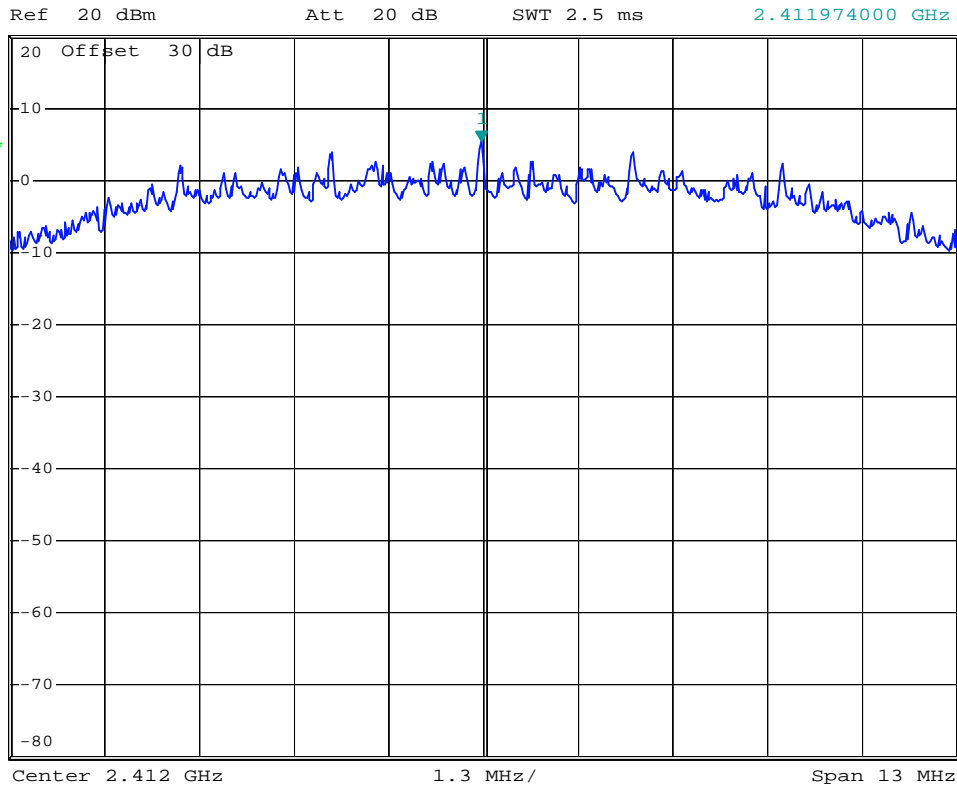

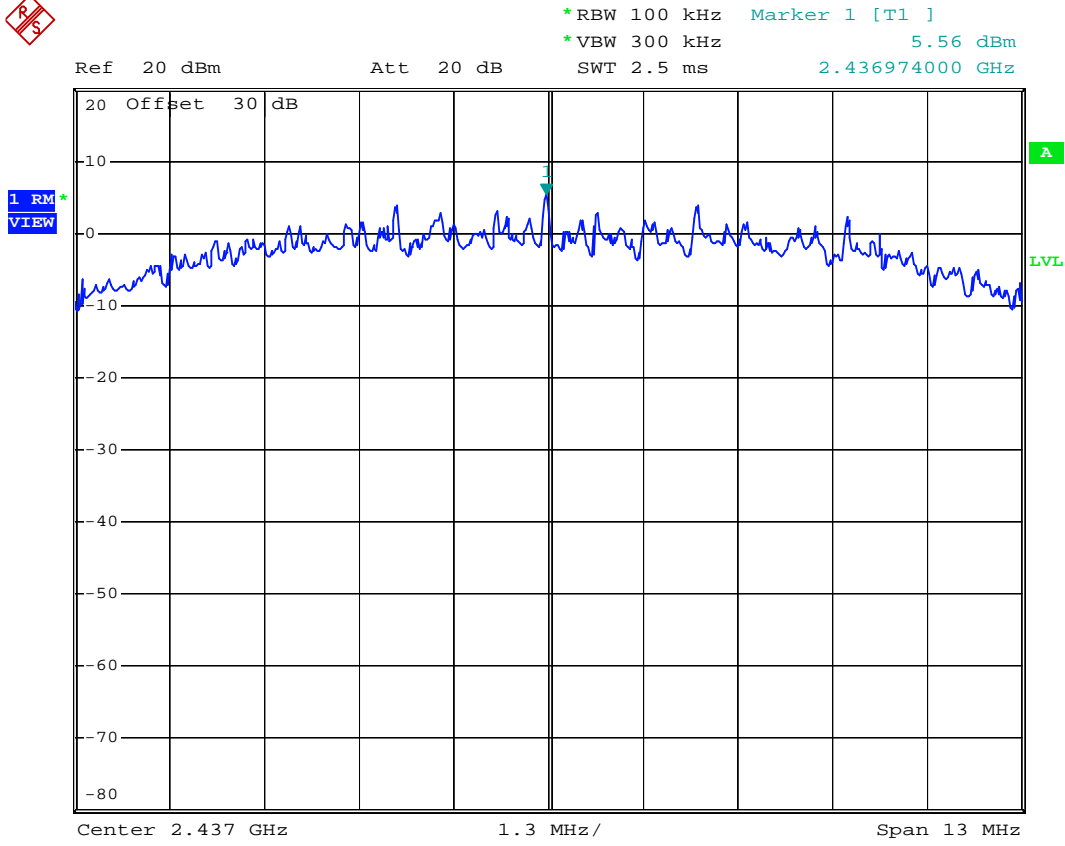

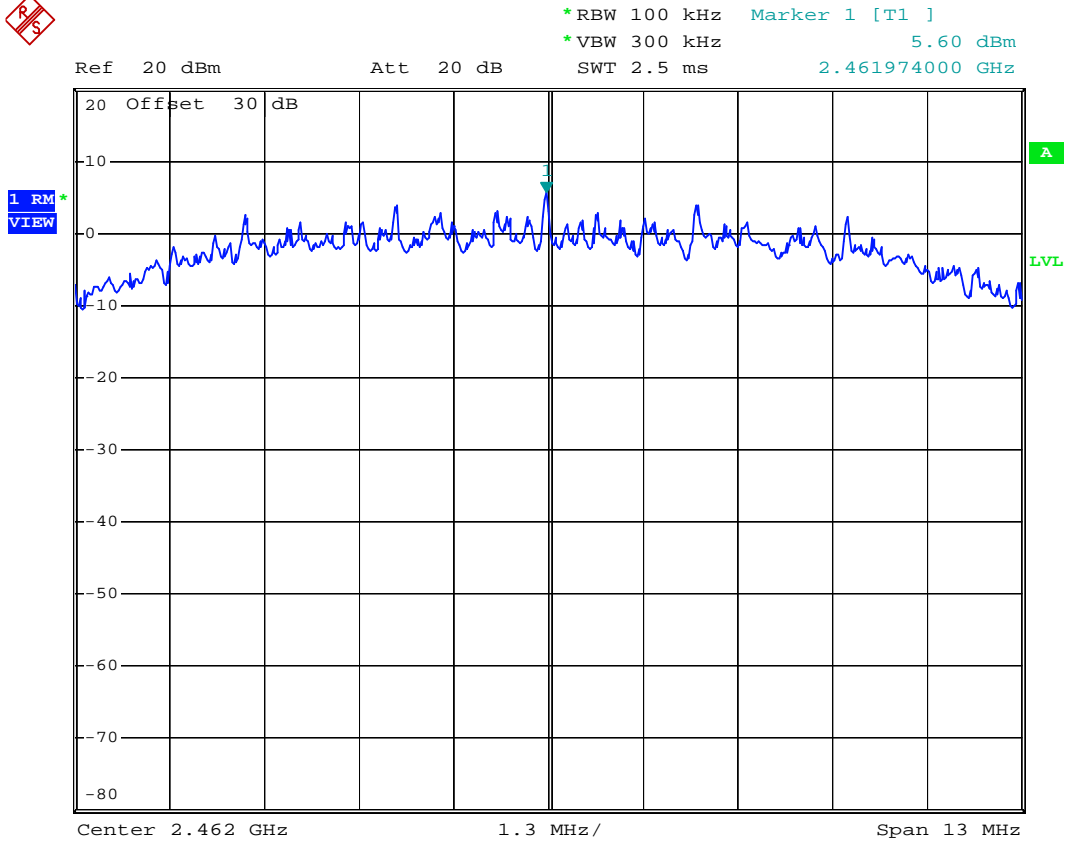

802.11g




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -3.08 dBm
SWT 2.5 ms 2.410362000 GHz


Ref 10 dBm


Att 10 dB

SWT 2.5 ms

2.410362000 GHz

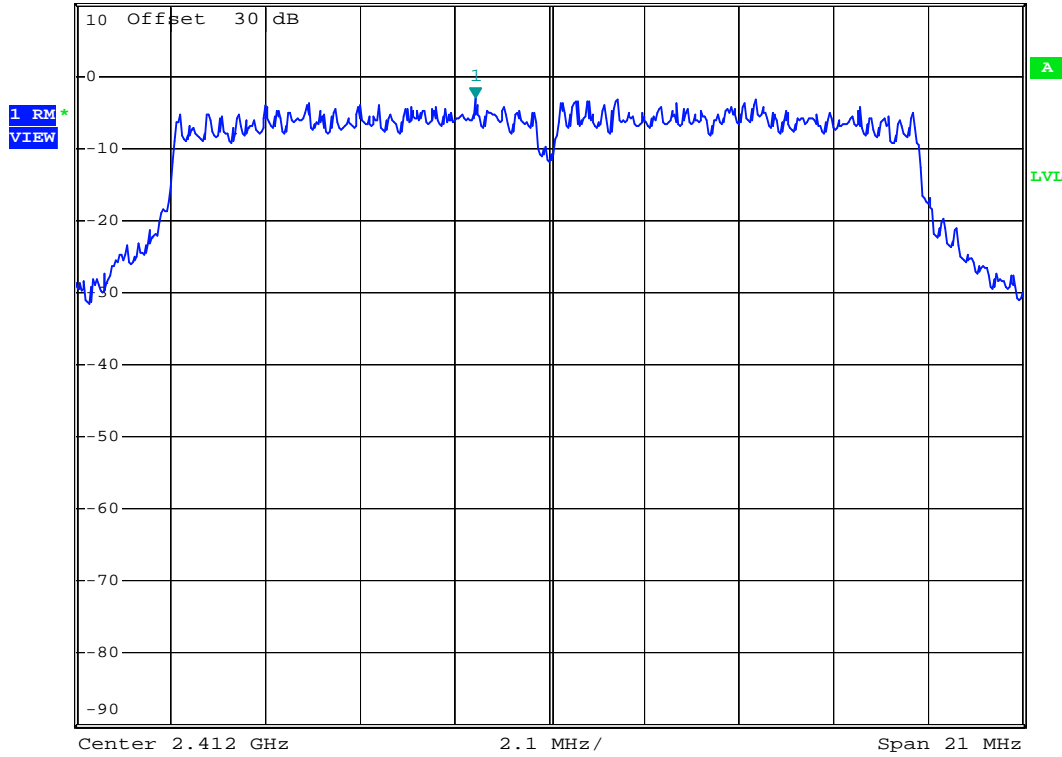

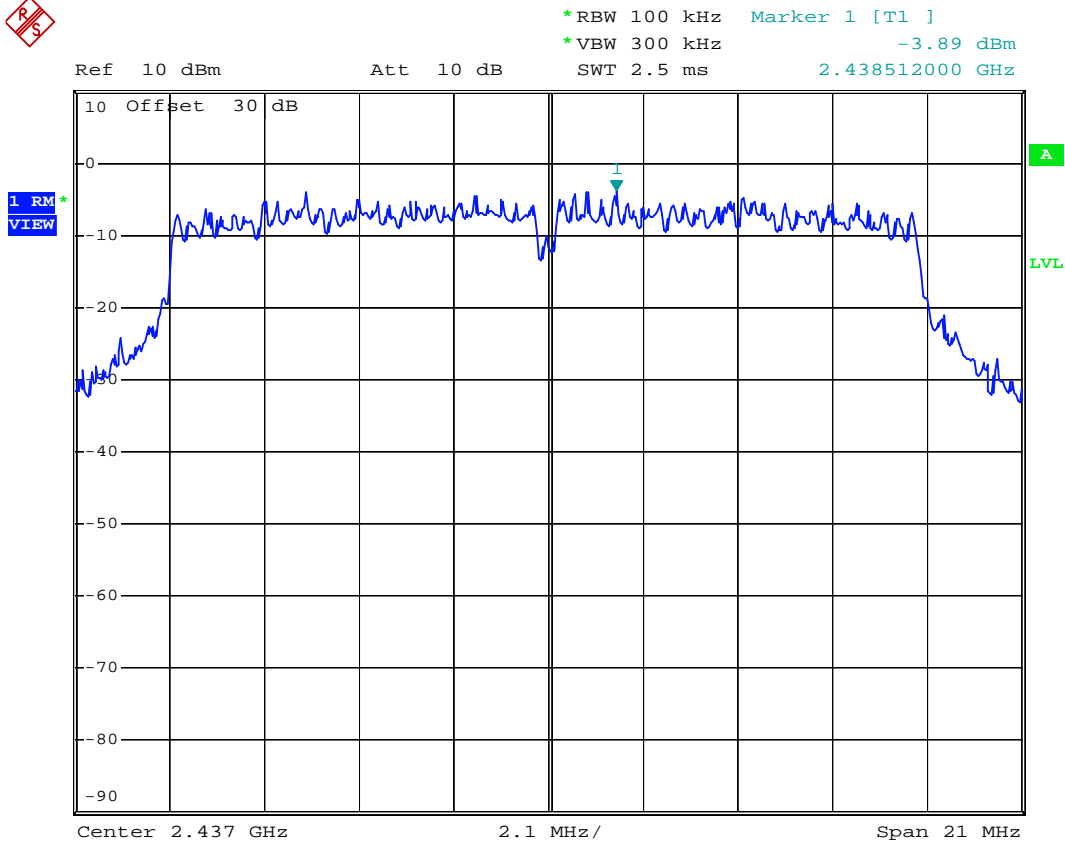

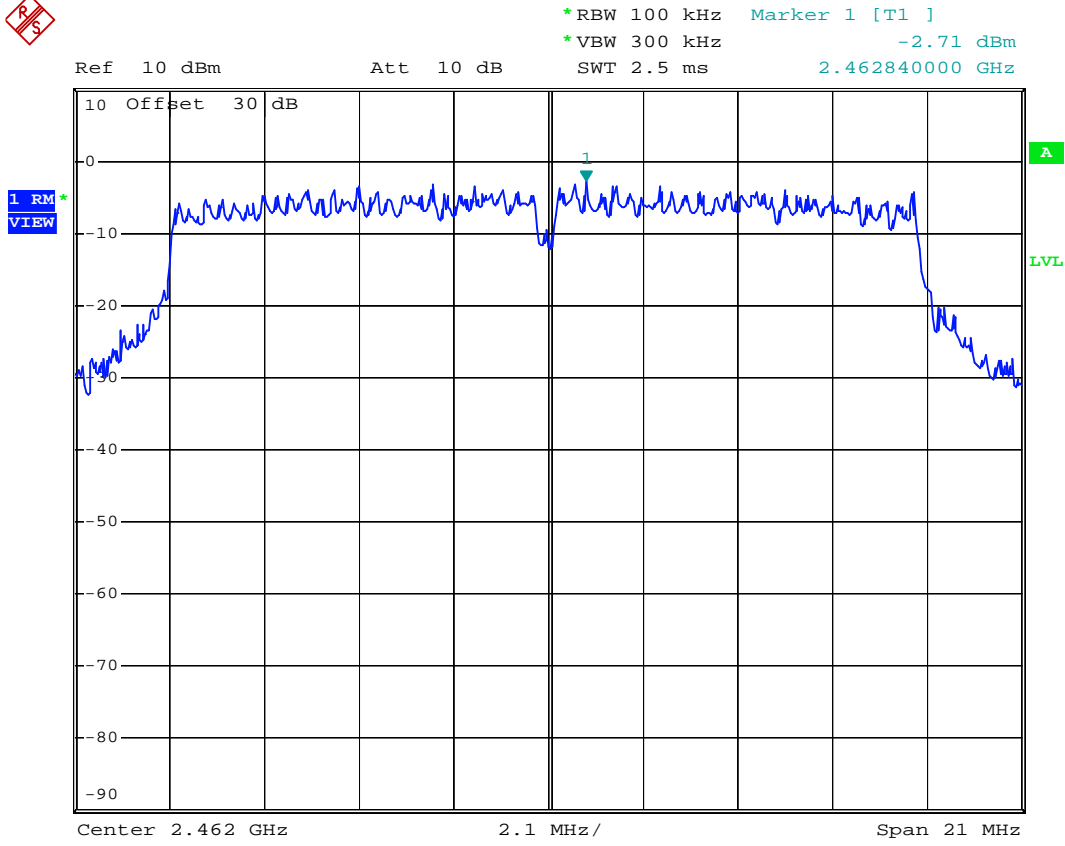

802.11n 20M




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -2.80 dBm
SWT 2.5 ms 2.410404000 GHz


Ref 10 dBm


Att 10 dB

SWT 2.5 ms

2.410404000 GHz

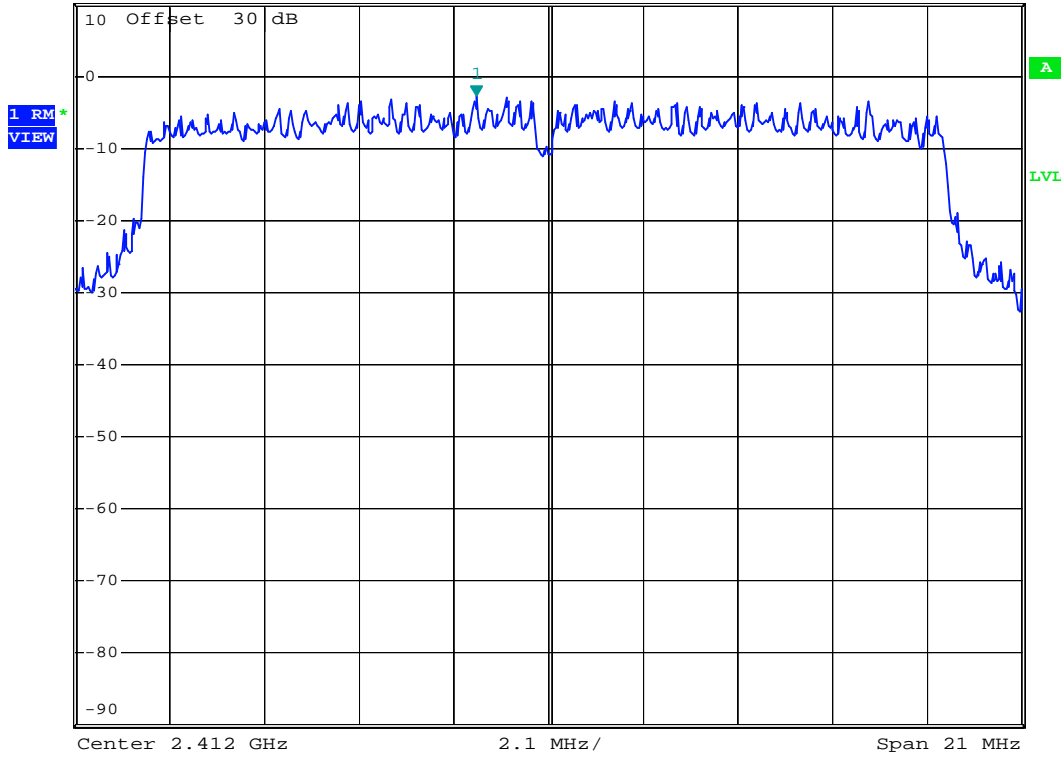

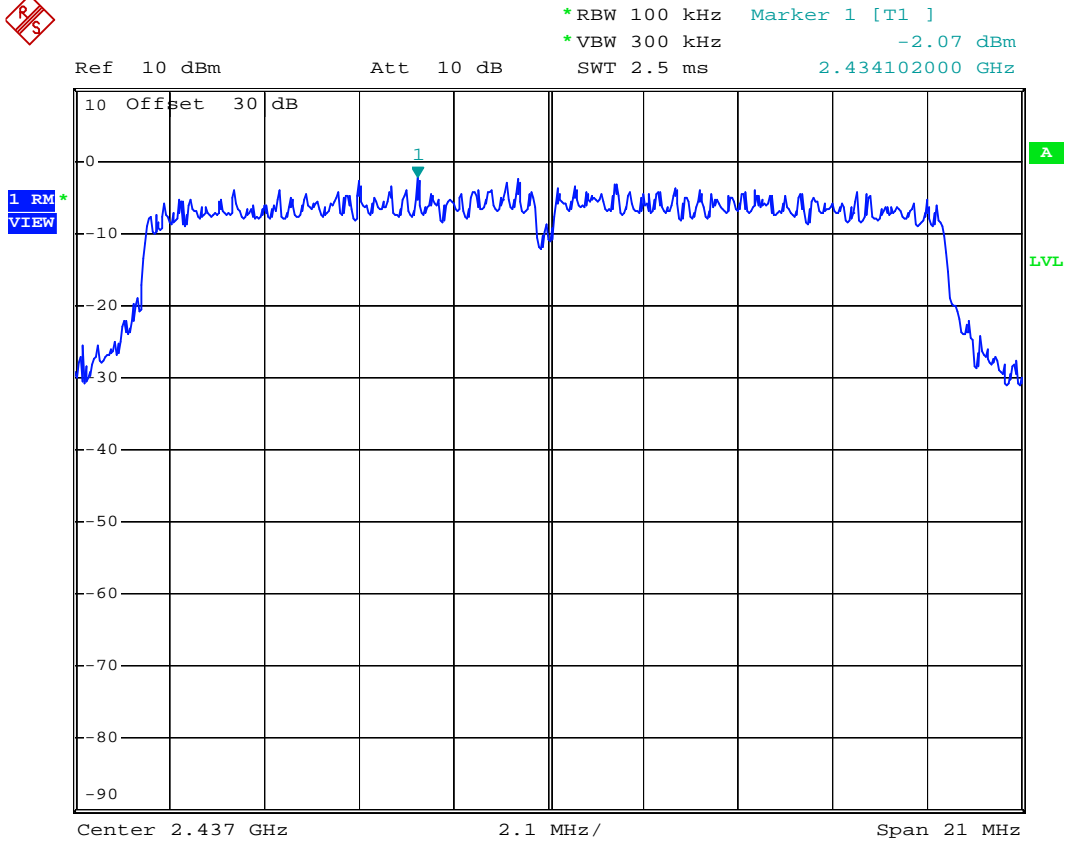

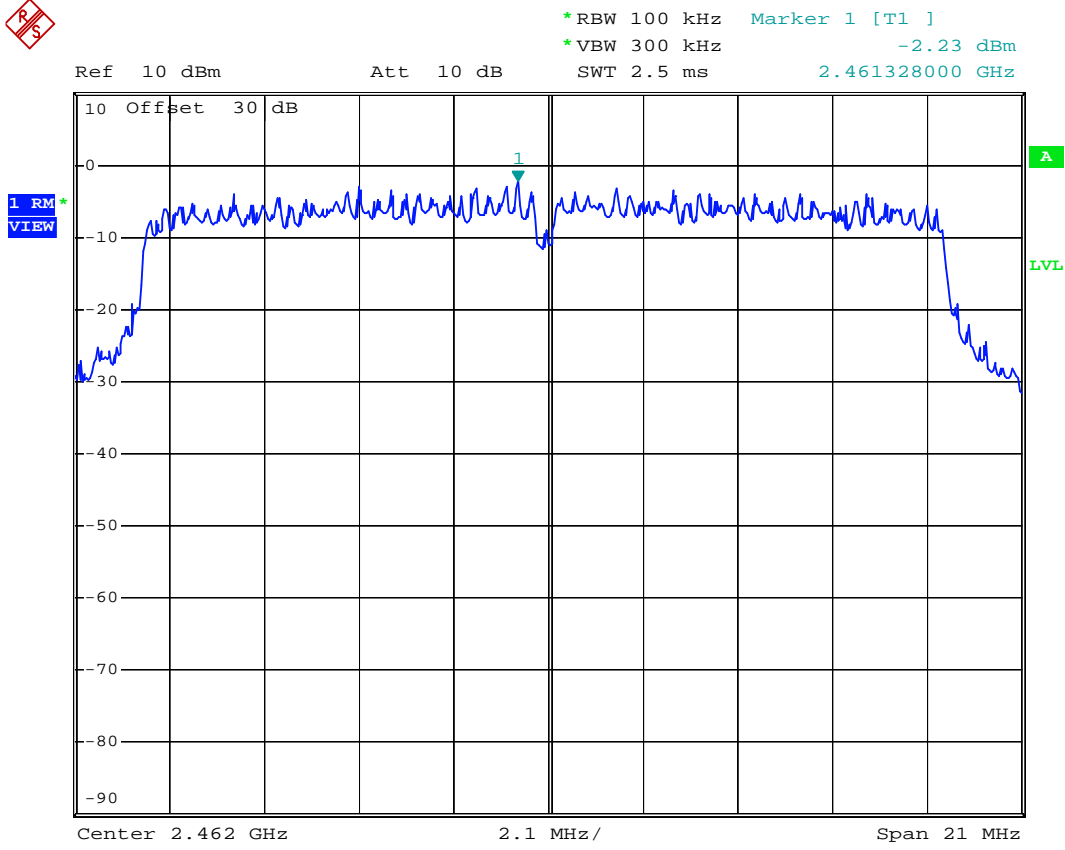

11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

11.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
 - RBW = 100 kHz
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold.
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2012/09/20	2013/09/20

11.4 Measurement Data

Test Date : Nov. 04, 2012 Temperature : 25 °C Humidity : 65 %

A 802.11b

Model : Channel Low

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Model : Channel Mid

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Model : Channel High

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.

Test Date : Nov. 04, 2012 Temperature : 25 °C Humidity : 65 %

B 802.11g

Model : Channel Low

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Model : Channel Mid

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Model : Channel High

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.

Test Date : Nov. 04, 2012 Temperature : 25 °C Humidity : 65 %

C 802.11n HT-20

Model : Channel Low

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Model : Channel Mid

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Model : Channel High

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.

802.11b





*RBW 100 kHz
*VBW 300 kHz
SWT 200 ms

Ref 10 dBm

*Att 10 dB

SWT 200 ms

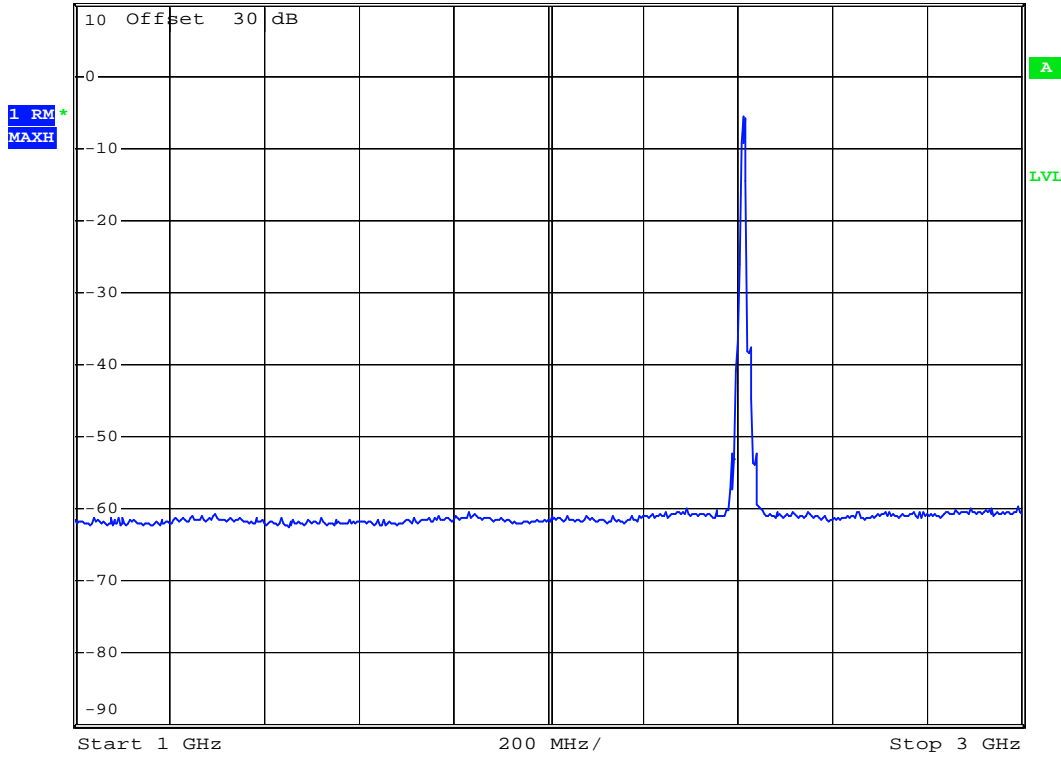

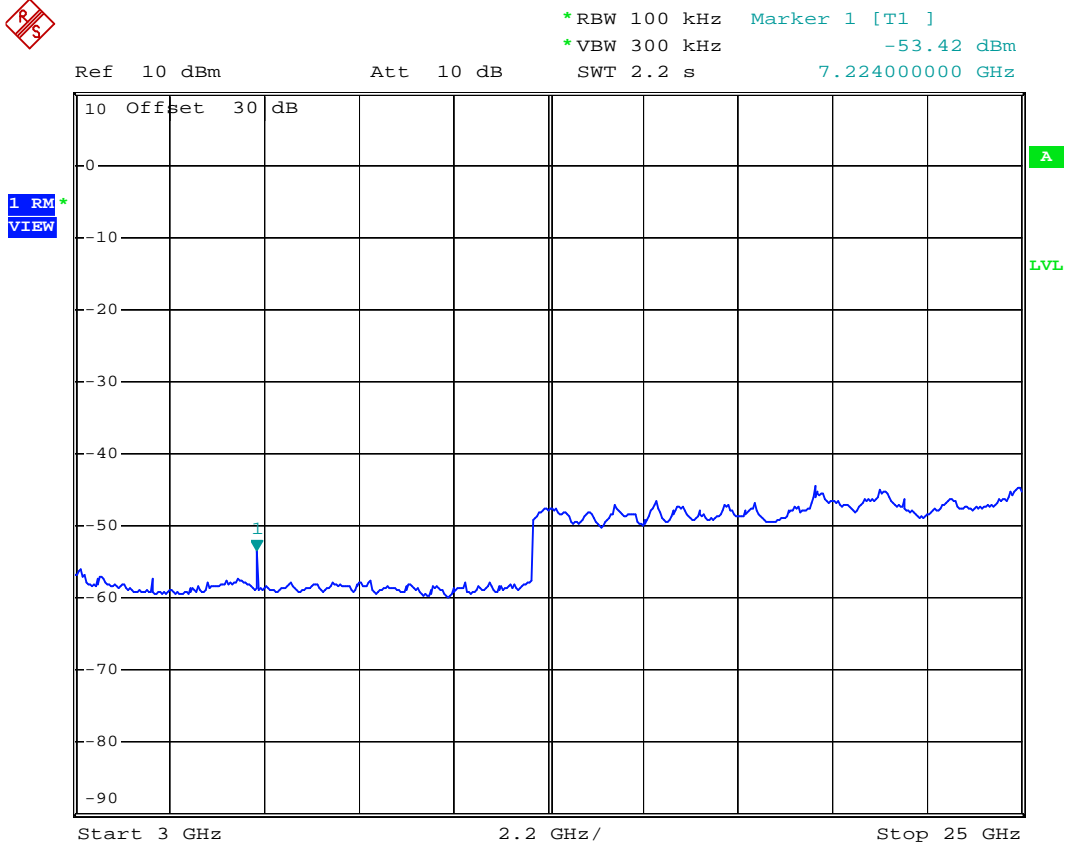

802.11g





*RBW 100 kHz
*VBW 300 kHz
SWT 200 ms

Ref 10 dBm

Att 10 dB

SWT 200 ms

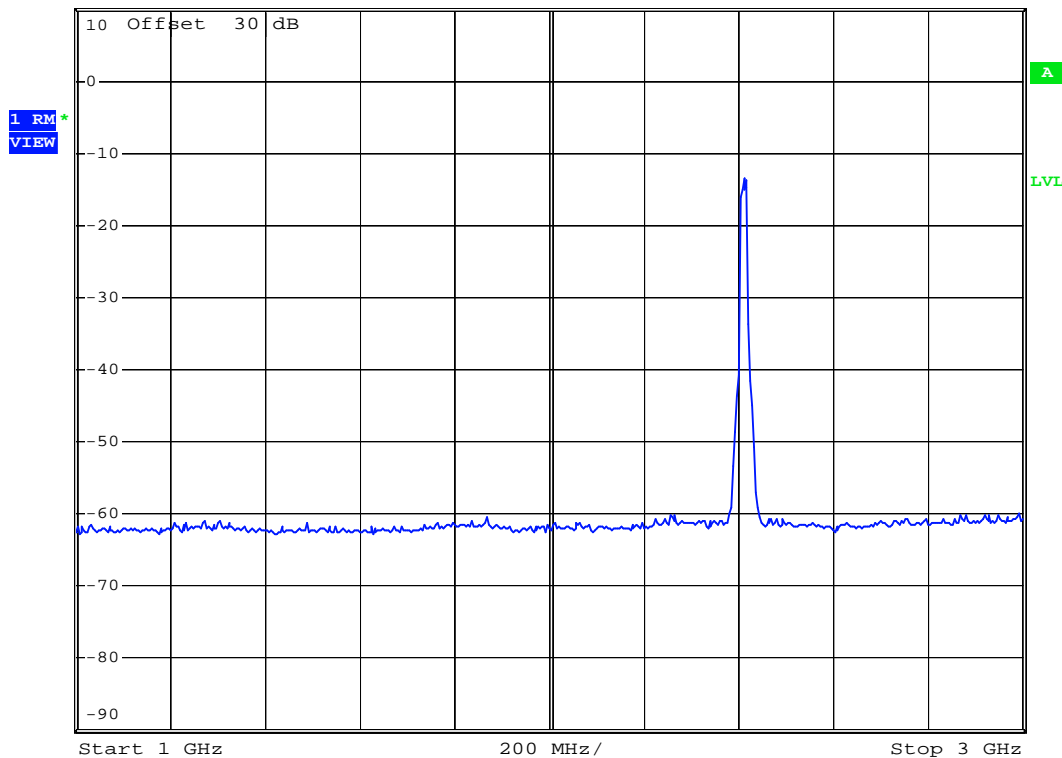

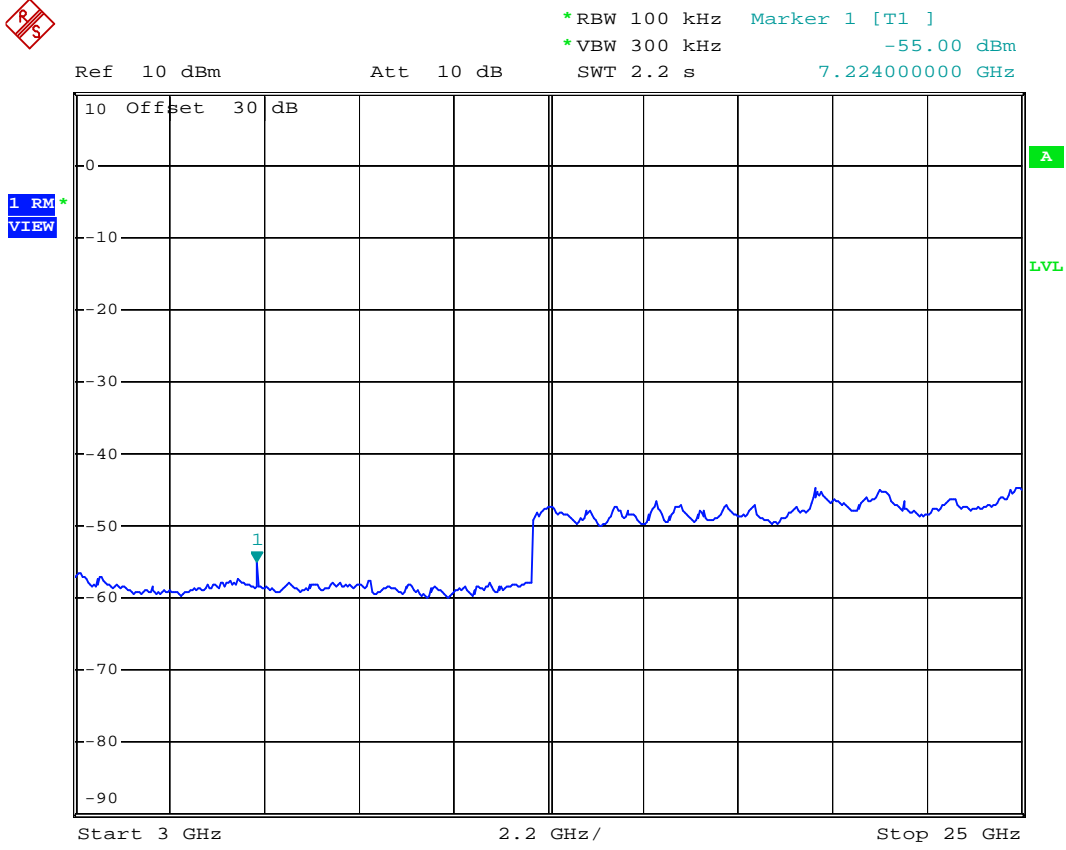

802.11n 20M



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -60.80 dBm
SWT 200 ms 3.000000000 GHz

Ref 10 dBm

Att 10 dB

1 RM*
VIEW

