

FCC Test Report

FCC ID : XNAHWA09
Equipment : SCANWATCH
Model No. : HWA09
Brand Name : Withings
Applicant : Withings SA
Address : 2 rue Maurice Hartmann
92130 Issy-Les-Moulineaux
France
Standard : 47 CFR FCC Part 15.247
Received Date : Jan. 22, 2020
Tested Date : Jan. 30 ~ Feb. 11, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	Test Equipment List and Calibration Data.....	9
1.5	Test Standards	10
1.6	Deviation from Test Standard and Measurement Procedure.....	10
1.7	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth	17
3.3	RF Output Power.....	21
3.4	Power Spectral Density	23
3.5	Emissions in Restricted Frequency Bands.....	27
3.6	Emissions in non-restricted Frequency Bands.....	53
4	TEST LABORATORY INFORMATION	56

Release Record

Report No.	Version	Description	Issued Date
FR9D2702AE	Rev. 01	Initial issue	Feb. 27, 2020
FR9D2702AE	Rev. 02	Updating Power Supply and Accessories information	Mar. 11, 2020

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]:1.032MHz 40.65 (Margin -15.35dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 456.18MHz 37.08 (Margin -8.92dB) - PK	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: -1.86	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

The EUT comes in two sizes with a black or white watch face.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.1 LE	2402-2480	0-39 [40]	1 Mbps
2400-2483.5	V5.1 LE	2402-2480	0-39 [40]	2 Mbps

Note 1: Bluetooth LE (Low energy) uses GFSK modulation.

1.1.2 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remarks
1	Monopole	No	0.5	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.8Vdc from Rechargeable li-ion battery 5Vdc from host
--------------------------	---

1.1.4 Test Sample Information

MAC Address	Radiated Emission #5 Large Watch (white): 0024E49EA104 #6 Small Watch (black): 0024E49EA1A7 #10 Small Watch (white): 0024E49EA0D1 #11 Large Watch (black): 0024E49EA249 AC Power Line Conducted Emission #5 Large Watch (white): 0024E49EA104 #6 Small Watch (black): 0024E49EA1A7 Antenna Port Conducted #14 Conducted :0024E49EA111
--------------------	--

1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	Rechargeable li-ion battery	Brand: Grepow Model: 302823 Rating: 3.8Vdc, 140mAh
2	USB Charger cable	Brand: Withings SA Model: ASM-808_L Rating : 5Vdc 500mA Serial number (manufacturing month/year) : 012020 1.05m non-shielded without core

1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.7 Test Tool and Duty Cycle

Test Tool	nRFgo Studio, version: 1.21.2.10		
Duty Cycle and Duty Factor	Modulation Mode	Duty Cycle (%)	Duty Factor (dB)
	GFSK/1Mbps	64.35%	1.91
	GFSK/2Mbps	34.10%	4.67



1.1.8 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
GFSK/1Mbps	Default	Default	Default
GFSK/2Mbps	Default	Default	Default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	DoC	---
2	Cellphone	Samsung	SM-A530F/DS	N/A	---
3	USB Jig	USB Jig	N/A	N/A	Provided by applicant
4	USB 5V Adapter	Samsung	ETA-U90JWs	---	---

1.3 Test Setup Chart

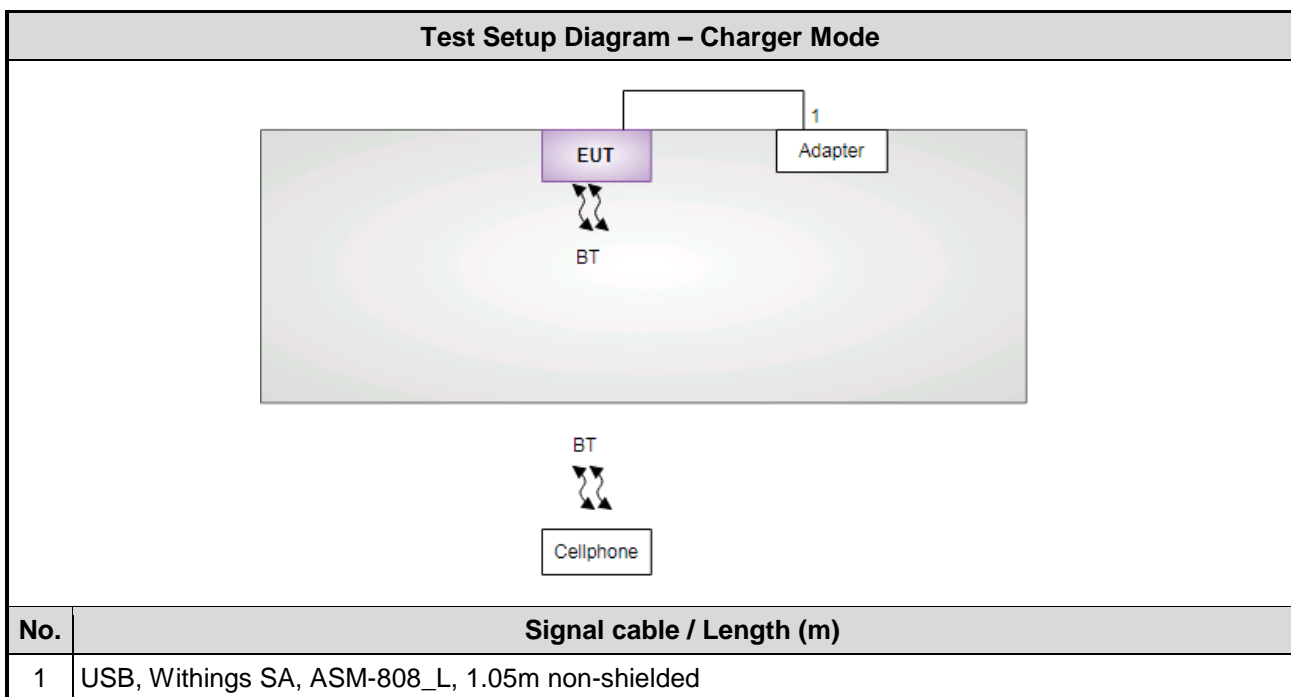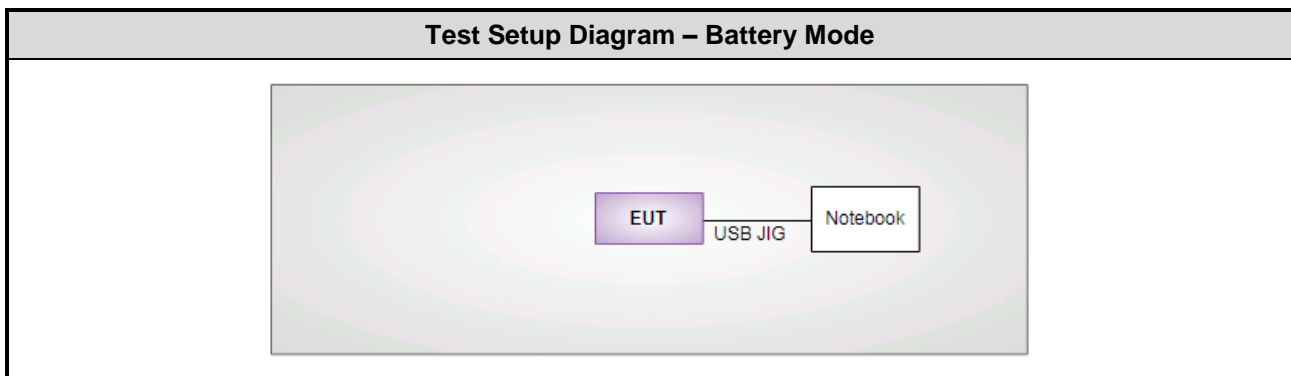

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Jan. 31, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	101579	Mar. 08, 2019	Mar. 07, 2020
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 1 / (03CH01-WS)				
Tested Date	Jan. 30 ~ Feb. 07, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF Cable	EMC	EMC104-SM-SM-8000	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Feb. 11, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020
Spectrum Analyzer	R&S	FSV40	101499	Jan. 09, 2020	Jan. 08, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.6 Deviation from Test Standard and Measurement Procedure

None

1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.41 dB
Radiated emission > 1 GHz	± 4.59 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 69%	Akun Chung
Radiated Emissions	03CH01-WS	18-21°C / 61-64%	Felix Sung Aska Huang
RF Conducted	TH01-WS	20°C / 64%	Roger Lu

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	Charging	---	---	3, 4
Radiated Emissions ≤ 1GHz	BT LE BT LE	2440 2402	1Mbps 2Mbps	1, 2
Radiated Emissions > 1GHz	BT LE BT LE	2402, 2440, 2480 2402, 2440, 2480	1Mbps 2Mbps	1, 2
Maximum Output Power 6dB bandwidth Power spectral density	BT LE BT LE	2402, 2440, 2480 2402, 2440, 2480	1Mbps 2Mbps	5

NOTE:

1. For Battery Mode: The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. For Charger Mode: The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.
3. The test configurations are listed as follows:
 - Configuration 1 : Battery mode _ #11Large Watch
 - Configuration 2 : Battery mode _ #10Small Watch
 - Configuration 3 : Charging mode _ Normal Link _#5Large Watch
 - Configuration 4 : Charging mode _ Normal Link_ #6Small Watch
 - Configuration 5 : #14Conducted

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

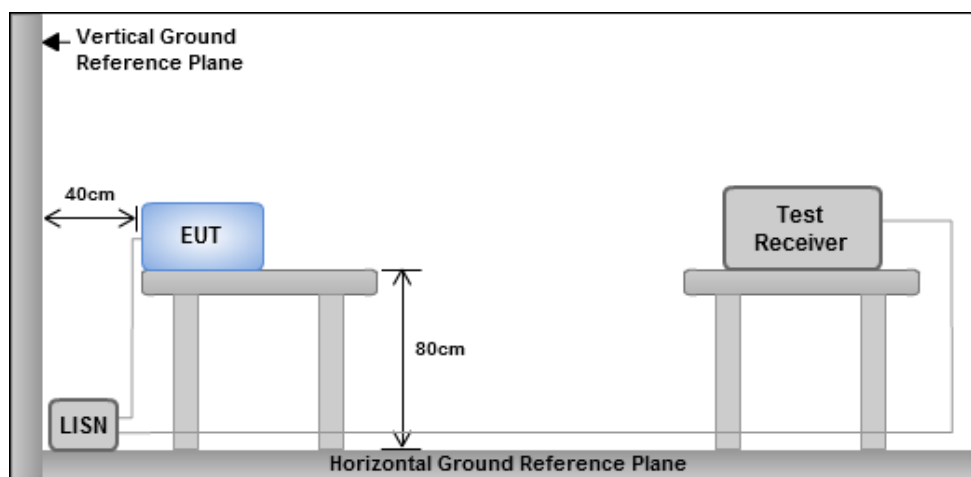

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.4 Test Result of Conducted Emissions

Configuration 3 : Charging mode _ Normal Link _#5Large Watch

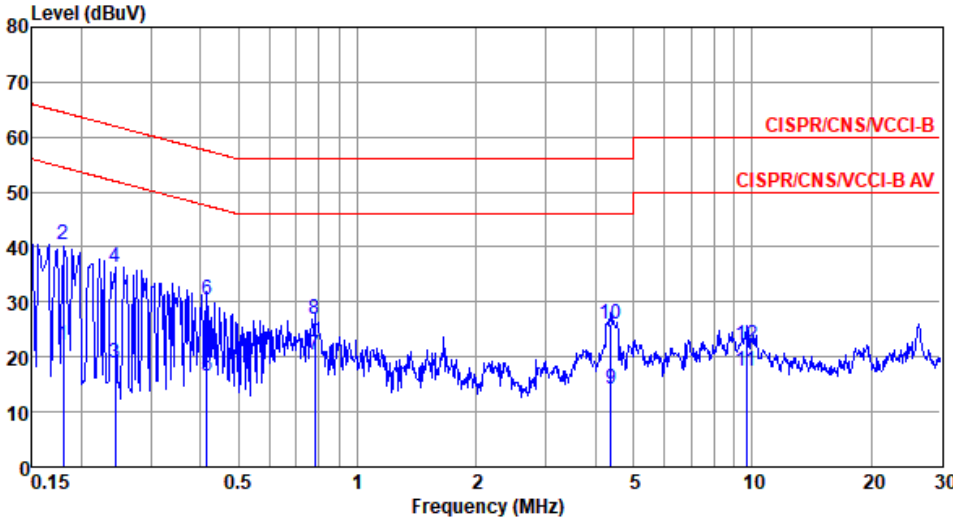Modulation Mode	BT LE-1Mbps	Test Freq. (MHz)	2440				
Power Phase	Line						
							
Level (dBuV)	Frequency (MHz)	Limit Line (dBuV)	Over Limit (dB)	Read Level (dBuV)	LISN factor (dB)	cable loss (dB)	Remark
1	0.180	54.50	-32.35	12.37	9.54	0.06	Average
2*	0.180	64.50	-24.05	30.67	9.54	0.06	QP
3	0.243	52.00	-33.25	8.92	9.55	0.07	Average
4	0.243	62.00	-25.67	26.50	9.55	0.07	QP
5	0.415	47.55	-31.01	6.64	9.57	0.08	Average
6	0.415	57.55	-27.03	20.62	9.57	0.08	QP
7	0.779	46.00	-25.58	10.42	9.59	0.11	Average
8	0.779	56.00	-29.11	16.89	9.59	0.11	QP
9	4.384	46.00	-31.89	3.83	9.61	0.30	Average
10	4.384	56.00	-30.01	15.71	9.61	0.30	QP
11	9.654	50.00	-32.46	7.10	9.65	0.39	Average
12	9.654	60.00	-37.95	11.61	9.65	0.39	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	BT LE-1Mbps	Test Freq. (MHz)	2440
Power Phase	Neutral		

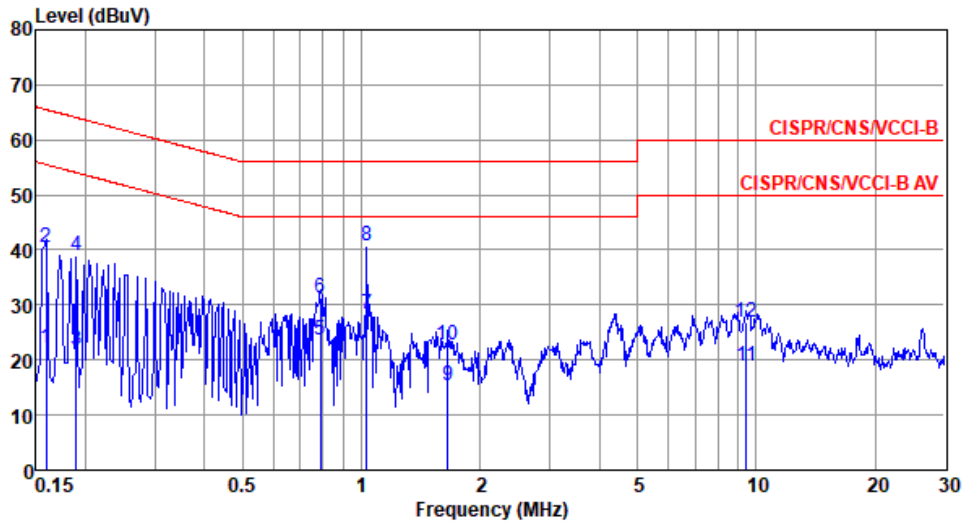


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.159	22.06	55.52	-33.46	12.31	9.57	0.05	Average
2	0.159	40.48	65.52	-25.04	30.73	9.57	0.05	QP
3	0.189	21.84	54.06	-32.22	12.06	9.58	0.06	Average
4	0.189	38.89	64.06	-25.17	29.11	9.58	0.06	QP
5	0.788	23.64	46.00	-22.36	13.71	9.63	0.11	Average
6	0.788	31.33	56.00	-24.67	21.40	9.63	0.11	QP
7	1.032	28.37	46.00	-17.63	18.41	9.64	0.12	Average
8*	1.032	40.65	56.00	-15.35	30.69	9.64	0.12	QP
9	1.654	15.25	46.00	-30.75	5.20	9.65	0.16	Average
10	1.654	22.75	56.00	-33.25	12.70	9.65	0.16	QP
11	9.451	18.84	50.00	-31.16	8.42	9.71	0.38	Average
12	9.451	27.01	60.00	-32.99	16.59	9.71	0.38	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Configuration 4 : Charging mode _ Normal Link_ #6Small Watch

Modulation Mode	BT LE-2Mbps	Test Freq. (MHz)	2402
Power Phase	Line		

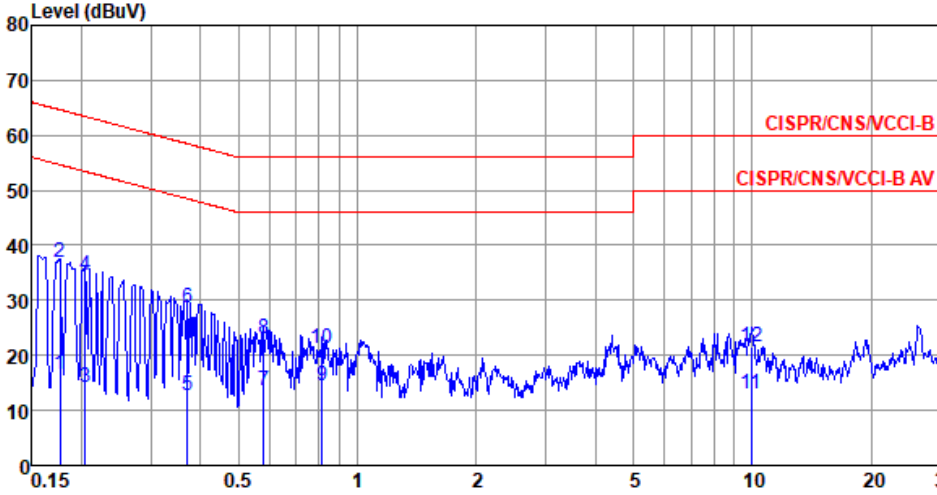


The plot shows the measured EMI level in dBuV versus frequency in MHz. Two red limit lines are shown: CISPR/CNS/VCCI-B (upper) and CISPR/CNS/VCCI-B AV (lower). The measured signal (blue) is mostly below these limits, with some peaks labeled 1 through 12. Peak 2* is the highest, at 0.177 MHz with a level of 36.78 dBuV.

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.177	16.39	54.64	-38.25	6.61	9.54	0.06	Average
2*	0.177	36.78	64.64	-27.86	27.00	9.54	0.06	QP
3	0.204	14.03	53.45	-39.42	4.24	9.54	0.06	Average
4	0.204	34.40	63.45	-29.05	24.61	9.54	0.06	QP
5	0.371	12.55	48.47	-35.92	2.66	9.57	0.08	Average
6	0.371	28.77	58.47	-29.70	18.88	9.57	0.08	QP
7	0.579	13.63	46.00	-32.37	3.67	9.58	0.10	Average
8	0.579	23.08	56.00	-32.92	13.12	9.58	0.10	QP
9	0.813	14.56	46.00	-31.44	4.56	9.59	0.11	Average
10	0.813	21.26	56.00	-34.74	11.26	9.59	0.11	QP
11	9.966	13.02	50.00	-36.98	2.58	9.65	0.39	Average
12	9.966	21.41	60.00	-38.59	10.97	9.65	0.39	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	BT LE-2Mbps	Test Freq. (MHz)	2402
Power Phase	Neutral		

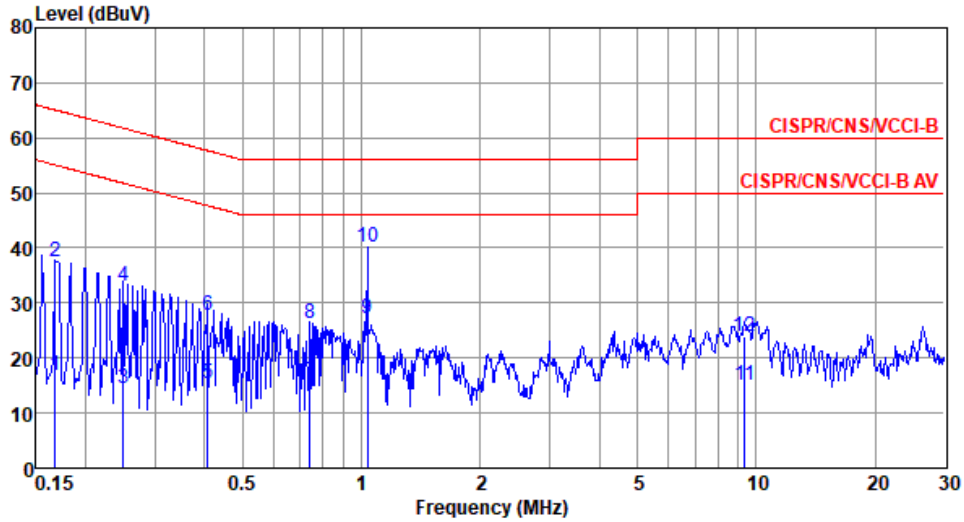

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.168	16.97	55.08	-38.11	7.22	9.57	0.05	Average
2	0.168	37.45	65.08	-27.63	27.70	9.57	0.05	QP
3	0.249	14.34	51.78	-37.44	4.52	9.59	0.07	Average
4	0.249	33.07	61.78	-28.71	23.25	9.59	0.07	QP
5	0.408	15.45	47.68	-32.23	5.59	9.61	0.08	Average
6	0.408	27.71	57.68	-29.97	17.85	9.61	0.08	QP
7	0.739	15.68	46.00	-30.32	5.75	9.63	0.11	Average
8	0.739	26.19	56.00	-29.81	16.26	9.63	0.11	QP
9	1.037	27.20	46.00	-18.80	17.24	9.64	0.12	Average
10*	1.037	40.24	56.00	-15.76	30.28	9.64	0.12	QP
11	9.352	15.09	50.00	-34.91	4.67	9.71	0.38	Average
12	9.352	23.83	60.00	-36.17	13.41	9.71	0.38	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup



3.2.4 Test Result of 6dB and Occupied Bandwidth

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	688.406k	1.046M	1M05F1D	681.159k	1.038M
BT-LE(2Mbps)	1.116M	2.041M	2M04F1D	1.08M	2.026M


Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;


Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	688.406k	1.038M
2440MHz	Pass	500k	684.783k	1.042M
2480MHz	Pass	500k	681.159k	1.046M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.116M	2.033M
2440MHz	Pass	500k	1.08M	2.026M
2480MHz	Pass	500k	1.109M	2.041M

Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

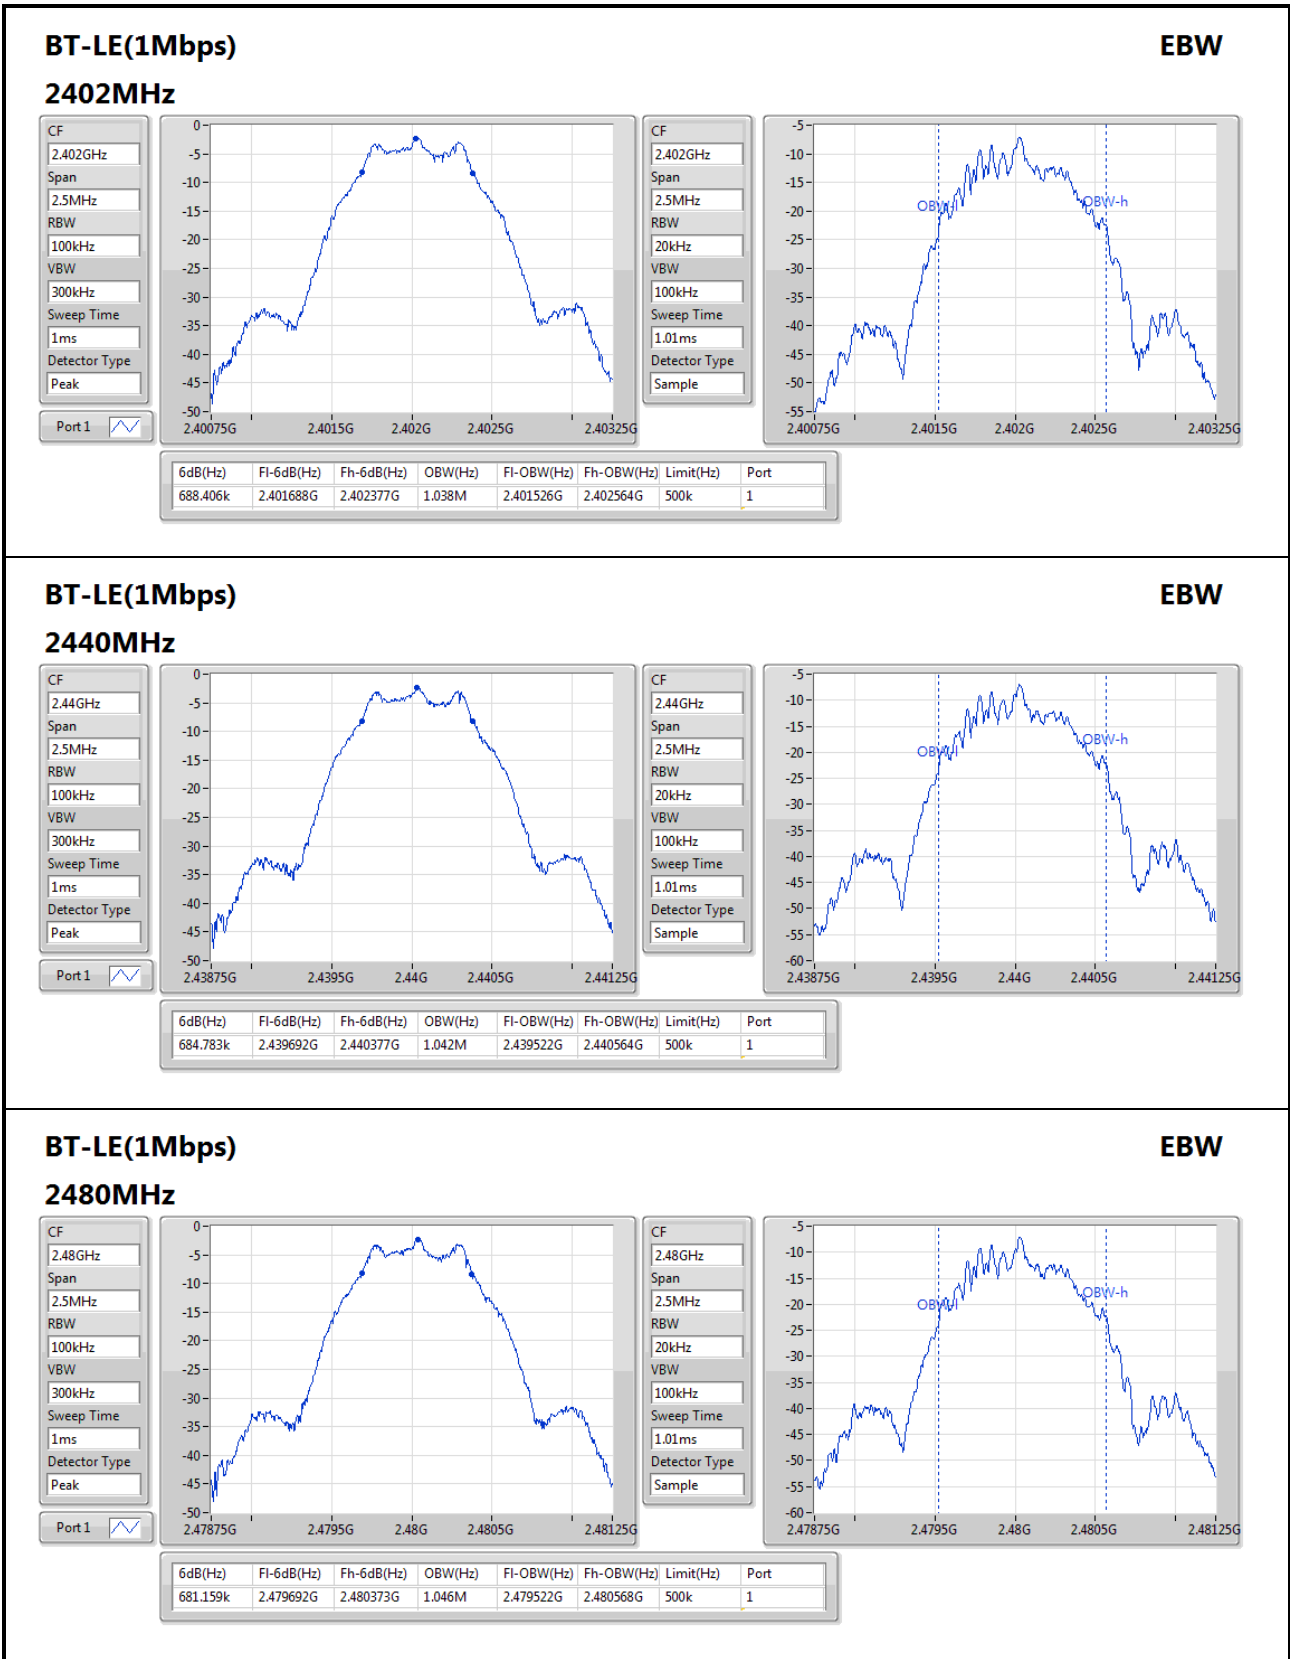

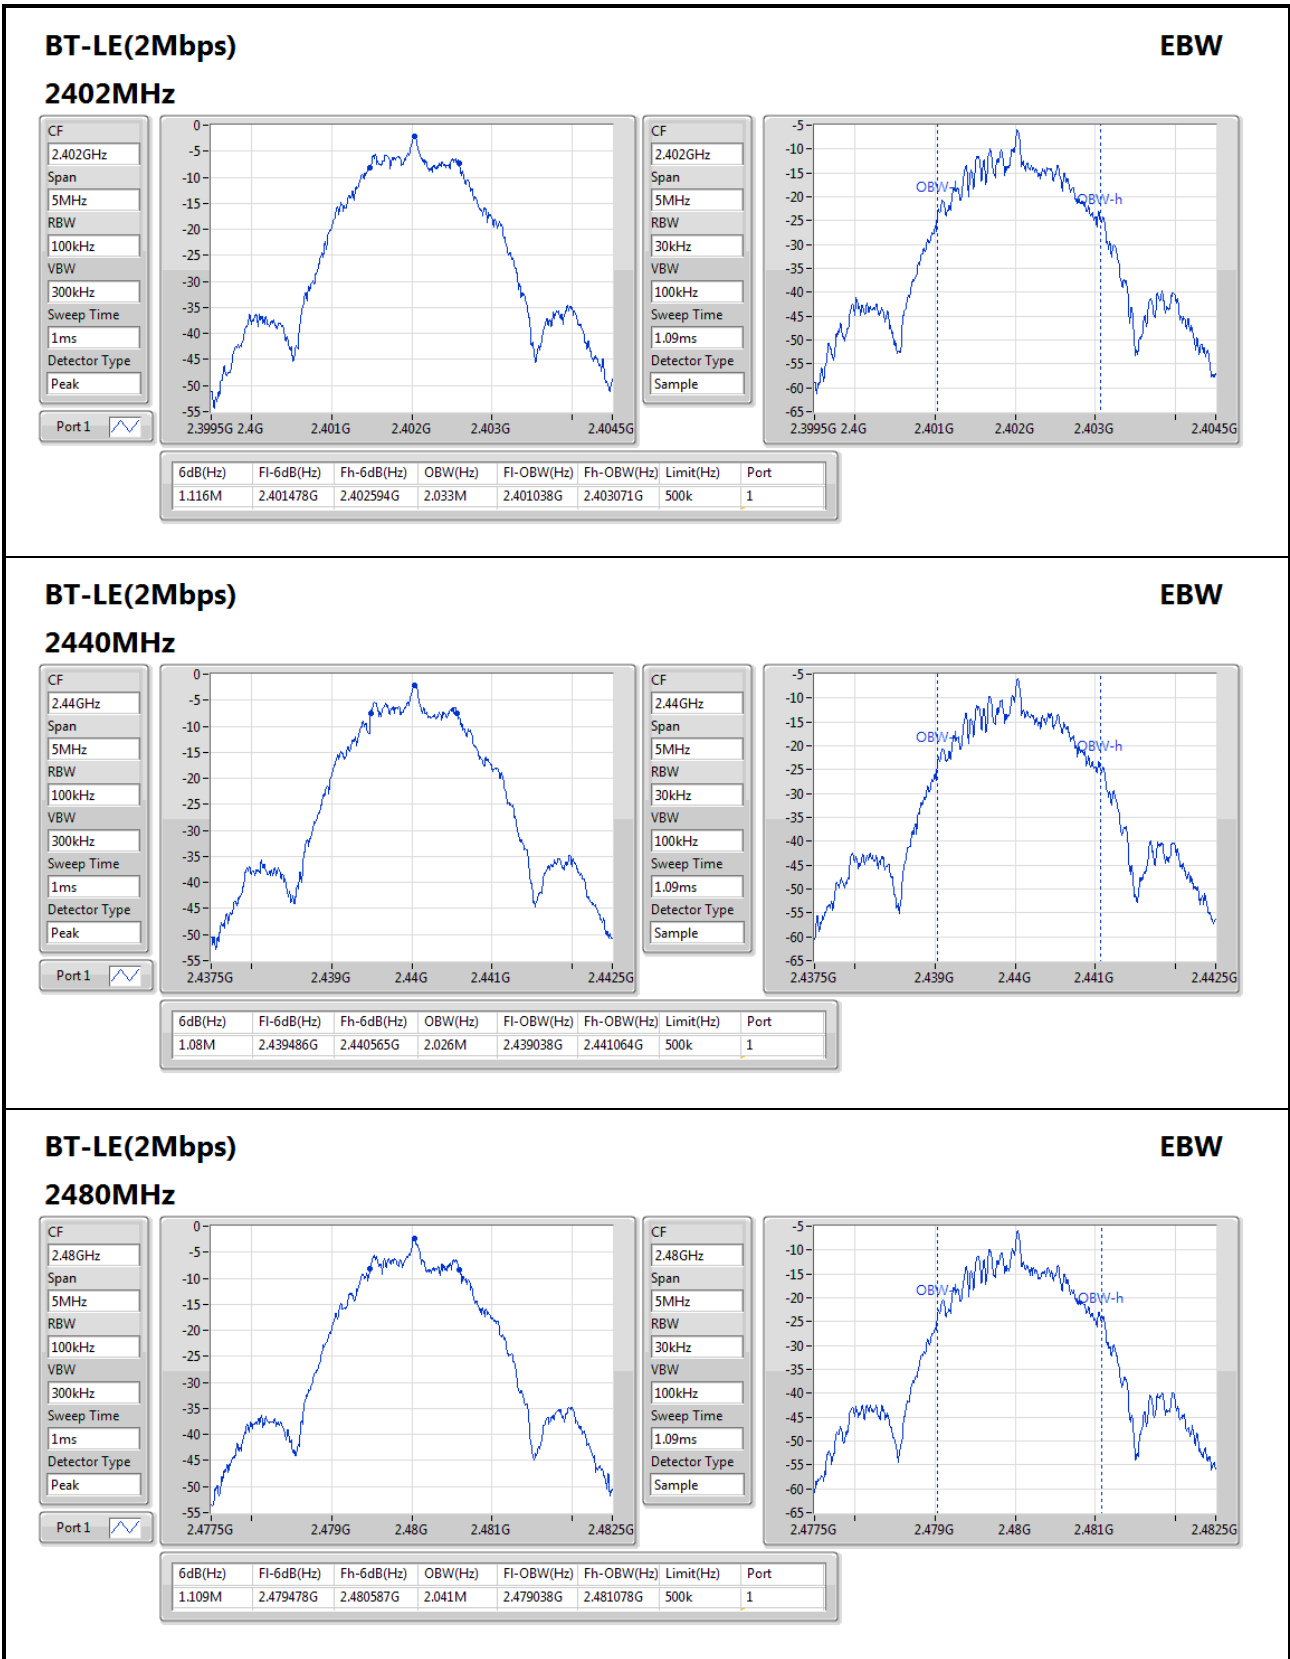

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1 Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Peak Power Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	-1.86	0.00065
BT-LE(2Mbps)	-1.92	0.00064

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	0.50	-1.91	30.00
2440MHz	Pass	0.50	-1.86	30.00
2480MHz	Pass	0.50	-1.97	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	0.50	-1.92	30.00
2440MHz	Pass	0.50	-1.94	30.00
2480MHz	Pass	0.50	-2.02	30.00

Average Power Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	-2.05	0.00062
BT-LE(2Mbps)	-2.08	0.00062

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	0.50	-2.08	-
2440MHz	Pass	0.50	-2.05	-
2480MHz	Pass	0.50	-2.13	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	0.50	-2.08	-
2440MHz	Pass	0.50	-2.14	-
2480MHz	Pass	0.50	-2.21	-

Note: Average power is for reference only.

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




3.4.4 Test Result of Power Spectral Density


Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-17.37
BT-LE(2Mbps)	-20.01

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	0.50	-17.54	8.00
2440MHz	Pass	0.50	-17.37	8.00
2480MHz	Pass	0.50	-17.59	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	0.50	-20.01	8.00
2440MHz	Pass	0.50	-20.03	8.00
2480MHz	Pass	0.50	-20.33	8.00

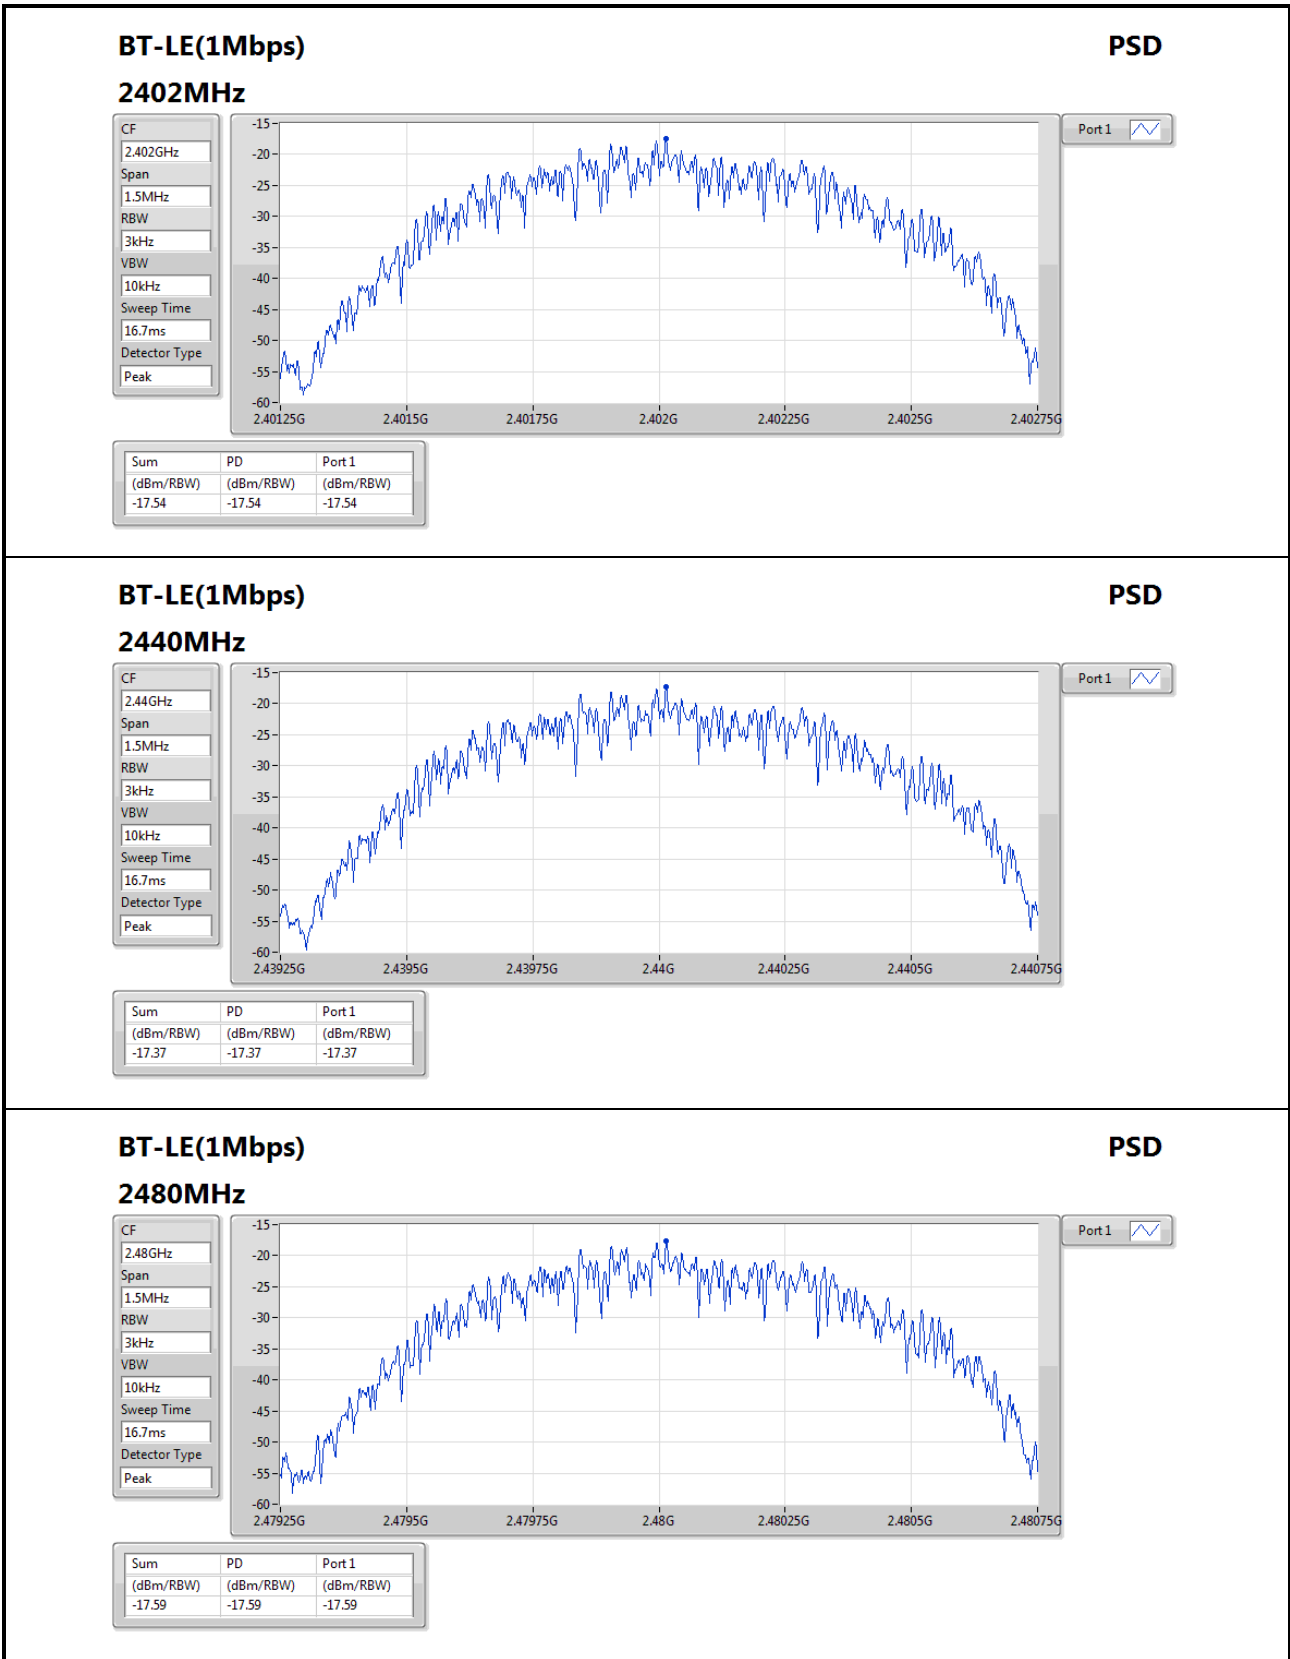

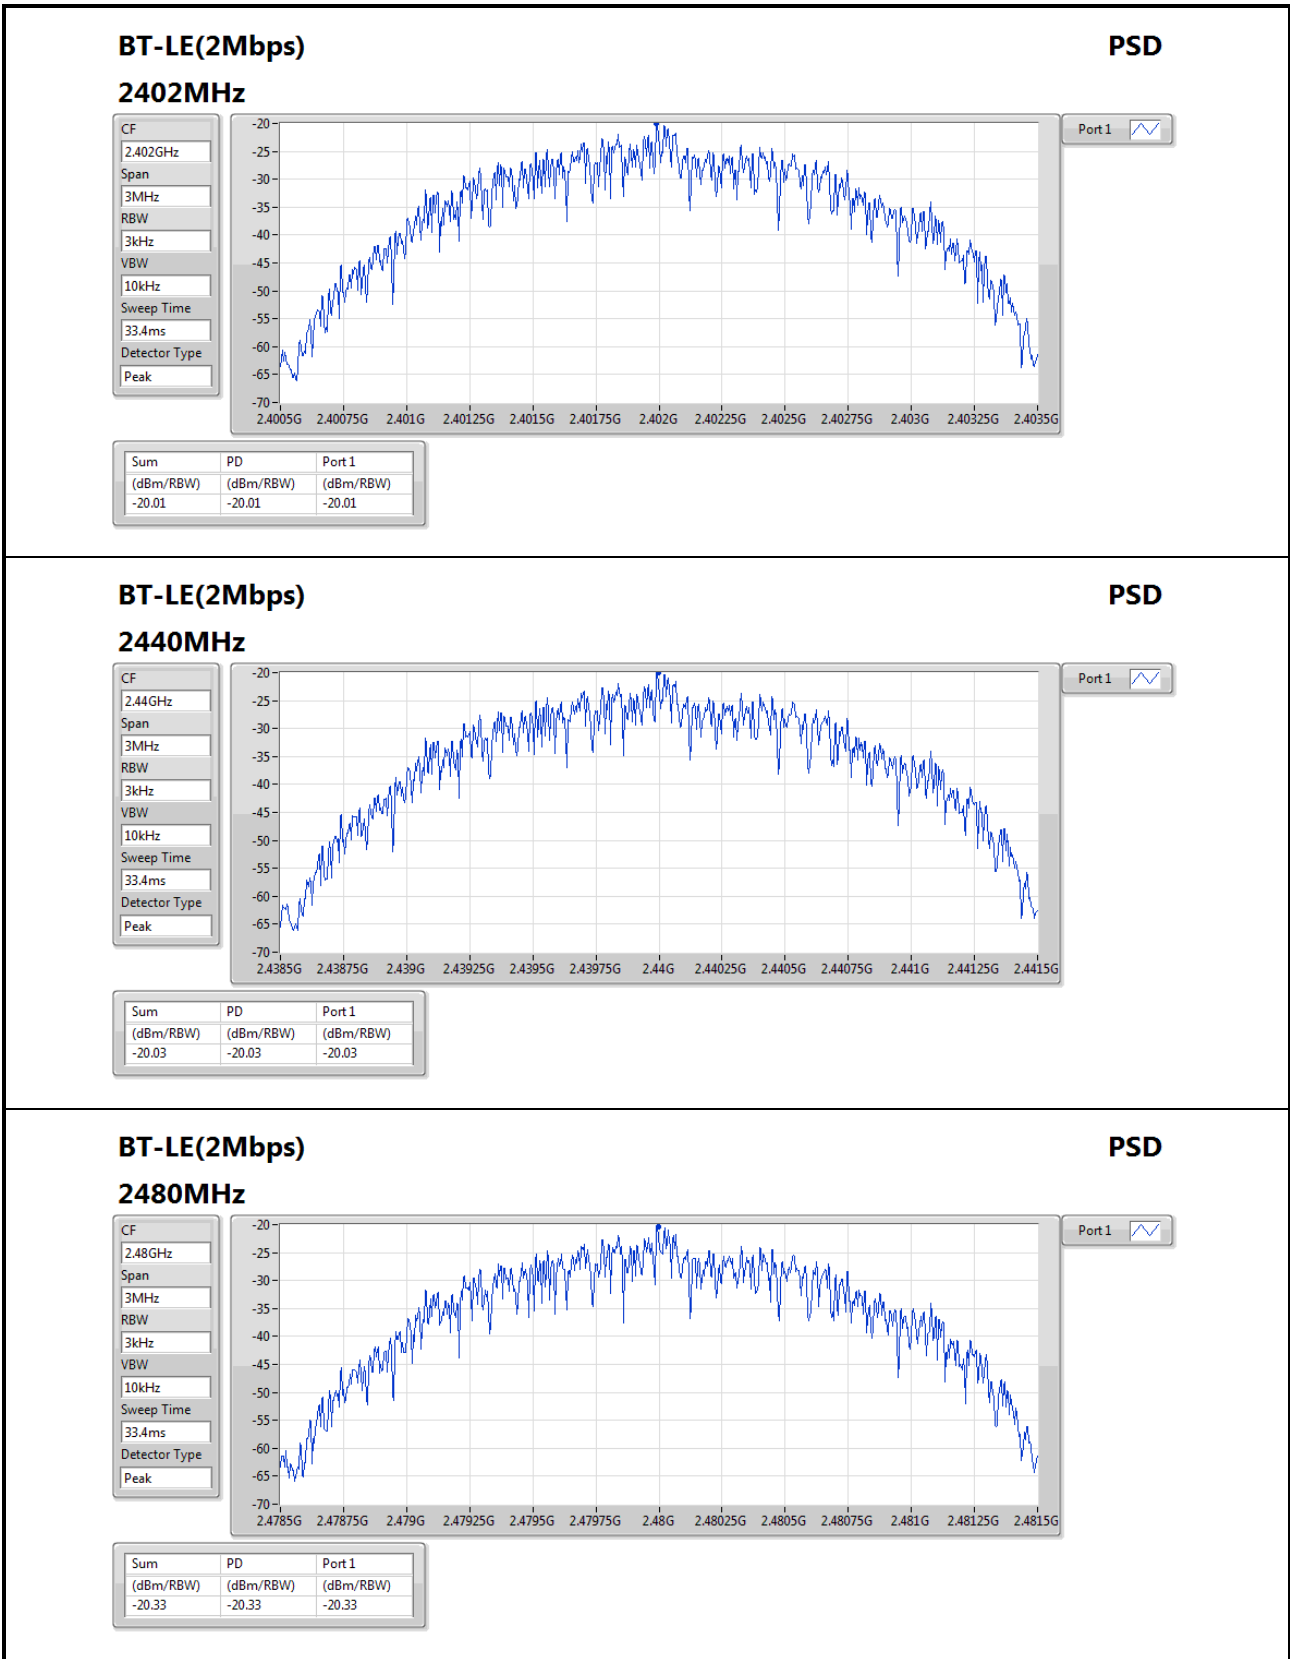

3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

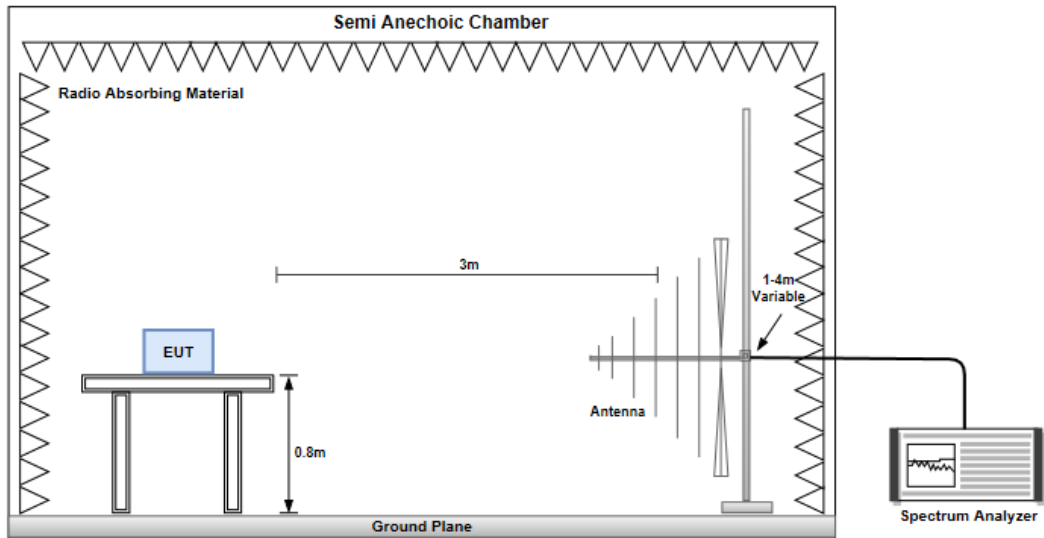


Radiated Emissions above 1 GHz

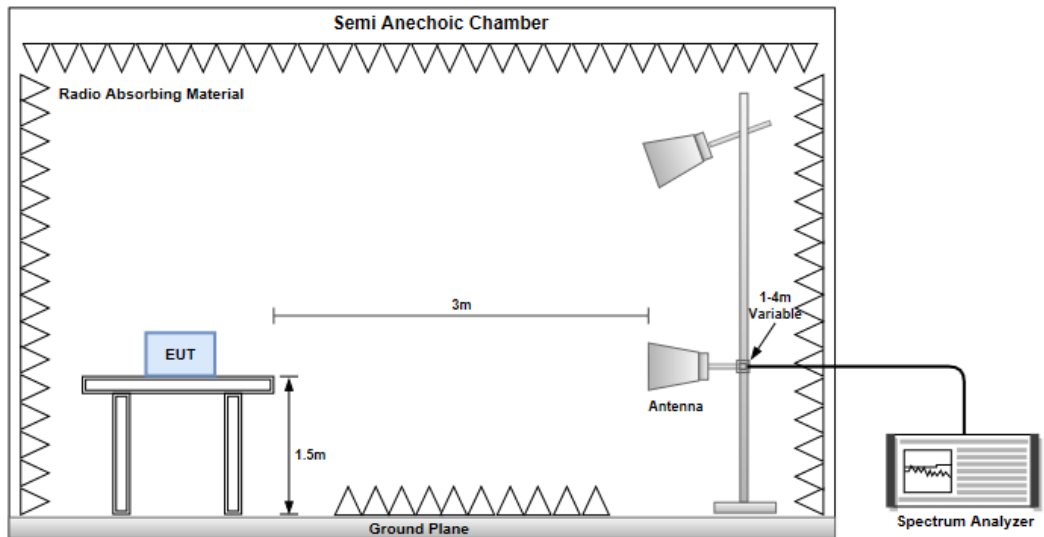


Configuration 1 : Battery mode _ #11Large Watch

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

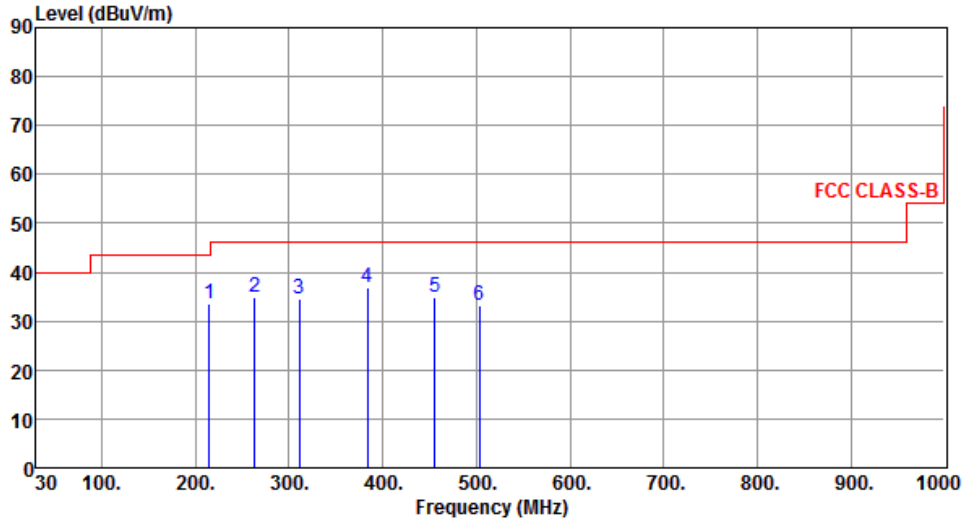Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440																																																															
Polarization	Horizontal																																																																	
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 200 MHz, and 50 dBuV/m from 200 to 1000 MHz. Six blue vertical lines indicate emission peaks labeled 1 through 6, with their respective frequencies and levels marked in the table below.</p>																																																																		
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>215.27</td> <td>33.48</td> <td>43.50</td> <td>-10.02</td> <td>45.52</td> <td>-12.04</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>263.77</td> <td>34.76</td> <td>46.00</td> <td>-11.24</td> <td>44.14</td> <td>-9.38</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>311.30</td> <td>34.42</td> <td>46.00</td> <td>-11.58</td> <td>42.11</td> <td>-7.69</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>384.05</td> <td>36.85</td> <td>46.00</td> <td>-9.15</td> <td>42.70</td> <td>-5.85</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>455.83</td> <td>35.00</td> <td>46.00</td> <td>-11.00</td> <td>38.96</td> <td>-3.96</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>503.36</td> <td>33.29</td> <td>46.00</td> <td>-12.71</td> <td>36.29</td> <td>-3.00</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	215.27	33.48	43.50	-10.02	45.52	-12.04	Peak	---	2	263.77	34.76	46.00	-11.24	44.14	-9.38	Peak	---	3	311.30	34.42	46.00	-11.58	42.11	-7.69	Peak	---	4	384.05	36.85	46.00	-9.15	42.70	-5.85	Peak	---	5	455.83	35.00	46.00	-11.00	38.96	-3.96	Peak	---	6	503.36	33.29	46.00	-12.71	36.29	-3.00	Peak	---		
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																										
1	215.27	33.48	43.50	-10.02	45.52	-12.04	Peak	---																																																										
2	263.77	34.76	46.00	-11.24	44.14	-9.38	Peak	---																																																										
3	311.30	34.42	46.00	-11.58	42.11	-7.69	Peak	---																																																										
4	384.05	36.85	46.00	-9.15	42.70	-5.85	Peak	---																																																										
5	455.83	35.00	46.00	-11.00	38.96	-3.96	Peak	---																																																										
6	503.36	33.29	46.00	-12.71	36.29	-3.00	Peak	---																																																										
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																		

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		

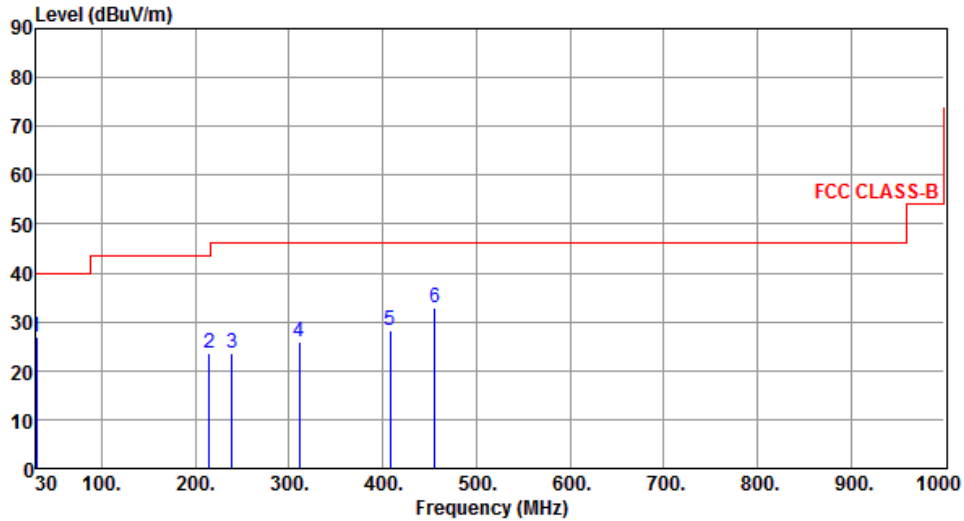

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.00	26.95	40.00	-13.05	36.66	-9.71	Peak	---	---
2	215.27	23.43	43.50	-20.07	35.47	-12.04	Peak	---	---
3	239.52	23.49	46.00	-22.51	33.74	-10.25	Peak	---	---
4	311.30	25.81	46.00	-20.19	33.50	-7.69	Peak	---	---
5	408.30	28.35	46.00	-17.65	33.71	-5.36	Peak	---	---
6	455.83	32.77	46.00	-13.23	36.73	-3.96	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

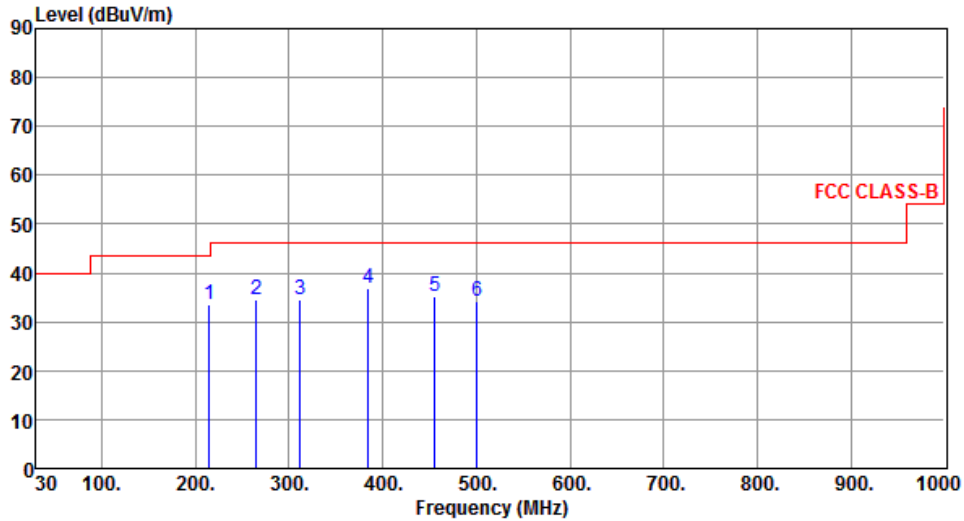

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	215.20	33.52	43.50	-9.98	45.57	-12.05	Peak	---	---
2	264.67	34.43	46.00	-11.57	43.76	-9.33	Peak	---	---
3	312.21	34.55	46.00	-11.45	42.19	-7.64	Peak	---	---
4	384.56	36.74	46.00	-9.26	42.57	-5.83	Peak	---	---
5	455.63	35.17	46.00	-10.83	39.14	-3.97	Peak	---	---
6	500.96	34.18	46.00	-11.82	37.27	-3.09	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

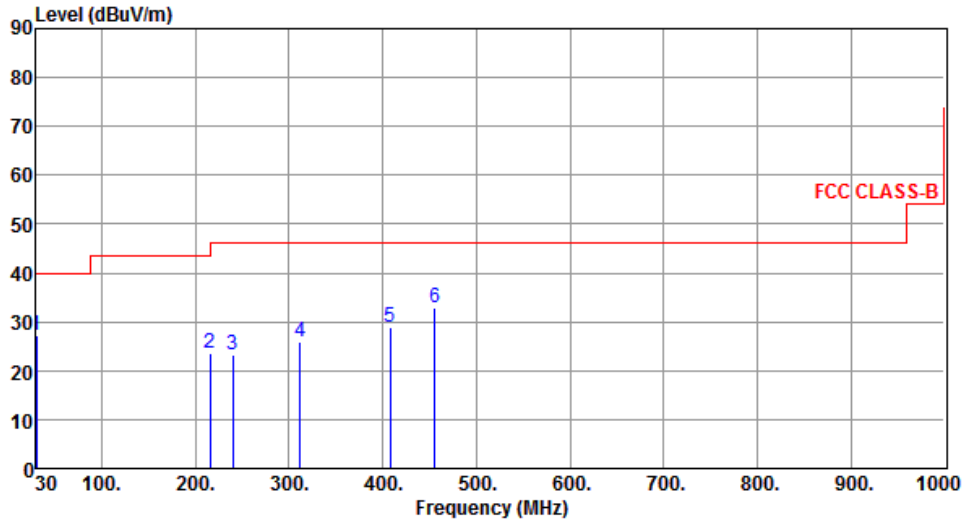

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.31	27.14	40.00	-12.86	36.82	-9.68	Peak	---	---
2	216.11	23.59	46.00	-22.41	35.61	-12.02	Peak	---	---
3	240.03	23.25	46.00	-22.75	33.44	-10.19	Peak	---	---
4	311.48	25.88	46.00	-20.12	33.56	-7.68	Peak	---	---
5	407.95	28.86	46.00	-17.14	34.23	-5.37	Peak	---	---
6	455.87	32.82	46.00	-13.18	36.78	-3.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Configuration 2 : Battery mode _ #10Small Watch

3.5.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

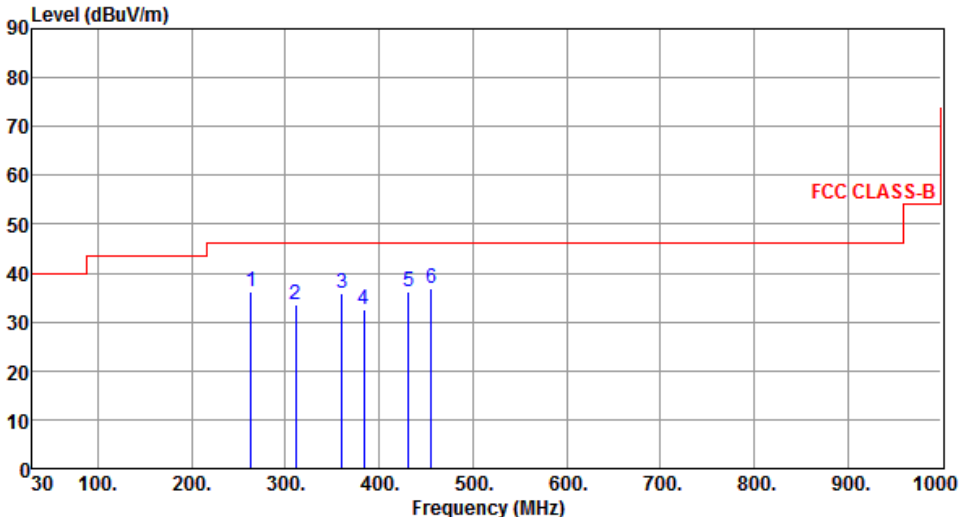Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB			
1	263.77	36.30	46.00	-9.70	45.68	-9.38	Peak	---	---
2	311.30	33.66	46.00	-12.34	41.35	-7.69	Peak	---	---
3	360.77	35.98	46.00	-10.02	42.56	-6.58	Peak	---	---
4	384.05	32.64	46.00	-13.36	38.49	-5.85	Peak	---	---
5	431.58	36.30	46.00	-9.70	40.89	-4.59	Peak	---	---
6	455.83	36.96	46.00	-9.04	40.92	-3.96	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>									

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		

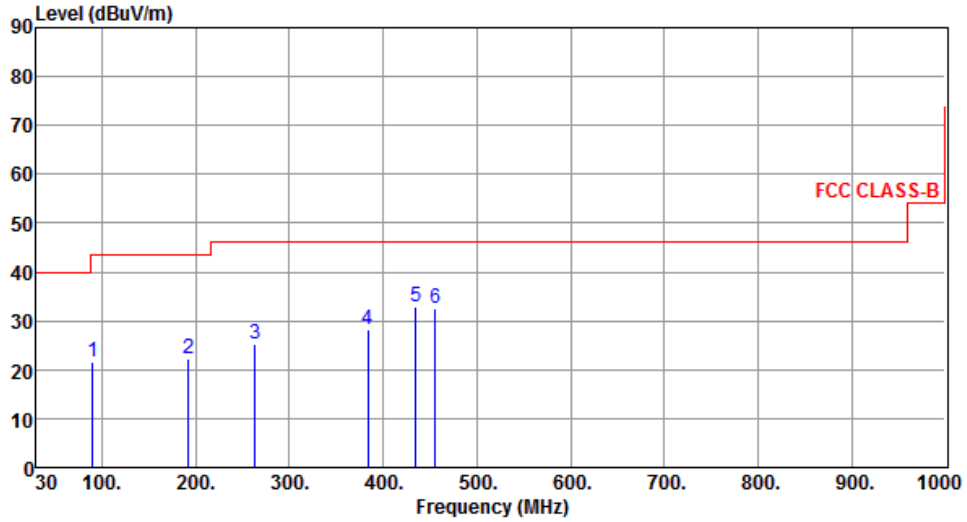

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	90.14	21.57	43.50	-21.93	35.84	-14.27	Peak	---	---
2	191.99	22.22	43.50	-21.28	33.60	-11.38	Peak	---	---
3	263.77	25.14	46.00	-20.86	34.52	-9.38	Peak	---	---
4	384.05	28.10	46.00	-17.90	33.95	-5.85	Peak	---	---
5	434.49	32.89	46.00	-13.11	37.35	-4.46	Peak	---	---
6	455.83	32.64	46.00	-13.36	36.60	-3.96	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

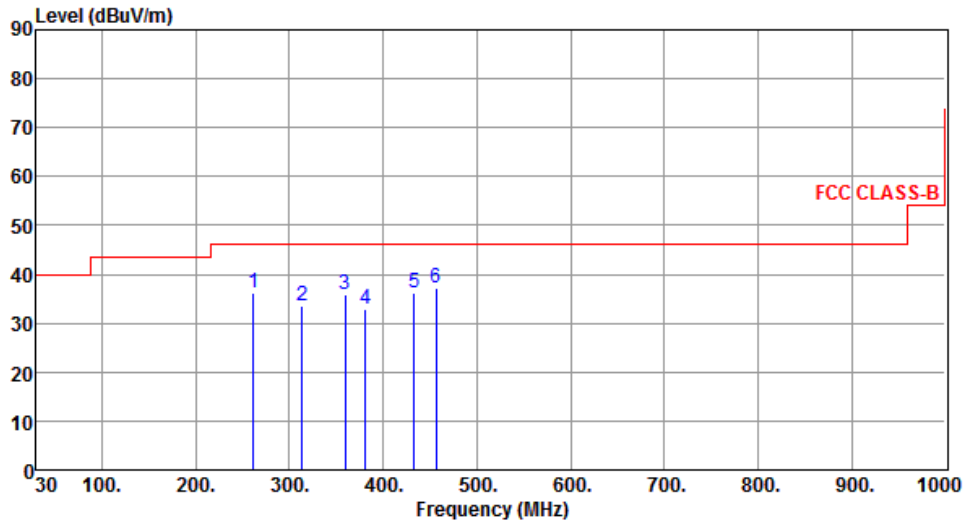

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	261.84	36.22	46.00	-9.78	45.72	-9.50	Peak	---	---
2	313.20	33.55	46.00	-12.45	41.15	-7.60	Peak	---	---
3	359.66	35.82	46.00	-10.18	42.45	-6.63	Peak	---	---
4	380.94	32.79	46.00	-13.21	38.71	-5.92	Peak	---	---
5	433.25	36.12	46.00	-9.88	40.64	-4.52	Peak	---	---
6	456.18	37.08	46.00	-8.92	41.04	-3.96	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

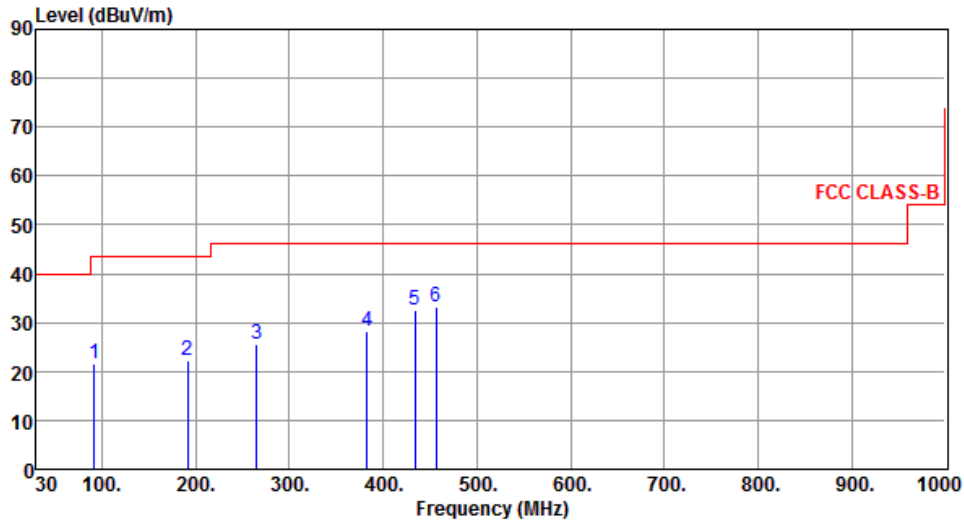

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	91.66	21.58	43.50	-21.92	35.73	-14.15	Peak	---	---
2	191.84	22.29	43.50	-21.21	33.67	-11.38	Peak	---	---
3	264.75	25.66	46.00	-20.34	34.98	-9.32	Peak	---	---
4	383.05	28.31	46.00	-17.69	34.18	-5.87	Peak	---	---
5	434.38	32.61	46.00	-13.39	37.07	-4.46	Peak	---	---
6	456.76	33.10	46.00	-12.90	37.04	-3.94	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz)

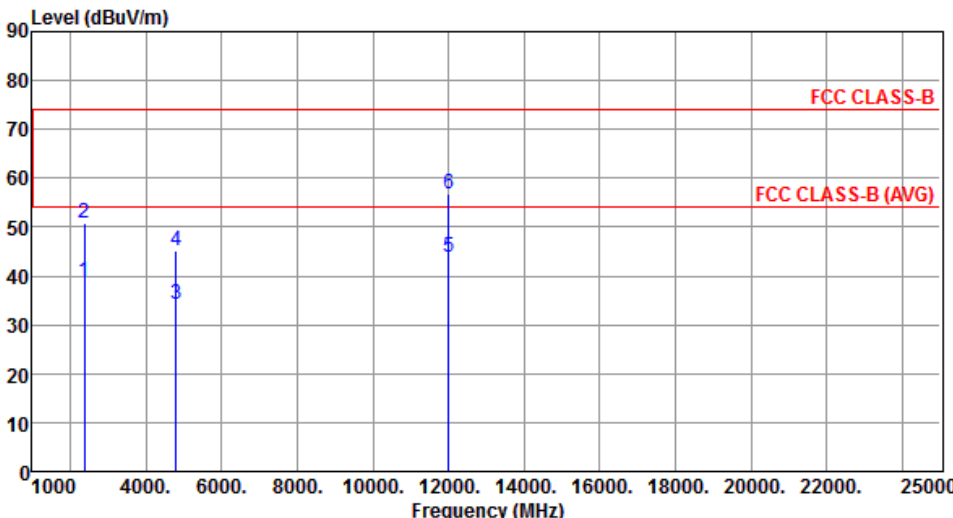Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402																																																																					
Polarization	Horizontal																																																																							
 <table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBUV/m</th> <th>Limit dBUV/m</th> <th>Margin dB</th> <th>SA reading dBUV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>2390.00</td> <td>38.95</td> <td>54.00</td> <td>-15.05</td> <td>41.75</td> <td>-2.80</td> <td>Average</td> <td>100</td> <td>190</td> </tr> <tr> <td>2390.00</td> <td>50.74</td> <td>74.00</td> <td>-23.26</td> <td>53.54</td> <td>-2.80</td> <td>Peak</td> <td>100</td> <td>190</td> </tr> <tr> <td>4804.00</td> <td>34.34</td> <td>54.00</td> <td>-19.66</td> <td>30.81</td> <td>3.53</td> <td>Average</td> <td>100</td> <td>20</td> </tr> <tr> <td>4804.00</td> <td>45.27</td> <td>74.00</td> <td>-28.73</td> <td>41.74</td> <td>3.53</td> <td>Peak</td> <td>100</td> <td>20</td> </tr> <tr> <td>12010.00</td> <td>43.78</td> <td>54.00</td> <td>-10.22</td> <td>30.06</td> <td>13.72</td> <td>Average</td> <td>100</td> <td>0</td> </tr> <tr> <td>12010.00</td> <td>56.84</td> <td>74.00</td> <td>-17.16</td> <td>43.12</td> <td>13.72</td> <td>Peak</td> <td>100</td> <td>0</td> </tr> </tbody> </table>										Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg	2390.00	38.95	54.00	-15.05	41.75	-2.80	Average	100	190	2390.00	50.74	74.00	-23.26	53.54	-2.80	Peak	100	190	4804.00	34.34	54.00	-19.66	30.81	3.53	Average	100	20	4804.00	45.27	74.00	-28.73	41.74	3.53	Peak	100	20	12010.00	43.78	54.00	-10.22	30.06	13.72	Average	100	0	12010.00	56.84	74.00	-17.16	43.12	13.72	Peak	100	0
Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
2390.00	38.95	54.00	-15.05	41.75	-2.80	Average	100	190																																																																
2390.00	50.74	74.00	-23.26	53.54	-2.80	Peak	100	190																																																																
4804.00	34.34	54.00	-19.66	30.81	3.53	Average	100	20																																																																
4804.00	45.27	74.00	-28.73	41.74	3.53	Peak	100	20																																																																
12010.00	43.78	54.00	-10.22	30.06	13.72	Average	100	0																																																																
12010.00	56.84	74.00	-17.16	43.12	13.72	Peak	100	0																																																																
<p>Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).</p>																																																																								

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

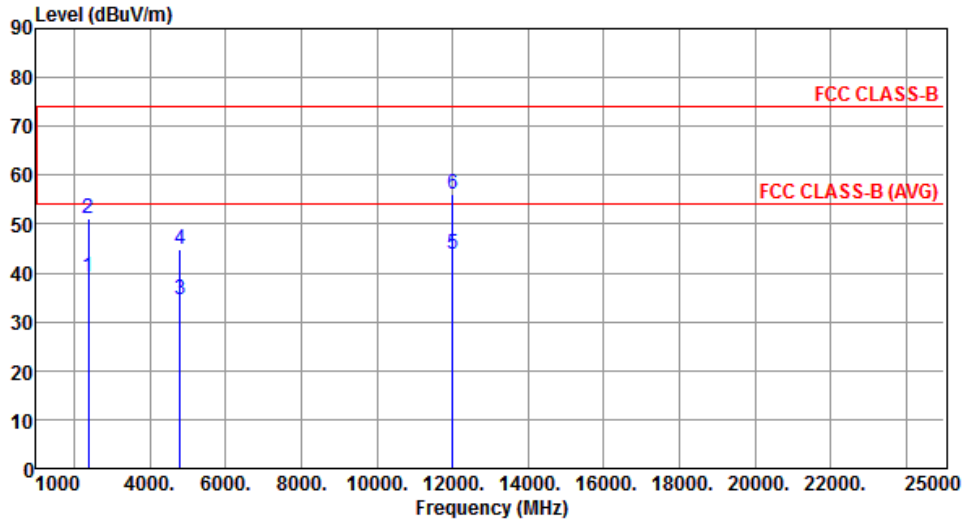


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.04	54.00	-14.96	41.84	-2.80	Average	295	325
2	2390.00	51.05	74.00	-22.95	53.85	-2.80	Peak	295	325
3	4804.00	34.59	54.00	-19.41	31.06	3.53	Average	100	32
4	4804.00	44.99	74.00	-29.01	41.46	3.53	Peak	100	32
5	12010.00	43.97	54.00	-10.03	30.25	13.72	Average	100	0
6	12010.00	56.28	74.00	-17.72	42.56	13.72	Peak	100	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		

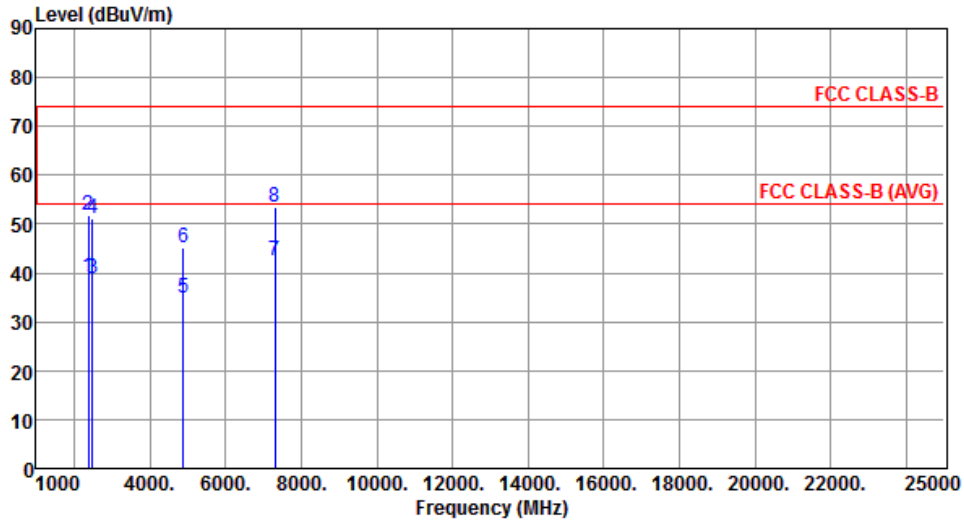


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.31	54.00	-14.69	42.11	-2.80	Average	233	161
2	2390.00	51.79	74.00	-22.21	54.59	-2.80	Peak	233	161
3	2483.50	38.93	54.00	-15.07	41.96	-3.03	Average	233	161
4	2483.50	51.03	74.00	-22.97	54.06	-3.03	Peak	233	161
5	4880.00	34.96	54.00	-19.04	31.33	3.63	Average	100	21
6	4880.00	45.27	74.00	-28.73	41.64	3.63	Peak	100	21
7	7320.00	42.51	54.00	-11.49	33.29	9.22	Average	100	258
8	7320.00	53.46	74.00	-20.54	44.24	9.22	Peak	100	258

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		

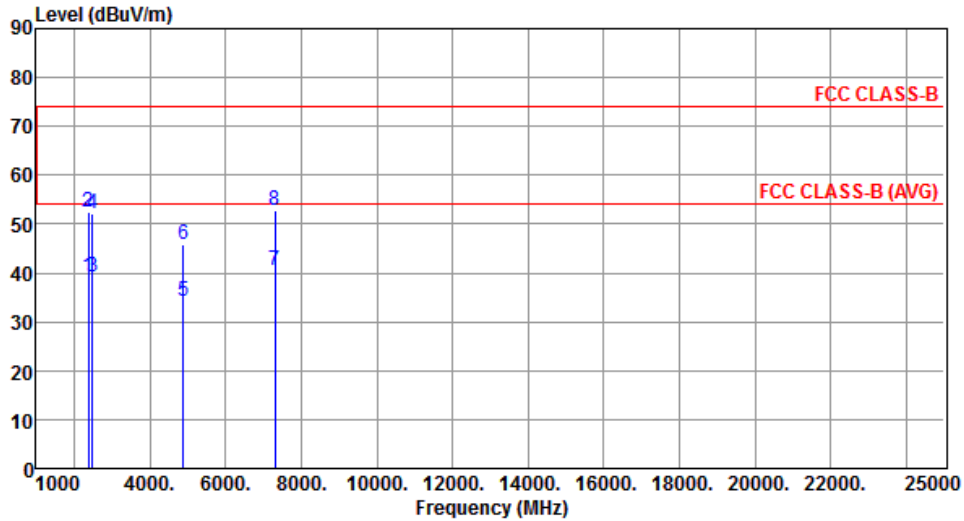


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.34	54.00	-14.66	42.14	-2.80	Average	222	212
2	2390.00	52.34	74.00	-21.66	55.14	-2.80	Peak	222	212
3	2483.50	39.11	54.00	-14.89	42.14	-3.03	Average	222	212
4	2483.50	52.12	74.00	-21.88	55.15	-3.03	Peak	222	212
5	4880.00	34.16	54.00	-19.84	30.53	3.63	Average	100	39
6	4880.00	45.99	74.00	-28.01	42.36	3.63	Peak	100	39
7	7320.00	40.49	54.00	-13.51	31.27	9.22	Average	100	155
8	7320.00	52.90	74.00	-21.10	43.68	9.22	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		

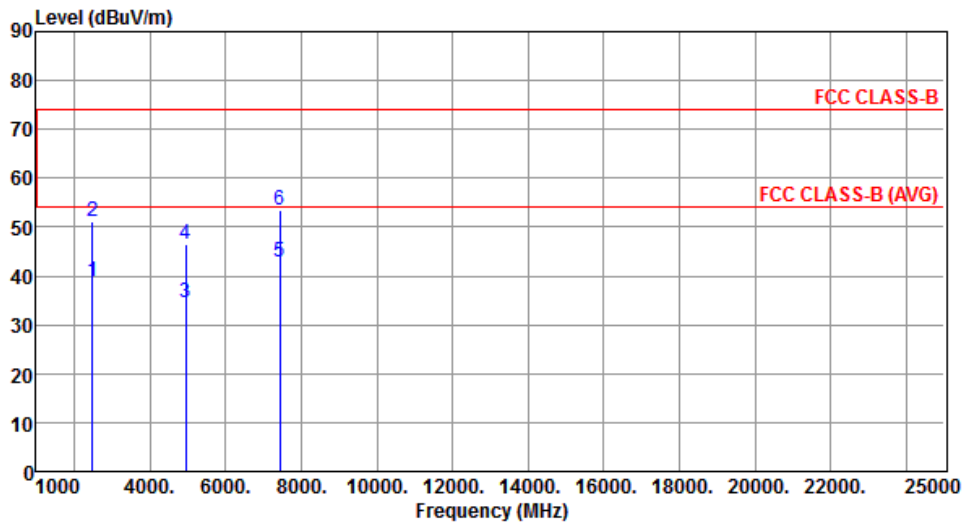


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.73	54.00	-15.27	41.76	-3.03	Average	111	181
2	2483.50	51.15	74.00	-22.85	54.18	-3.03	Peak	111	181
3	4960.00	34.57	54.00	-19.43	30.74	3.83	Average	100	24
4	4960.00	46.48	74.00	-27.52	42.65	3.83	Peak	100	24
5	7440.00	42.84	54.00	-11.16	33.63	9.21	Average	199	358
6	7440.00	53.39	74.00	-20.61	44.18	9.21	Peak	199	358

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		

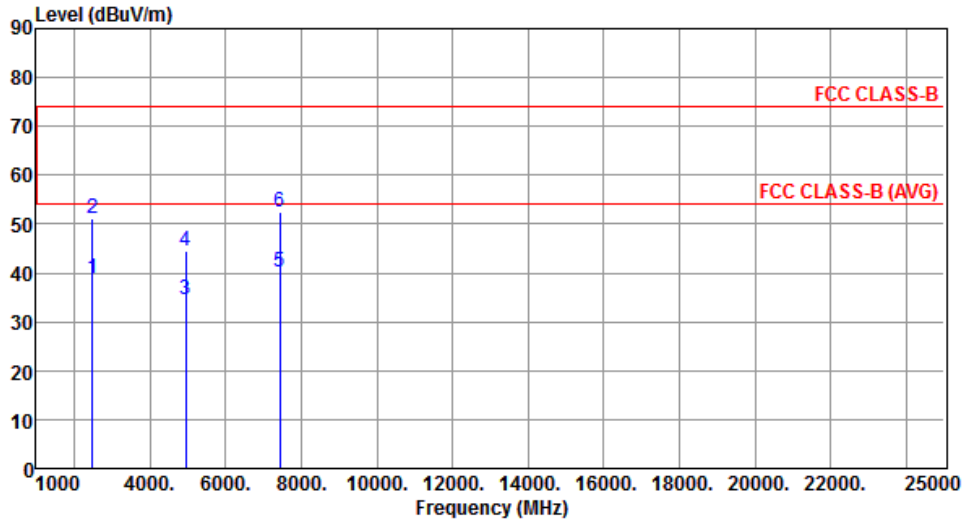


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.91	54.00	-15.09	41.94	-3.03	Average	296	350
2	2483.50	51.18	74.00	-22.82	54.21	-3.03	Peak	296	350
3	4960.00	34.39	54.00	-19.61	30.56	3.83	Average	100	31
4	4960.00	44.57	74.00	-29.43	40.74	3.83	Peak	100	31
5	7440.00	40.32	54.00	-13.68	31.11	9.21	Average	100	0
6	7440.00	52.38	74.00	-21.62	43.17	9.21	Peak	100	0

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

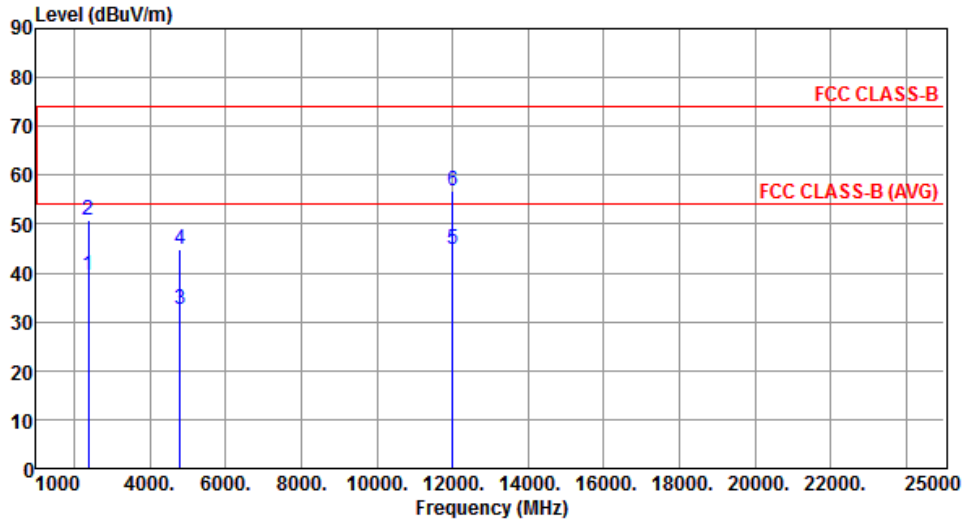


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.47	54.00	-14.53	42.27	-2.80	Average	100	143
2	2390.00	50.77	74.00	-23.23	53.57	-2.80	Peak	100	143
3	4804.00	32.58	54.00	-21.42	29.05	3.53	Average	100	0
4	4804.00	44.80	74.00	-29.20	41.27	3.53	Peak	100	0
5	12010.00	44.85	54.00	-9.15	31.13	13.72	Average	100	0
6	12010.00	56.69	74.00	-17.31	42.97	13.72	Peak	100	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

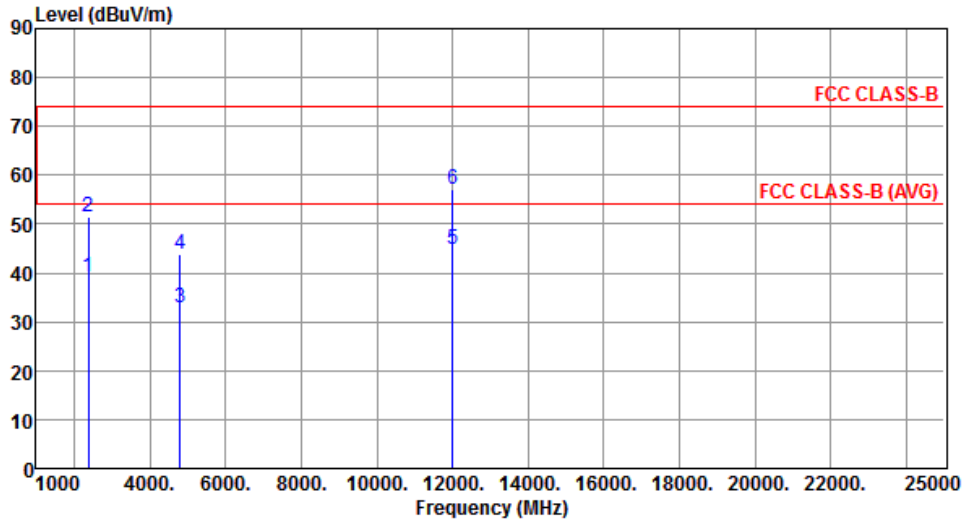


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.33	54.00	-14.67	42.13	-2.80	Average	137	176
2	2390.00	51.61	74.00	-22.39	54.41	-2.80	Peak	137	176
3	4804.00	32.72	54.00	-21.28	29.19	3.53	Average	100	0
4	4804.00	43.87	74.00	-30.13	40.34	3.53	Peak	100	0
5	12010.00	44.94	54.00	-9.06	31.22	13.72	Average	100	0
6	12010.00	57.07	74.00	-16.93	43.35	13.72	Peak	100	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		

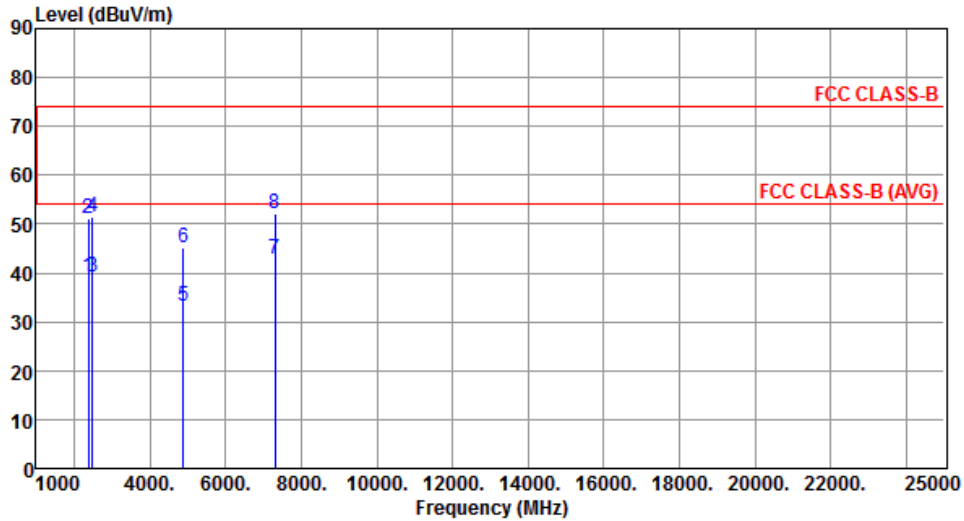


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.32	54.00	-14.68	42.12	-2.80	Average	100	140
2	2390.00	51.04	74.00	-22.96	53.84	-2.80	Peak	100	140
3	2483.50	39.34	54.00	-14.66	42.37	-3.03	Average	100	140
4	2483.50	51.61	74.00	-22.39	54.64	-3.03	Peak	100	140
5	4880.00	33.37	54.00	-20.63	29.74	3.63	Average	100	0
6	4880.00	45.14	74.00	-28.86	41.51	3.63	Peak	100	0
7	7320.00	42.78	54.00	-11.22	33.56	9.22	Average	211	0
8	7320.00	52.17	74.00	-21.83	42.95	9.22	Peak	211	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		

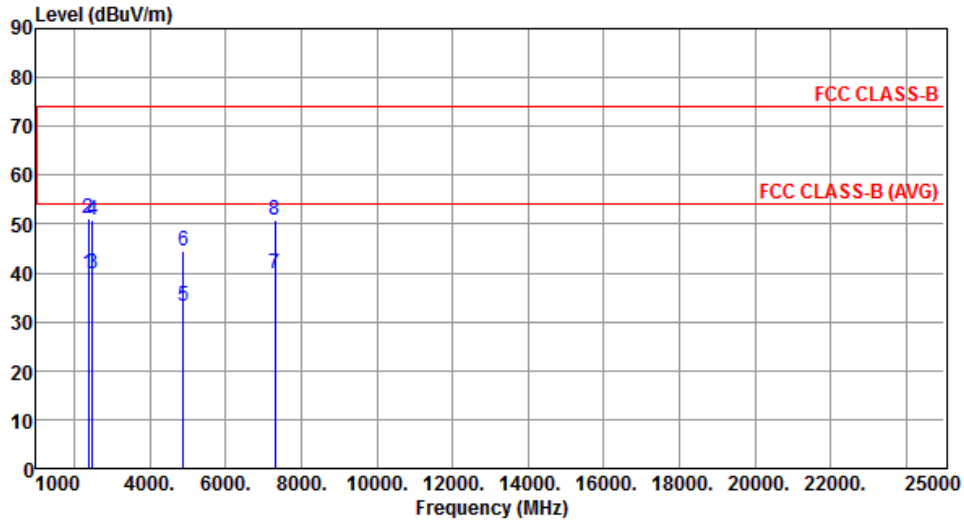


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.86	54.00	-14.14	42.66	-2.80	Average	324	280
2	2390.00	51.23	74.00	-22.77	54.03	-2.80	Peak	324	280
3	2483.50	39.72	54.00	-14.28	42.75	-3.03	Average	324	280
4	2483.50	50.80	74.00	-23.20	53.83	-3.03	Peak	324	280
5	4880.00	33.11	54.00	-20.89	29.48	3.63	Average	100	0
6	4880.00	44.63	74.00	-29.37	41.00	3.63	Peak	100	0
7	7320.00	39.74	54.00	-14.26	30.52	9.22	Average	100	0
8	7320.00	50.78	74.00	-23.22	41.56	9.22	Peak	100	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		

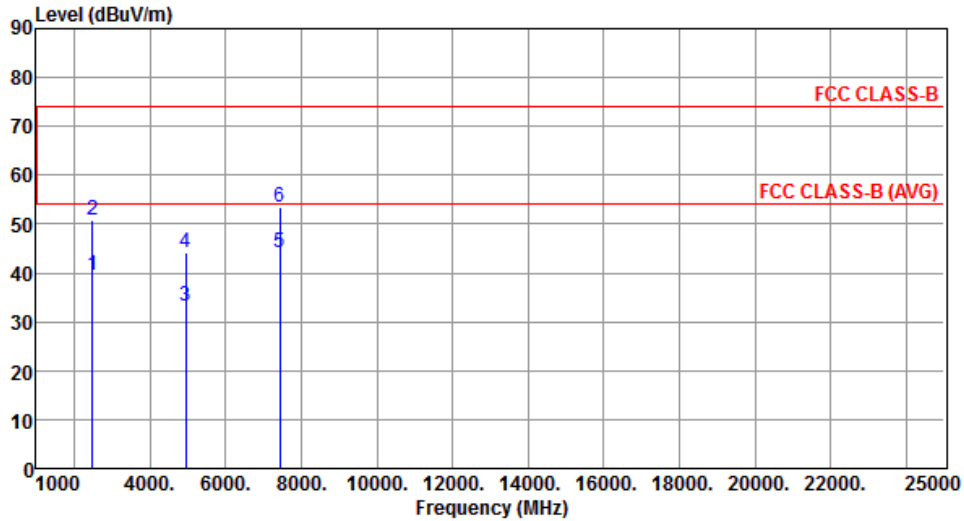


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.37	54.00	-14.63	42.40	-3.03	Average	100	139
2	2483.50	50.66	74.00	-23.34	53.69	-3.03	Peak	100	139
3	4960.00	33.16	54.00	-20.84	29.33	3.83	Average	100	0
4	4960.00	44.26	74.00	-29.74	40.43	3.83	Peak	100	0
5	7440.00	44.11	54.00	-9.89	34.90	9.21	Average	217	355
6	7440.00	53.44	74.00	-20.56	44.23	9.21	Peak	217	355

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		

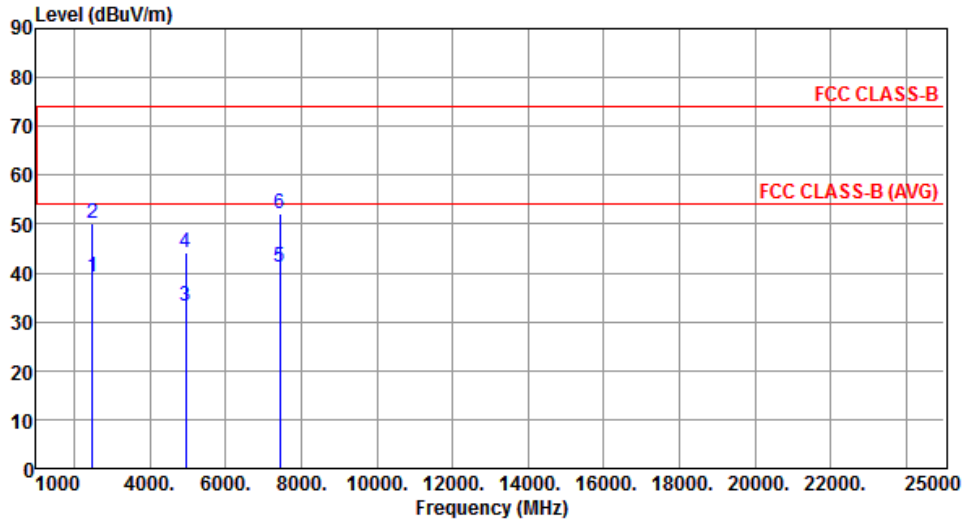

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.20	54.00	-14.80	42.23	-3.03	Average	118	172
2	2483.50	50.16	74.00	-23.84	53.19	-3.03	Peak	118	172
3	4960.00	33.22	54.00	-20.78	29.39	3.83	Average	100	0
4	4960.00	44.27	74.00	-29.73	40.44	3.83	Peak	100	0
5	7440.00	41.02	54.00	-12.98	31.81	9.21	Average	100	0
6	7440.00	52.20	74.00	-21.80	42.99	9.21	Peak	100	0


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Configuration 3 : Charging mode _ Normal Link _#5Large Watch

3.5.7 Transmitter Radiated Unwanted Emissions (Below 1GHz)

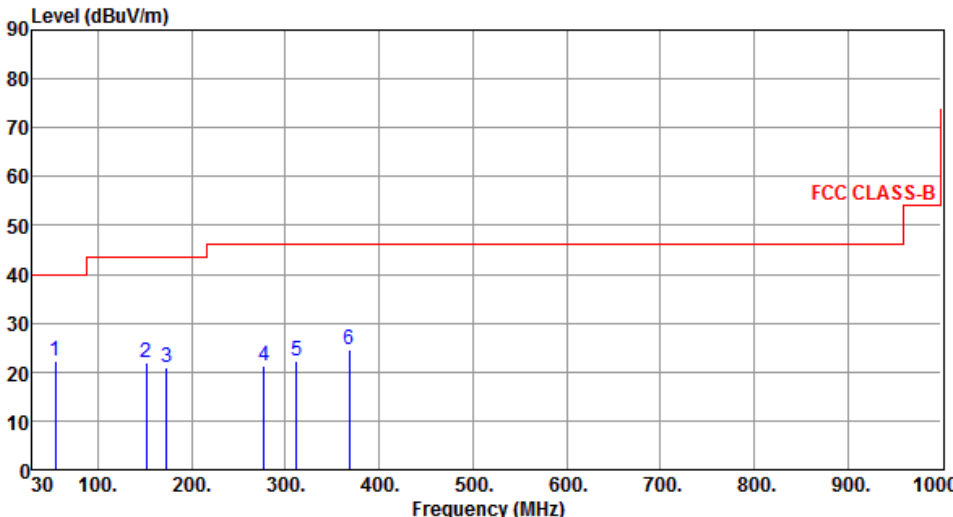Modulation	BT-LE								
Polarization	Horizontal								
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 200 MHz, and 55 dBuV/m from 200 to 1000 MHz. Six blue vertical lines indicate emission peaks at 54.25, 151.25, 173.56, 277.35, 312.27, and 368.53 MHz, labeled 1 through 6 respectively.</p>									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	54.25	22.22	40.00	-17.78	30.76	-8.54	Peak	---	---
2	151.25	21.98	43.50	-21.52	30.35	-8.37	Peak	---	---
3	173.56	20.97	43.50	-22.53	30.17	-9.20	Peak	---	---
4	277.35	21.19	46.00	-24.81	29.90	-8.71	Peak	---	---
5	312.27	22.25	46.00	-23.75	29.89	-7.64	Peak	---	---
6	368.53	24.71	46.00	-21.29	30.96	-6.25	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>									

Modulation	BT-LE
Polarization	Vertical

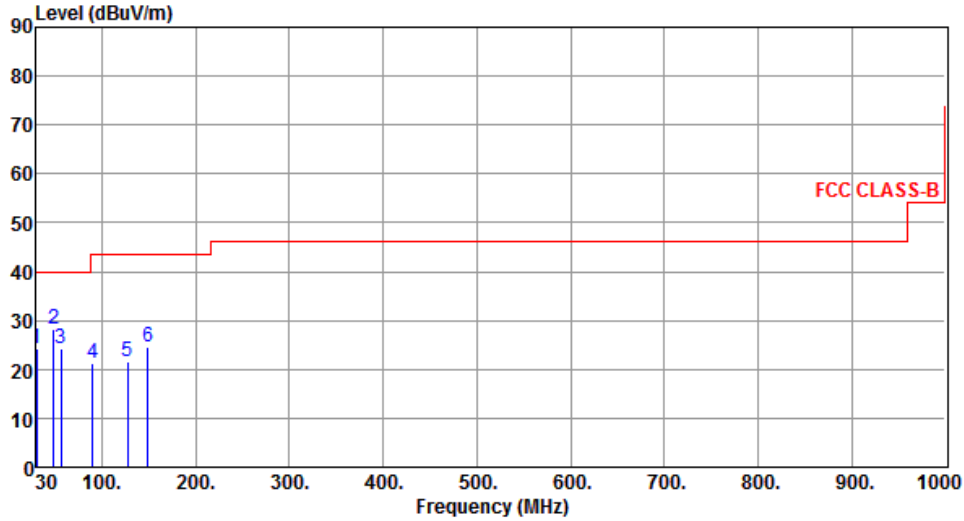

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.00	24.28	40.00	-15.72	33.99	-9.71	Peak	---	---
2	48.43	28.22	40.00	-11.78	36.58	-8.36	Peak	---	---
3	56.19	24.12	40.00	-15.88	32.74	-8.62	Peak	---	---
4	90.14	21.39	43.50	-22.11	35.66	-14.27	Peak	---	---
5	127.00	21.67	43.50	-21.83	31.55	-9.88	Peak	---	---
6	149.31	24.72	43.50	-18.78	33.19	-8.47	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Configuration 4 : Charging mode _ Normal Link_ #6Small Watch

3.5.8 Transmitter Radiated Unwanted Emissions (Below 1GHz)

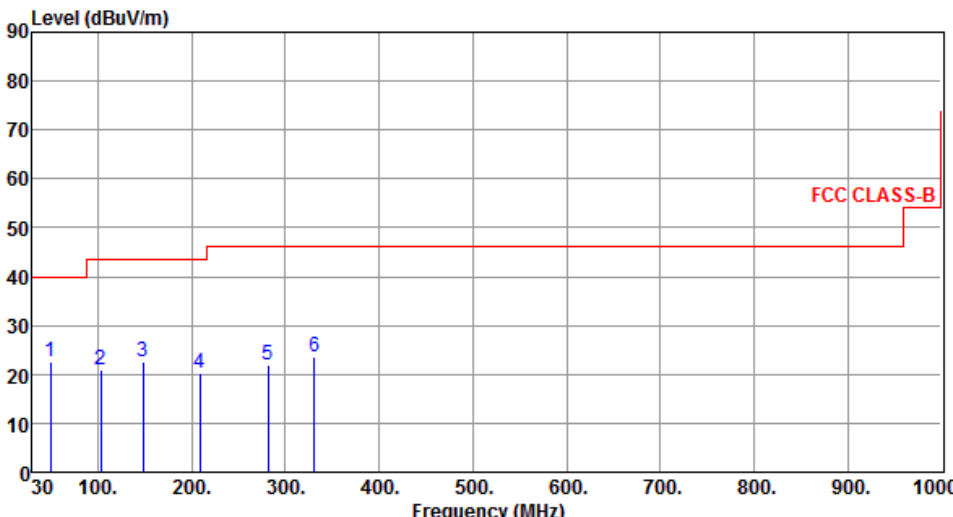Modulation	BT-LE								
Polarization	Horizontal								
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	49.40	22.67	40.00	-17.33	31.00	-8.33	Peak	---	---
2	102.75	21.03	43.50	-22.47	33.64	-12.61	Peak	---	---
3	148.34	22.42	43.50	-21.08	30.86	-8.44	Peak	---	---
4	208.48	20.41	43.50	-23.09	32.48	-12.07	Peak	---	---
5	281.23	22.08	46.00	-23.92	30.68	-8.60	Peak	---	---
6	330.70	23.60	46.00	-22.40	30.75	-7.15	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>									

Modulation	BT-LE
Polarization	Vertical

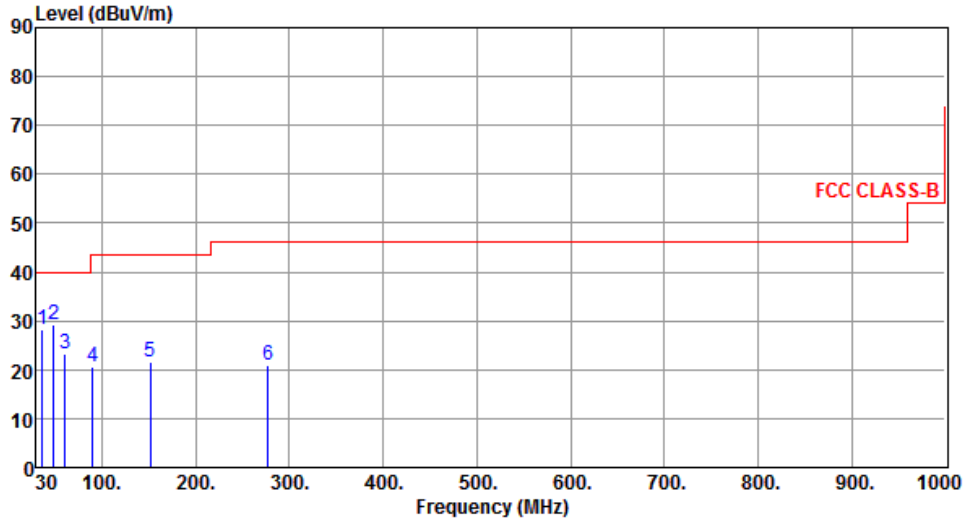

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	36.79	28.08	40.00	-11.92	37.15	-9.07	Peak	---	---
2	48.43	29.33	40.00	-10.67	37.69	-8.36	Peak	---	---
3	61.04	23.36	40.00	-16.64	32.37	-9.01	Peak	---	---
4	90.14	20.47	43.50	-23.03	34.74	-14.27	Peak	---	---
5	151.25	21.53	43.50	-21.97	29.90	-8.37	Peak	---	---
6	277.35	21.08	46.00	-24.92	29.79	-8.71	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level


Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup



3.6.4 Test Result of Emissions in non-restricted Frequency Bands

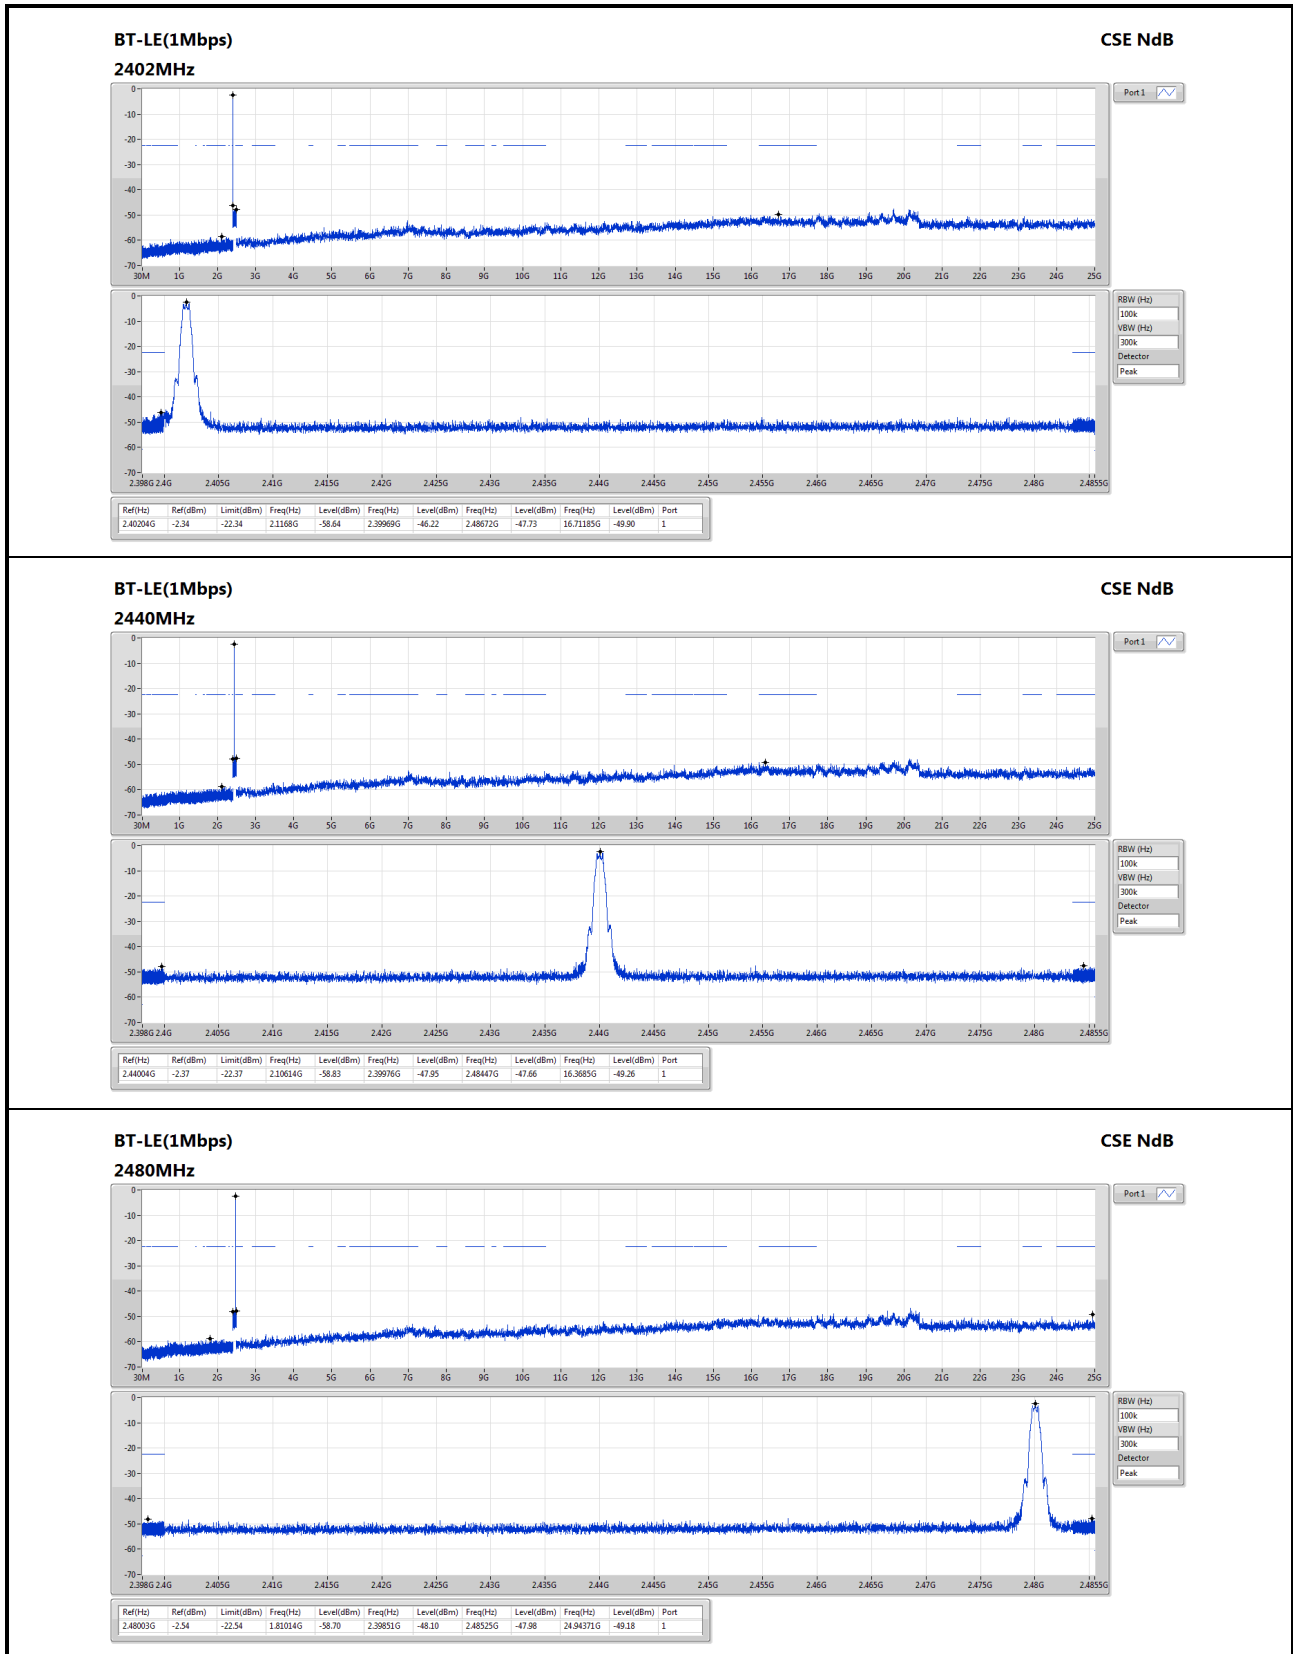

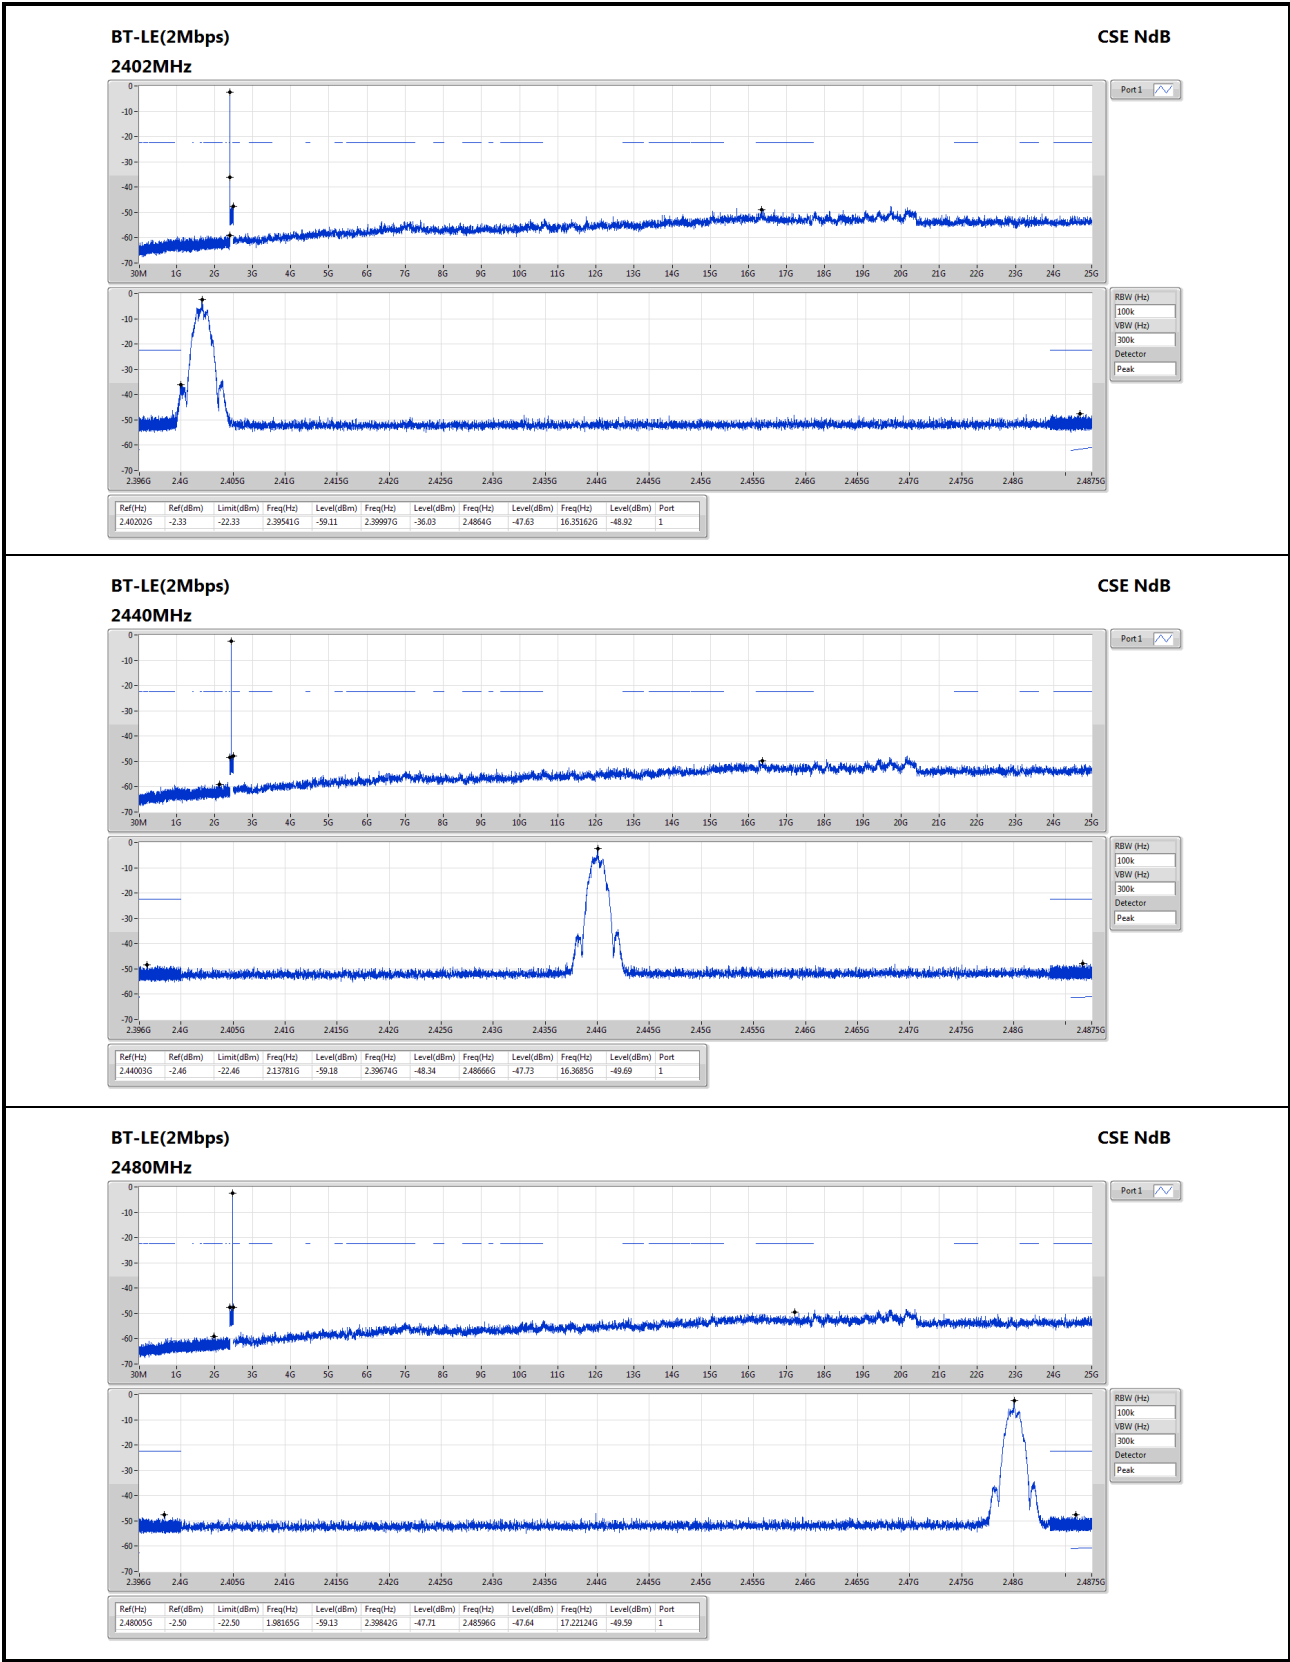

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==