



**TÜVRheinland**<sup>®</sup>  
Precisely Right.

## RF Exposure Report

**EUT Name:** VERASENSE for Exactech Equinox  
**Model No.:** EXC-EQRV42, EXC-EQRV38  
**FCC ID:** XNL-ORTHOSNSR8

*Prepared for:*

OrthoSensor, Inc.  
1855 Griffin Road Suite A-310  
Dania FL 33004

*Prepared by:*

TUV Rheinland of North America, Inc.  
5015 Brandin Ct. Fremont CA 94538 USA  
Tel: (929) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

*Report/Issue Date:* April 14, 2020  
*Report Number:* 32061513.001  
*Job Number:* 234112604

## TABLE OF CONTENTS

<b>1</b>	<b>PRODUCT SPECIFICATIONS.....</b>	<b>4</b>
1.1	PRODUCT DESCRIPTION .....	4
1.2	PRODUCT SPECIFICATIONS.....	4
1.3	AIR INTERFACES.....	4
1.4	TEST SEPARATION DISTANCE .....	4
<b>2</b>	<b>STAND-ALONE SAR EVALUATION EXCLUSION.....</b>	<b>6</b>
2.1	PURPOSE.....	6
2.2	SAR EXCLUSION LIMITS AND CALCULATION .....	6
2.3	ASSESSMENT CALCULATION.....	6
2.4	CONCLUSION .....	6
<b>3</b>	<b>DUTY CYCLE MEASUREMENT .....</b>	<b>7</b>

# Statement of Compliance

*Manufacturer:* OrthoSensor, Inc.  
1855 Griffin Road Suite A-310  
Dania FL 33004

*Name of Equipment:* VERASENSE for Exactech Equinox  
*Model No.* EXC-EQRV42, EXC-EQRV38  
*Application of Regulations:* CFR 47 Part 2.1093

*Guidance Documents:*

FCC Part 2.1091

*Test Methods:*

FCC Part 1.1310, KDB 447498 D01

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Rachana Khanduri      April 14, 2020  
Test Engineer              Date

James Borrott              April 14, 2020  
Laboratory Signatory      Date



**Test Cert. # 3331.02**

# 1 Product Specifications

## 1.1 Product Description

## 1.2 Product Specifications


EUT Specifications	
Exposure Type	<input checked="" type="checkbox"/> General Population / Uncontrolled <input type="checkbox"/> Occupational / Controlled
Multiple Antenna Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Note:	

## 1.3 Air Interfaces

Air Interface	Supported Capabilities	Modulation	Maximum Duty Cycle	Band	Frequency Range (MHz)	Maximum Output Power Including Tolerance (dBm)
Bluetooth	• Low Energy	• GFSK	3.2%	N/A	2400 – 2483.5	5.79

## 1.4 Test Separation Distance

The minimum RF exposure distance between the device antenna and the user is less than 5mm apart. The value of 5mm is therefore used as required by KDB 447498. The EUT is a location monitoring Tag that runs in a closed loop proprietary system.

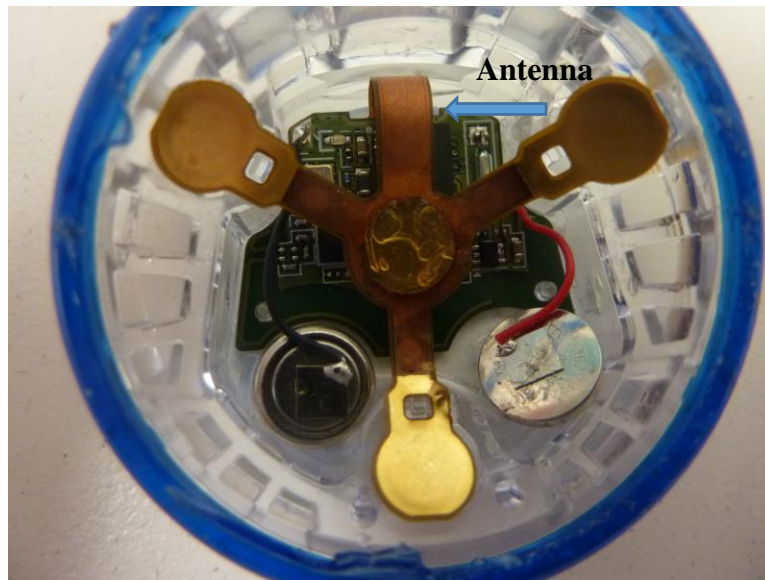

## 2 Stand-Alone SAR Evaluation Exclusion

### 2.1 Purpose

This report will demonstrate the compliance of RF exposure to the human body of the EXC-EQVR42, EXC-EQVR38 according to FCC rule part 2.1091. All transmitters, regardless if it is categorically excluded, are assessed to ensure the product can operate in manners that meet or exceed the minimum test separation distance as required by KDB 447498.

### 2.2 SAR Exclusion Limits and Calculation

For 100 MHz to 6 GHz and *test separation distances*  $\leq 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR, and  $\leq 7.5$  for 10-g extremity SAR,

Where,

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum *test separation distance* is  $\leq 50$  mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum *test separation distance* is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

### 2.3 Assessment Calculation

The maximum output power and antenna gain is declared by the manufacturer and used in this assessment. The minimum RF exposure distance during normal operation is 5mm.

#### Stand Alone Analysis

Frequency Band	Frequency of Max Power (GHz)	Max Conducted Power (dBm)	Duty Cycle	Time Avg Power (dBm)	Conducted Power (mW)	Test Separation Distance (mm)	1-g $\leq 3.0$	Result
2.4 GHz BLE	2.48	5.79	3.2%	-9.16	0.12	5	0.038	Pass

### 2.4 Conclusion

The EUT was found to be compliant to the requirements of FCC part 1.1310 and part 2.1091 with a separation distance of 5mm.

### 3 Duty Cycle Measurement

The calculations for the device modulation scheme can be found below:

Device transmits 40 bytes of data every 10ms

$40 \text{ bytes} / 0.01\text{s} = 4000 \text{ bytes/s}$

BLE bandwidth is 1Mb/s or 125000 bytes/s

$4000/125000 = 3.2\%$  of available bandwidth

The above calculations show the device transmits 3.2% of the time.

**END OF REPORT**