

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 15.407 UNII 802.11a/n/ac

Applicant Name:

H&D Wireless AB
Färögatan 33,
SE-164 51 Kista,
Sweden

Date of Testing:

12/14/16 - 1/24/2017

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

0Y1612302094-04.XO2

FCC ID:

XO2SPB209A

APPLICANT:

H&D Wireless AB

Application Type:

Class II Permissive Change

Model:

SPB209A

EUT Type:

Wifi/BT/NFC Module

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15.407

Test Procedure(s):

KDB 789033 D02 v01r03

Class II Permissive Change:

Adding external antenna Walsin RFDPA870900SBLB8G1. Please see FCC change document for details.

Original Grant Date:



10/12/2016

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01r03. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




Randy Ortanez
President




FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 1 of 43

T A B L E O F C O N T E N T S


FCC PART 15.407 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 Scope		4
1.2 PCTEST Test Location		4
2.0 PRODUCT INFORMATION		5
2.1 Equipment Description		5
2.2 Device Capabilities		5
2.3 Test Configuration		5
2.4 EMI Suppression Device(s)/Modifications		5
3.0 DESCRIPTION OF TESTS		6
3.1 Evaluation Procedure		6
3.2 Radiated Emissions		6
3.3 Environmental Conditions		6
4.0 ANTENNA REQUIREMENTS		7
5.0 MEASUREMENT UNCERTAINTY		8
6.0 TEST EQUIPMENT CALIBRATION DATA		9
7.0 TEST RESULTS		10
7.1 Summary		10
7.2 UNII Output Power Measurement – 802.11a/n/ac		11
7.3 Radiated Spurious Emission Measurements – Above 1GHz		13
7.7.1 Radiated Spurious Emission Measurements		16
7.7.2 Radiated Band Edge Measurements (20MHz BW)		27
7.7.3 Radiated Band Edge Measurements (40MHz BW)		31
7.7.4 Radiated Band Edge Measurements (80MHz BW)		35
7.4 Radiated Spurious Emissions Measurements – Below 1GHz		39
8.0 CONCLUSION		43

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module	Page 2 of 43	



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: H&D Wireless AB

APPLICANT ADDRESS: Färögatan 33,
SE-164 51 Kista,, Sweden

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

BASE MODEL: SPB209A

FCC ID: XO2SPB209A

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)



Test Device Serial No.: 164602 Production Pre-Production Engineering

DATE(S) OF TEST: 12/14/16 - 1/24/2017



TEST REPORT S/N: 0Y1612302094-04.XO2

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module	Page 3 of 43	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

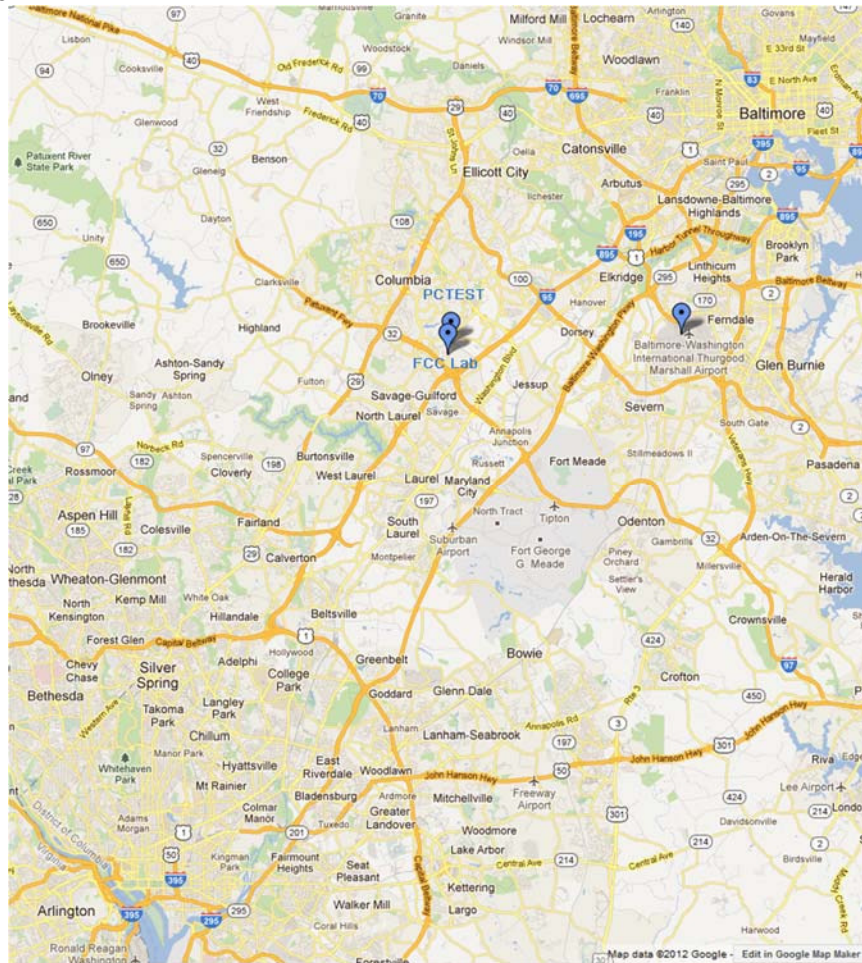


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 4 of 43

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **H&D Wireless AB Wifi/BT/NFC Module FCC ID: XO2SPB209A**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/a/ac WLAN/UNII, Bluetooth (1x, EDR, LE), NFC

Notes:

- 5GHz NII operation is possible in 20MHz channel bandwidth. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v01r03. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
5GHz	a	96.6
	n (HT20)	96.4
	ac (HT20)	73.6
	n (HT40)	92.3
	ac (HT40)	63.5
	ac (HT80)	55.8



Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325,
 351/390, 390/433.3 (ac – 80MHz BW)

2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v01r03. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 3.2 for radiated emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module	Page 5 of 43	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v01r03 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions



The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module	Page 6 of 43	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- Antenna connections uses unique coupling to the intentional radiator.

Conclusion:

The EUT complies with the requirement of §15.203.

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
40	5200	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 4-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550	159	5795
				:	:		
				142	5710		

Table 4-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/11/2016	Annual	7/11/2017	RE1
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	7/30/2015	Biennial	7/30/2017	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	7/6/2016	Annual	7/6/2017	441119
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	3/27/2015	Triennial	3/27/2018	9203-2178
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	4/26/2016	Annual	4/26/2017	251425001
K & L	11SH10-6000/T18000	High Pass Filter	7/11/2016	Annual	7/11/2017	11SH10-6000/T18000-1
K & L	11SH10-3075/U18000	High Pass Filter	7/11/2016	Annual	7/11/2017	11SH10-3075/U18000-2
PCTEST	-	EMC Switch System	7/11/2016	Annual	7/11/2017	NM1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rhode & Schwarz	TS-PR18	Pre-Amplifier	7/6/2016	Annual	7/6/2017	101622
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	7/11/2016	Annual	7/11/2017	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/16/2016	Annual	5/16/2017	100342
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100037
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Sunol	DRH-118	Horn Antenna (1-18GHz)	7/30/2015	Biennial	7/30/2017	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

7.0 TEST RESULTS

7.1 Summary

Company Name: H&D Wireless AB
 FCC ID: XO2SPB209A
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407 (a.1.iv), (a.2), (a.3)	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a)	CONDUCTED	PASS	Section 7.2
15.407(b.1), (2), (3), (4)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b)	RADIATED	PASS	Section 7.3
15.205, 15.407(b.1), (4), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.4, 7.5

Table 7-1. Summary of Test Results

Note:

All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.

7.2 UNII Output Power Measurement – 802.11a/n/ac

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies.

Test Procedure Used

KDB 789033 D02 v01r03 – Section E)3)b) Method PM-G
 KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

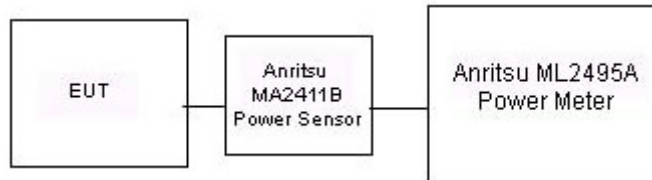




Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module	Page 11 of 43	

Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	14.53	13.32	9.41
5200	40	AVG	14.51	13.36	9.39
5220	44	AVG	14.47	13.40	9.32
5240	48	AVG	14.55	13.29	9.32
5260	52	AVG	14.33	13.19	9.20
5280	56	AVG	14.35	13.13	9.14
5300	60	AVG	14.28	13.24	9.04
5320	64	AVG	14.29	13.22	9.07
5500	100	AVG	14.23	13.12	9.06
5580	116	AVG	14.05	13.16	8.95
5600	120	AVG	13.98	13.09	8.91
5620	124	AVG	13.94	13.23	9.03
5640	128	AVG	13.86	13.01	8.96
5700	140	AVG	13.96	12.97	8.99
5720	144	AVG	14.01	12.69	8.79
5745	149	AVG	13.84	12.84	8.97
5765	153	AVG	13.97	12.96	9.07
5785	157	AVG	13.95	12.81	9.05
5805	161	AVG	14.02	12.89	9.06
5825	165	AVG	14.00	12.80	9.05

Table 7-2. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5190	38	AVG	13.33	8.02
5230	46	AVG	13.24	8.08
5270	54	AVG	13.42	8.11
5310	62	AVG	13.48	8.05
5510	102	AVG	13.43	8.04
5550	110	AVG	13.52	7.93
5590	118	AVG	13.33	7.94
5630	126	AVG	13.17	7.86
5670	134	AVG	13.08	7.79
5710	142	AVG	13.02	7.73
5755	151	AVG	13.09	7.69
5795	159	AVG	13.05	7.77

Table 7-3. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5210	42	AVG	8.32
5290	58	AVG	8.25
5530	106	AVG	8.15
5610	122	AVG	8.25
5690	138	AVG	7.74
5775	155	AVG	7.79

Table 7-4. 80MHz BW (UNII) Maximum Conducted Output Power

7.3 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-5 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-5. Radiated Limits



Test Procedures Used

KDB 789033 D02 v01r03 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module	Page 13 of 43	

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

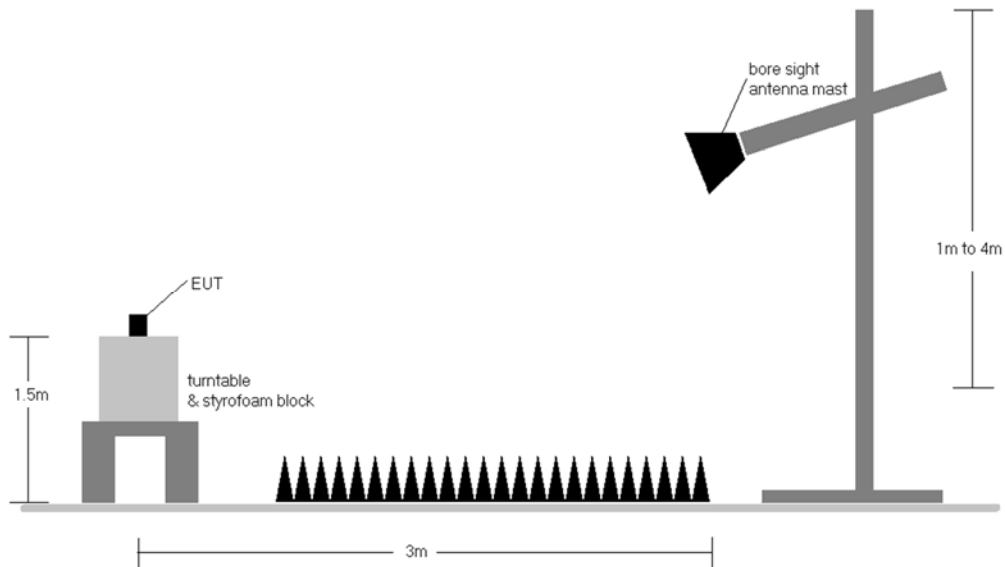




Figure 7-2. Test Instrument & Measurement Setup

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 14 of 43

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01r03 Section G.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-5.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-5. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested while powered by an DC power source.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations



Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.2 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module	Page 15 of 43	

7.7.1 Radiated Spurious Emission Measurements

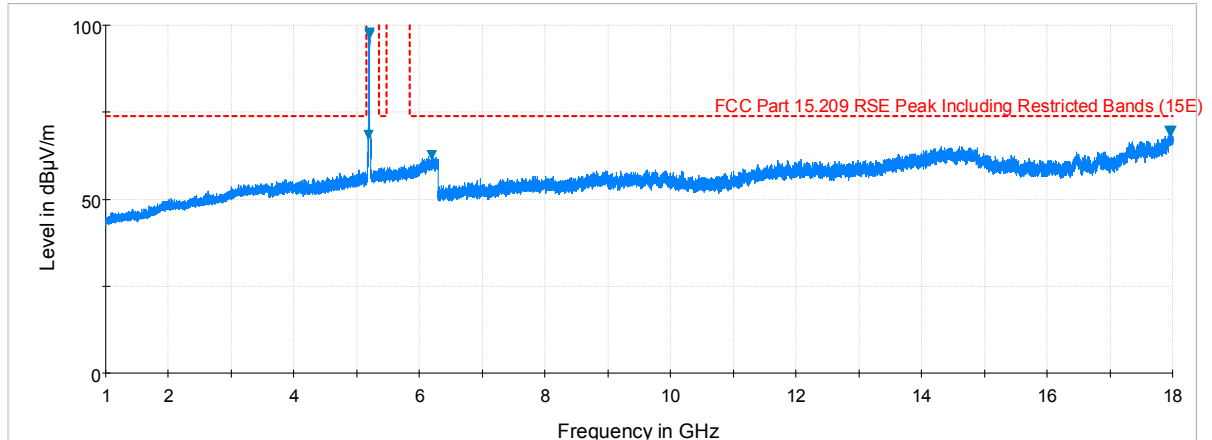


Plot 7-1. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

Preview Result 1-PK+ FCC Part 15.209 RSE Peak Including Restricted Bands (15E) Final_Result PK+

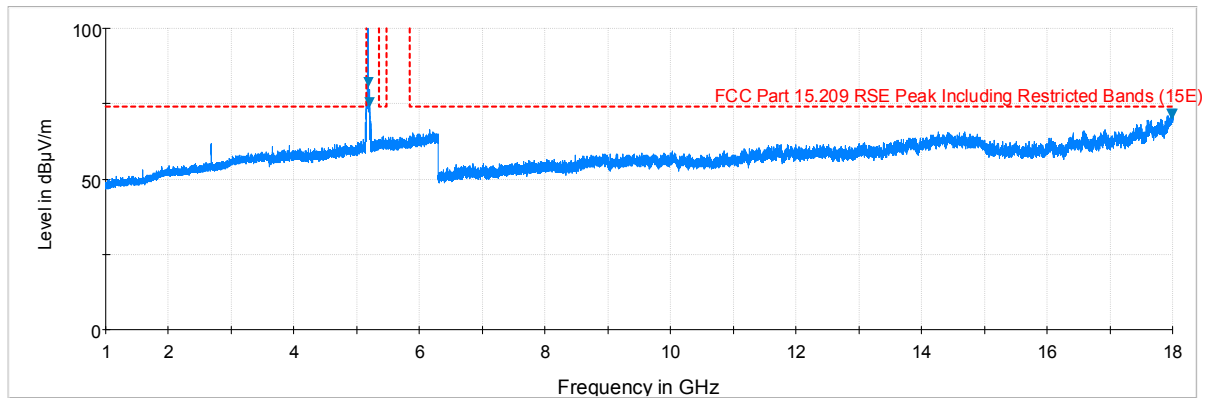

Plot 7-2. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)


Preview Result 1-PK+ FCC Part 15.209 RSE Peak Including Restricted Bands (15E) Final_Result PK+

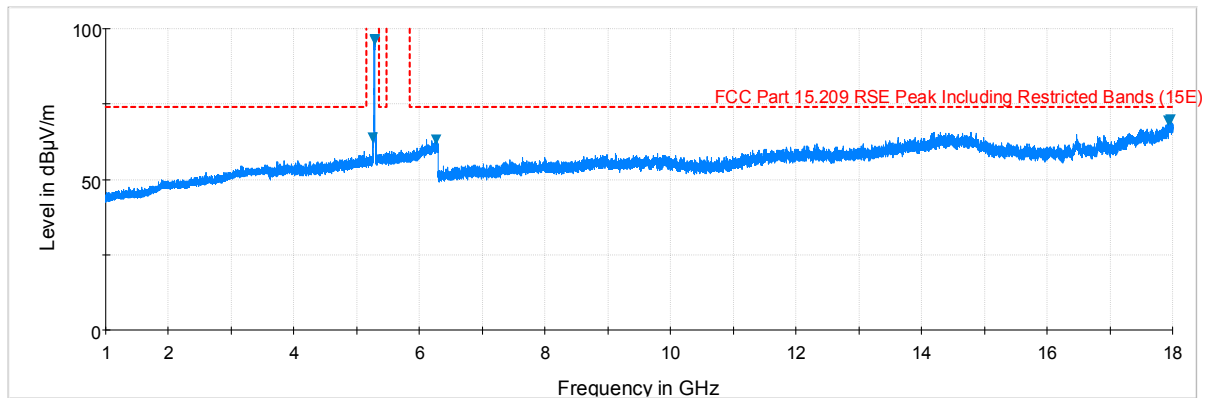

Plot 7-3. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)


Preview Result 1-PK+ FCC Part 15.209 RSE Peak Including Restricted Bands (15E) Final_Result PK+

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 16 of 43

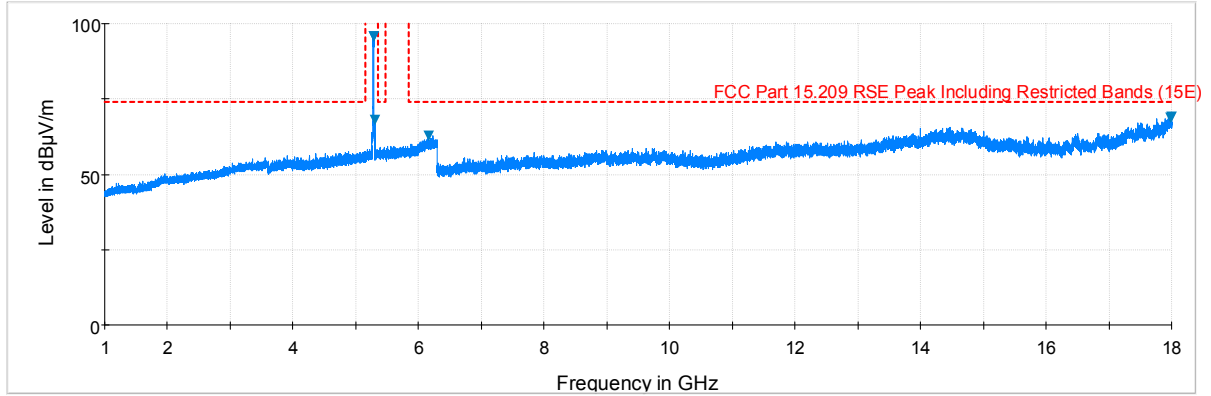


Preview Result 1-PK+ FCC Part 15.209 RSE Peak Including Restricted Bands (15E) Final_Result PK+

Plot 7-4. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

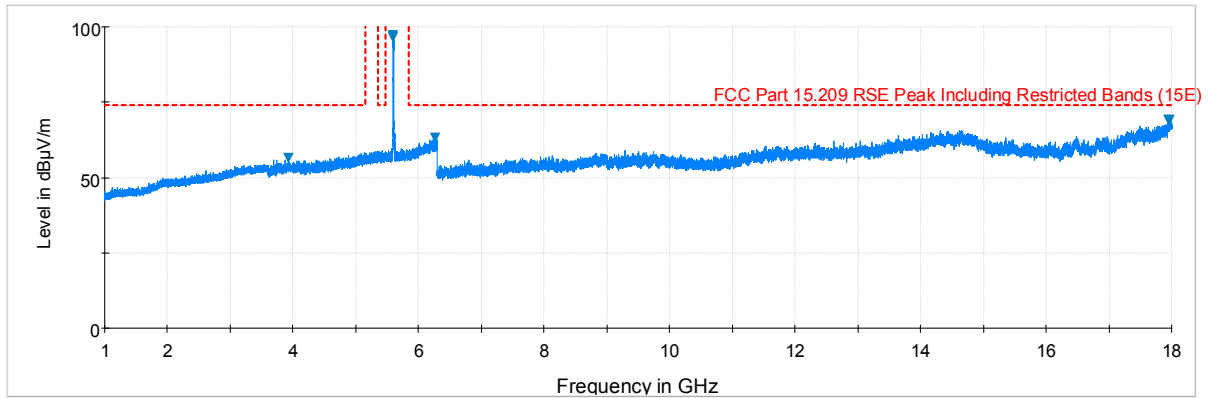

Preview Result 1-PK+ FCC Part 15.209 RSE Peak Including Restricted Bands (15E) Final_Result PK+


Plot 7-5. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

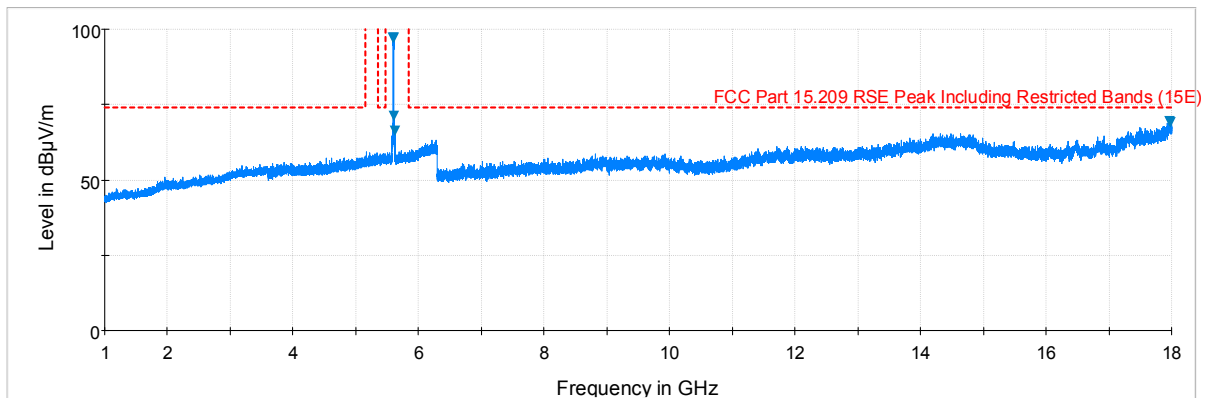

Preview Result 1-PK+ FCC Part 15.209 RSE Peak Including Restricted Bands (15E) Final_Result PK+


Plot 7-6. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 17 of 43

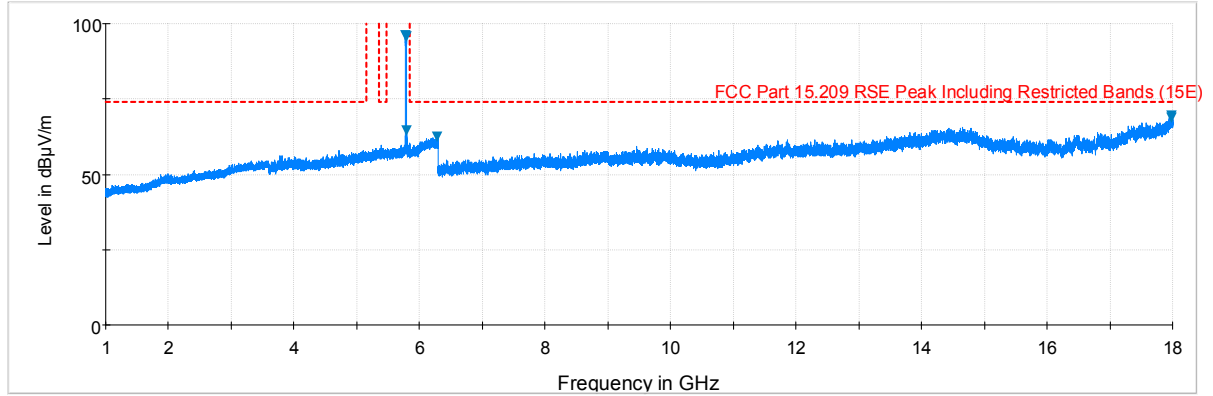



Preview Result 1-PK+ FCC Part 15.209 RSE Peak Including Restricted Bands (15E) Final_Result PK+

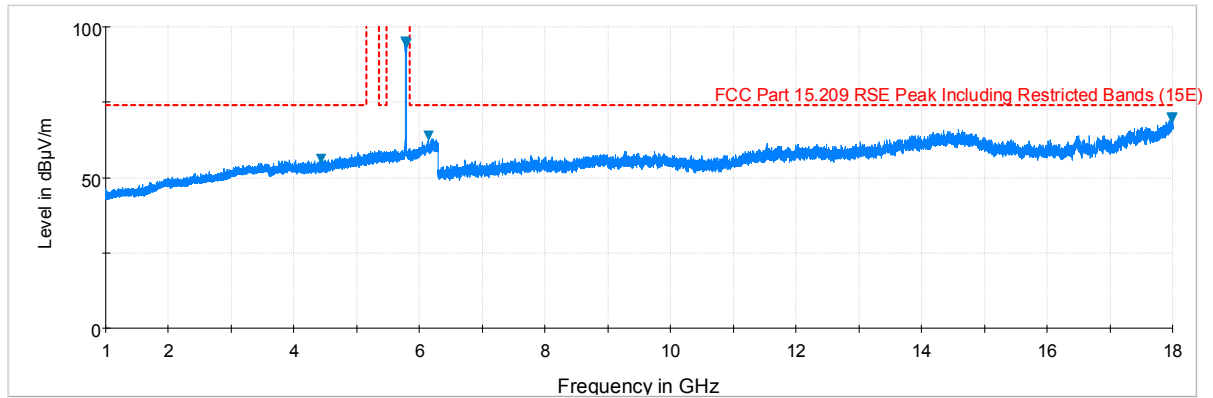Plot 7-7. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)




Preview Result 1-PK+ FCC Part 15.209 RSE Peak Including Restricted Bands (15E) Final_Result PK+

Plot 7-8. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)


FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 18 of 43

Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

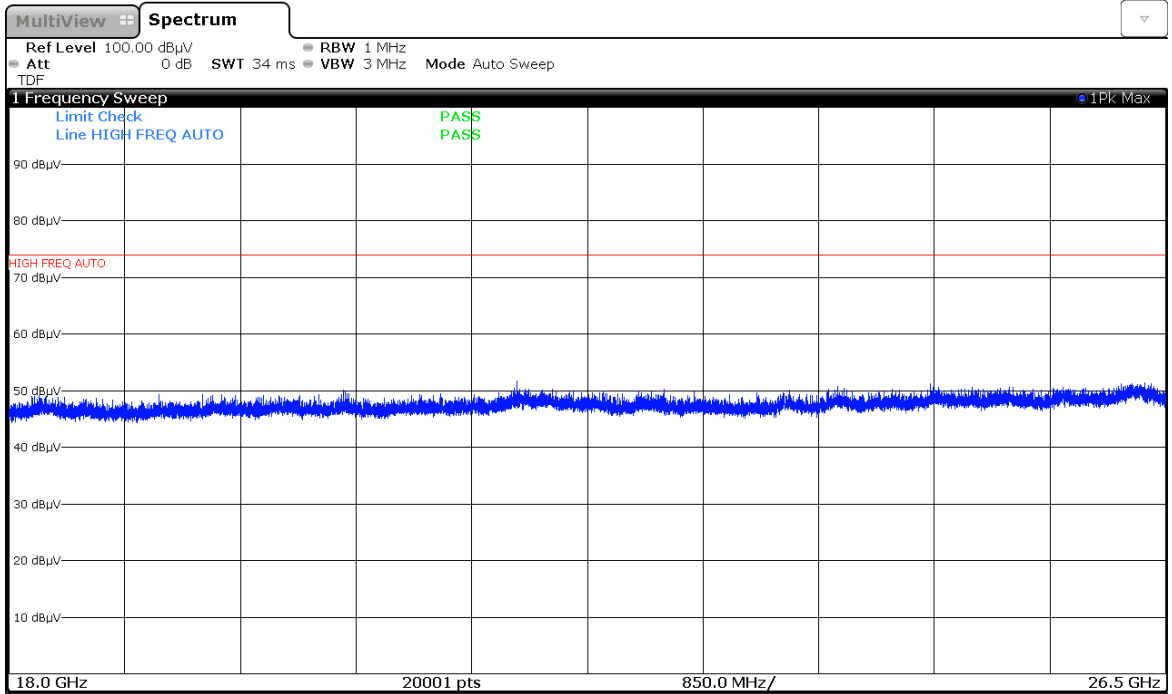


Plot 7-9. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)

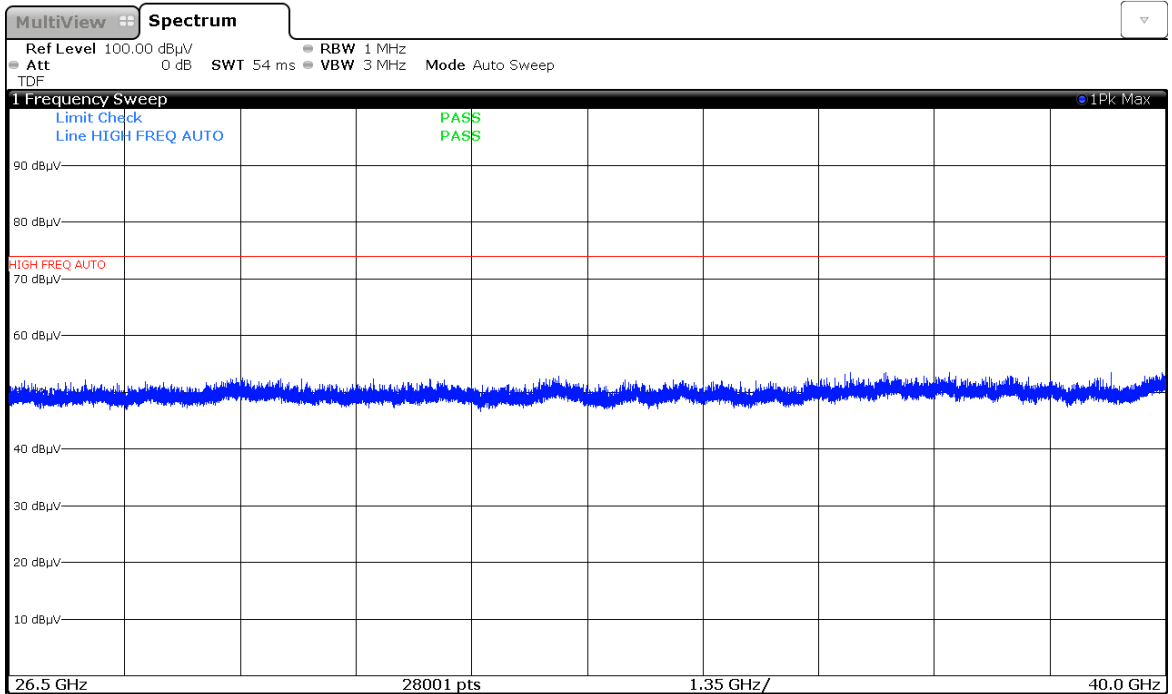


Plot 7-10. Radiated Spurious Plot above 26GHz (802.11a – Ant. Pol. H)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 19 of 43

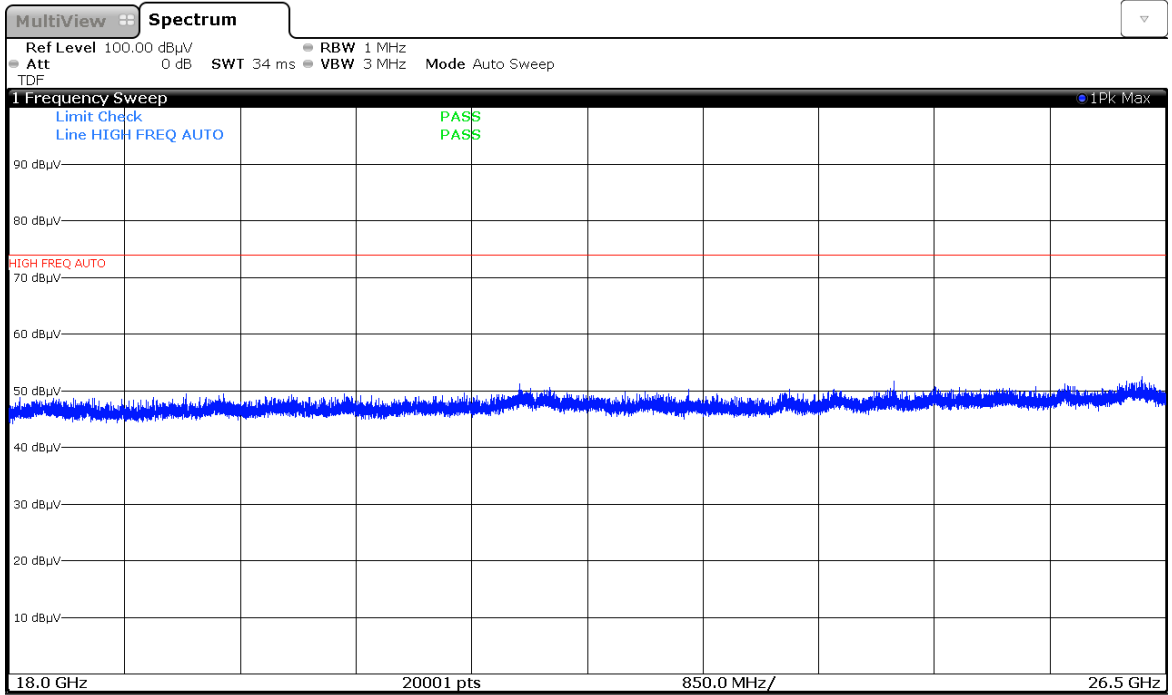

Plot 7-11. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

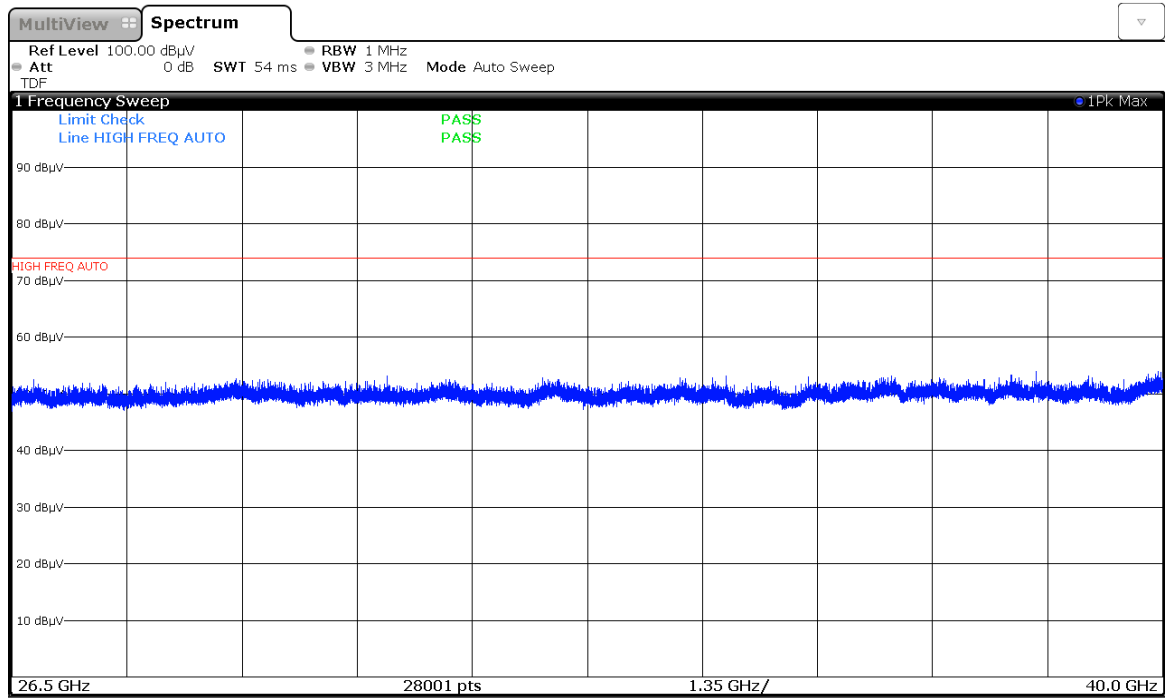

Plot 7-12. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 20 of 43

Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	V	-	-	-62.56	11.76	0.00	56.20	68.20	-12.00
* 15540.00	Average	V	-	-	-79.86	17.60	0.00	44.74	53.98	-9.24
* 15540.00	Peak	V	-	-	-63.30	17.60	0.00	61.30	73.98	-12.68
* 20720.00	Average	V	-	-	-70.81	7.93	-9.54	34.58	53.98	-19.40
* 20720.00	Peak	V	-	-	-59.34	7.93	-9.54	46.05	73.98	-27.93
25900.00	Peak	V	-	-	-57.48	8.42	-9.54	48.40	68.20	-19.80

Table 7-6. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	V	-	-	-62.86	11.47	0.00	55.61	68.20	-12.59
* 15600.00	Average	V	-	-	-78.81	17.43	0.00	45.62	53.98	-8.36
* 15600.00	Peak	V	-	-	-63.58	17.43	0.00	60.85	73.98	-13.13
* 20800.00	Average	V	-	-	-71.21	7.84	-9.54	34.09	53.98	-19.89
* 20800.00	Peak	V	-	-	-59.00	7.84	-9.54	46.30	73.98	-27.68
26000.00	Peak	V	-	-	-57.35	8.60	-9.54	48.71	68.20	-19.49

Table 7-7. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	-	-	-63.04	11.81	0.00	55.77	68.20	-12.43
* 15720.00	Average	V	-	-	-79.38	18.05	0.00	45.67	53.98	-8.31
* 15720.00	Peak	V	-	-	-63.75	18.05	0.00	61.30	73.98	-12.68
* 20960.00	Average	V	-	-	-72.01	7.88	-9.54	33.33	53.98	-20.65
* 20960.00	Peak	V	-	-	-59.89	7.88	-9.54	45.45	73.98	-28.53
26200.00	Peak	V	-	-	-57.16	8.59	-9.54	48.88	68.20	-19.32

Table 7-8. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	-	-	-62.38	11.90	0.00	56.52	68.20	-11.68
* 15780.00	Average	V	-	-	-80.78	16.92	0.00	43.14	53.98	-10.84
* 15780.00	Peak	V	-	-	-62.81	16.92	0.00	61.11	73.98	-12.87
* 21040.00	Average	V	-	-	-71.98	8.12	-9.54	33.60	53.98	-20.38
* 21040.00	Peak	V	-	-	-59.78	8.12	-9.54	45.80	73.98	-28.18
26300.00	Peak	V	-	-	-57.35	8.91	-9.54	49.02	68.20	-19.18

Table 7-9. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	-	-	-63.14	11.69	0.00	55.55	68.20	-12.65
* 15840.00	Average	V	-	-	-79.65	17.04	0.00	44.39	53.98	-9.59
* 15840.00	Peak	V	-	-	-63.17	17.04	0.00	60.87	73.98	-13.11
* 21120.00	Average	V	-	-	-71.35	7.97	-9.54	34.08	53.98	-19.90
* 21120.00	Peak	V	-	-	-61.75	7.97	-9.54	43.68	73.98	-30.30
26400.00	Peak	V	-	-	-58.65	8.99	-9.54	47.80	68.20	-20.40

Table 7-10. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-79.56	12.24	0.00	39.68	53.98	-14.30
* 10640.00	Peak	V	-	-	-63.53	12.24	0.00	55.71	73.98	-18.27
* 15960.00	Average	V	-	-	-80.71	17.22	0.00	43.51	53.98	-10.46
* 15960.00	Peak	V	-	-	-62.82	17.22	0.00	61.40	73.98	-12.57
* 21280.00	Average	V	-	-	-71.33	7.93	-9.54	34.05	53.98	-19.92
* 21280.00	Peak	V	-	-	-60.99	7.93	-9.54	44.39	73.98	-29.58
26600.00	Peak	V	-	-	-58.65	-8.13	-9.54	30.68	68.20	-37.52

Table 7-11. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-72.81	13.01	0.00	47.20	53.98	-6.78
* 11000.00	Peak	V	-	-	-63.76	13.01	0.00	56.25	73.98	-17.73
16500.00	Peak	V	-	-	-72.15	20.25	0.00	55.10	68.20	-13.10
22000.00	Peak	V	-	-	-59.68	8.43	-9.54	46.20	68.20	-22.00
27500.00	Peak	V	-	-	-47.56	-8.80	-9.54	41.10	68.20	-27.10

Table 7-12. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	V	-	-	-73.68	13.64	0.00	46.96	53.98	-7.02
* 11160.00	Peak	V	-	-	-63.71	13.64	0.00	56.93	73.98	-17.05
16740.00	Peak	V	-	-	-71.35	18.21	0.00	53.86	68.20	-14.34
* 22320.00	Average	V	-	-	-72.65	8.36	-9.54	33.17	53.98	-20.81
* 22320.00	Peak	V	-	-	-59.75	8.36	-9.54	46.07	73.98	-27.91
27900.00	Peak	V	-	-	-46.80	-9.12	-9.54	41.54	68.20	-26.66

Table 7-13. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-73.60	14.01	0.00	47.41	53.98	-6.57
* 11440.00	Peak	V	-	-	-62.87	14.01	0.00	58.14	73.98	-15.84
17160.00	Peak	V	-	-	-72.05	20.65	0.00	55.60	68.20	-12.60
* 22880.00	Average	V	-	-	-71.63	8.28	-9.54	34.11	53.98	-19.87
* 22880.00	Peak	V	-	-	-59.71	8.28	-9.54	46.03	73.98	-27.95
28600.00	Peak	V	-	-	-46.38	-8.95	-9.54	42.13	68.20	-26.07

Table 7-14. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-73.81	14.32	0.00	47.51	53.98	-6.47
* 11490.00	Peak	V	-	-	-63.81	14.32	0.00	57.51	73.98	-16.47
17235.00	Peak	V	-	-	-72.00	21.26	0.00	56.26	68.20	-11.94
* 22980.00	Average	V	-	-	-71.34	8.11	-9.54	34.23	53.98	-19.75
* 22980.00	Peak	V	-	-	-61.71	8.11	-9.54	43.86	73.98	-30.12
28725.00	Peak	V	-	-	-46.50	-9.43	-9.54	41.52	68.20	-26.68

Table 7-15. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-74.38	14.61	0.00	47.23	53.98	-6.75
* 11570.00	Peak	V	-	-	-62.81	14.61	0.00	58.80	73.98	-15.18
17355.00	Peak	V	-	-	-72.15	22.75	0.00	57.60	68.20	-10.60
23140.00	Peak	V	-	-	-61.84	8.21	-9.54	43.83	68.20	-24.37
28925.00	Peak	V	-	-	-46.48	-9.65	-9.54	41.33	68.20	-26.87

Table 7-16. Radiated Measurements


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-73.05	14.87	0.00	48.82	53.98	-5.16
* 11650.00	Peak	V	-	-	-62.73	14.87	0.00	59.14	73.98	-14.84
17475.00	Peak	V	-	-	-72.84	23.13	0.00	57.29	68.20	-10.91
23300.00	Peak	V	-	-	-59.75	8.28	-9.54	45.98	68.20	-22.22
29125.00	Peak	V	-	-	-46.79	-9.90	-9.54	40.77	68.20	-27.43

Table 7-17. Radiated Measurements

7.7.2 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

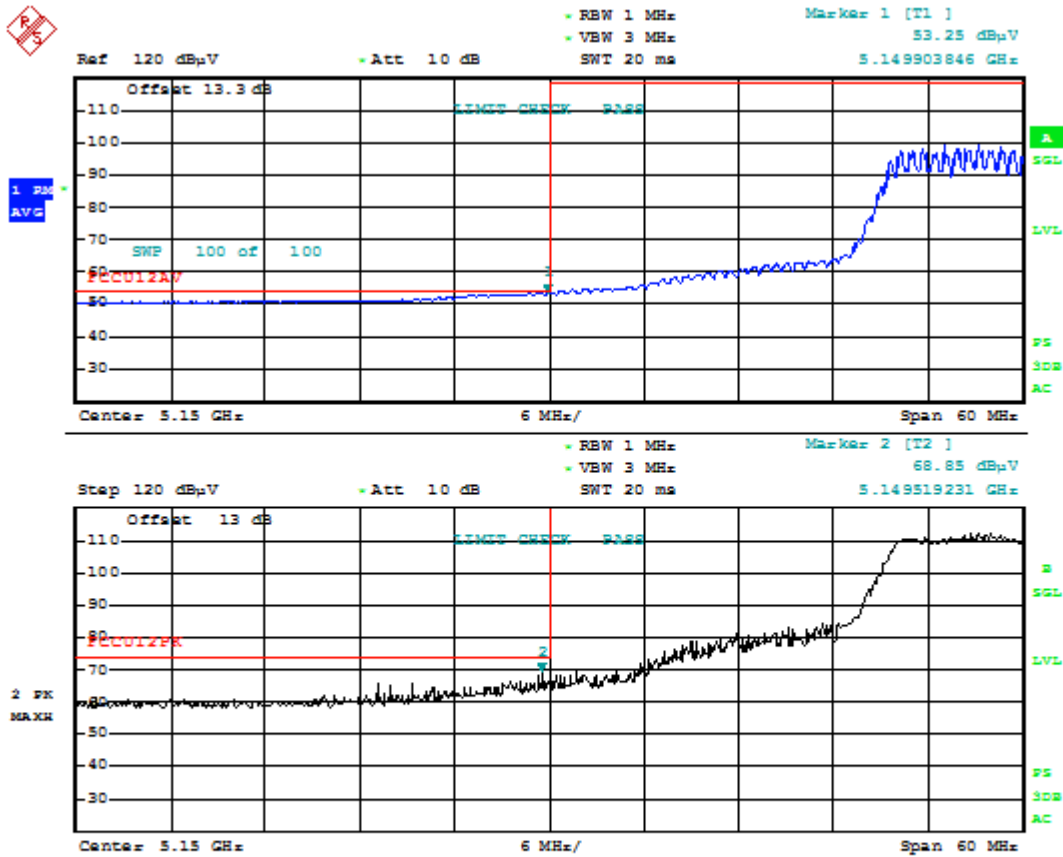

Date: 19. DEC. 2016 19:19:03

Plot 7-13. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 27 of 43

Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

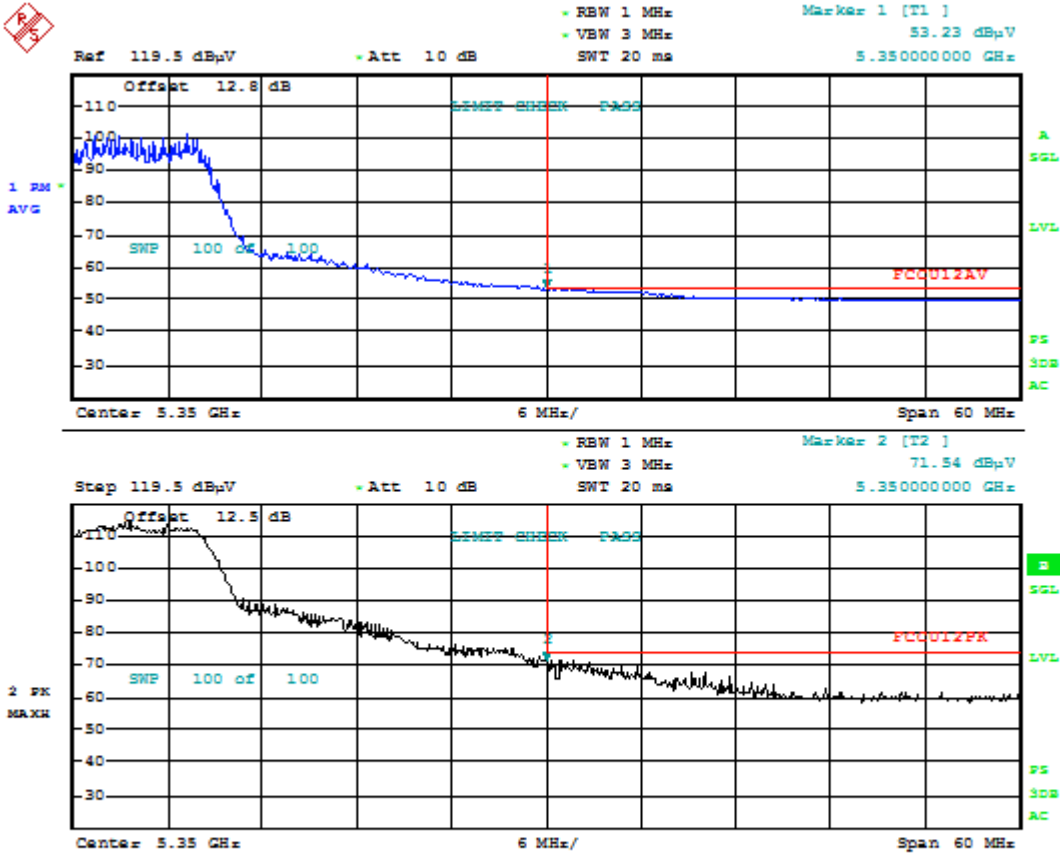

Date: 20.DEC.2016 14:34:32

Plot 7-14. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 28 of 43

Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

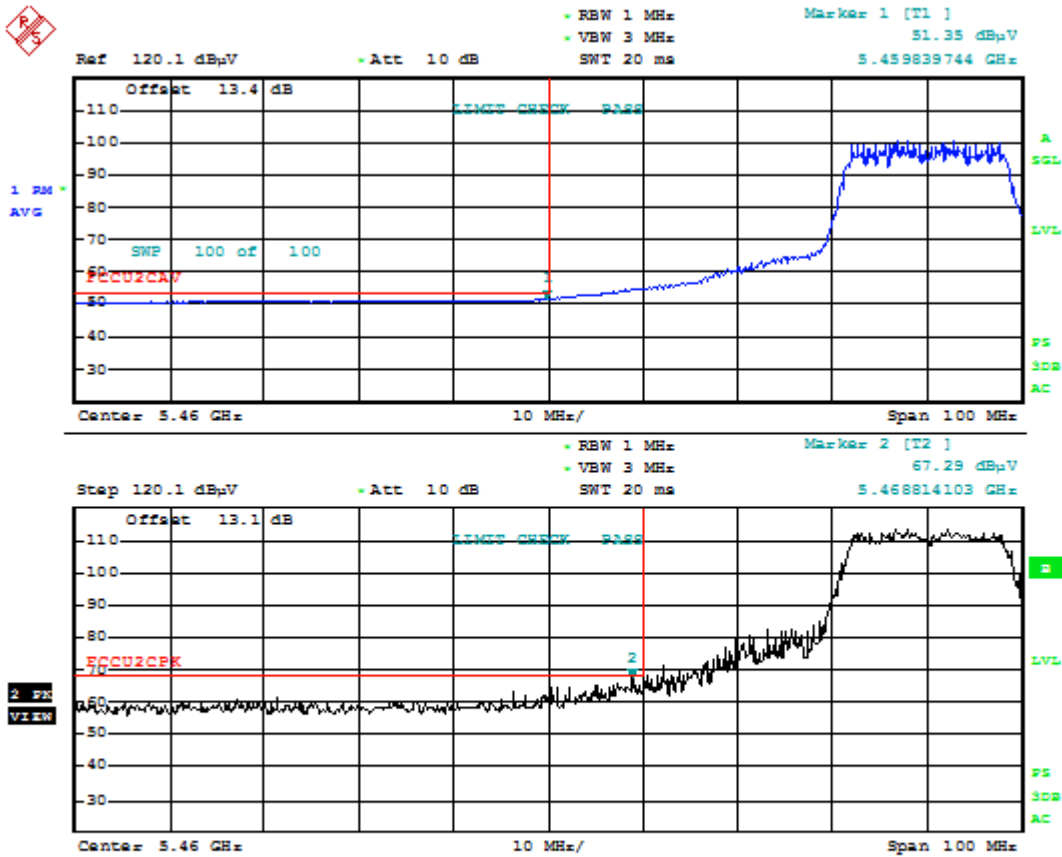

Date: 20.DEC.2016 15:09:28


Plot 7-15. Radiated Restricted Lower Band Edge Plot (Average and Peak – UNII Band 2C)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 29 of 43

Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

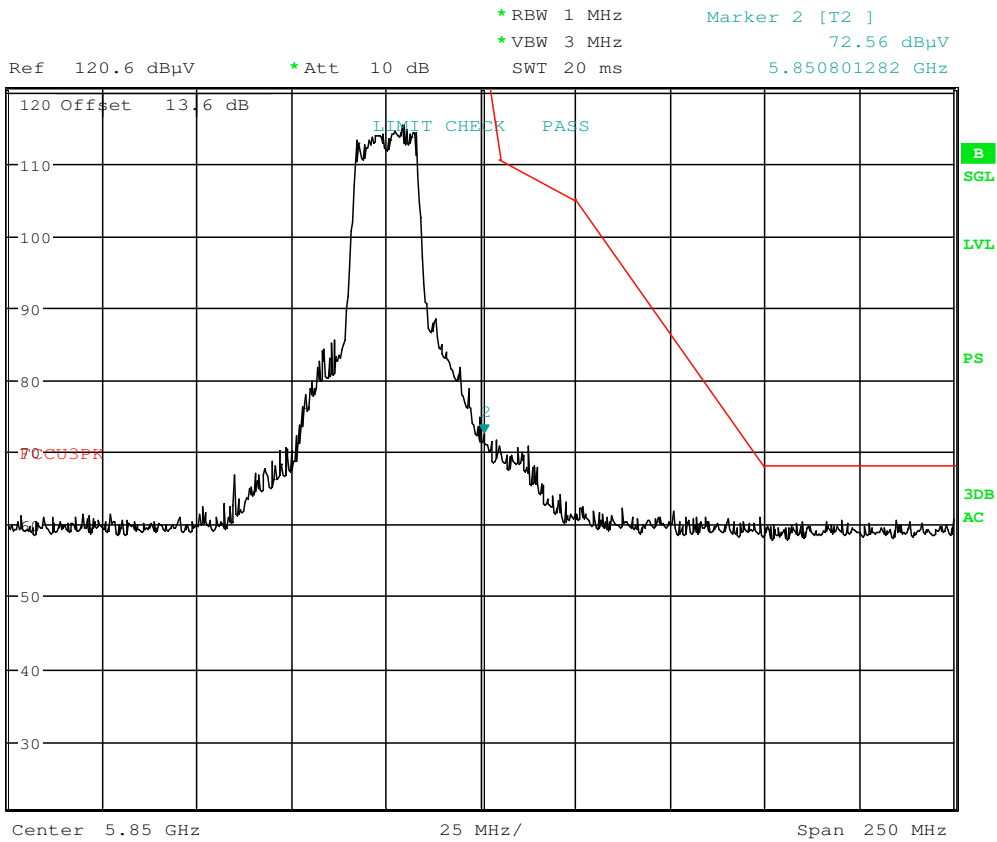


Date: 20.DEC.2016 16:30:17

Plot 7-16. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 30 of 43

7.7.3 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

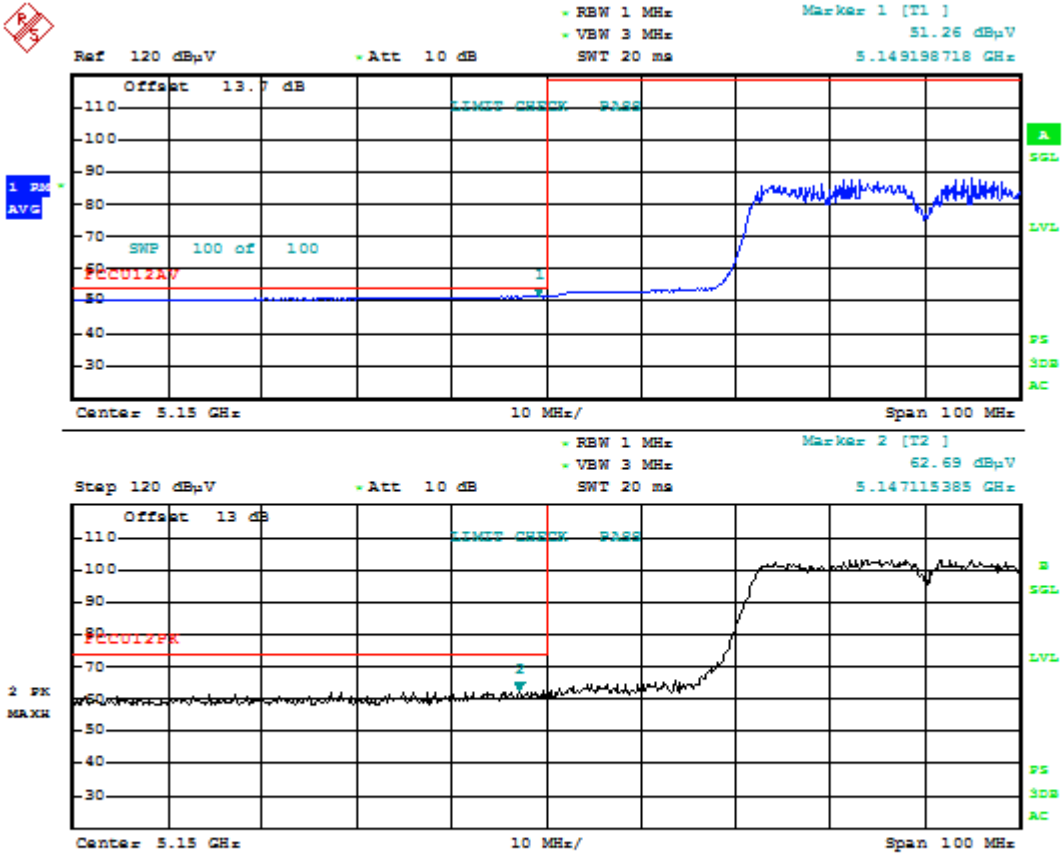

Date: 19. DEC. 2016 19:32:24


Plot 7-17. Radiated Restricted Lower Band Edge Plot (Average and Peak – UNII Band 1)

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 31 of 43

Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

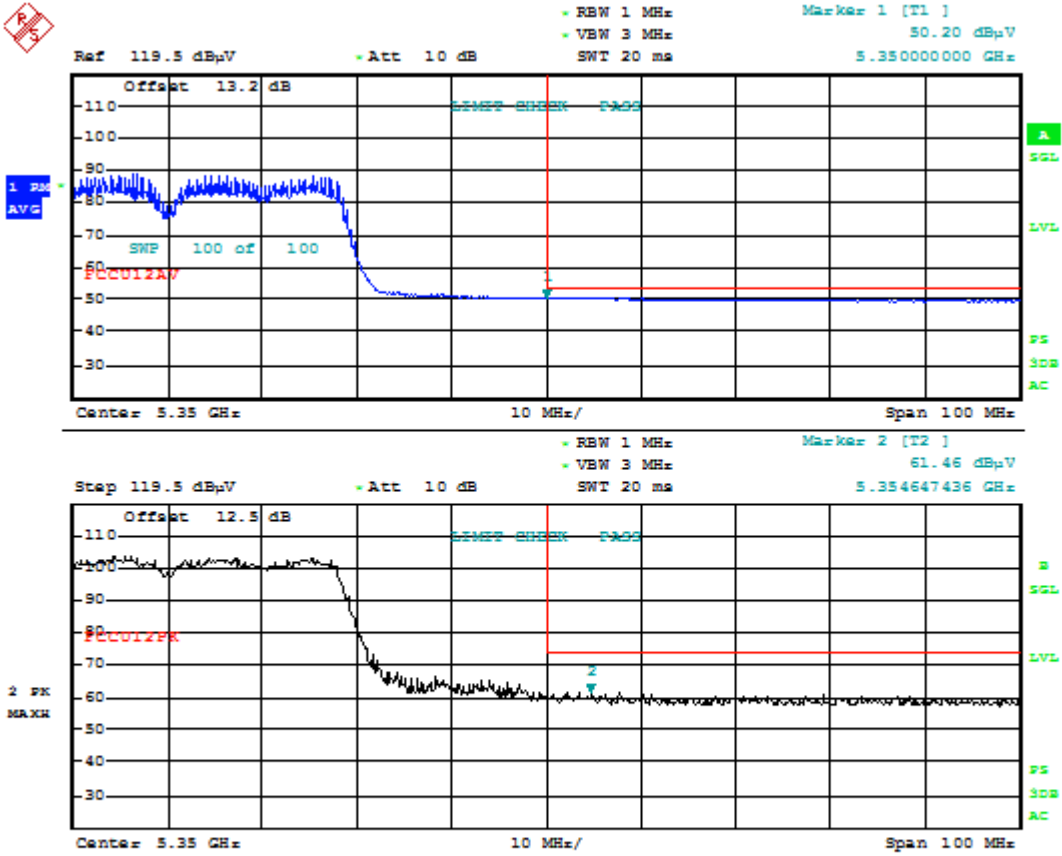

Date: 20.DEC.2016 14:37:35


Plot 7-18. Radiated Restricted Upper Band Edge Plot (Average and Peak – UNII Band 2A)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 32 of 43

Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

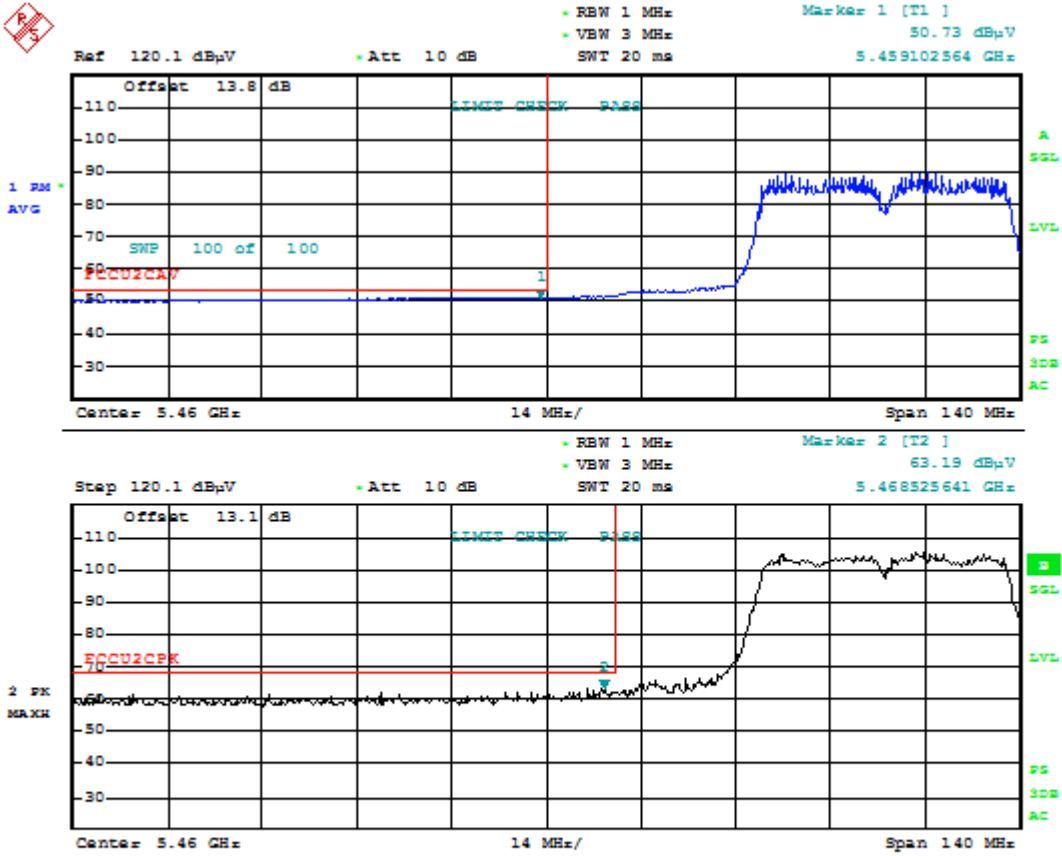

Date: 20.DEC.2016 15:20:23


Plot 7-19. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 33 of 43

Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

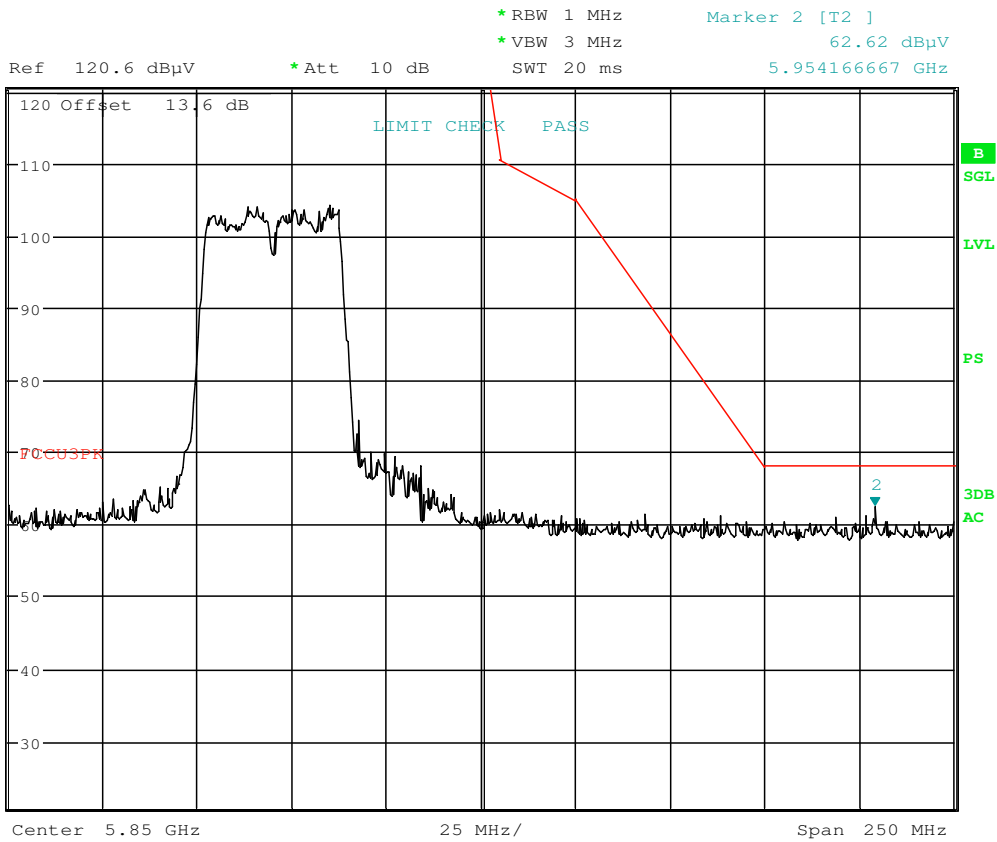


Date: 20.DEC.2016 16:33:17

Plot 7-20. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 34 of 43

7.7.4 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

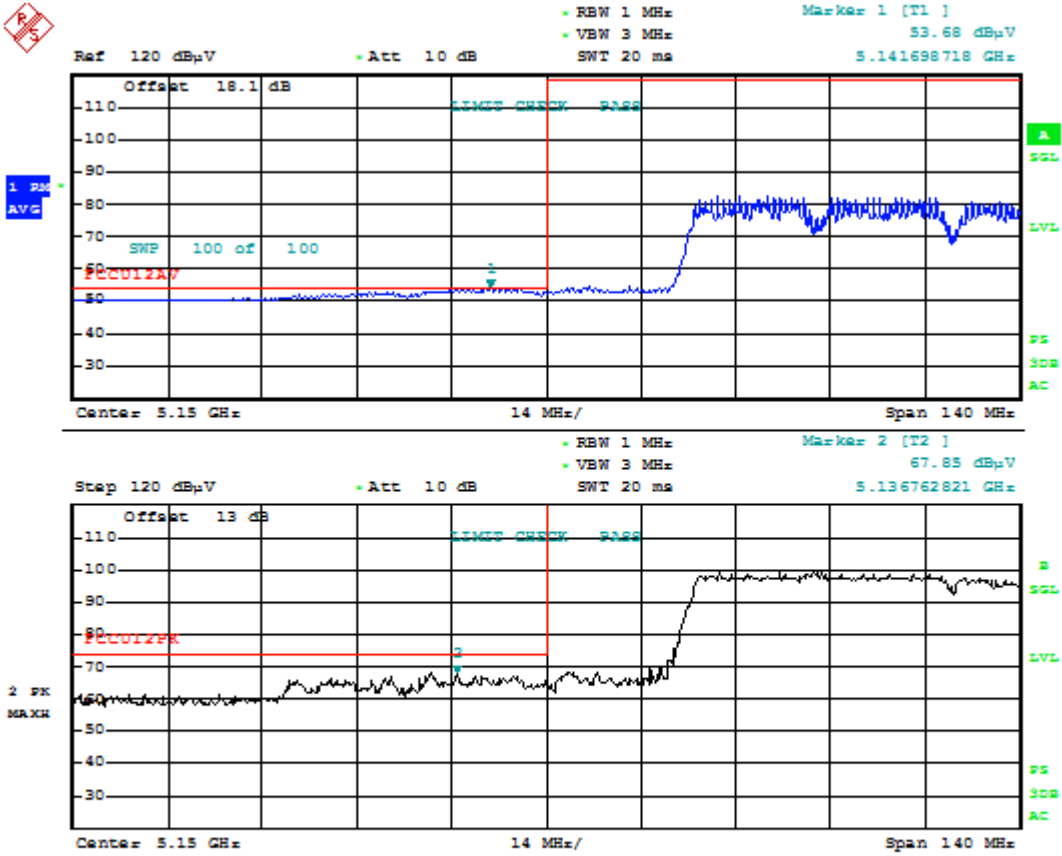

Date: 19. DEC. 2016 19:36:30


Plot 7-21. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 35 of 43

Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

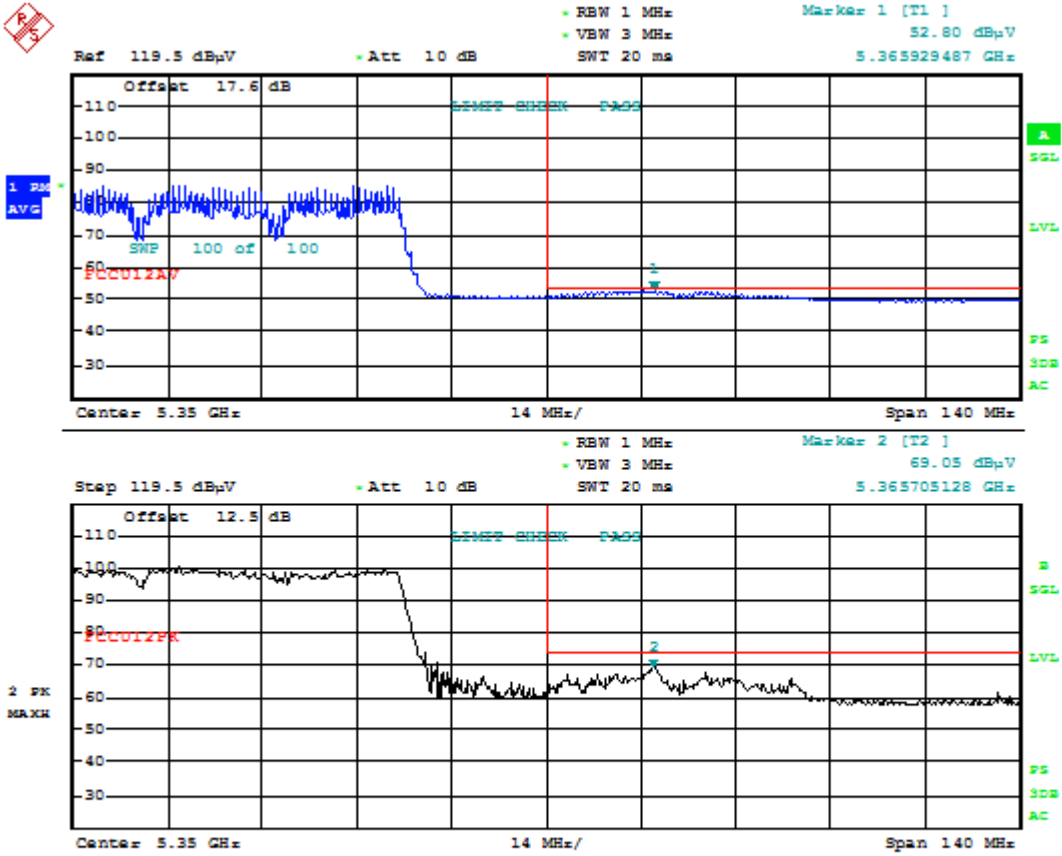


Date: 20.DEC.2016 14:43:47

Plot 7-22. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 36 of 43

Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

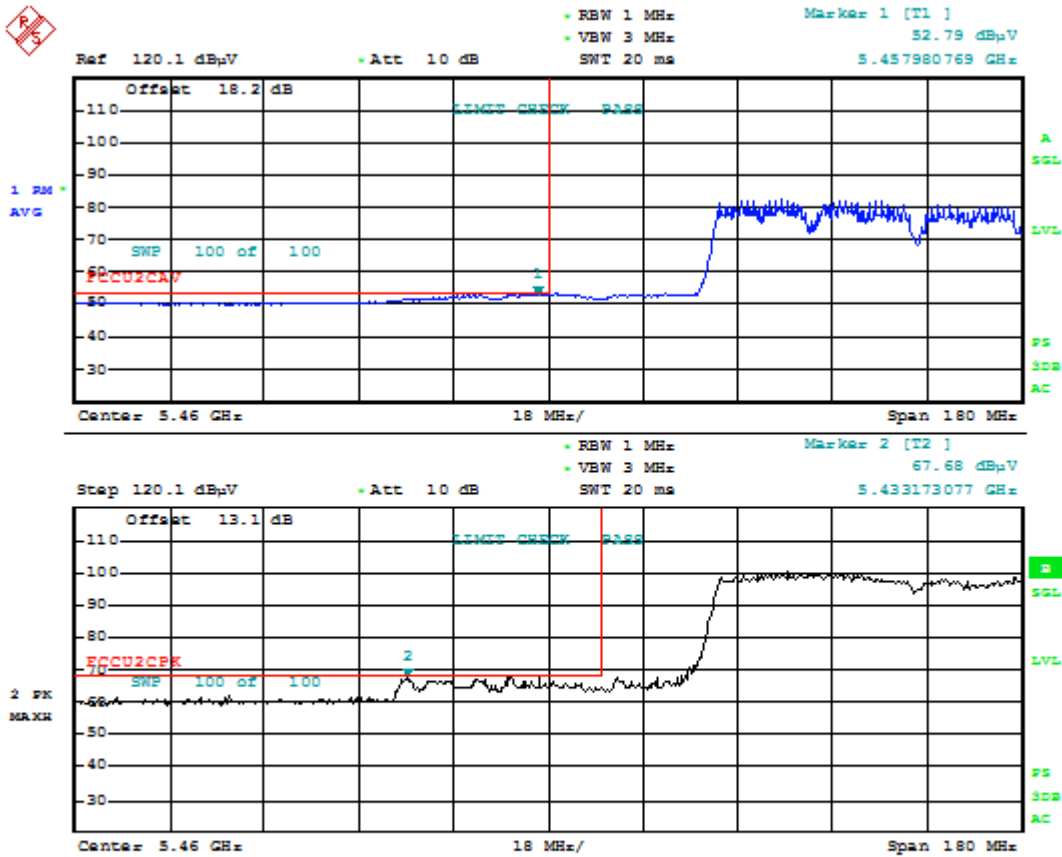

Date: 20.DEC.2016 15:30:15


Plot 7-23. Radiated Restricted Lower Band Edge Plot (Average and Peak – UNII Band 2C)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 37 of 43

Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

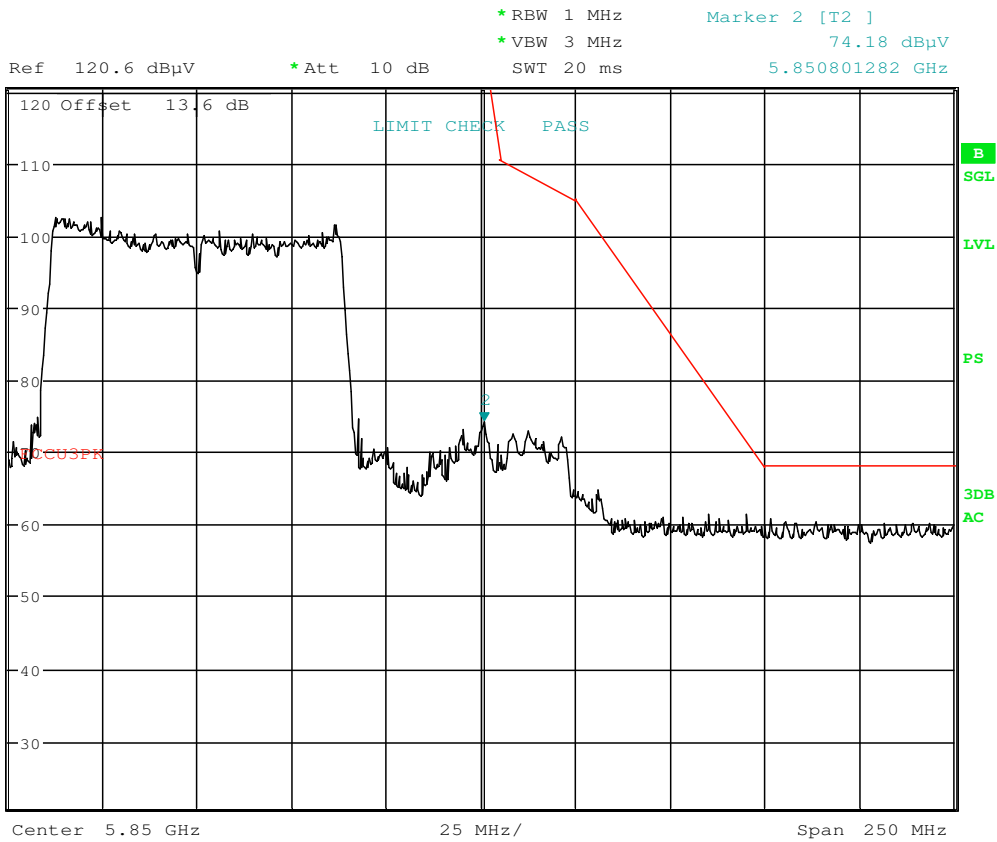

Date: 20.DEC.2016 16:37:50

Plot 7-24. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 38 of 43

7.4 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-18 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-18. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

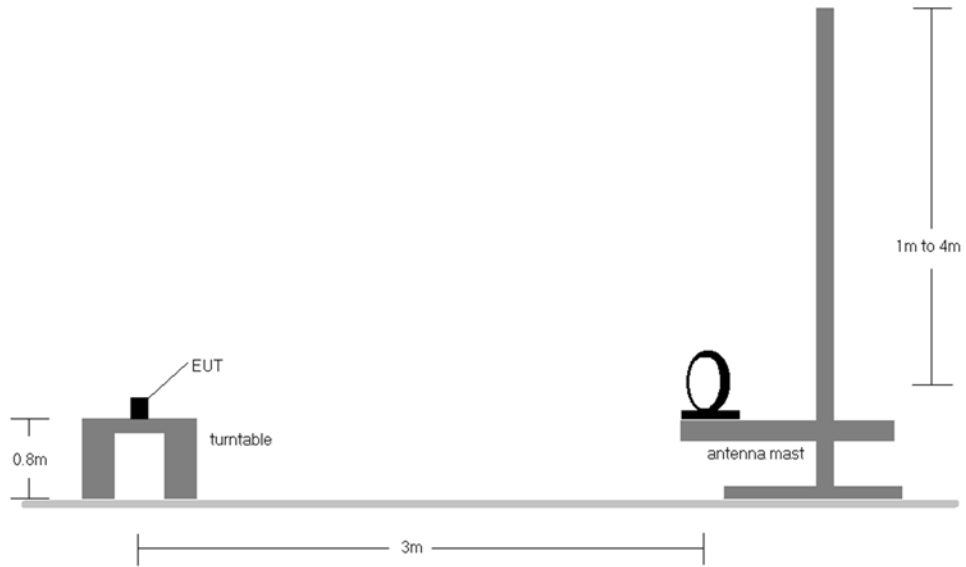


Figure 7-3. Radiated Test Setup < 30MHz

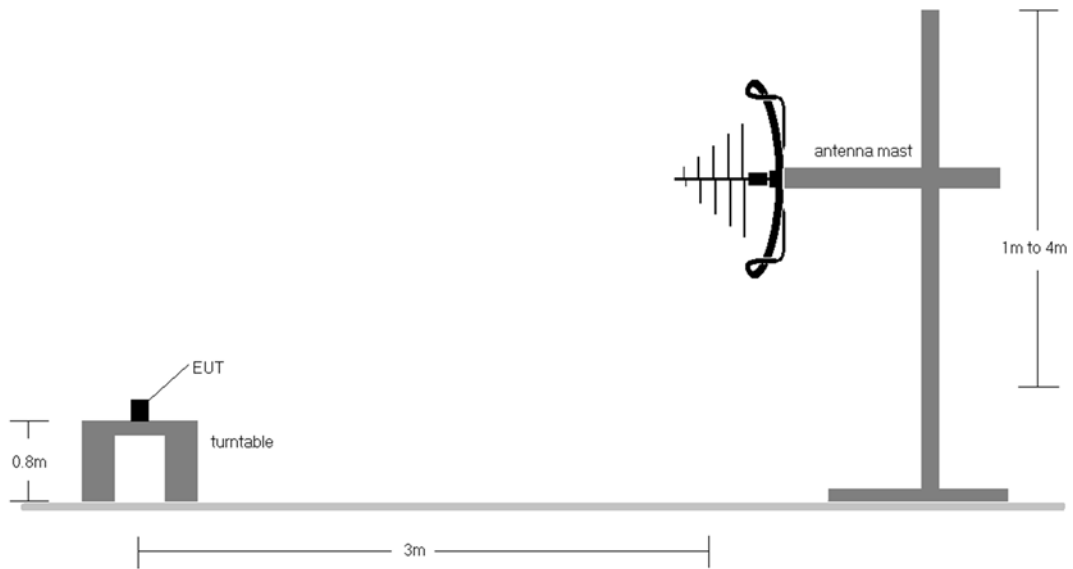




Figure 7-4. Radiated Test Setup < 1GHz

FCC ID: XO2SPB209A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	H&D Wireless	Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 40 of 43


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-18.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested while powered by an DC power source.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 41 of 43


Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

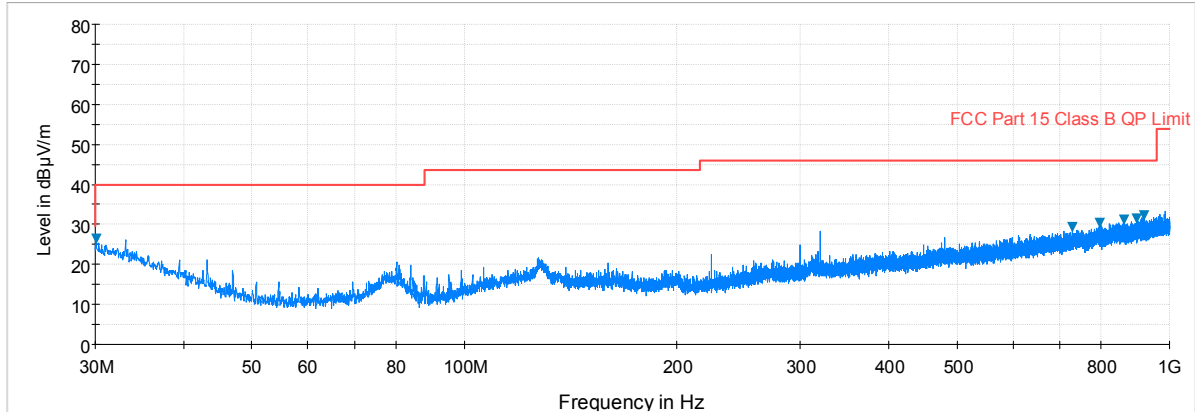

Preview Result 1-PK+ FCC Part 15 Class B QP Limit Final_Result PK+

Plot 7-25. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

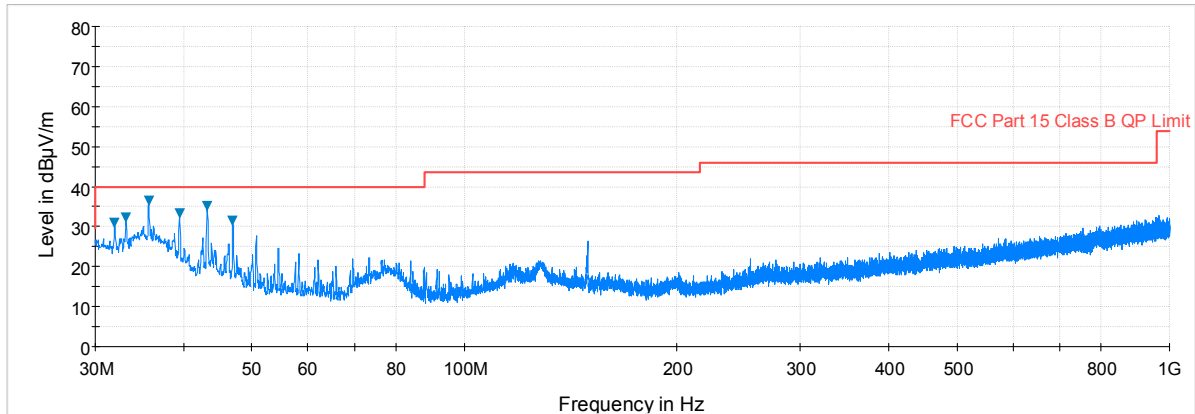

Preview Result 1-PK+ FCC Part 15 Class B QP Limit Final_Result PK+



Plot 7-26. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

Note: Emissions shown in radiated spurious plots were investigated and was determined to come from support equipment for the EUT, i.e. laptop and power supply.

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 42 of 43

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **H&D Wireless AB Wifi/BT/NFC Module FCC ID: XO2SPB209A** is in compliance with Part 15E of the FCC Rules.

FCC ID: XO2SPB209A		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612302094-04.XO2	Test Dates: 12/14/16 - 1/24/2017	EUT Type: Wifi/BT/NFC Module		Page 43 of 43