

# TEST REPORT

**Reference No.**..... : WTH22X08173297W001  
**FCC ID** ..... : XOM-PWOSQU5526  
**Applicant** ..... : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED  
**Address** ..... : Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,  
Shangmeilin, Futian District, Shenzhen , China  
**Manufacturer** ..... : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED BRANCH  
**Address** ..... : A/B/C/D Building, Xitian Industrial Park, Dashuikeng Community,Guanlan  
Street, Longhua New District, Shenzhen City, China  
**Product Name** ..... : 55" SMART 4K UHD TV  
**Model No.**..... : RWOSQU5526  
**Standards** ..... : FCC Part 15.407  
**Date of Receipt sample** .... : 2022-08-25  
**Date of Test**..... : 2022-08-25 to 2022-09-06  
**Date of Issue** ..... : 2022-09-06  
**Test Report Form No.** ..... : WTX\_Part 15\_407W  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:

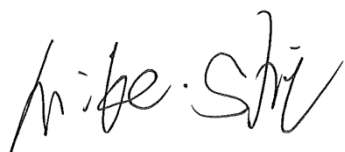

Mike Shi

Silin Chen

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....5**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....5

    1.2 TEST STANDARDS.....6

    1.3 TEST METHODOLOGY.....6

    1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING .....6

    1.5 EUT OPERATING DURING TEST .....7

    1.6 TEST FACILITY .....7

    1.7 EUT SETUP AND TEST MODE.....8

    1.8 MEASUREMENT UNCERTAINTY .....9

    1.9 TEST EQUIPMENT LIST AND DETAILS .....10

**2. SUMMARY OF TEST RESULTS .....12**

**3. ANTENNA REQUIREMENT .....13**

    3.1 STANDARD APPLICABLE.....13

    3.2 EVALUATION INFORMATION .....13

**4. AUTOMATICALLY DISCONTINUE TRANSMISSION .....14**

    4.1 STANDARD APPLICABLE.....14

    4.2 SUMMARY OF TEST RESULTS .....14

**5. POWER SPECTRAL DENSITY .....15**

    5.1 STANDARD APPLICABLE.....15

    5.2 TEST PROCEDURE.....15

    5.3 SUMMARY OF TEST RESULTS/PLOTS .....16

**6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....17**

    6.1 STANDARD APPLICABLE.....17

    6.2 TEST PROCEDURE.....17

    6.3 SUMMARY OF TEST RESULTS/PLOTS .....19

**7. MAXIMUM CONDUCTED OUTPUT POWER.....20**

    7.1 STANDARD APPLICABLE.....20

    7.2 TEST PROCEDURE.....20

    7.3 SUMMARY OF TEST RESULTS/PLOTS .....21

**8. RADIATED SPURIOUS EMISSIONS.....22**

    8.1 STANDARD APPLICABLE.....22

    8.2 TEST PROCEDURE.....22

    8.3 TEST RECEIVER SETUP .....24

    8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....24

    8.5 SUMMARY OF TEST RESULTS/PLOTS .....25

**9. FREQUENCY STABILITY .....46**

    9.1 STANDARD APPLICABLE.....46

    9.2 TEST PROCEDURE.....46

    9.3 SUMMARY OF TEST RESULTS/PLOTS .....46

**10 CONDUCTED EMISSIONS .....47**

    10.1 TEST PROCEDURE.....47

    10.2 BASIC TEST SETUP BLOCK DIAGRAM.....47

    10.3 TEST RECEIVER SETUP .....47

    10.4 SUMMARY OF TEST RESULTS/PLOTS .....47

**APPENDIX SUMMARY .....50**

**APPENDIX A.....51**

**APPENDIX B.....72**

**APPENDIX C.....109**

**APPENDIX D.....130**

**APPENDIX PHOTOGRAPHS.....141**

**Report version**

Version No.	Date of issue	Description
Rev.00	2022-09-06	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Factory: YIBIN WANXIN Electronic Technology Co.,LTD  
 Address of factory: Building 5, building6, Yibin Wanxin Electronic Technology Intelligent Terminal Industrial Park, Xingang Road West 136 Lingang Economic Development Zone Yibin city, Sichuan province.

General Description of EUT	
Product Name:	55" SMART 4K UHD TV
Trade Name:	RCA, PROSCAN, RCA SCENIUM, TECHNICOLOR, SYLVANIA, RCASMA TVIRTUOSO
Model No.:	RWOSQU5526
Adding Model(s):	Q55S218-U-A-I, RWOSQU55XX, XXXXXXXX55XXXXXXXXX(Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC120V/60Hz
Battery Capacity:	/
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model RWOSQU5526, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n-HT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	5150-5250MHz: Antenna 1: 13.55dBm (Conducted) Antenna 2: 12.77dBm (Conducted) 5725-5850MHz: Antenna 1: 13.43dBm (Conducted) Antenna 2: 13.41dBm (Conducted)
Type of Modulation:	BPSK, QPSK, 16QAM, 64QAM, 256QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	5150-5250MHz Antenna 1 & 2: 1.93dBi 5725-5850MHz Antenna 1 & 2: 1.73 dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.407**: General technical requirements.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**KDB789033 D02 v02r01**: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subpart.

**KDB662911 D01 Multiple Transmitter Output v02r01**: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Table for parameters of Test Software setting

Use “QATool\_Dbg.exe” and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. Test use the customer default power level, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Mode	Ant.	Test Frequency (MHz)													
		NCB: 20MHz													
		5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825	
802.11a 6Mbps	ANT 1	1F	1F	1F	/	/	/	/	/	/	/	22	22	22	
	ANT 2	24	24	24	/	/	/	/	/	/	/	22	22	22	
802.11n-HT20 MCS0	ANT 1	1F	1F	1F	/	/	/	/	/	/	/	21	22	22	
	ANT 2	23	23	23	/	/	/	/	/	/	/	23	23	23	
Mode	Ant.	NCB: 40MHz													
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795				
802.11n-HT40 MCS0	ANT 1	1F	1F	/	/	/	/	/	/	/	/	22	22		
	ANT 2	23	23	/	/	/	/	/	/	/	/	22	22		
Mode	Ant.	NCB: 80MHz													
		5210	5290	5530	5610	5690	5775								
802.11ac-VH80 MCS0/Nss2	ANT 1	1E	/	/	/	/	21								
	ANT 2	22	/	/	/	/	21								

## **1.5 EUT Operating during test**

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

## **1.6 Test Facility**

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz ,5775 MHz
<p>Note 1: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report; 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.</p> <p>Note 2: The 5GHz WIFI has two antennas and support Multiple Outputs for 802.11n/ac mode for this report; For 5150-5250MHz: Antenna 1 Gain is 1.93dBi; Antenna 2 Gain is 1.93dBi; For 5725-5850MHz: Antenna 1 Gain is 1.73dBi; Antenna 2 Gain is 1.73dBi; According to KDB 662911, for same directional gain: For 5150-5250MHz: Directional gain = <math>G_{ANT} + 10 \log(N_{ANT})</math> dBi = 1.93+10log(2) dBi=4.94dBi For 5725-5850MHz: Directional gain = <math>G_{ANT} + 10 \log(N_{ANT})</math> dBi = 1.73+10log(2) dBi=4.74dBi</p>		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI	1.5	Shielded	Without Ferrit

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Dell	9MMJ442	/



**1.8 Measurement Uncertainty**

<b>Measurement uncertainty</b>		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

**1.9 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SMET-1313	Spectrum Analyzer	Agilent	N9020A	MY54320548	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91705	2021-04-27	2023-04-26

				82		
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber B: Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber C: Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
<input checked="" type="checkbox"/> Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
<input type="checkbox"/> Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has two integral antennas, fulfill the requirement of this section.

## **4. Automatically Discontinue Transmission**

---

### **4.1 Standard Applicable**

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **4.2 Summary of Test Results**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

## 5. Power Spectral Density

---

### 5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or  $11\text{dBm} + 10 \log B$ , where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1MHz RBW to satisfy directly the 1MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1MHz, or 500kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If

measurements are performed using a reduced resolution bandwidth ( $< 1$  MHz, or  $< 500$ kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.1.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500\text{kHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1\text{MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since  $RBW=100\text{kHz}$  is available on nearly all spectrum analyzers.

### **5.3 Summary of Test Results/Plots**

**Please refer to Appendix A**



## 6. Emission Bandwidth and Occupied Bandwidth

---

### 6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or  $11\text{dBm} + 10 \log B$ , where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

### 6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6dB emission bandwidth of at least 500KHz for the band 5.715-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

## D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW  $\geq 3 * RBW$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Reference No.: WTH22X08173297W001

### **6.3 Summary of Test Results/Plots**

**Please refer to Appendix B**

## 7. Maximum Conducted Output Power

---

### 7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or  $11\text{dBm} + 10 \log B$ , where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW  $\geq$  3MHz.
- (iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

### **7.3 Summary of Test Results/Plots**

**Please refer to Appendix C**

## 8. Radiated Spurious Emissions

---

### 8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
  - (i) All emissions shall be limited to a level of -27dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section. 789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.


### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

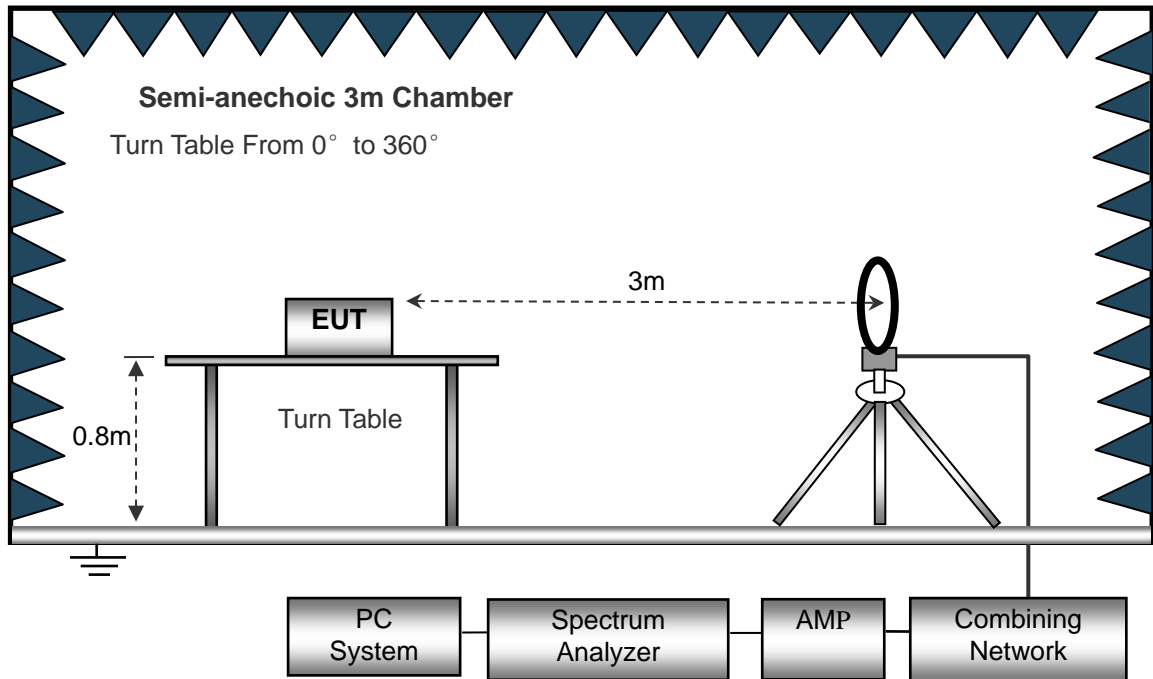

The test setup for emission measurement from 30 MHz to 1 GHz.

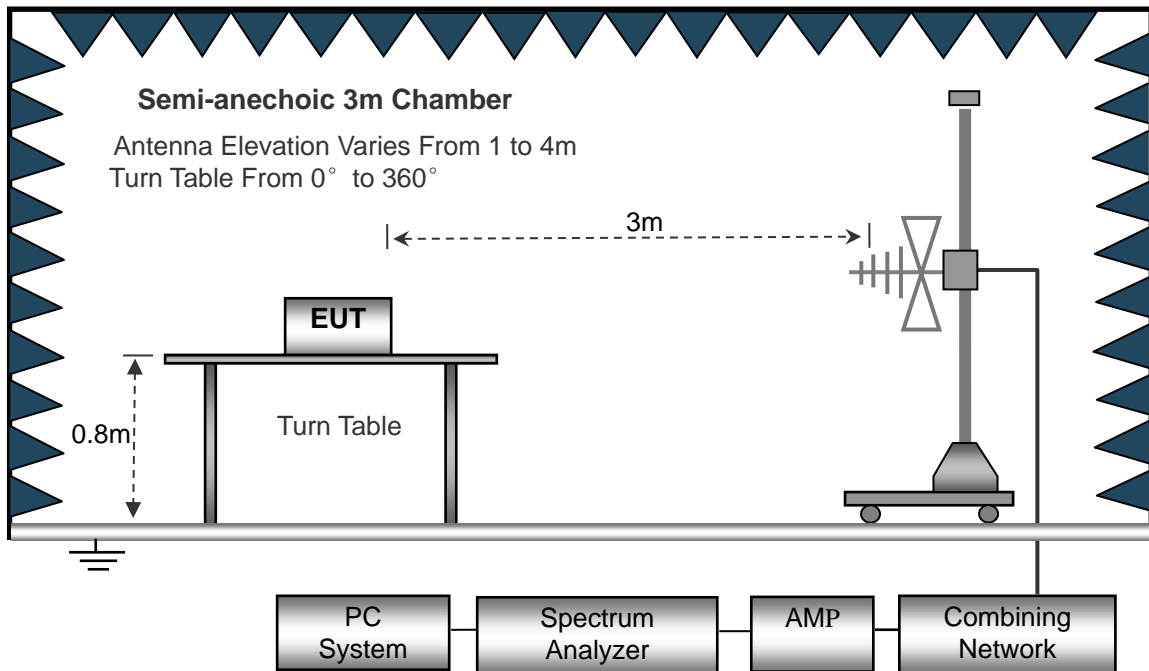

The test setup for emission measurement above 1GHz.

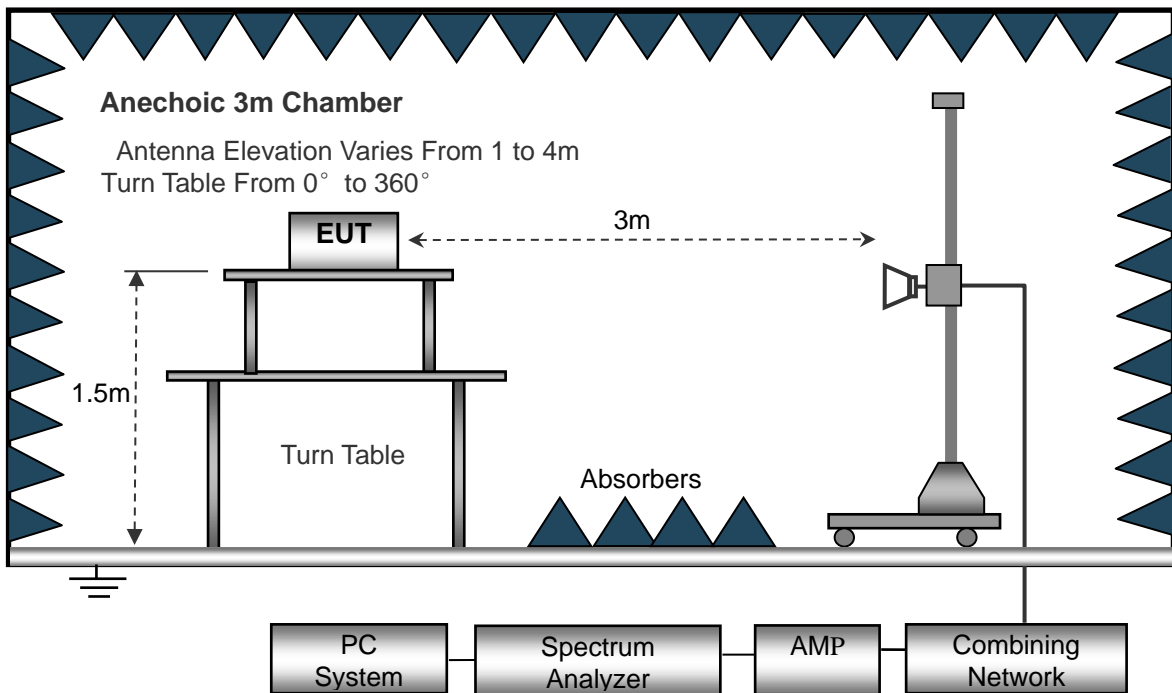

### 8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

### 8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$




### 8.5 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


- Spurious Emission From 30MHz to 1GHz
- Antenna 0(Worst case)
- 5150-5250MHz

802.11a(Worst case)			
Test Channel	5180MHz	Polarity:	Horizontal

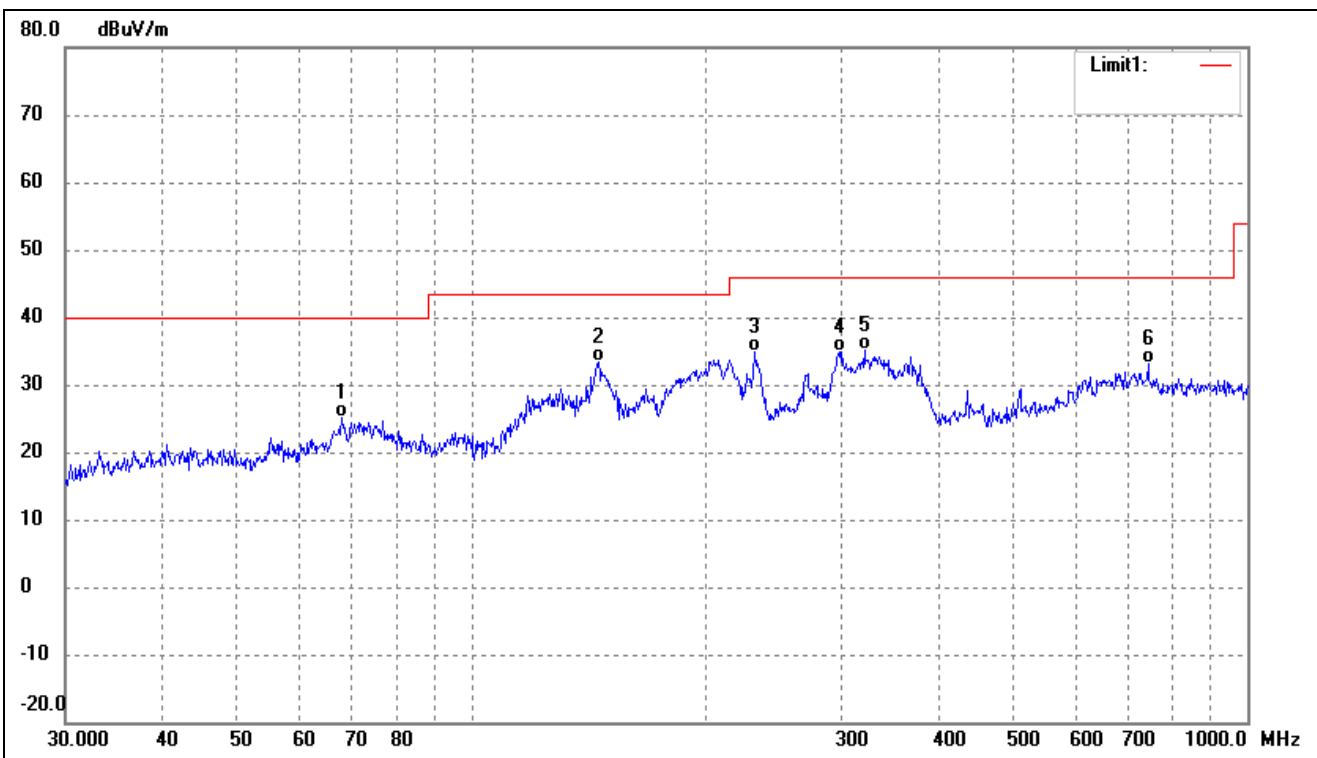


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	68.1514	34.97	-9.85	25.12	40.00	-14.88	-	-	QP
2	145.8611	45.86	-12.46	33.40	43.50	-10.10	-	-	QP
3	231.7179	43.67	-8.83	34.84	46.00	-11.16	-	-	QP
4	298.2681	41.89	-7.01	34.88	46.00	-11.12	-	-	QP
5	321.0608	41.43	-6.30	35.13	46.00	-10.87	-	-	QP
6	744.8661	31.31	1.72	33.03	46.00	-12.97	-	-	QP

802.11a(Worst case)			
Test Channel	5180MHz	Polarity:	Vertical

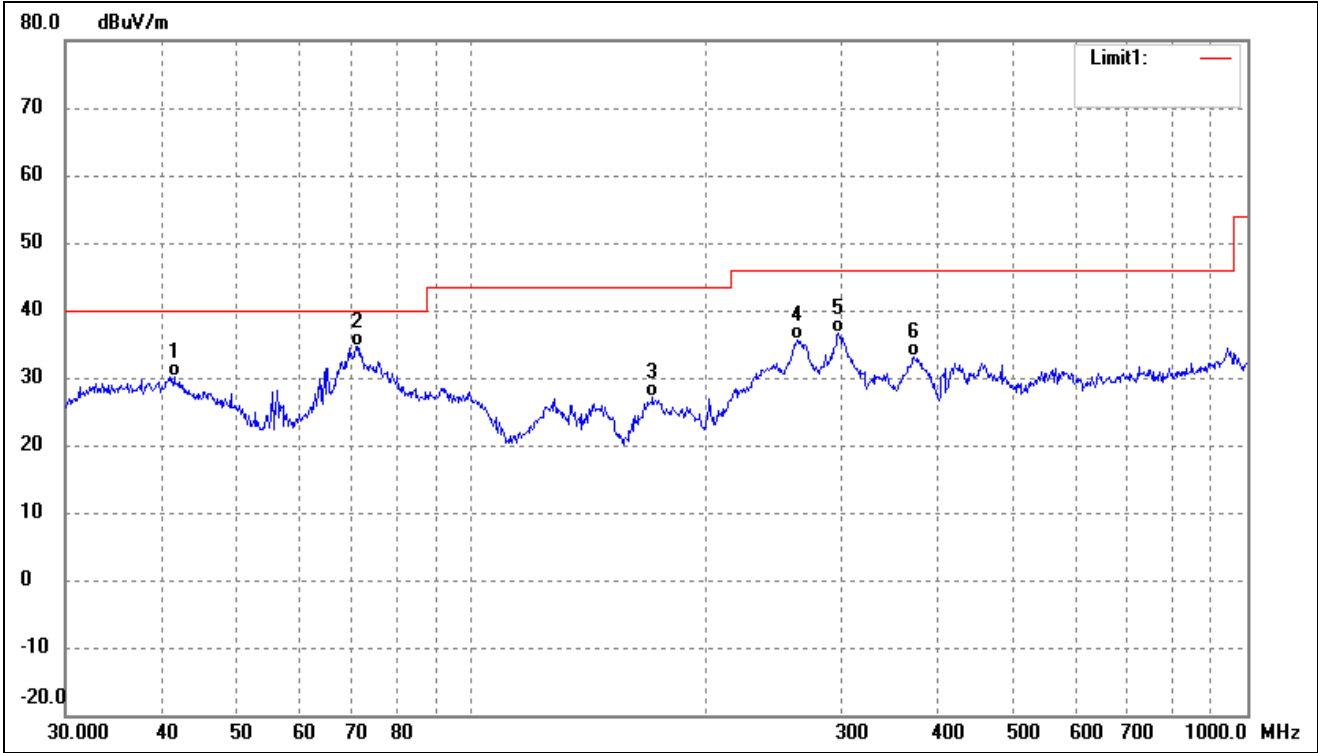


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.4215	37.06	-6.99	30.07	40.00	-9.93	-	-	QP
2	71.3300	44.91	-10.25	34.66	40.00	-5.34	-	-	QP
3	171.3926	38.86	-11.66	27.20	43.50	-16.30	-	-	QP
4	262.8955	43.54	-7.96	35.58	46.00	-10.42	-	-	QP
5	297.2241	43.74	-7.03	36.71	46.00	-9.29	-	-	QP
6	372.0045	37.76	-4.74	33.02	46.00	-12.98	-	-	QP

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Horizontal

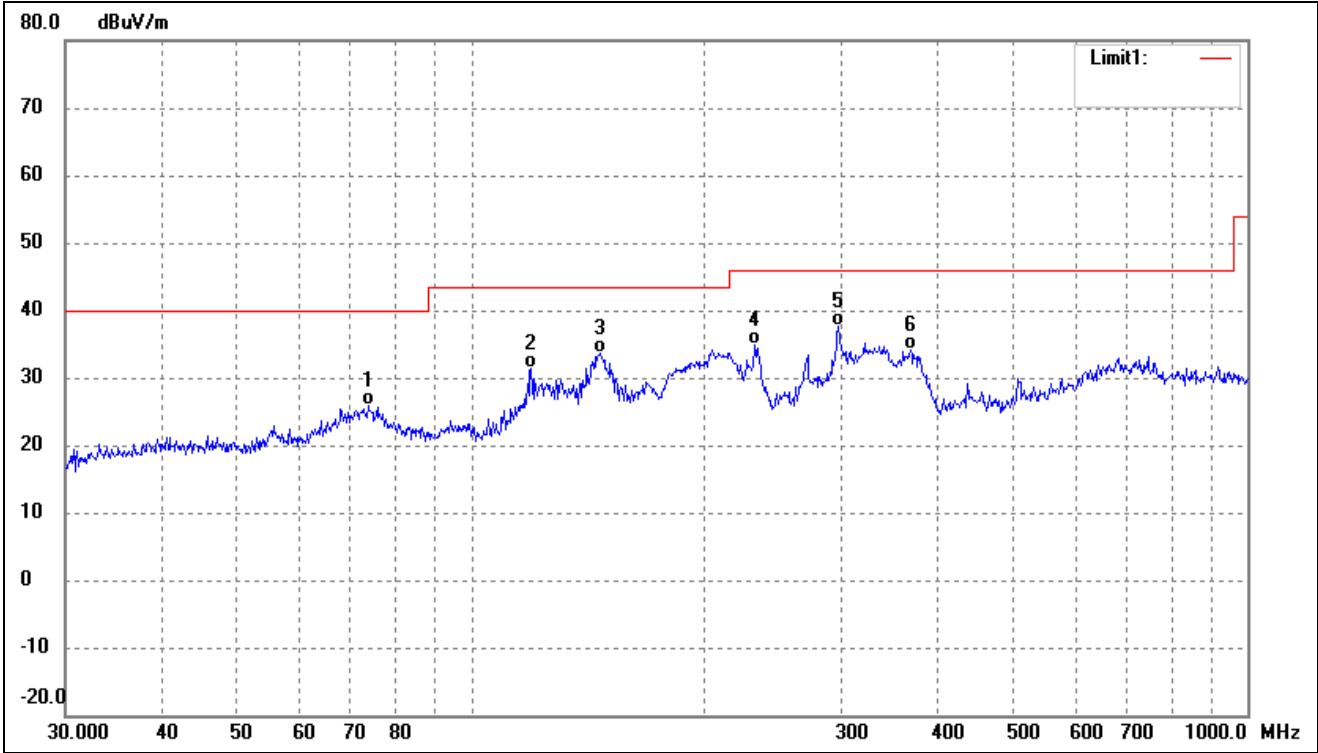


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	73.6170	36.31	-10.38	25.93	40.00	-14.07	-	-	QP
2	119.4361	40.85	-9.56	31.29	43.50	-12.21	-	-	QP
3	146.3735	45.99	-12.48	33.51	43.50	-9.99	-	-	QP
4	231.7179	43.67	-8.83	34.84	46.00	-11.16	-	-	QP
5	297.2241	44.56	-7.03	37.53	46.00	-8.47	-	-	QP
6	368.1116	38.88	-4.85	34.03	46.00	-11.97	-	-	QP

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Vertical

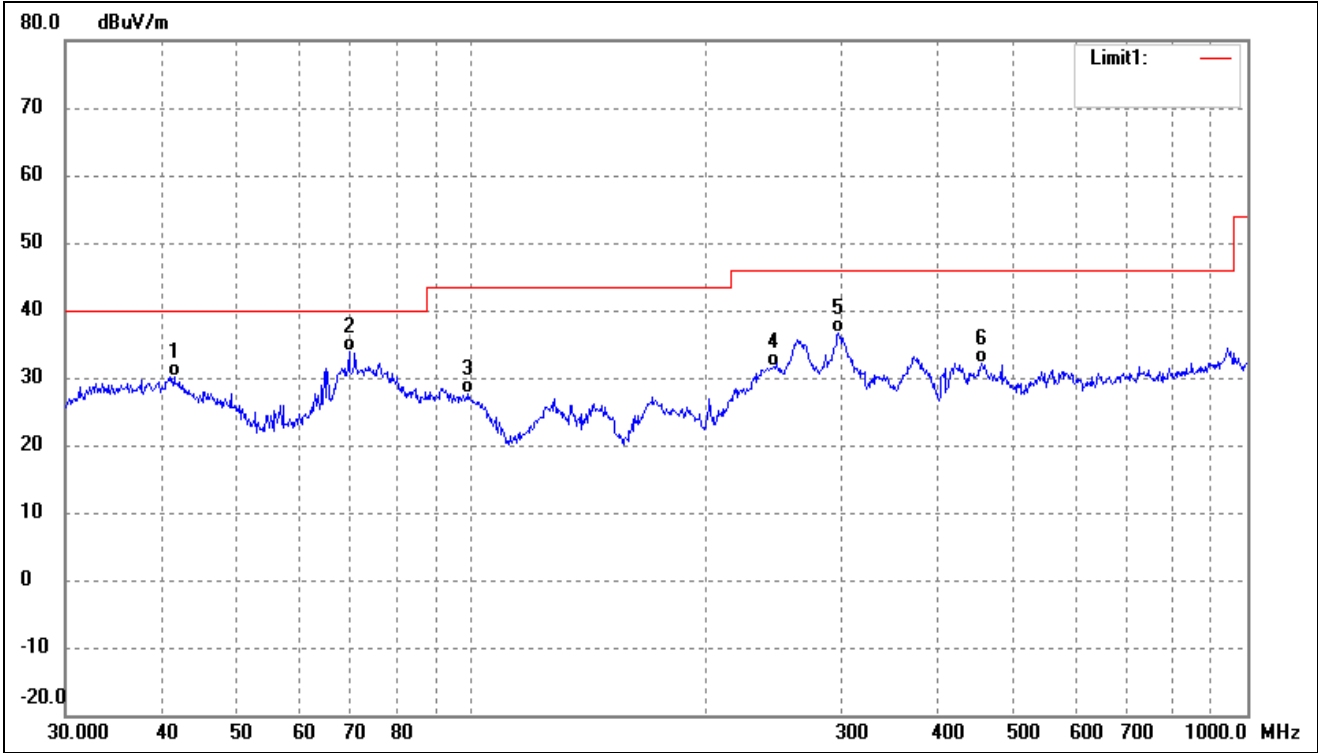


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.4215	37.06	-6.99	30.07	40.00	-9.93	-	-	QP
2	69.6005	43.90	-10.10	33.80	40.00	-6.20	-	-	QP
3	98.8326	36.60	-8.94	27.66	43.50	-15.84	-	-	QP
4	245.0900	40.13	-8.45	31.68	46.00	-14.32	-	-	QP
5	297.2241	43.69	-7.03	36.66	46.00	-9.34	-	-	QP
6	454.3100	34.52	-2.45	32.07	46.00	-13.93	-	-	QP

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Horizontal

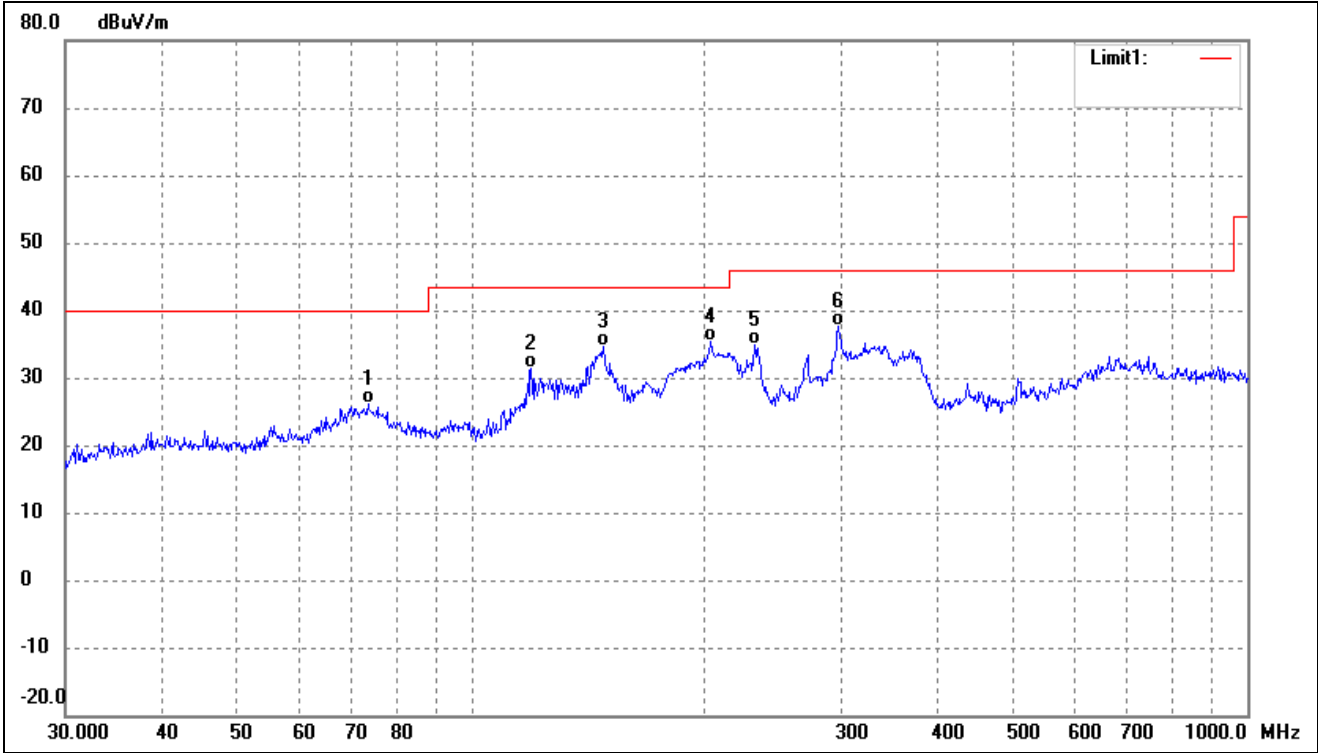

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	73.6170	36.43	-10.38	26.05	40.00	-13.95	-	-	QP
2	119.4361	40.85	-9.56	31.29	43.50	-12.21	-	-	QP
3	147.9214	47.07	-12.54	34.53	43.50	-8.97	-	-	QP
4	203.5228	45.00	-9.61	35.39	43.50	-8.11	-	-	QP
5	231.7179	43.67	-8.83	34.84	46.00	-11.16	-	-	QP
6	297.2241	44.56	-7.03	37.53	46.00	-8.47	-	-	QP

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Vertical

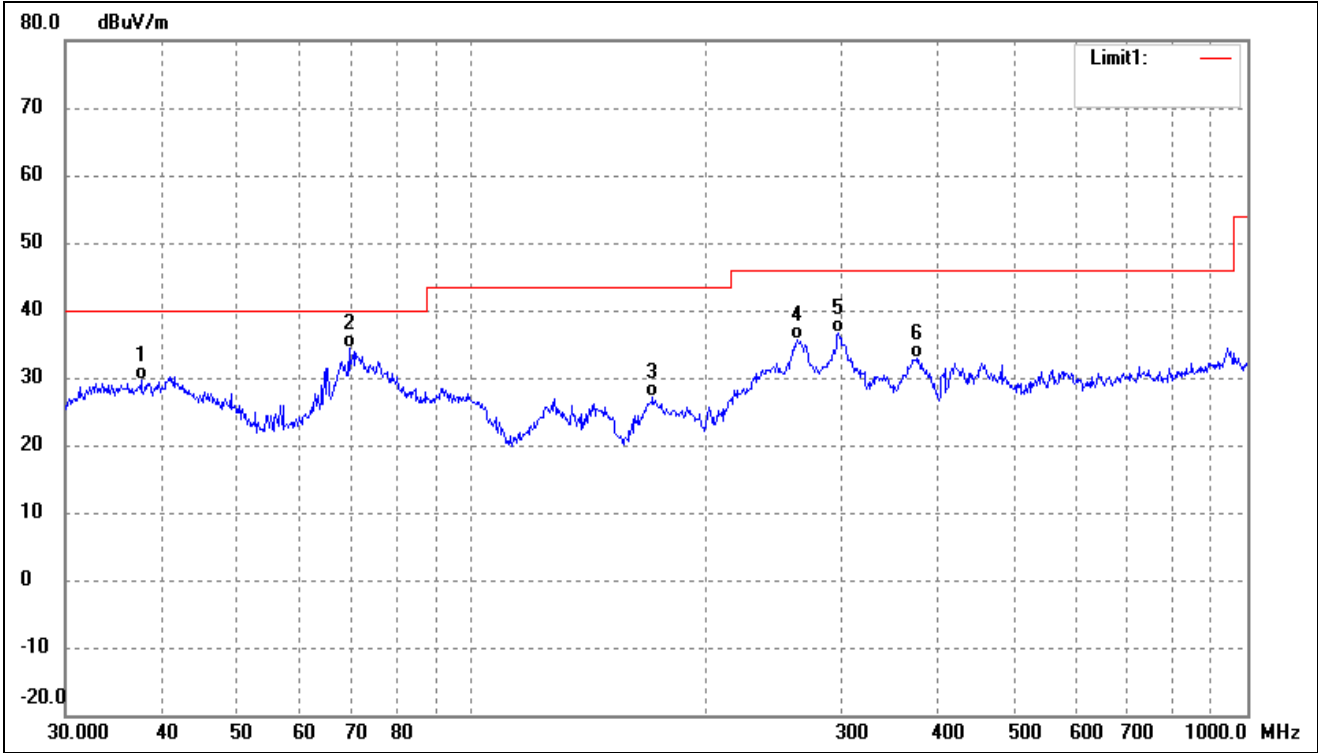


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	37.5479	37.19	-7.60	29.59	40.00	-10.41	-	-	QP
2	69.6005	44.40	-10.10	34.30	40.00	-5.70	-	-	QP
3	171.3926	38.86	-11.66	27.20	43.50	-16.30	-	-	QP
4	262.8955	43.54	-7.96	35.58	46.00	-10.42	-	-	QP
5	297.2241	43.69	-7.03	36.66	46.00	-9.34	-	-	QP
6	374.6226	37.44	-4.66	32.78	46.00	-13.22	-	-	QP

5725-5850MHz


802.11a(worst case)

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

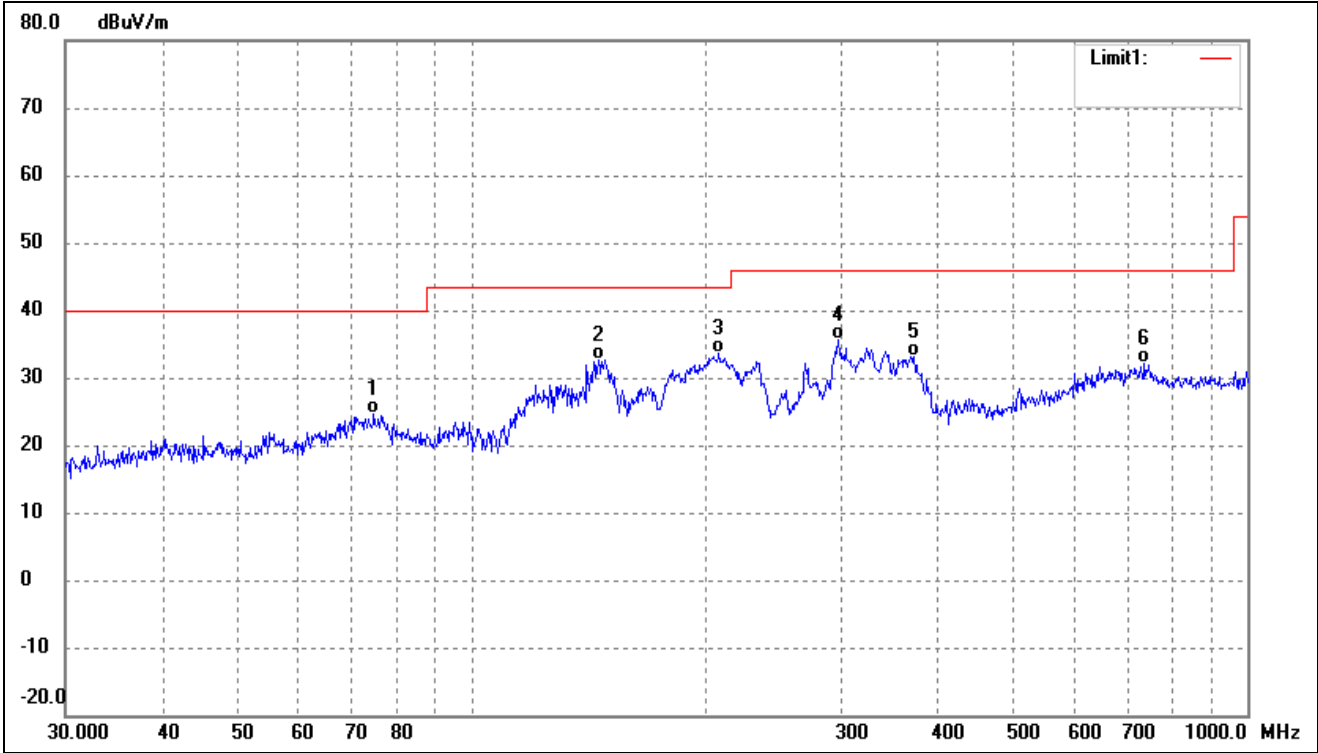

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	74.9191	35.20	-10.45	24.75	40.00	-15.25	-	-	QP
2	145.8611	45.13	-12.46	32.67	43.50	-10.83	-	-	QP
3	208.5803	43.02	-9.46	33.56	43.50	-9.94	-	-	QP
4	297.2241	42.74	-7.03	35.71	46.00	-10.29	-	-	QP
5	372.0045	37.97	-4.74	33.23	46.00	-12.77	-	-	QP
6	737.0714	30.53	1.67	32.20	46.00	-13.80	-	-	QP


802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical

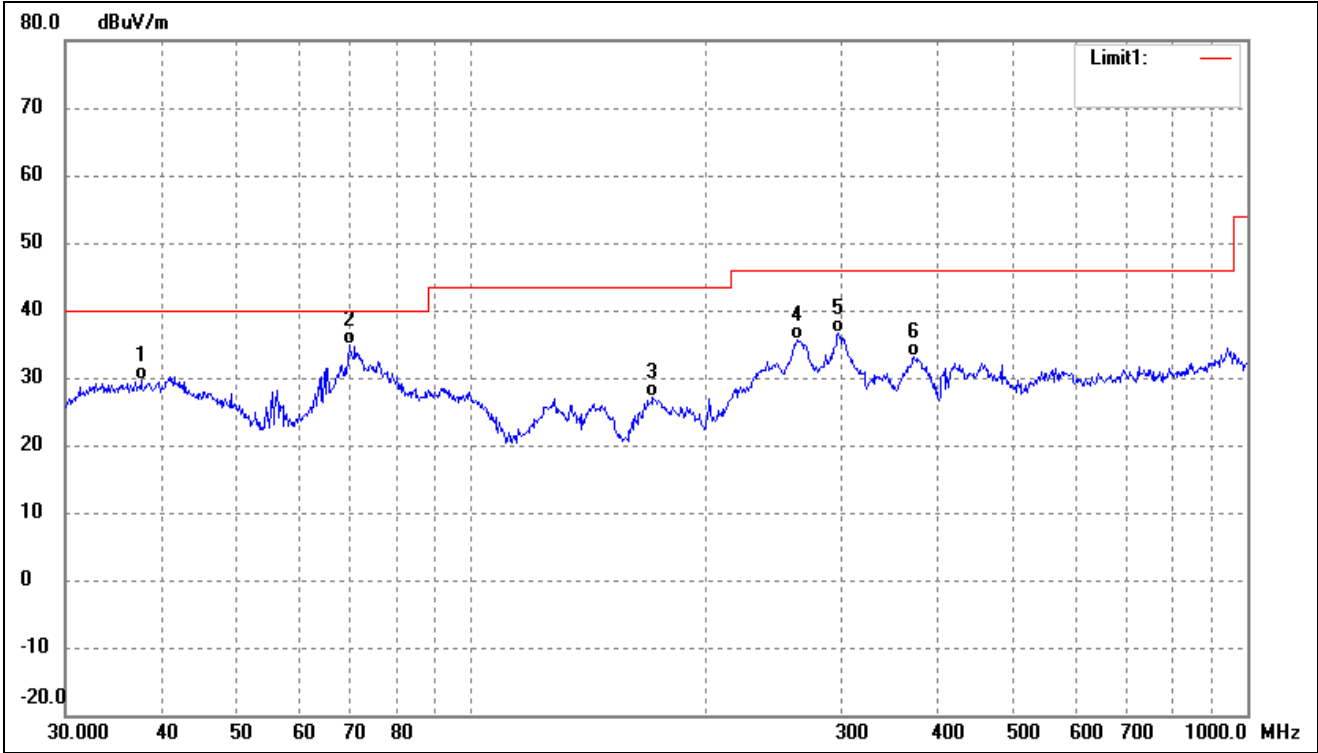

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	37.5479	37.19	-7.60	29.59	40.00	-10.41	-	-	QP
2	69.6005	44.90	-10.10	34.80	40.00	-5.20	-	-	QP
3	171.3926	38.86	-11.66	27.20	43.50	-16.30	-	-	QP
4	262.8955	43.54	-7.96	35.58	46.00	-10.42	-	-	QP
5	297.2241	43.74	-7.03	36.71	46.00	-9.29	-	-	QP
6	372.0045	37.76	-4.74	33.02	46.00	-12.98	-	-	QP




802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Horizontal

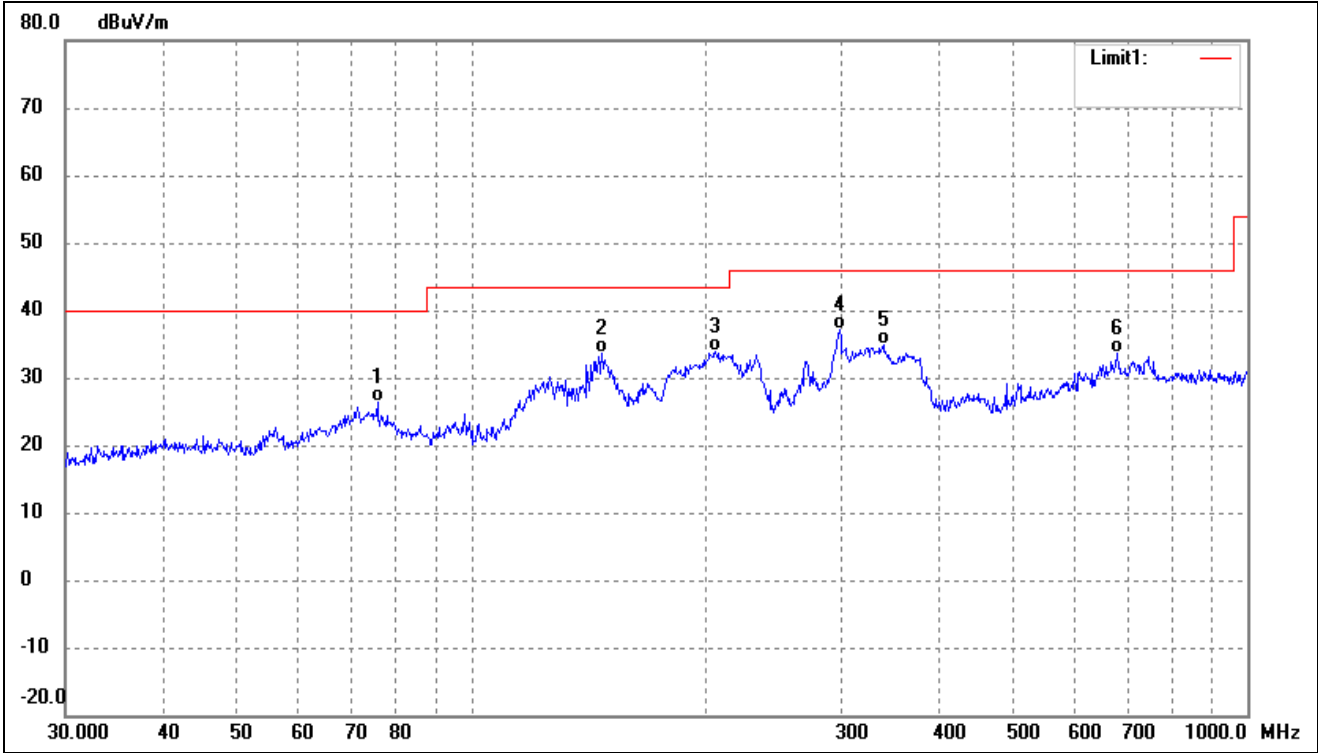


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	75.7114	36.80	-10.49	26.31	40.00	-13.69	-	-	QP
2	147.4036	46.07	-12.52	33.55	43.50	-9.95	-	-	QP
3	206.3976	43.47	-9.53	33.94	43.50	-9.56	-	-	QP
4	298.2681	44.24	-7.01	37.23	46.00	-8.77	-	-	QP
5	339.5888	40.51	-5.72	34.79	46.00	-11.21	-	-	QP
6	679.9600	32.47	1.23	33.70	46.00	-12.30	-	-	QP

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Vertical

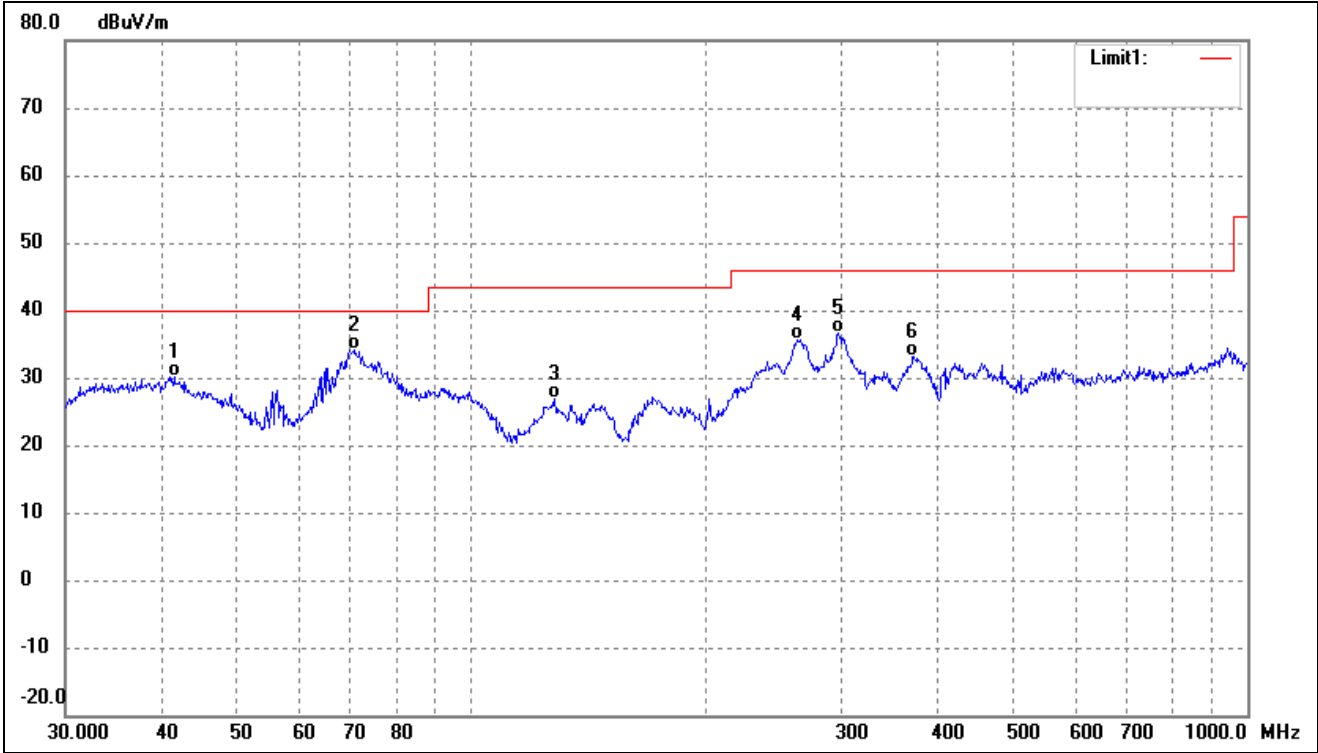


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.4215	37.06	-6.99	30.07	40.00	-9.93	-	-	QP
2	70.8315	44.45	-10.21	34.24	40.00	-5.76	-	-	QP
3	128.1130	37.91	-11.09	26.82	43.50	-16.68	-	-	QP
4	262.8955	43.54	-7.96	35.58	46.00	-10.42	-	-	QP
5	297.2241	43.74	-7.03	36.71	46.00	-9.29	-	-	QP
6	370.7023	37.91	-4.78	33.13	46.00	-12.87	-	-	QP

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

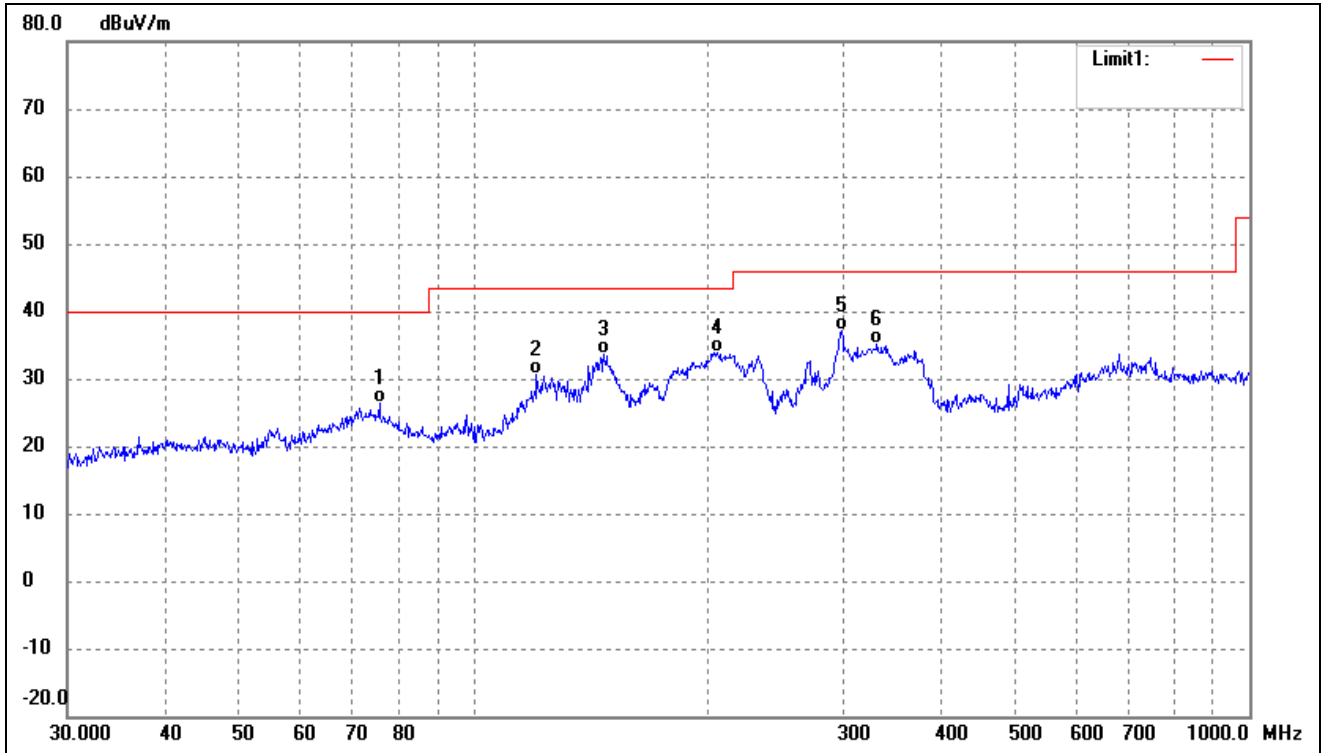

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	75.7114	36.80	-10.49	26.31	40.00	-13.69	-	-	QP
2	120.6991	40.45	-9.72	30.73	43.50	-12.77	-	-	QP
3	147.4036	46.07	-12.52	33.55	43.50	-9.95	-	-	QP
4	206.3976	43.47	-9.53	33.94	43.50	-9.56	-	-	QP
5	298.2681	44.24	-7.01	37.23	46.00	-8.77	-	-	QP
6	331.3547	41.12	-5.98	35.14	46.00	-10.86	-	-	QP

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

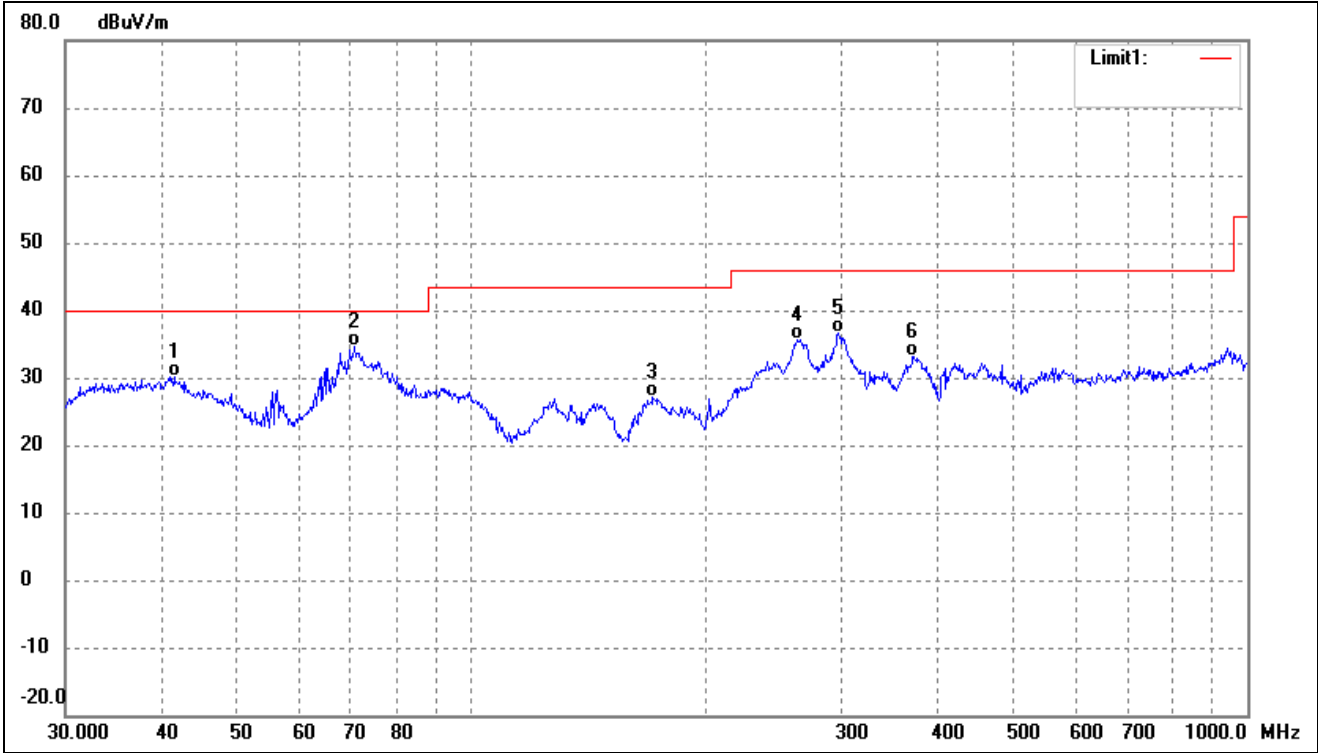


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.4215	37.06	-6.99	30.07	40.00	-9.93	-	-	QP
2	70.8315	44.95	-10.21	34.74	40.00	-5.26	-	-	QP
3	171.3926	38.86	-11.66	27.20	43.50	-16.30	-	-	QP
4	262.8955	43.54	-7.96	35.58	46.00	-10.42	-	-	QP
5	297.2241	43.74	-7.03	36.71	46.00	-9.29	-	-	QP
6	370.7023	37.91	-4.78	33.13	46.00	-12.87	-	-	QP

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


- Spurious Emission above 1GHz
- Antenna 0(worst case)

802.11n- Restricted Bandedge			
Test Channel	band 4.50-5.15GHz	Polarity:	Vertical(worst case)

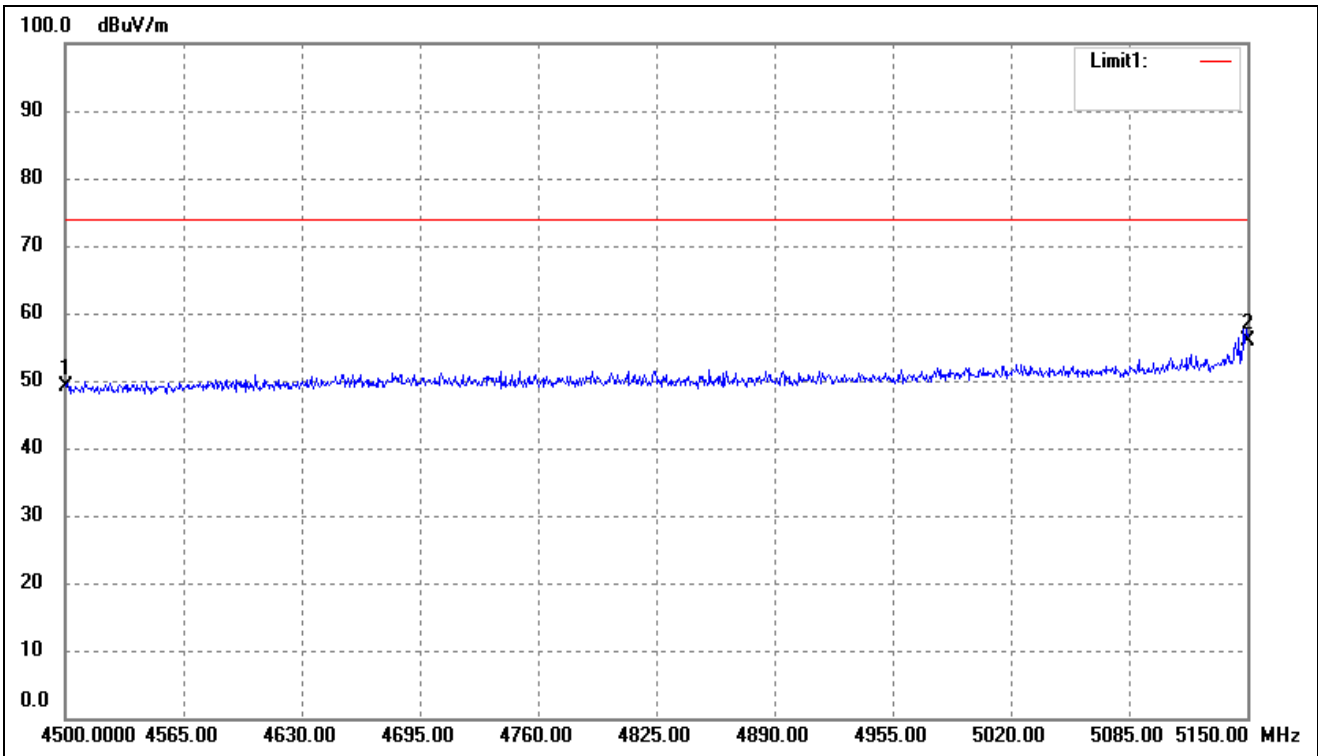

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4500.000	52.50	-3.45	49.05	74.00	-24.95	-	-	peak
2	5150.000	58.18	-2.23	55.95	74.00	-18.05	-	-	peak

802.11n- Restricted Bandedge			
Test Channel	band 4.50-5.15GHz	Polarity:	Vertical(worst case)

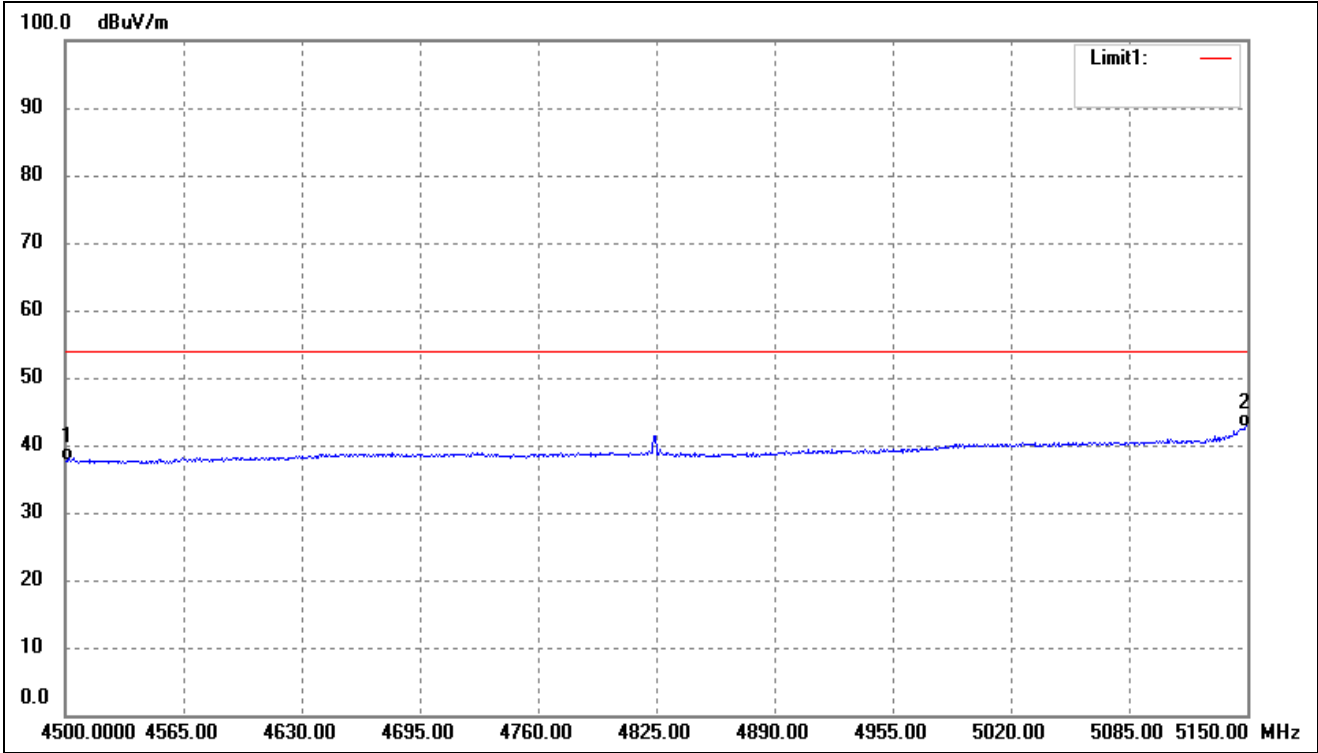

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4500.000	41.19	-3.45	37.74	54.00	-16.26	-	-	AVG
2	5150.000	44.82	-2.23	42.59	54.00	-11.41	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-'Means' the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- Antenna 0(worst case)
- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	56.43	7.11	63.54	74	-10.46	H	PK
15540	34.85	8.22	43.07	54	-10.93	H	AV
10360	57.36	7.11	64.47	74	-9.53	V	PK
15540	37.12	8.22	45.34	54	-8.66	V	AV
Middle Channel (5200MHz)							
10400	56.81	7.22	64.03	74	-9.97	H	PK
15600	31.47	8.67	40.14	54	-13.86	H	AV
10400	56.83	7.22	64.05	74	-9.95	V	PK
15600	34.43	8.67	43.10	54	-10.90	V	AV
High Channel (5240MHz)							
10480	54.22	7.69	61.91	74	-12.09	H	PK
15720	34.59	8.93	43.52	54	-10.48	H	AV
10480	54.90	7.69	62.59	74	-11.41	V	PK
15720	38.20	8.93	47.13	54	-6.87	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.01	9.45	64.46	74	-9.54	H	PK
17235	32.62	10.36	42.98	54	-11.02	H	AV
11490	52.98	9.45	62.43	74	-11.57	V	PK
17235	30.54	10.36	40.90	54	-13.10	V	AV
Middle Channel (5785MHz)							
11570	55.80	9.62	65.42	74	-8.58	H	PK
17355	33.28	10.67	43.95	54	-10.05	H	AV
11570	53.48	9.62	63.10	74	-10.90	V	PK
17355	34.34	10.67	45.01	54	-8.99	V	AV
High Channel (5825MHz)							
11650	55.50	9.84	65.34	74	-8.66	H	PK
17475	33.93	10.95	44.88	54	-9.12	H	AV
11650	51.26	9.84	61.10	74	-12.90	V	PK
17475	35.22	10.95	46.17	54	-7.83	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.56	-27
Highest	Above 5350	-42.42	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-47.31	-27
	5650 to 5700	-35.80	-27 to -17
	5700 to 5720	-27.66	-17 to 15.6
	5720 to 5725	-18.14	15.6 to 27
Highest	5850 to 5855	-14.88	27 to 15.6
	5855 to 5875	-25.54	15.6 to -17
	5875 to 5925	-35.33	-17 to -27
	Above 5925	-39.25	-27

Note: the data just list the worst cases



- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	55.87	7.11	62.98	74	-11.02	H	PK
15540	37.64	8.22	45.86	54	-8.14	H	AV
10360	58.80	7.11	65.91	74	-8.09	V	PK
15540	37.29	8.22	45.51	54	-8.49	V	AV
Middle Channel (5200MHz)							
10400	56.66	7.22	63.88	74	-10.12	H	PK
15600	34.42	8.67	43.09	54	-10.91	H	AV
10400	54.59	7.22	61.81	74	-12.19	V	PK
15600	31.10	8.67	39.77	54	-14.23	V	AV
High Channel (5240MHz)							
10480	56.00	7.69	63.69	74	-10.31	H	PK
15720	36.27	8.93	45.20	54	-8.80	H	AV
10480	54.31	7.69	62.00	74	-12.00	V	PK
15720	31.53	8.93	40.46	54	-13.54	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	56.41	9.45	65.86	74	-8.14	H	PK
17235	33.95	10.36	44.31	54	-9.69	H	AV
11490	53.46	9.45	62.91	74	-11.09	V	PK
17235	31.96	10.36	42.32	54	-11.68	V	AV
Middle Channel (5785MHz)							
11570	55.23	9.62	64.85	74	-9.15	H	PK
17355	32.35	10.67	43.02	54	-10.98	H	AV
11570	51.71	9.62	61.33	74	-12.67	V	PK
17355	34.23	10.67	44.90	54	-9.10	V	AV
High Channel (5825MHz)							
11650	54.12	9.84	63.96	74	-10.04	H	PK
17475	32.67	10.95	43.62	54	-10.38	H	AV
11650	51.69	9.84	61.53	74	-12.47	V	PK
17475	30.76	10.95	41.71	54	-12.29	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-30.16	-27
Highest	Above 5350	-36.90	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.56	-27
	5650 to 5700	-37.72	-27 to -17
	5700 to 5720	-26.72	-17 to 15.6
	5720 to 5725	-16.11	15.6 to 27
Highest	5850 to 5855	-15.51	27 to 15.6
	5855 to 5875	-26.47	15.6 to -17
	5875 to 5925	-36.30	-17 to -27
	Above 5925	-37.87	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	56.47	7.25	63.72	74	-10.28	H	PK
15570	33.94	8.33	42.27	54	-11.73	H	AV
10380	53.70	7.25	60.95	74	-13.05	V	PK
15570	36.12	8.33	44.45	54	-9.55	V	AV
High Channel (5230MHz)							
10460	52.86	7.54	60.40	74	-13.60	H	PK
15690	31.09	8.86	39.95	54	-14.05	H	AV
10460	54.17	7.54	61.71	74	-12.29	V	PK
15690	30.64	8.86	39.50	54	-14.50	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	54.84	9.65	64.49	74	-9.51	H	PK
17265	36.21	10.87	47.08	54	-6.92	H	AV
11510	57.29	9.65	66.94	74	-7.06	V	PK
17265	32.91	10.87	43.78	54	-10.22	V	AV
High Channel (5795MHz)							
11590	54.51	9.81	64.32	74	-9.68	H	PK
17385	31.71	10.89	42.60	54	-11.40	H	AV
11590	56.30	9.81	66.11	74	-7.89	V	PK
17385	33.91	10.89	44.80	54	-9.20	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.45	-27
Highest	Above 5350	-44.42	-27

Note: the data just list the worst cases.

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-45.82	-27
	5650 to 5700	-35.43	-27 to -17
	5700 to 5720	-26.44	-17 to 15.6
	5720 to 5725	-16.50	15.6 to 27
Highest	5850 to 5855	-14.36	27 to 15.6
	5855 to 5875	-26.56	15.6 to -17
	5875 to 5925	-36.51	-17 to -27
	Above 5925	-38.96	-27

Note: the data just list the worst cases

*Note: this EUT was tested in the low, high channel and the worst case position data was reported.*

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VHT80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Middle Channel (5210MHz)							
10420	55.96	7.58	63.54	74	-10.46	H	PK
10420	35.06	8.67	43.73	54	-10.27	H	AV
10420	56.63	7.58	64.21	74	-9.79	V	PK
10420	36.14	8.67	44.81	54	-9.19	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5775MHz)							
11550	55.12	9.87	64.99	74	-9.01	H	PK
11550	36.92	11.02	47.94	54	-6.06	H	AV
11550	57.04	9.87	66.91	74	-7.09	V	PK
11550	32.67	11.02	43.69	54	-10.31	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.03	-27
Highest	Above 5350	-44.85	-27

Note: the data just list the worst cases.

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-45.92	-27
	5650 to 5700	-36.40	-27 to -17
	5700 to 5720	-27.08	-17 to 15.6
	5720 to 5725	-15.57	15.6 to 27
Highest	5850 to 5855	-14.78	27 to 15.6
	5855 to 5875	-25.41	15.6 to -17
	5875 to 5925	-37.55	-17 to -27
	Above 5925	-39.12	-27

Note: the data just list the worst cases

Note: Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## **9. Frequency Stability**

---

### **9.1 Standard Applicable**

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

### **9.2 Test Procedure**

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

### **9.3 Summary of Test Results/Plots**

**Please refer to Appendix D**


## 10 Conducted Emissions

### 10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

### 10.2 Basic Test Setup Block Diagram

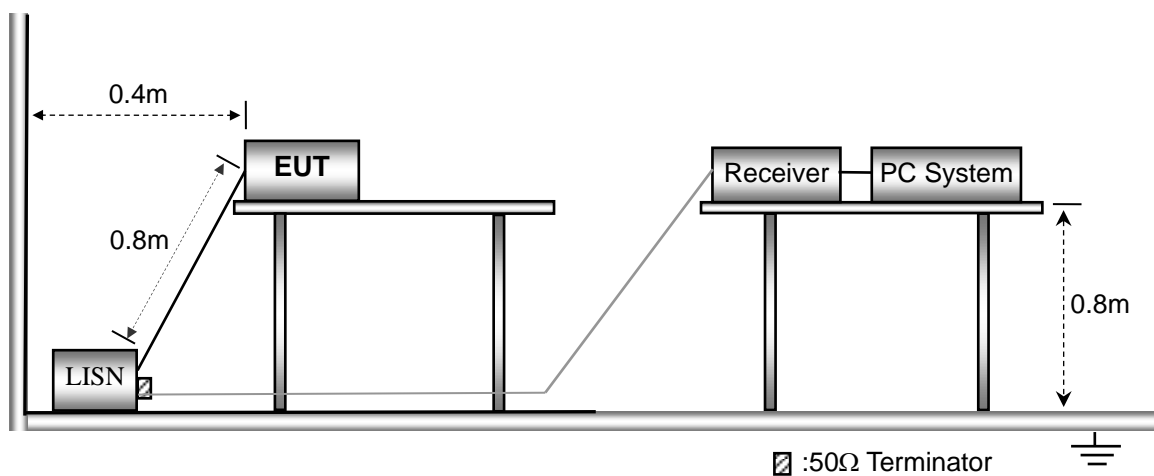


### 10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150kHz
Stop Frequency .....	30MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth .....	9kHz
Quasi-Peak Adapter Mode .....	Normal

### 10.4 Summary of Test Results/Plots


Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

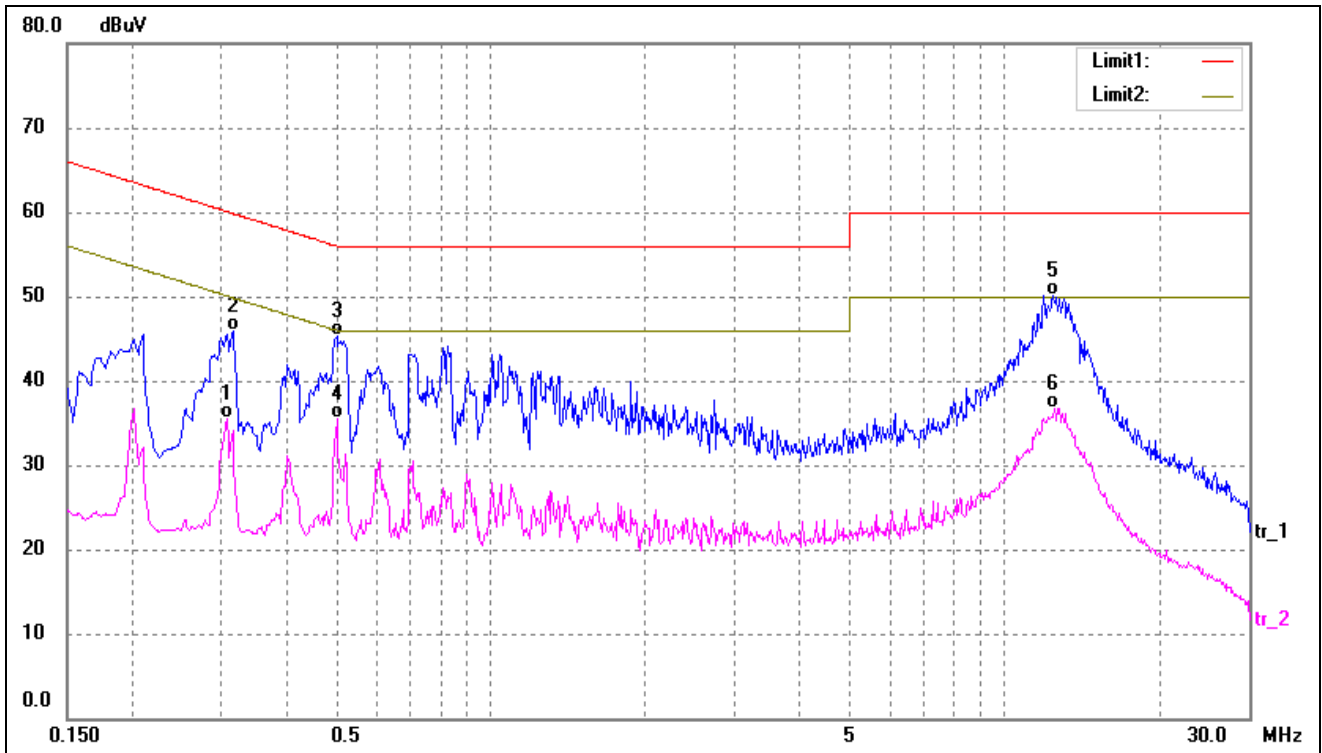

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3060	25.23	10.24	35.47	50.08	-14.61	AVG
2	0.3140	35.63	10.24	45.87	59.86	-13.99	QP
3	0.5020	35.05	10.22	45.27	56.00	-10.73	QP
4	0.5020	25.27	10.22	35.49	46.00	-10.51	AVG
5*	12.5020	39.83	10.29	50.12	60.00	-9.88	QP
6	12.5380	26.48	10.29	36.77	50.00	-13.23	AVG



Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

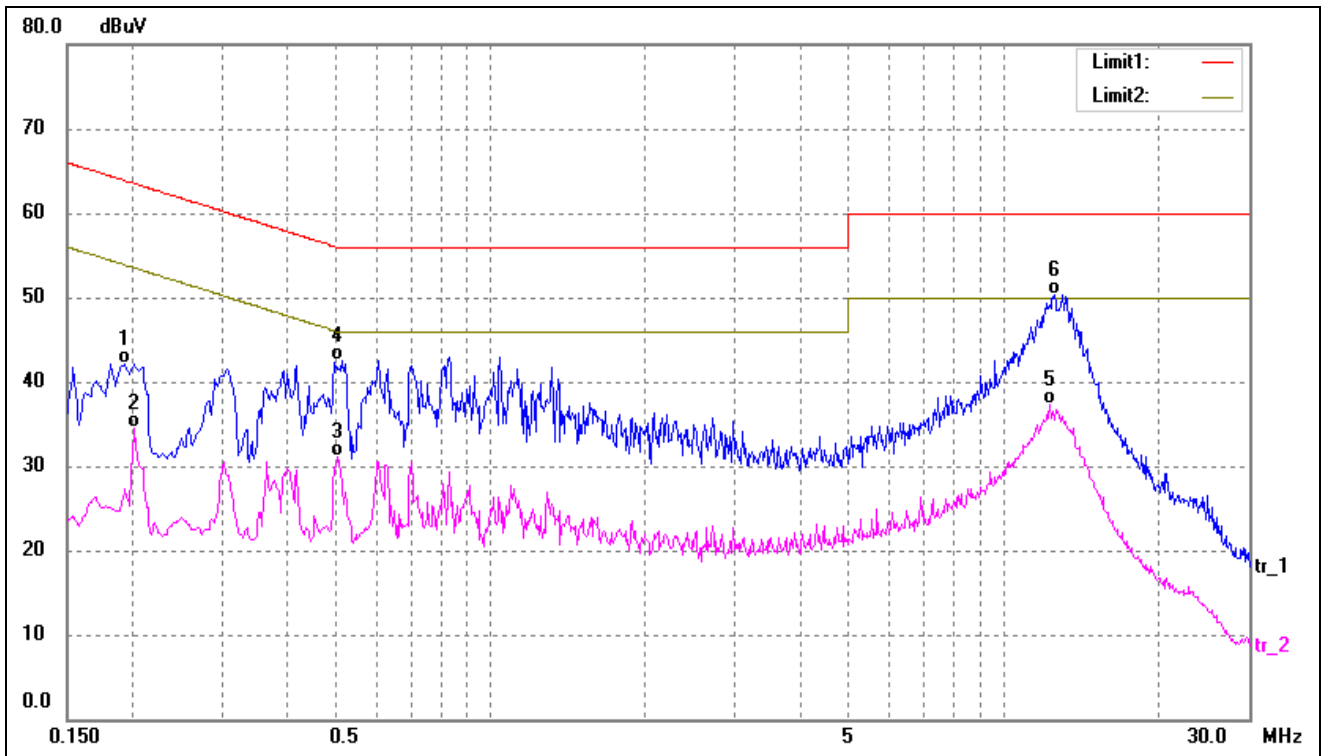

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1940	31.75	10.30	42.05	63.86	-21.81	QP
2	0.2020	24.22	10.30	34.52	53.52	-19.00	AVG
3	0.5060	20.91	10.22	31.13	46.00	-14.87	AVG
4	0.5140	32.29	10.22	42.51	56.00	-13.49	QP
5	12.2940	26.97	10.30	37.27	50.00	-12.73	AVG
6*	12.5580	40.07	10.29	50.36	60.00	-9.64	QP

## APPENDIX SUMMARY

---

Project No.	WTH22X08173297W	Test Engineer	BAIdi Zhong
Start date	2022/08/30	Finish date	2022/08/30
Temperature	24°C	Humidity	47%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power & Duty Cycle	Compliant
D	Frequency Stability	Compliant



**APPENDIX A**



<b>Power Spectral Density</b>					
<b>U-NII-1:5150-5250MHz</b>					
Operating mode	Test Channel	ANT1 dBm/MHz	ANT2 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	2.78	1.77	/	<=11
	5200	2.66	1.55	/	<=11
	5240	3.19	2.42	/	<=11
802.11n-HT20	5180	0.24	0.46	3.36	<=11
	5200	0.19	0.42	3.32	<=11
	5240	0.65	0.93	3.80	<=11
802.11n-HT40	5190	-2.60	-2.48	0.47	<=11
	5230	-2.44	-2.04	0.77	<=11
802.11ac-HT80	5210	-6.77	-5.69	-3.19	<=11



<b>Power Spectral Density</b>					
<b>U-NII-3: 5725-5850MHz</b>					
Operating mode	Test Channel	ANT1 dBm/500kHz	ANT2 dBm/500kHz	Total dBm/500kHz	Limit (dBm/500kHz)
802.11a	5745	0.01	0.22	/	<=30
	5785	0.41	0.20	/	<=30
	5825	0.04	-0.18	/	<=30
802.11n-HT20	5745	-1.68	-1.90	1.22	<=30
	5785	-2.69	-1.73	0.83	<=30
	5825	-2.44	-1.70	0.96	<=30
802.11n-HT40	5755	-6.06	-6.02	-3.03	<=30
	5795	-5.76	-5.74	-2.74	<=30
802.11ac-HT80	5775	-7.57	-7.70	-4.62	<=30



ANT1


5150-5250MHz

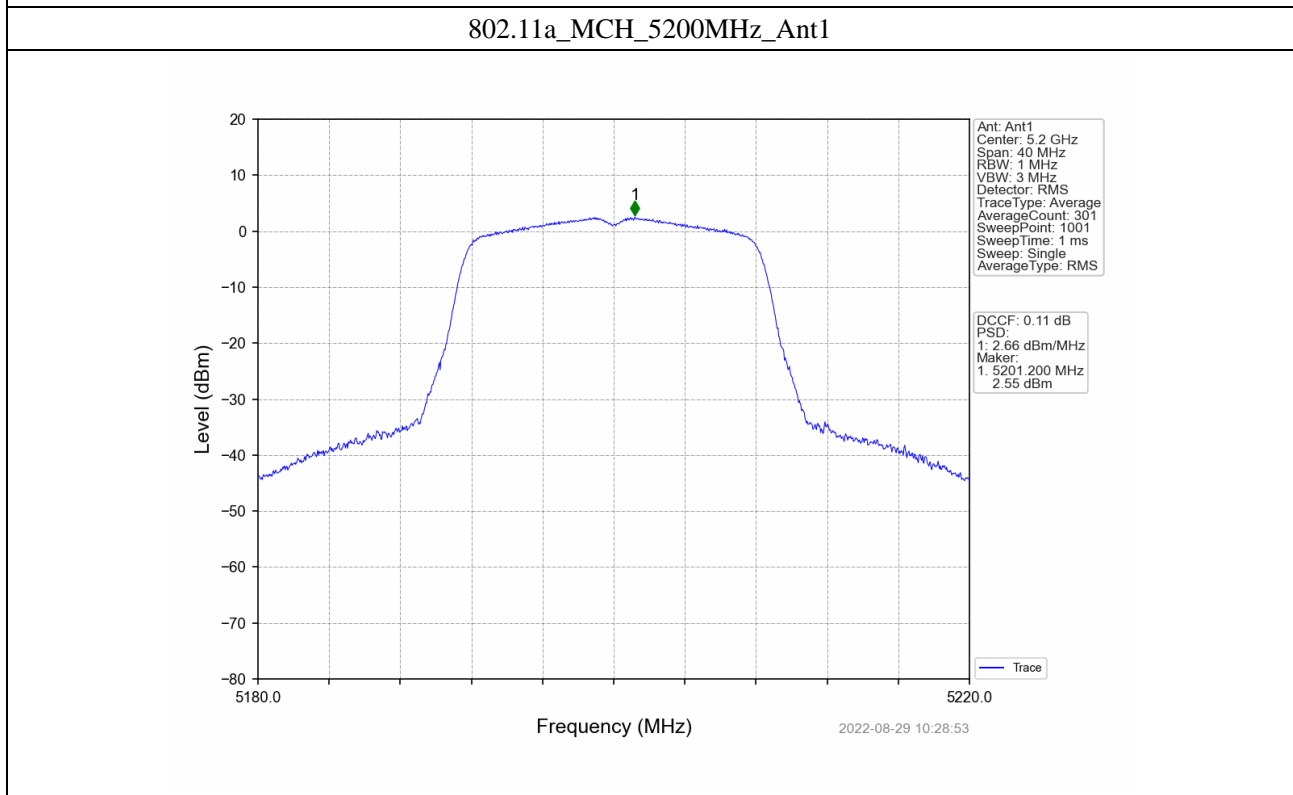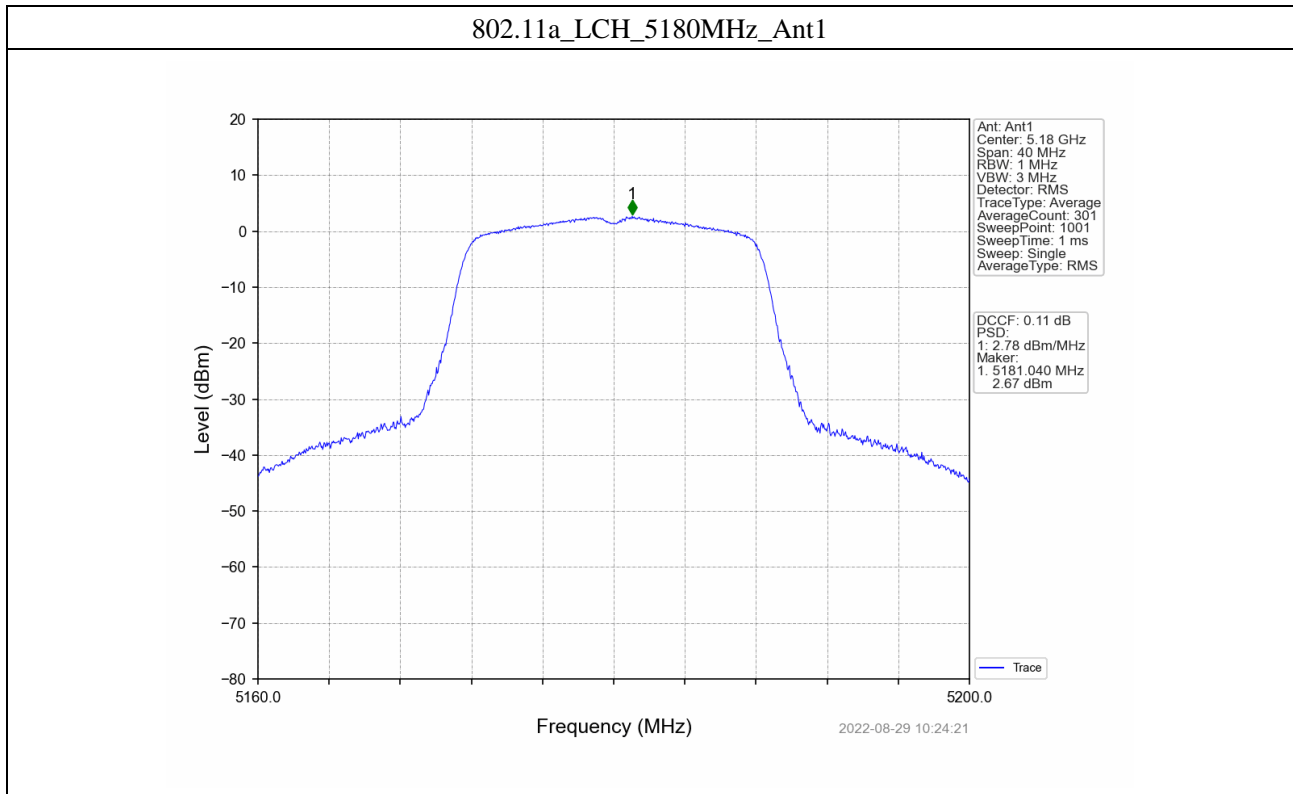

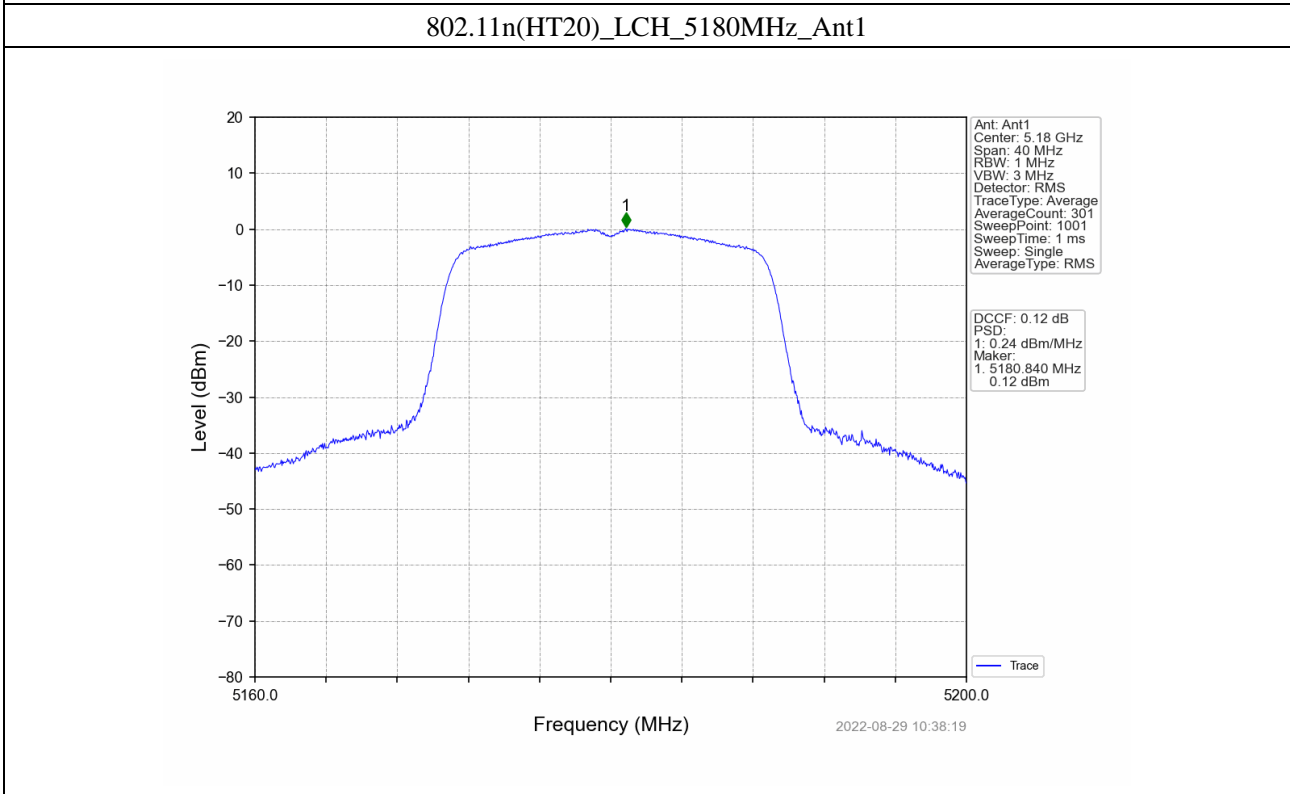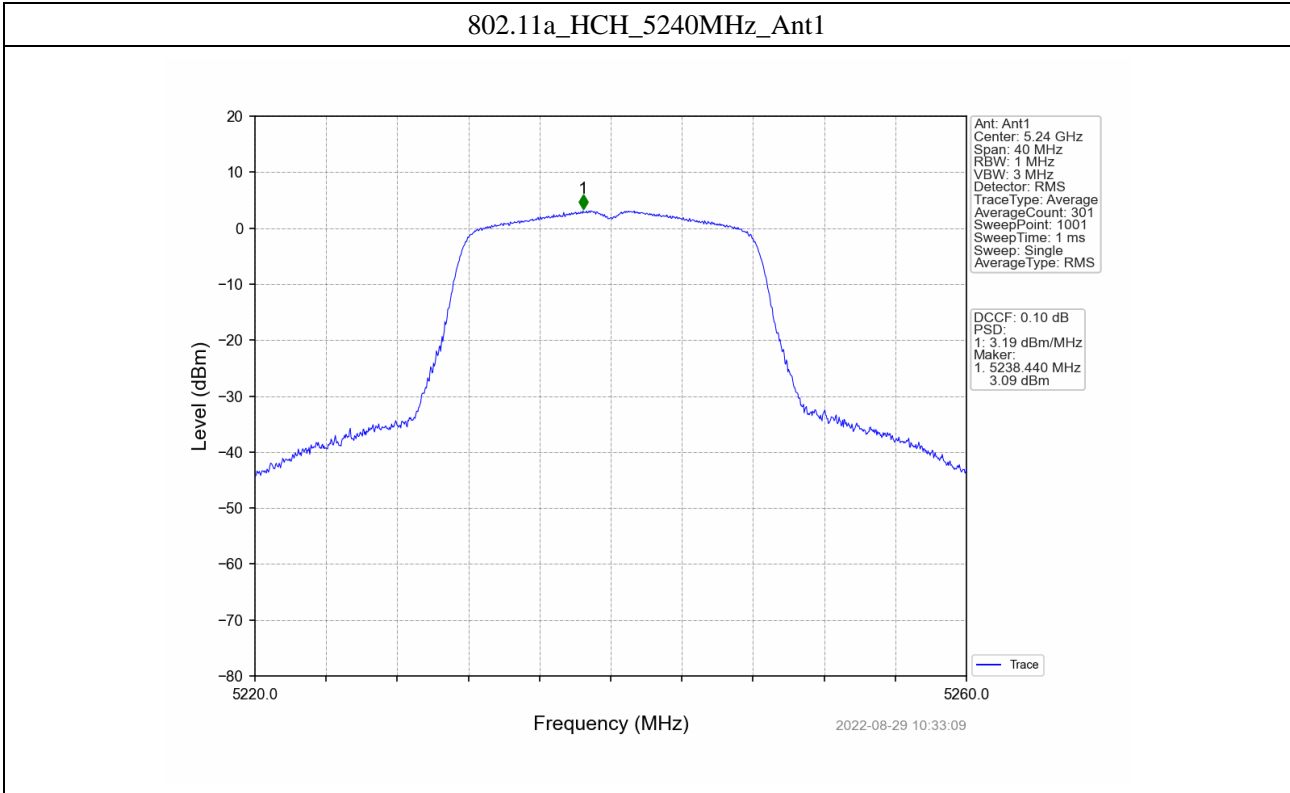

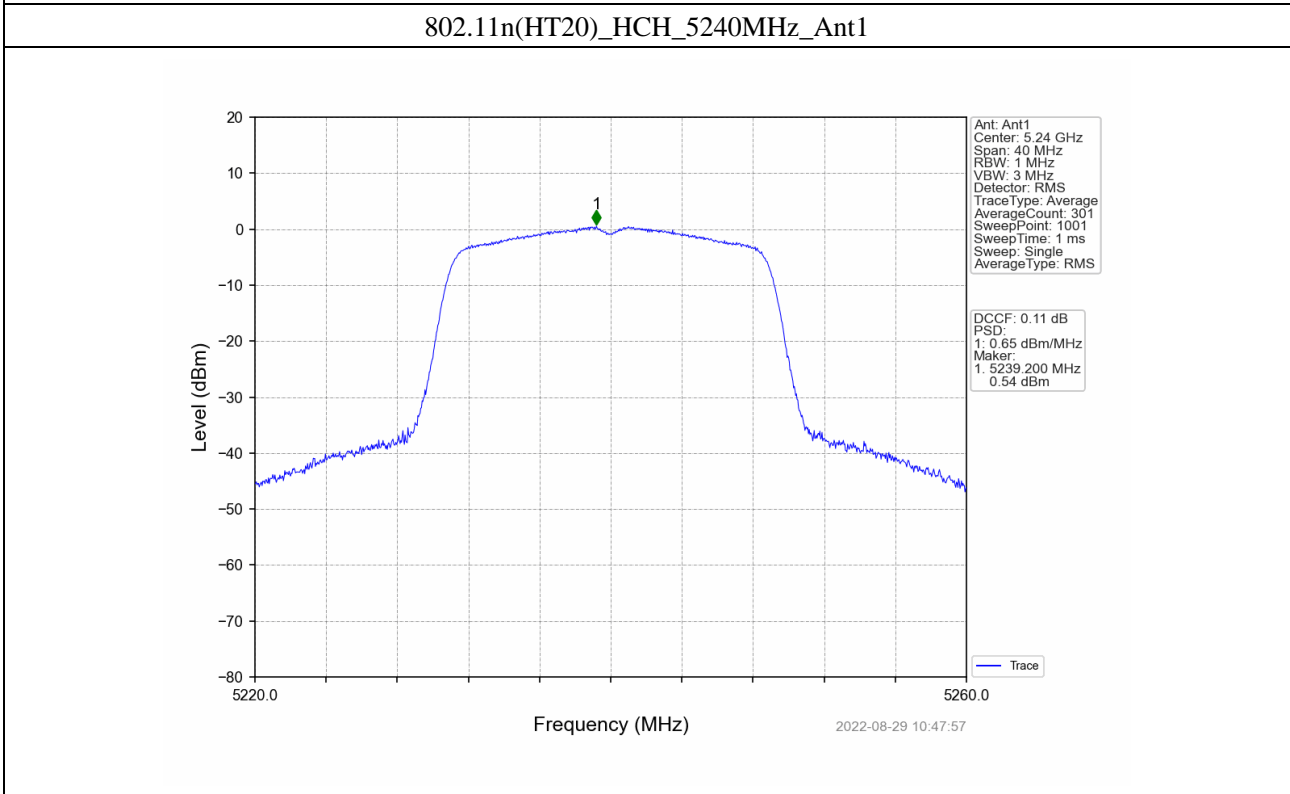
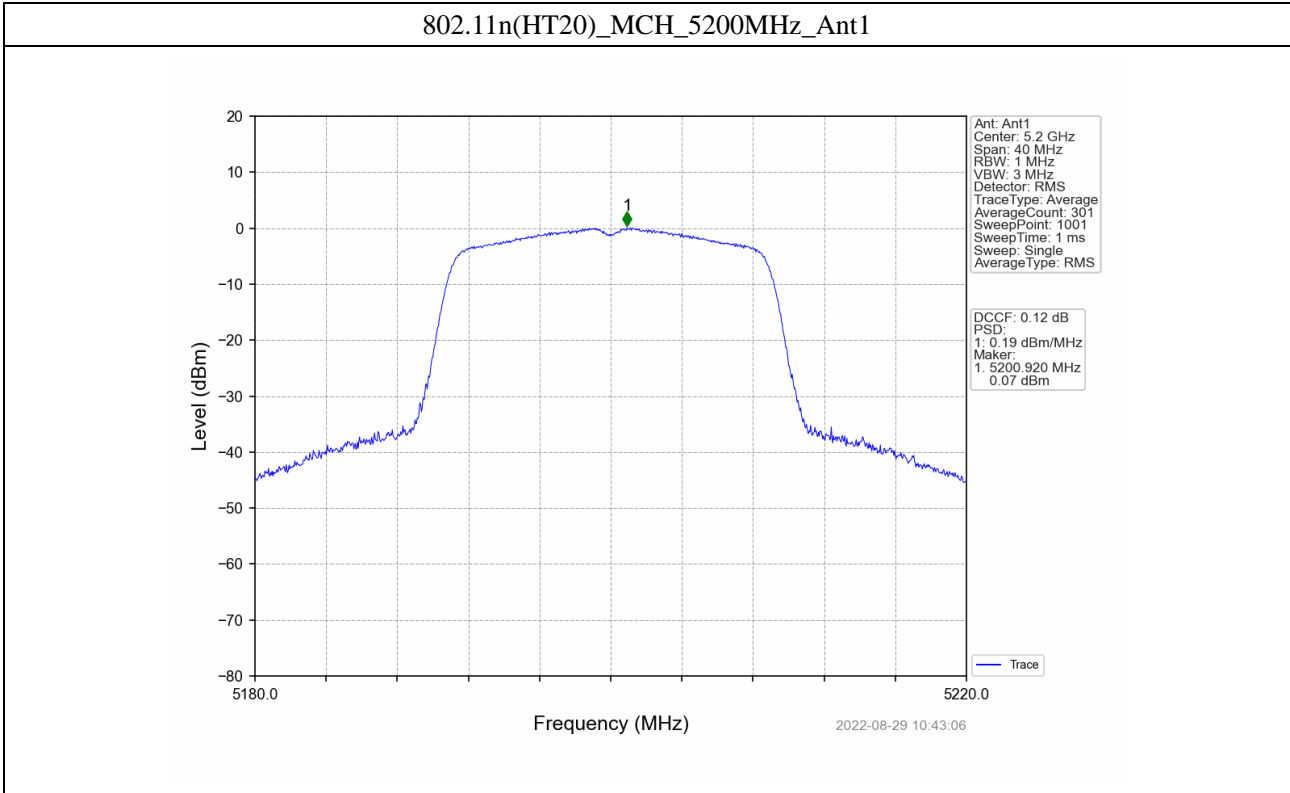


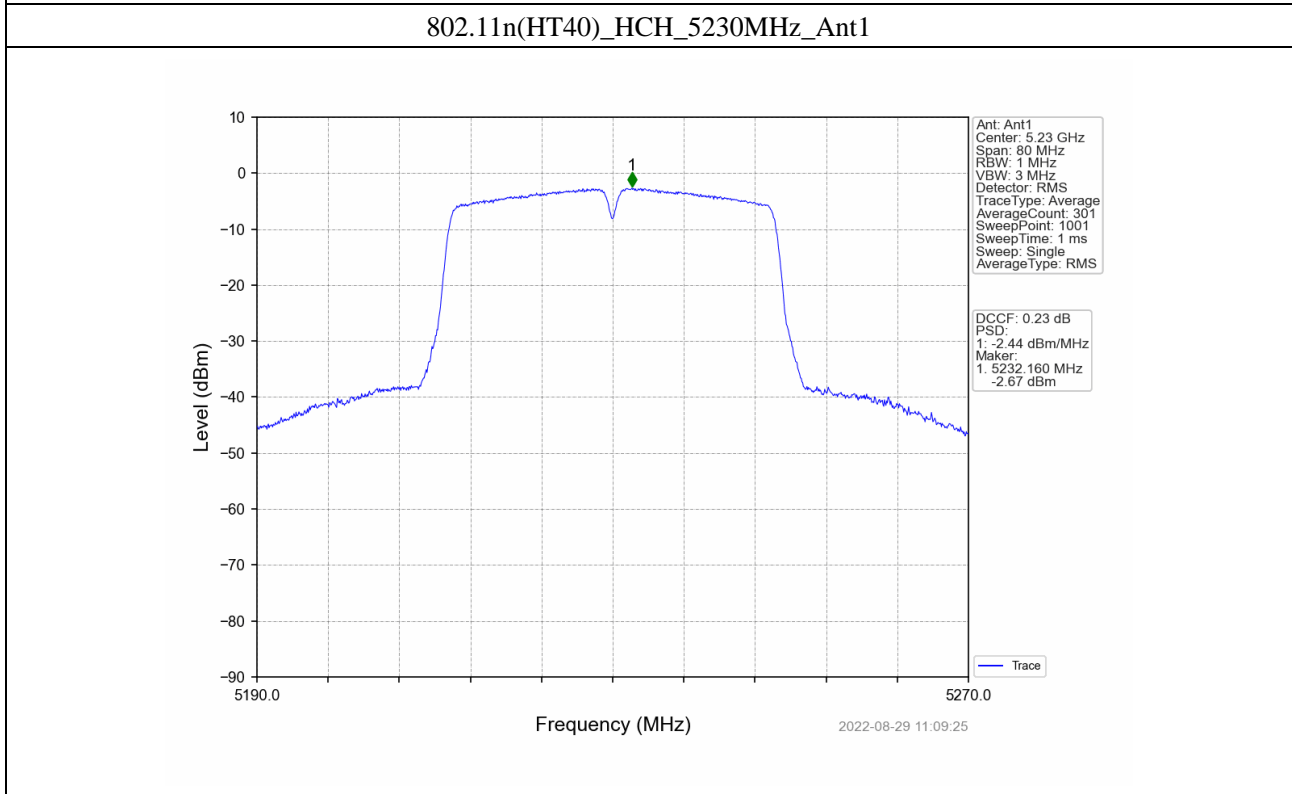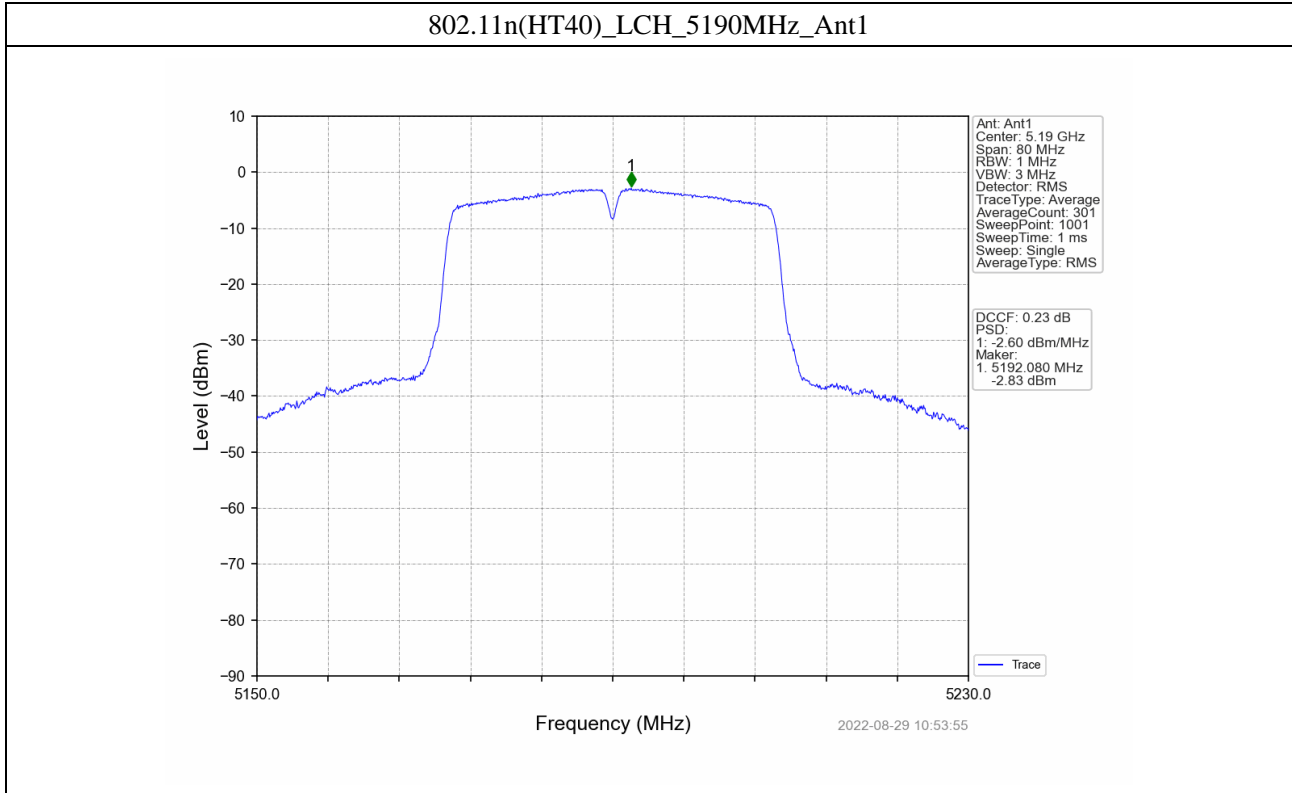

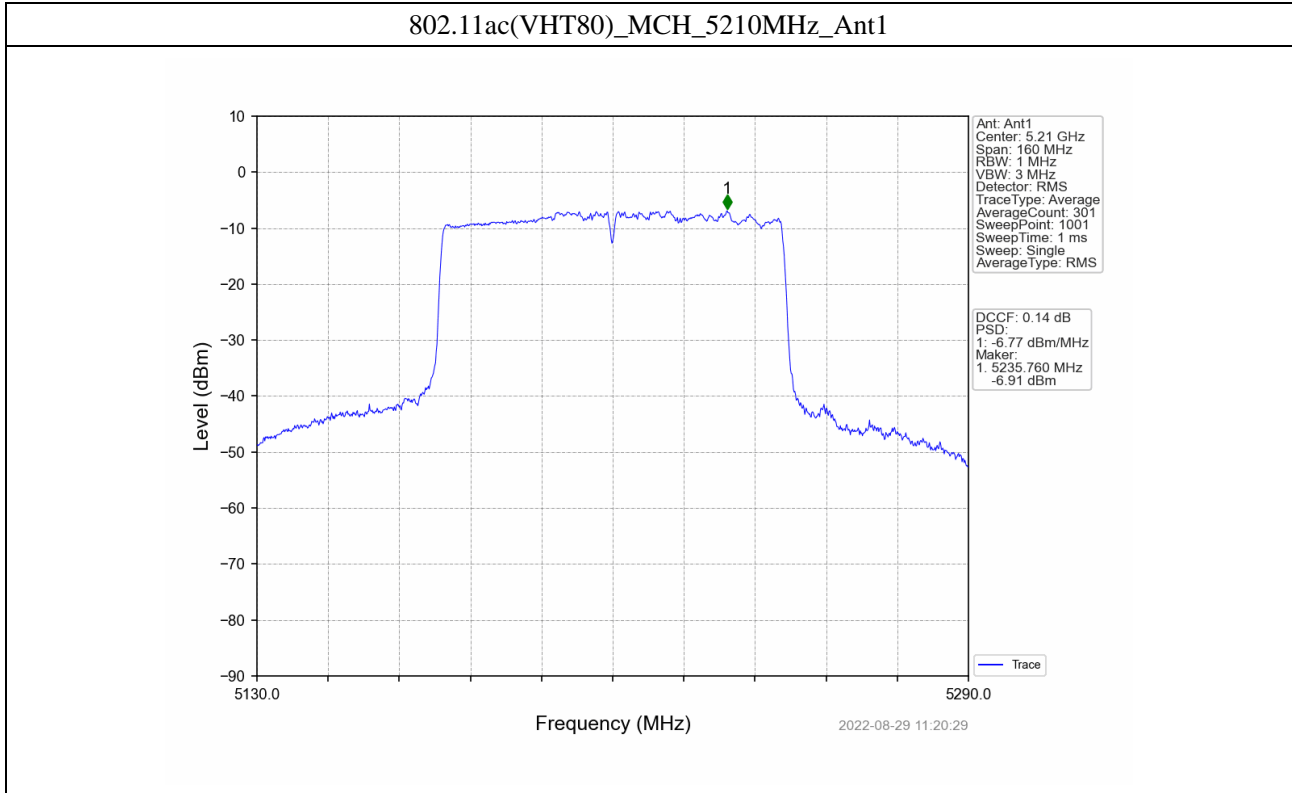





5725-5850MHz

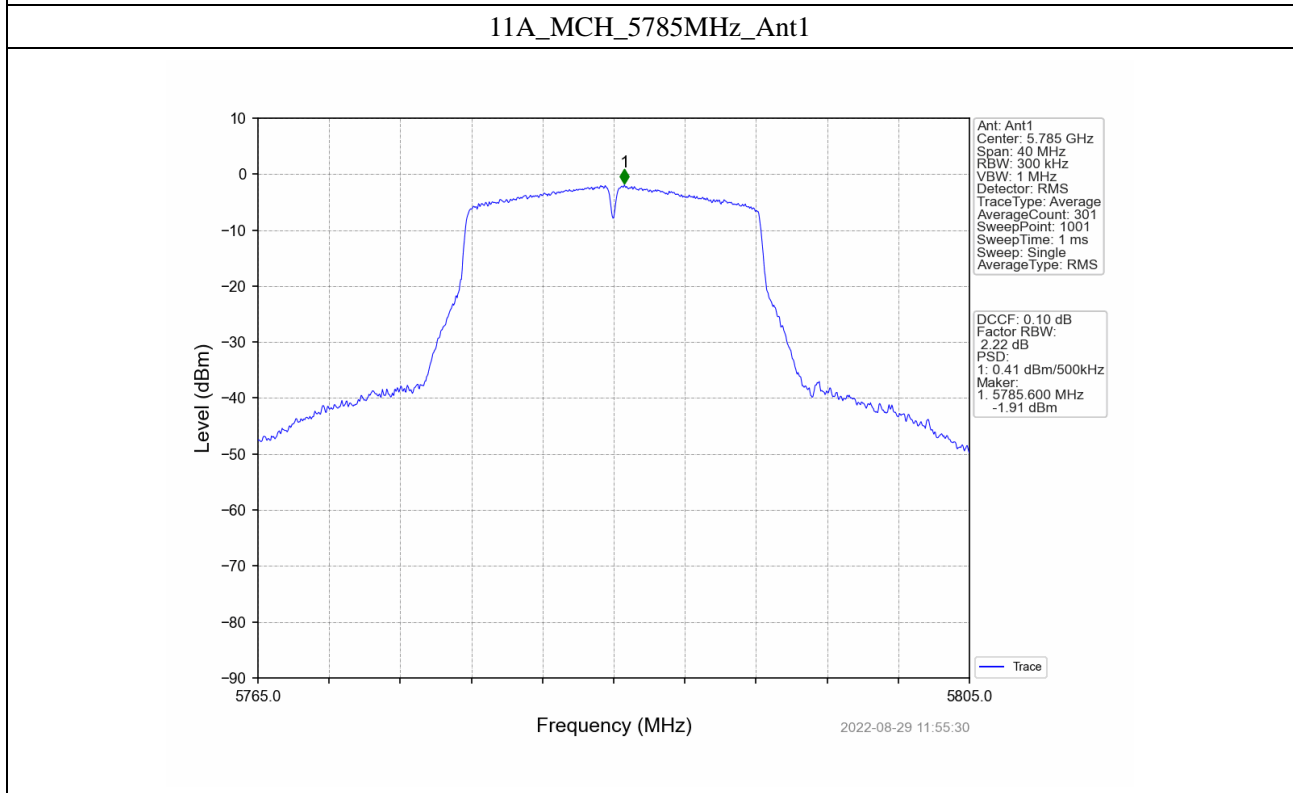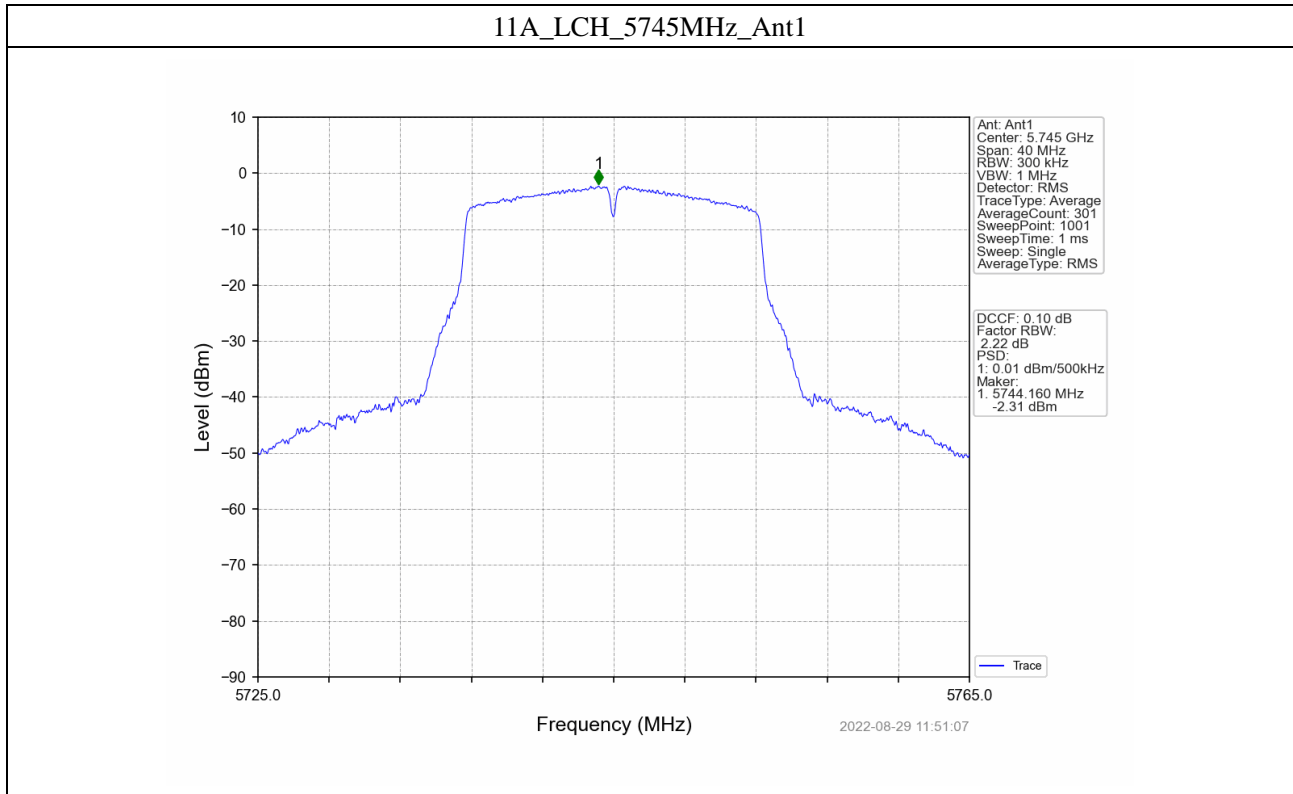


### 11A\_HCH\_5825MHz\_Ant1

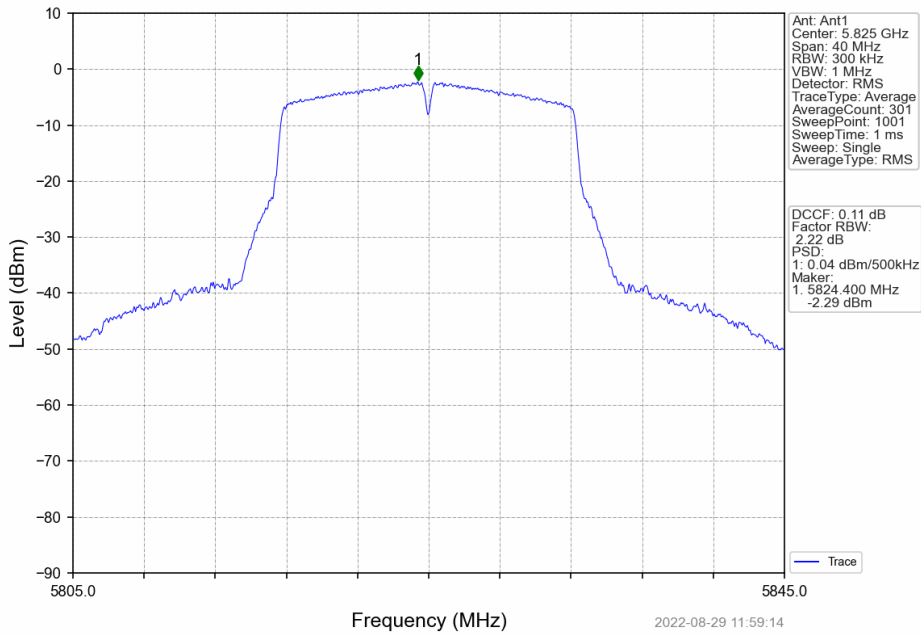


### N20\_LCH\_5745MHz\_Ant1


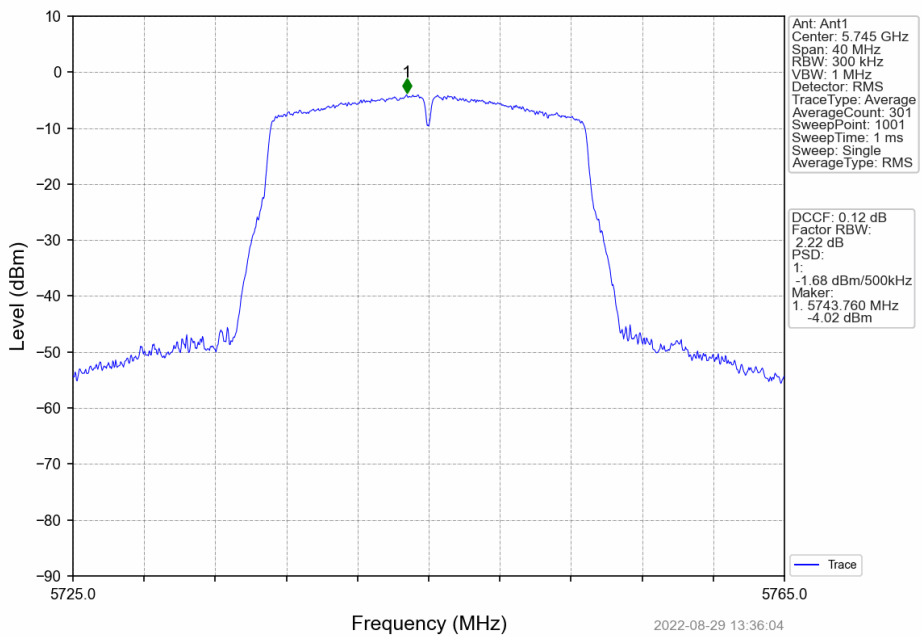



### N20\_MCH\_5785MHz\_Ant1

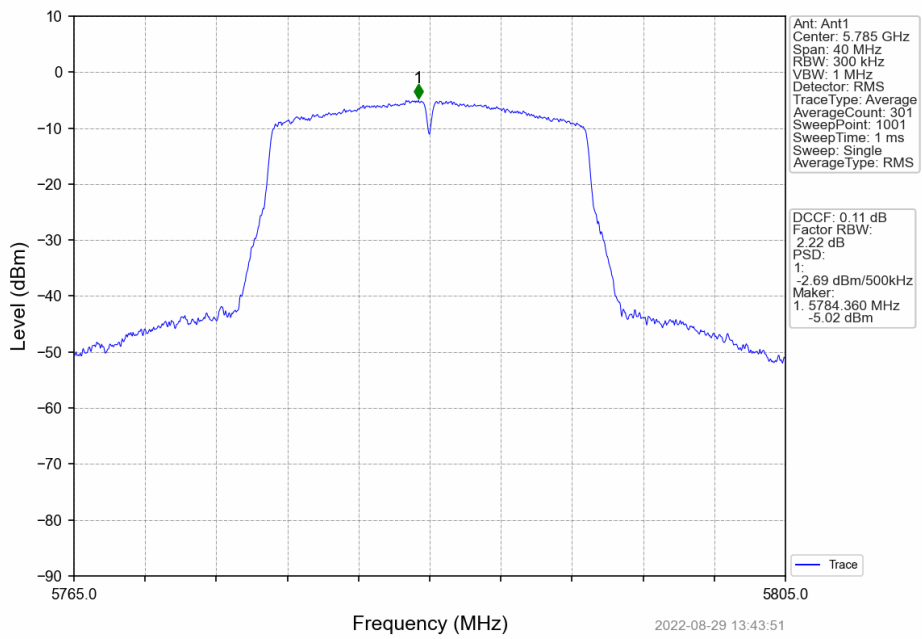

### N20\_HCH\_5825MHz\_Ant1


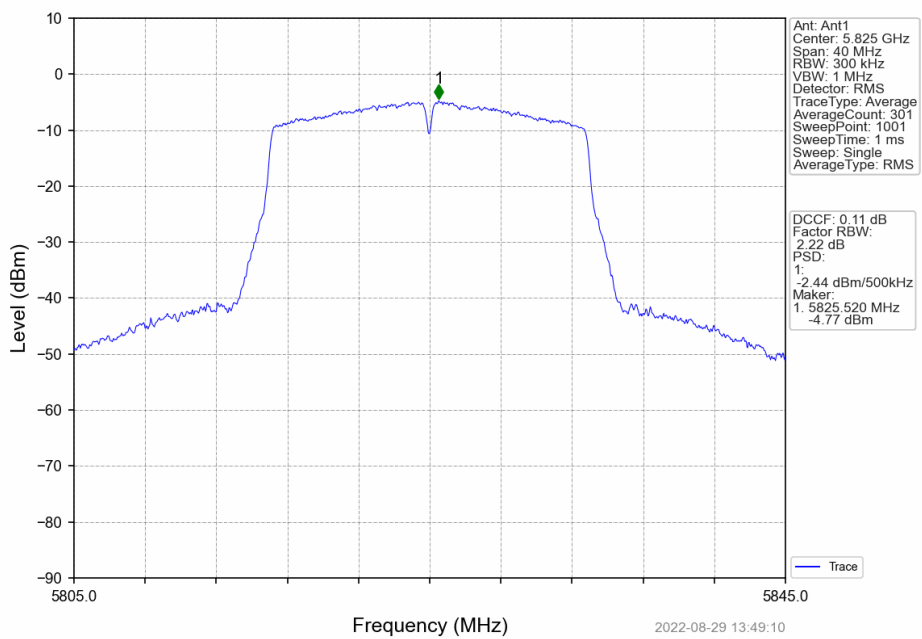


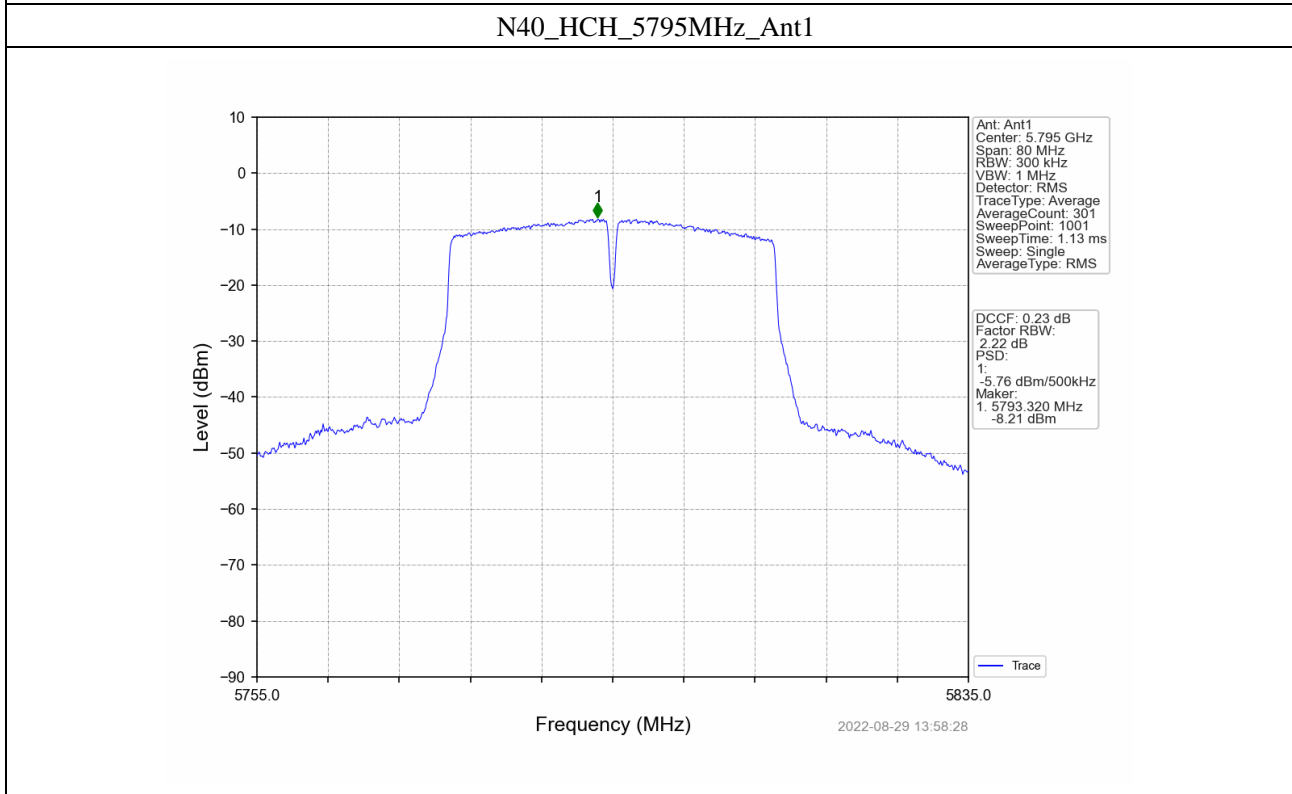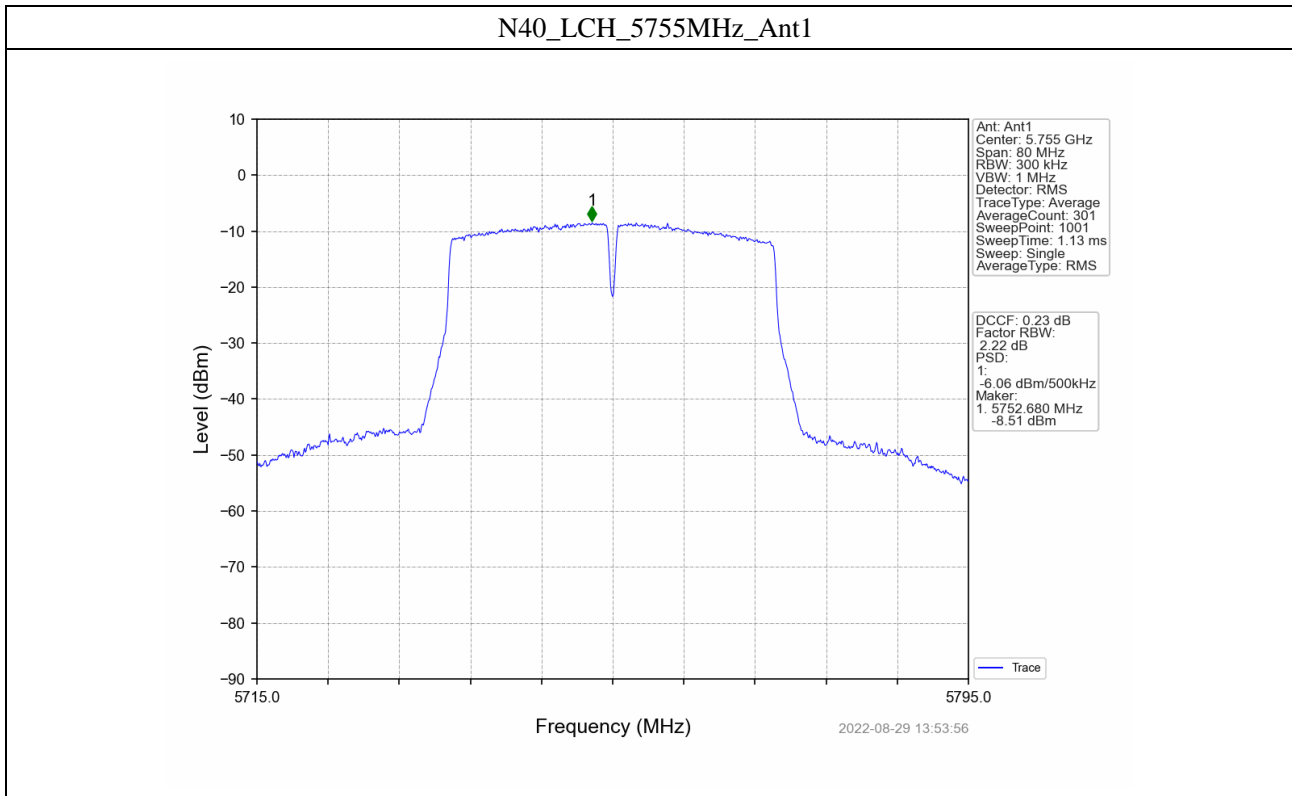

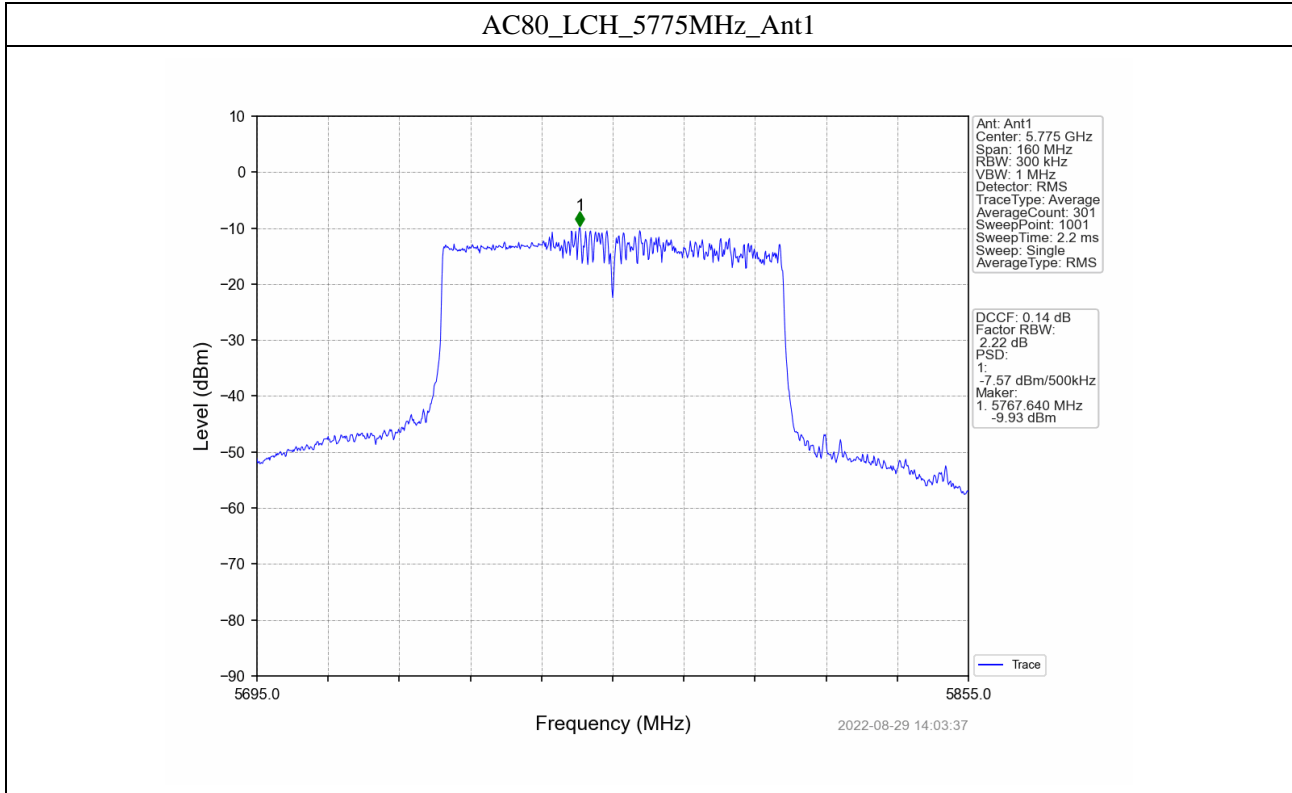


ANT2


5150-5250MHz

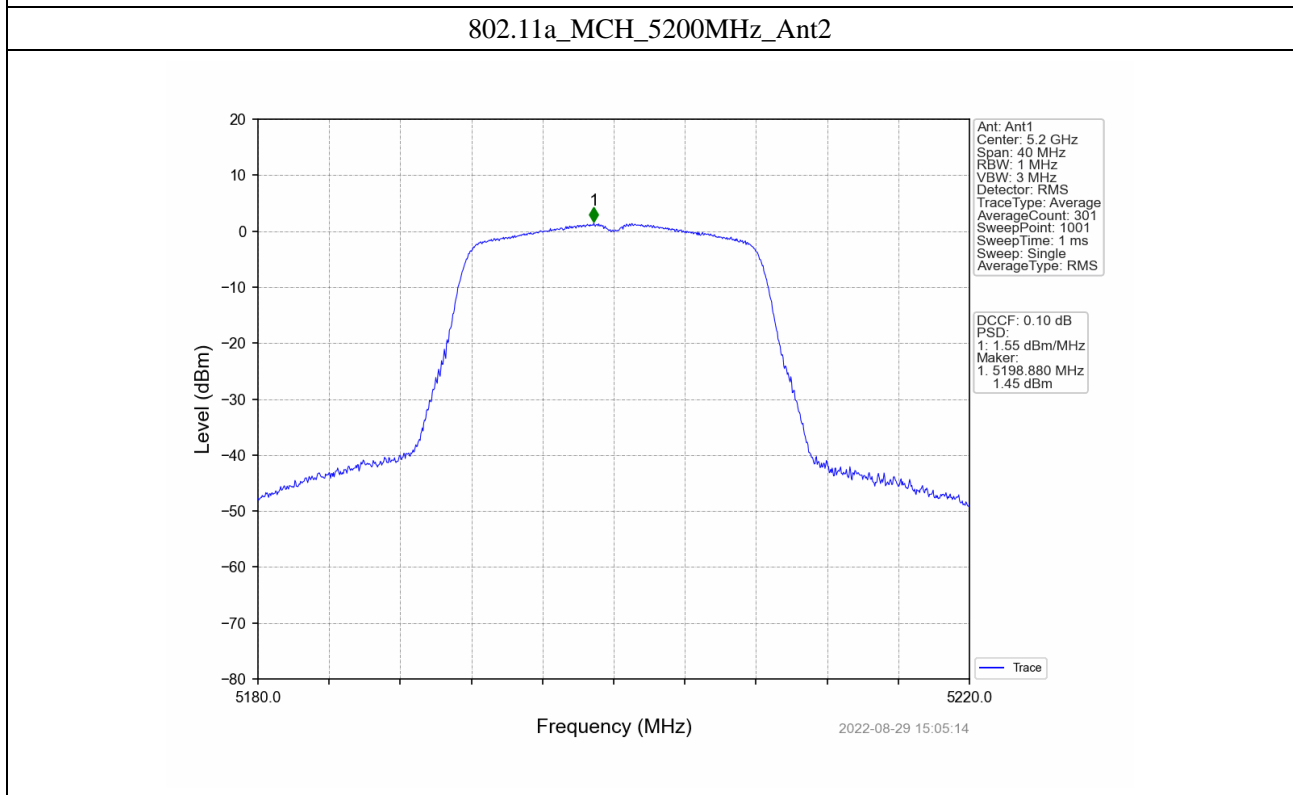
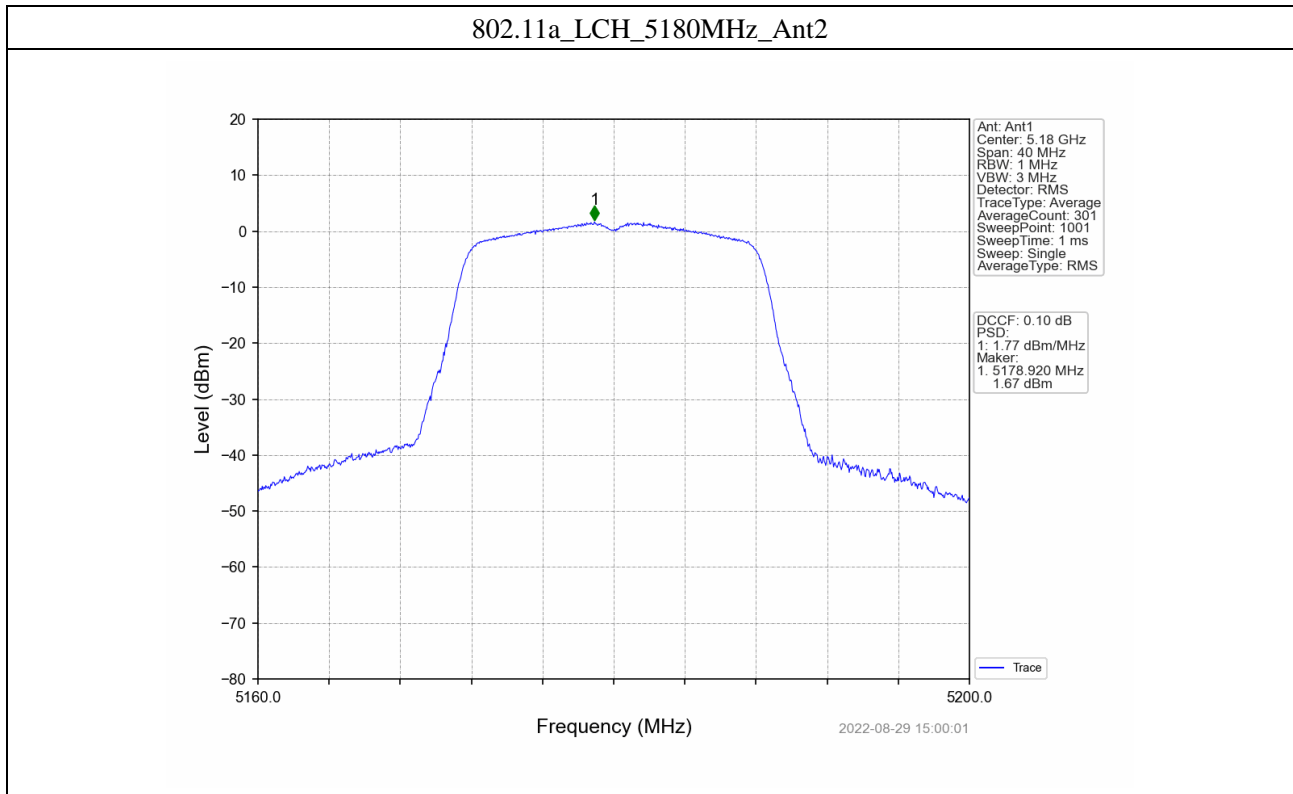


802.11a\_HCH\_5240MHz\_Ant2


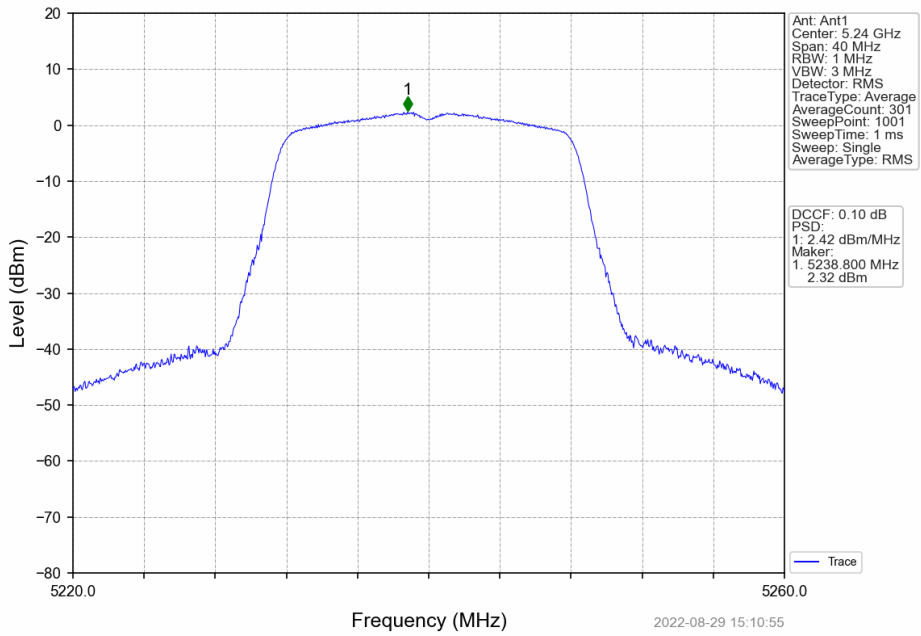



802.11n(HT20)\_LCH\_5180MHz\_Ant2

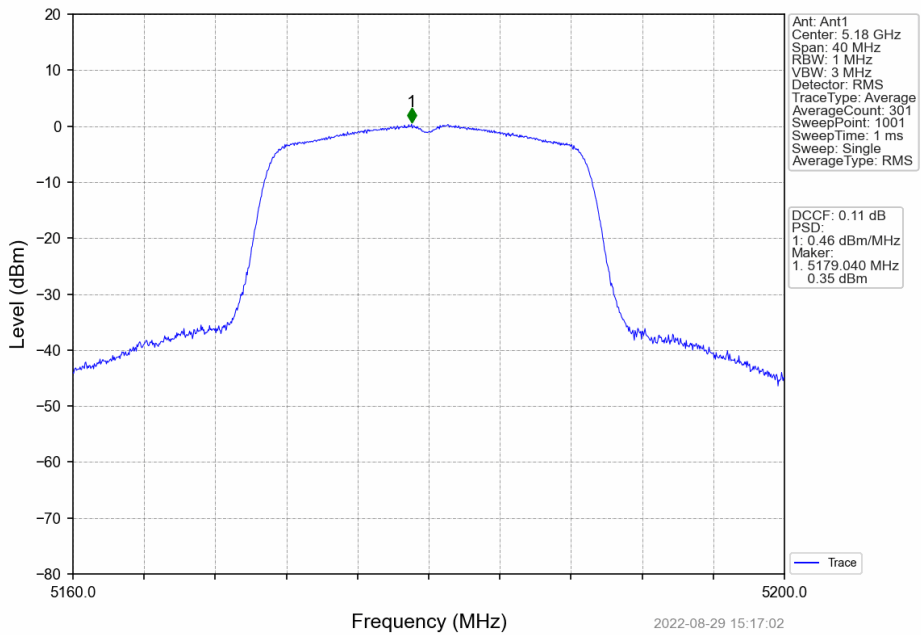

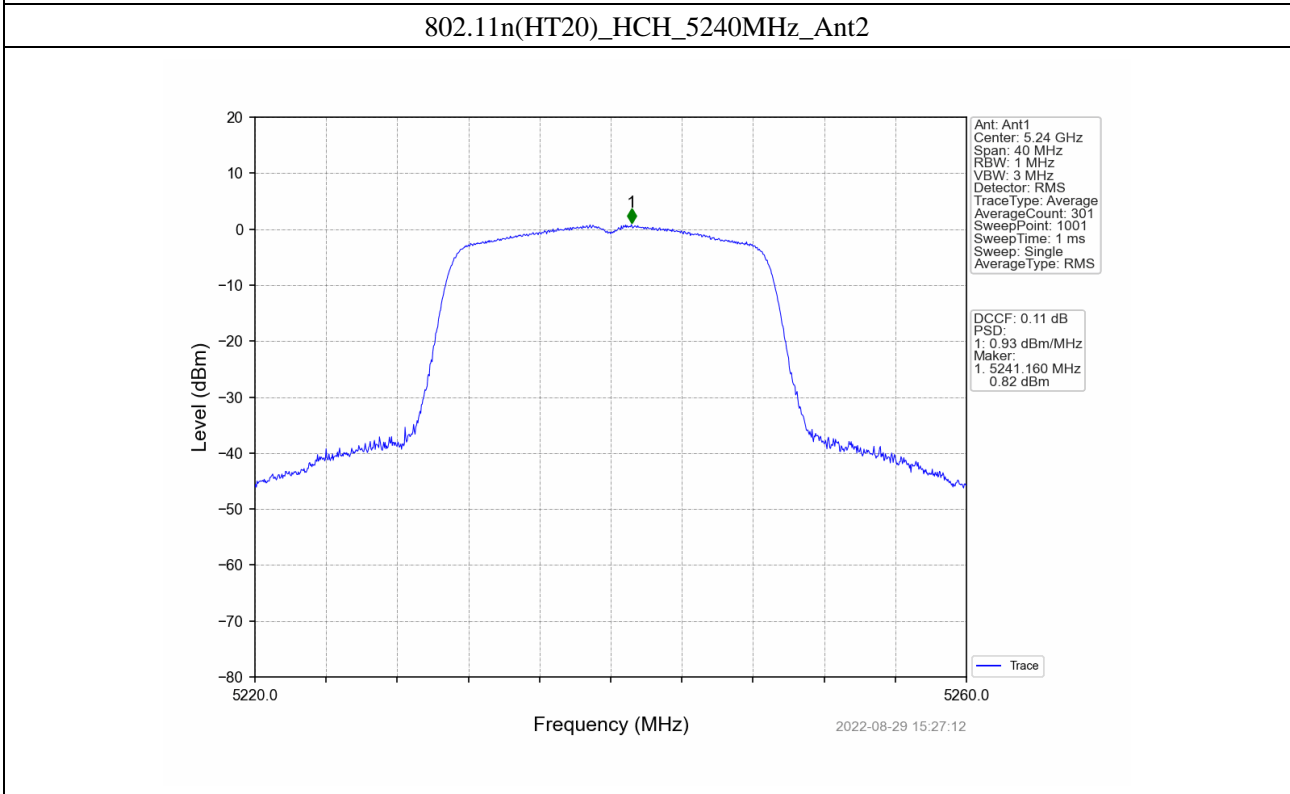
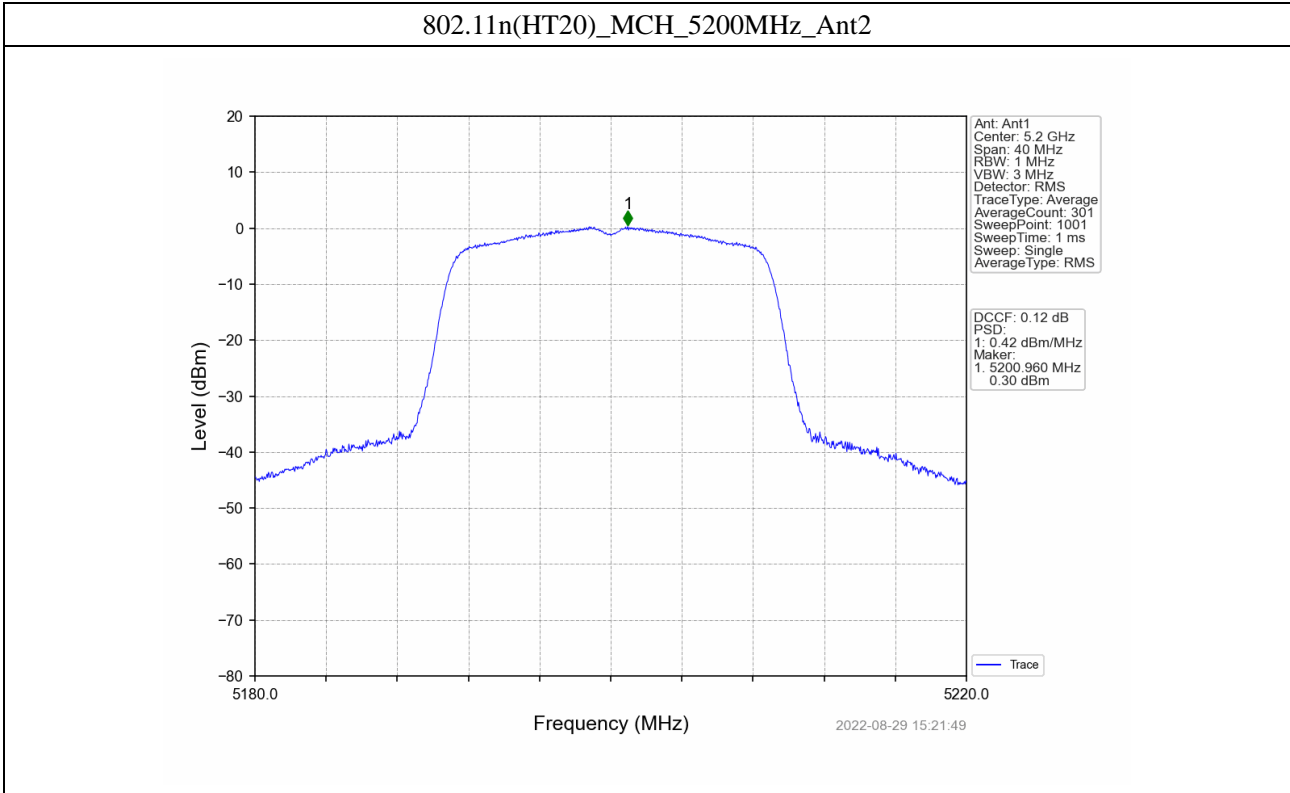






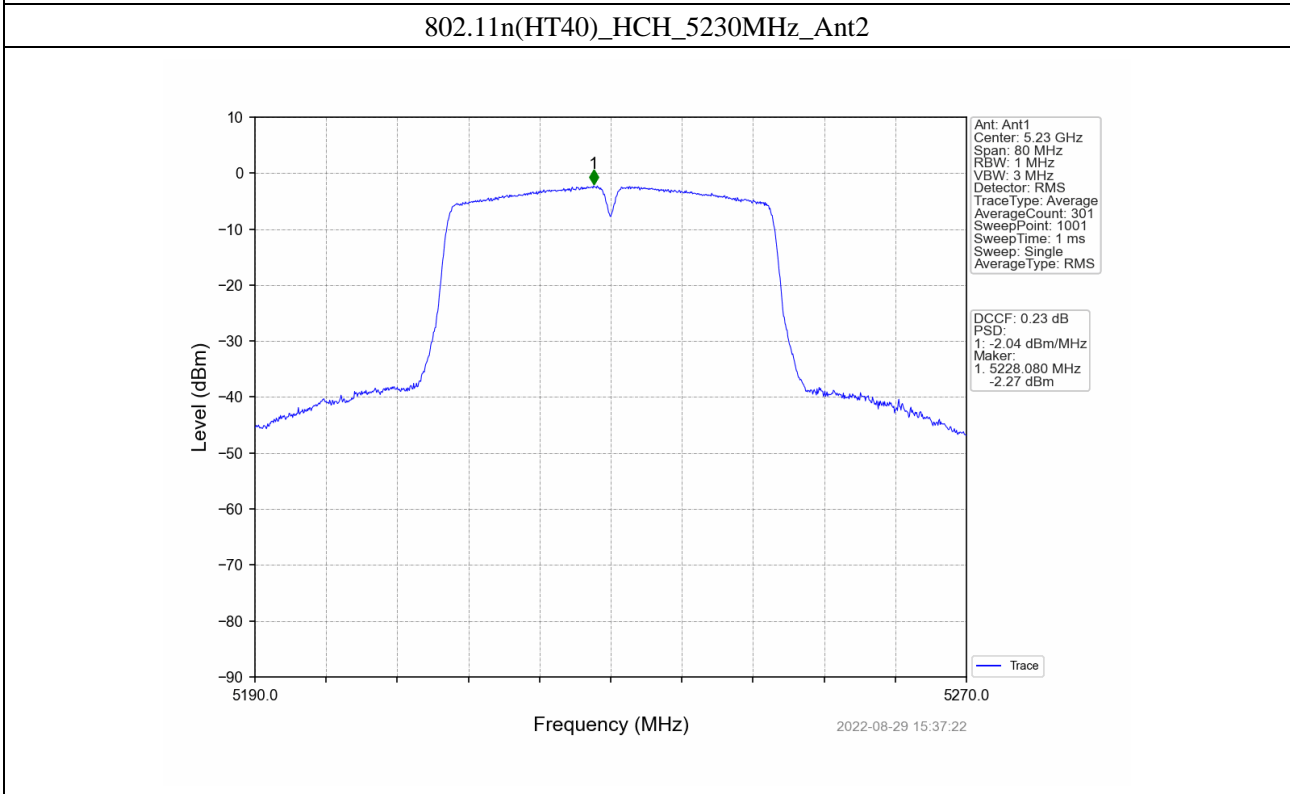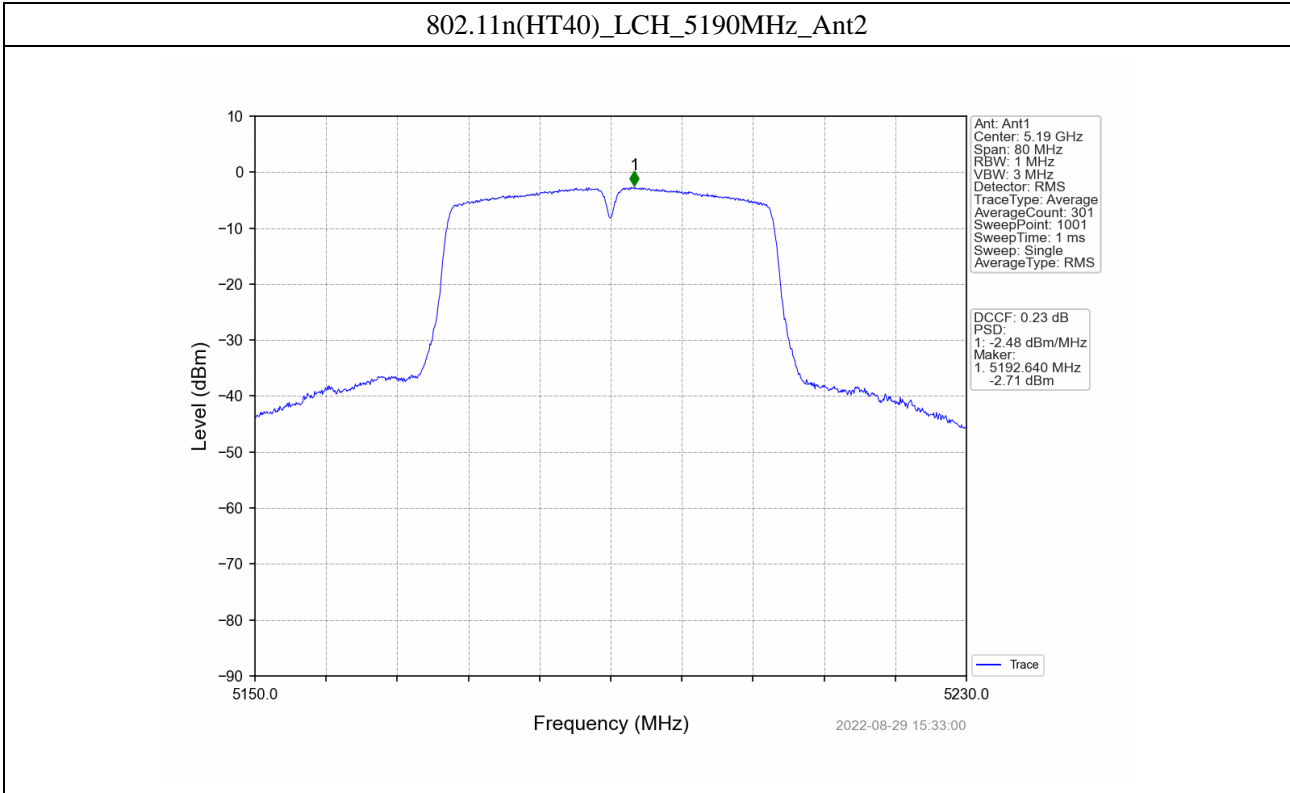

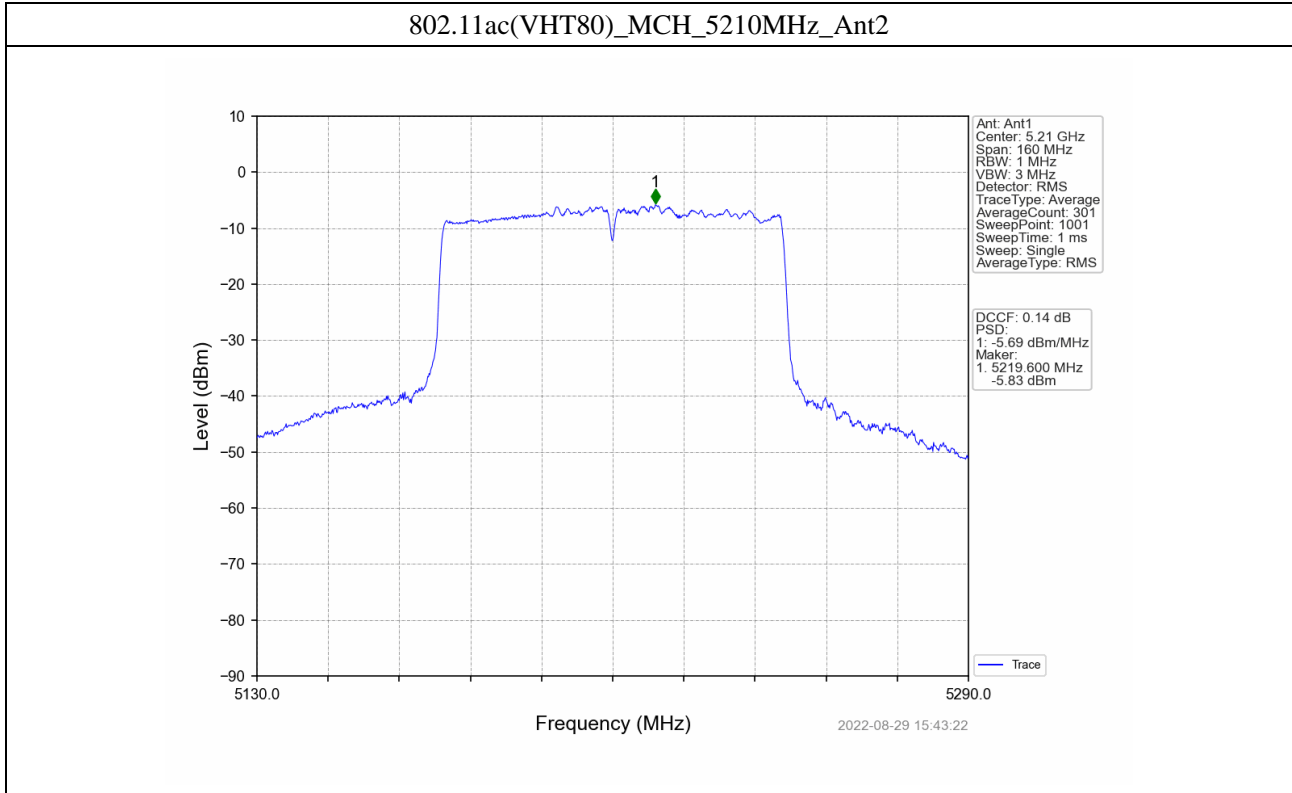


5725-5850MHz

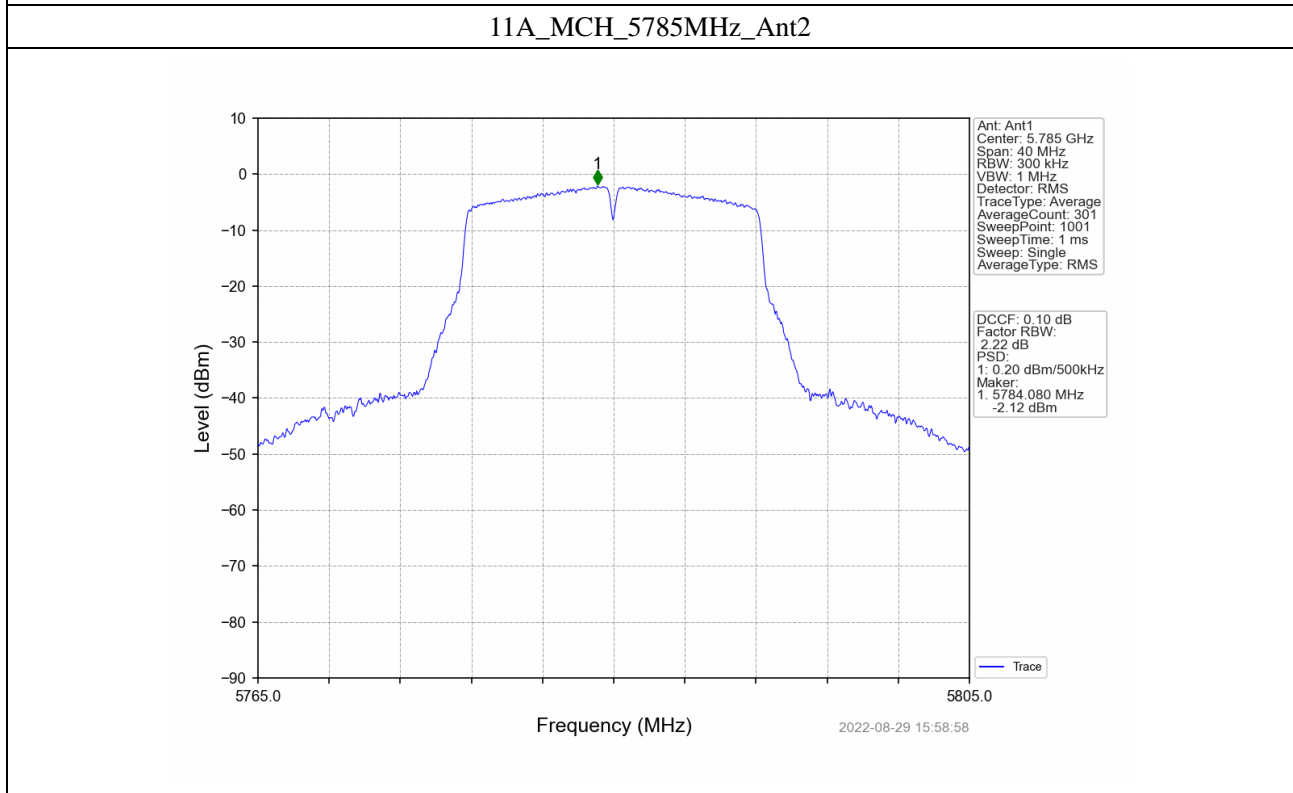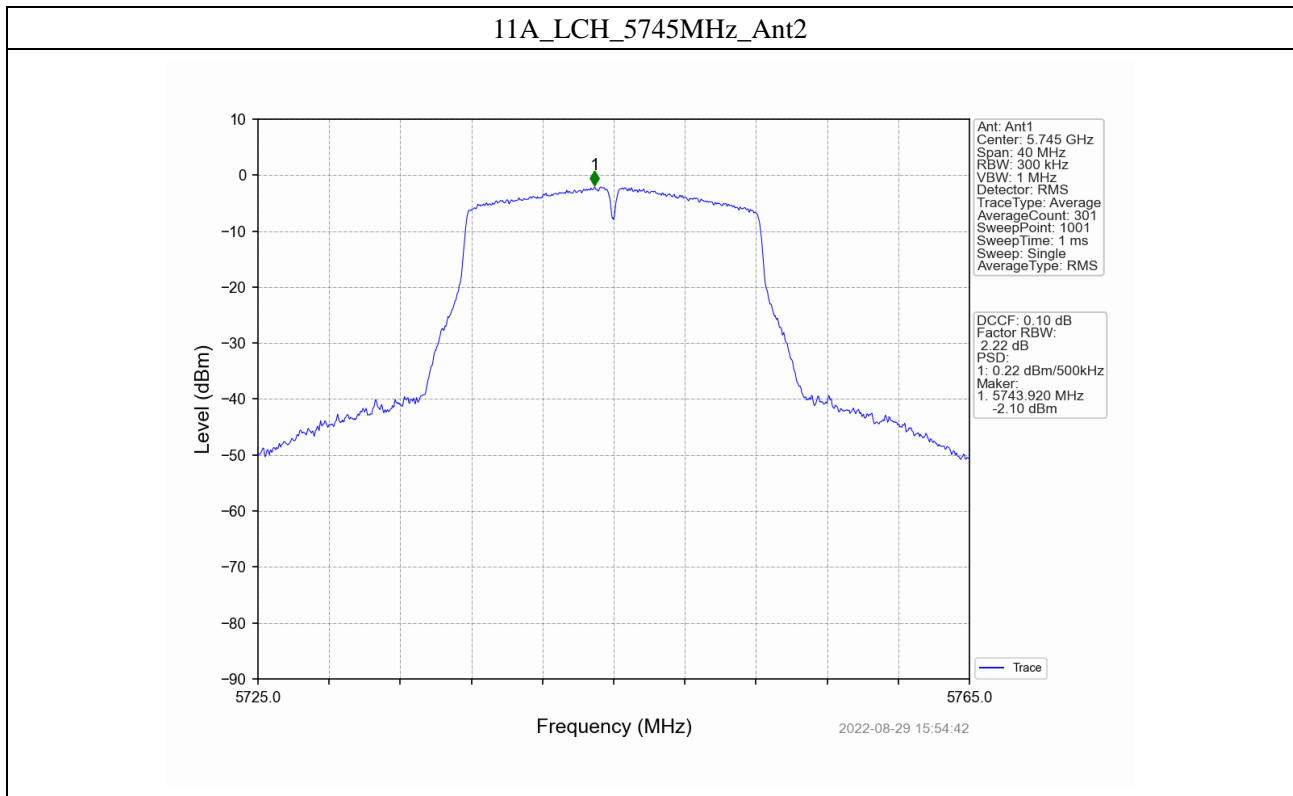


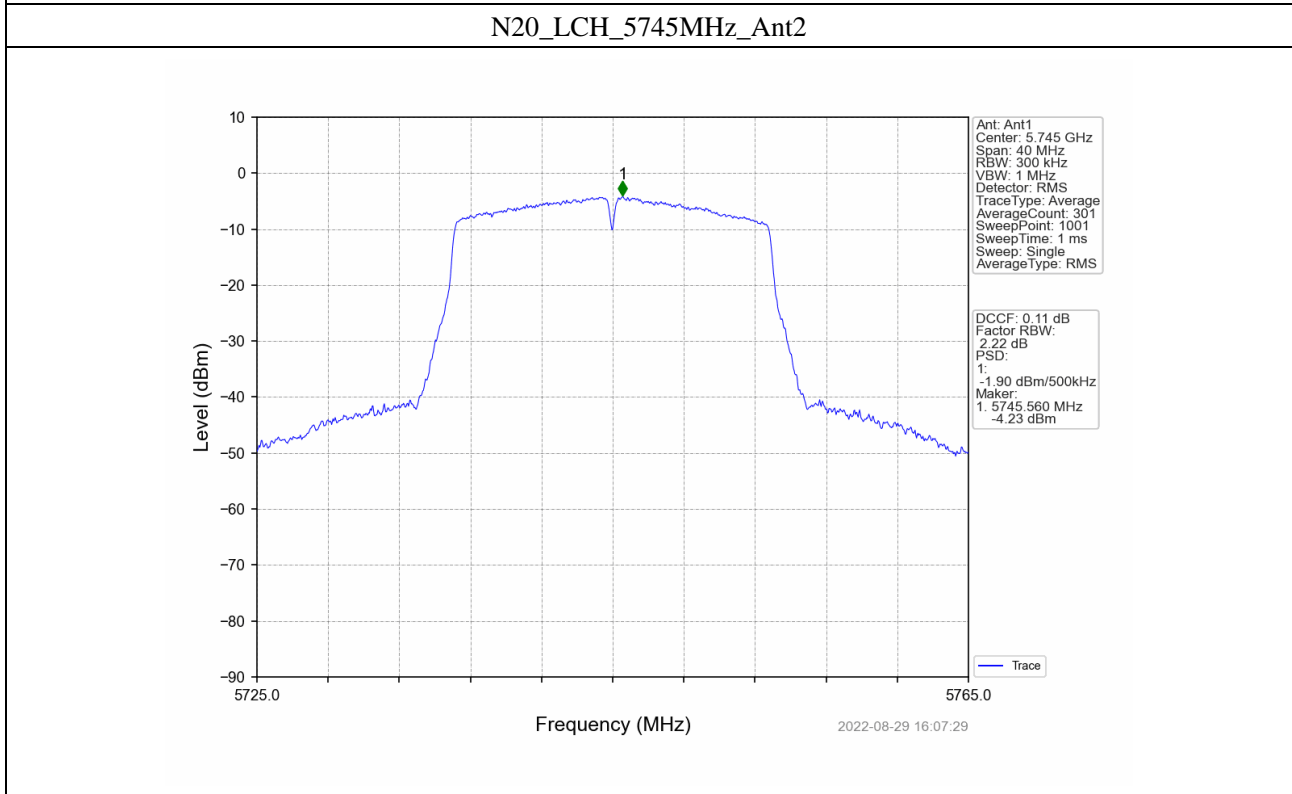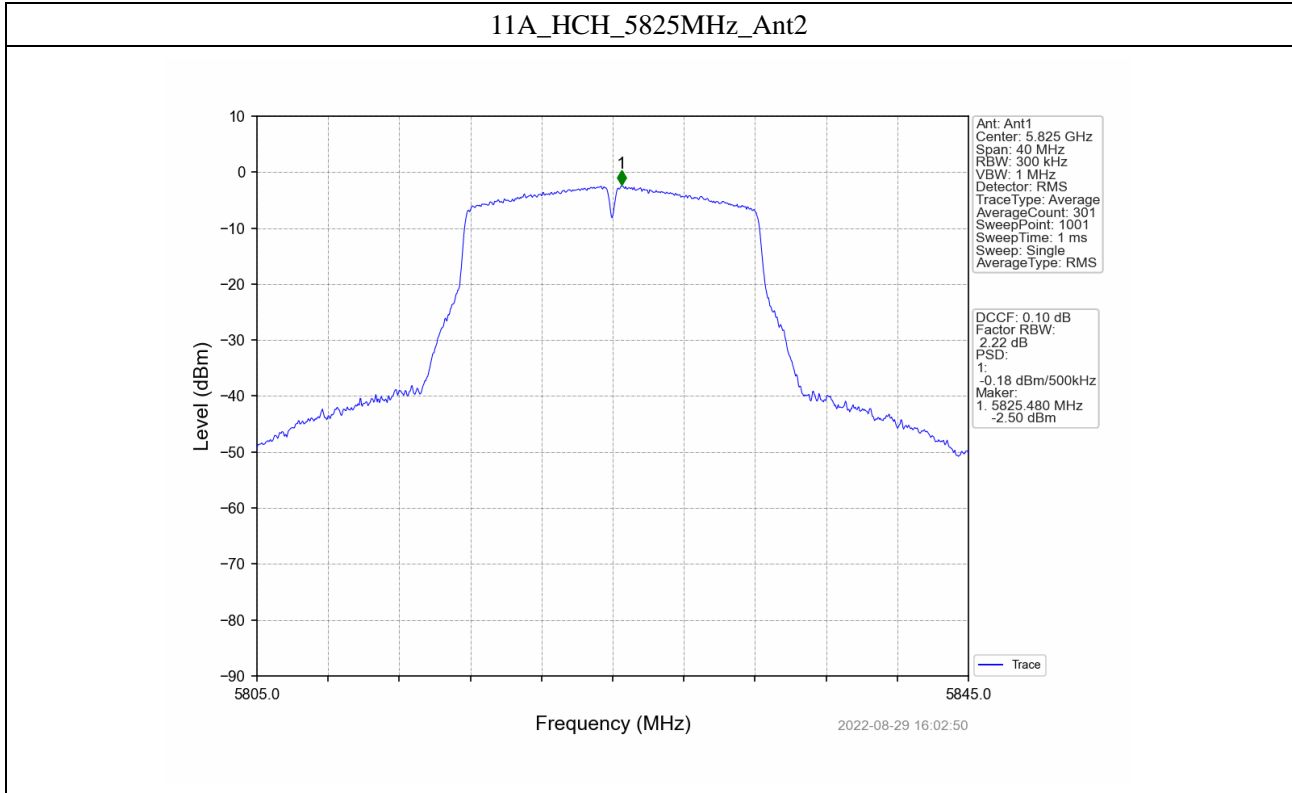


### N20\_MCH\_5785MHz\_Ant2

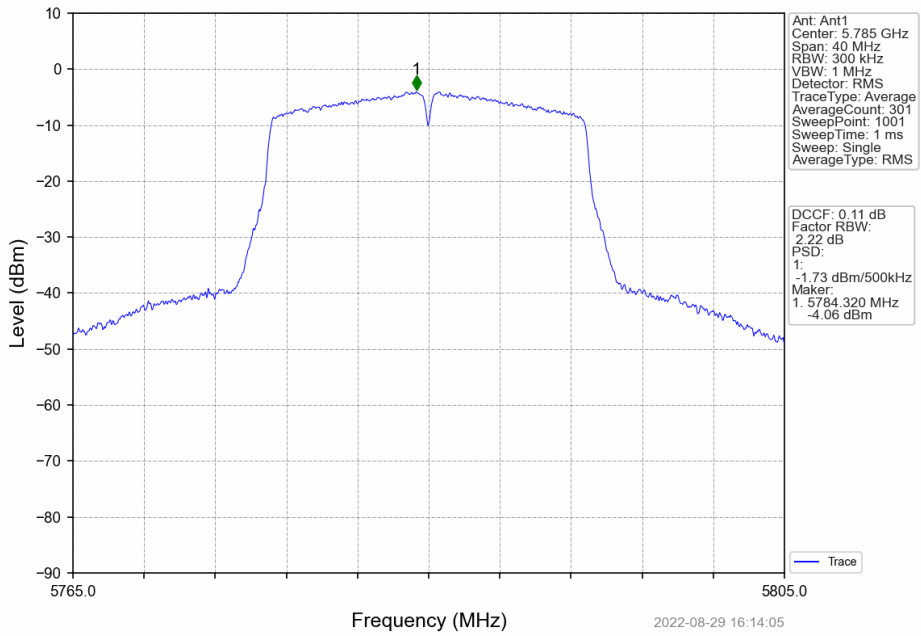


### N20\_HCH\_5825MHz\_Ant2

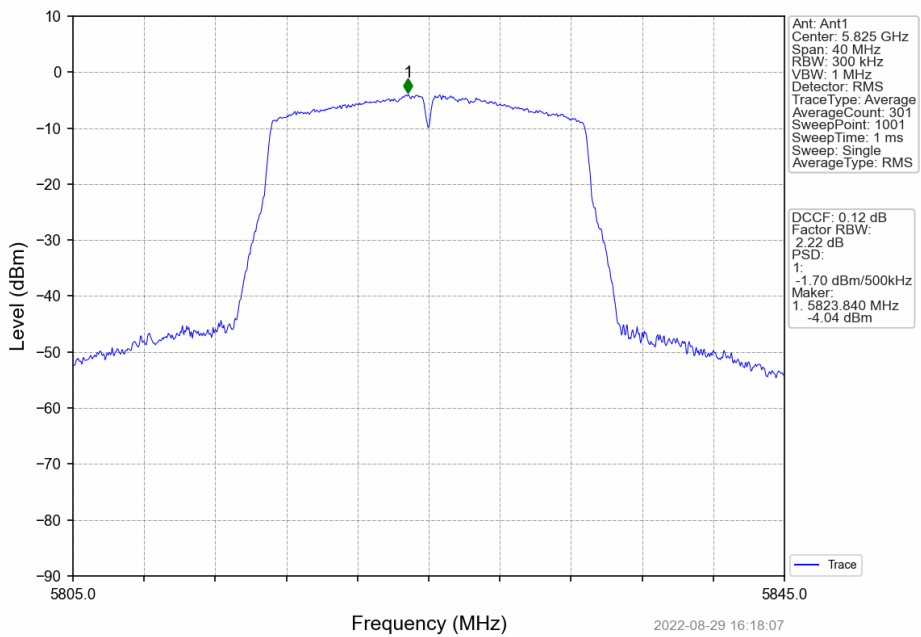


### N40\_LCH\_5755MHz\_Ant2

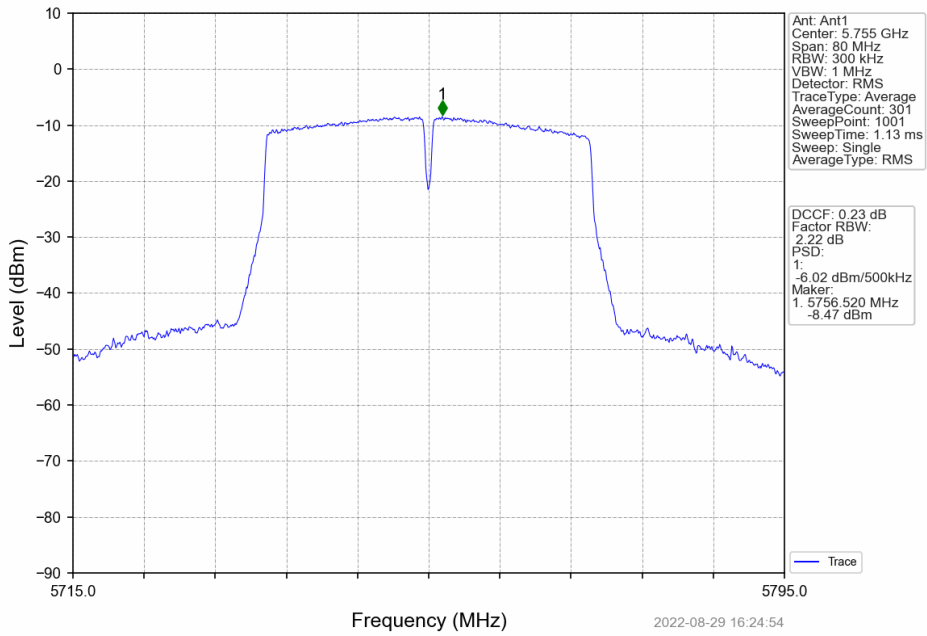

### N40\_HCH\_5795MHz\_Ant2

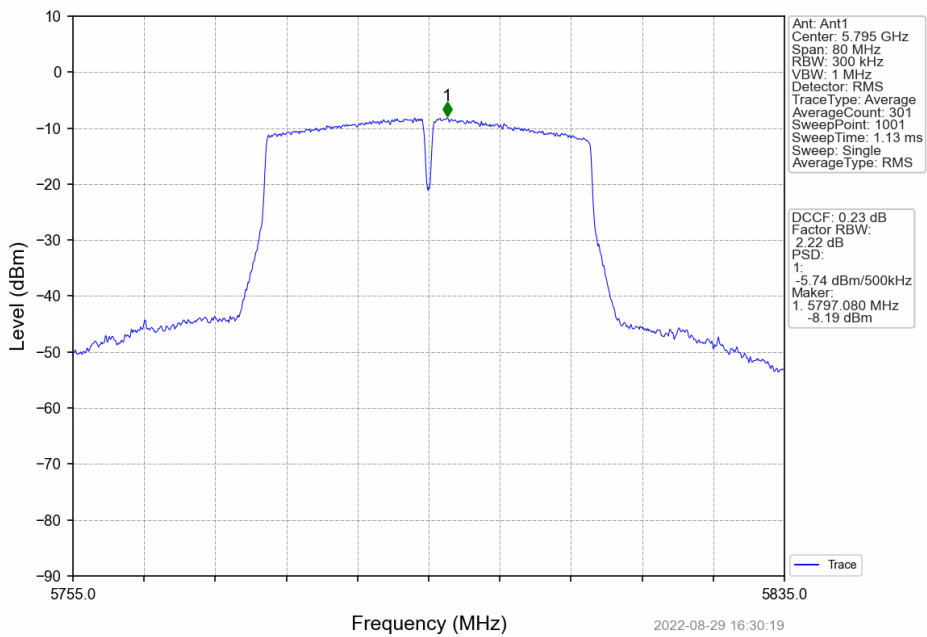

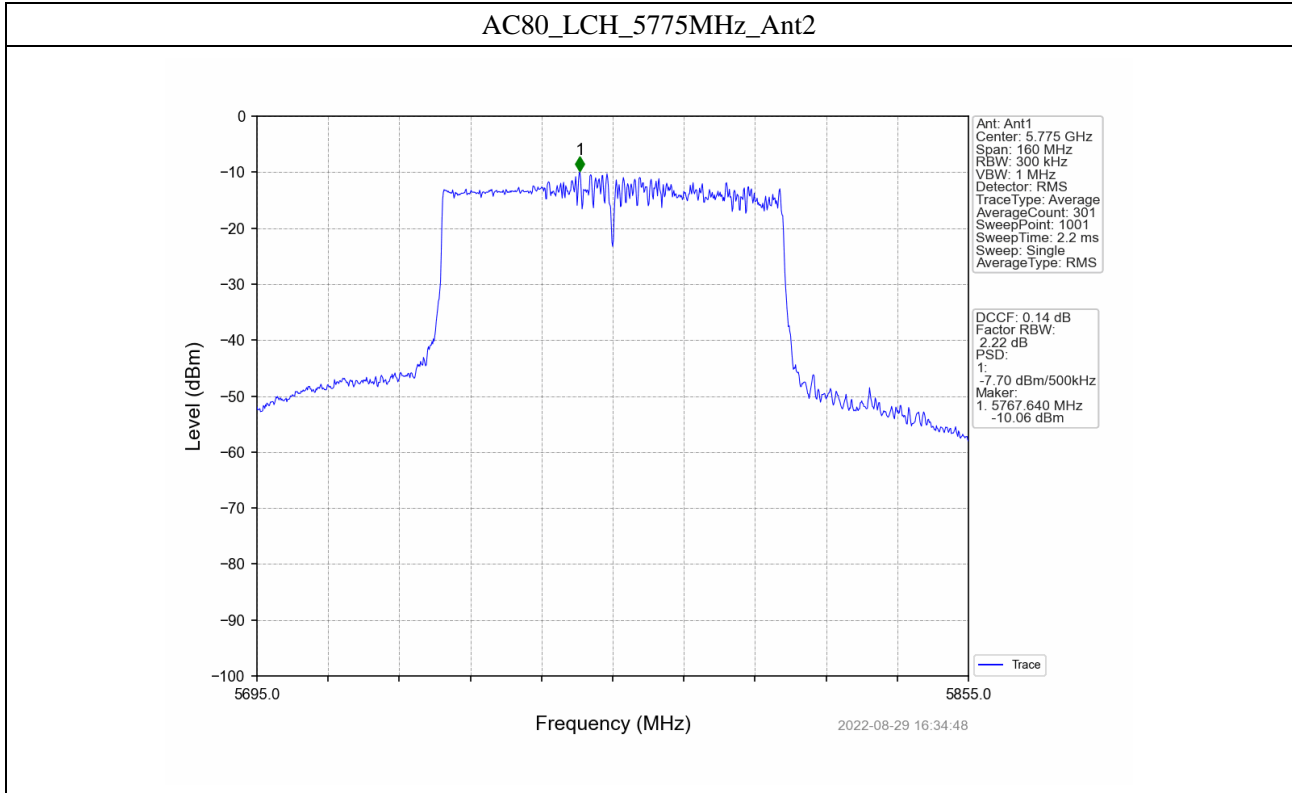



**APPENDIX B****Emission Bandwidth and Occupied Bandwidth**



<b>U-NII-1:5150-5250MHz</b>						
<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>ANT1</b>		<b>ANT2</b>		<b>Result</b>
		<b>26 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>26 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	
802.11a	5180	20.584	17.420	20.432	17.415	Pass
	5200	20.746	17.482	20.490	17.401	Pass
	5240	20.611	17.478	20.556	17.436	Pass
802.11n-HT20	5180	26.379	18.370	23.435	18.358	Pass
	5200	25.869	18.355	22.937	18.339	Pass
	5240	25.148	18.329	25.144	18.307	Pass
802.11n-HT40	5190	49.781	36.774	45.006	36.810	Pass
	5230	41.458	36.717	41.571	36.665	Pass
802.11ac-HT80	5210	101.579	77.593	105.284	77.673	Pass



<b>U-NII-3: 5725-5850MHz</b>						
<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>ANT1</b>		<b>ANT2</b>		<b>Limit kHz</b>
		<b>6 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>6 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	
802.11a	5745	15.168	17.447	15.165	17.441	≥500
	5785	15.142	17.481	15.154	17.477	≥500
	5825	15.180	17.455	15.136	17.420	≥500
802.11n-HT20	5745	15.165	18.234	15.126	18.305	≥500
	5785	15.143	18.318	15.160	18.416	≥500
	5825	15.148	18.307	15.153	18.230	≥500
802.11n-HT40	5755	35.203	36.692	35.199	36.643	≥500
	5795	35.186	36.666	35.194	36.664	≥500
802.11ac-HT80	5775	75.781	77.620	75.789	77.556	≥500






**ANT1**  
**5150-5250MHz**  
**99% OBW**

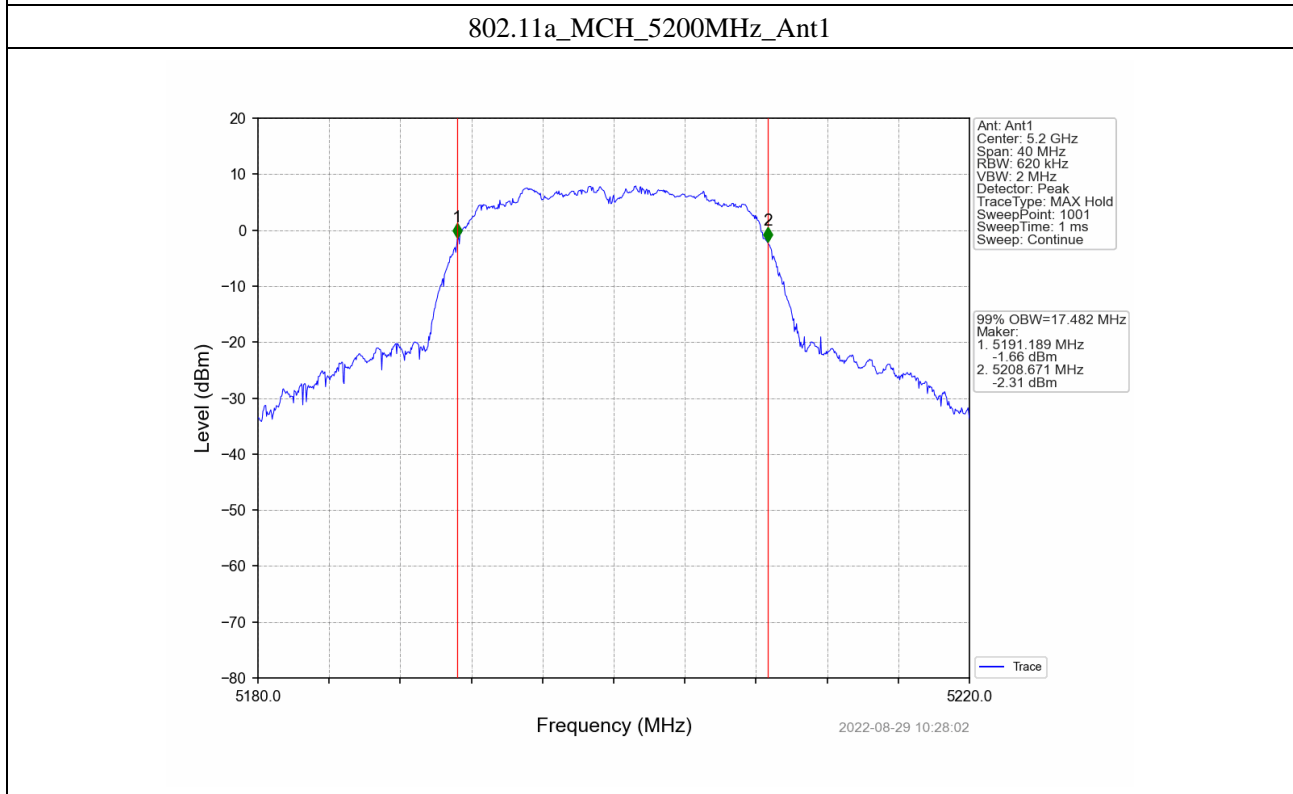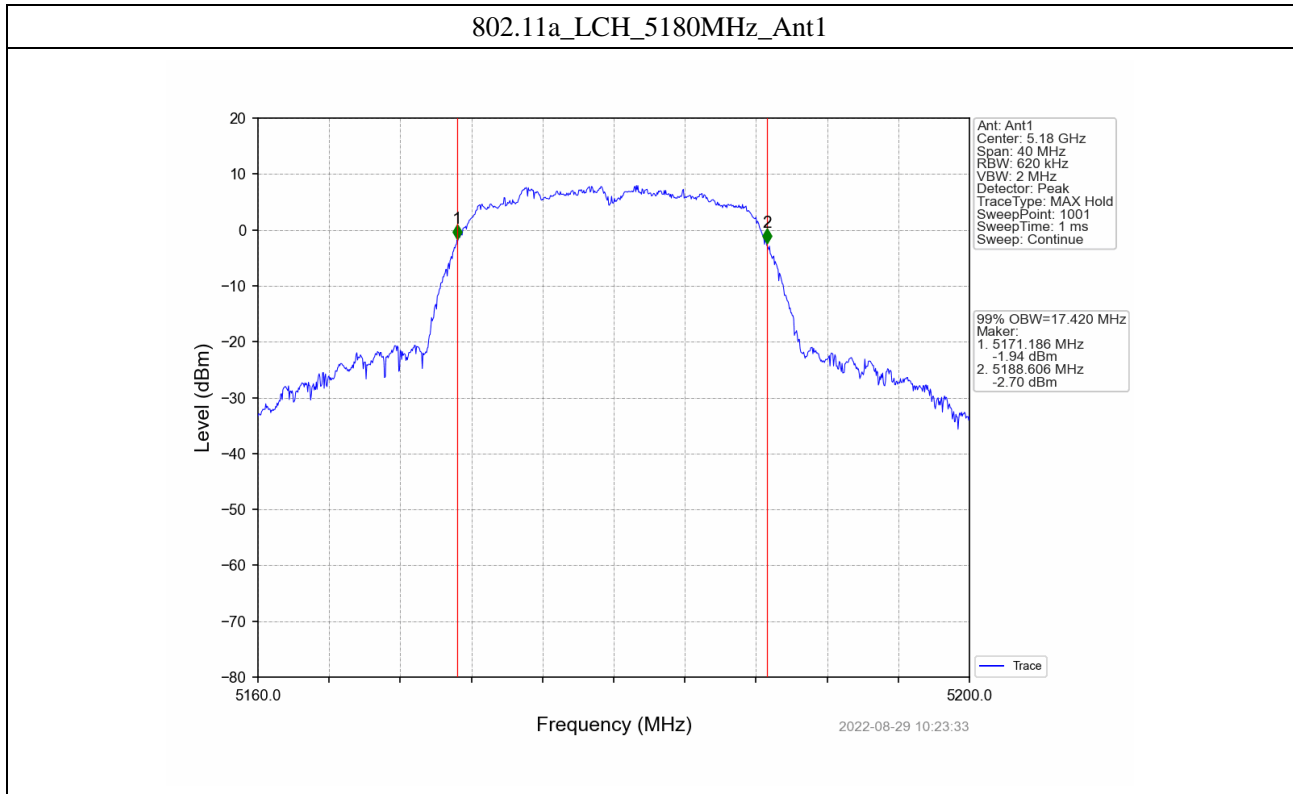

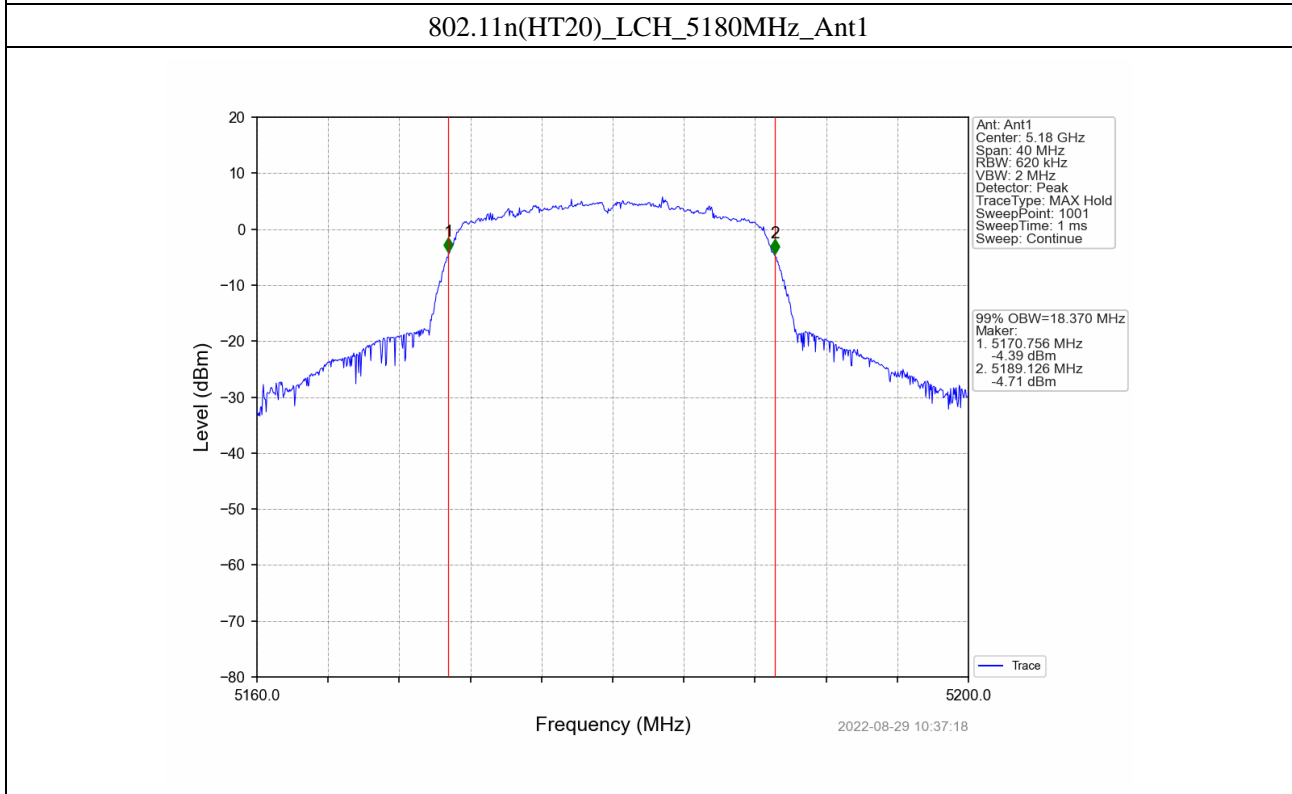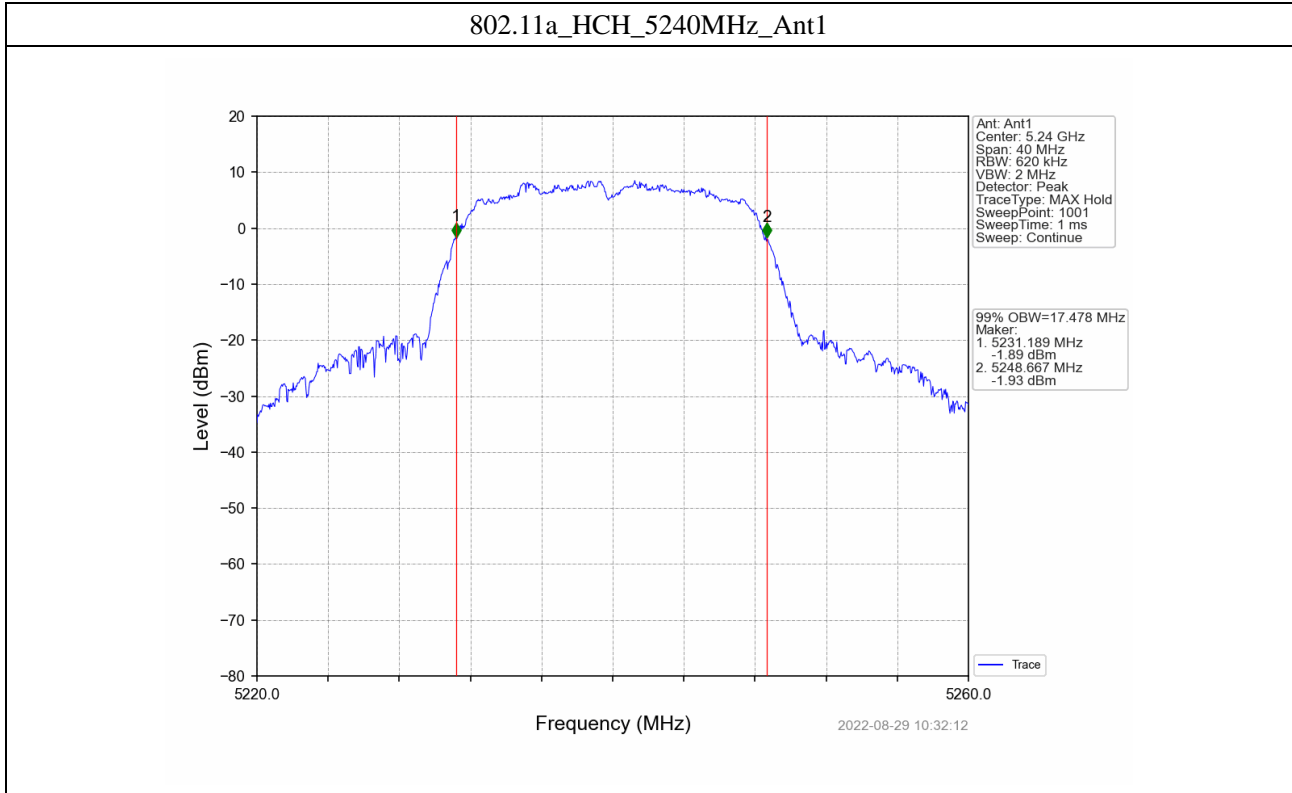

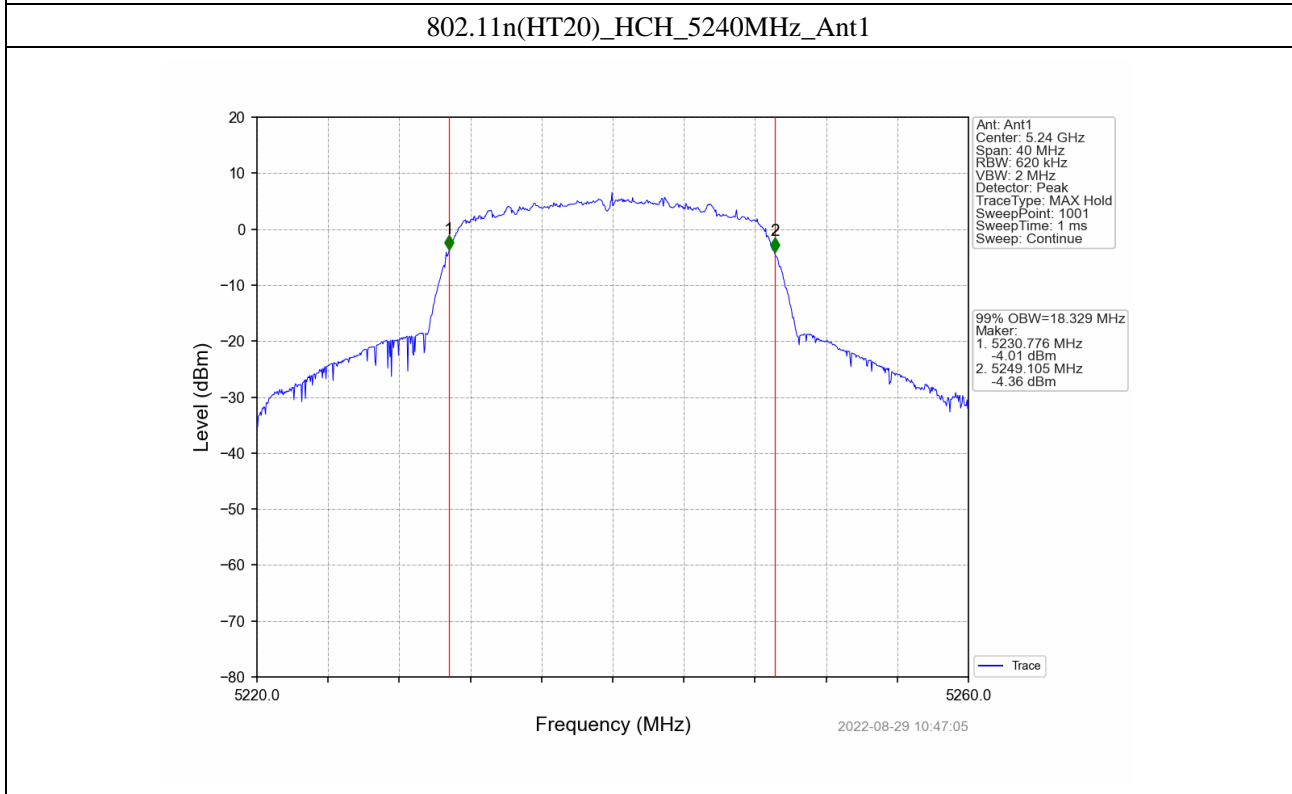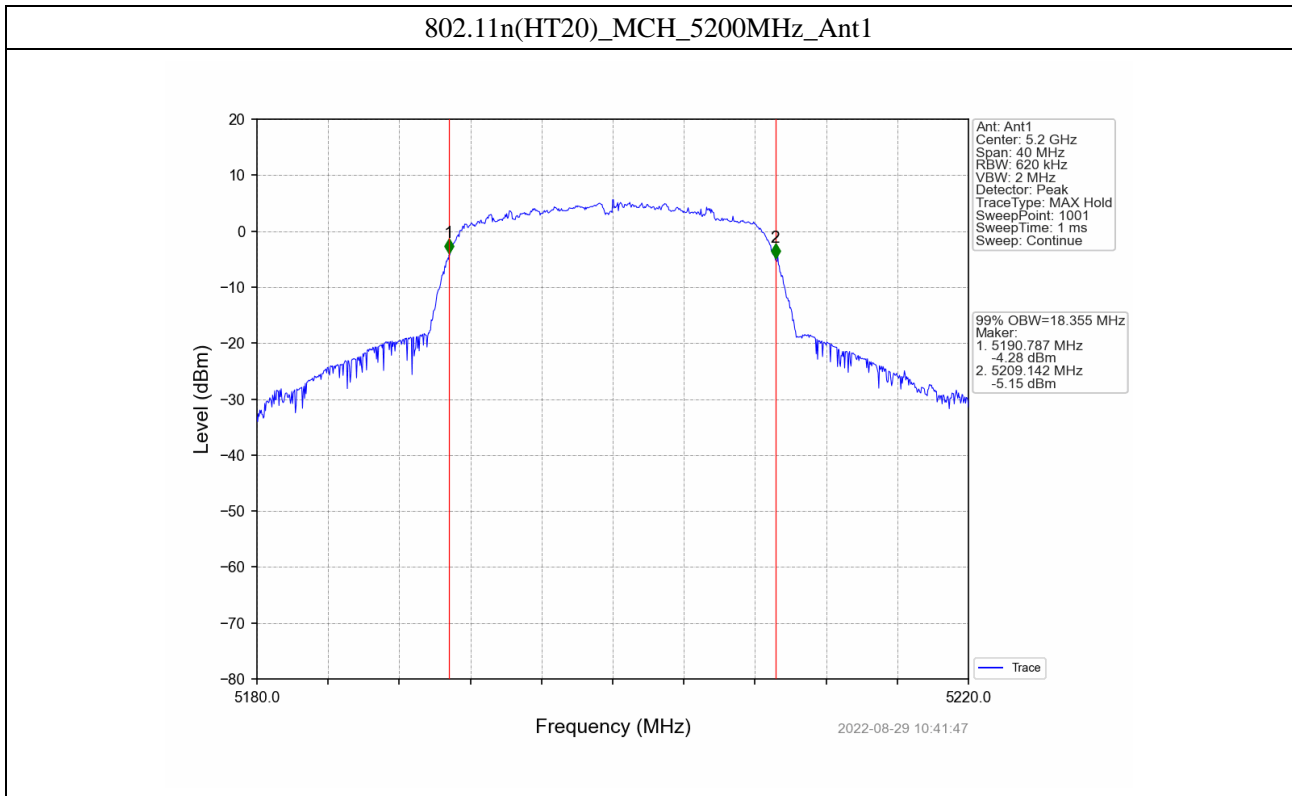

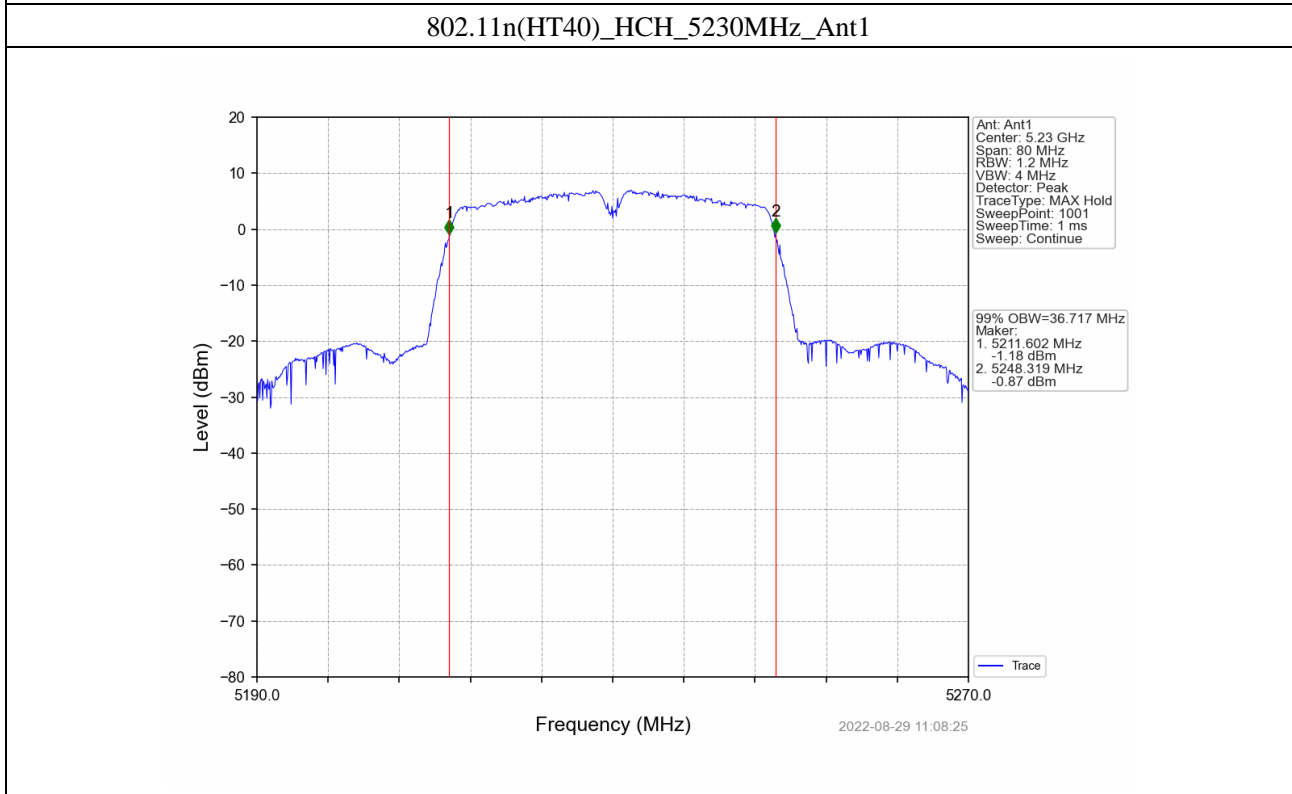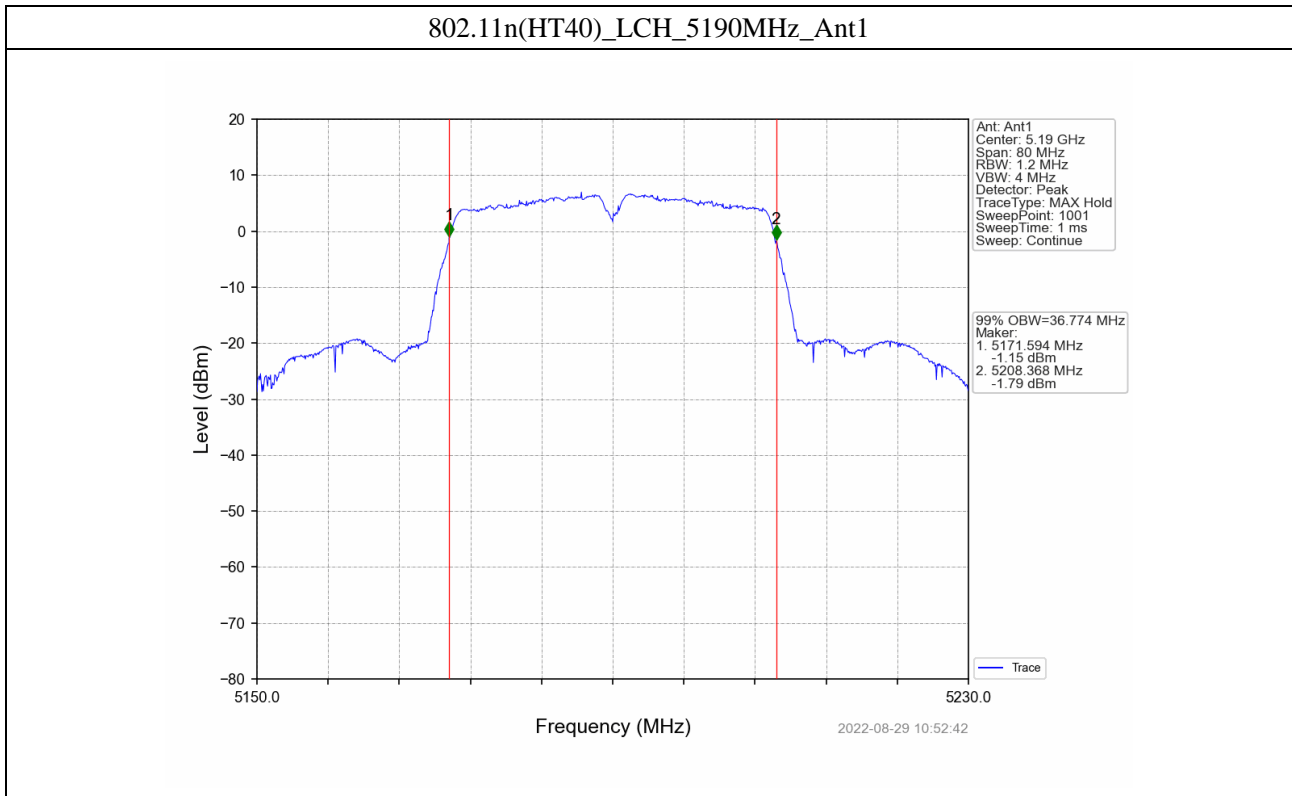

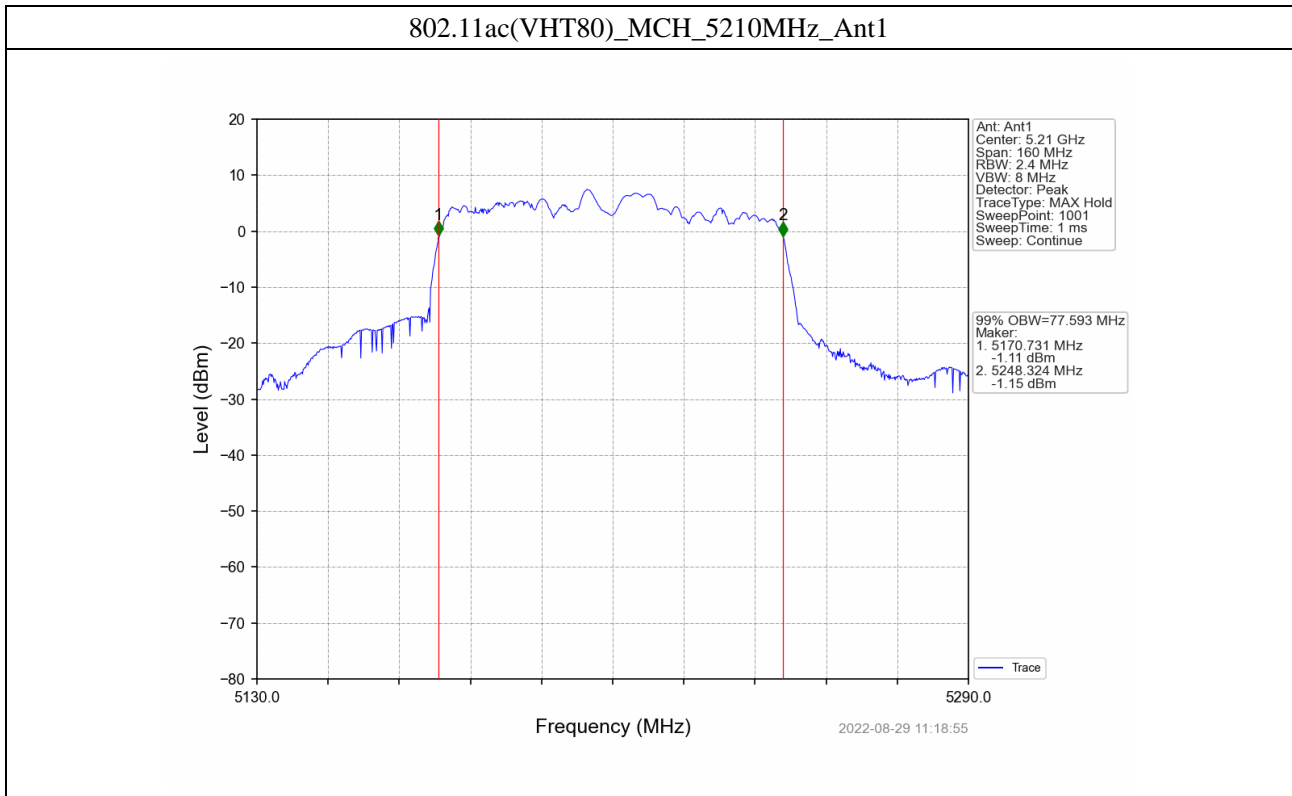

**-26dB OBW**

