

# TEST REPORT

Reference No..... : WTH20X10077099W-4  
FCC ID ..... : XOMRWOSU6547  
Applicant ..... : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED  
Address..... : Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,  
Shangmeilin, Futian District, Shenzhen , China  
Product Name ..... : 65" SMART 4K UHD TV  
Test Model. .... : RWOSU6547  
Standards ..... : FCC Part 15.247  
Date of Receipt sample .... : Oct.22, 2020  
Date of Test..... : Oct.22, 2020 to Nov.20, 2020  
Date of Issue ..... : Nov.20, 2020  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
<b>2. SUMMARY OF TEST RESULTS</b>	<b>10</b>
<b>3. ANTENNA REQUIREMENT</b>	<b>11</b>
3.1 STANDARD APPLICABLE	11
3.2 EVALUATION INFORMATION	11
<b>4. POWER SPECTRAL DENSITY</b>	<b>12</b>
4.1 STANDARD APPLICABLE	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE	12
4.4 SUMMARY OF TEST RESULTS/PLOTS	12
<b>5. DTS BANDWIDTH</b>	<b>13</b>
5.1 STANDARD APPLICABLE	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
<b>6. RF OUTPUT POWER</b>	<b>14</b>
6.1 STANDARD APPLICABLE	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE	14
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
<b>7. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>15</b>
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
<b>8. OUT OF BAND EMISSIONS</b>	<b>21</b>
8.1 STANDARD APPLICABLE	21
8.2 TEST PROCEDURE	21
8.3 SUMMARY OF TEST RESULTS/PLOTS	22
<b>9. CONDUCTED EMISSIONS</b>	<b>25</b>
9.1 TEST PROCEDURE	25
9.2 BASIC TEST SETUP BLOCK DIAGRAM	25
9.3 TEST RECEIVER SETUP	25
9.4 SUMMARY OF TEST RESULTS/PLOTS	25
<b>APPENDIX SUMMARY</b>	<b>28</b>
<b>APPENDIX A</b>	<b>29</b>
<b>APPENDIX B</b>	<b>31</b>
<b>APPENDIX C</b>	<b>33</b>
<b>APPENDIX D</b>	<b>35</b>
<b>APPENDIX PHOTOGRAPHS</b>	<b>37</b>

**Report version**

Version No.	Date of issue	Description
Rev.00	Nov.20, 2020	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED  
 Address of applicant: Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128, Shangmeilin, Futian District, Shenzhen , China

Manufacturer: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED  
 BRANCH  
 Address of manufacturer: SEIYU INDUSTRIAL PARK,DA SAN VILLAGE,DA SHUI KENG,GUANLAN TOWN,LONGHUA NEW DISTRICT, SHENZHEN,P.R.C

General Description of EUT	
Product Name:	65" SMART 4K UHD TV
Trade Name	RCA, PROSCAN, RCA SCENIUM,TECHNICOLOR, SYLVANIA,RCASMA TVIRTUOSO
Model No.:	RWOSU6547
Adding Model(s):	D65A114-U-A-I, XXXXXXXXXXX65XXXXXXXXXXXXX, (Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC120V/60Hz
Power Adapter:	/
Software Version:	/
Hardware Version:	/
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model RWOSU6547, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

<b>Technical Characteristics of EUT</b>	
Bluetooth Version:	V5.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	-3.22dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	External Antenna
Antenna Gain:	2dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247**: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05r02**: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	40~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty			
Parameter	Conditions	Uncertainty	
RF Output Power	Conducted	±0.42dB	
Occupied Bandwidth	Conducted	±1.5%	
Power Spectral Density	Conducted	±1.8dB	
Conducted Spurious Emission	Conducted	±2.17dB	
Conducted Emissions	Conducted	9-150kHz ±3.74dB	
		0.15-30MHz ±3.34dB	
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB	
		0.2-1GHz ±5.56dB	
		1-6GHz ±3.84dB	
		6-26GHz ±3.92dB	

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16



<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has an External antenna, fulfill the requirement of this section.


## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram

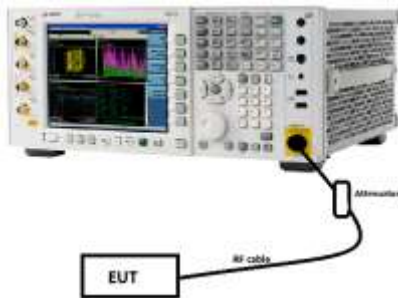

### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A


## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.2 Test Setup Block Diagram

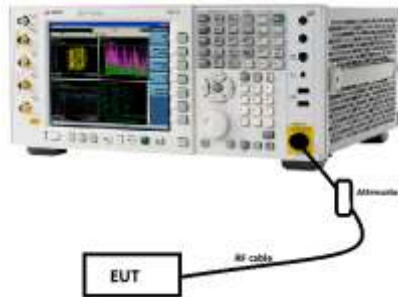

### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

Please refer to Appendix B


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

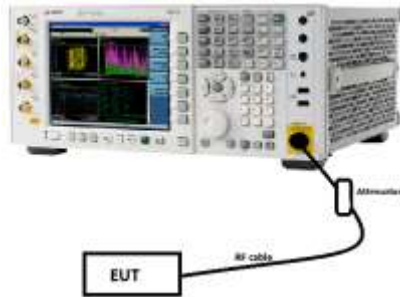

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the  $RBW \geq DTS$  bandwidth.
- b) Set  $VBW \geq 3 \times RBW$ .
- c) Set  $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C

## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

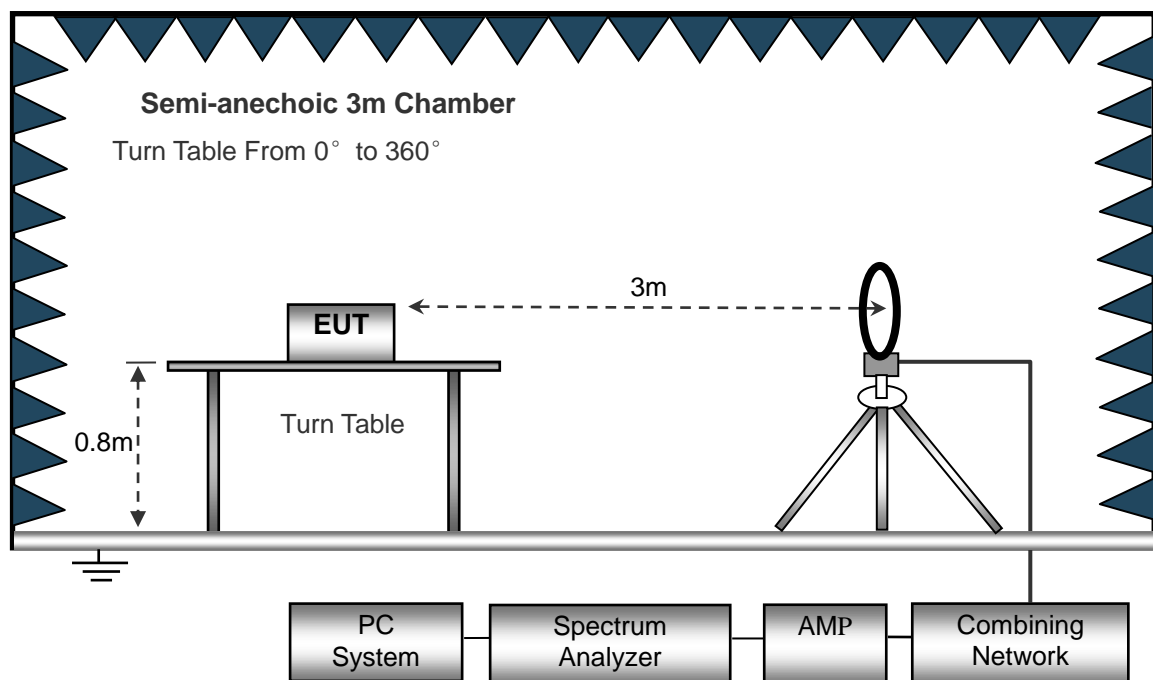

The test setup for emission measurement from 30 MHz to 1 GHz..

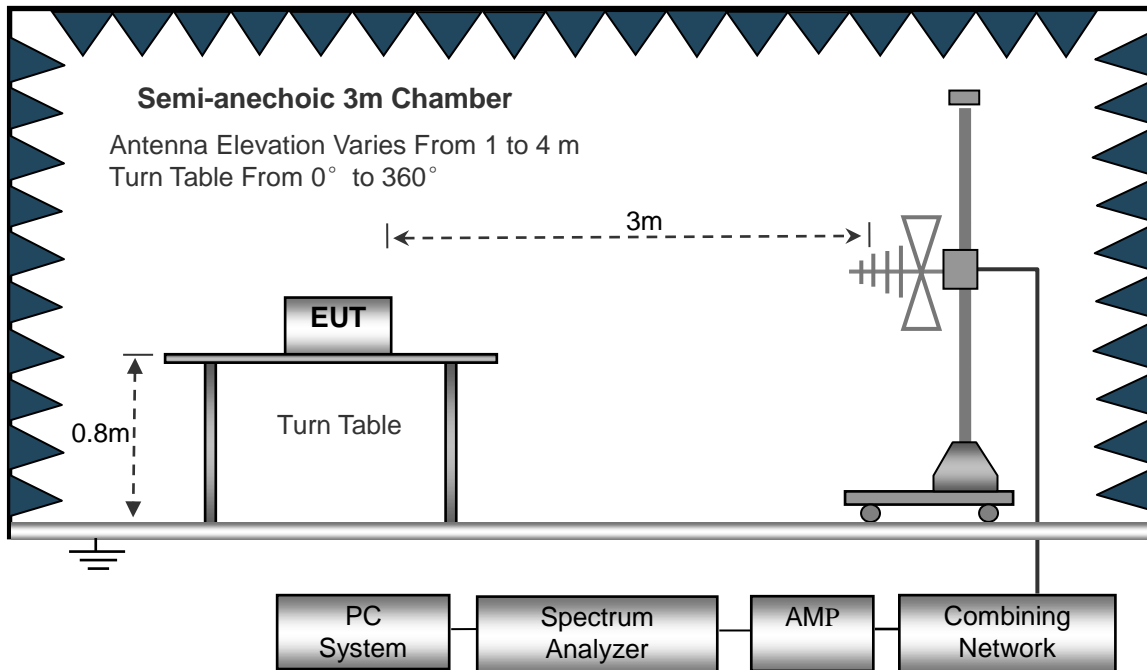

The test setup for emission measurement above 1 GHz..

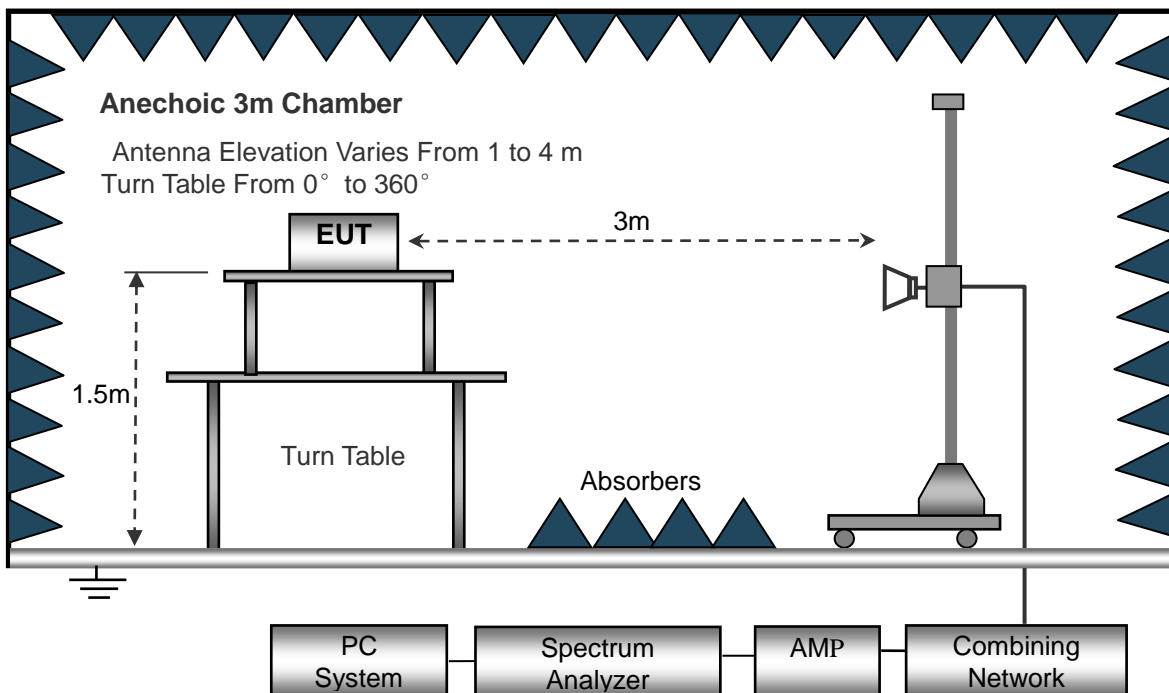

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV



### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 7.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

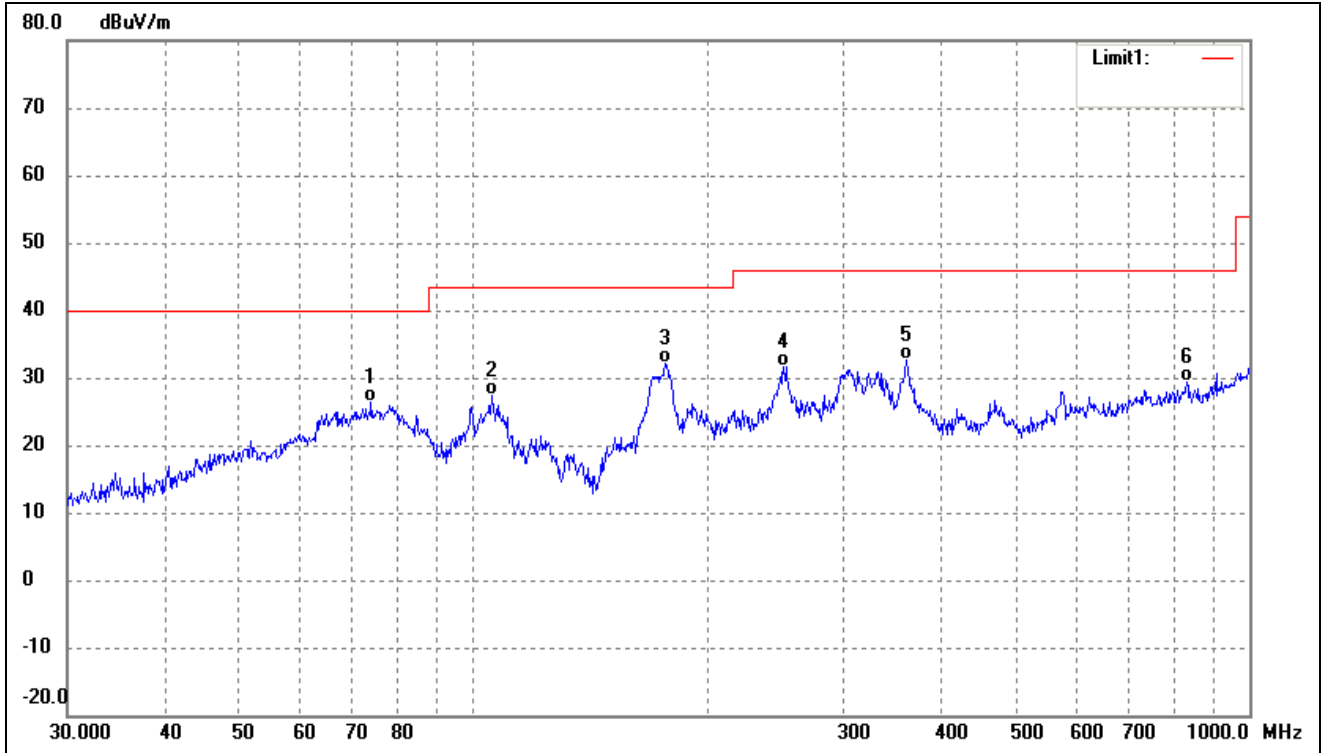

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	73.8756	40.27	-13.96	26.31	40.00	-13.69			QP
2	105.6415	39.59	-12.25	27.34	43.50	-16.16			QP
3	176.8878	45.44	-13.43	32.01	43.50	-11.49			QP
4	251.1804	41.00	-9.27	31.73	46.00	-14.27			QP
5	361.7139	38.52	-5.92	32.60	46.00	-13.40			QP
6	830.4002	29.10	0.35	29.45	46.00	-16.55			QP

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

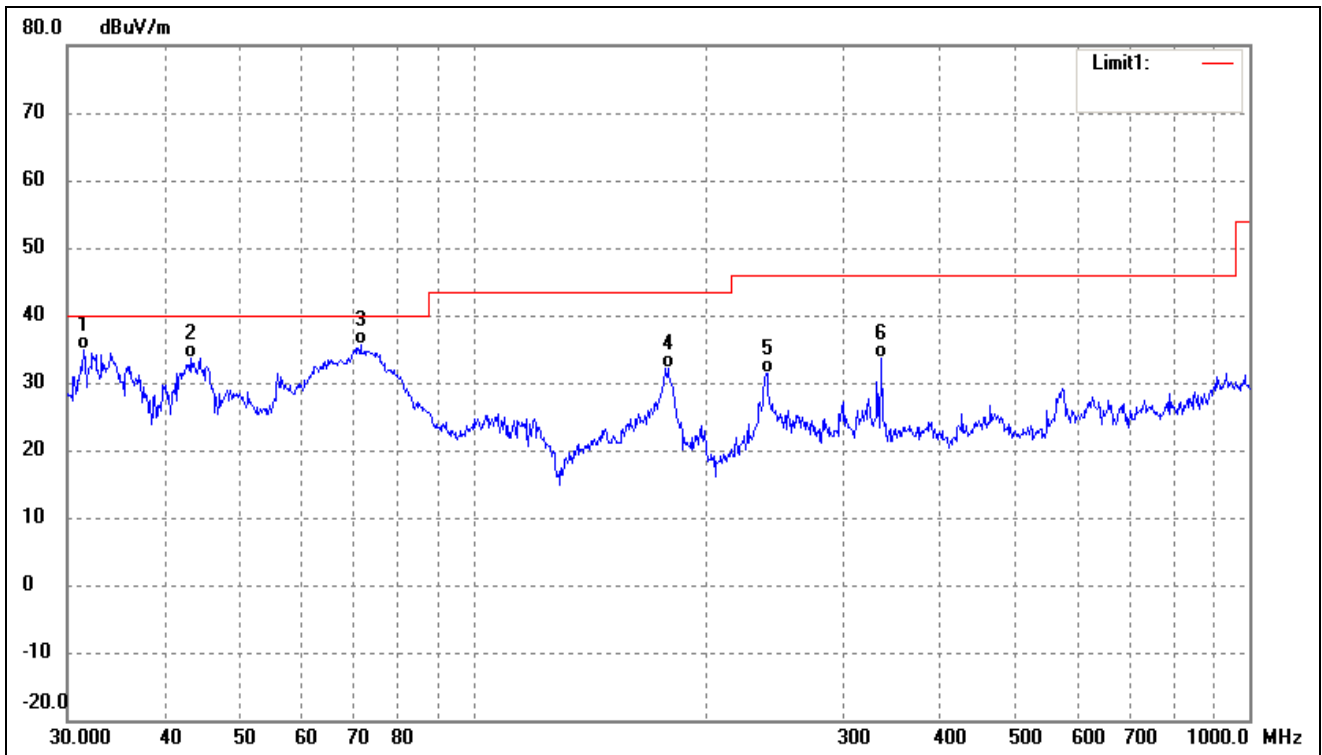

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	31.5095	48.36	-13.50	34.86	40.00	-5.14			QP
2	43.2017	44.64	-11.00	33.64	40.00	-6.36			QP
3	71.5806	49.72	-14.03	35.69	40.00	-4.31			QP
4	178.1327	45.46	-13.39	32.07	43.50	-11.43			QP
5	239.1473	41.39	-9.94	31.45	46.00	-14.55			QP
6	336.0352	40.47	-6.87	33.60	46.00	-12.40			QP

Remark: ‘ - ’ Means ‘ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

## ➤ Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	62.61	-3.59	59.02	74	-14.98	H	PK
4804	41.95	-3.59	38.36	54	-15.64	H	AV
7206	58.20	-0.52	57.68	74	-16.32	H	PK
7206	40.61	-0.52	40.09	54	-13.91	H	AV
4804	64.70	-3.59	61.11	74	-12.89	V	PK
4804	44.47	-3.59	40.88	54	-13.12	V	AV
7206	62.48	-0.52	61.96	74	-12.04	V	PK
7206	43.59	-0.52	43.07	54	-10.93	V	AV
Middle Channel-2440MHz							
4880	65.21	-3.49	61.72	74	-12.28	H	PK
4880	40.96	-3.49	37.47	54	-16.53	H	AV
7320	57.67	-0.47	57.20	74	-16.80	H	PK
7320	39.44	-0.47	38.97	54	-15.03	H	AV
4880	66.37	-3.49	62.88	74	-11.12	V	PK
4880	43.35	-3.49	39.86	54	-14.14	V	AV
7320	63.06	-0.47	62.59	74	-11.41	V	PK
7320	43.33	-0.47	42.86	54	-11.14	V	AV
High Channel-2480MHz							
4960	63.17	-3.41	59.76	74	-14.24	H	PK
4960	43.87	-3.41	40.46	54	-13.54	H	AV
7440	57.69	-0.42	57.27	74	-16.73	H	PK
7440	42.30	-0.42	41.88	54	-12.12	H	AV
4960	64.41	-3.41	61.00	74	-13.00	V	PK
4960	40.88	-3.41	37.47	54	-16.53	V	AV
7440	63.16	-0.42	62.74	74	-11.26	V	PK
7440	41.78	-0.42	41.36	54	-12.64	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

#### B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW  $\geq$   $[3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 8.3 Summary of Test Results/Plots


➤ Radiated test

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

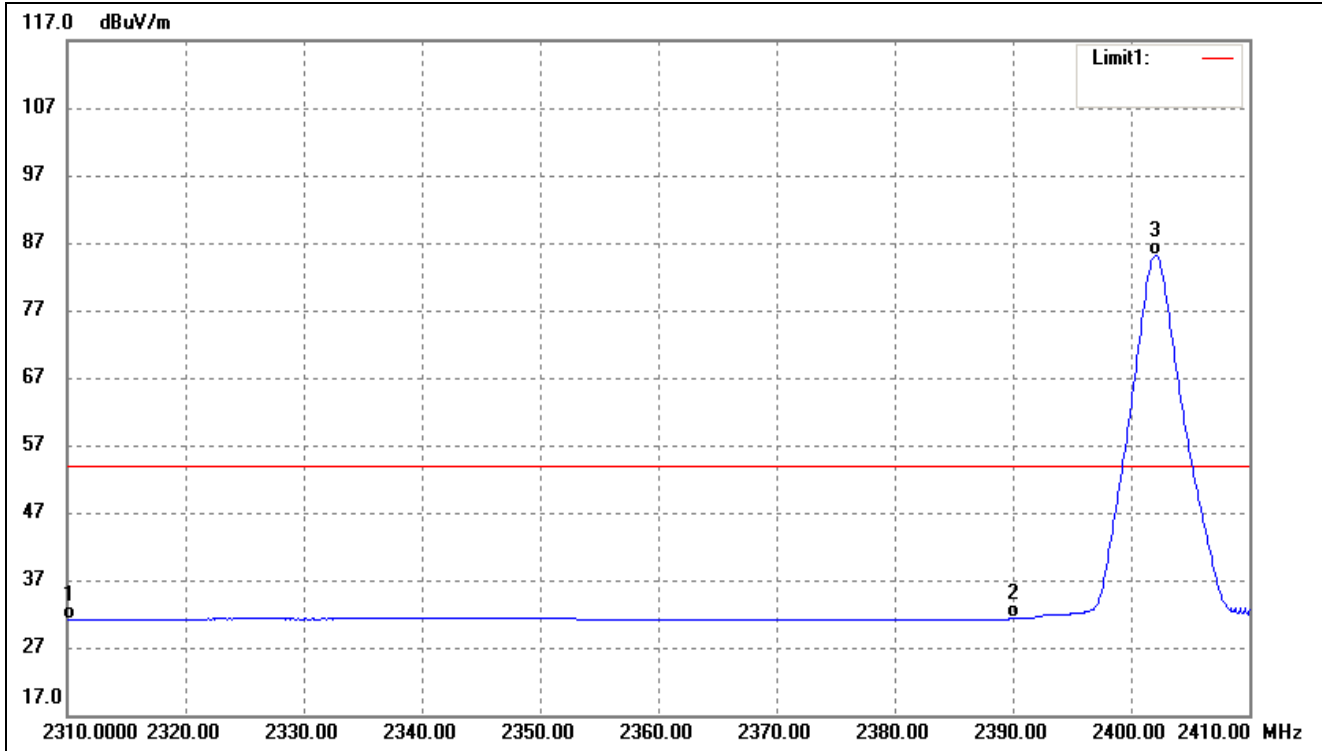

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.73	-9.66	31.07	54.00	-22.93	Average Detector
	2310.000	52.65	-9.66	42.99	74.00	-31.01	Peak Detector
2	2390.000	40.81	-9.50	31.31	54.00	-22.69	Average Detector
	2390.000	53.01	-9.50	43.51	74.00	-30.49	Peak Detector
3	2402.100	94.62	-9.47	85.15	/	/	Average Detector
	2402.100	104.94	-9.47	95.47	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

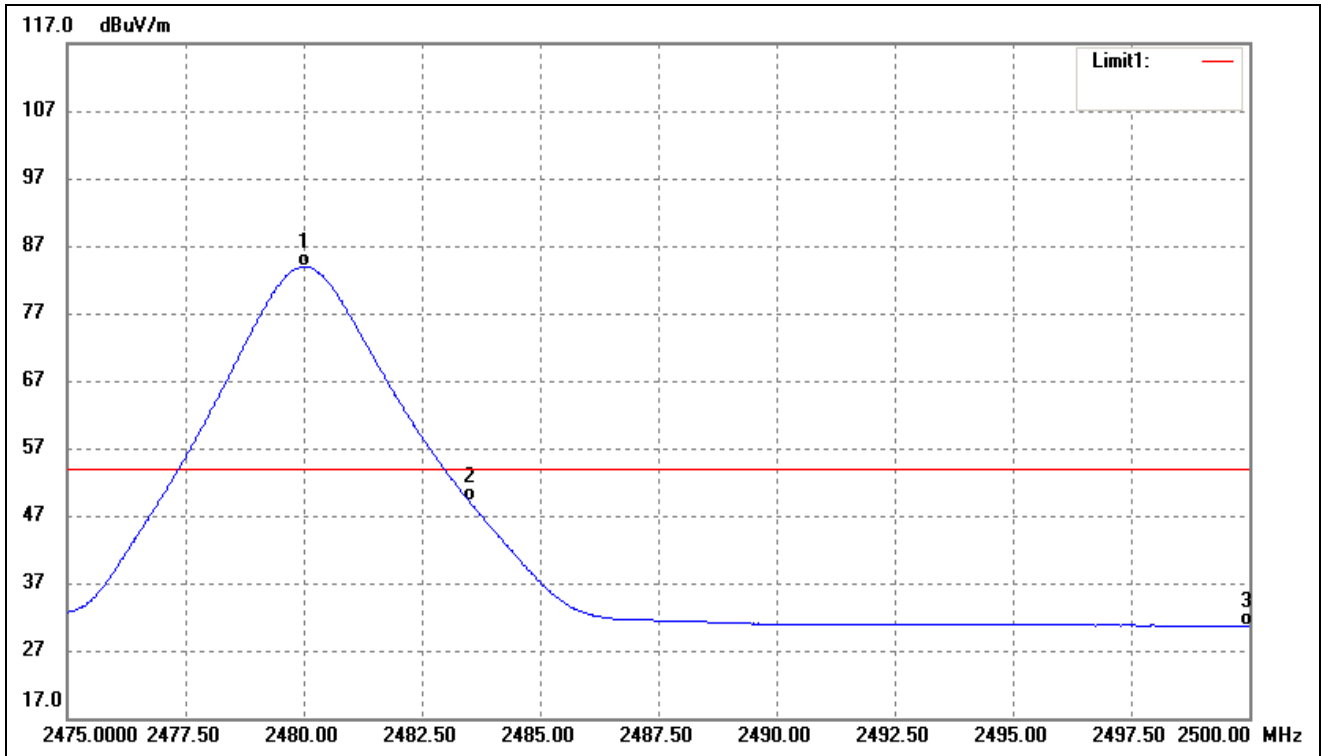

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	93.24	-9.32	83.92	/	/	Average Detector
	2480.150	103.48	-9.32	94.16	/	/	Peak Detector
2	2483.500	58.44	-9.31	49.13	54.00	-4.87	Average Detector
	2483.500	65.50	-9.31	56.19	74.00	-17.81	Peak Detector
3	2500.000	39.88	-9.28	30.60	54.00	-23.40	Average Detector
	2500.000	52.80	-9.28	43.52	74.00	-30.48	Peak Detector

➤ Conducted test

**Please refer to Appendix D**



## 9. Conducted Emissions


### 9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 9.2 Basic Test Setup Block Diagram

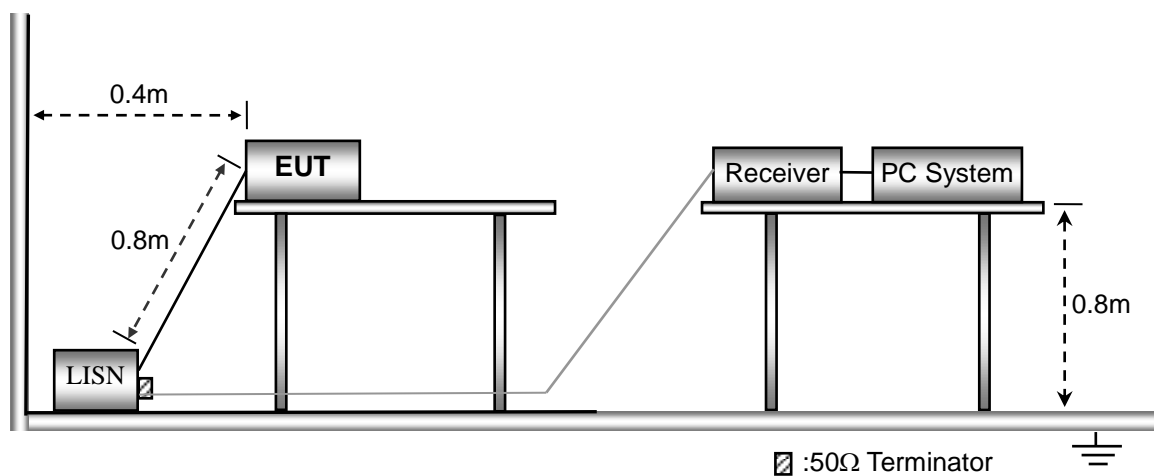


### 9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal


### 9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

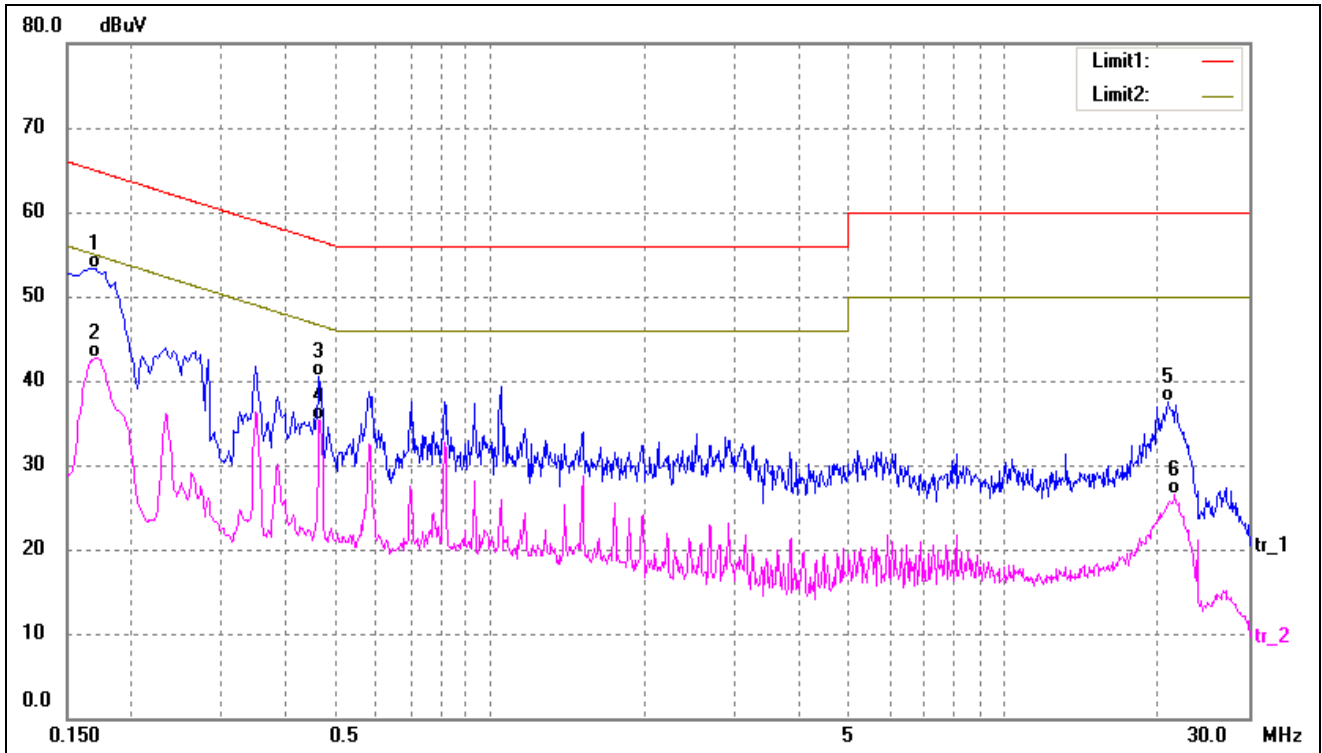

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	43.11	10.25	53.36	64.96	-11.60	QP
2	0.1700	32.52	10.25	42.77	54.96	-12.19	AVG
3	0.4660	30.28	10.23	40.51	56.58	-16.07	QP
4*	0.4660	25.07	10.23	35.30	46.58	-11.28	AVG
5	20.8820	26.90	10.60	37.50	60.00	-22.50	QP
6	21.5060	15.87	10.60	26.47	50.00	-23.53	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

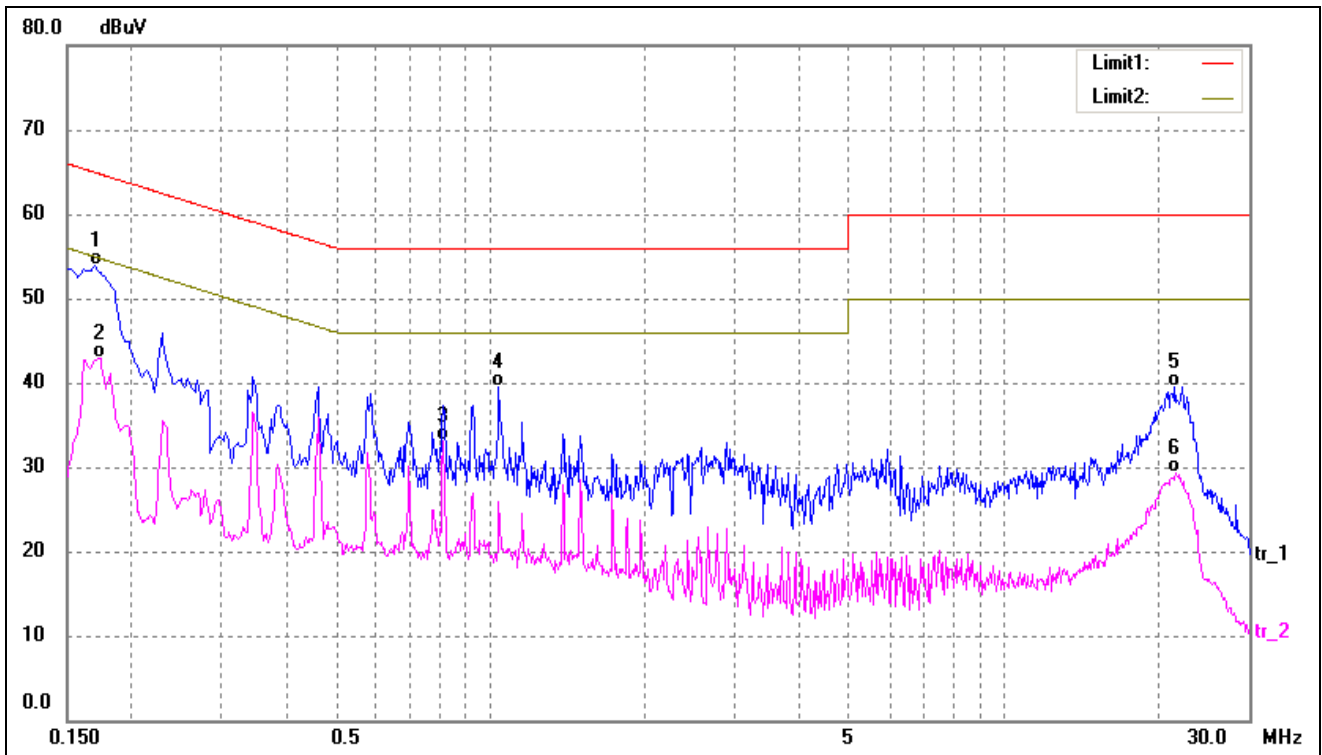

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1700	43.56	10.25	53.81	64.96	-11.15	QP
2	0.1740	32.73	10.25	42.98	54.77	-11.79	AVG
3	0.8100	22.97	10.19	33.16	46.00	-12.84	AVG
4	1.0420	29.32	10.20	39.52	56.00	-16.48	QP
5	21.4860	28.99	10.59	39.58	60.00	-20.42	QP
6	21.6060	18.80	10.60	29.40	50.00	-20.60	AVG

**APPENDIX SUMMARY**

---




Project No.	WTH20X10077099W	Test Engineer	Moon
Start date	2020/11/16	Finish date	2020/11/16
Temperature	24.1 °C	Humidity	42%
RF specifications	BT-BLE		

<b>APPENDIX</b>	<b>Description of Test Item</b>	<b>Result</b>
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

**APPENDIX A**

---

Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)	Low	-19.36	8
	Middle	-19.44	8
	High	-19.80	8
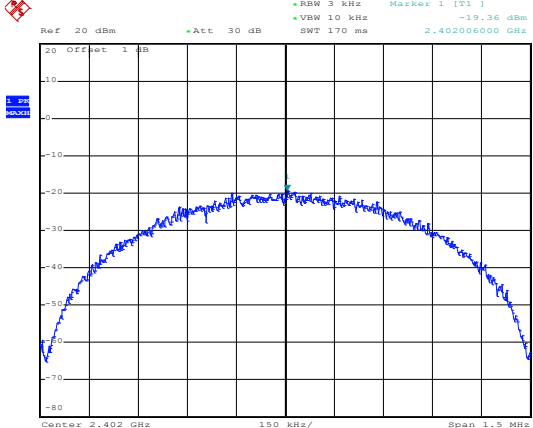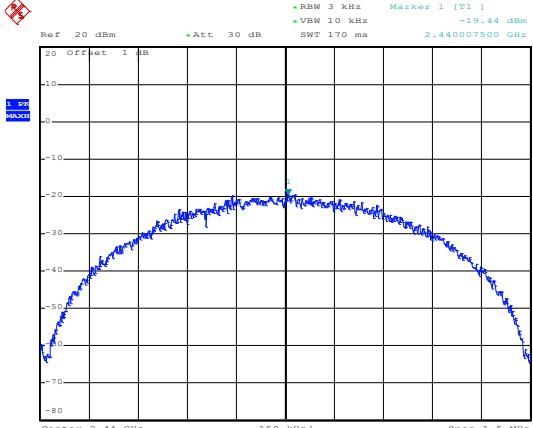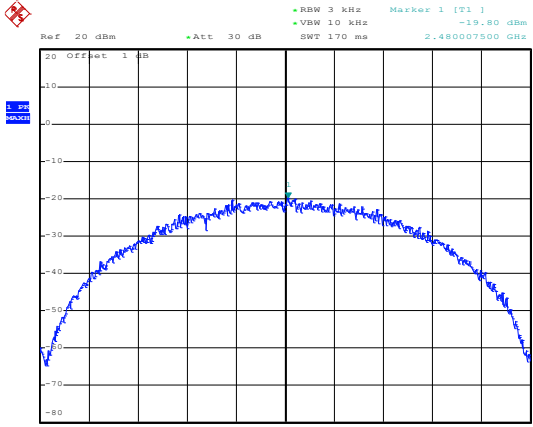
<p>Low</p>	 <p>Ref: 20 dBm Att: 30 dB RBW 3 kHz VBW 10 kHz SWT 170 ms Marker 1 [T1] -19.36 dBm 2.402006000 GHz</p> <p>Center 2.402 GHz 150 kHz/ Span 1.5 MHz</p> <p>Date: 16.NOV.2020 14:49:31</p>
<p>Middle</p>	 <p>Ref: 20 dBm Att: 30 dB RBW 3 kHz VBW 10 kHz SWT 170 ms Marker 1 [T1] -19.44 dBm 2.440007500 GHz</p> <p>Center 2.44 GHz 150 kHz/ Span 1.5 MHz</p> <p>Date: 16.NOV.2020 14:49:06</p>
<p>High</p>	 <p>Ref: 20 dBm Att: 30 dB RBW 3 kHz VBW 10 kHz SWT 170 ms Marker 1 [T1] -19.80 dBm 2.480007500 GHz</p> <p>Center 2.48 GHz 150 kHz/ Span 1.5 MHz</p> <p>Date: 16.NOV.2020 14:48:44</p>

**APPENDIX B**

---

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(BLE)	Low	666	$\geq 500$
	Middle	666	$\geq 500$
	High	669	$\geq 500$








**APPENDIX C**




---


RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
GFSK(BLE)	Low	-3.29	30.00
	Middle	-3.22	30.00
	High	-3.83	30.00
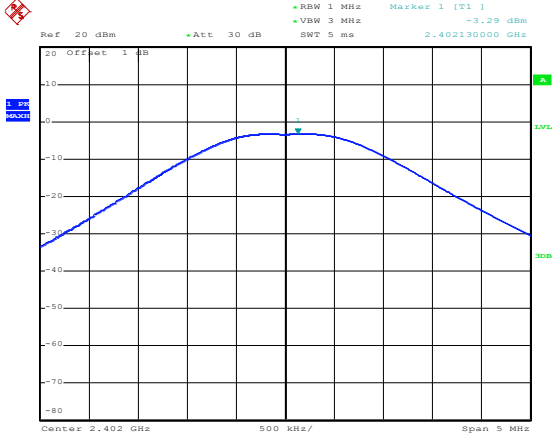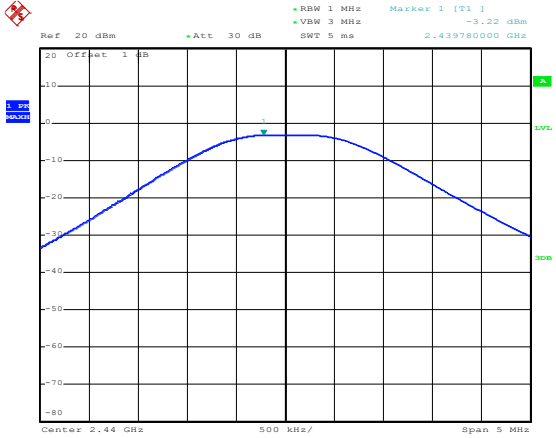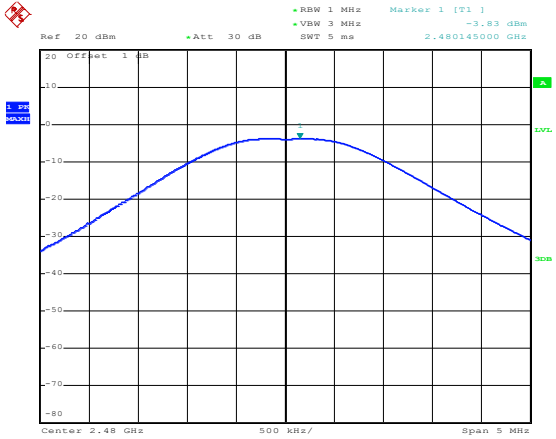
<p>Low</p>	 <p>Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 5 ms Marker 1 [T1] -3.29 dBm 2.402130000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.402 GHz 500 kHz/ Span 5 MHz</p> <p>Date: 16.NOV.2020 14:51:42</p>
<p>Middle</p>	 <p>Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 5 ms Marker 1 [T1] -3.22 dBm 2.439780000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.44 GHz 500 kHz/ Span 5 MHz</p> <p>Date: 16.NOV.2020 14:52:01</p>
<p>High</p>	 <p>Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 5 ms Marker 1 [T1] -3.83 dBm 2.480145000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.48 GHz 500 kHz/ Span 5 MHz</p> <p>Date: 16.NOV.2020 14:52:20</p>

# APPENDIX D

## Conducted Out of Band Emissions

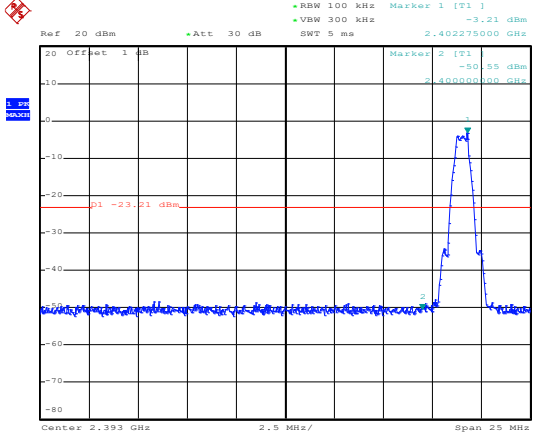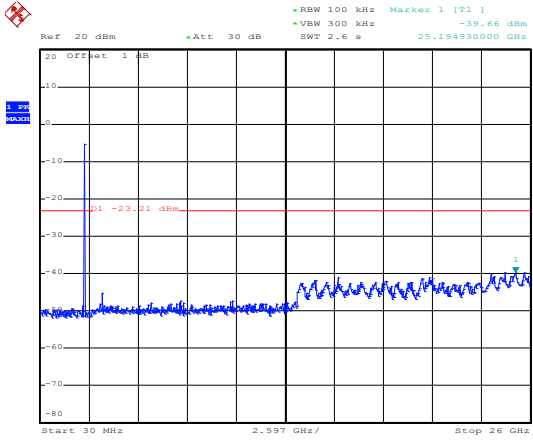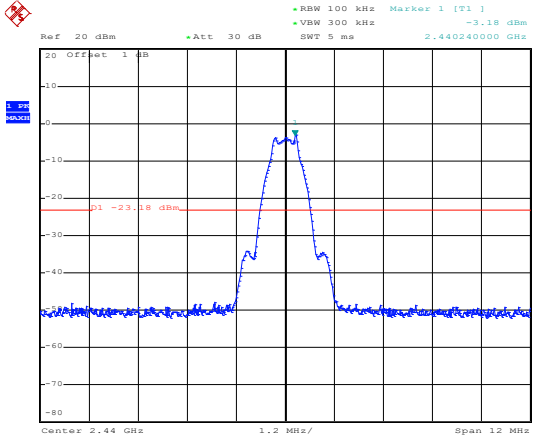Low	 <p>Date: 16.NOV.2020 15:03:46</p>
	 <p>Date: 16.NOV.2020 15:04:10</p>
Middle	 <p>Date: 16.NOV.2020 15:05:56</p>

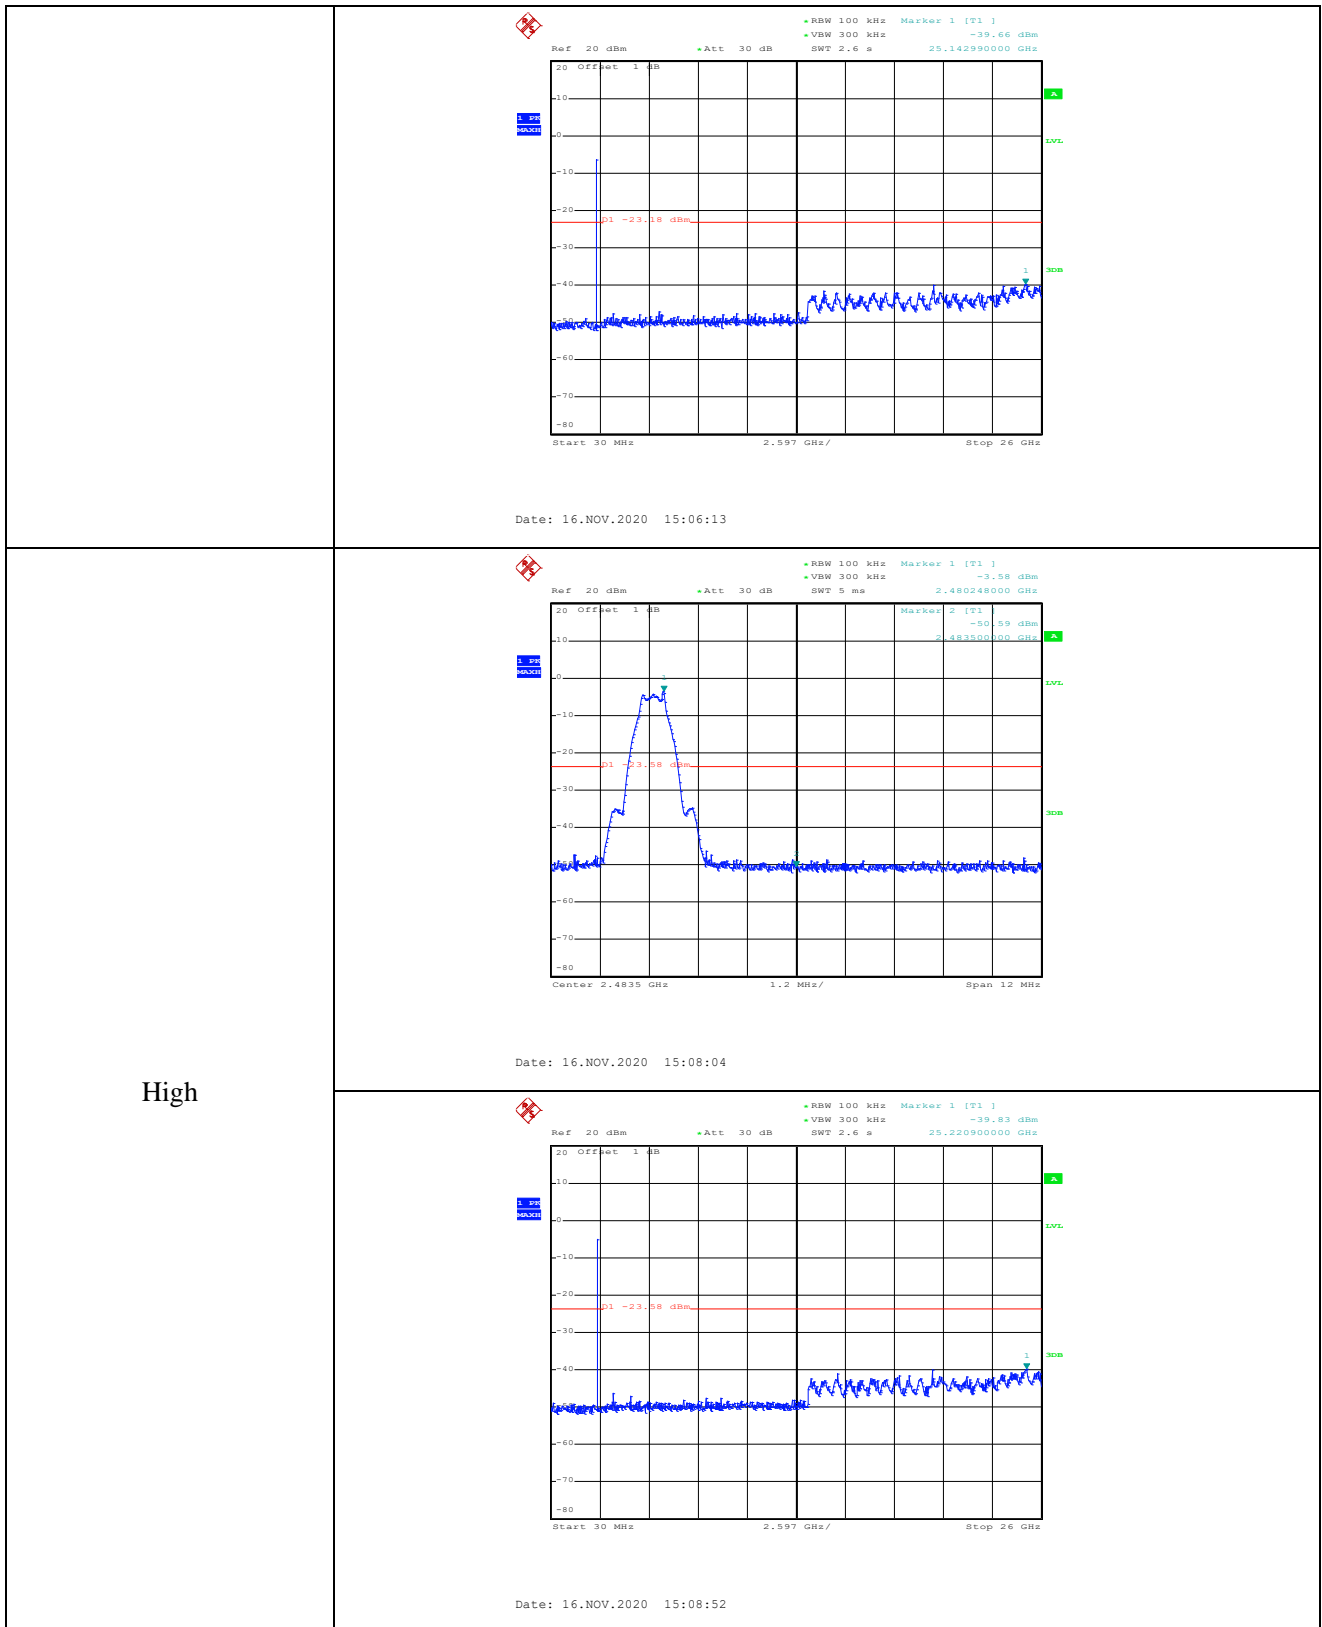

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***