



Test report No.: 2350302R-RFUSV01S-B

TEST REPORT (Class II Permissive Change)

Product Name	Host-based multiradio modules with WiFi, Bluetooth and NFC
Trademark	u-blox
Model and /or type reference	EMMY-W163
FCC ID	XPYEMMYW163
Applicant's name / address	u-blox AG Zürcherstrasse 68. Thalwil, 8800. Switzerland
Manufacturer's name	u-blox AG
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Verdict Summary	IN COMPLIANCE
Documented By (Senior Project Specialist / Genie Chang)	<i>Genie Chang</i>
Tested By (Senior Engineer / Bill Lin)	<i>Bill Lin</i>
Approved By (Senior Engineer / Jack Hsu)	<i>Jack Hsu</i>
Date of Receipt	2022/11/07
Date of Issue	2023/06/26
Report Version	V1.0

INDEX

	Page
1. General Information.....	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Tested System	7
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment.....	10
1.7. Uncertainty	11
2. Peak Power Output.....	12
2.1. Test Setup	12
2.2. Limit	12
2.3. Test Procedure	12
2.4. Test Result of Peak Power Output	13
3. Radiated Emission	15
3.1. Test Setup	15
3.2. Limits.....	16
3.3. Test Procedure	17
3.4. Test Result of Radiated Emission	18
4. Band Edge.....	22
4.1. Test Setup	22
4.2. Limit	23
4.3. Test Procedure	23
4.4. Test Result of Band Edge	24
5. Duty Cycle.....	32
5.1. Test Setup	32
5.2. Test Result of Duty Cycle.....	33

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2350302R-Product Photos

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions


1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
2350302R-RFUSV01S-B	V1.0	Initial issue of report.	2023/06/26

1. General Information

1.1. EUT Description

Product Name	Host-based multiradio modules with WiFi, Bluetooth and NFC
Trademark	u-blox
Model and /or type reference	EMMY-W163
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	DC 3.3V
Frequency Range	2402-2480 MHz
Channel Number	79 CH
Type of Modulation	GFSK(1 Mbps) / π /4DQPSK(2 Mbps) / 8DPSK(3 Mbps)
Channel Control	Auto
Blockchain verified QR code	

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Mercedes	A1779052902	PIFA	-0.3 dBi for 2400 MHz

Note: The antenna of EUT conforms to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	01	2403	02	2404	03	2405
04	2406	05	2407	06	2408	07	2409
08	2410	09	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	--	--

Note:

1. The EUT is a Host-based multiradio modules with WiFi, Bluetooth and NFC with built-in Bluetooth transceiver, this report for Bluetooth V2.1+EDR.
2. EUT is not support BLE.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
4. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test
5. DEKRA has evaluated each test mode. Only the worst case is shown in the report.
6. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
7. This is to request a Class II permissive change for FCC ID: XPYEMMYW163, originally granted on 09/09/2016.

The major change filed under this application is:

Change #1: Addition a PIFA Antenna, the antenna type is different with the original application.

Host information		
Brand	Product Name	Model No.
ART	Car Infotainment Unit	ICC

Test Mode	Mode 1	Transmit-1 Mbps
		Transmit-3 Mbps


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Battery	YUASA	55B24L-CMF II	N/A	N/A
2 Notebook PC	DELL	Latitude E5440	FS9TK32	N/A
3 HSD Double 8mm Housing Code Z	Rosenberger	D4Z0009-000Z	N/A	N/A
4 USB 3.0 Ethernet LAN Adapter	Manhattan	506847	N/A	N/A
5 Test Fixture	ART	ICC	N/A	N/A

Cable Type	Cable Description
A Power Cable	Non-shielded, 1.8m
B Power Cable	Non-shielded, 1m
C HSD Cable Jack to HSD Dacar 566	Non-shielded, 0.8m
D USB 3.0 Ethernet LAN Adapter Cable	Non-shielded, 0.2m
E ETH Cable	Non-shielded, 1m
F CSM 2 HSD to USB 3.0 Cable	Non-shielded, 1.5m

1.3. Configuration of Tested System

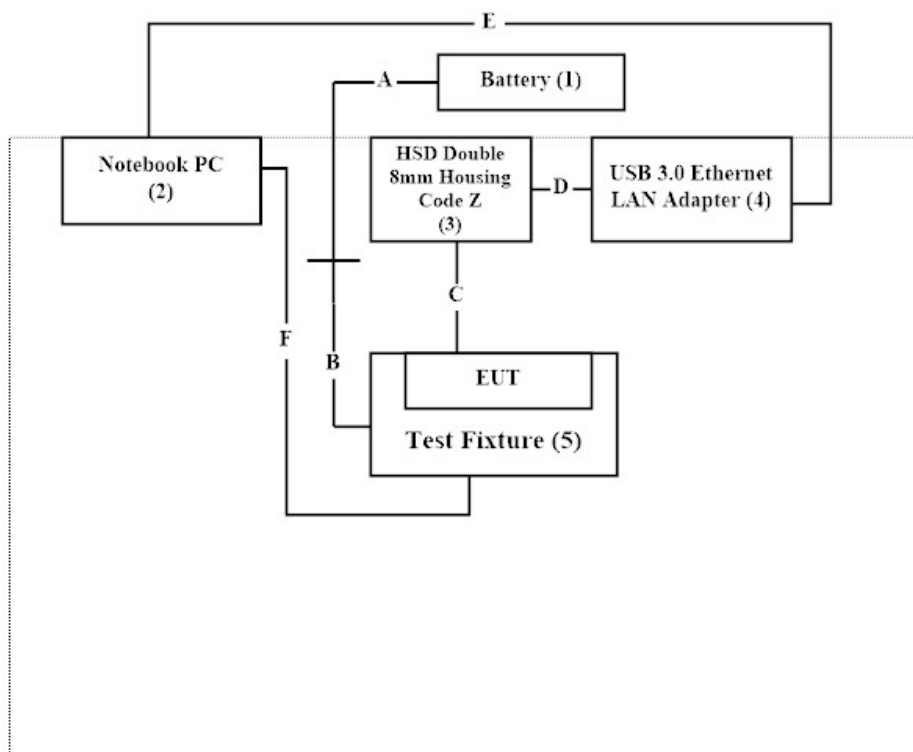

1.4. EUT Exercise Software

1.	Setup the EUT as shown in Section 1.3.
2.	Execute software “PuTTY Configuration version Release 0.73” on the Notebook PC.
3.	Configure the test mode, the test channel, and the data rate.
4.	Press “OK” to start the continuous transmit.
5.	Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	23.7 °C
	Humidity (%RH)	10~90 %	63.8 %
Conductive	Temperature (°C)	10~40 °C	23.8 °C
	Humidity (%RH)	10~90 %	48.9 %

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.6. List of Test Equipment

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2022/05/23	2023/05/22
V	Two-Line V-Network	R&S	ENV216	101307	2022/07/04	2023/07/03
V	Coaxial Cable	SUHNER	RG400 BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: RF Conducted Test Tools R3 V3.0.0.14.

For Radiated Measurements / HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	49611	2022/03/18	2023/03/17
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	Com-Power	AH-840	101100	2021/10/04	2023/10/03
V	Horn Antenna	RF SPIN	DRH18-E	210508A18ES	2022/06/08	2023/06/07
V	Pre-Amplifier	SGH	0301	20211007-10	2023/01/10	2024/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200701	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2023/01/10	2024/01/09
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
V	Filter	MICRO TRONICS	BRM50702	G269	2022/07/31	2023/07/30
	Filter	MICRO TRONICS	BRM50716	G196	2022/07/27	2023/07/26
V	EMI Test Receiver	R&S	ESR3	102793	2022/12/05	2023/12/04
V	Spectrum Analyzer	R&S	FSV3044	101113	2023/02/04	2024/02/03
V	Coaxial Cable	SGH	SGH18	2021005-1	2023/01/10	2024/01/09
	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	HA800	GD20110223-1		
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: E3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Item	Uncertainty	
Peak Power Output	± 0.89 dB	
Radiated Emission	Under 1GHz ± 4.05 dB	Under 1GHz ± 4.05 dB
Band Edge	Under 1GHz ± 4.05 dB	Under 1GHz ± 4.05 dB
Duty Cycle	± 2.31 ms	

2. Peak Power Output

2.1. Test Setup

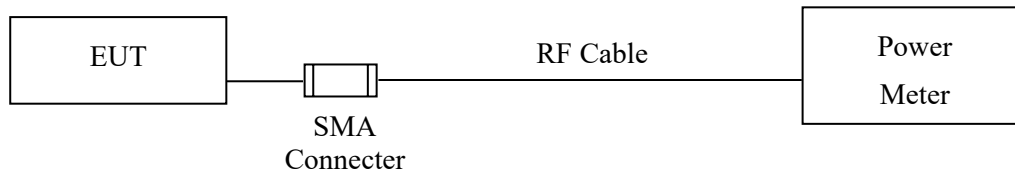

2.2. Limit

The maximum peak power shall be less 1 Watt.

2.3. Test Procedure

Tested according to FHSS test procedure of KDB 558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

2.4. Test Result of Peak Power Output

Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
Test Item : Peak Power Output
Test Mode : Transmit-1 Mbps
Test Date : 2023/01/18

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
00	2402	1.50	1 Watt= 30 dBm	Pass
39	2441	2.40	1 Watt= 30 dBm	Pass
78	2480	0.57	1 Watt= 30 dBm	Pass


Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
Test Item : Peak Power Output
Test Mode : Transmit-3 Mbps
Test Date : 2023/01/18

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
00	2402	4.61	1 Watt= 30 dBm	Pass
39	2441	5.27	1 Watt= 30 dBm	Pass
78	2480	3.32	1 Watt= 30 dBm	Pass


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30 MHz

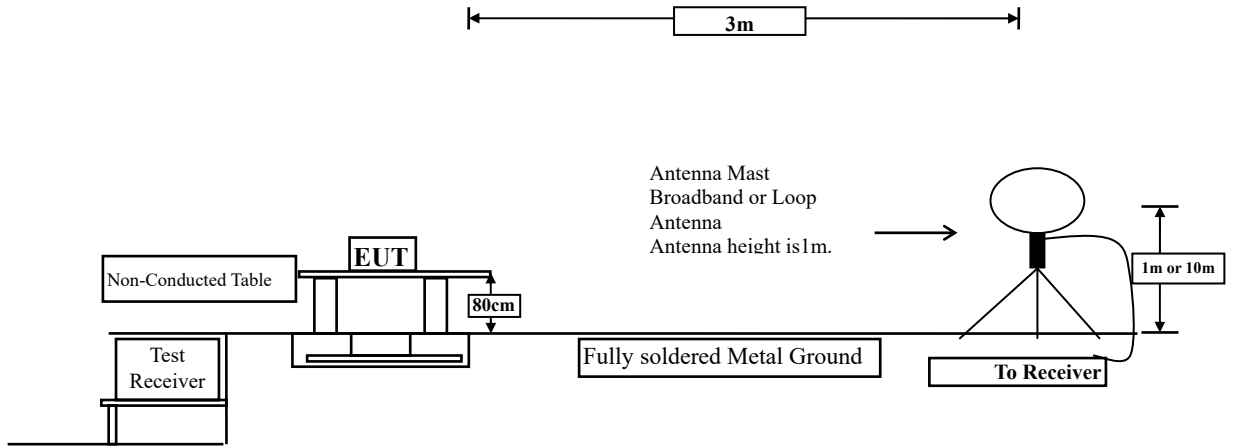

Radiated Emission Below 1 GHz

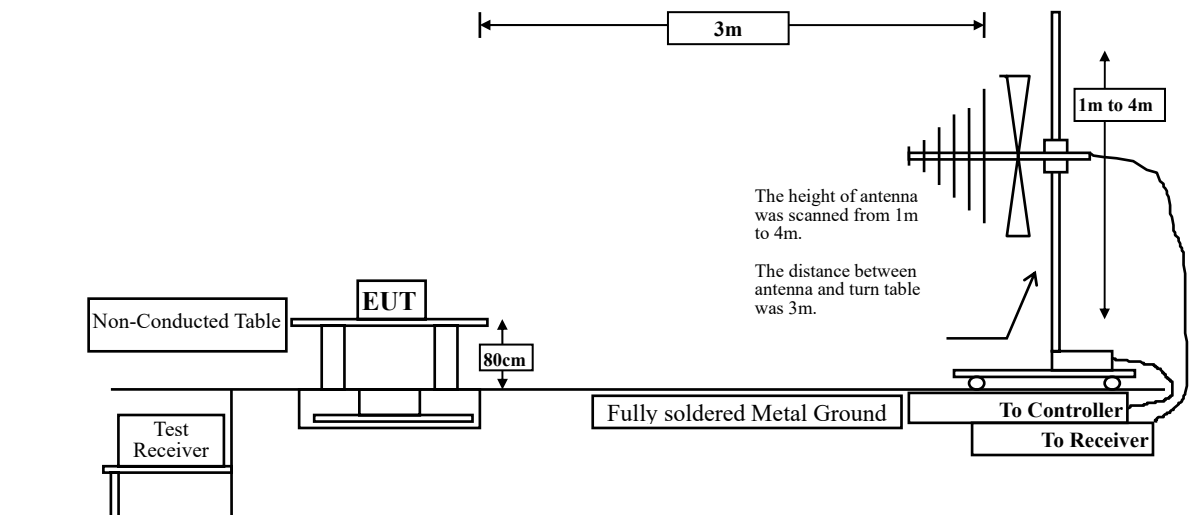

Radiated Emission Above 1 GHz

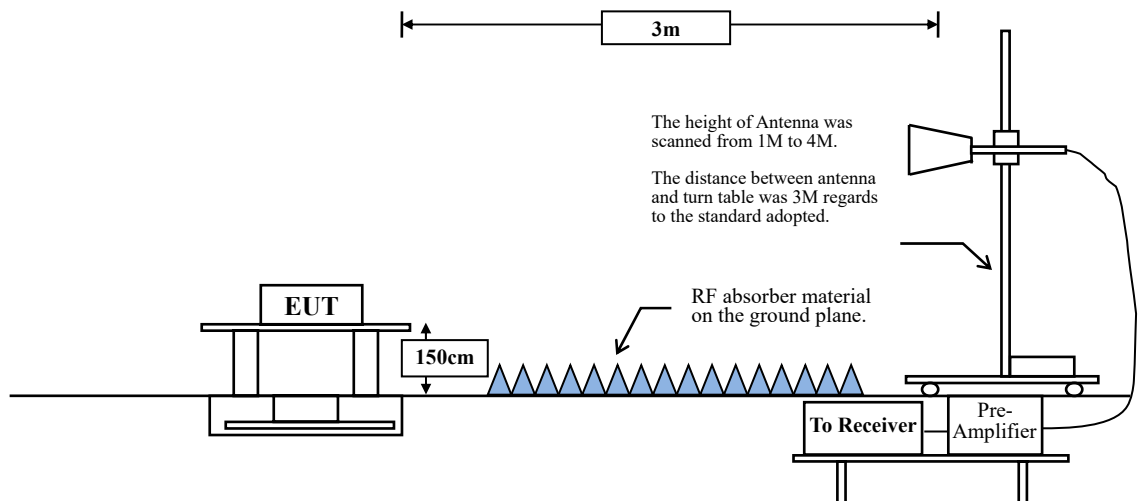

3.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks:

1. RF Voltage (dB μ V) = 20 log RF Voltage (μ V)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1 GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30 MHz setting on the field strength meter is 9kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.





Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.





The measurement is divided into the Preliminary Measurement and the Final Measurement.





The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.



The measurement frequency range form 9 kHz - 10th Harmonic of fundamental was investigated.

3.4. Test Result of Radiated Emission

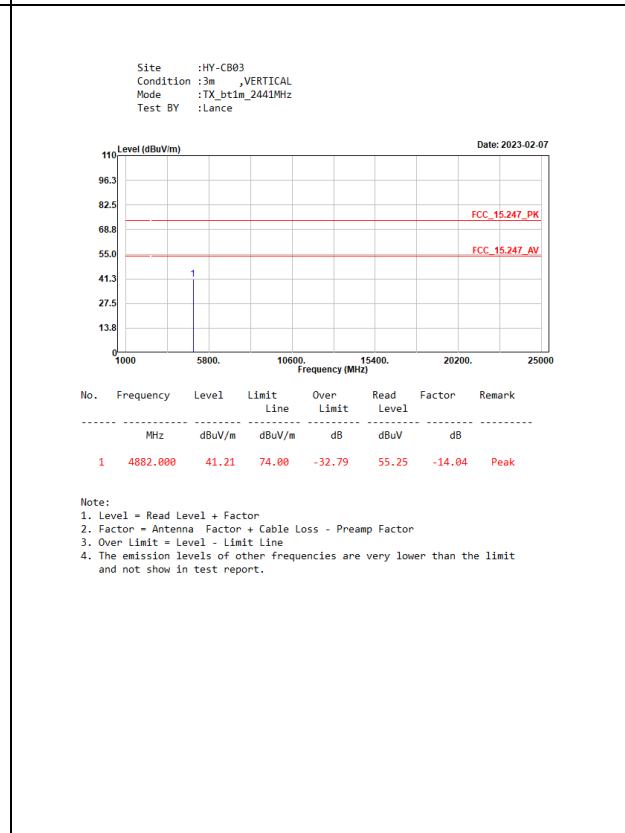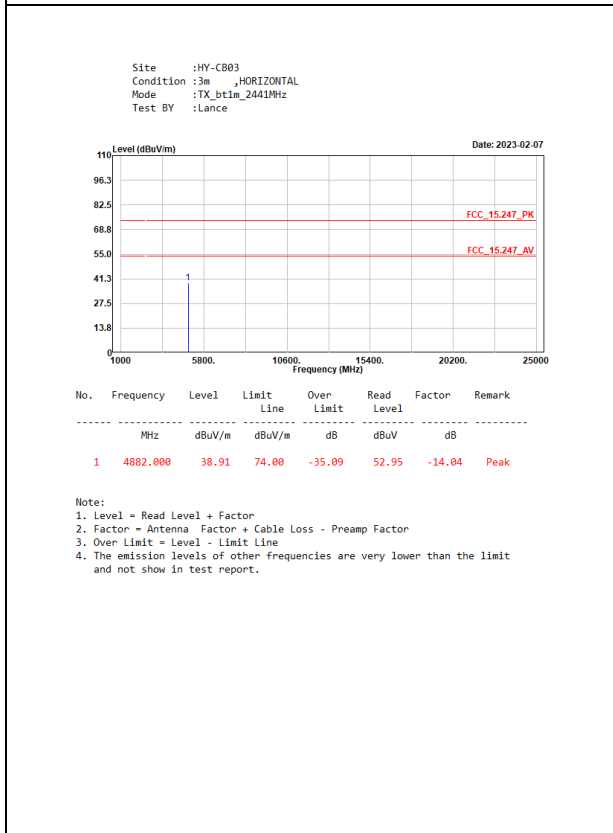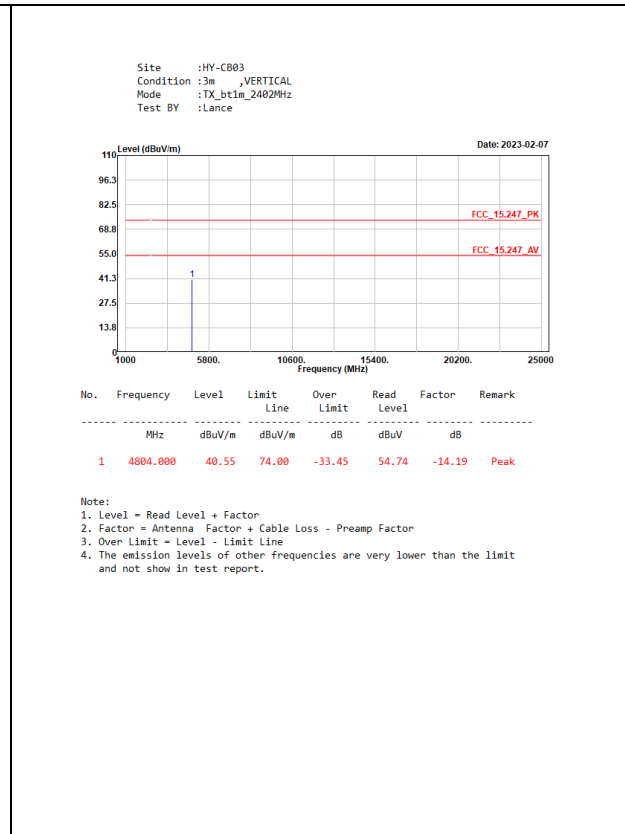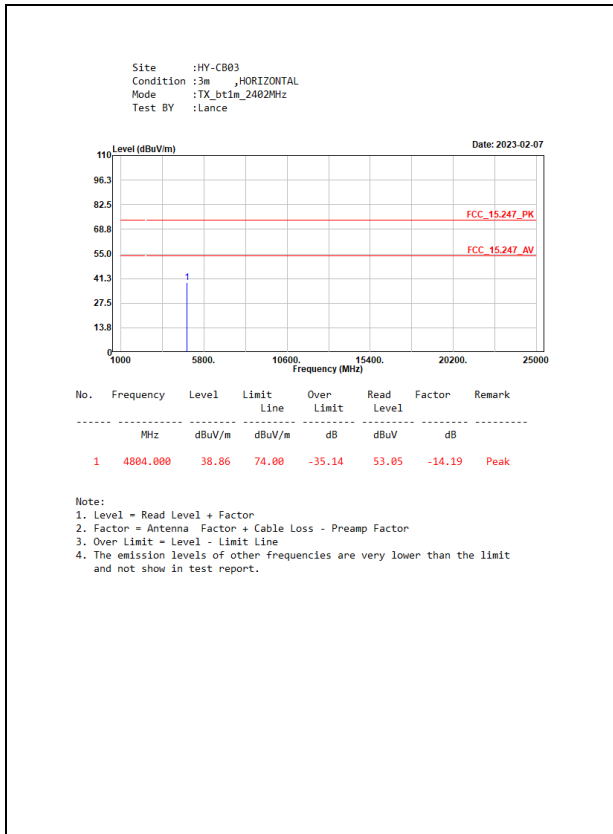

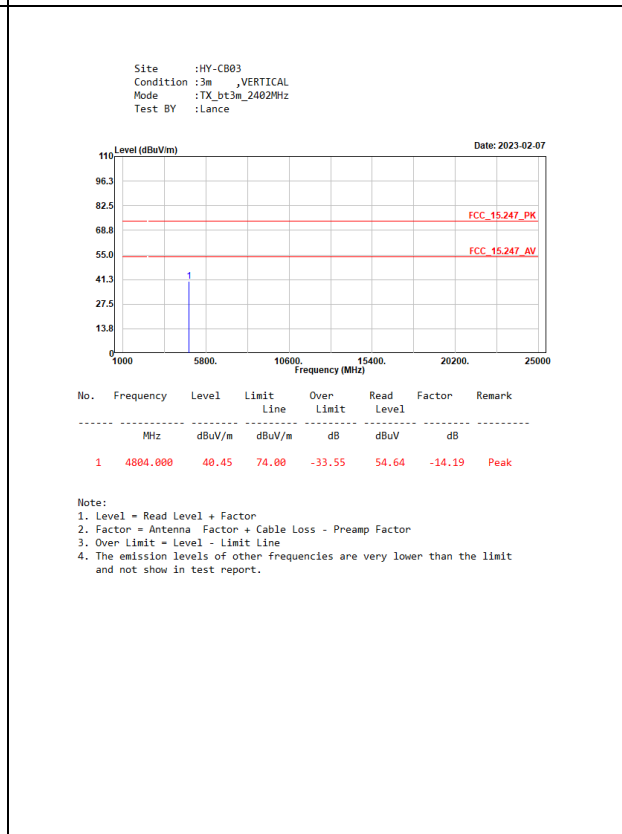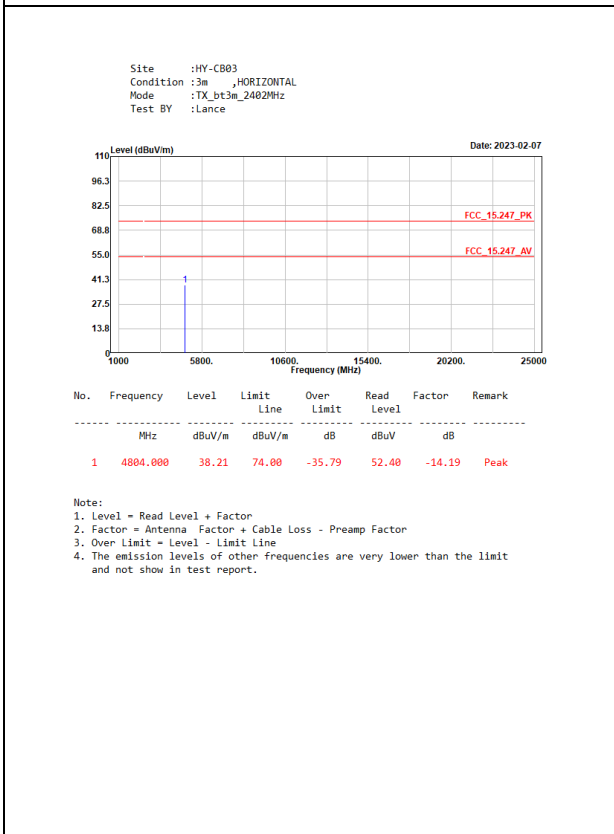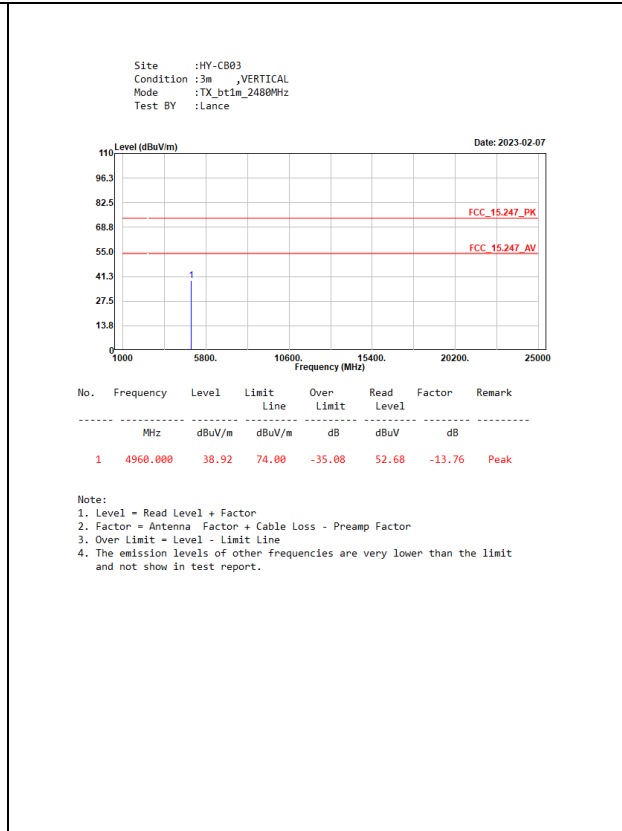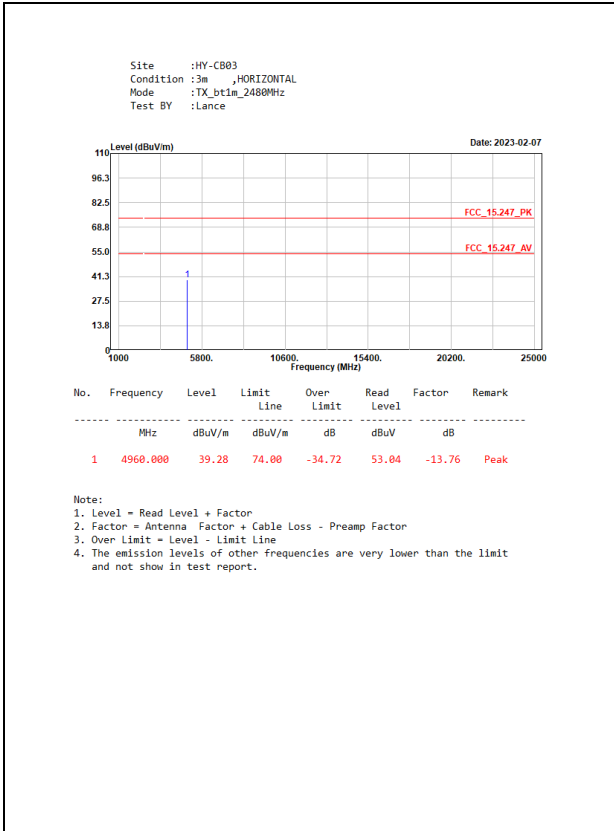

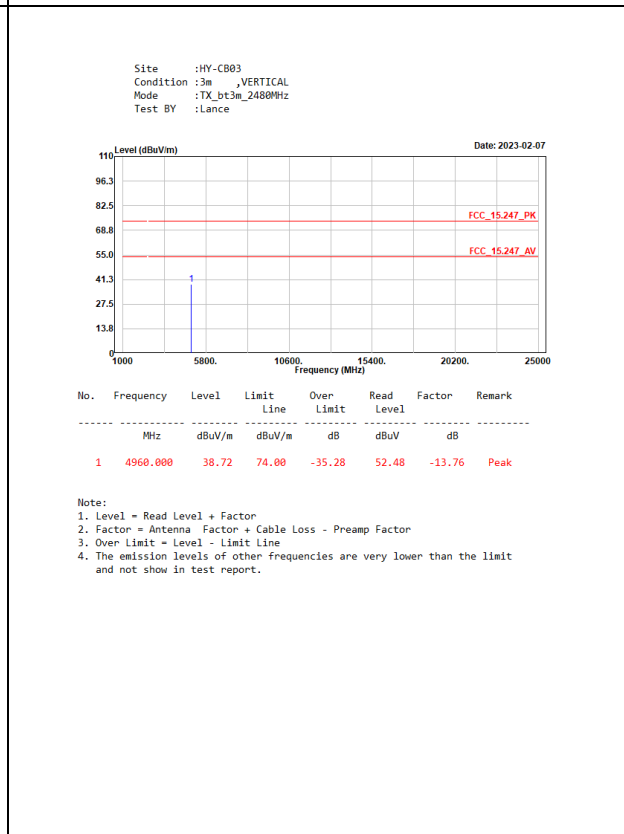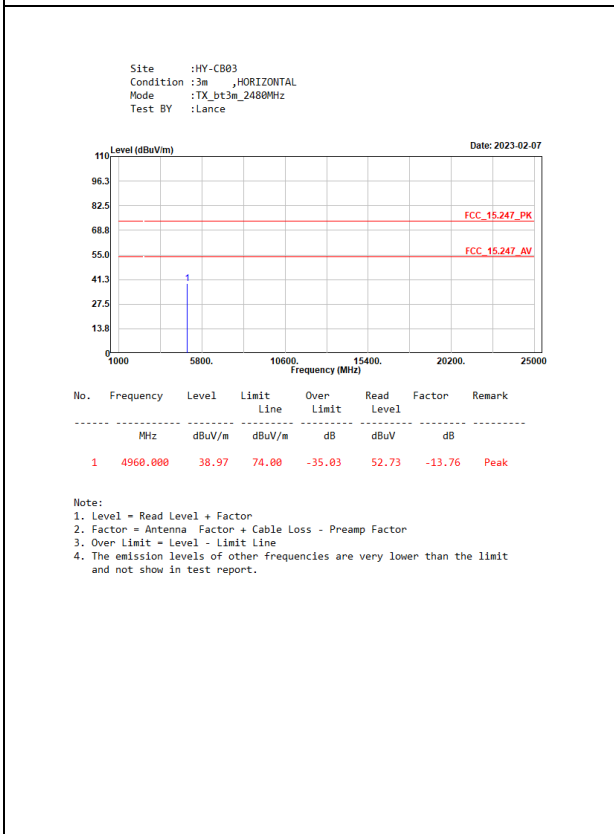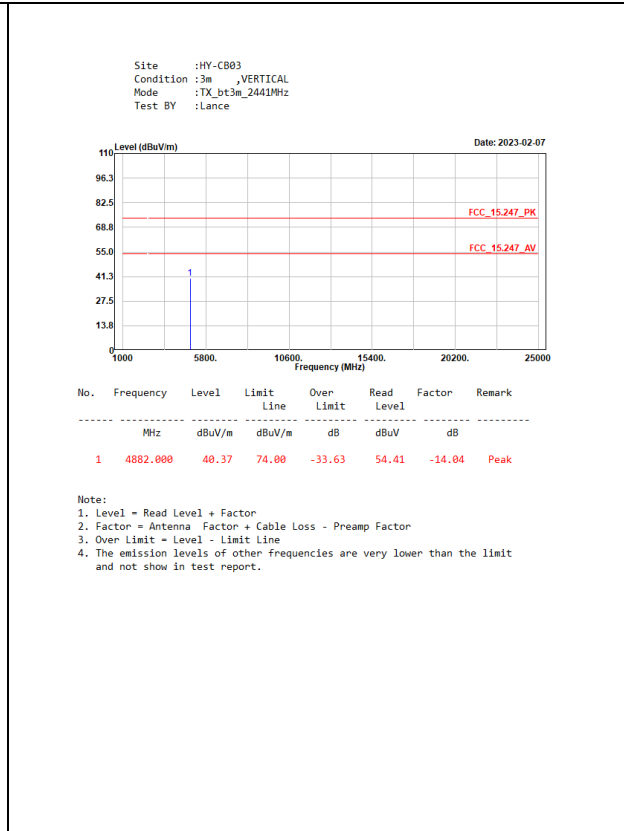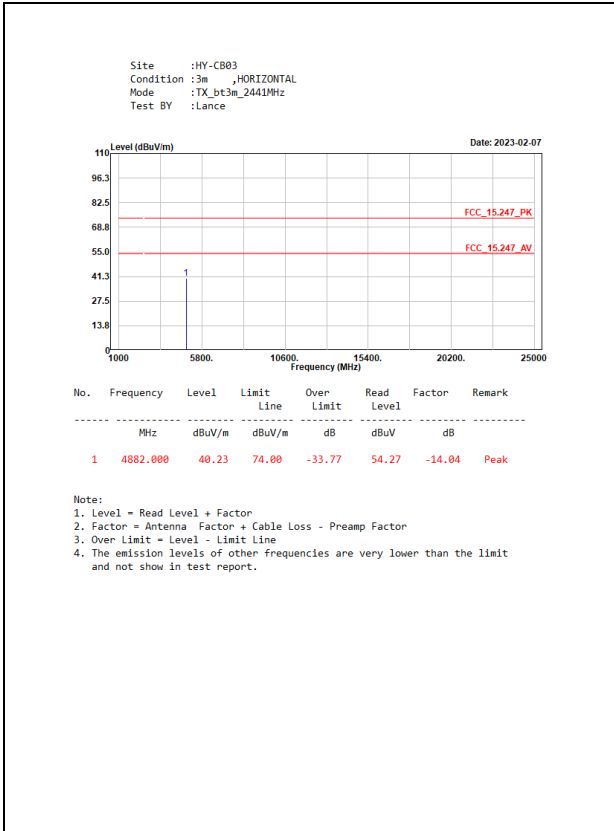


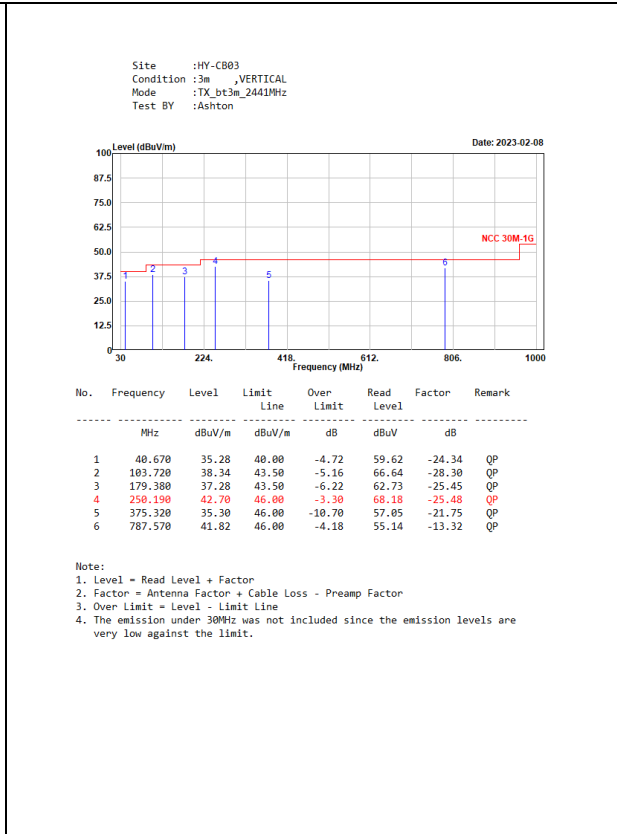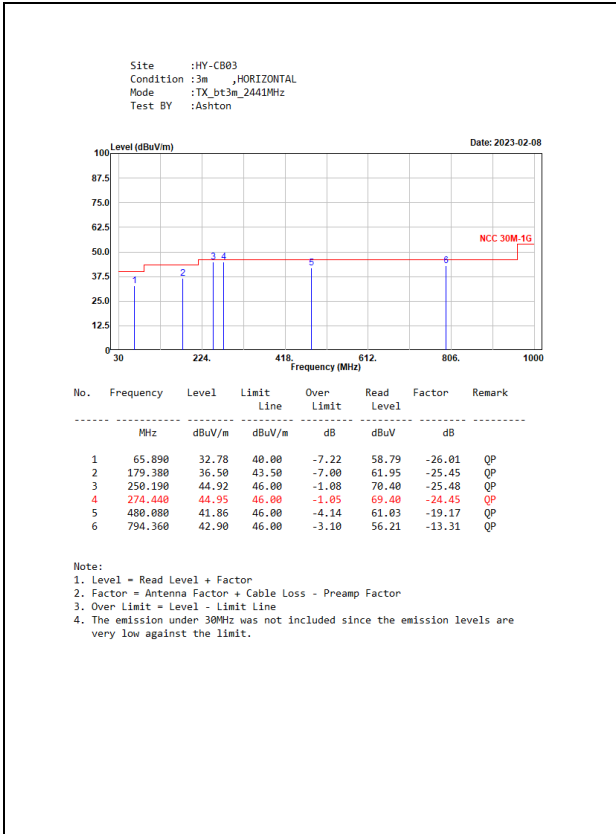


4. Band Edge

4.1. Test Setup

RF Conducted Measurement

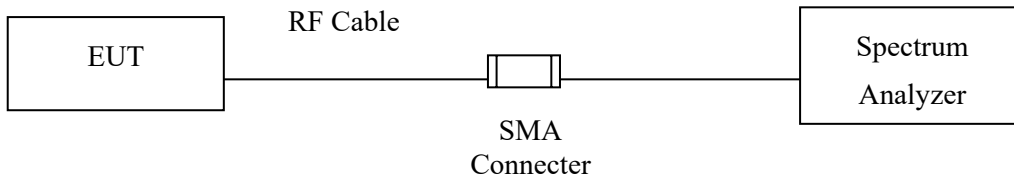

RF Radiated Measurement:

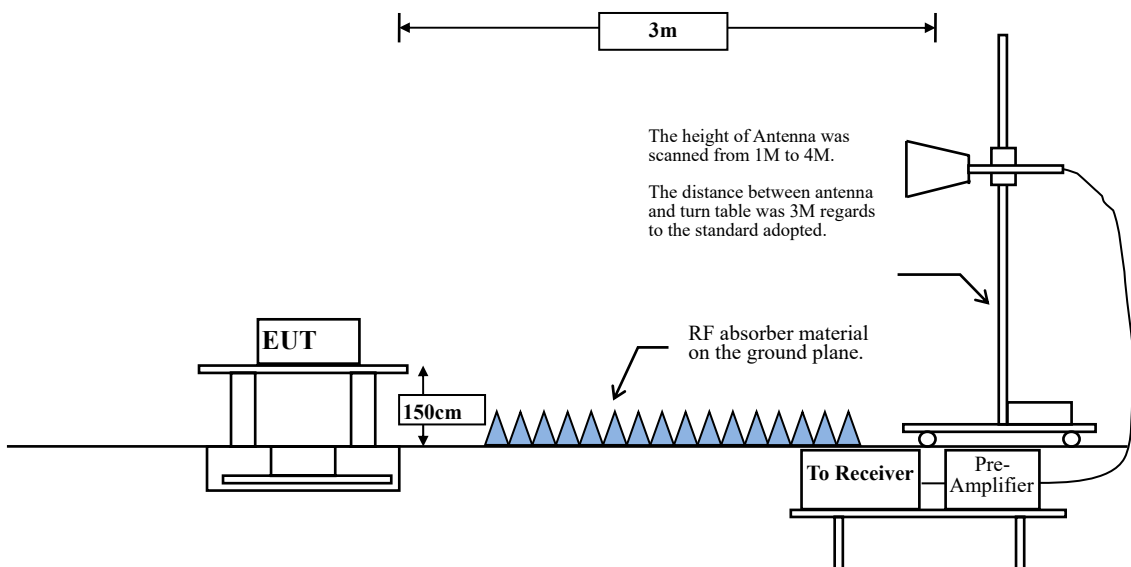

4.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.


The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1 GHz and above 1 GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.4. Test Result of Band Edge

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt1m_2402MHz
 Test BY :Lance

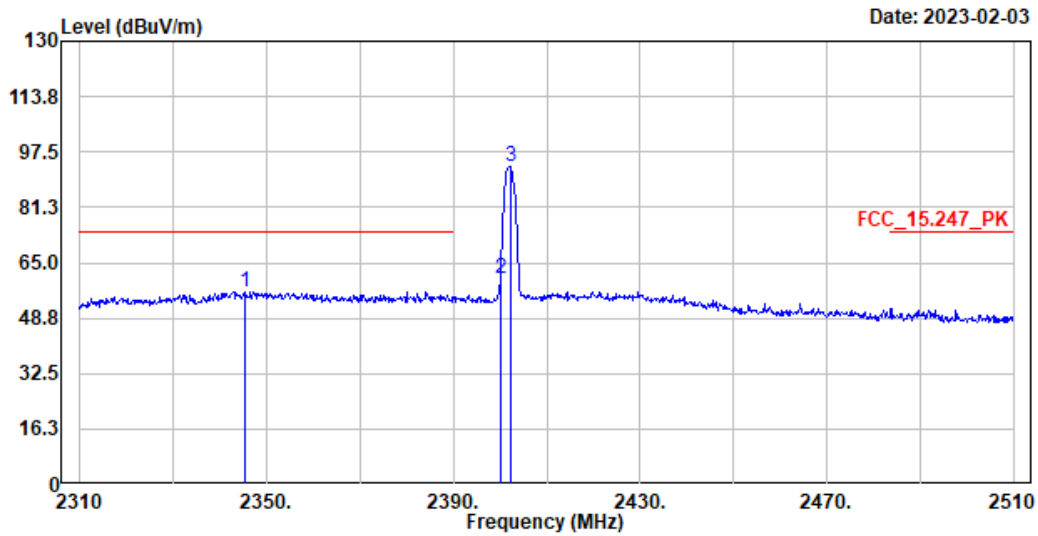

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2345.400	56.53	74.00	-17.47	49.55	6.98	Peak
2	2400.000	60.49	-----	-----	53.57	6.92	Peak
3	2402.200	93.10	-----	-----	86.18	6.92	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal -Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2345.4	56.53	-25.036	31.494	-22.506	54.000
2400	60.49	-25.036	35.454	--	--
2402.2	93.1	-25.036	68.064	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt1m_2402MHz
 Test BY :Lance

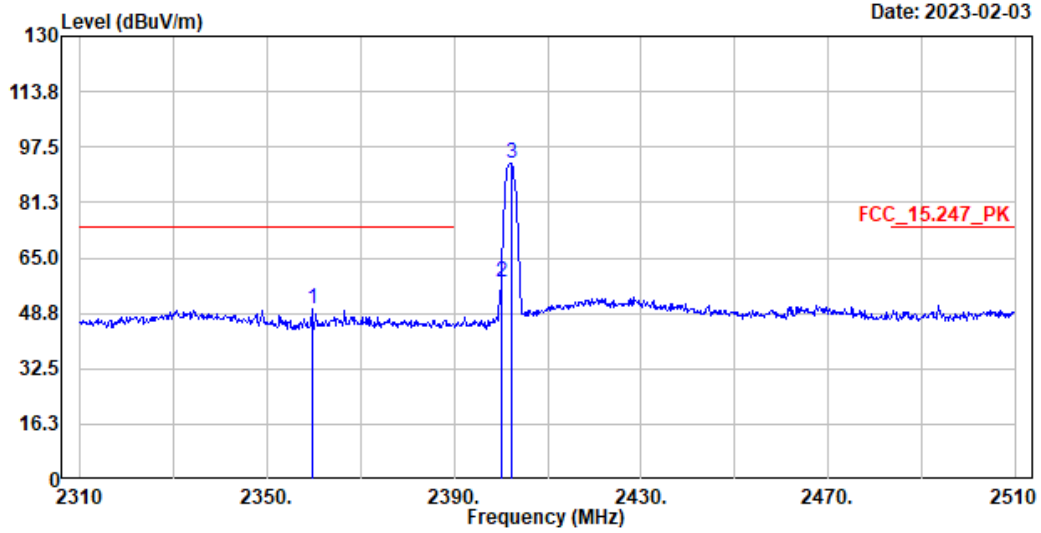

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2359.600	50.07	74.00	-23.93	43.10	6.97	Peak
2	2400.000	58.07	-----	-----	51.15	6.92	Peak
3	2402.200	92.70	-----	-----	85.78	6.92	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical -Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2359.6	50.07	-25.036	25.034	-28.966	54.000
2400	58.07	-25.036	33.034	--	--
2402.2	92.7	-25.036	67.664	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt1m_2480MHz
 Test BY :Lance

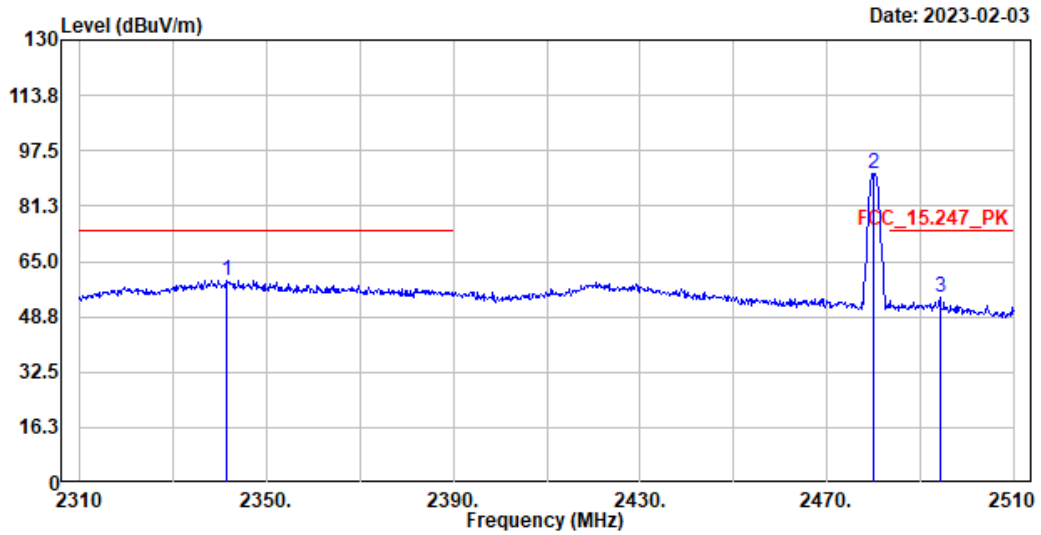

Date: 2023-02-03

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2341.400	59.55	74.00	-14.45	52.56	6.99	Peak
2	2480.000	90.59	-----	-----	83.69	6.90	Peak
3	2494.200	54.46	74.00	-19.54	47.54	6.92	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal -Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2341.4	59.55	-25.036	34.514	-19.486	54.000
2480	90.59	-25.036	65.554	--	--
2494.2	54.46	-25.036	29.424	-24.576	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt1m_2480MHz
 Test BY :Lance

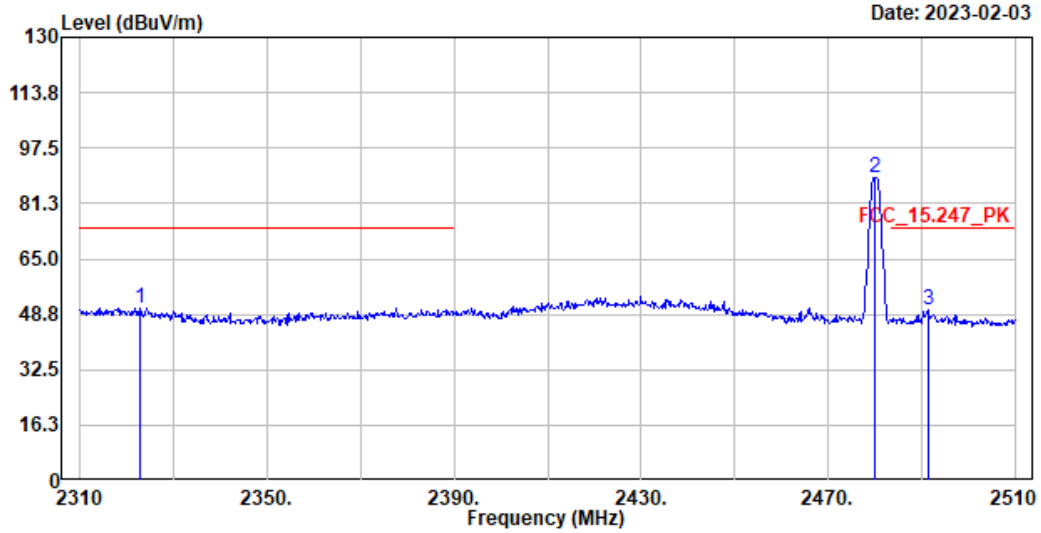

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2322.800	50.61	74.00	-23.39	43.61	7.00	Peak
2	2480.000	88.89	-----	-----	81.99	6.90	Peak
3	2491.400	50.27	74.00	-23.73	43.35	6.92	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical -Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2322.8	50.61	-25.036	25.574	-28.426	54.000
2480	88.89	-25.036	63.854	--	--
2491.4	50.27	-25.036	25.234	-28.766	54.000

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt3m_2402MHz
 Test BY :Lance

Date: 2023-02-03

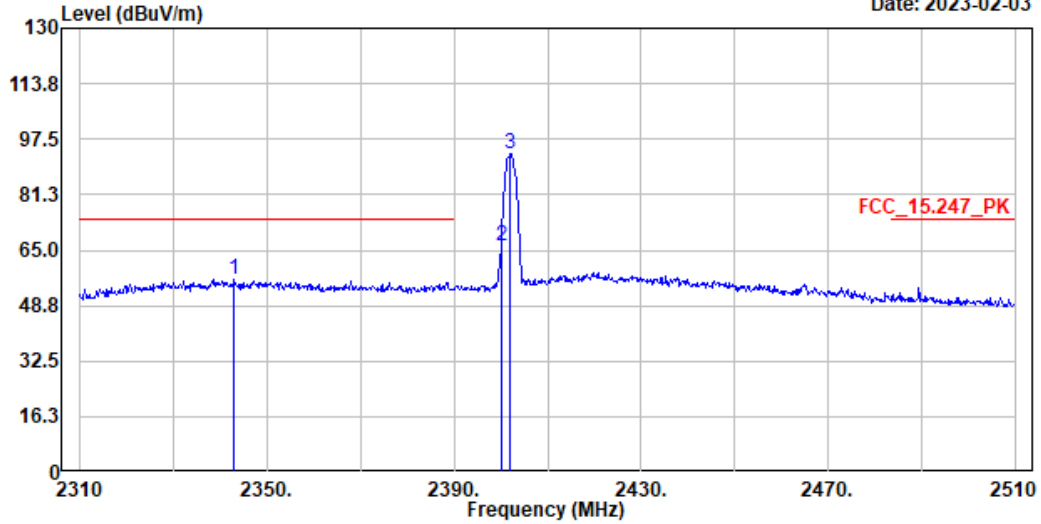

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2343.000	56.44	74.00	-17.56	49.46	6.98	Peak
2	2400.000	66.04	-----	-----	59.12	6.92	Peak
3	2402.000	93.09	-----	-----	86.17	6.92	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal -Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2343	56.44	-25.352	31.088	-22.912	54.000
2400	66.04	-25.352	40.688	--	--
2402	93.09	-25.352	67.738	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt3m_2402MHz
 Test BY :Lance

Date: 2023-02-03

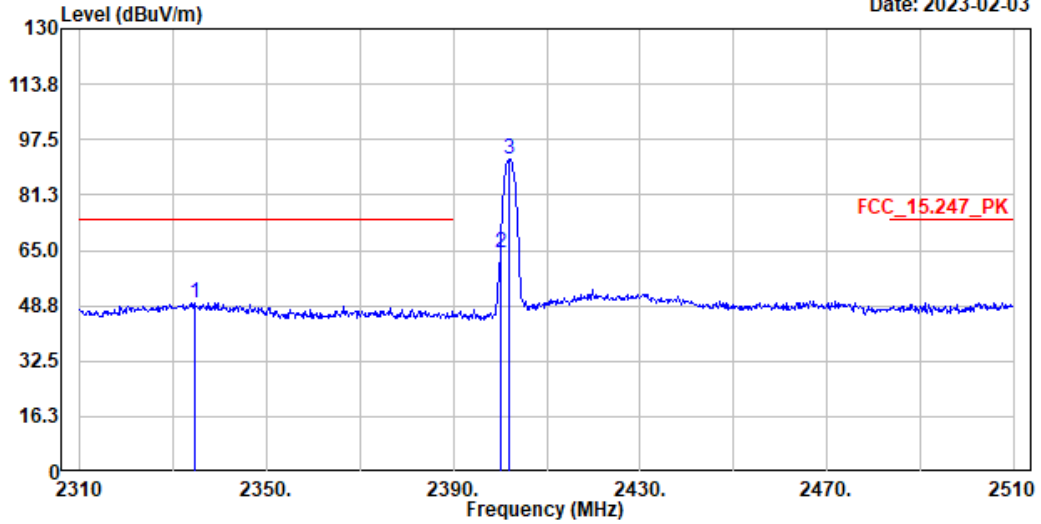

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2334.600	49.65	74.00	-24.35	42.66	6.99	Peak
2	2400.000	64.39	-----	-----	57.47	6.92	Peak
3	2402.000	91.81	-----	-----	84.89	6.92	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical -Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2334.6	49.65	-25.352	24.298	-29.702	54.000
2400	64.39	-25.352	39.038	--	--
2402	91.81	-25.352	66.458	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt3m_2480MHz
 Test BY :Lance

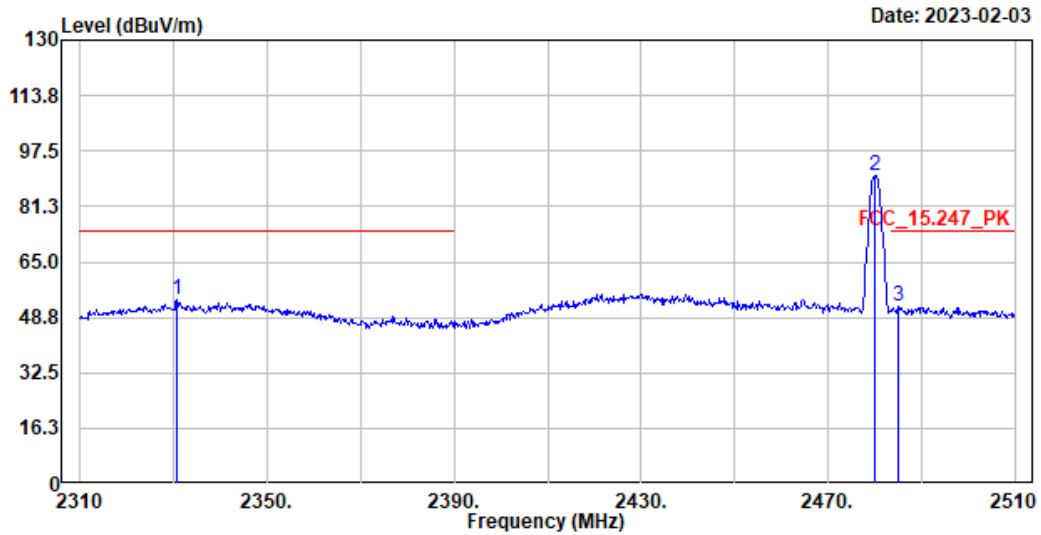

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2330.600	53.81	74.00	-20.19	46.81	7.00	Peak
2	2480.000	90.15	-----	-----	83.25	6.90	Peak
3	2485.000	51.76	74.00	-22.24	44.86	6.90	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal -Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2330.6	53.81	-25.352	28.458	-25.542	54.000
2480	90.15	-25.352	64.798	--	--
2485	51.76	-25.352	26.408	-27.592	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt3m_2480MHz
 Test BY :Lance

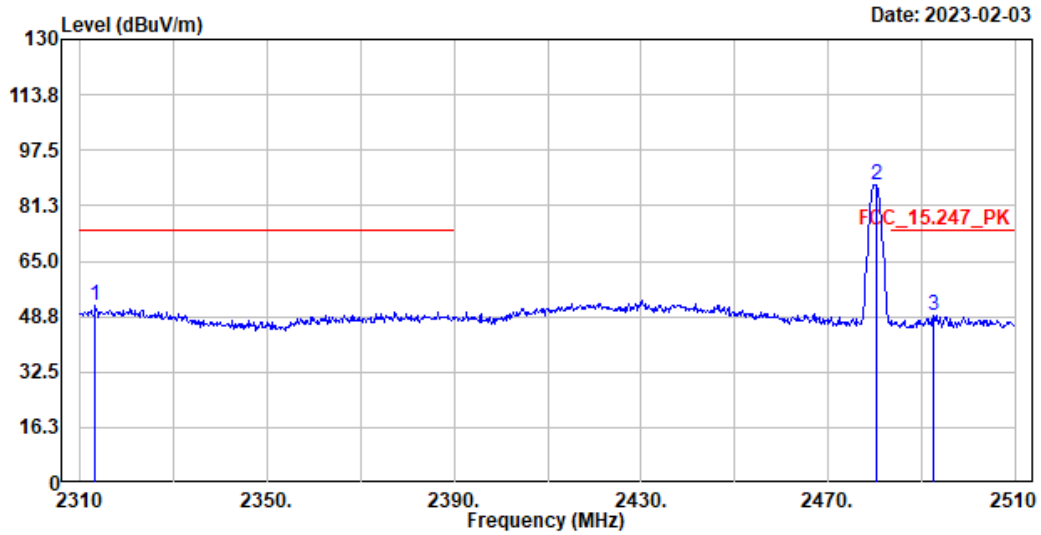

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2313.200	51.99	74.00	-22.01	44.98	7.01	Peak
2	2480.200	87.54	-----	-----	80.64	6.90	Peak
3	2492.400	48.84	74.00	-25.16	41.92	6.92	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical -Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2313.2	51.99	-25.352	26.638	-27.362	54.000
2480	87.54	-25.352	62.188	--	--
2492.4	48.84	-25.352	23.488	-30.512	54.000


5. Duty Cycle

5.1. Test Setup

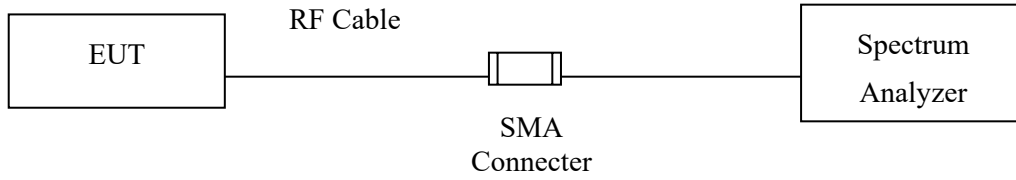

5.2. Test Result of Duty Cycle

Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
 Test Item : Duty Cycle Data
 Test Mode : Transmit-1 Mbps

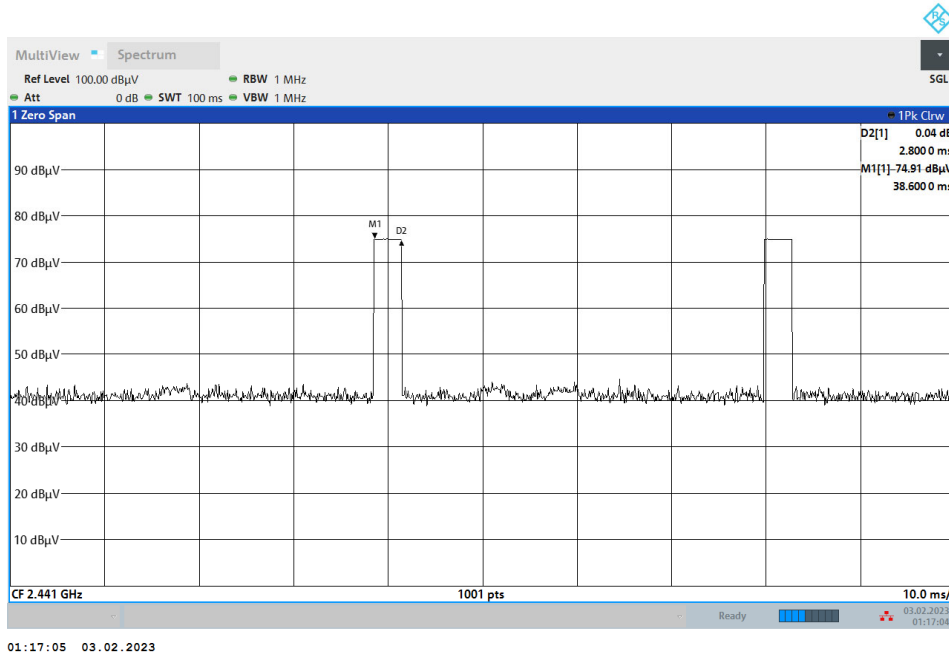


Time on of 100ms = 5.6ms

Duty Cycle = 5.6ms / 100ms = 0.056

Duty Cycle correction factor = 20 LOG 0.056 = -25.036 dB

Duty Cycle correction factor -25.036 dB

Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
 Test Item : Duty Cycle Data
 Test Mode : Transmit-3 Mbps

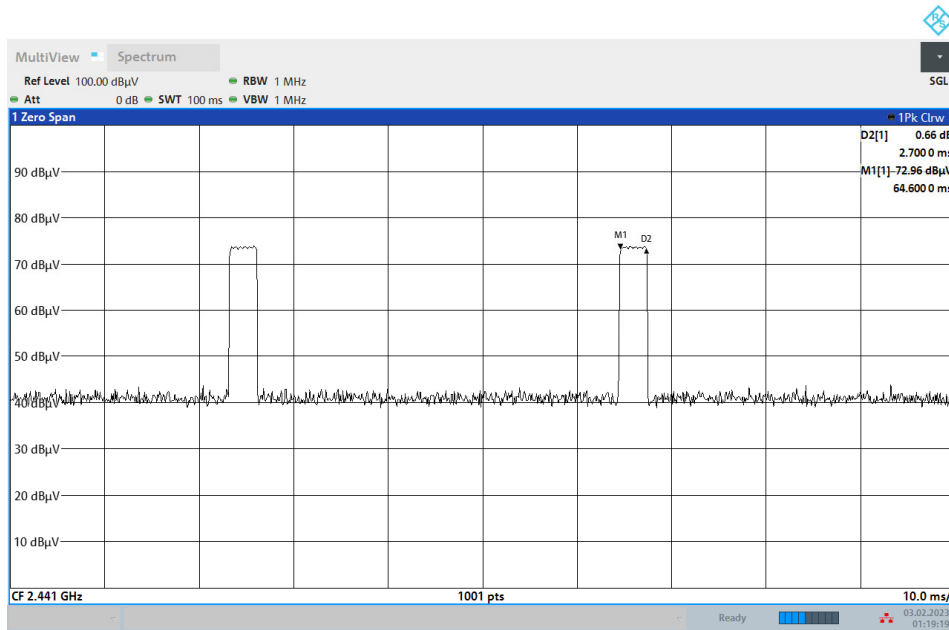


01:19:20 03.02.2023

Time on of 100ms = 5.4ms
 Duty Cycle = $5.4\text{ms} / 100\text{ms} = 0.054$
 Duty Cycle correction factor = $20 \text{ LOG } 0.054 = -25.352 \text{ dB}$

Duty Cycle correction factor -25.352 dB

Appendix 1: EUT Test Setup Photographs

Radiated Test

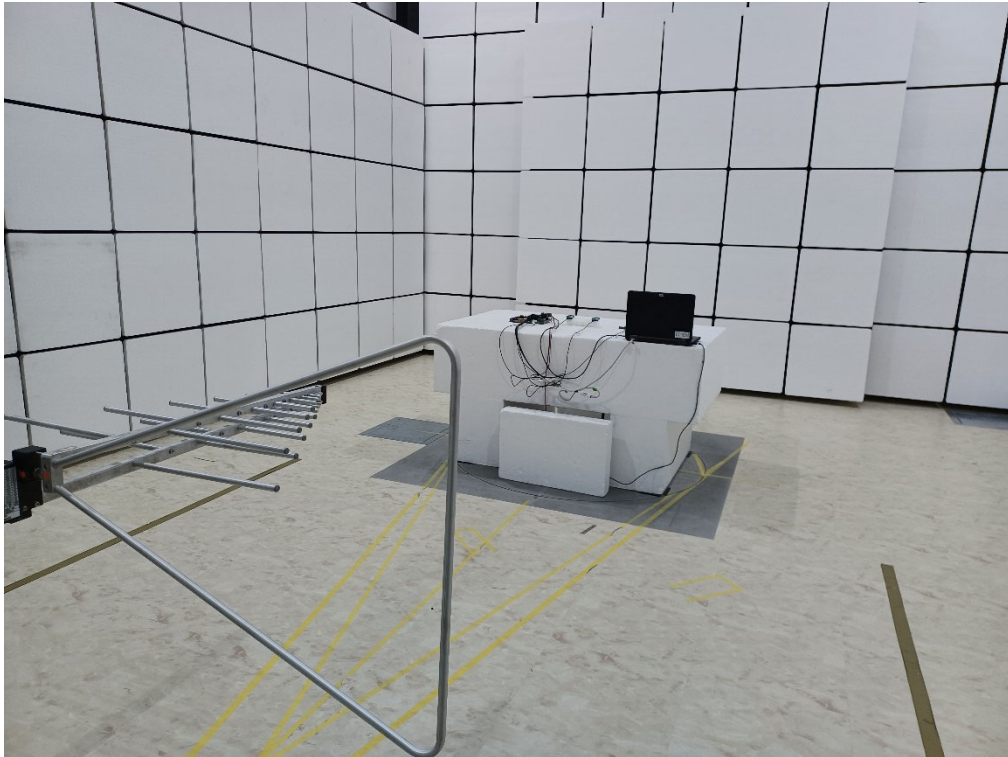

Radiated Test (Horn)

