



# MEASUREMENT REPORT

## FCC PART 15.247 WLAN 802.11b/g/n

---

**FCC ID:** XR3-KEPLER

**APPLICANT:** ONYX INTERNATIONAL INC.

**Application Type:** Certification

**Product:** E-reader

**Model No.:** Kepler, Kepler Pro, Kepler Lite, Da Vinci, ONYX BOOX MONTE CRISTO, ONYX BOOX ROBINSON CRUSOE

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15.247

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v03r05

**Test Date:** June 17 ~ July 13, 2016

Reviewed By : Robin Wu  
( Robin Wu )

Approved By : Marlin Chen  
( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r05. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date
1606RSU02001	Rev. 01	Initial report	08-05-2016
1606RSU02001	Rev. 02	Added serial number	08-09-2016

---

## CONTENTS

Description	Page
<b>1. INTRODUCTION .....</b>	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION .....</b>	<b>7</b>
2.1. Feature of Equipment under Test .....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Working Frequencies for this Report.....	7
2.4. Device Capabilities .....	8
2.5. Test Configuration .....	8
2.6. EMI Suppression Device(s)/Modifications.....	8
2.7. Labeling Requirements.....	8
<b>3. DESCRIPTION OF TEST .....</b>	<b>9</b>
3.1. Evaluation Procedure .....	9
3.2. AC Line Conducted Emissions .....	9
3.3. Radiated Emissions .....	10
<b>4. ANTENNA REQUIREMENTS .....</b>	<b>11</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE .....</b>	<b>12</b>
<b>6. MEASUREMENT UNCERTAINTY .....</b>	<b>13</b>
<b>7. TEST RESULT .....</b>	<b>14</b>
7.1. Summary .....	14
7.2. 6dB Bandwidth Measurement.....	15
7.2.1. Test Limit .....	15
7.2.2. Test Procedure used.....	15
7.2.3. Test Setting.....	15
7.2.4. Test Setup.....	15
7.2.5. Test Result.....	16
7.3. Output Power Measurement.....	19
7.3.1. Test Limit .....	19
7.3.2. Test Procedure Used .....	19
7.3.3. Test Setting.....	19
7.3.4. Test Setup.....	19
7.3.5. Test Result of Output Power .....	20
7.4. Power Spectral Density Measurement .....	22

---

7.4.1.	Test Limit .....	22
7.4.2.	Test Procedure Used .....	22
7.4.3.	Test Setting .....	22
7.4.4.	Test Setup.....	22
7.4.5.	Test Result.....	23
7.5.	Conducted Band Edge and Out-of-Band Emissions.....	26
7.5.1.	Test Limit .....	26
7.5.2.	Test Procedure Used .....	26
7.5.3.	Test Setting .....	26
7.5.4.	Test Setup.....	27
7.5.5.	Test Result.....	28
7.6.	Radiated Spurious Emission Measurement .....	35
7.6.1.	Test Limit .....	35
7.6.2.	Test Procedure Used .....	35
7.6.3.	Test Setting .....	35
7.6.4.	Test Setup.....	37
7.6.5.	Test Result.....	39
7.7.	Radiated Restricted Band Edge Measurement .....	46
7.7.1.	Test Result.....	46
7.8.	AC Conducted Emissions Measurement.....	54
7.8.1.	Test Limit .....	54
7.8.2.	Test Setup.....	54
7.8.3.	Test Result.....	55
<b>8.</b>	<b>CONCLUSION.....</b>	<b>57</b>

## §2.1033 General Information

<b>Applicant:</b>	ONYX INTERNATIONAL INC.
<b>Applicant Address:</b>	Room 102, 3rd Floor, No. 38 HongLou Road, LiWan District, GuangZhou, China
<b>Manufacturer:</b>	ONYX INTERNATIONAL INC.
<b>Manufacturer Address:</b>	Room 102, 3rd Floor, No. 38 HongLou Road, LiWan District, GuangZhou, China
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT FCC Registration No.:</b>	809388
<b>FCC Rule Part(s):</b>	Part 15.247
<b>Model No.:</b>	Kepler, Kepler Pro, Kepler Lite, Da Vinci, ONYX BOOX MONTE CRISTO, ONYX BOOX ROBINSON CRUSOE
<b>FCC ID:</b>	XR3-KEPLER
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
<b>FCC Classification:</b>	Digital Transmission System (DTS)

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



# 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

Product Name	E-reader
Model No.	Kepler, Kepler Pro, Kepler Lite, Da Vinci, ONYX BOOX MONTE CRISTO, ONYX BOOX ROBINSON CRUSOE
Wi-Fi Specification	802.11b/g/n-HT20
Bluetooth Version	v3.0 + HS, v4.0
<b>Components</b>	
Adapter	M/N: HKC0055010-2D INPUT: 100-240V ~ 50/60Hz, 0.2A OUTPUT: 5Vdc, 1.0A

### 2.2. Product Specification Subjective to this Report

Frequency Range	2412 ~ 2462 MHz
Maximum Peak Output Power	802.11b: 10.29dBm; 802.11g: 16.51dBm; 802.11n-HT20: 16.96dBm;
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Antenna Type	PIFA Antenna
Antenna Gain	2.0dBi

### 2.3. Working Frequencies

Channel List for 802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

## 2.4. Device Capabilities

This device contains the following capabilities:

802.11b/g/n WLAN (DTS), Bluetooth (v3.0 + HS, v4.0)

**Note:** 2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

- 802.11b – 99.47%
- 802.11g – 97.14%
- 802.11n-HT20 – 96.96%

## 2.5. Test Configuration

The **E-reader FCC ID: XR3-KEPLER** was tested per the guidance of KDB 558074 D01v03r05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.



### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v03r05 were used in the measurement of the **E-reader FCC ID: XR3-KEPLER**.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the Antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive Antenna height using a broadband Antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn Antennas were used. For frequencies below 30MHz, a calibrated loop Antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband Antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive Antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn Antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive Antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive Antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn Antenna, the horn Antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **E-reader** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The **E-reader FCC ID: XR3-KEPLER** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	101683	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	101684	1 year	2016/11/03
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06182	1 year	2016/12/20

### Radiated Emissions – AC2

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9010A	MY51440195	1 year	2017/06/23
EMI Test Receiver	R&S	ESR7	101209	1 year	2016/11/03
Preamplifier	Schwarzbeck	BBV 9721	9721-008	1 year	2017/04/15
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	302	1 year	2016/12/11
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2016/12/14
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2016/11/07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2016/11/07
Broadband Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170549	1 year	2017/01/04
Digital Thermometer & Hygrometer	Minggao	N/A	MRTSUE06170	1 year	2016/11/30

### Conducted Test Equipment – TR3

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	32176	1 year	2017/05/08
USB Wideband Power Sensor	Boonton	55006	117129	1 year	2017/05/08
Temperature/Humidity Meter	Yuhuaze	HTC-2	25680303WS	1 year	2016/12/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement - SR2</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: 3.46dB
<b>Radiated Emission Measurement - AC2</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

## 7. TEST RESULT

### 7.1. Summary

**Company Name:** ONYX INTERNATIONAL INC.  
**FCC ID:** XR3-KEPLER  
**FCC Classification:** Digital Transmission System (DTS)  
**Data Rate(s) Tested:** 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);  
6.5/7.2Mbps ~ 65/72.2Mbps (n-HT20);

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 1\text{Watt}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc(Peak)}$		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

KDB 558074 D01v03r05 - Section 8.2 Option 2

### 7.2.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

### 7.2.4. Test Setup

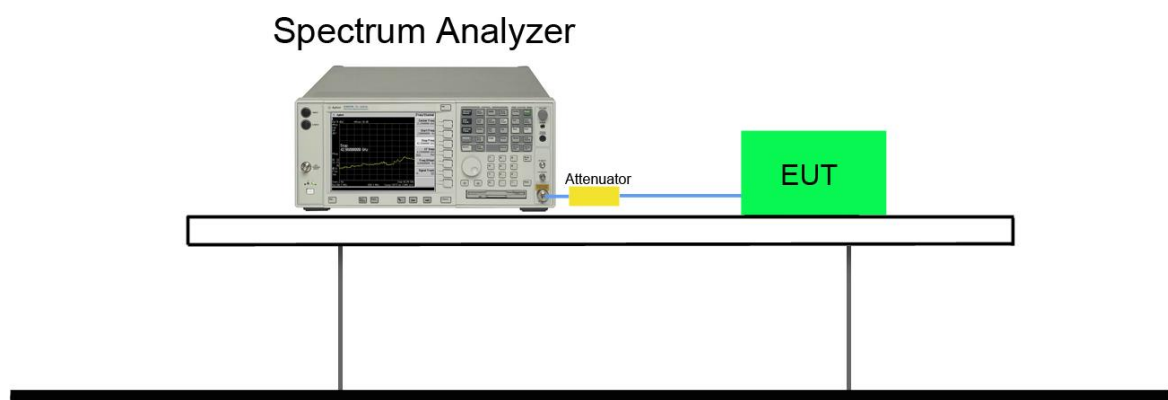

### 7.2.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1	01	2412	9.06	≥ 0.5	Pass
802.11b	1	06	2437	8.58	≥ 0.5	Pass
802.11b	1	11	2462	9.05	≥ 0.5	Pass
802.11g	6	01	2412	15.83	≥ 0.5	Pass
802.11g	6	06	2437	15.78	≥ 0.5	Pass
802.11g	6	11	2462	15.83	≥ 0.5	Pass
802.11n-HT20	6.5	01	2412	17.54	≥ 0.5	Pass
802.11n-HT20	6.5	06	2437	17.54	≥ 0.5	Pass
802.11n-HT20	6.5	11	2462	17.14	≥ 0.5	Pass



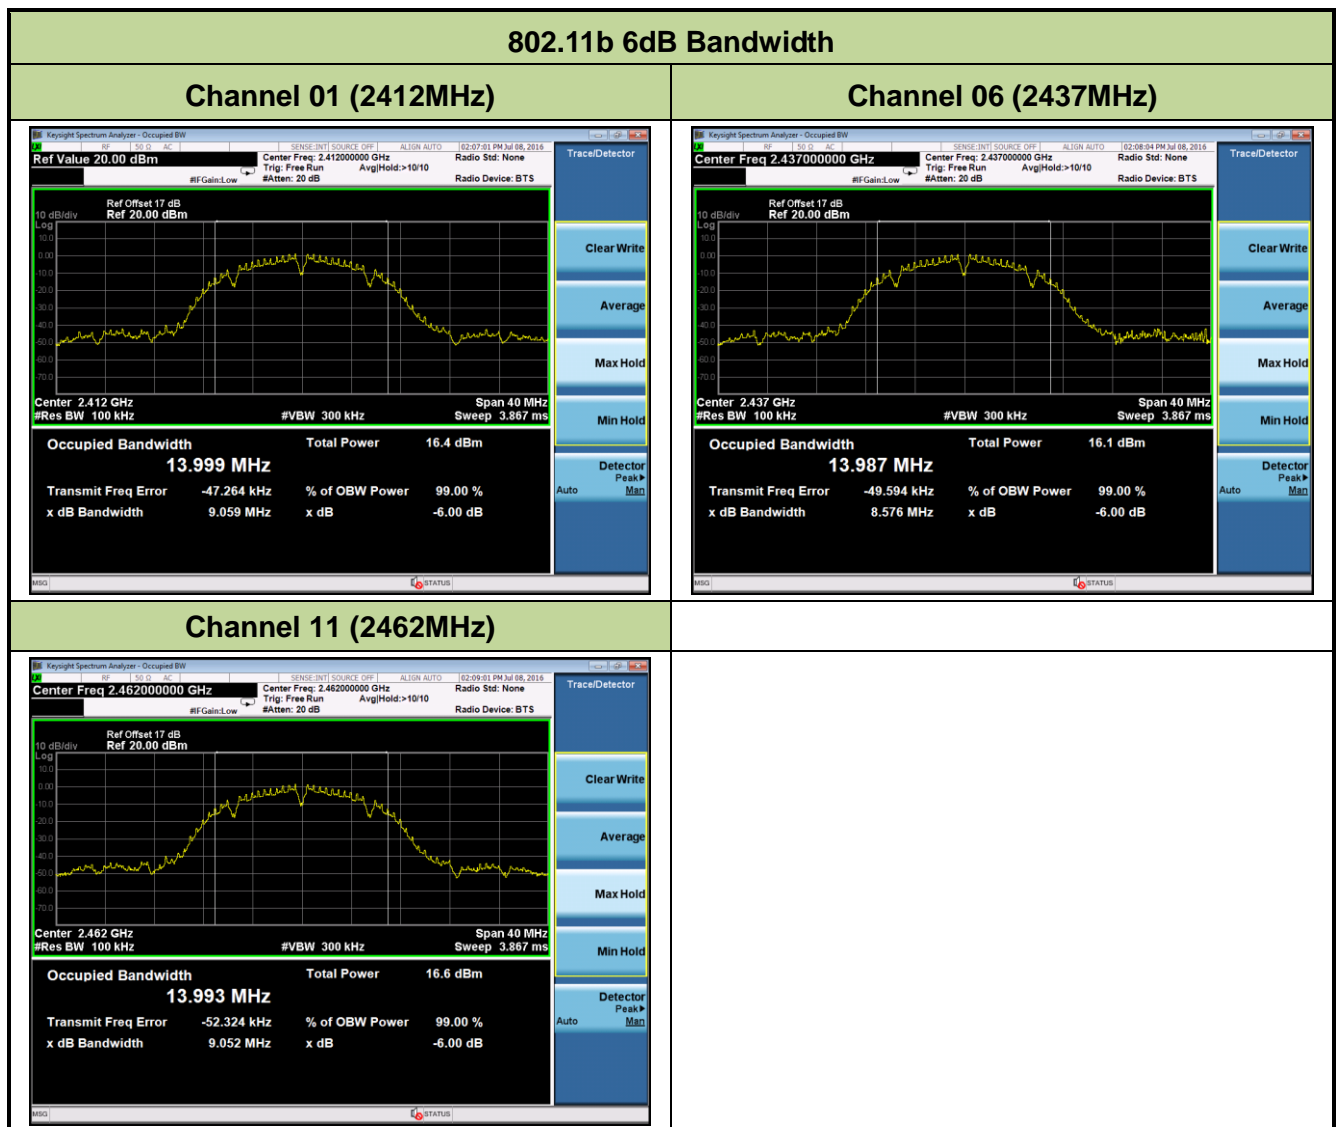




## 802.11g 6dB Bandwidth

Channel 01 (2412MHz)	Channel 06 (2437MHz)																								
<p><b>Center Freq 2.41200000 GHz</b></p> <p>Ref Offset 17 dB Ref 20.00 dBm</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: &gt;10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.0 dBm</td> </tr> <tr> <td><b>16.492 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-47.292 kHz</td> <td>% of OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>15.83 MHz</td> <td>x dB -6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	15.0 dBm	<b>16.492 MHz</b>			Transmit Freq Error	-47.292 kHz	% of OBW Power 99.00 %	x dB Bandwidth	15.83 MHz	x dB -6.00 dB	<p><b>Center Freq 2.43700000 GHz</b></p> <p>Ref Offset 17 dB Ref 20.00 dBm</p> <p>Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: &gt;10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.0 dBm</td> </tr> <tr> <td><b>16.475 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-43.885 kHz</td> <td>% of OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>15.78 MHz</td> <td>x dB -6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	15.0 dBm	<b>16.475 MHz</b>			Transmit Freq Error	-43.885 kHz	% of OBW Power 99.00 %	x dB Bandwidth	15.78 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	15.0 dBm																							
<b>16.492 MHz</b>																									
Transmit Freq Error	-47.292 kHz	% of OBW Power 99.00 %																							
x dB Bandwidth	15.83 MHz	x dB -6.00 dB																							
Occupied Bandwidth	Total Power	15.0 dBm																							
<b>16.475 MHz</b>																									
Transmit Freq Error	-43.885 kHz	% of OBW Power 99.00 %																							
x dB Bandwidth	15.78 MHz	x dB -6.00 dB																							

Channel 11 (2462MHz)													
<p><b>Center Freq 2.46200000 GHz</b></p> <p>Ref Offset 17 dB Ref 20.00 dBm</p> <p>Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: &gt;10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.7 dBm</td> </tr> <tr> <td><b>16.474 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-51.498 kHz</td> <td>% of OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>15.83 MHz</td> <td>x dB -6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	14.7 dBm	<b>16.474 MHz</b>			Transmit Freq Error	-51.498 kHz	% of OBW Power 99.00 %	x dB Bandwidth	15.83 MHz	x dB -6.00 dB	Empty panel
Occupied Bandwidth	Total Power	14.7 dBm											
<b>16.474 MHz</b>													
Transmit Freq Error	-51.498 kHz	% of OBW Power 99.00 %											
x dB Bandwidth	15.83 MHz	x dB -6.00 dB											

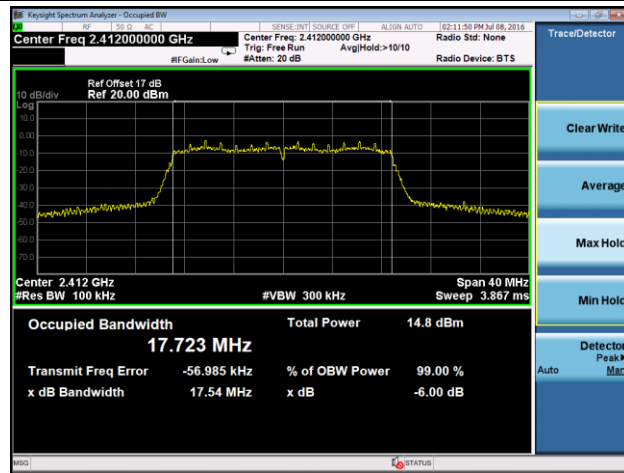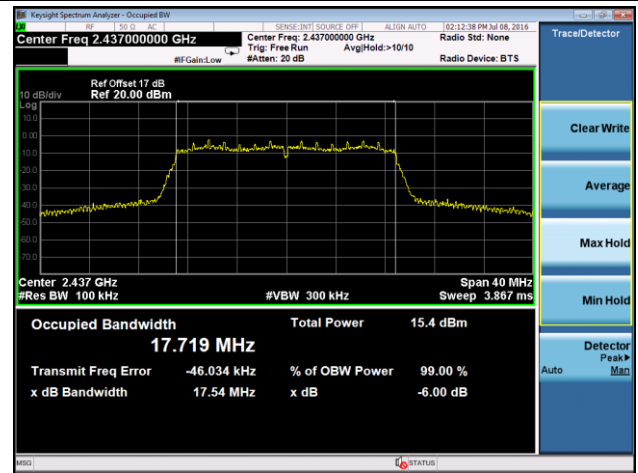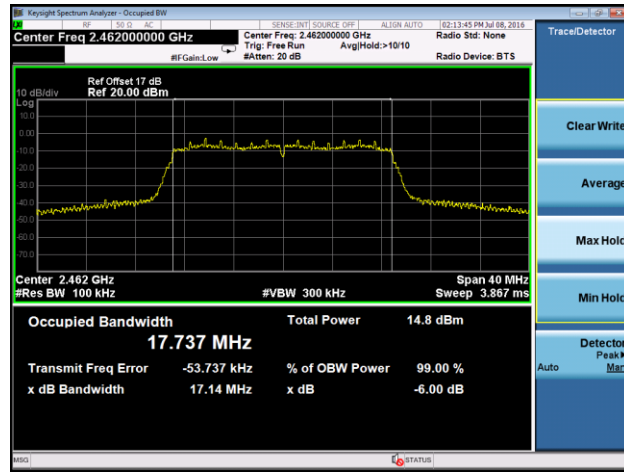**802.11n-HT20 6dB Bandwidth**
**Channel 01 (2412MHz)**

**Channel 06 (2437MHz)**

**Channel 11 (2462MHz)**


### 7.3. Output Power Measurement

#### 7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

#### 7.3.2. Test Procedure Used


KDB 558074 D01v03r05 - Section 9.1.2 PKPM1 - Peak Power Method

#### 7.3.3. Test Setting

##### **Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)**

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### 7.3.4. Test Setup

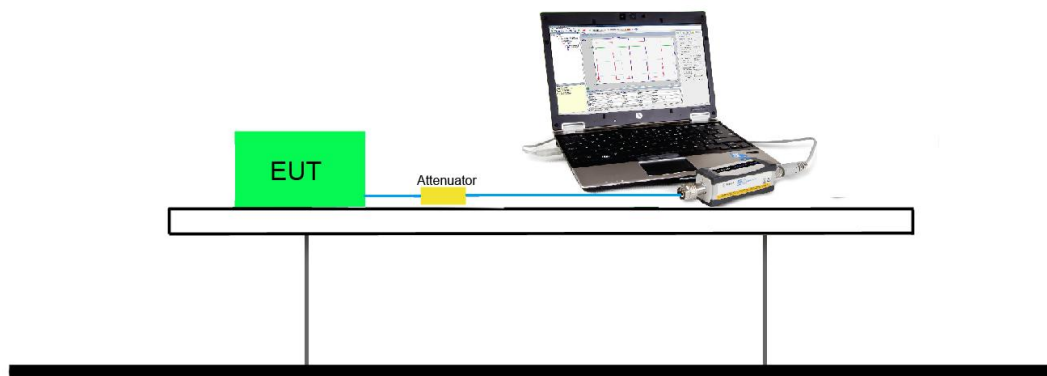

### 7.3.5. Test Result of Output Power

Output power at various data rates:

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak Power (dBm)
802.11b	20	6	2437	1	9.98
				5.5	8.93
				11	7.67
802.11g	20	6	2437	6	16.33
				24	15.45
				54	14.05
802.11n	20	6	2437	6.5	15.96
				39	14.87
				65	13.66

### Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
11b	1	1	2412	10.29	≤ 30	Pass
11b	1	6	2437	9.98	≤ 30	Pass
11b	1	11	2462	9.83	≤ 30	Pass
11g	6	1	2412	16.51	≤ 30	Pass
11g	6	6	2437	16.33	≤ 30	Pass
11g	6	11	2462	15.45	≤ 30	Pass
11n-HT20	6.5	1	2412	15.87	≤ 30	Pass
11n-HT20	6.5	6	2437	15.96	≤ 30	Pass
11n-HT20	6.5	11	2462	15.91	≤ 30	Pass

**Test Result of Average Output Power (Reporting Only)**

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
11b	1	1	2412	6.73	≤ 30	Pass
11b	1	6	2437	6.38	≤ 30	Pass
11b	1	11	2462	6.34	≤ 30	Pass
11g	6	1	2412	5.87	≤ 30	Pass
11g	6	6	2437	5.35	≤ 30	Pass
11g	6	11	2462	5.47	≤ 30	Pass
11n-HT20	6.5	1	2412	5.42	≤ 30	Pass
11n-HT20	6.5	6	2437	5.31	≤ 30	Pass
11n-HT20	6.5	11	2462	5.34	≤ 30	Pass

## 7.4. Power Spectral Density Measurement

### 7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


### 7.4.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 10.2 Method PKPSD

### 7.4.3. Test Setting


1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### 7.4.4. Test Setup

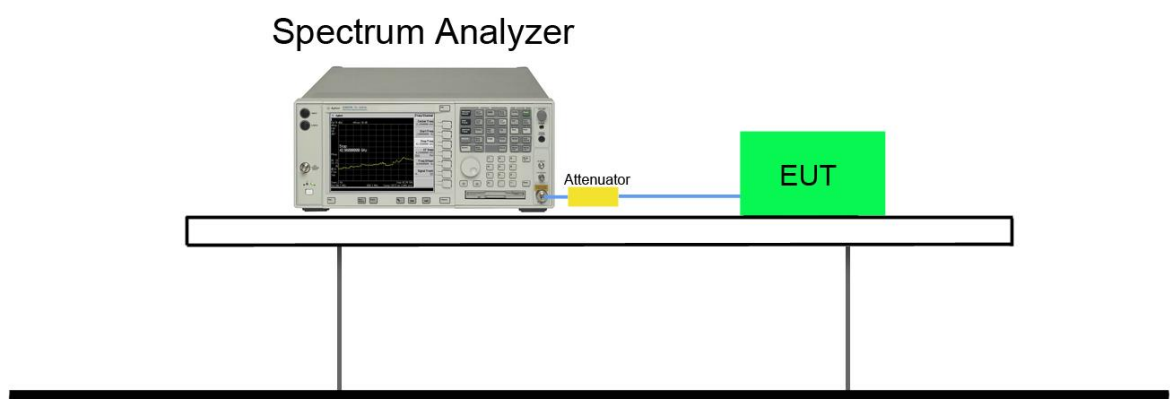


### 7.4.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11b	1	1	2412	-10.98	≤ 8	Pass
11b	1	6	2437	-12.75	≤ 8	Pass
11b	1	11	2462	-11.32	≤ 8	Pass
11g	6	1	2412	-16.15	≤ 8	Pass
11g	6	6	2437	-15.99	≤ 8	Pass
11g	6	11	2462	-16.49	≤ 8	Pass
11n-HT20	6.5	1	2412	-15.01	≤ 8	Pass
11n-HT20	6.5	6	2437	-16.32	≤ 8	Pass
11n-HT20	6.5	11	2462	-15.62	≤ 8	Pass

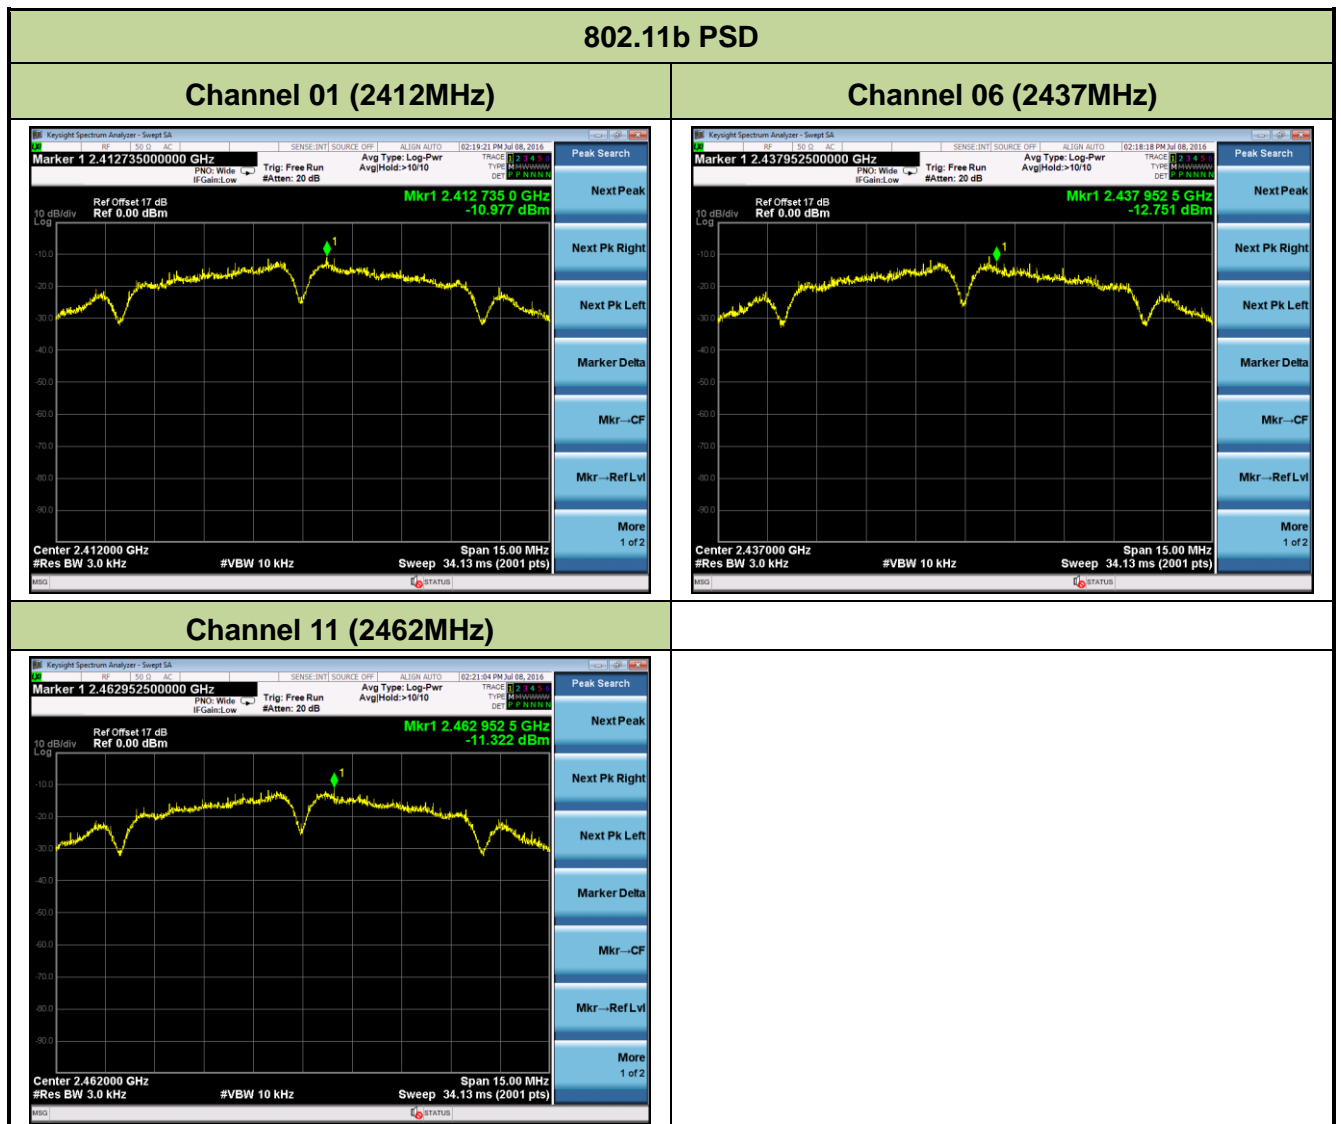


802.11g PSD


Channel 01 (2412MHz)

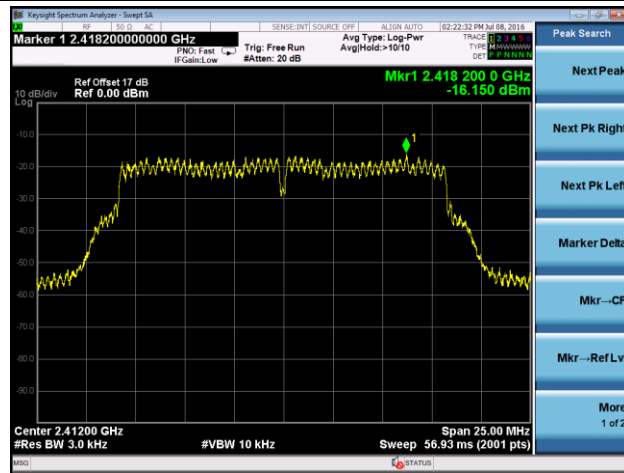

Channel 06 (2437MHz)

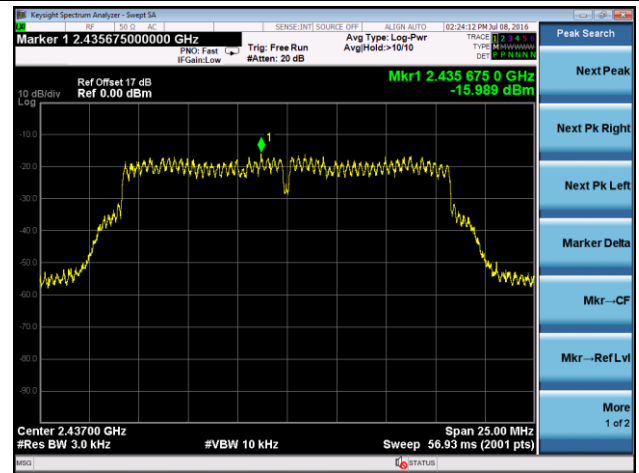


Channel 11 (2462MHz)

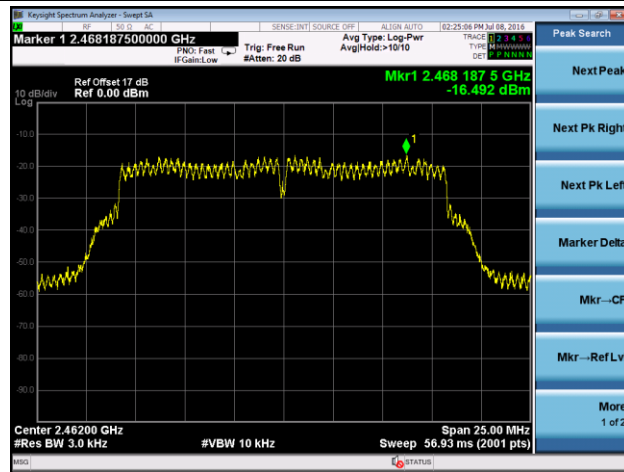




802.11n-HT20 PSD


Channel 01 (2412MHz)

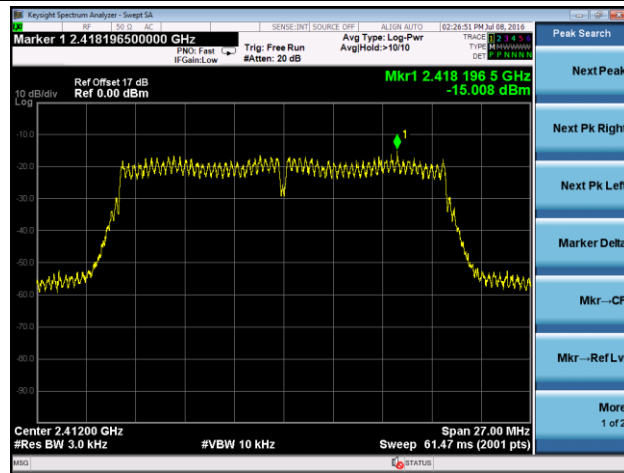

Channel 06 (2437MHz)

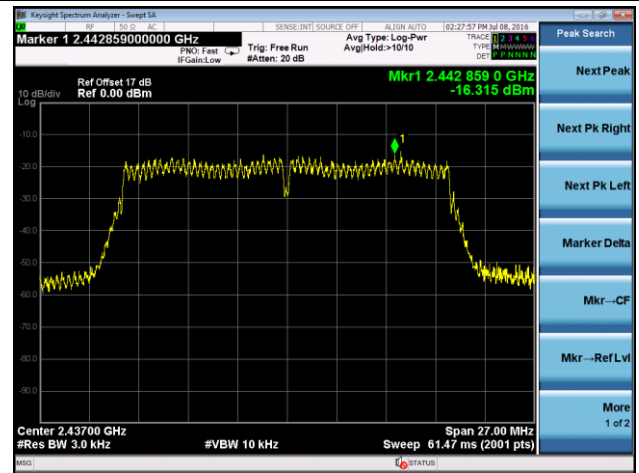

Channel 11 (2462MHz)

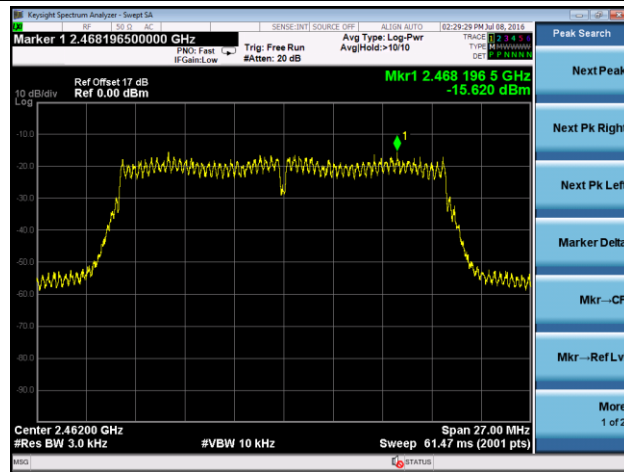

## **7.5. Conducted Band Edge and Out-of-Band Emissions**

### **7.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

### **7.5.2. Test Procedure Used**

KDB 558074 D01v03r05 - Section 11.2 & Section 11.3

### **7.5.3. Test Setting**


#### **1. Reference level measurement**

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW  $\geq 3 \times$  RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

#### **2. Emission level measurement**

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Number of sweep points  $\geq 2 \times$  Span/RBW
- (f) Trace mode = max hold
- (g) Sweep time = auto couple
- (h) The trace was allowed to stabilize

### 7.5.4. Test Setup

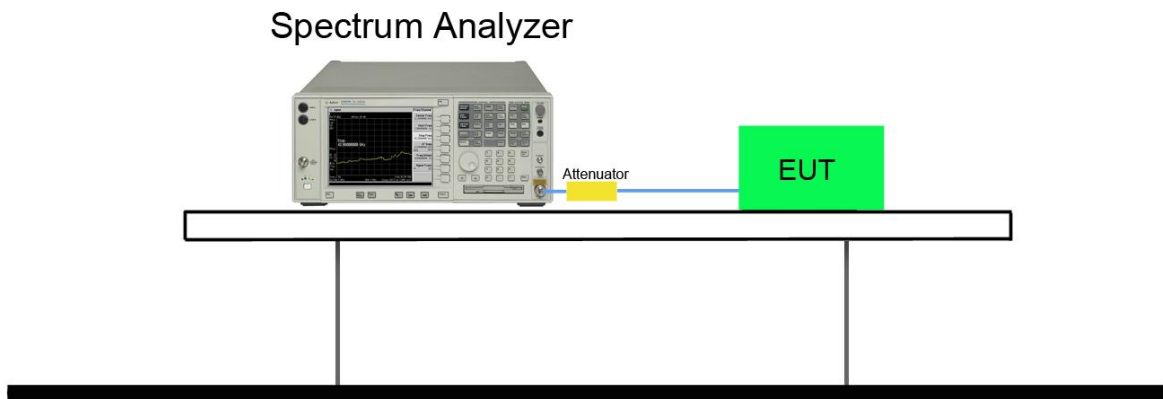


### 7.5.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
802.11b	1	01	2412	20dBc	Pass
802.11b	1	06	2437	20dBc	Pass
802.11b	1	11	2462	20dBc	Pass
802.11g	6	01	2412	20dBc	Pass
802.11g	6	06	2437	20dBc	Pass
802.11g	6	11	2462	20dBc	Pass
802.11n-HT20	6.5	01	2412	20dBc	Pass
802.11n-HT20	6.5	6	2437	20dBc	Pass
802.11n-HT20	6.5	11	2462	20dBc	Pass


### 802.11b Out-of-Band Emissions

#### Channel 01 (2412MHz)


#### 100kHz PSD reference Level

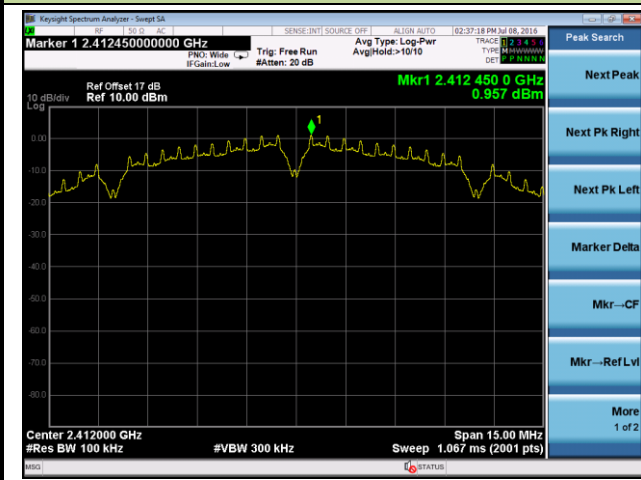

#### Low Band Edge

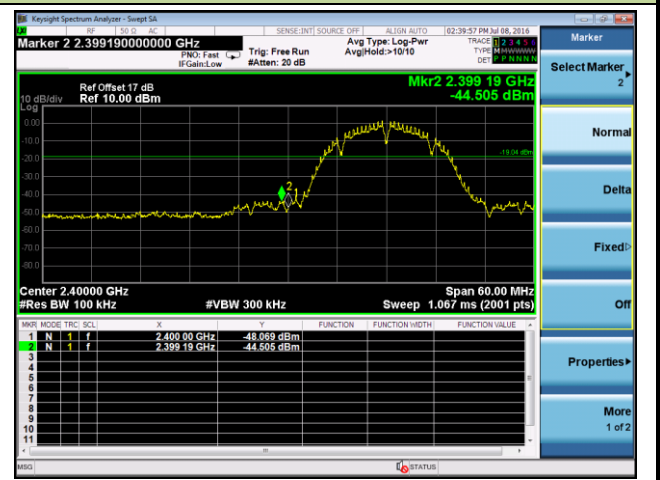


### Spurious Emission 30MHz ~ 25GHz

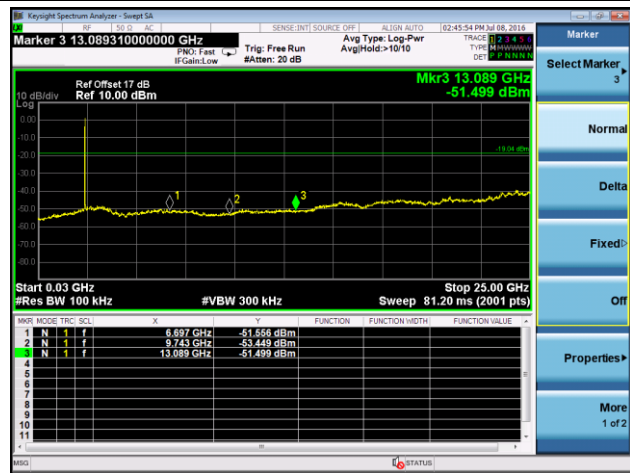


### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

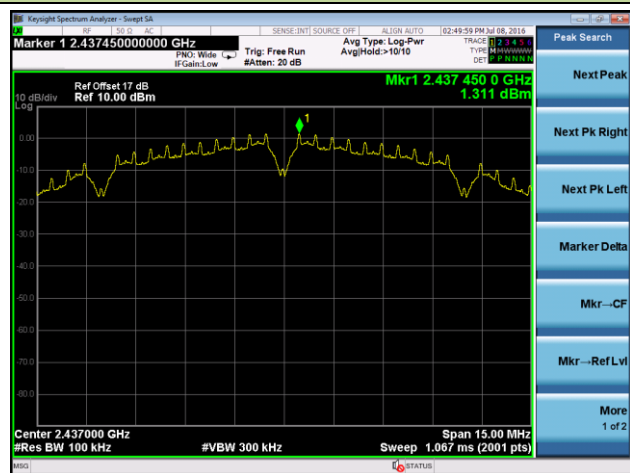


#### Spurious Emission 30MHz ~ 25GHz

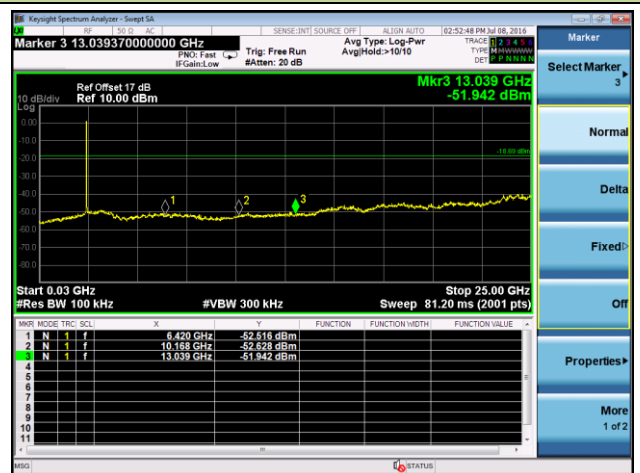


### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

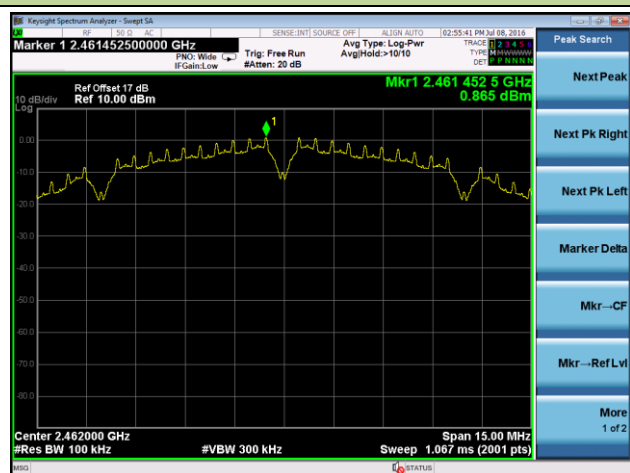

#### High Band Edge

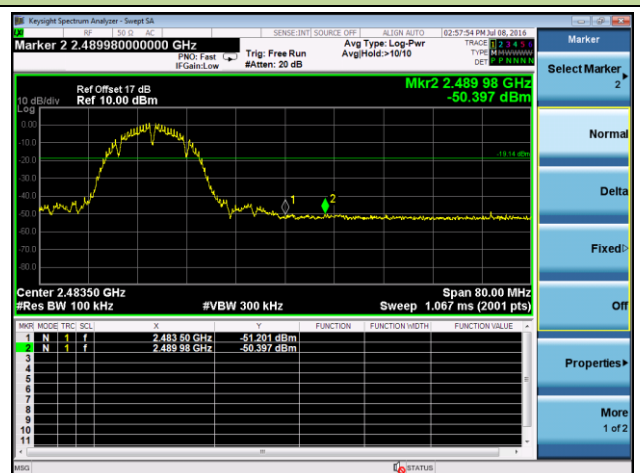

### Spurious Emission 30MHz ~ 25GHz

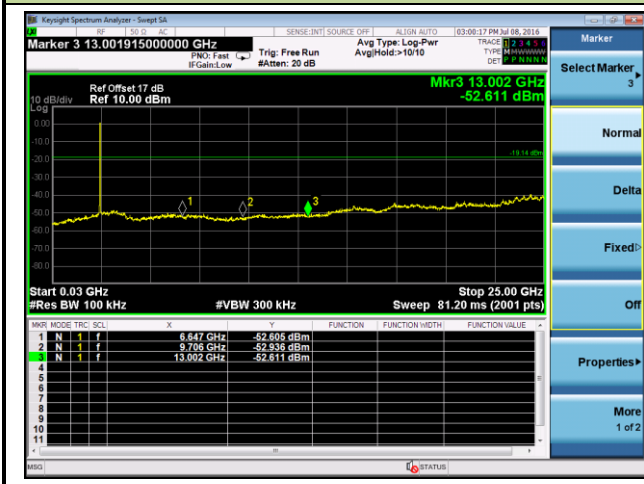


## 802.11g Out-of-Band Emissions

### Channel 01 (2412MHz)


#### 100kHz PSD reference Level



#### Low Band Edge

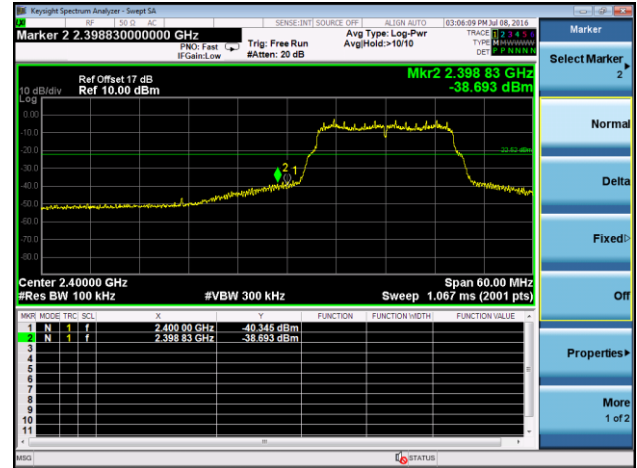


#### Spurious Emission 30MHz ~ 25GHz

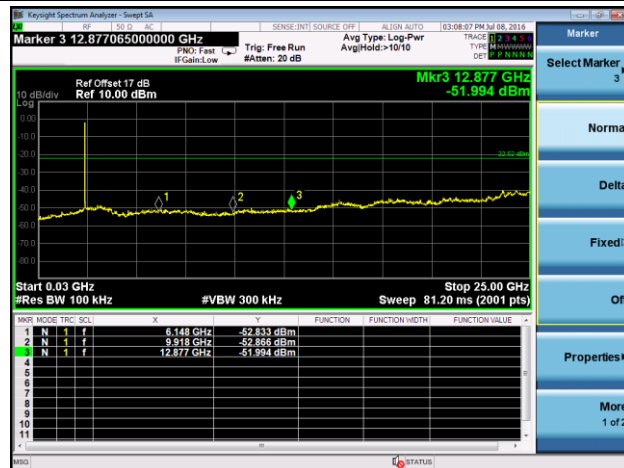


### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

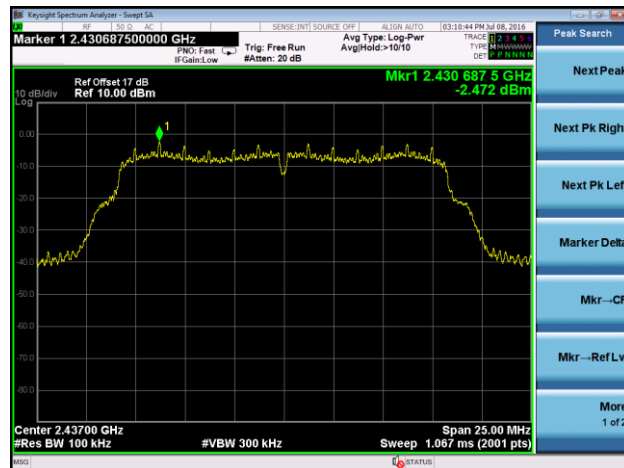


#### Spurious Emission 30MHz ~ 25GHz

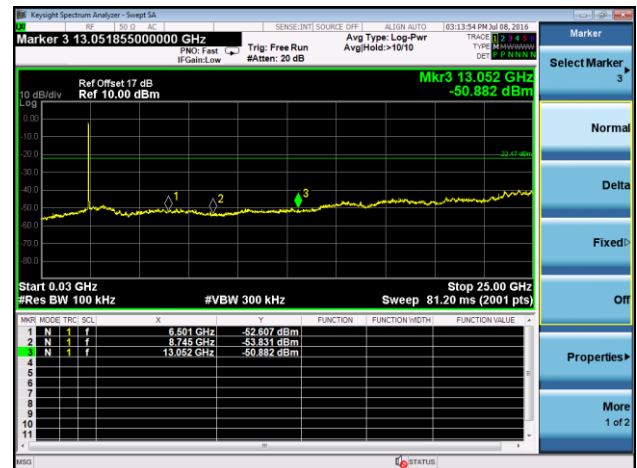


### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

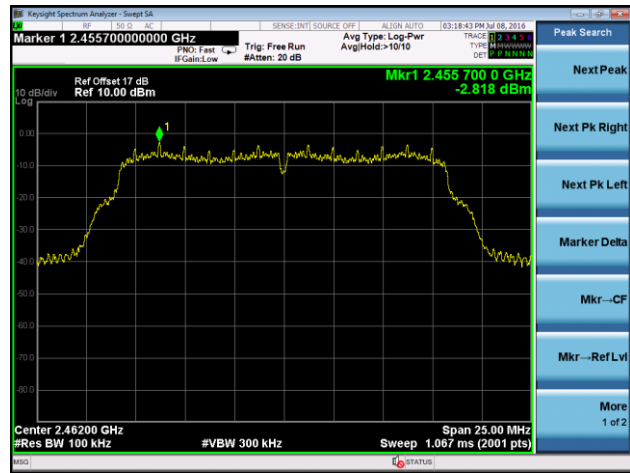

#### High Band Edge

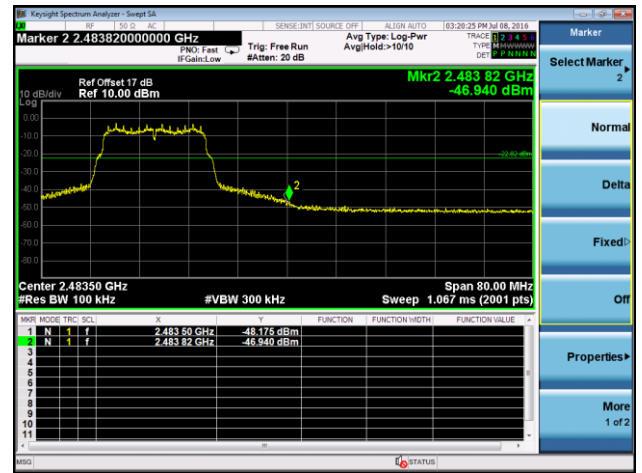

#### Spurious Emission 30MHz ~ 25GHz

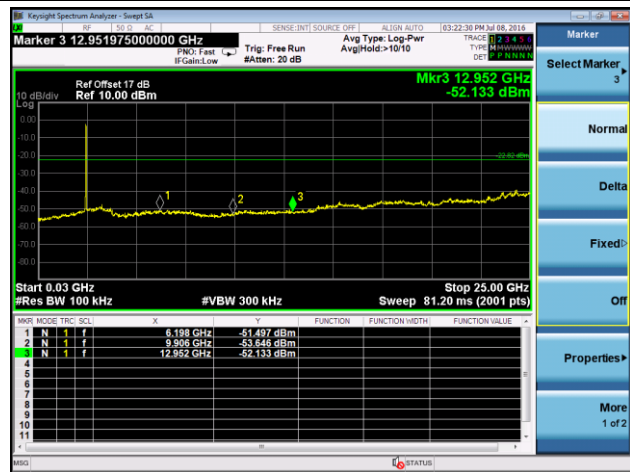




### 802.11n-HT20 Out-of-Band Emissions

#### Channel 01 (2412MHz)


##### 100kHz PSD reference Level



##### Low Band Edge

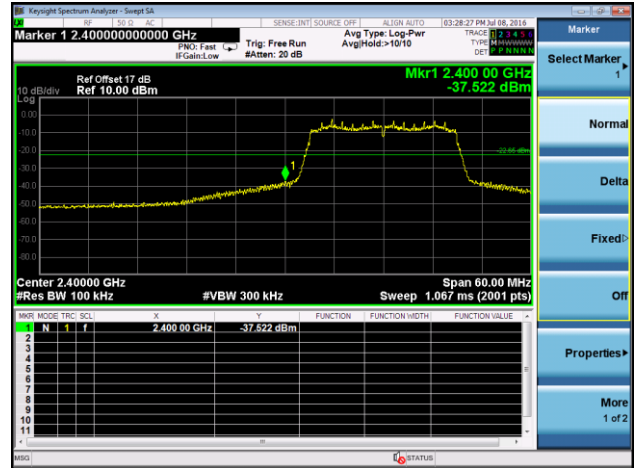


##### Spurious Emission 30MHz ~ 25GHz

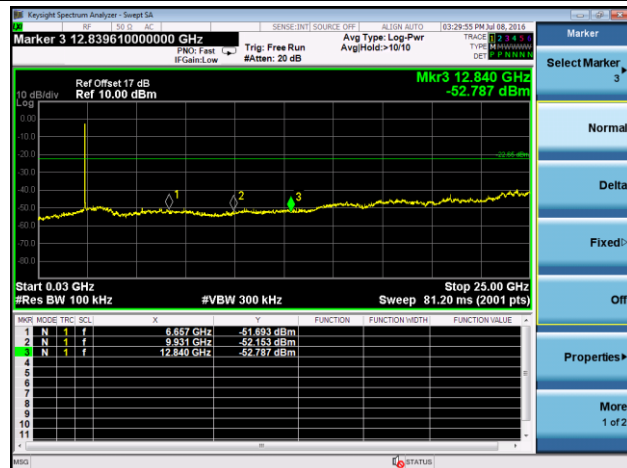


#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level

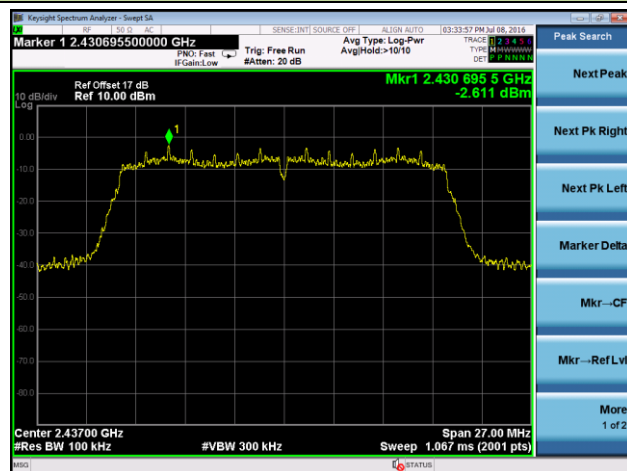


##### Spurious Emission 30MHz ~ 25GHz

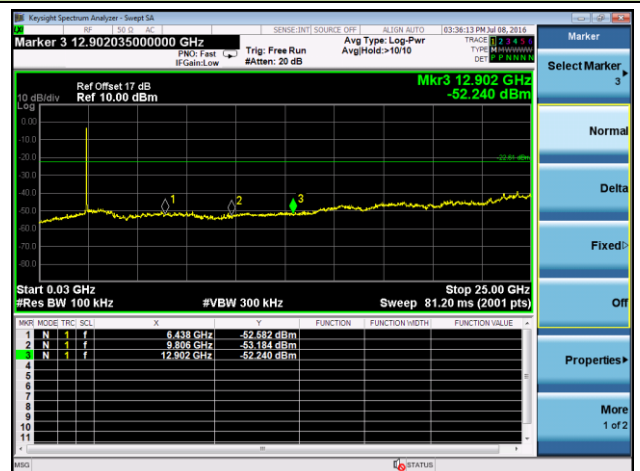

### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

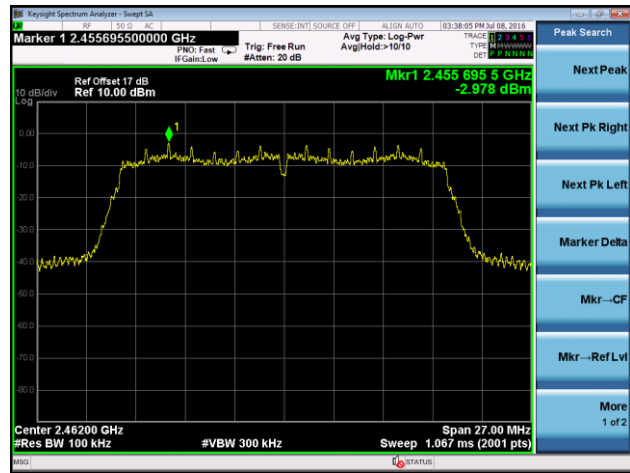

#### High Band Edge



#### Spurious Emission 30MHz ~ 25GHz

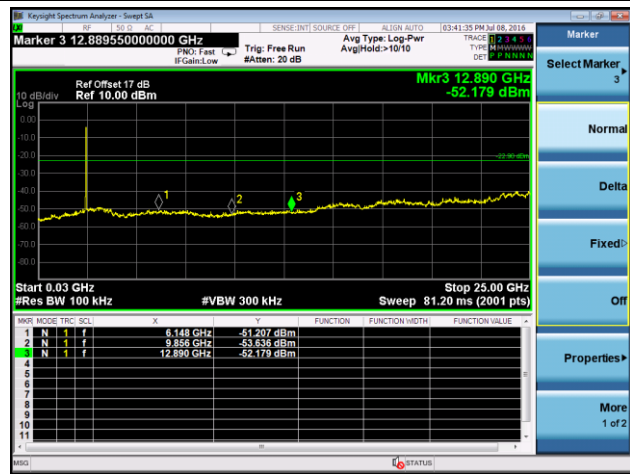

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.6.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r05 - Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r05 - Section 12.2.5 (average power measurements)

### 7.6.3. Test Setting

#### **Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r05**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

**Average Field Strength Measurements**


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW  $\geq$  1/T
- 4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode
- 5. Detector = Peak
- 6. Sweep time = auto
- 7. Trace mode = max hold
- 8. Allow max hold to run for at least 50 times (1/duty cycle) traces

### 7.6.4. Test Setup


#### 9kHz ~ 30MHz Test Setup:

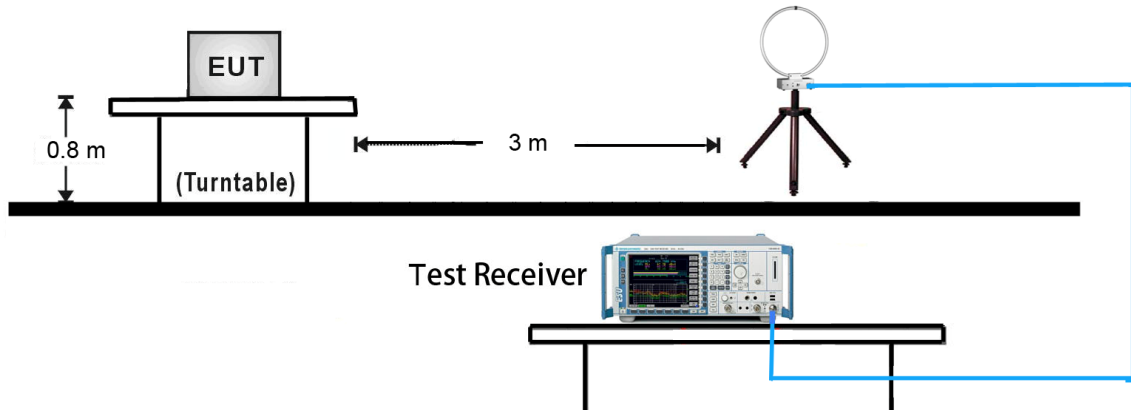

#### 30MHz ~ 1GHz Test Setup:

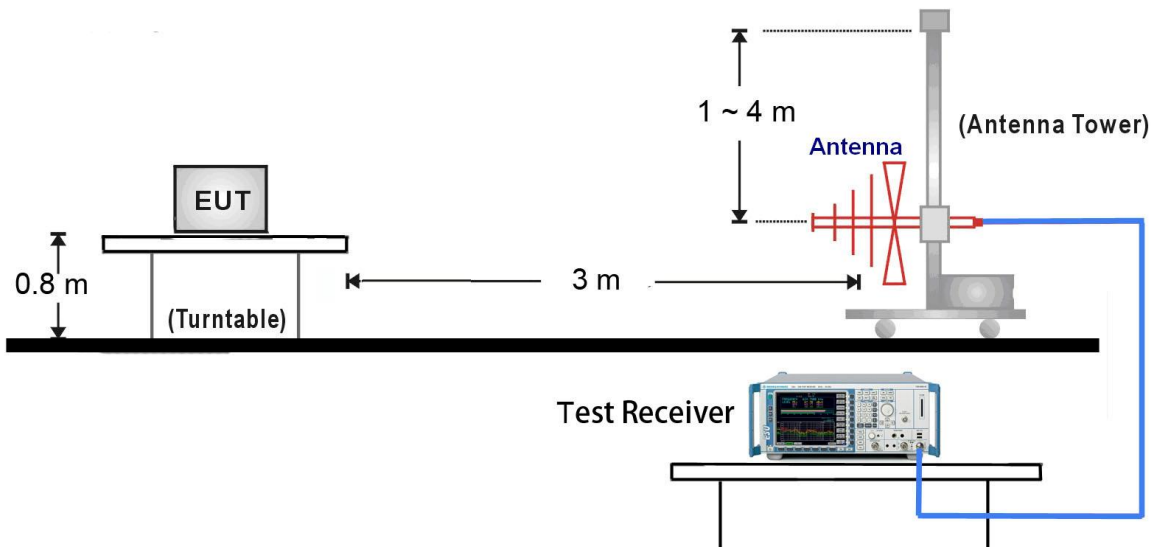

1GHz ~ 25GHz Test Setup:

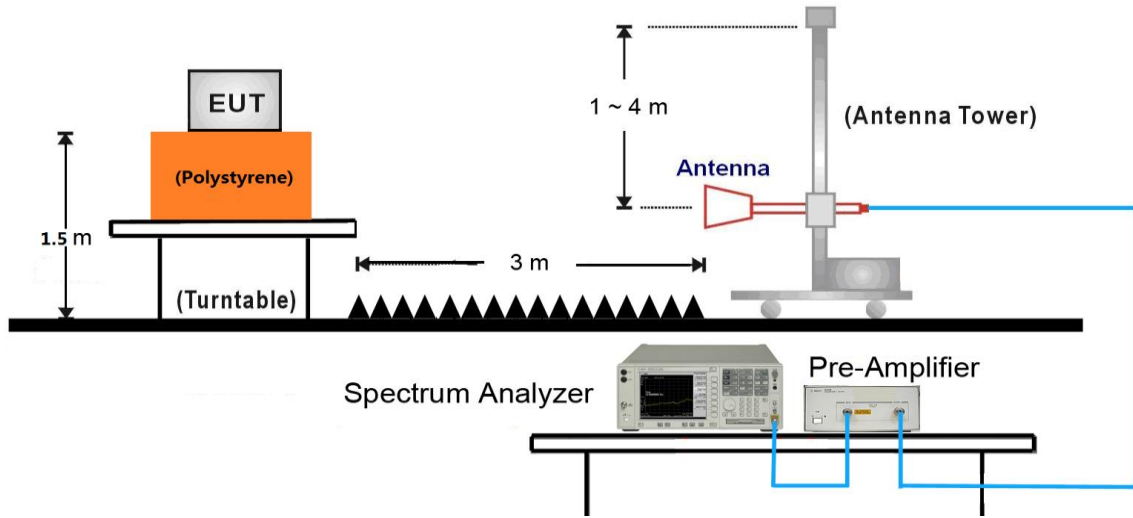

**7.6.5. Test Result**

Test Mode:	802.11g	Test Site:	AC2
Test Channel:	01	Test Engineer:	Lewis Huang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. <b>The worst case of Radiated Spurious Emission.</b> 3. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3618.0	39.4	-1.1	38.3	74.0	-35.7	Peak	Horizontal
	4791.0	36.5	2.9	39.4	74.0	-34.6	Peak	Horizontal
*	7239.0	36.5	10.6	47.1	75.3	-28.2	Peak	Horizontal
*	10299.0	34.2	14.8	49.0	75.3	-26.3	Peak	Horizontal
	3618.0	39.1	-1.1	38.0	74.0	-36.0	Peak	Vertical
	4842.0	36.7	2.9	39.6	74.0	-34.4	Peak	Vertical
*	7162.5	34.8	10.5	45.3	75.3	-30.0	Peak	Vertical
*	8743.5	33.6	11.7	45.3	75.3	-30.0	Peak	Vertical


Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The worst case of Radiated Emission below 1GHz:**

Site: AC2	Time: 2016/07/09 - 18:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
<b>Worse Case Mode: 802.11g at Channel 2412MHz</b>	

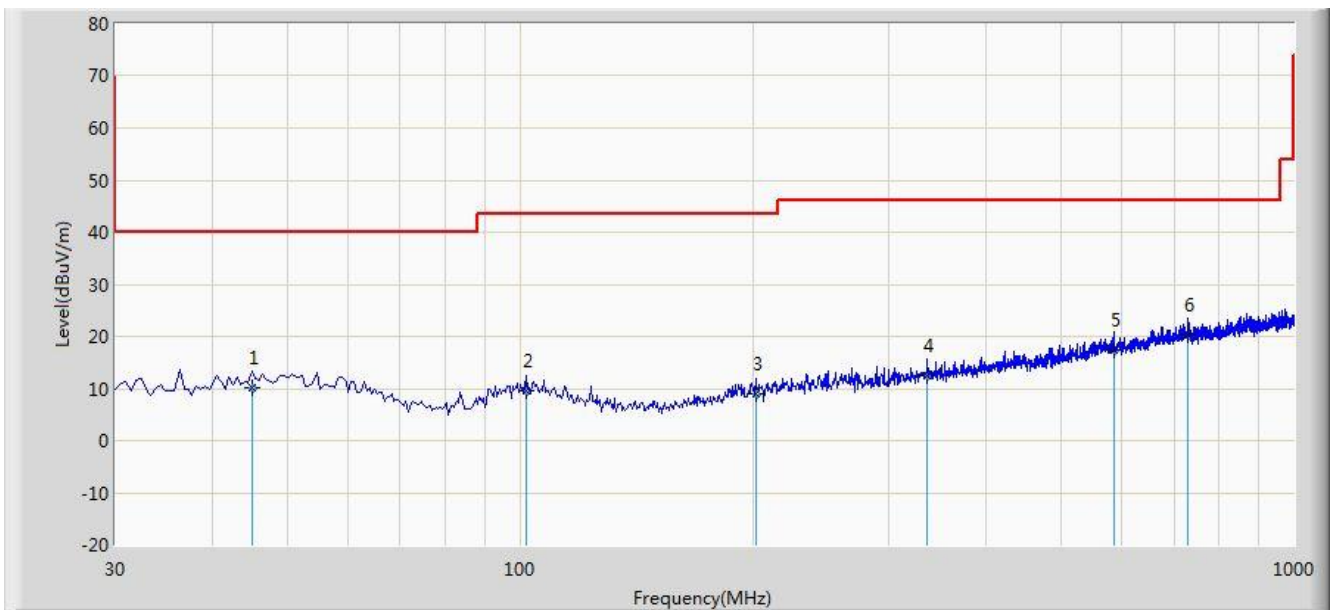


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			45.035	10.283	-4.563	-29.717	40.000	14.846	QP
2			101.780	9.655	-3.549	-33.845	43.500	13.204	QP
3			201.690	9.061	-3.245	-34.439	43.500	12.306	QP
4			336.035	12.425	-3.145	-33.575	46.000	15.570	QP
5			585.325	17.520	-2.340	-28.480	46.000	19.861	QP
6		*	728.885	20.379	-1.650	-25.621	46.000	22.029	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC2	Time: 2016/07/09 - 18:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
<b>Worse Case Mode: 802.11g at Channel 2412MHz</b>	

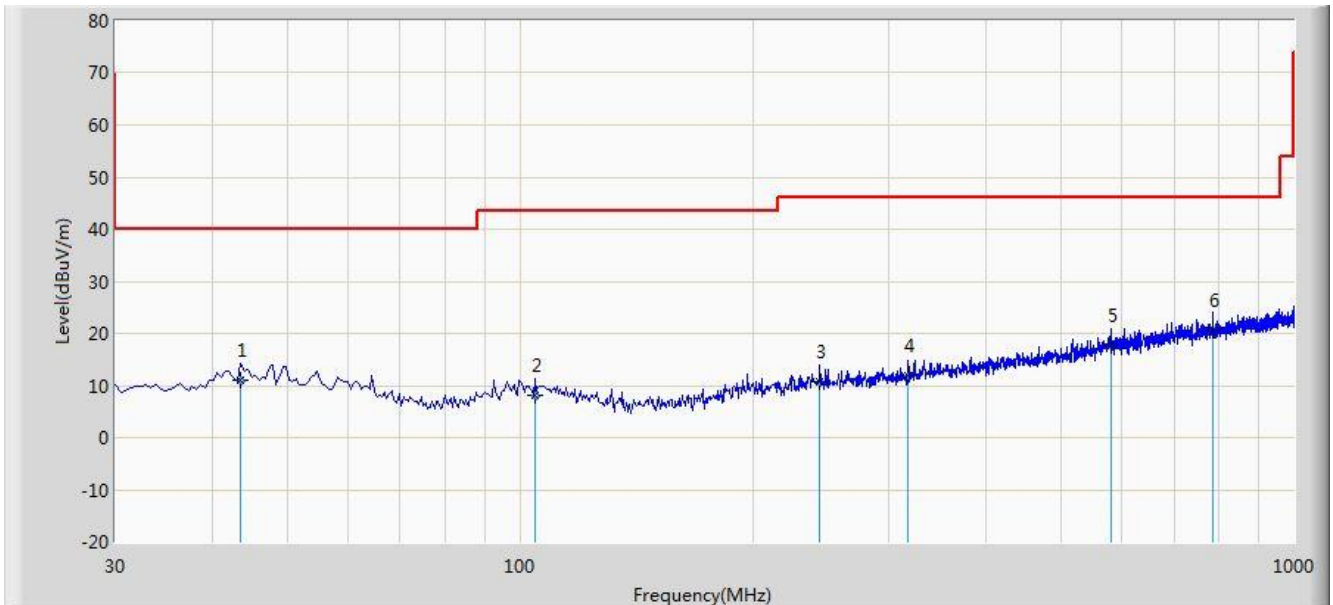


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			43.580	11.134	-3.421	-28.866	40.000	14.555	QP
2			104.690	8.004	-5.109	-35.496	43.500	13.113	QP
3			243.885	10.865	-2.672	-35.135	46.000	13.537	QP
4			317.605	12.020	-3.001	-33.980	46.000	15.021	QP
5			579.990	17.692	-2.081	-28.308	46.000	19.773	QP
6		*	785.145	20.670	-2.013	-25.330	46.000	22.684	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/07/09 - 15:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: E-reader	Power: By Battery
<b>Note: There is the ambient noise within frequency range 9kHz~30MHz.</b>	

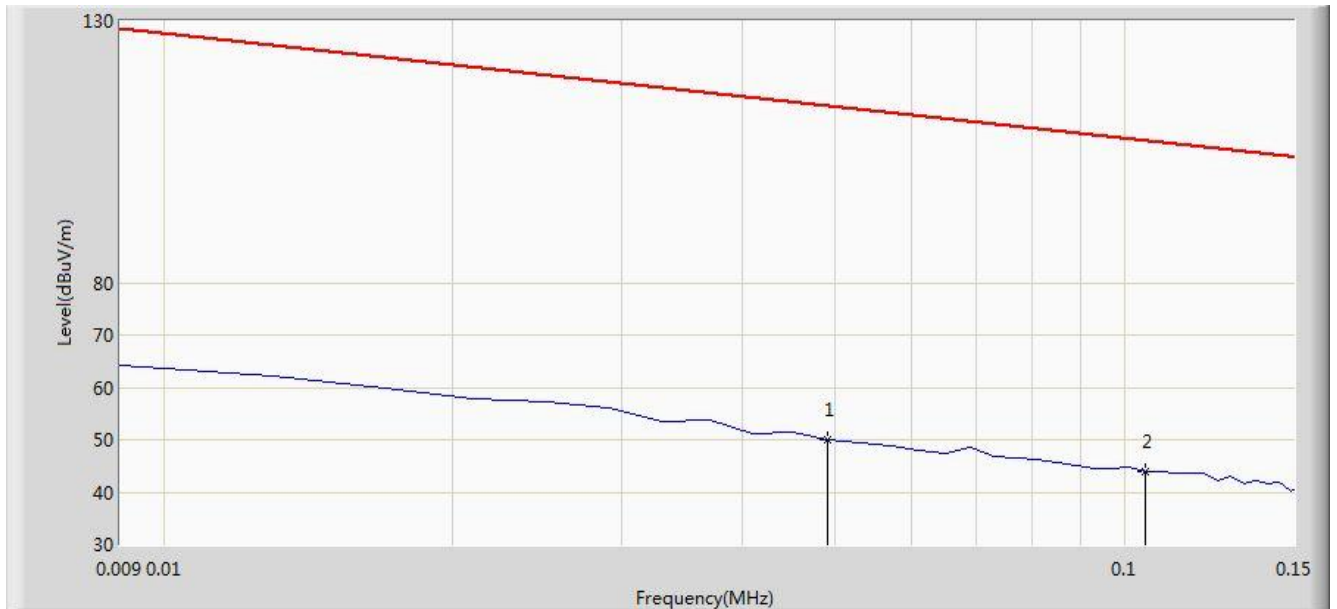


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.049	50.112	29.552	-63.688	113.800	20.560	AV
2		*	0.105	44.043	23.845	-63.137	107.180	20.198	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Limit@3m =  $20 \cdot \log((2400/49) \mu\text{V/m}) + 40 \cdot \log(300\text{m}/3\text{m}) = 113.800 \text{dB}\mu\text{V/m}$  (Average detector)

Site: AC2	Time: 2016/07/09 - 15:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: E-reader	Power: By Battery
<b>Note: There is the ambient noise within frequency range 9kHz~30MHz.</b>	

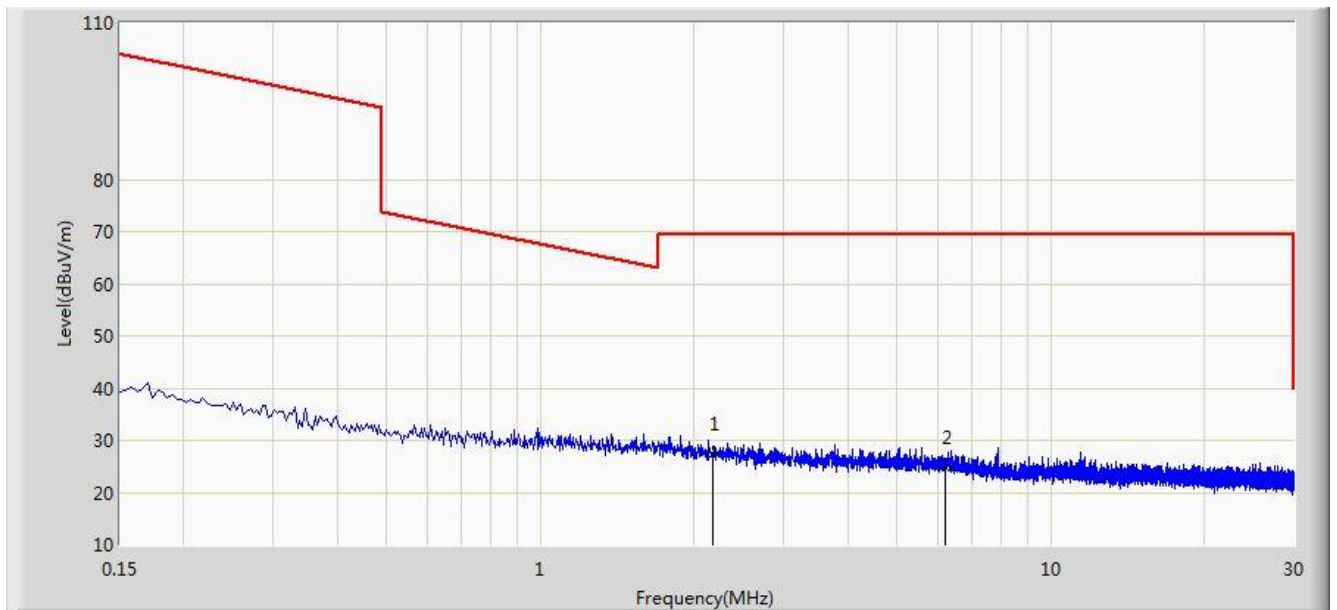


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2.175	27.371	6.960	-42.129	69.500	20.412	QP
2			6.216	24.786	4.701	-44.714	69.500	20.085	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Limit@3m =  $20 \cdot \log(30 \mu\text{V/m}) + 20 \cdot \log(30\text{m}/3\text{m}) = 49.5 \text{ dB}\mu\text{V/m}$  (Average detector), and  $69.5 \text{ dB}\mu\text{V/m}$  (Quasi-Peak detector).

Site: AC2	Time: 2016/07/09 - 15:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
<b>Note: There is the ambient noise within frequency range 18GHz~25GHz.</b>	

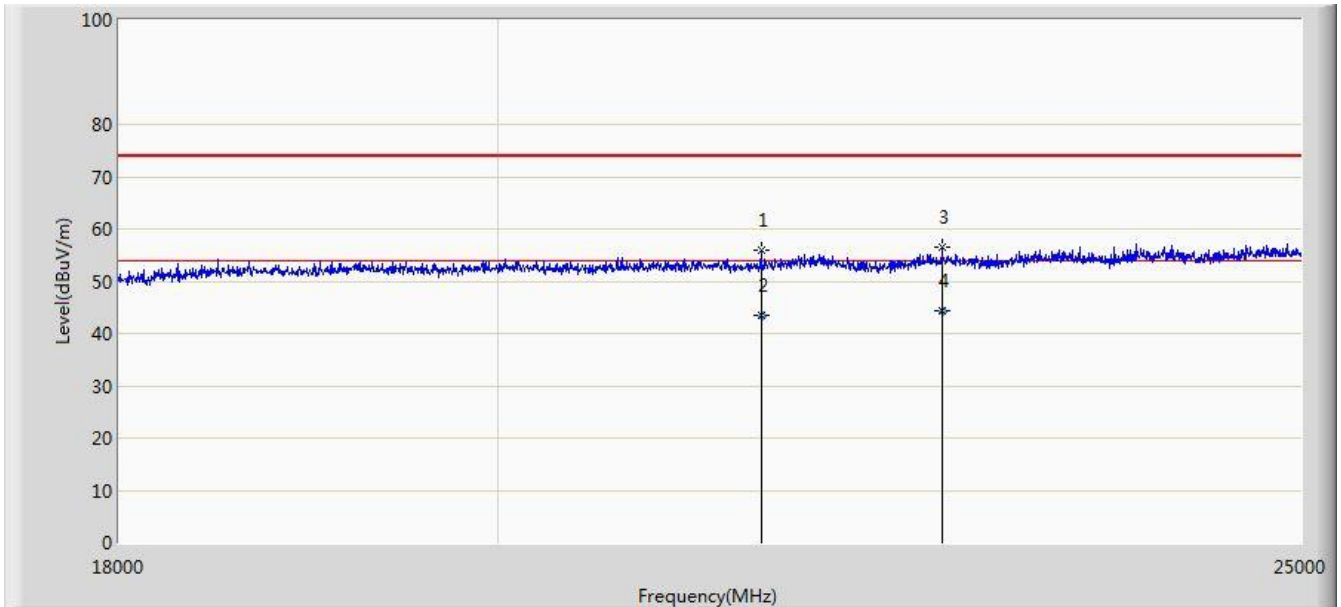


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			21517.500	55.869	17.883	-18.131	74.000	37.986	PK
2			21517.650	43.351	5.365	-10.649	54.000	37.986	AV
3			22630.500	56.509	18.223	-17.491	74.000	38.286	PK
4		*	22630.540	44.310	6.024	-9.690	54.000	38.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/07/09 - 15:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
<b>Note: There is the ambient noise within frequency range 18GHz~25GHz.</b>	

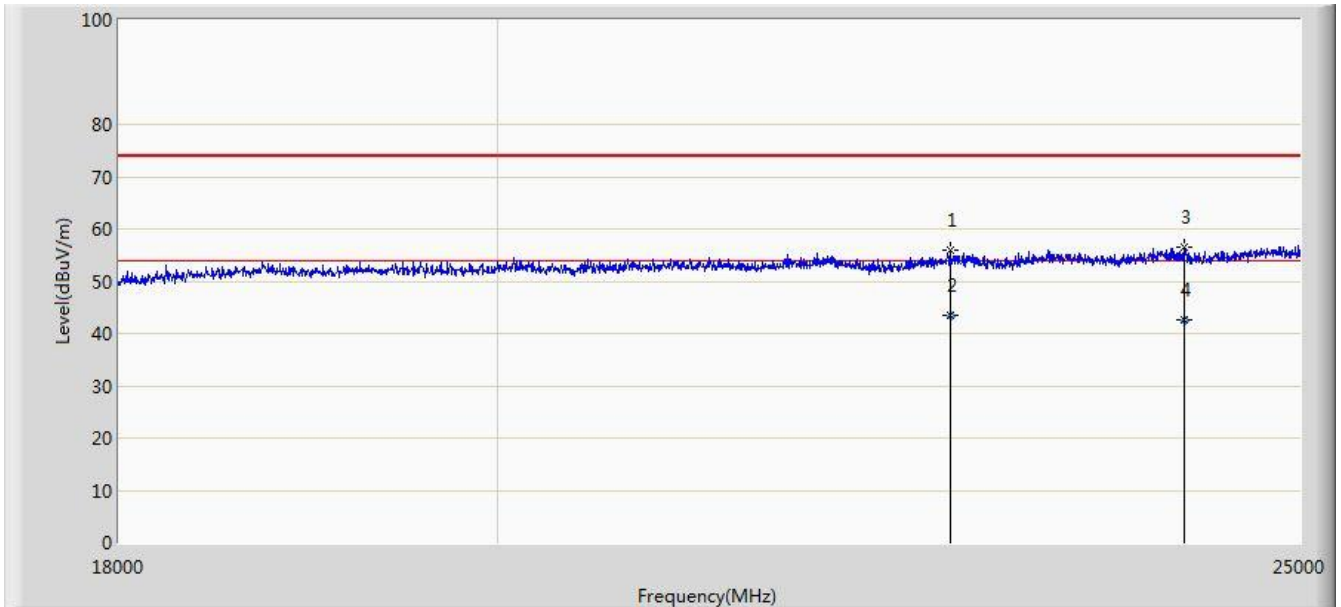

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			22686.500	55.811	17.457	-18.189	74.000	38.354	PK
2			22686.540	43.598	5.244	-10.402	54.000	38.354	AV
3			24205.500	56.430	17.607	-17.570	74.000	38.823	PK
4		*	24205.658	42.518	3.695	-11.482	54.000	38.823	AV


Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Result

Site: AC2	Time: 2016/06/30 - 18:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11g at channel 2412MHz	

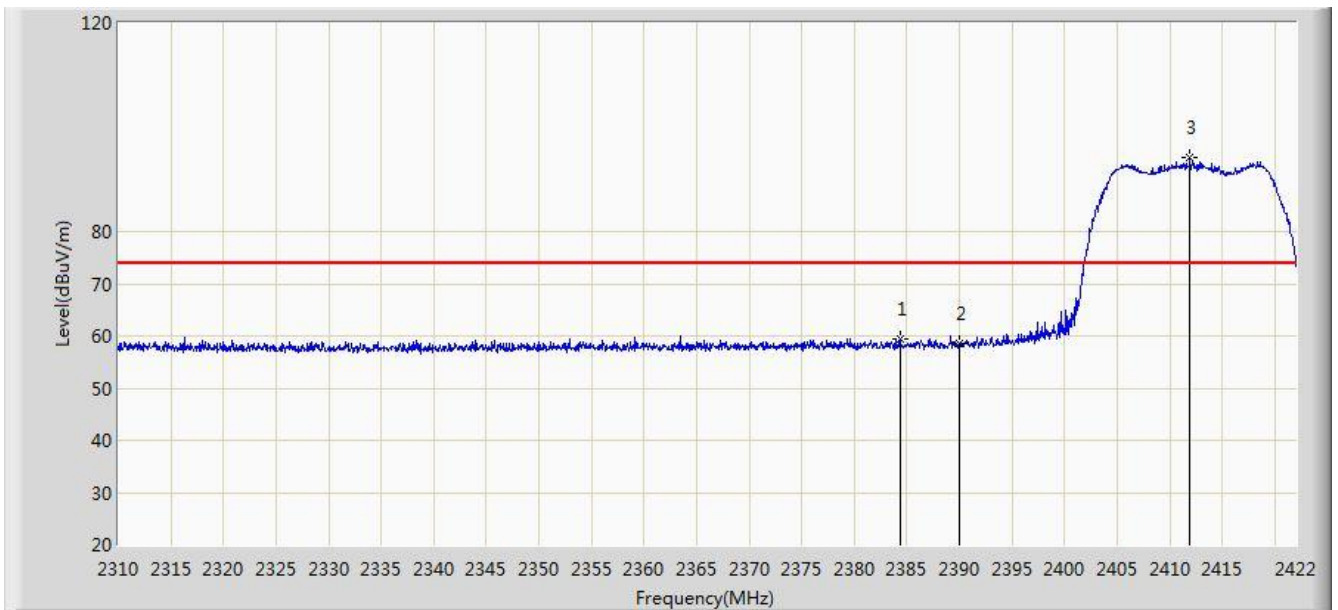


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.368	59.327	27.080	-14.673	74.000	32.246	PK
2			2390.000	58.485	26.207	-15.515	74.000	32.278	PK
3		*	2411.920	94.117	61.877	N/A	N/A	32.240	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/06/30 - 18:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11g at channel 2412MHz	

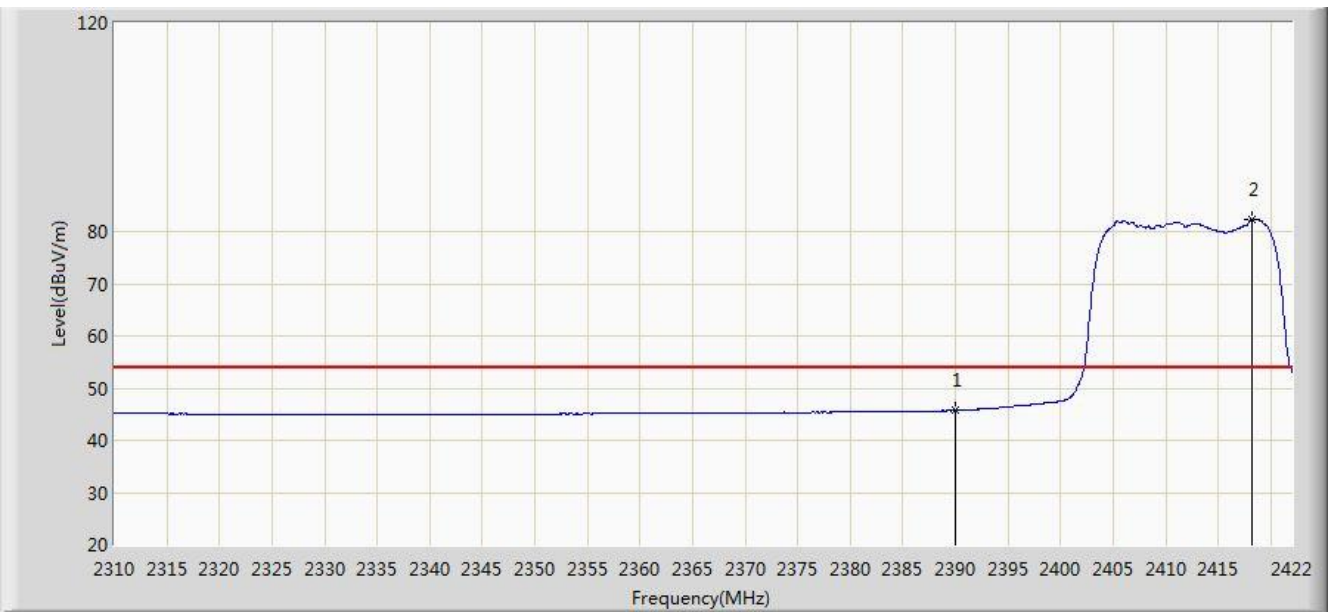


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.729	13.451	-8.271	54.000	32.278	AV
2		*	2418.192	82.282	50.068	N/A	N/A	32.214	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/06/30 - 18:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11g at channel 2412MHz	

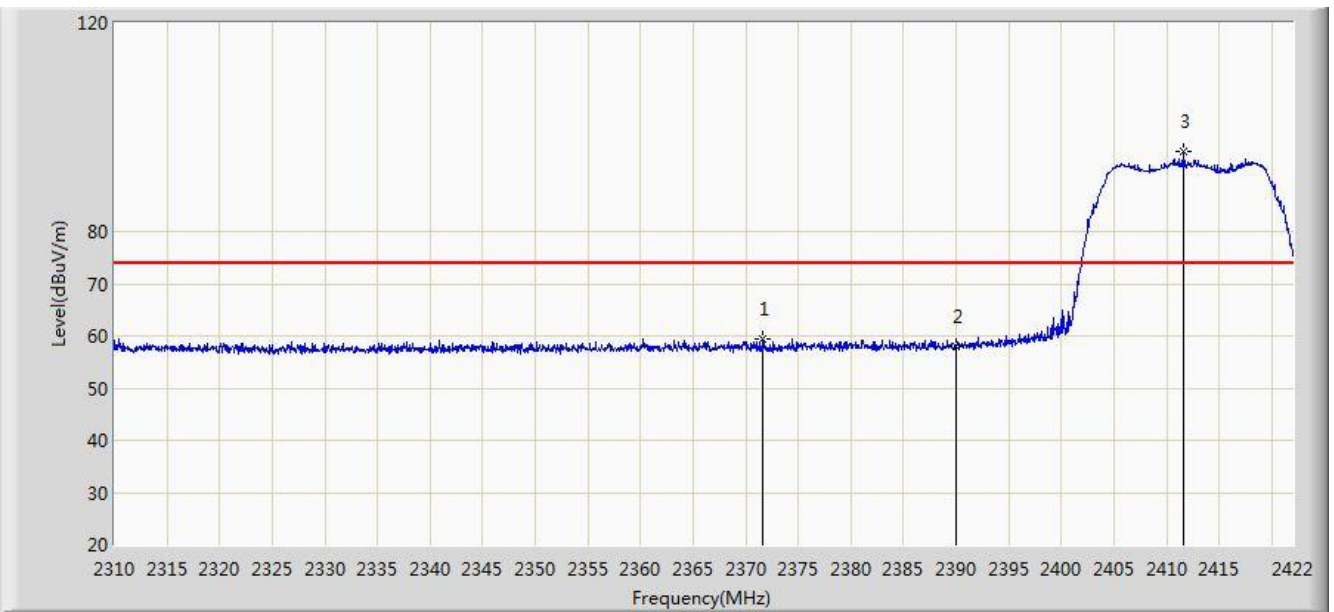


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2371.600	59.307	27.087	-14.693	74.000	32.220	PK
2			2390.000	58.008	25.730	-15.992	74.000	32.278	PK
3		*	2411.640	95.264	63.023	N/A	N/A	32.241	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC2	Time: 2016/06/30 - 18:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11g at channel 2412MHz	

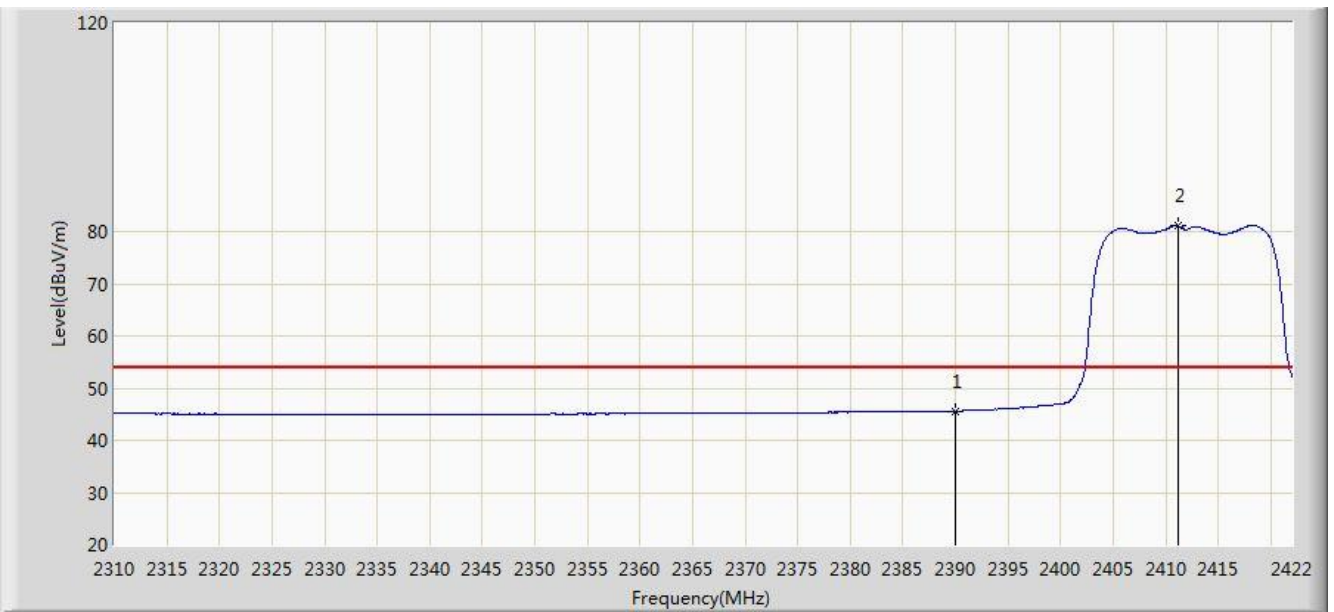


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.597	13.319	-8.403	54.000	32.278	AV
2		*	2411.136	81.093	48.850	N/A	N/A	32.243	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/06/30 - 19:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11n-HT20 at channel 2462MHz	

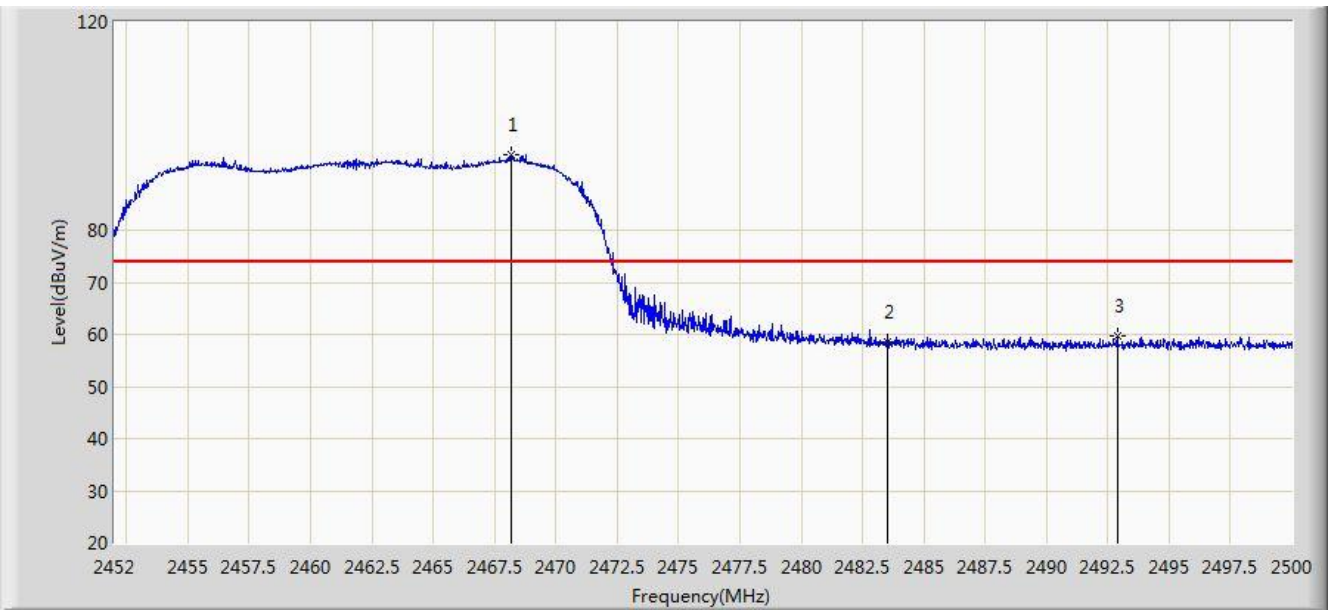


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.152	94.535	62.288	N/A	N/A	32.247	PK
2			2483.500	58.516	26.235	-15.484	74.000	32.282	PK
3			2492.896	59.624	27.310	-14.376	74.000	32.314	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/06/30 - 19:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11n-HT20 at channel 2462MHz	

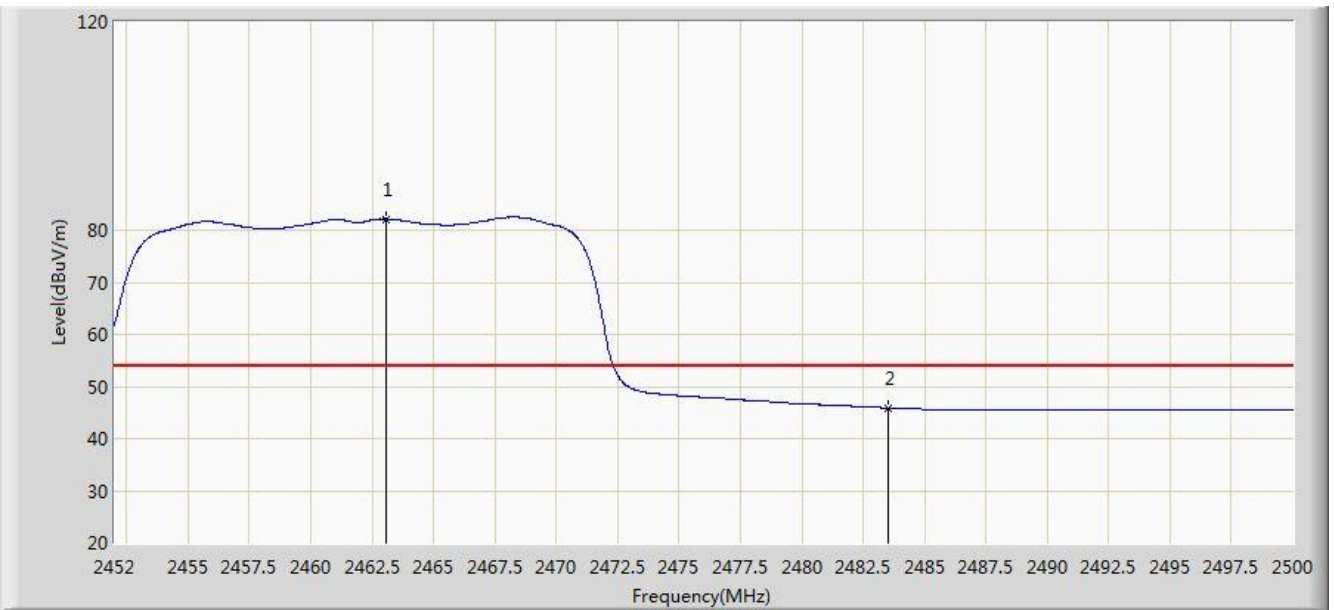


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.088	82.131	49.892	N/A	N/A	32.239	AV
2			2483.500	45.911	13.630	-8.089	54.000	32.282	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/06/30 - 19:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11n-HT20 at channel 2462MHz	

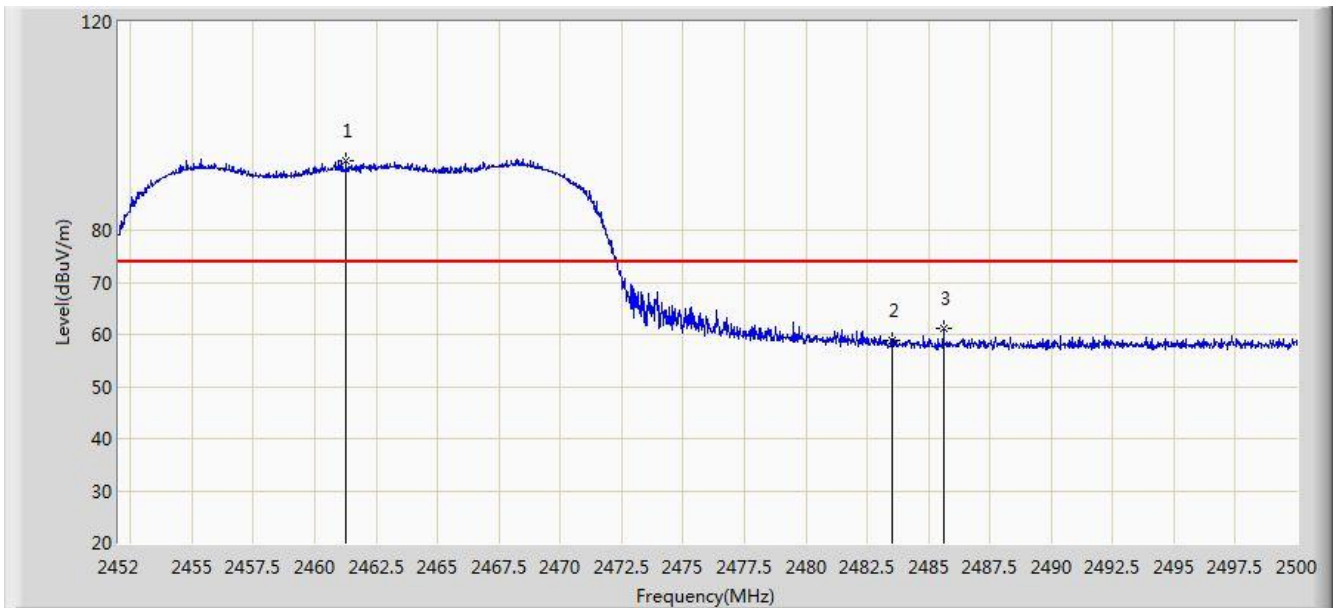


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.264	93.278	61.043	N/A	N/A	32.235	PK
2			2483.500	58.794	26.513	-15.206	74.000	32.282	PK
3			2485.600	61.059	28.771	-12.941	74.000	32.288	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/06/30 - 19:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11n-HT20 at channel 2462MHz	

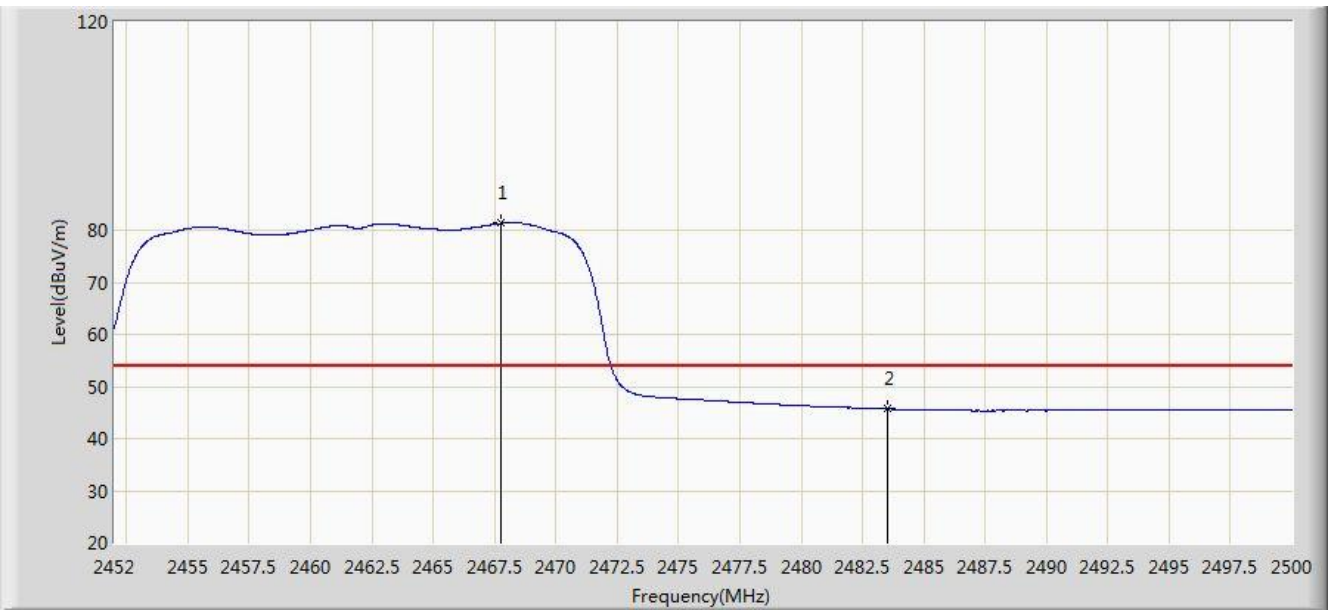

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.768	81.340	49.094	N/A	N/A	32.246	AV
2			2483.500	45.731	13.450	-8.269	54.000	32.282	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

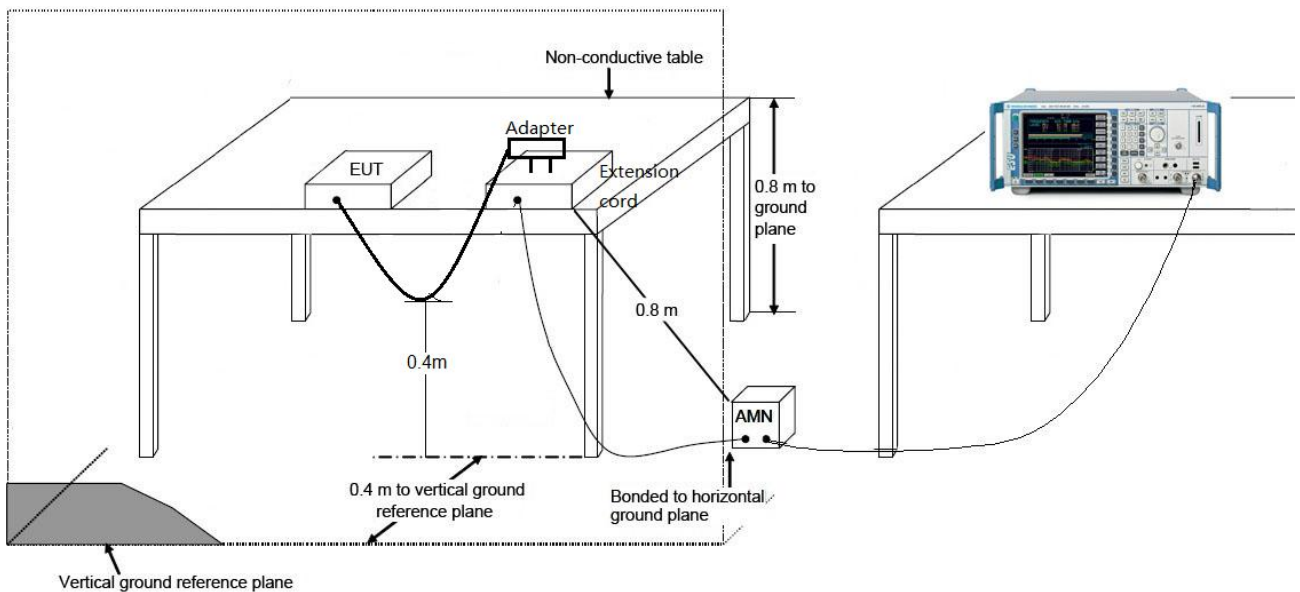

### 7.8.3. Test Result

Site: SR2	Time: 2016/06/21 - 11:50
Limit: FCC_Part15.207_CE_AC Power	Engineer: Line Chen
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: E-reader	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by 802.11g at channel 2412MHz	

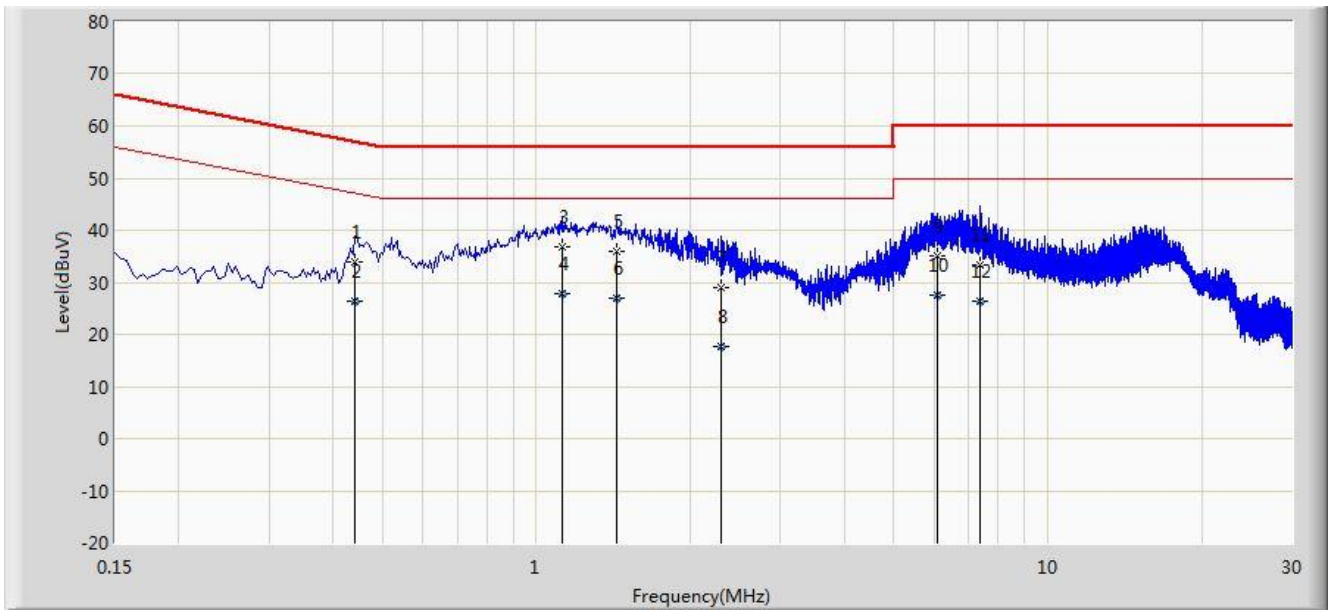


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.442	33.825	23.706	-23.199	57.024	10.120	QP
2			0.442	26.487	16.368	-20.537	47.024	10.120	AV
3			1.122	36.943	27.039	-19.057	56.000	9.904	QP
4		*	1.122	27.856	17.952	-18.144	46.000	9.904	AV
5			1.436	35.829	25.937	-20.171	56.000	9.891	QP
6			1.436	26.913	17.022	-19.087	46.000	9.891	AV
7			2.298	29.061	19.198	-26.939	56.000	9.863	QP
8			2.298	17.672	7.809	-28.328	46.000	9.863	AV
9			6.076	35.207	25.089	-24.793	60.000	10.118	QP
10			6.076	27.464	17.346	-22.536	50.000	10.118	AV
11			7.374	33.423	23.256	-26.577	60.000	10.167	QP
12			7.374	26.340	16.173	-23.660	50.000	10.167	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2016/06/21 - 11:58
Limit: FCC_Part15.207_CE_AC Power	Engineer: Line Chen
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: E-reader	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by 802.11g at channel 2412MHz	

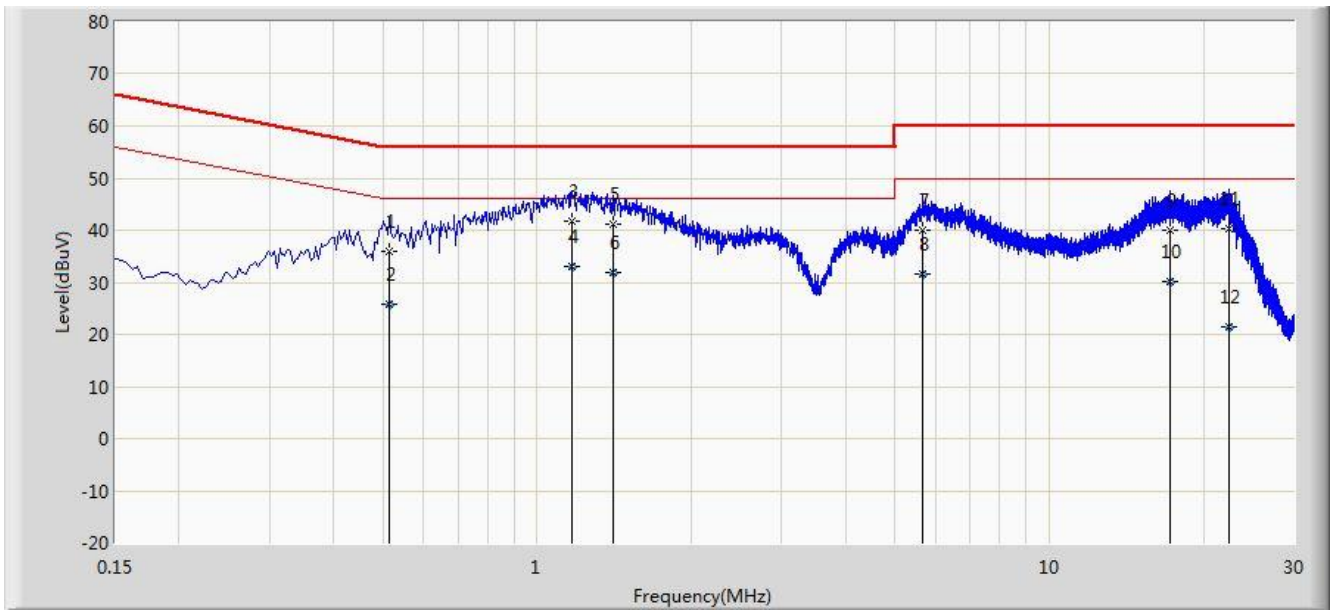

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.514	35.987	25.811	-20.013	56.000	10.176	QP
2			0.514	25.671	15.495	-20.329	46.000	10.176	AV
3			1.166	41.777	31.873	-14.223	56.000	9.903	QP
4		*	1.166	33.090	23.187	-12.910	46.000	9.903	AV
5			1.410	41.091	31.198	-14.909	56.000	9.893	QP
6			1.410	32.021	22.128	-13.979	46.000	9.893	AV
7			5.638	39.956	29.857	-20.044	60.000	10.099	QP
8			5.638	31.458	21.359	-18.542	50.000	10.099	AV
9			17.182	40.136	30.004	-19.864	60.000	10.132	QP
10			17.182	30.254	20.122	-19.746	50.000	10.132	AV
11			22.370	40.414	30.201	-19.586	60.000	10.213	QP
12			22.370	21.372	11.159	-28.628	50.000	10.213	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)



## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **E-reader FCC ID: XR3-KEPLER** is in compliance with Part 15C of the FCC Rules.

\_\_\_\_\_ The End \_\_\_\_\_