



Appendix B

RF Test Data for BT (BLE) (Conducted Measurement)

Product Name: E Ink Tablet, Smart E Ink Tablet, ePaper Tablet, E-bag Tablet, E-book Tablet, E-reader Tablet, Eyes protection E Ink Tablet, E-paper Tablet, Color E Ink Tablet, Color ePaper Tablet, eBook reader

Trade Mark: BOOX

Test Model: Note Air4 C

Environmental Conditions

Temperature:	25.7°C
Relative Humidity:	52.3%
ATM Pressure:	101Kpa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung



Contents

	Page
COVER PAGE	
1 Duty Cycle.....	3
1.1 Test Result	3
1.2 Test Graphs.....	4
2 Maximum Conducted Output Power.....	6
2.1 Test Result	6
2.2 Test Graphs.....	7
3 -6dB Bandwidth.....	9
3.1 Test Result	9
3.2 Test Graphs.....	10
4 Maximum Power Spectral Density Level.....	12
4.1 Test Result	12
4.2 Test Graphs.....	13
5 Band Edge	15
5.1 Test Result	15
5.2 Test Graphs.....	16
6 Conducted RF Spurious Emission	18
6.1 Test Result	18
6.2 Test Graphs.....	19
7 Restrict Band	22
7.1 Test Result	22
7.2 Test Graphs.....	23





1 Duty Cycle

1.1 Test Result

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor	1/T (kHz)
BLE 1M	2402	64.67	1.89	2.56
BLE 1M	2440	64.65	1.89	2.56
BLE 1M	2480	64.06	1.93	2.56

1.2 Test Graphs

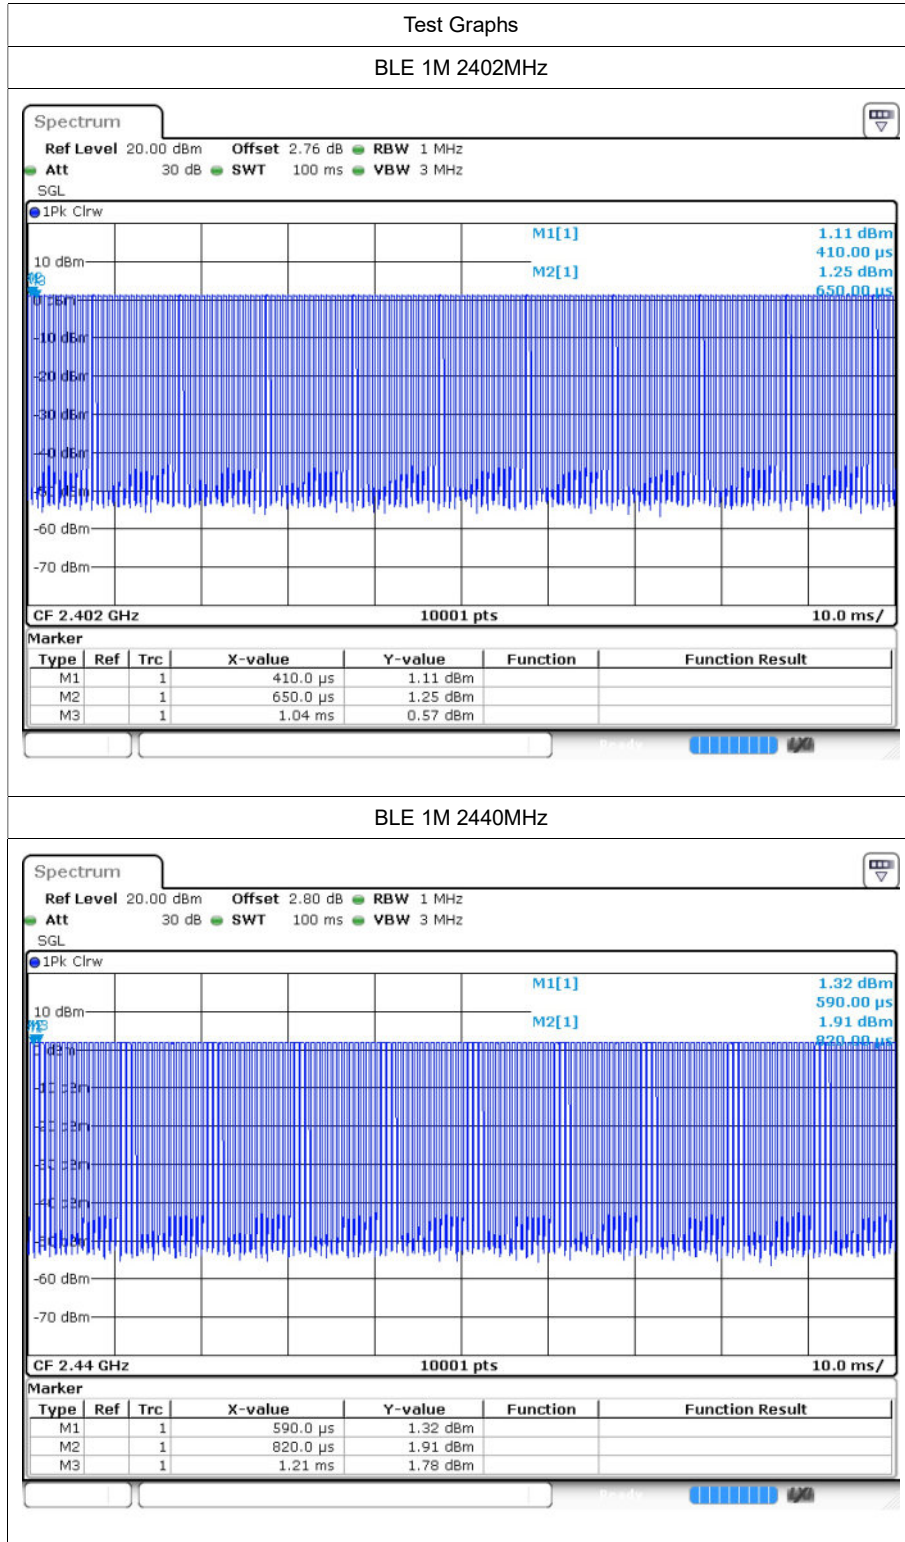

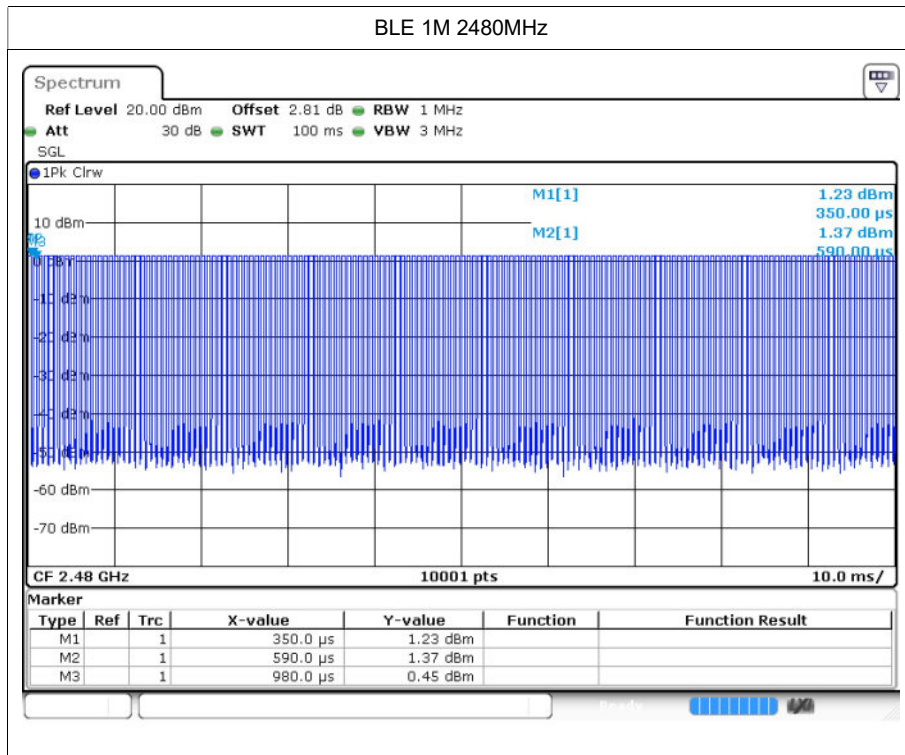





2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	1.29	30	Pass
BLE 1M	2440	1.93	30	Pass
BLE 1M	2480	1.37	30	Pass

2.2 Test Graphs

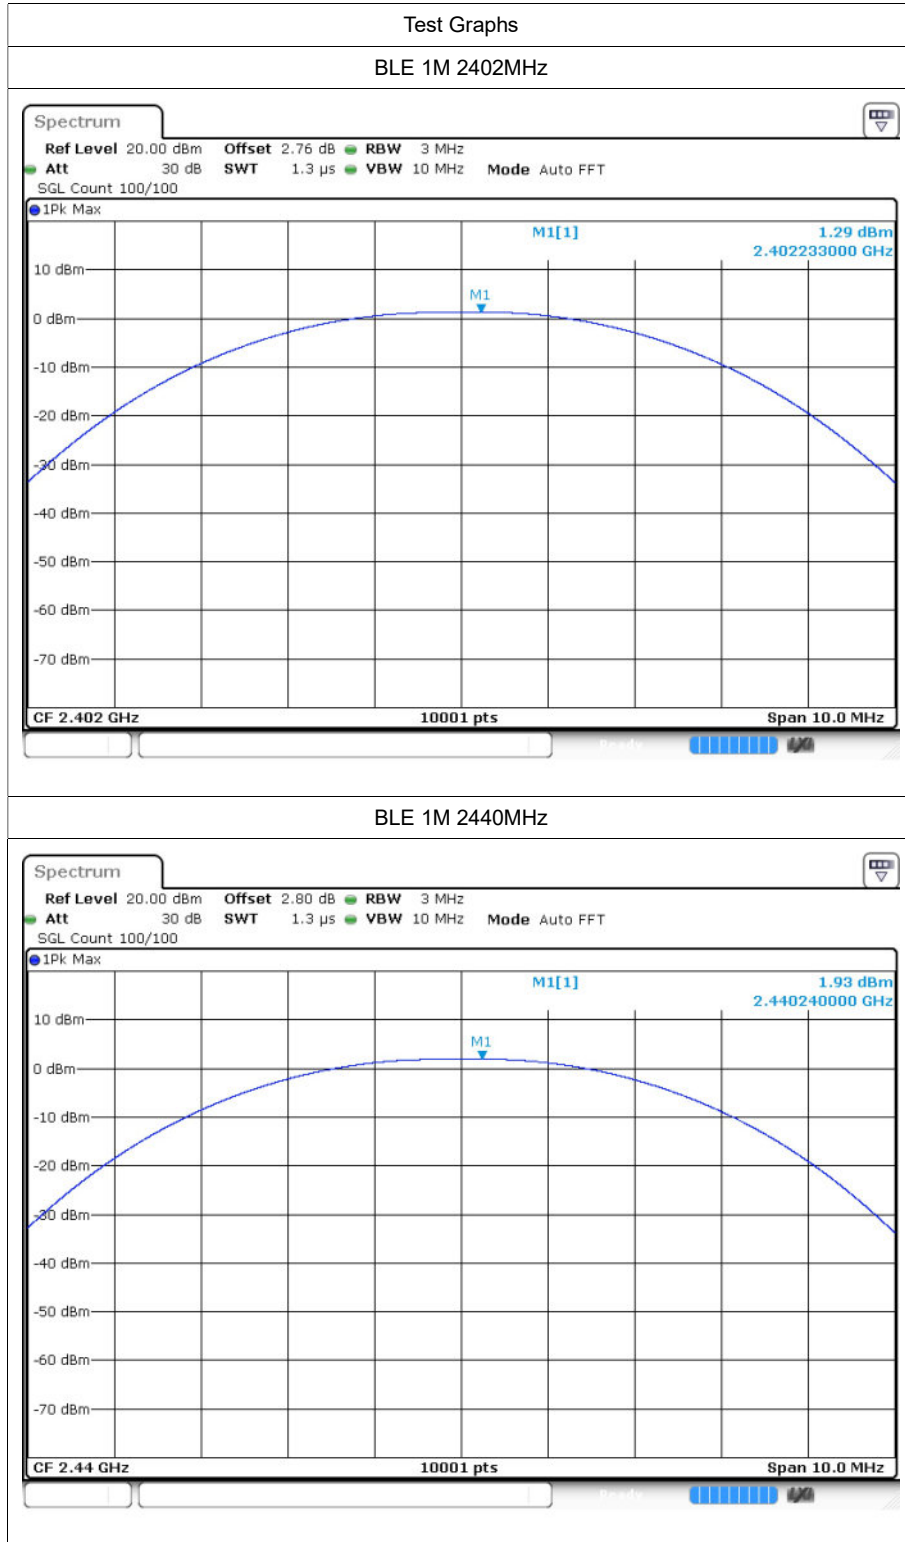

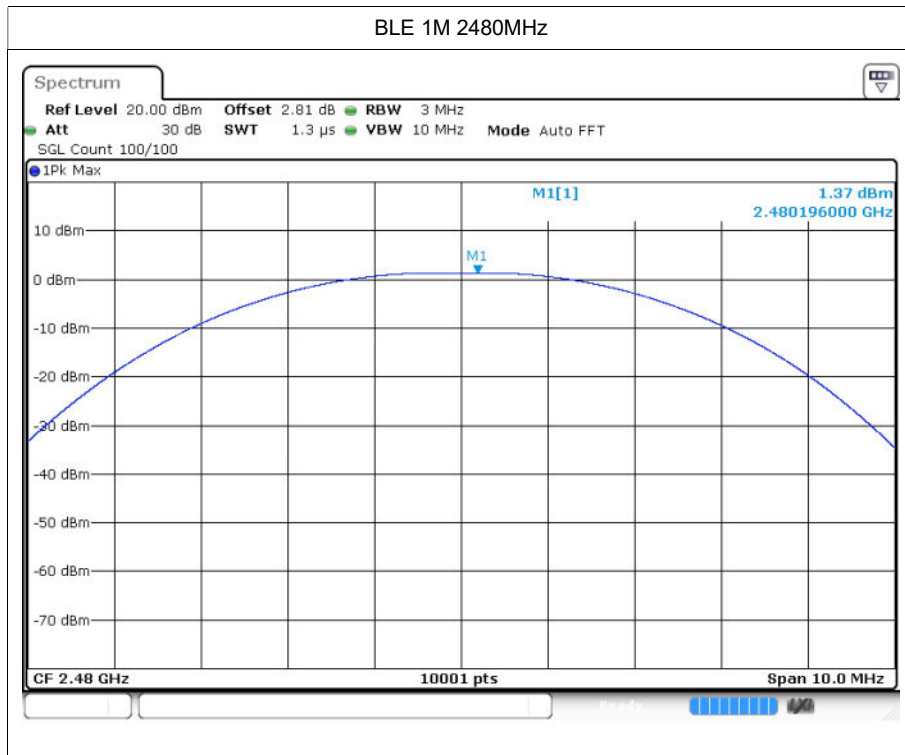





3 -6dB Bandwidth

3.1 Test Result

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.718	0.5	Pass
BLE 1M	2440	0.704	0.5	Pass
BLE 1M	2480	0.658	0.5	Pass

3.2 Test Graphs

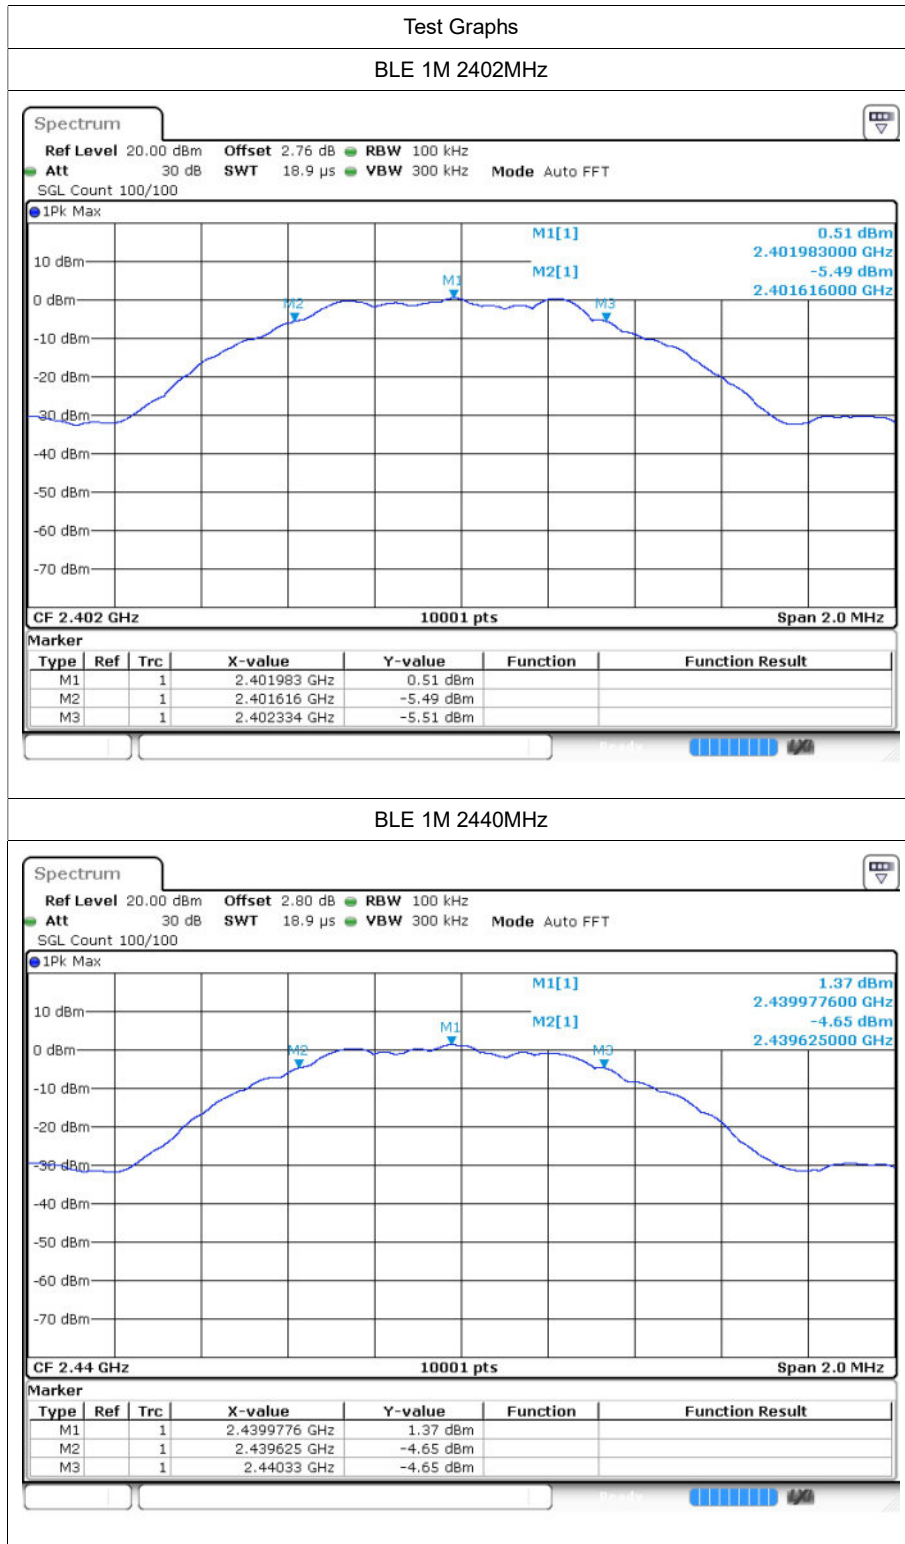

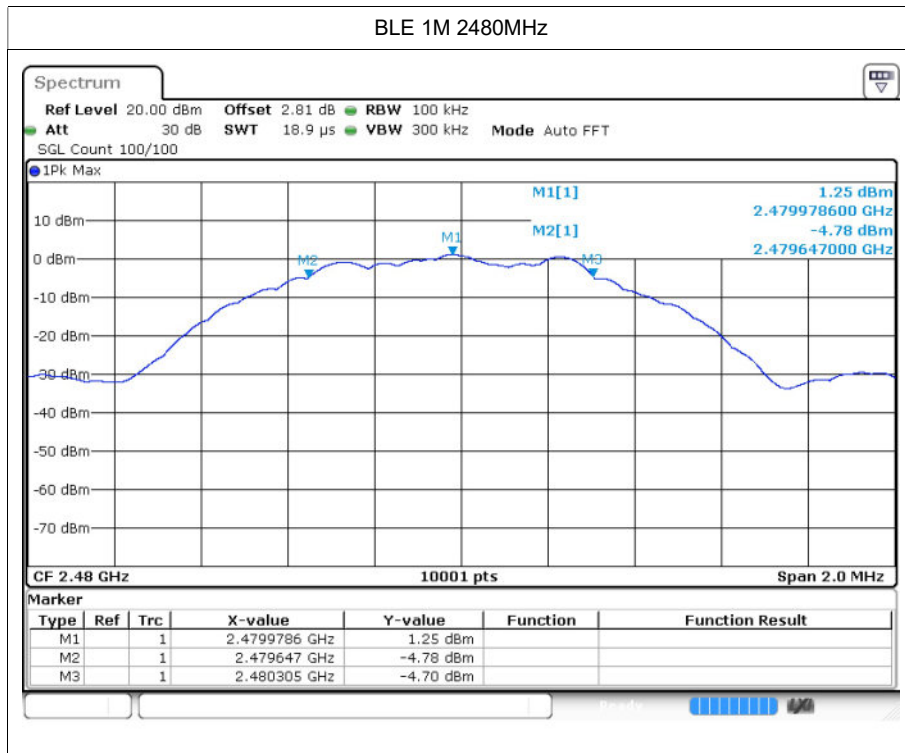



4 Maximum Power Spectral Density Level

4.1 Test Result

Mode	Frequency (MHz)	Conducted PSD (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-14.09	≤ 8	Pass
BLE 1M	2440	-13.62	≤ 8	Pass
BLE 1M	2480	-14.64	≤ 8	Pass

4.2 Test Graphs

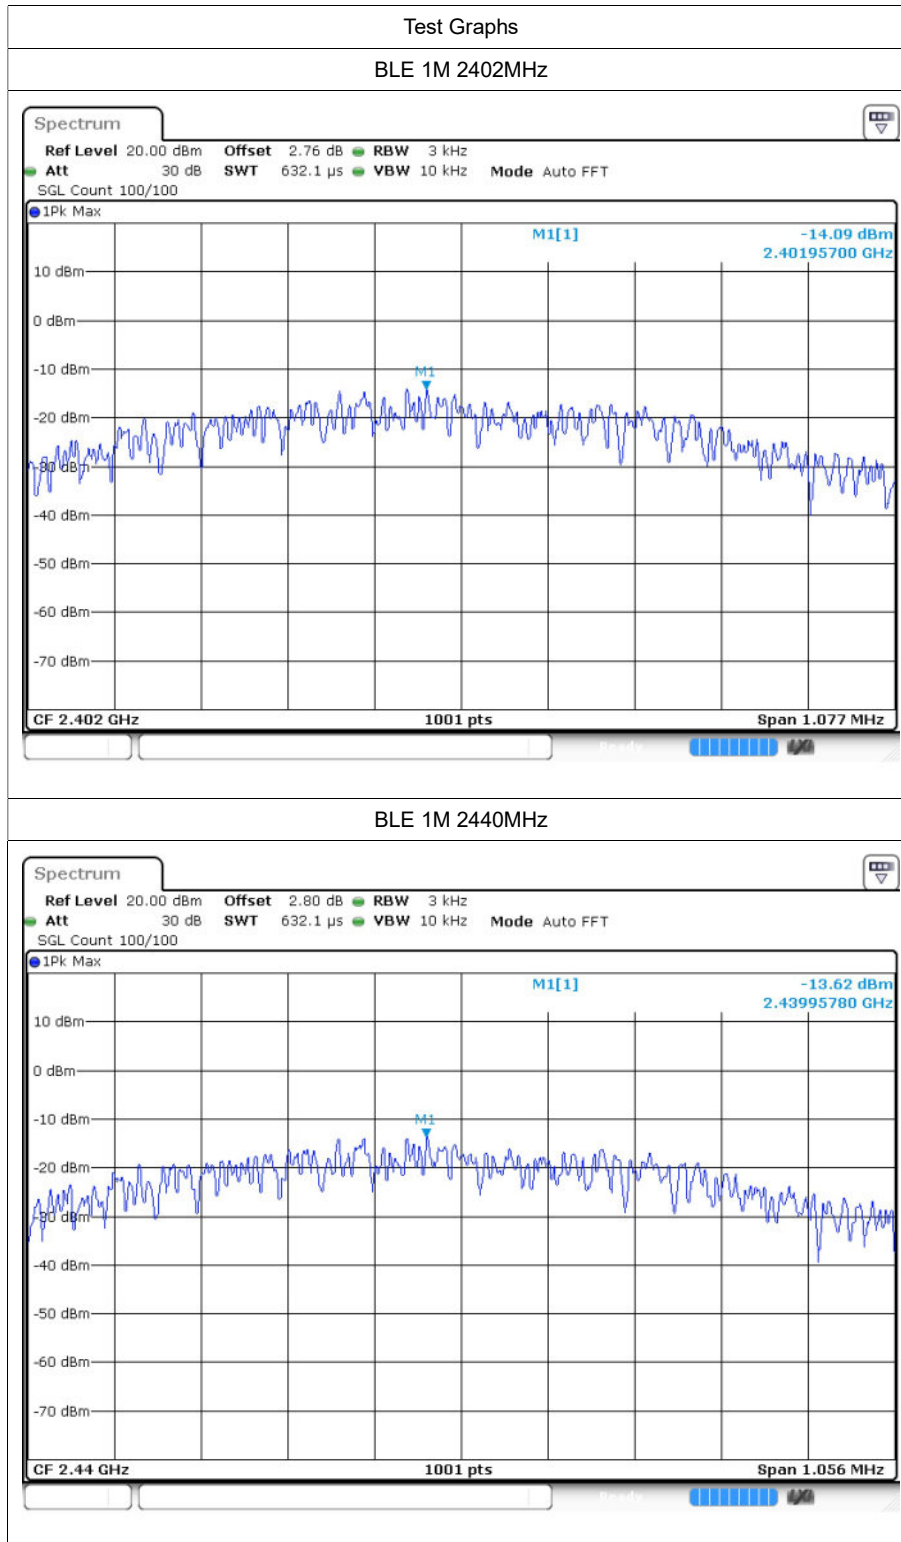

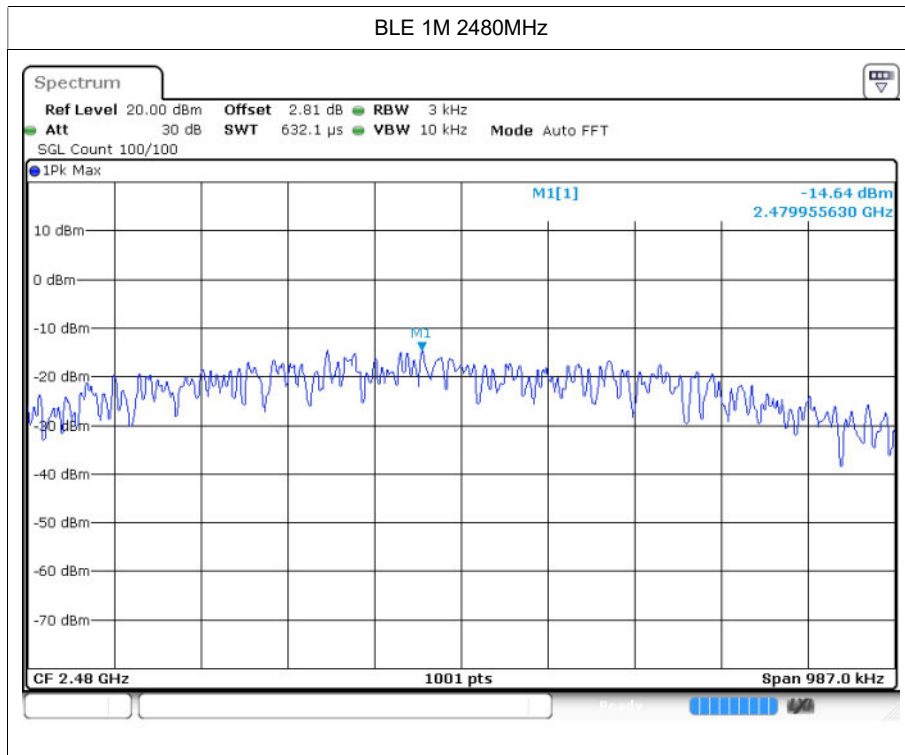





5 Band Edge

5.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-56.94	-20	Pass
BLE 1M	2480	-47.1	-20	Pass

5.2 Test Graphs

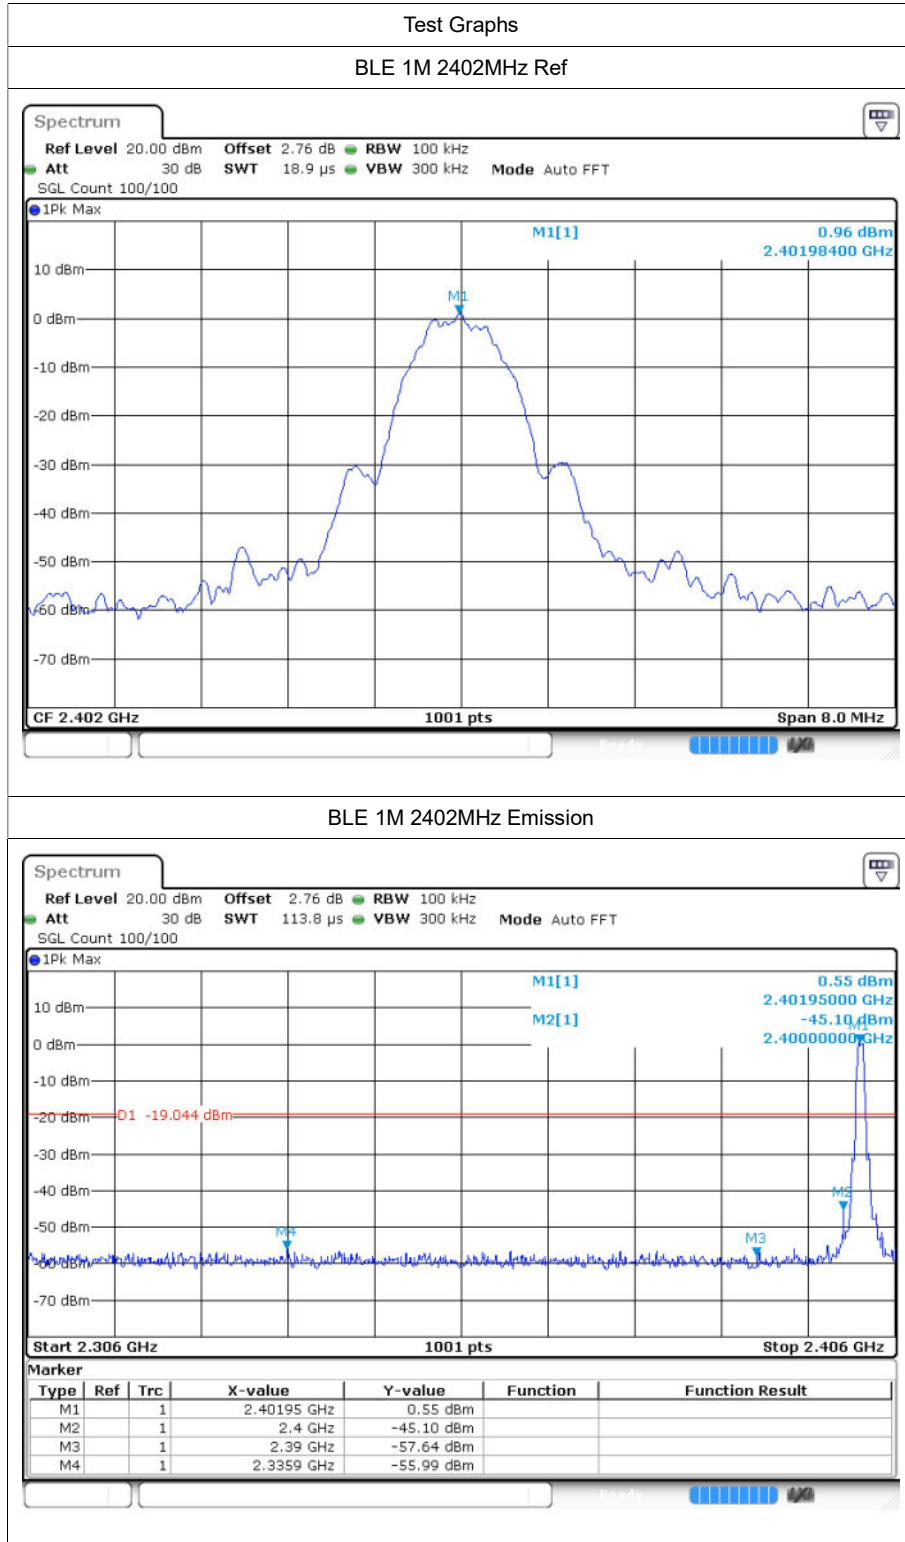

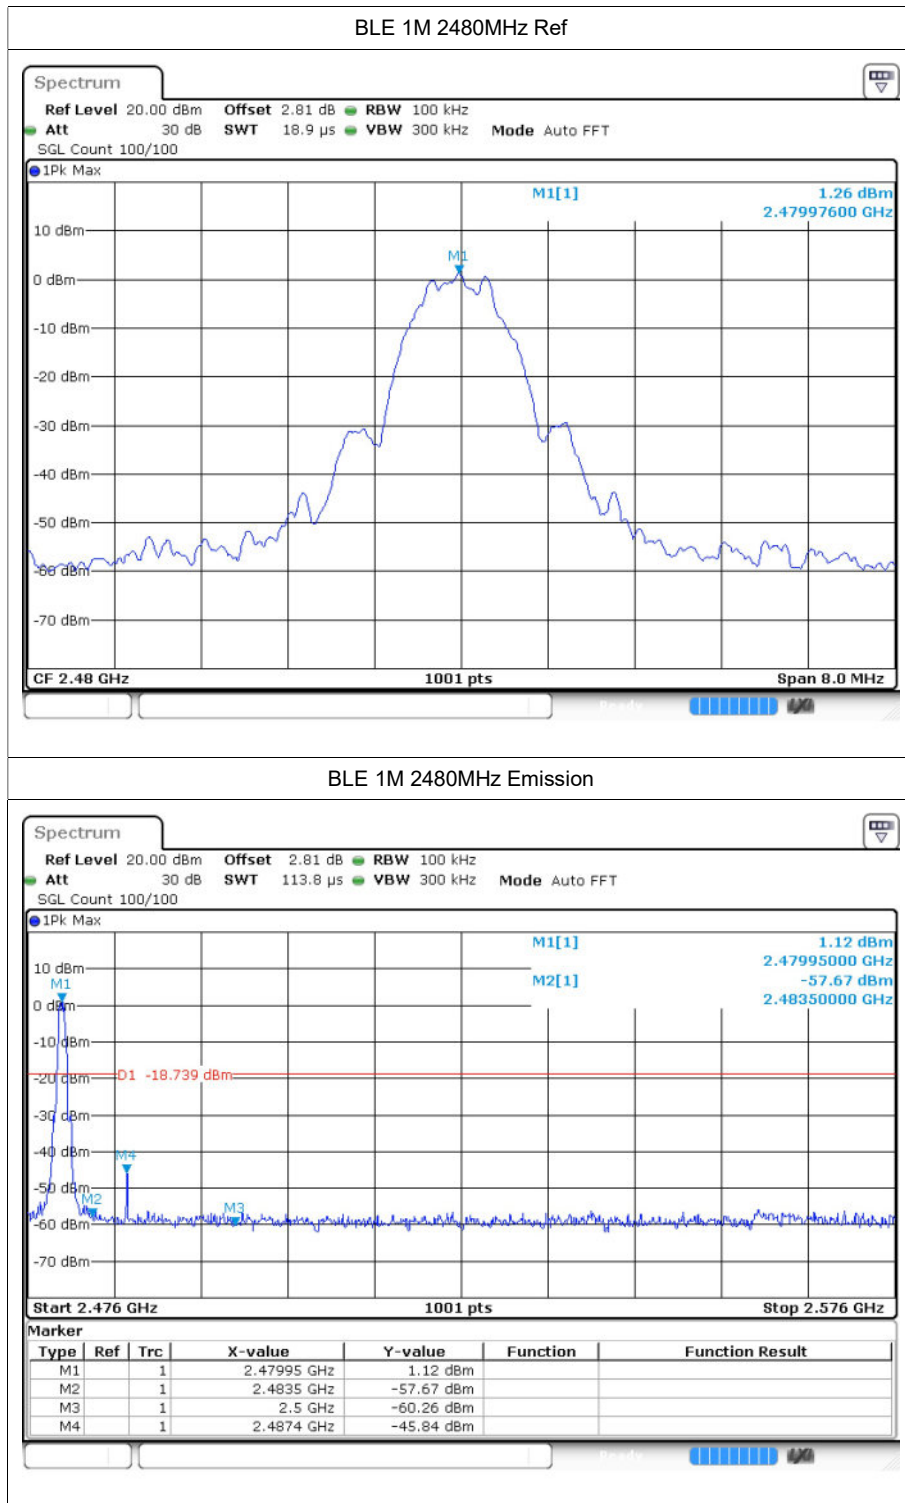






6 Conducted RF Spurious Emission



6.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-44.39	-20	Pass
BLE 1M	2440	-45.28	-20	Pass
BLE 1M	2480	-43.44	-20	Pass

6.2 Test Graphs

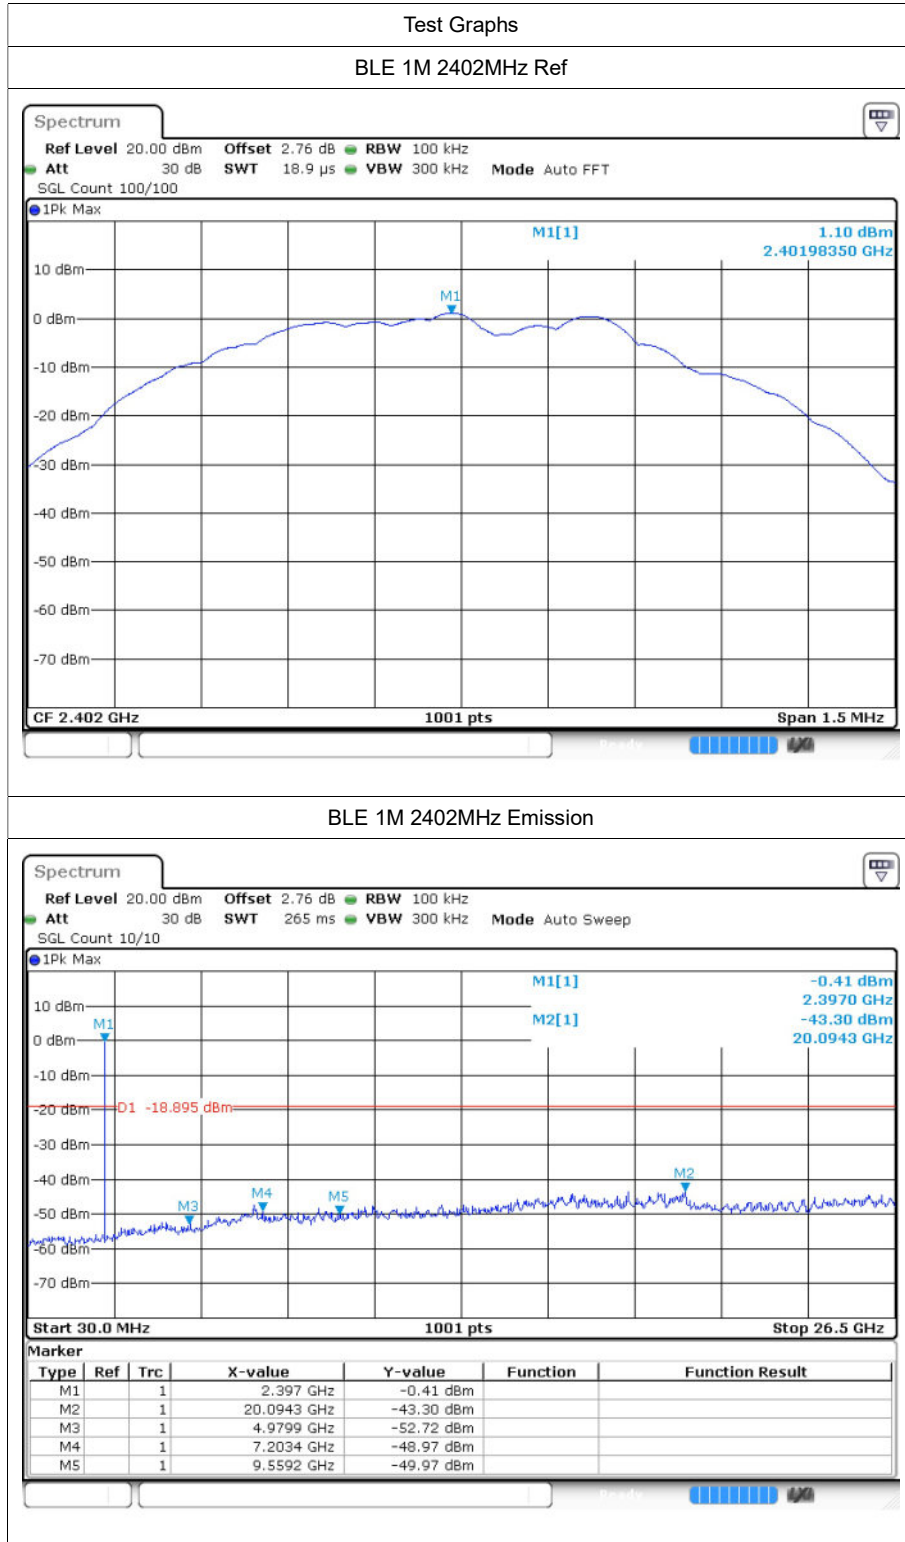

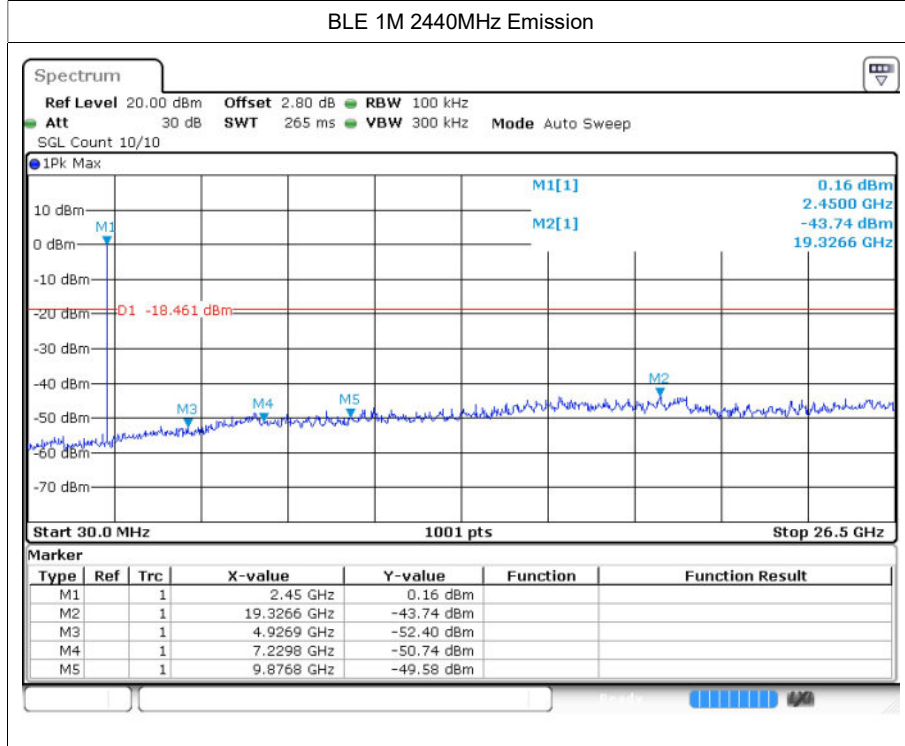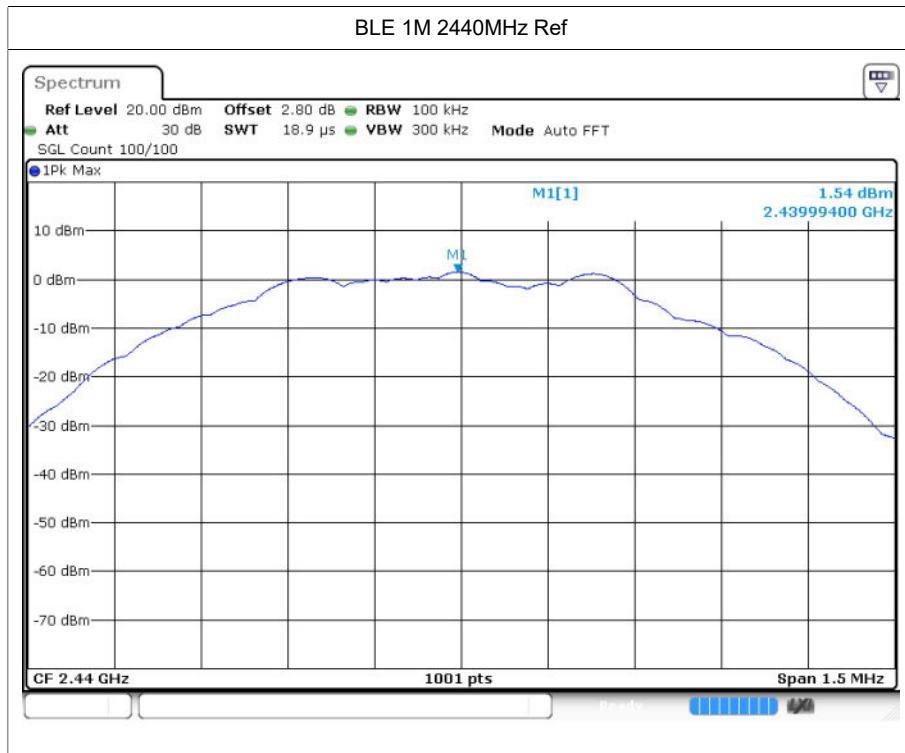

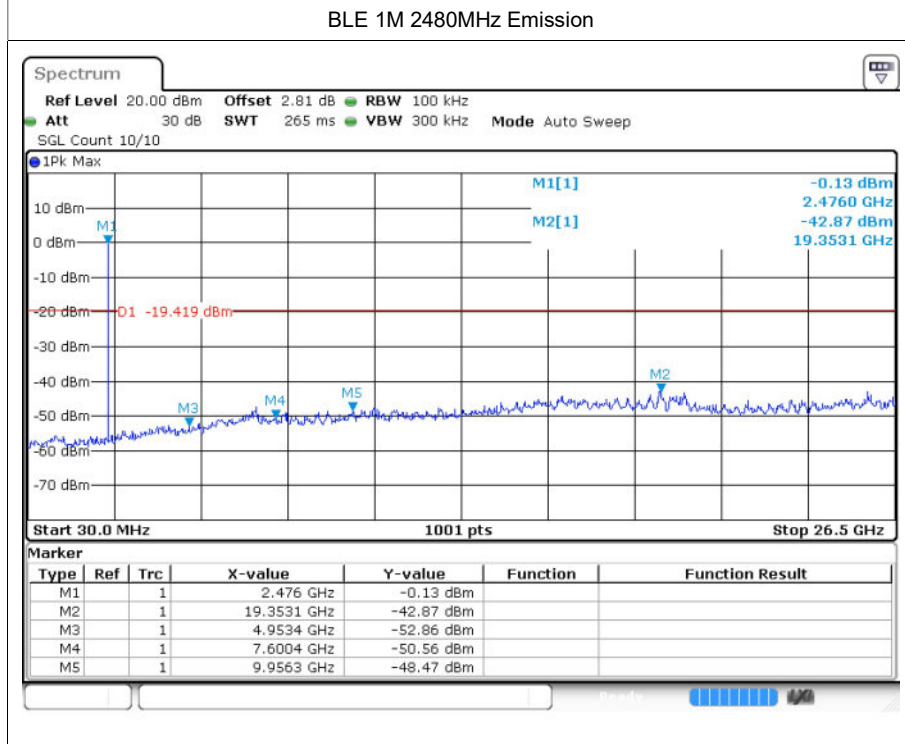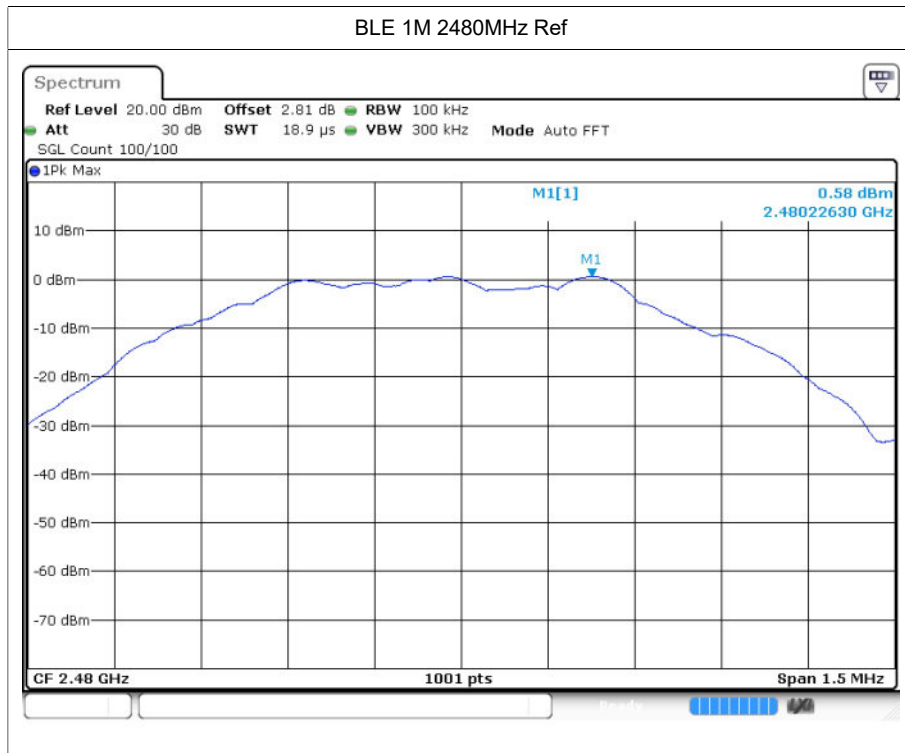






7 Restrict Band

7.1 Test Result

Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.6	2.5	-	48.13	Peak	74	Pass
BLE 1M	2402	2310	-56.52	2.5	1.89	43.10	Average	54	Pass
BLE 1M	2402	2340.24	-45.9	2.5	-	51.83	Peak	74	Pass
BLE 1M	2402	2341.968	-54.14	2.5	1.89	45.48	Average	54	Pass
BLE 1M	2402	2390	-48.7	2.5	-	49.03	Peak	74	Pass
BLE 1M	2402	2390	-56.89	2.5	1.89	42.73	Average	54	Pass
BLE 1M	2480	2483.5	-47.8	2.5	-	49.93	Peak	74	Pass
BLE 1M	2480	2483.5	-55.08	2.5	1.93	44.58	Average	54	Pass
BLE 1M	2480	2493.136	-46.43	2.5	-	51.30	Peak	74	Pass
BLE 1M	2480	2483.512	-55.09	2.5	1.93	44.57	Average	54	Pass
BLE 1M	2480	2500	-49.41	2.5	-	48.32	Peak	74	Pass
BLE 1M	2480	2500	-56.18	2.5	1.93	43.01	Average	54	Pass

7.2 Test Graphs

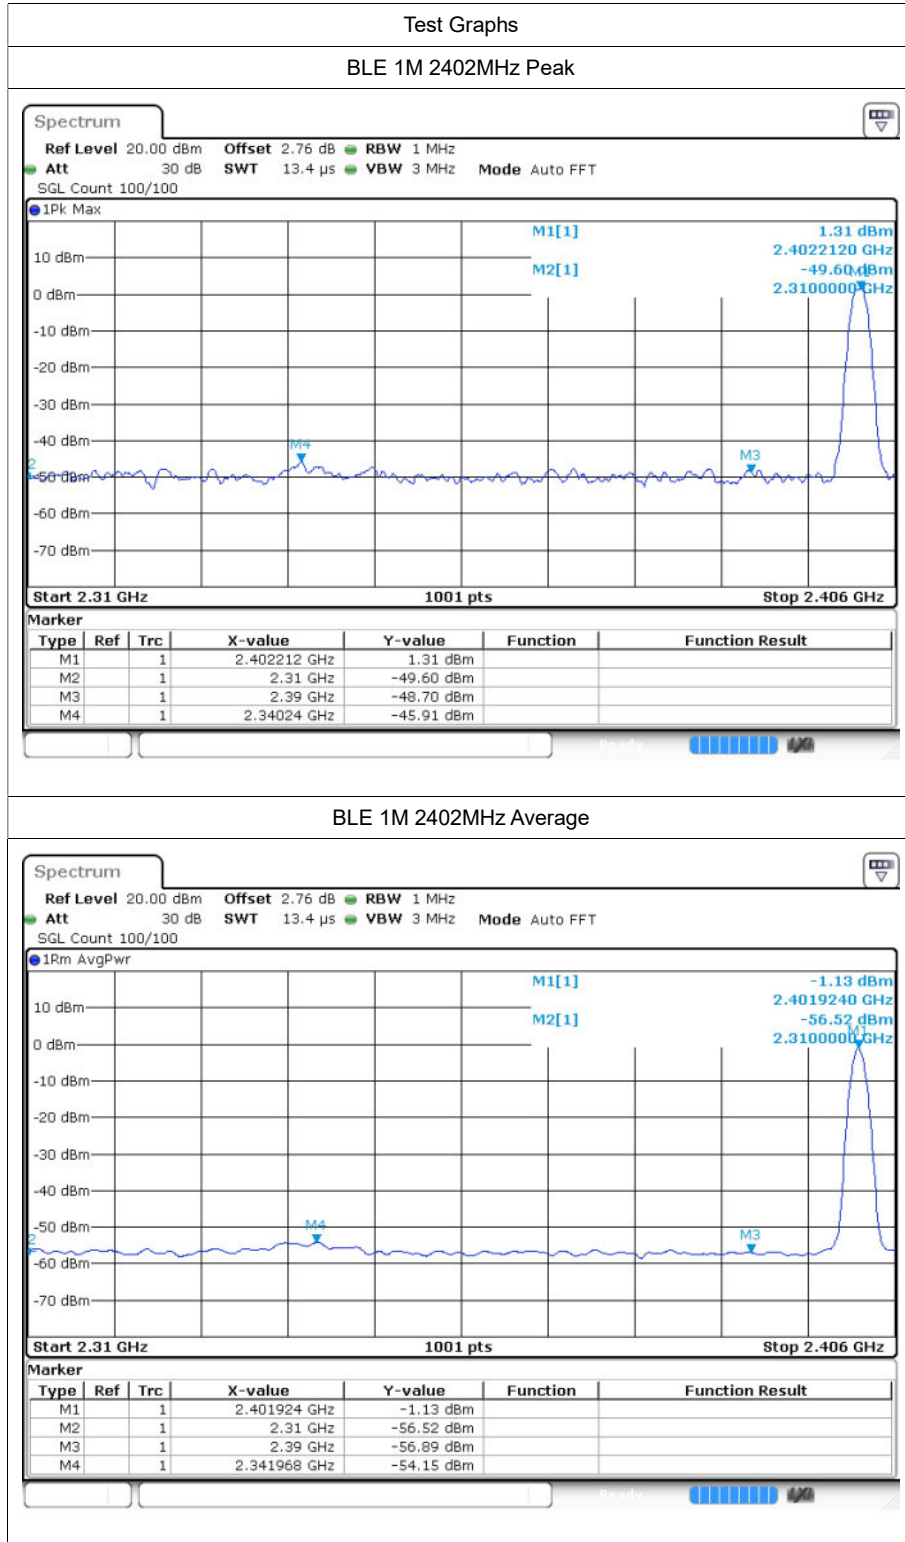

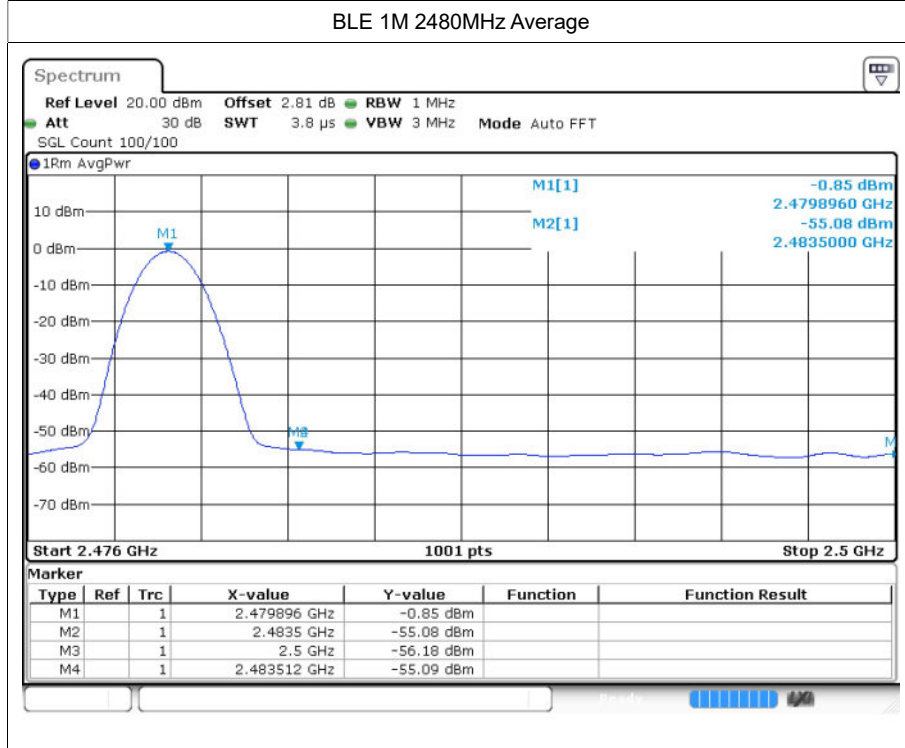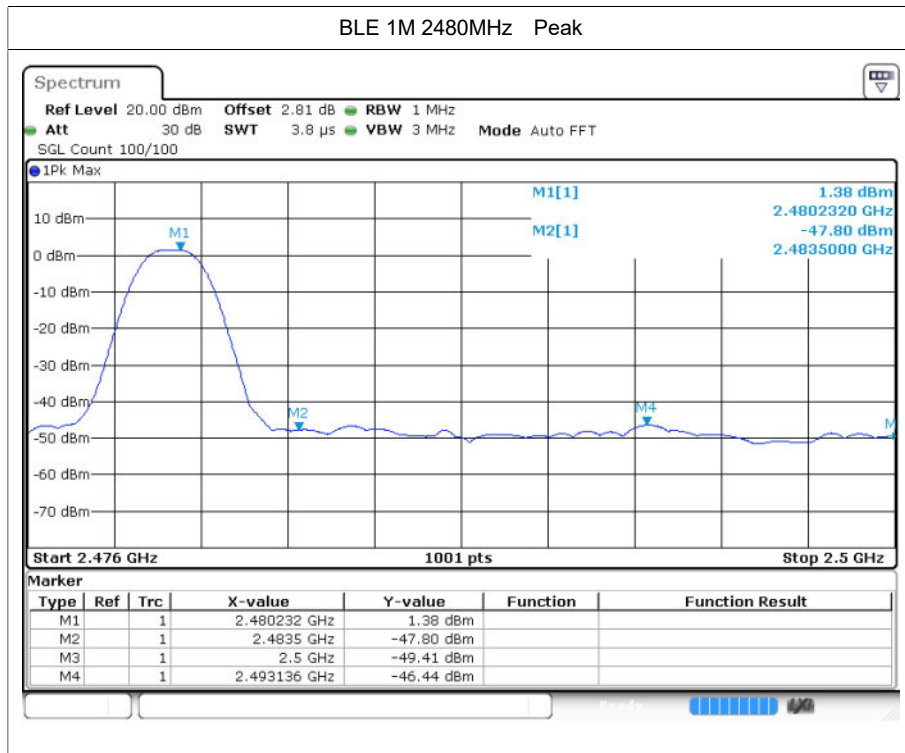

---The End---