

#01_Bluetooth_1Mbps_Front_10mm_Ch0


Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.302
Medium: HSL_2450_220217 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 38.989$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.94, 7.94, 7.94) @ 2402 MHz; Calibrated: 2021/3/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2021/7/14
- Phantom: Twin-SAM V5.0 (30deg probe tilt)_Right; Type: QD 000 P40 CD; Serial: TP-1479
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00421 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.086 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.00416 W/kg
SAR(1 g) = 0.0031 W/kg; SAR(10 g) = 0.00285 W/kg
Maximum value of SAR (measured) = 0.00365 W/kg

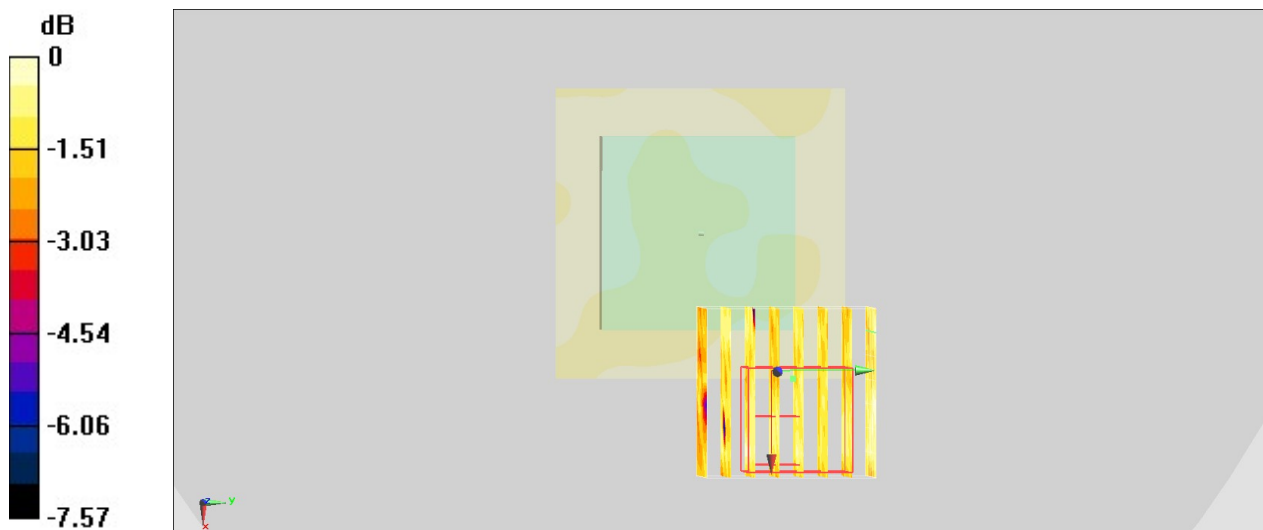

0 dB = 0.00365 W/kg = -24.38 dBW/kg

#02_Bluetooth_1Mbps_Back_0mm_Ch39


Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302
Medium: HSL_2450_220217 Medium parameters used : $f = 2441$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 39.125$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.94, 7.94, 7.94) @ 2441 MHz; Calibrated: 2021/3/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2021/7/14
- Phantom: Twin-SAM V5.0 (30deg probe tilt)_Right; Type: QD 000 P40 CD; Serial: TP-1479
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.450 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.879 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.336 W/kg
SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.046 W/kg
Maximum value of SAR (measured) = 0.207 W/kg

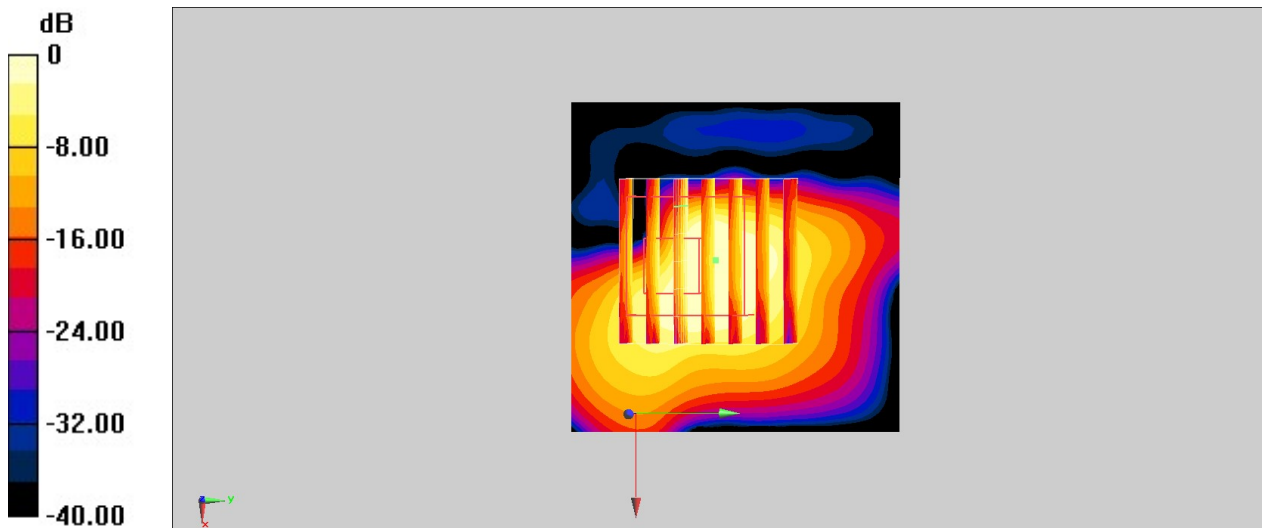

0 dB = 0.207 W/kg = -6.84 dBW/kg

#03_NFC_13.56MHz_ASK_Back_0mm

Communication System: NFC; Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL_13_220524 Medium parameters used : $f = 13.56 \text{ MHz}$; $\sigma = 0.729 \text{ S/m}$; $\epsilon_r = 54.589$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:


- Probe: EX3DV4 - SN3931; ConvF(18.36, 18.36, 18.36) @ 13.56 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1683
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 0.5050 V/m ; Power Drift = 0.08 dB

Fast SAR: SAR(1 g) = 0 W/kg ; SAR(10 g) = 0 W/kg

Maximum value of SAR (interpolated) = 0 W/kg

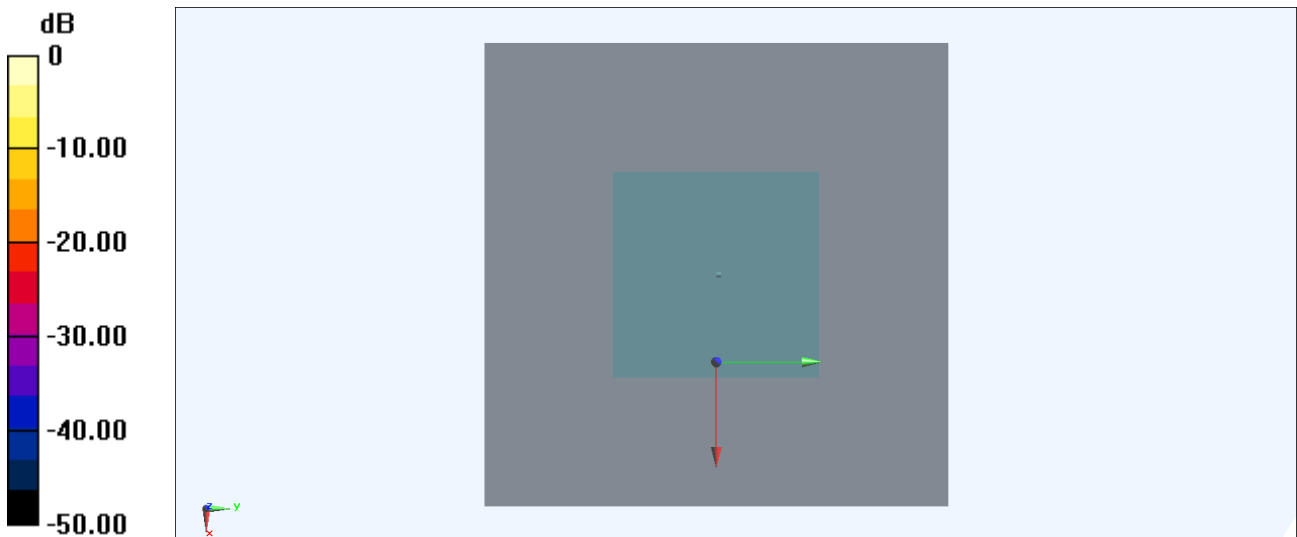

$0 \text{ dB} = 0 \text{ W/kg} = -999.00 \text{ dBW/kg}$