



TEST REPORT

FCC ID: XT5PGI400 IC :8670A-PGI400

For

Technologies Humanware Inc.

Prodigi Connect 12

Model No. : PGI-400

Trade Name : N/A

Prepared for : Technologies Humanware Inc.

Address : 1800, Rue Michaud, Drumondville, Quebec, J2C 7G7, Canada

Prepared by : Shenzhen Alpha Product Testing Co., Ltd.

Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, Shenzhen,
: Guangdong, China

Report No. : T1870080 08

Date of Receipt : January 13, 2017

Date of Test : January 13, 2017 – June 06, 2017

Date of Report : June 06, 2017

Version Number : REV0

TABLE OF CONTENT

Description	Page
1. General Information	5
1.1. Description of Device (EUT)	5
1.2. Description of Test Facility	6
1.3. Test Procedure	6
2. Summary of Measurement	7
2.1. Summary of test result	7
2.2. Assistant equipment used for test	7
2.3. Block Diagram	8
2.4. Test mode	8
2.5. Test Conditions	9
2.6. Measurement Uncertainty (95% confidence levels, k=2)	9
2.7. Test Equipment List	10
3. Maximum Peak Output power	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Setup	11
3.4. Test Results	11
4. Bandwidth	12
4.1. Limit	12
4.2. Test Procedure	12
4.3. Test Results	12
5. Carrier Frequency Separation	18
5.1. Limit	18
5.2. Test Procedure	18
5.3. Test Results	18
6. Number Of Hopping Channel	21
6.1. Limit	21
6.2. Test Procedure	21
6.3. Test Results	21
7. Dwell Time	24
7.1. Test limit	24
7.2. Test Procedure	24
7.3. Test Results	24
8. Radiated emissions	31
8.1. Radiation Emission Limits(15.209)	31
8.2. Block Diagram of Test setup	32
8.3. Test Procedure	33
8.4. Test Results	33
9. Band Edge Compliance	45
9.1. Block Diagram of Test Setup	45
9.2. Limit	45

9.3. Test Procedure	45
9.4. Test Results	45
10. Power Line Conducted Emissions	64
10.1. Conducted Emission Limits(15.207)	64
10.2. Block Diagram of Test Setup	64
10.3. Test Procedure	64
10.4. Test Results	64
11. Antenna Requirements	67
11.1. Standard Requirement	67
11.2. Antenna Connected Construction	67
11.3. Results	67
12. Test setup photo	68
13. Photos of EUT.....	69

DECLARATION

Applicant : Technologies Humanware Inc.
 Manufacturer : Shenzhen Minghong Technology Limited.
 Product : Prodigy Connect 12

(A) Model No. : PGI-400

(B) Trade Name : N/A

(C) Power supply : DC 7.4V from battery or DC 5V from adapter for charging


Measurement Standard Used:


**FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2016,
ANSI C63.4:2014 RSS-247 ISSUE 2**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Reak Yang 
 Project Engineer

Approved by (name + signature).....: Simple Guan 
 Project Manager

Date of issue..... : June 06, 2017

1. General Information

1.1. Description of Device (EUT)

EUT	:	Prodigi Connect 12
Model No.	:	PGI-400
DIFF.	:	N/A
Trade mark	:	N/A
Power supply	:	DC 7.4V from battery or DC 5V from adapter for charging
Radio Technology	:	Bluetooth 3.0 + EDR
Operation frequency	:	2402-2480MHz
Modulation	:	GFSK, $\pi/4$ DQPSK, 8- DPSK
Antenna Type	:	Integrated antenna :2.81 dBi
Software version	:	PGI-400_20170117_V2.0
Hardware version	:	X1162_V1R2 20161125
Applicant	:	Technologies Humanware Inc
Address	:	1800, Rue Michaud, Drumondville, Quebec, J2C 7G7, Canada
Manufacturer	:	Shenzhen Minghong Technology Limited.
Address	:	Unit 906,South Block,Resources Tech Building,No.1 Song Ping Shan Road,High-Tech Park,Shenzhen.
Adapter	:	N/A

1.2. Description of Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

March 25, 2015 File on Federal Communication Commission

Registration Number: 203110

July 26, 2017 Certificated by IC

Registration Number: 12135A

1.3. Test Procedure

POWER LINE CONDUCTED INTERFERENCE:

The test procedure used was ANSI Standard ANSI C63.4:2014 using a 50 u H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

RADIATION INTERFERENCE:

The test procedure used was ANSI Standard ANSI C63.4:2014 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS:

The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS

33.20 dBuV + 10.36 dB + 0.9 dB= 44.46 dBuV/m @ 3m

ANSI STANDARD ANSI C63.4:2014 10.1.7 MEASUREMENT PROCEDURES:

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard ANSI C63.4:2014 10.1.7 with the EUT 40 cm from the vertical ground wall.

2. Summary of Measurement

2.1. Summary of test result

Test procedures according to the technical standards:

KDB DA 00-705

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) RSS-247	PASS
Bandwidth	FCC Part 15: 15.215 RSS-247	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) RSS-247	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) RSS-247	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) RSS-247	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-247	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) RSS-247	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 RSS-247	PASS
Antenna requirement	FCC Part 15: 15.203 RSS-247	PASS

Note:

1: "N/A" denotes test is not applicable in this Test Report

2: Test with the test procedure Blue tool.

3: All tests are according to ANSI C63.10-2013:

2.2. Assistant equipment used for test

Description	:	N/A
Manufacturer	:	N/A
Model No.	:	N/A

2.3. Block Diagram

1, For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz, 1.5 meter high above ground for above 1GHz. EUT was be set into BT test mode by software before test.



2, For Power Line Conducted Emissions Test.



2.4. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode.

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
π /4 DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
8- DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.5. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.71dB	
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB	Polarize: V
	2.57dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.90dB	Polarize: V
	3.92dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.28dB	Polarize: H
	4.26dB	Polarize: V
Uncertainty for radio frequency	1×10^{-9}	
Uncertainty for conducted RF Power	0.16dB	
Uncertainty for temperature	0.2°C	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

2.7. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due to day
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	2016.09.30	2017.09.29
Test Receiver	ROHDE&SCHWARZ	ESCI	101165	2016.09.29	2017.09.28
Spectrum analyzer	Agilent	E4407B	MY49510055	2016.09.29	2017.09.28
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2016.09.30	2017.09.29
Filter	KANGMAI	LPF-LDC-1000- 1959	1209002075	2016.09.29	2017.09.28
Filter	WAINWRIGHT	WHKX2.80 /18 G- 12SS	SN1	2016.09.29	2017.09.28
RF Cable	Resenberger	Cable 4	N/A	2016.09.29	2017.09.28
CMU200	ROHDE&SCHWARZ	CMU200	116785	2016.09.29	2017.09.28
Signal Analyzer	Agilent	N9020A	MY499100060	2016.09.29	2017.09.28
vector Signal Generator	Agilent	N5182A	MY49060042	2016.09.29	2017.09.28
vector Signal Generator	Agilent	E4438C	US44271917	2016.09.29	2017.09.28
Amplifier	HP	HP8347A	2834A00455	2016.09.29	2017.09.28
Amplifier	Teseq	LNA6901	72718	2016.09.29	2017.09.28
Amplifier	Agilent	8449B	3008A02664	2016.09.29	2017.09.28
Filter	WAINWRIGHT	WHKX1.0G /15G- 10SS	SN40	2016.09.29	2017.09.28
Test Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03- 102082-Wa	2016.09.29	2017.09.28
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	2016.09.29	2017.09.28
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2016.7.21	2019.7.20
RF Cable	Resenberger	Cable 1	N/A	2016.09.29	2017.09.28
RF Cable	Resenberger	Cable 2	N/A	2016.09.29	2017.09.28
RF Cable	Resenberger	Cable 3	N/A	2016.09.29	2017.09.28
Power Sensor	Power Radio	RPR3006W	15100041SNO91	2016.09.29	2017.09.28
Power Sensor	Power Radio	RPR3006W	15100041SNO92	2016.09.29	2017.09.28
L.I.S.N.	SCHWARZBECK	NSLK8126	8126-466	2016.09.29	2017.09.28
L.I.S.N.	ROHDE&SCHWARZ	ENV216	101043	2016.09.29	2017.09.28
20dB Attenuator	ICPROBING	IATS1	82347	2016.09.29	2017.09.28

3. Maximum Peak Output power

3.1. Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup

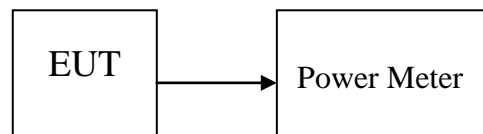

3.4. Test Results

EUT: Prodigy Connect 12		M/N: PGI-400			
Test date: 2017-04-28		Test site: RF site		Tested by: Reak	
Mode	Freq (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (dBm)	Margin (dB)
GFSK	2402	1.983	1.579	30	19.017
	2441	2.494	1.776	30	18.506
	2480	2.957	1.976	30	18.043
π /4 DQPSK,	2402	0.849	1.216	21	20.151
	2441	1.615	1.450	21	19.385
	2480	2.123	1.630	21	18.877
8- DPSK	2402	1.234	1.329	21	19.766
	2441	1.798	1.513	21	19.202
	2480	2.257	1.682	21	18.743
Conclusion: PASS					

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Results

Mode	Freq (MHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
GFSK	2402	832.3	/	PASS
	2441	833.8	/	PASS
	2480	834.1	/	PASS
$\pi/4$ DQPSK	2402	1118	/	PASS
	2441	1118	/	PASS
	2480	1119	/	PASS
8- DPSK	2402	1166	/	PASS
	2441	1163	/	PASS
	2480	1164	/	PASS

Original Test data For 20dB bandwidth
GFSK:






π / 4 DQPSK:





8- DPSK:

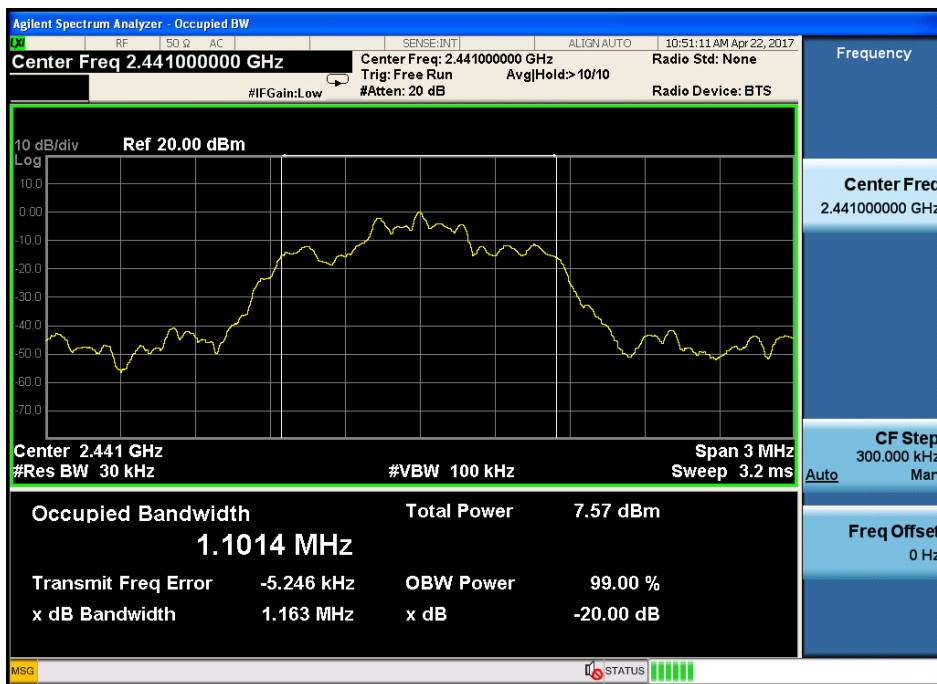



5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.


5.3. Test Results

Mode/Channel	Channel separation (MHz)	20dB Bandwidth (KHz)	Limit (KHz) 2/3 20dB bandwidth	Conclusion
GFSK	1.002	834.1	556.067	PASS
π /4 DQPSK	1.002	1119	746.000	PASS
8- DPSK	1.002	1166	777.333	PASS

Original test data for channel separation
GFSK

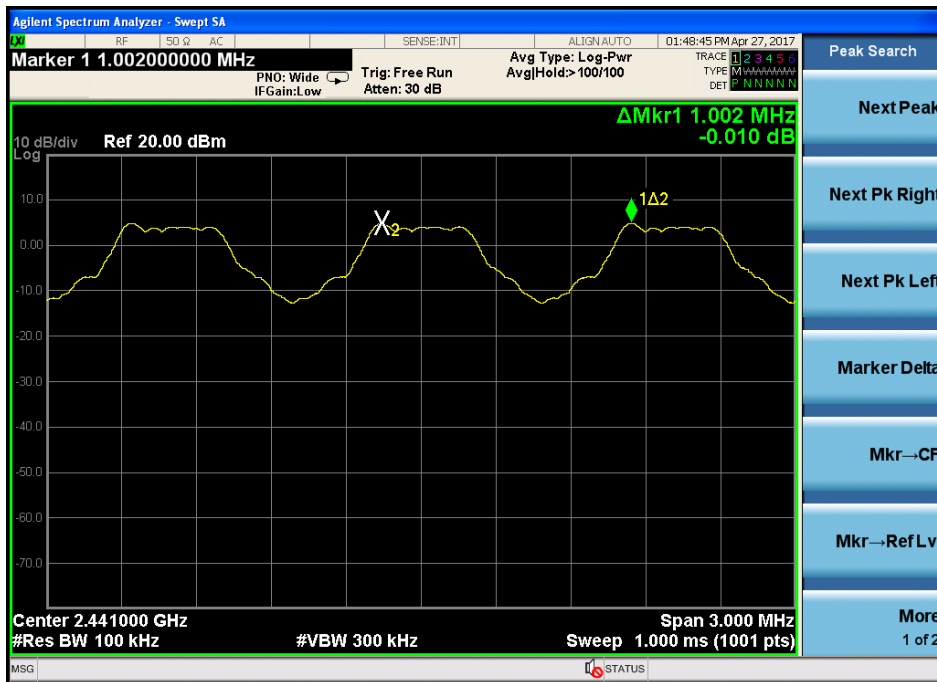

$\pi/4$ DQPSK

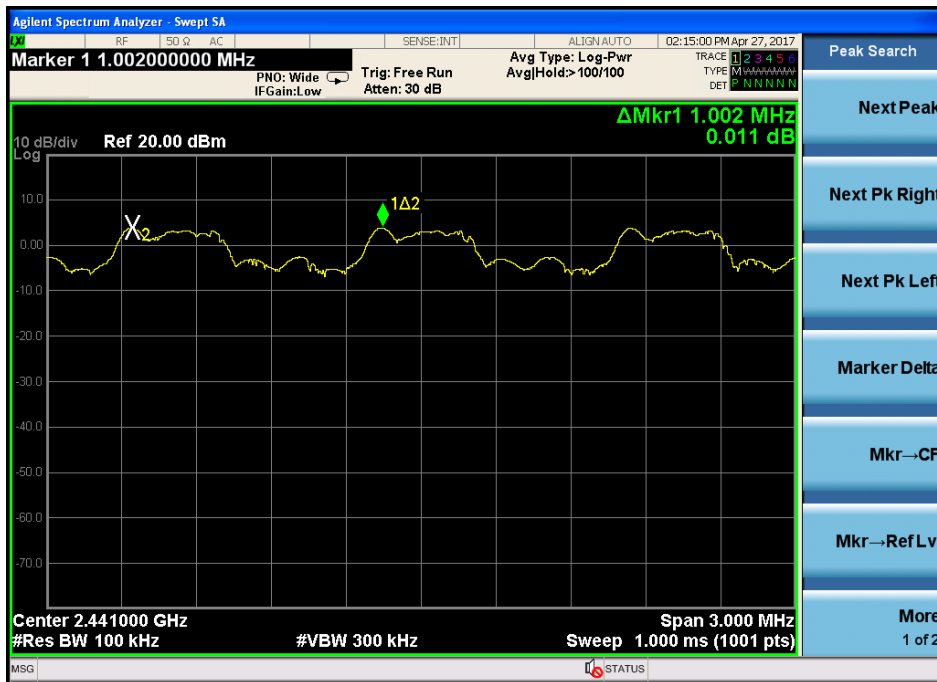

8- DPSK:



6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


6.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 1MHz VBW.


6.3. Test Results

Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
π /4 DQPSK	79	>15	PASS
8- DPSK	79	>15	PASS


Original test data for hopping channel number
GFSK

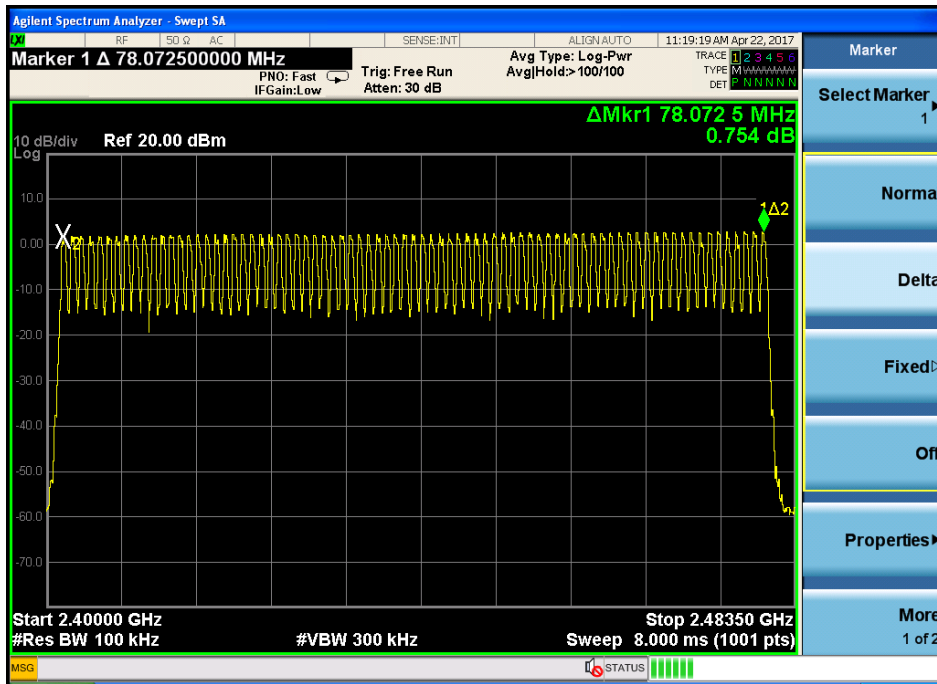

π /4 DQPSK

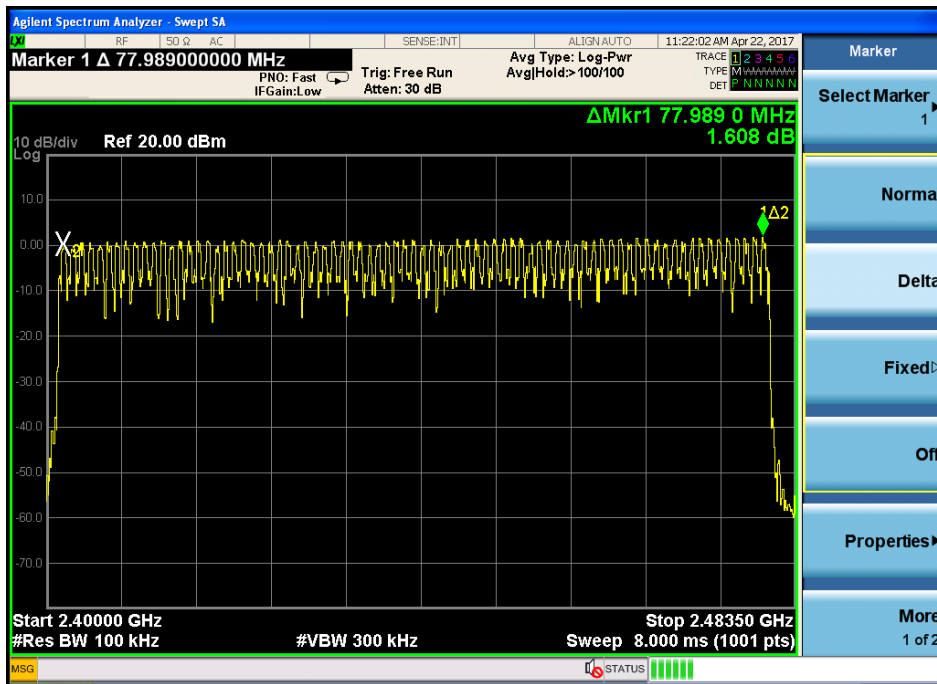

8- DPSK:

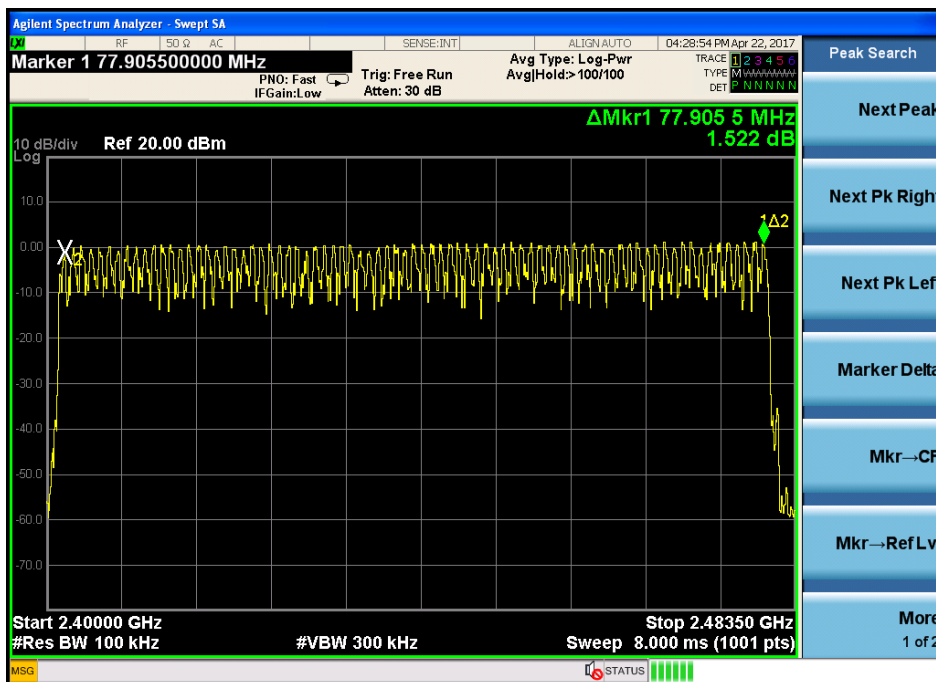

7. Dwell Time

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Results

PASS.

Detailed information please see the following page.

Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Conclusion
GFSK	DH1	2441	0.352	0.113	<0.4	PASS
	DH3	2441	1.616	0.056	<0.4	PASS
	DH5	2441	2.878	0.038	<0.4	PASS
$\pi/4$ DQPSK	DH1	2441	0.364	0.113	<0.4	PASS
	DH3	2441	1.621	0.056	<0.4	PASS
	DH5	2441	2.878	0.038	<0.4	PASS
8- DPSK	DH1	2441	0.385	0.113	<0.4	PASS
	DH3	2441	1.662	0.056	<0.4	PASS
	DH5	2441	2.878	0.038	<0.4	PASS

Note: 1 A period time = $0.4 \text{ (s)} * 79 = 31.6\text{(s)}$


2 DH1 time slot = Pulse Duration * $(1600/(2*79)) * \text{A period time}/1000$

DH3 time slot = Pulse Duration * $(1600/(4*79)) * \text{A period time}/1000$


DH5 time slot = Pulse Duration * $(1600/(6*79)) * \text{A period time}/1000$

GFSK


DH1:

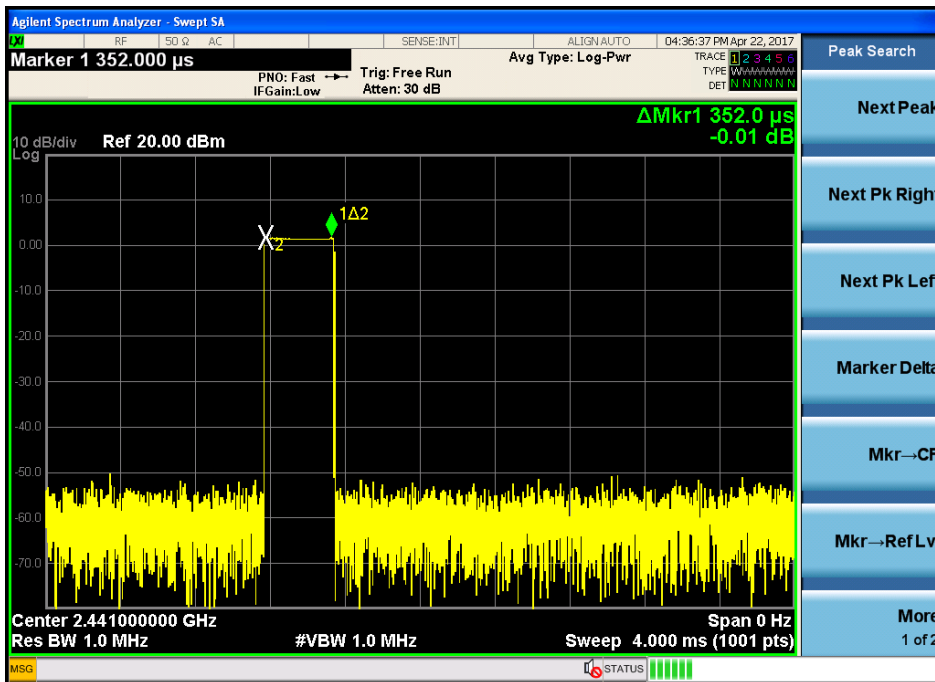

DH3:

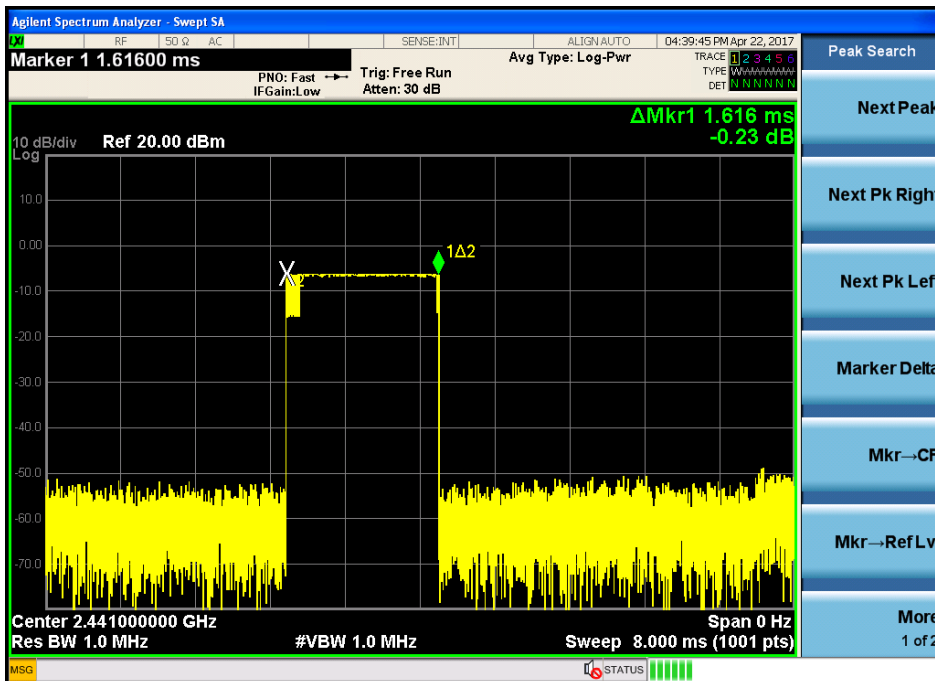


DH5

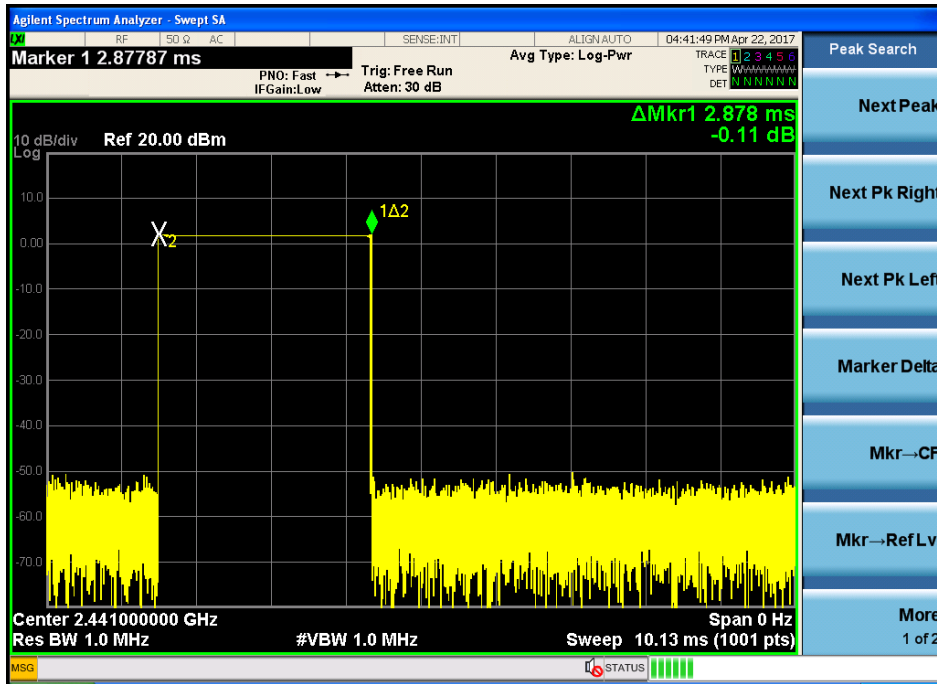


$\pi/4$ DQPSK


DH1:

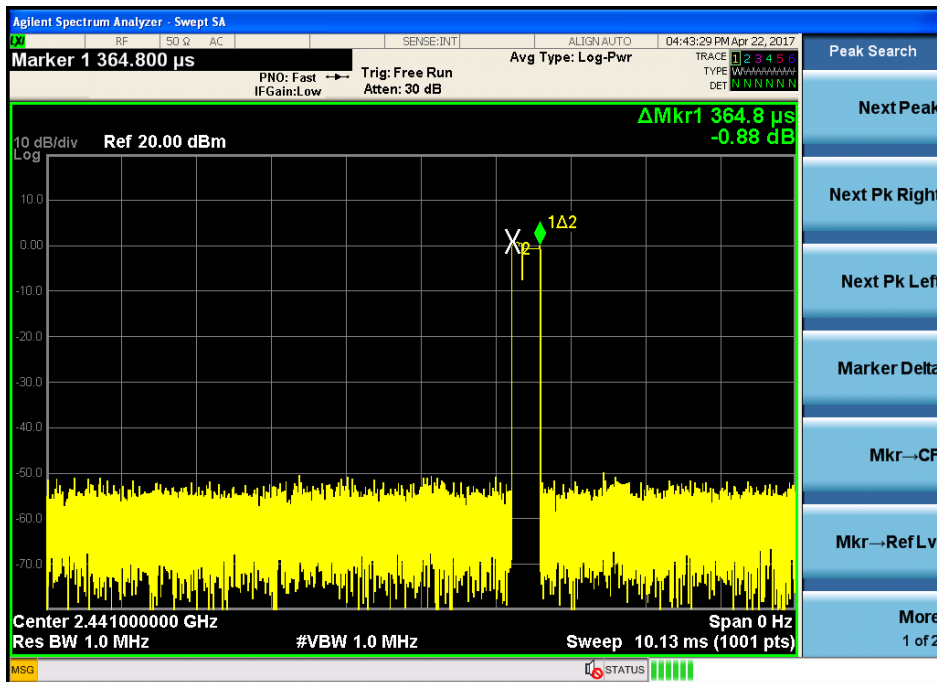

DH3:

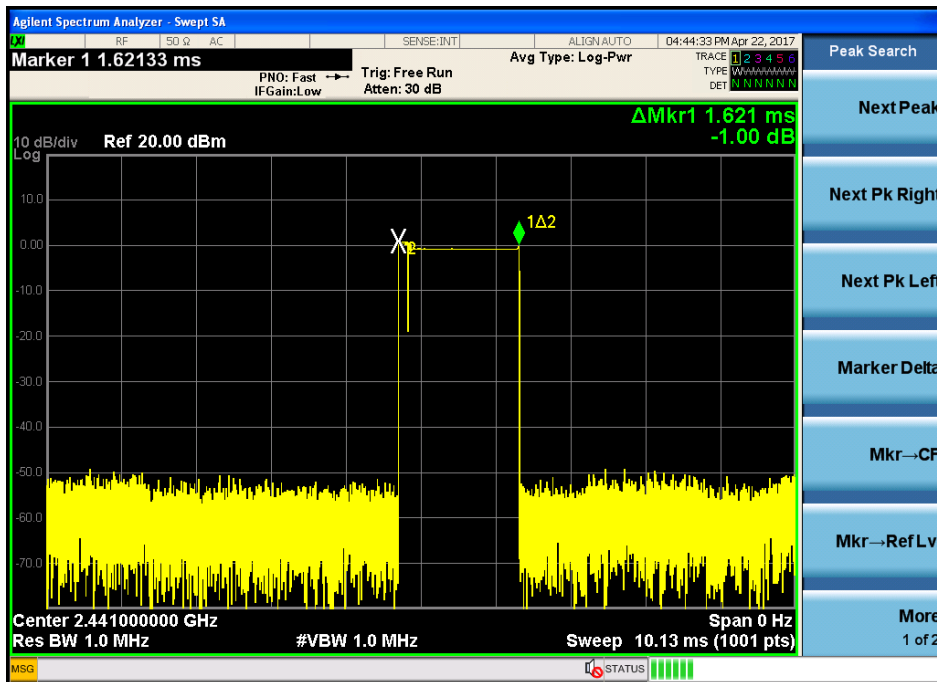


DH5:

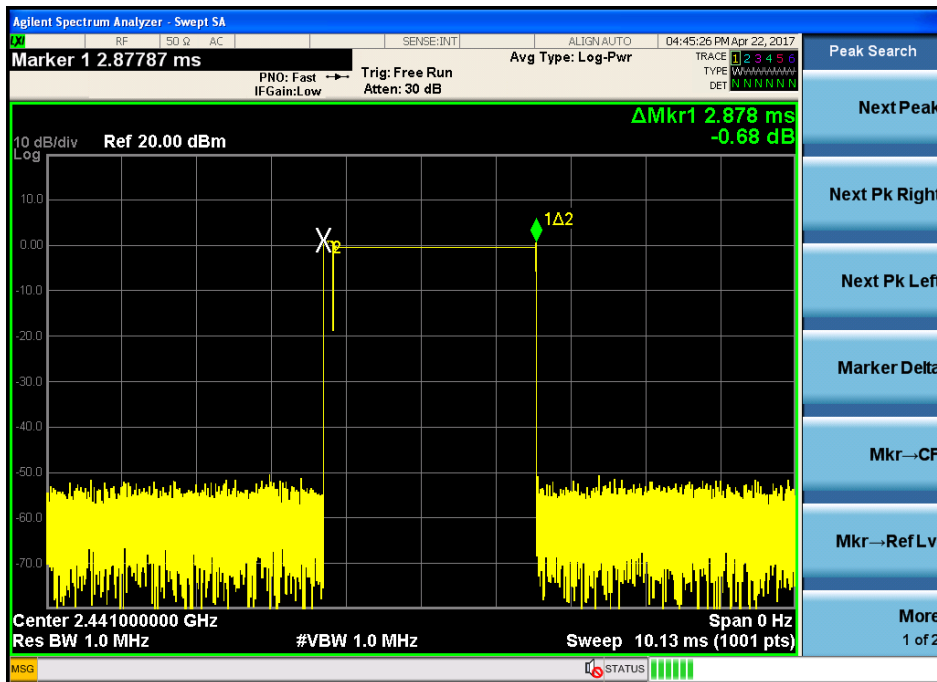


8- DPSK:


DH1

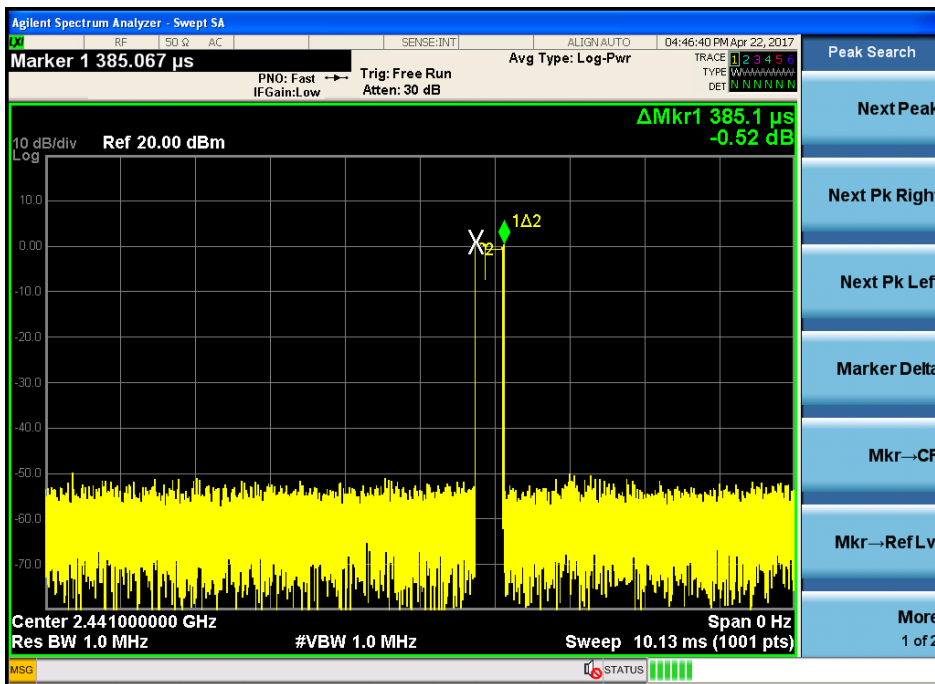

DH3

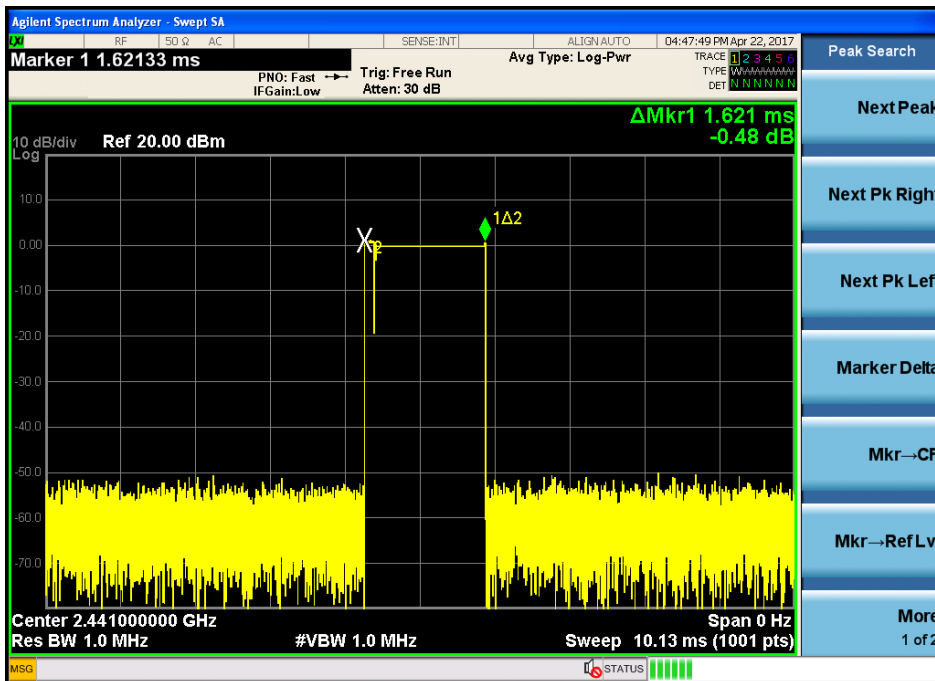

DH5

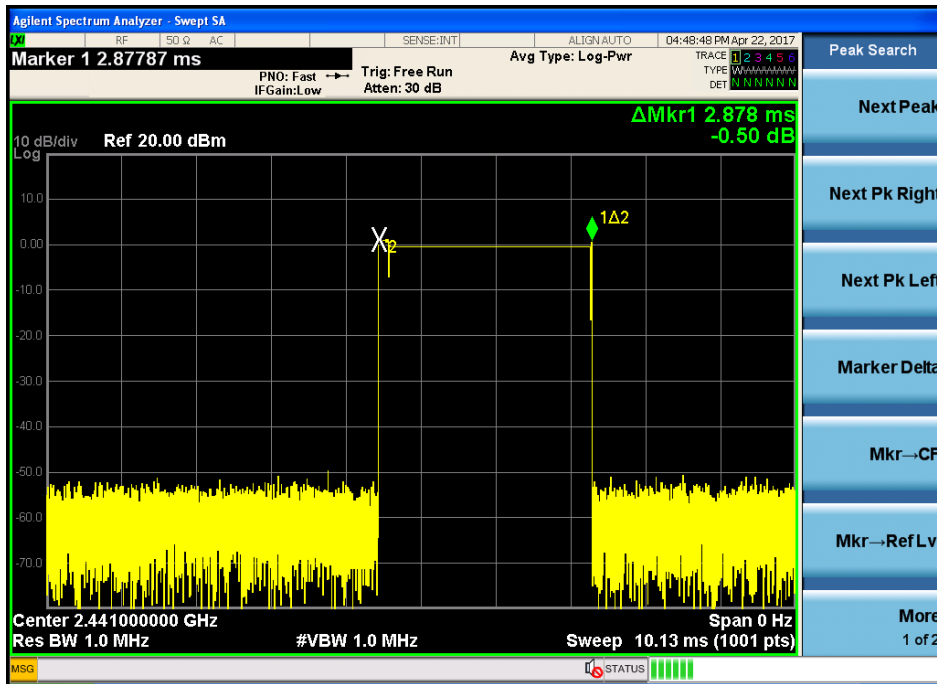

8. Radiated emissions

8.1. Radiation Emission Limits(15.209)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	


8.2. Block Diagram of Test setup

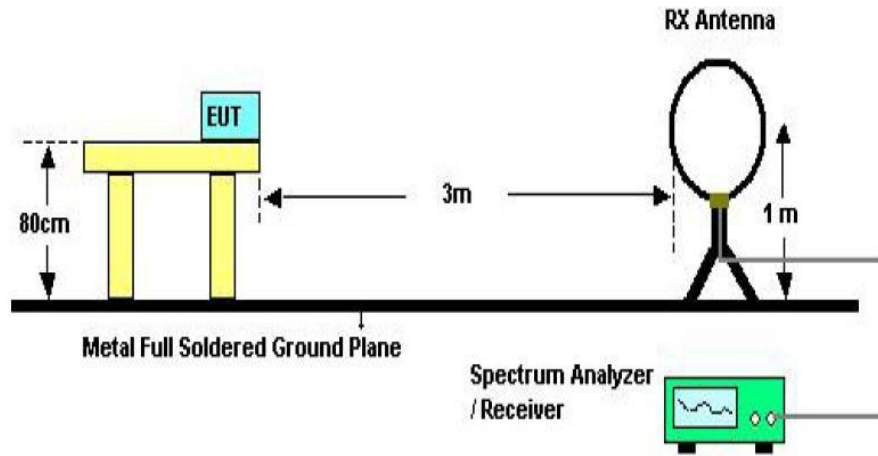

Below 30MHz Test Setup

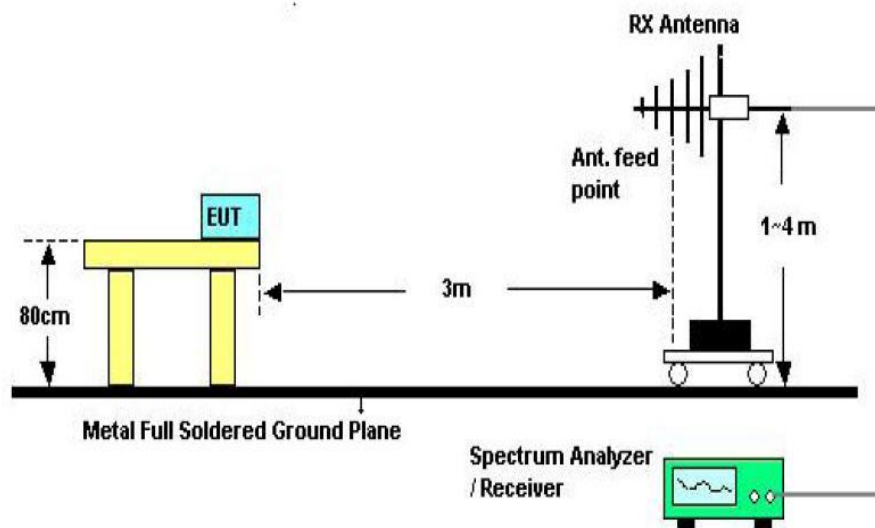

Above 30MHz Test Setup

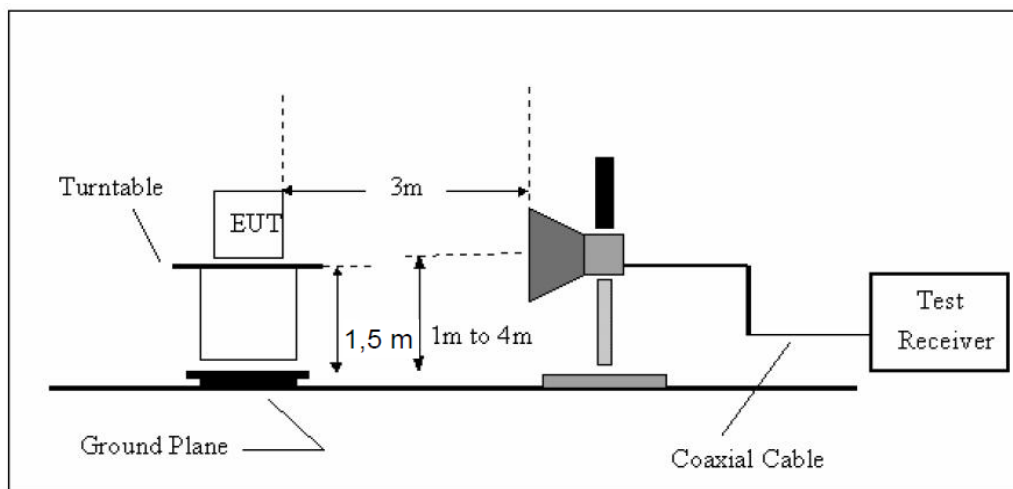

Above 1GHz Test Setup

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 :2014on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Results

We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.. Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Site LAB 966-2 Chamber
 Limit: FCC Part 15 Class B Radiation
 EUT:
 M/N:
 Mode:
 Note:

Polarization: *Horizontal*
 Power: DC 12V
 Distance:

Temperature: 23.8
 Humidity: 56 %

Engineer Signature:

Radiated Emission Measurement

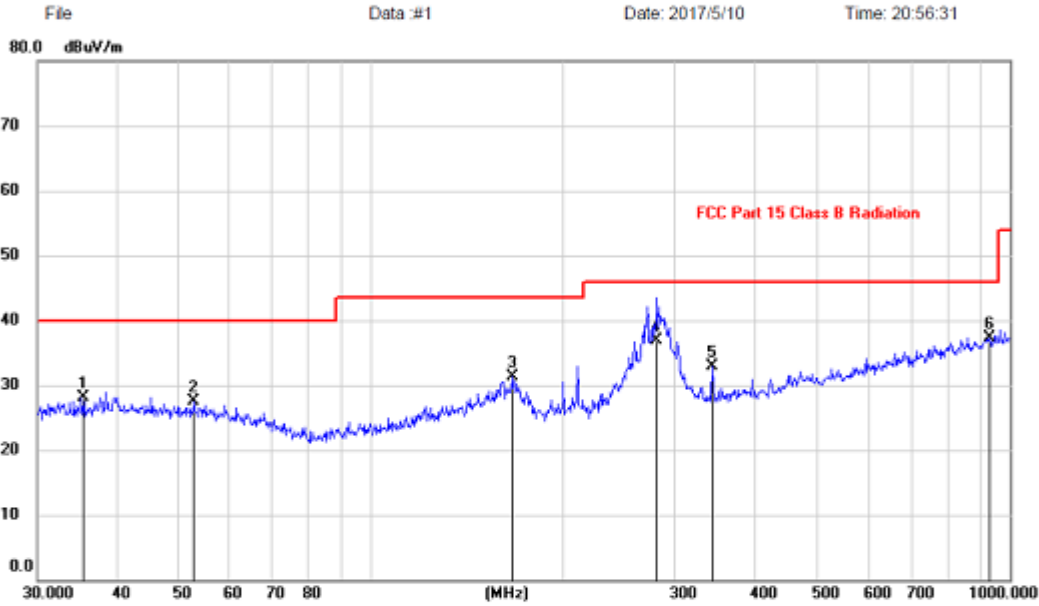

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		35.2512	14.60	13.51	28.11	40.00	-11.89	peak			
2		52.7600	14.06	13.48	27.54	40.00	-12.46	peak			
3		167.2368	17.21	14.00	31.21	43.50	-12.29	peak			
4		280.0237	23.85	12.97	36.82	46.00	-9.18	QP	100	0	
5		341.9786	18.45	14.43	32.88	46.00	-13.12	peak			
6	*	929.0082	14.05	23.31	37.36	46.00	-8.64	peak			

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Site: LAB 966-2 Chamber
 Limit: FCC Part 15 Class B Radiation
 EUT:
 M/N:
 Mode:
 Note:

Polarization: *Vertical*
 Power: DC 12V
 Distance:

Temperature: 23.8
 Humidity: 56 %

Engineer Signature:

Radiated Emission Measurement

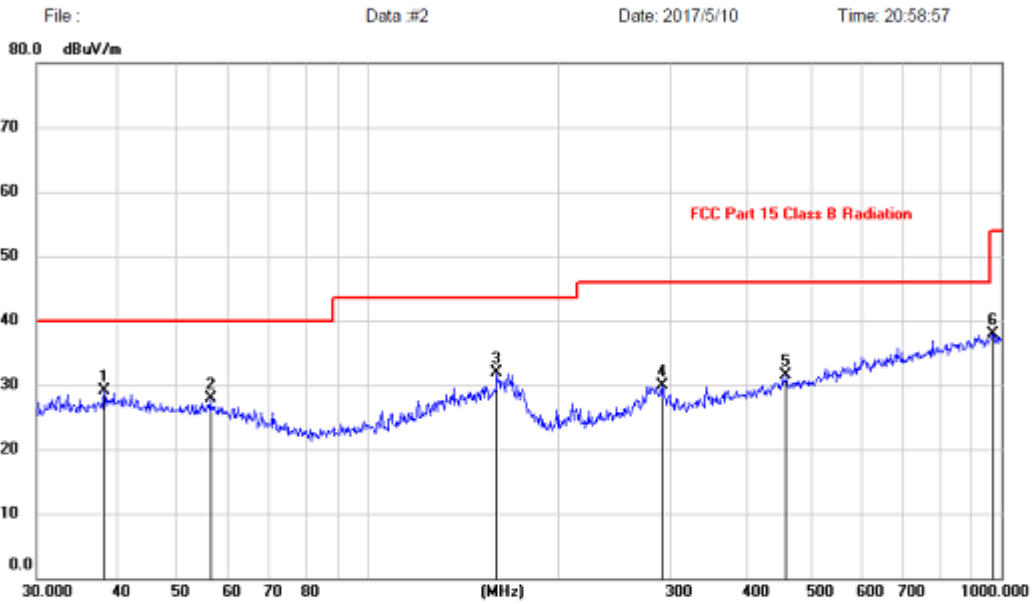

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	38.3462	15.19	13.95	29.14	40.00	-10.86	peak		
2		56.3948	14.82	13.16	27.98	40.00	-12.02	peak		
3		159.7844	17.26	14.58	31.84	43.50	-11.66	peak		
4		292.0583	16.79	13.20	29.99	46.00	-16.01	peak		
5		457.5073	14.39	17.09	31.48	46.00	-14.52	peak		
6		972.3374	14.13	23.77	37.90	54.00	-16.10	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

1GHz—25GHz Radiated emission Test result									
Test mode: GFSK Tx CH1 2402MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBUV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	4804	44.15	33.95	10.18	34.26	54.02	74	19.98	PK
2	4804	34.53	33.95	10.18	34.26	44.40	54	9.60	AV
3	7206	/							
4	9608	/							
5	12010	/							
Antenna Polarity: Horizontal									
1	4804	43.36	33.95	10.18	34.26	53.23	74	20.77	PK
2	4804	33.94	33.95	10.18	34.26	43.81	54	10.19	AV
3	7206	/							
4	9608	/							
5	12010	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
Test mode: GFSK Tx CH40 2441MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882	41.65	33.93	10.2	34.29	51.49	74	22.51	PK
2	4882	32.76	33.93	10.2	34.29	42.60	54	11.40	AV
3	7323	/							
4	9764	/							
5	12205	/							
Antenna Polarity: Horizontal									
1	4882	42.34	33.93	10.2	34.29	52.18	74	21.82	PK
2	4882	33.05	33.93	10.2	34.29	42.89	54	11.11	AV
3	7323	/							
4	9764	/							
5	12205	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
Test mode: GFSK Tx CH79 2480MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960	41.94	33.98	10.22	34.25	51.89	74	22.11	PK
2	4960	32.84	33.98	10.22	34.25	42.79	54	11.21	AV
3	7440	/							
4	9920	/							
5	12400	/							
Antenna Polarity: Horizontal									
1	4960	42.40	33.98	10.22	34.25	52.35	74	21.65	PK
2	4960	32.20	33.98	10.22	34.25	42.15	54	11.85	AV
3	7440	/							
4	9920	/							
5	12400	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
Test mode: π /4 DQPSK Tx CH1 2402MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804	43.10	33.95	10.18	34.26	52.97	74	21.03	PK
2	4804	31.87	33.95	10.18	34.26	41.74	54	12.26	AV
3	7206	/							
4	9608	/							
5	12010	/							
Antenna Polarity: Horizontal									
1	4804	43.21	33.95	10.18	34.26	53.08	74	20.92	PK
2	4804	31.65	33.95	10.18	34.26	41.52	54	12.48	AV
3	7206	/							
4	9608	/							
5	12010	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
Test mode: π /4 DQPSK Tx CH40 2441MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882	43.53	33.98	10.2	34.25	53.46	74	20.54	PK
2	4882	30.48	33.98	10.2	34.25	40.41	54	13.59	AV
3	7323	/							
4	9764	/							
5	12205	/							
Antenna Polarity: Horizontal									
1	4882	43.98	33.93	10.2	34.29	53.82	74	20.18	PK
2	4882	32.84	33.93	10.2	34.29	42.68	54	11.32	AV
3	7323	/							
4	9764	/							
5	12205	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
Test mode: $\pi/4$ DQPSK Tx CH79 2480MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960	42.26	33.98	10.22	34.25	52.21	74	21.79	PK
2	4960	32.73	33.98	10.22	34.25	42.68	54	11.32	AV
3	7440	/							
4	9920	/							
5	12400	/							
Antenna Polarity: Horizontal									
1	4960	42.84	33.98	10.22	34.25	52.79	74	21.21	PK
2	4960	31.42	33.98	10.22	34.25	41.37	54	12.63	AV
3	7440	/							
4	9920	/							
5	12400	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


1GHz—25GHz Radiated emission Test result									
Test mode: 8- DQPSK Tx CH1 2402MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804	41.29	33.95	10.18	34.26	51.16	74	22.84	PK
2	4804	31.85	33.95	10.18	34.26	41.72	54	12.28	AV
3	7206	/							
4	9608	/							
5	12010	/							
Antenna Polarity: Horizontal									
1	4804	40.29	33.95	10.18	34.26	50.16	74	23.84	PK
2	4804	32.27	33.95	10.18	34.26	42.14	54	11.86	AV
3	7206	/							
4	9608	/							
5	12010	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
Test mode: 8- DQPSK Tx CH40 2441MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882	48.17	33.93	10.2	34.29	58.01	74	15.99	PK
2	4882	34.27	33.93	10.2	34.29	44.11	54	9.89	AV
3	7323	/							
4	9764	/							
5	12205	/							
Antenna Polarity: Horizontal									
1	4882	42.41	33.93	10.2	34.29	52.25	74	21.75	PK
2	4882	33.17	33.93	10.2	34.29	43.01	54	10.99	AV
3	7323	/							
4	9764	/							
5	12205	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
Test mode: 8- DQPSK Tx CH79 2480MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960	42.01	33.98	10.22	34.25	51.96	74	22.04	PK
2	4960	32.45	33.98	10.22	34.25	42.40	54	11.60	AV
3	7440	/							
4	9920	/							
5	12400	/							
Antenna Polarity: Horizontal									
1	4960	42.43	33.98	10.22	34.25	52.38	74	21.62	PK
2	4960	33.16	33.98	10.22	34.25	43.11	54	10.89	AV
3	7440	/							
4	9920	/							
5	12400	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

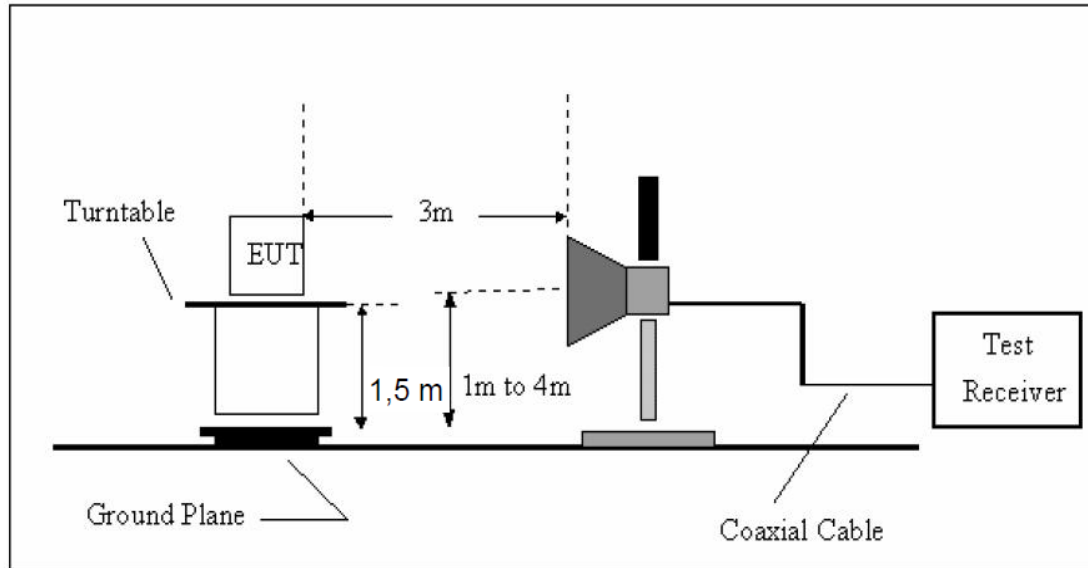

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.

9.4. Test Results

PASS. (See below detailed test data)

Radiated Method

GFSK (CH Low)

Band Edge Test result								
Test mode: Tx CH Low 2402MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	44.57	27.62	3.92	34.97	41.14	74	32.86	PK
Antenna Polarity: Horizontal								
2390	44.10	27.62	3.92	34.97	40.67	74	33.33	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

GFSK (CH High)

Band Edge Test result								
Test mode: Tx CH High 2480MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	44.23	27.89	4	34.97	41.15	74	32.85	PK
Antenna Polarity: Horizontal								
2483.5	44.09	27.89	4	34.97	41.01	74	32.99	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

GFSK (Hopping Low)

Band Edge Test result								
Test mode: Tx CH Low 2402MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	44.22	27.62	3.92	34.97	40.79	74	33.21	PK
Antenna Polarity: Horizontal								
2390	44.10	27.62	3.92	34.97	40.67	74	33.33	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

GFSK (Hopping High)

Band Edge Test result								
Test mode: Tx CH High 2480MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	43.84	27.89	4	34.97	40.76	74	33.24	PK
Antenna Polarity: Horizontal								
2483.5	43.93	27.89	4	34.97	40.85	74	33.15	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

π /4 DQPSK (CH Low)

Band Edge Test result								
Test mode: Tx CH Low 2402MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	44.03	27.62	3.92	34.97	40.60	74	33.40	PK
Antenna Polarity: Horizontal								
2390	44.57	27.62	3.92	34.97	41.14	74	32.86	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

π /4 DQPSK (CH High)

Band Edge Test result								
Test mode: Tx CH High 2480MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	44.49	27.89	4	34.97	41.41	74	32.59	PK
Antenna Polarity: Horizontal								
2483.5	44.48	27.89	4	34.97	41.40	74	32.60	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

π /4 DQPSK (Hopping Low)

Band Edge Test result								
Test mode: Tx CH Low 2402MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	44.45	27.62	3.92	34.97	41.02	74	32.98	PK
Antenna Polarity: Horizontal								
2390								PK
	43.92	27.62	3.92	34.97	40.49	74	33.51	
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

π /4 DQPSK (Hopping High)

Band Edge Test result								
Test mode: Tx CH High 2480MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	44.17	27.89	4	34.97	41.09	74	32.91	PK
Antenna Polarity: Horizontal								
2483.5	44.25	27.89	4	34.97	41.17	74	32.83	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

8- DPSK (CH Low)

Band Edge Test result								
Test mode: Tx CH Low 2402MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	43.73	27.62	3.92	34.97	40.30	74	33.70	PK
Antenna Polarity: Horizontal								
2390	43.96	27.62	3.92	34.97	40.53	74	33.47	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

8- DPSK (CH High)

Band Edge Test result								
Test mode: Tx CH High 2480MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	44.39	27.89	4	34.97	41.31	74	32.69	PK
Antenna Polarity: Horizontal								
2483.5	43.95	27.89	4	34.97	40.87	74	33.13	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

8- DPSK (Hopping Low)

Band Edge Test result								
Test mode: Tx CH Low 2402MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	44.50	27.62	3.92	34.97	41.07	74	32.93	PK
Antenna Polarity: Horizontal								
2390	44.31	27.62	3.92	34.97	40.88	74	33.12	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								


8- DPSK (Hopping High)

Band Edge Test result								
Test mode: Tx CH High 2480MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	44.20	27.89	4	34.97	41.12	74	32.88	PK
Antenna Polarity: Horizontal								
2483.5	43.92	27.89	4	34.97	40.84	74	33.16	PK
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								


Conducted Method

GFSK

CH LOW :

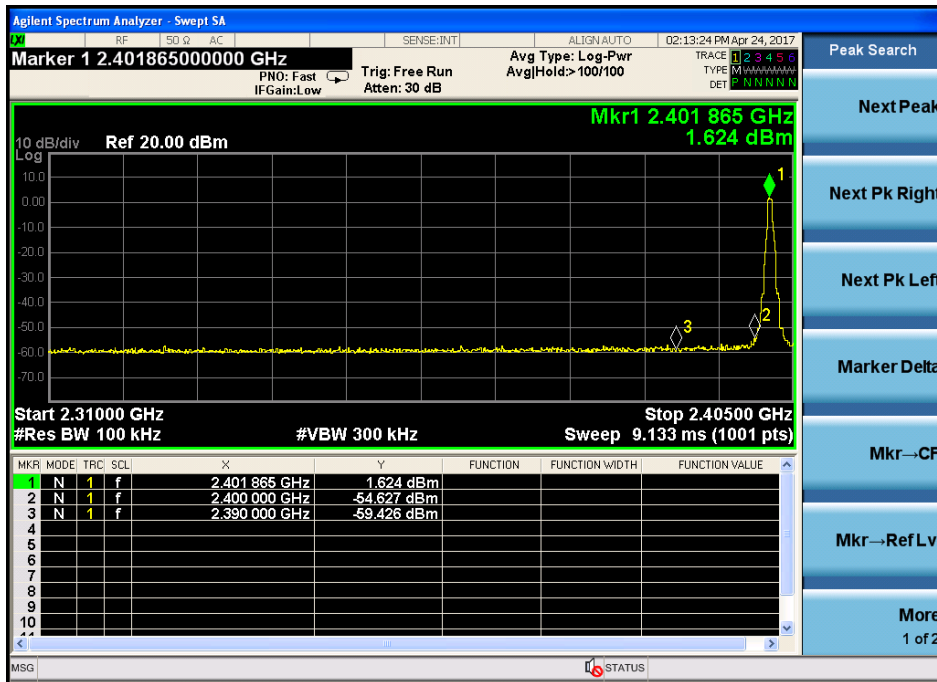


CH High :

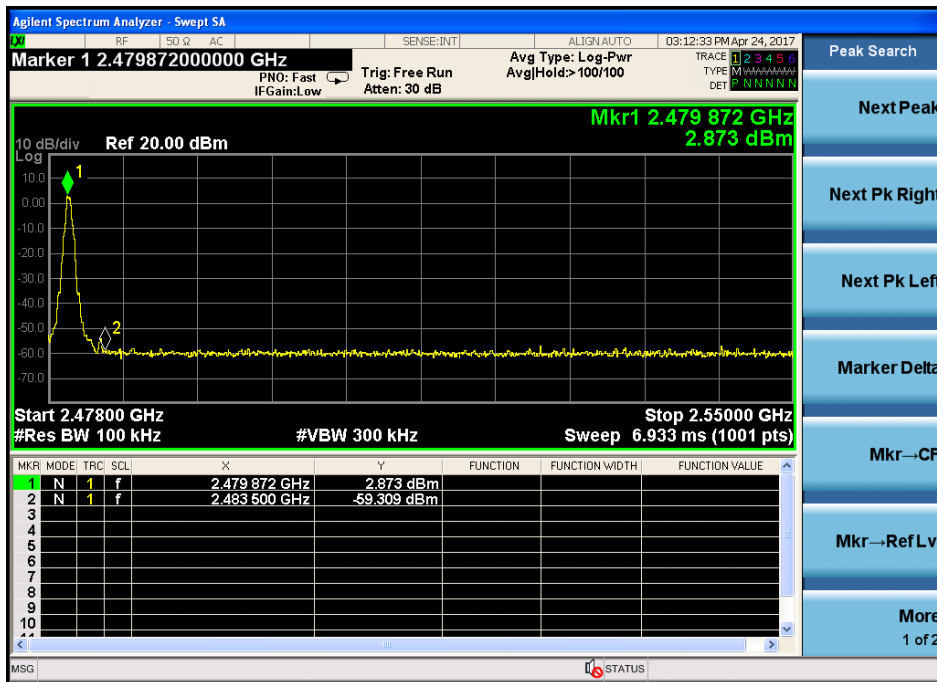


$\pi/4$ DQPSK


Low

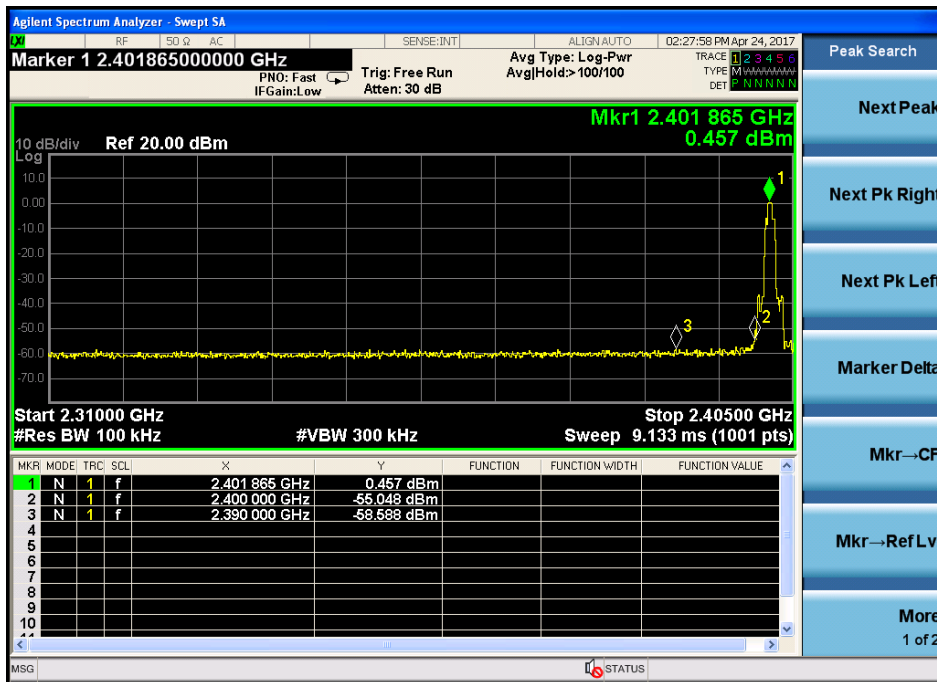


High

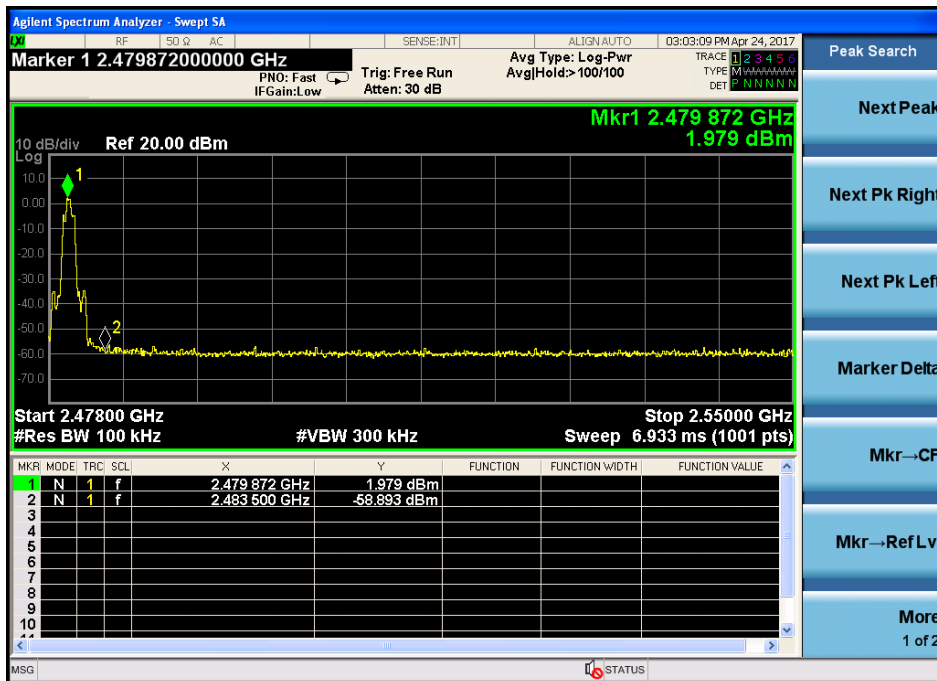


Hopping
Low

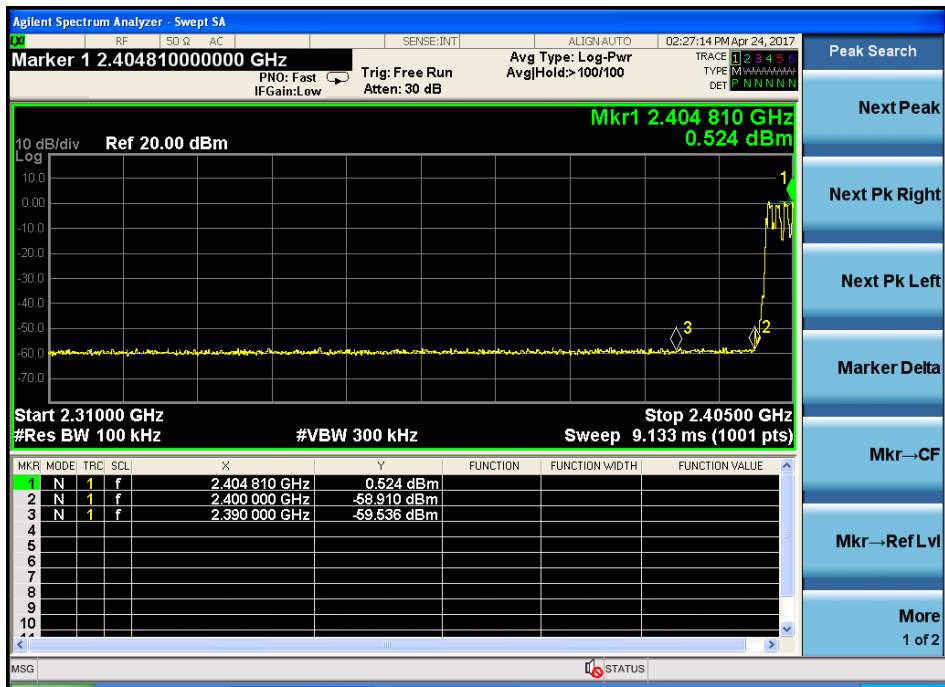


High

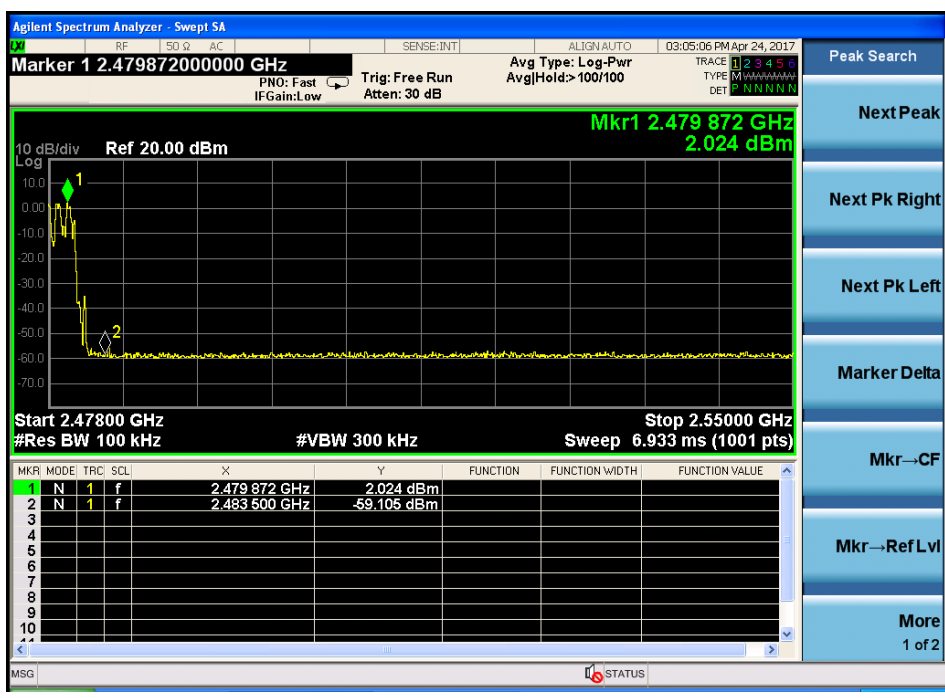

8- DPSK:
Low

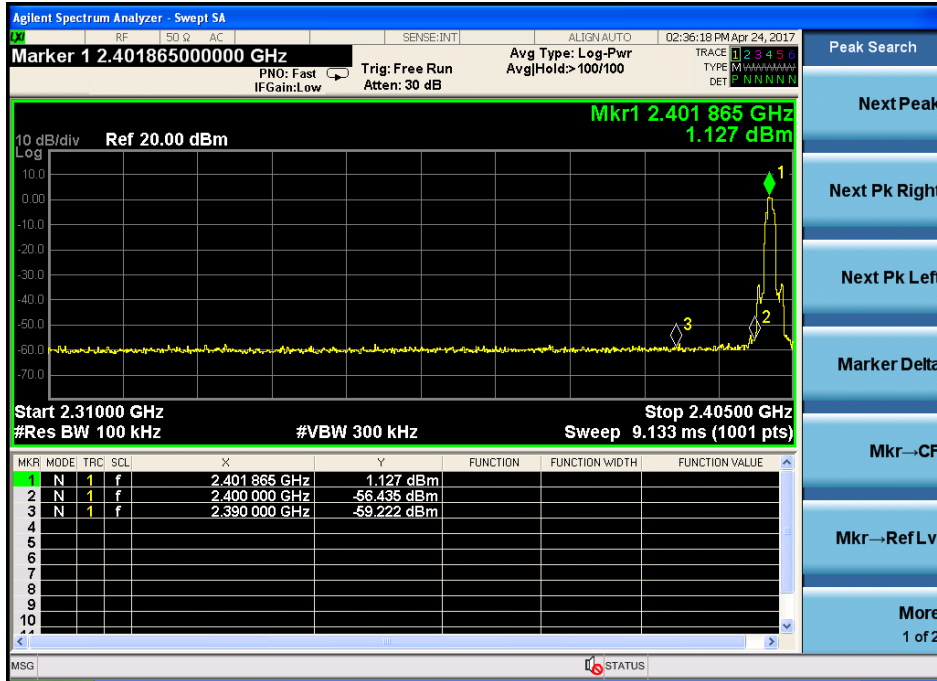

High

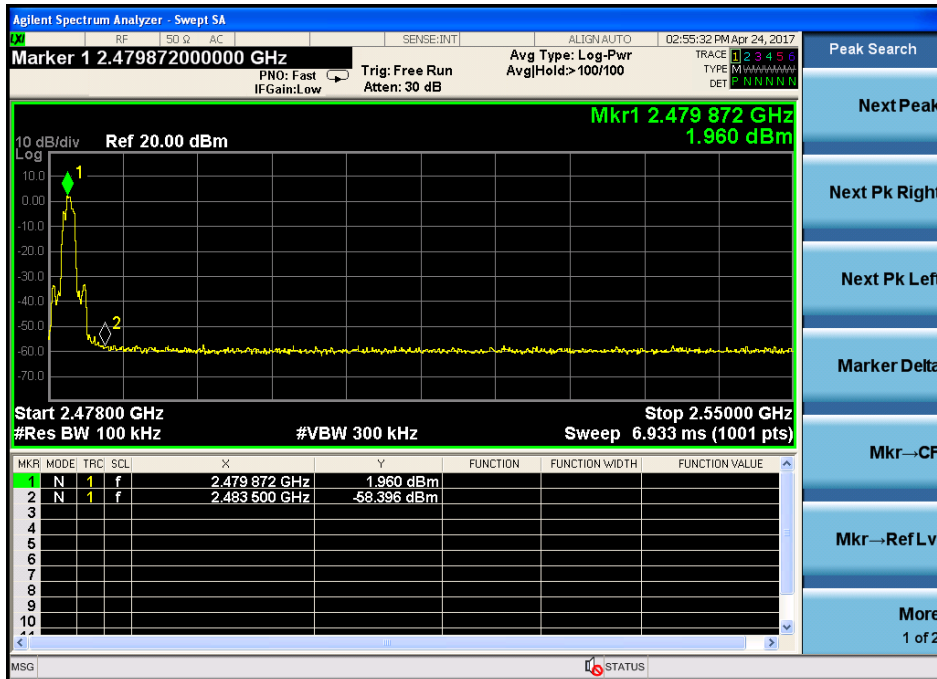


10. Power Line Conducted Emissions

10.1. Conducted Emission Limits(15.207)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

- Notes: 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

10.2. Block Diagram of Test Setup

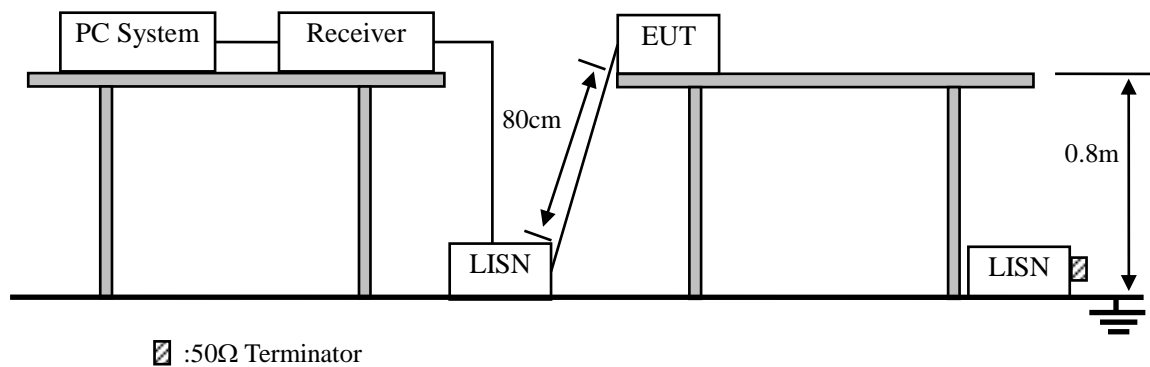

10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 :2014on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Results


PASS (See below detailed test data)

Site LAB
 Limit: EN55032 Class B Conduction(QP)
 EUT:
 M/N:
 Mode:
 Note:

Phase: **N**
 Power: DC 12V

Temperature: 24.2
 Humidity: 53 %

Conducted Emission Measurement

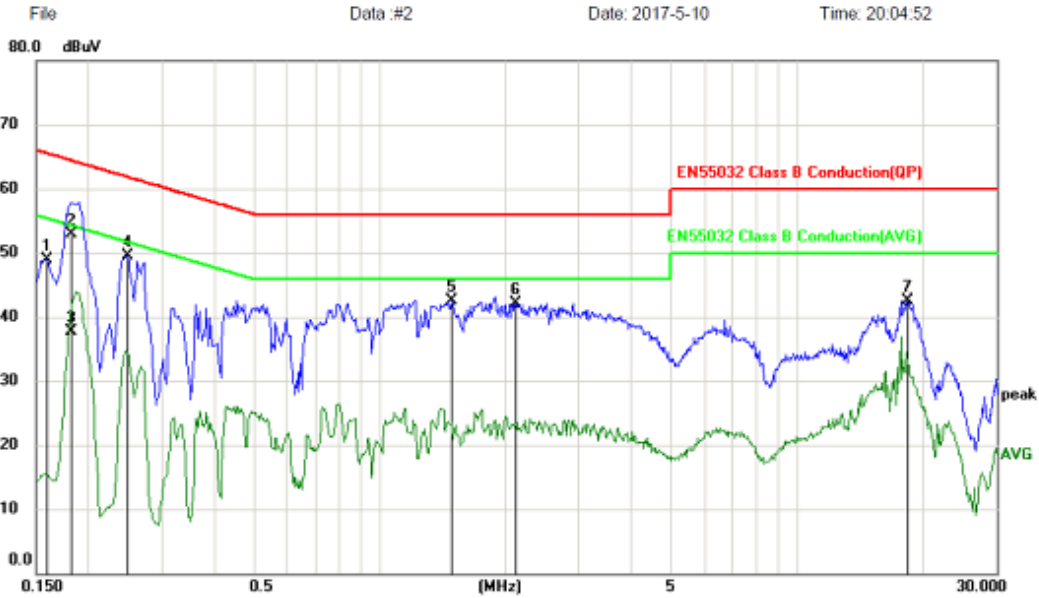

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	39.25	9.73	48.98	65.52	-16.54	peak	
2	*	0.1815	43.19	9.74	52.93	64.42	-11.49	QP	
3		0.1815	27.99	9.74	37.73	54.42	-16.69	AVG	
4		0.2490	39.83	9.76	49.59	61.79	-12.20	peak	
5		1.4910	32.60	9.87	42.47	56.00	-13.53	peak	
6		2.1165	32.27	9.93	42.20	56.00	-13.80	peak	
7		18.3705	32.07	10.48	42.55	60.00	-17.45	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)


Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Site LAB
 Limit: EN55032 Class B Conduction(QP)
 EUT:
 M/N:
 Mode:
 Note:

Phase: **L1**
 Power: DC 12V

Temperature: 24.2
 Humidity: 53 %

Conducted Emission Measurement

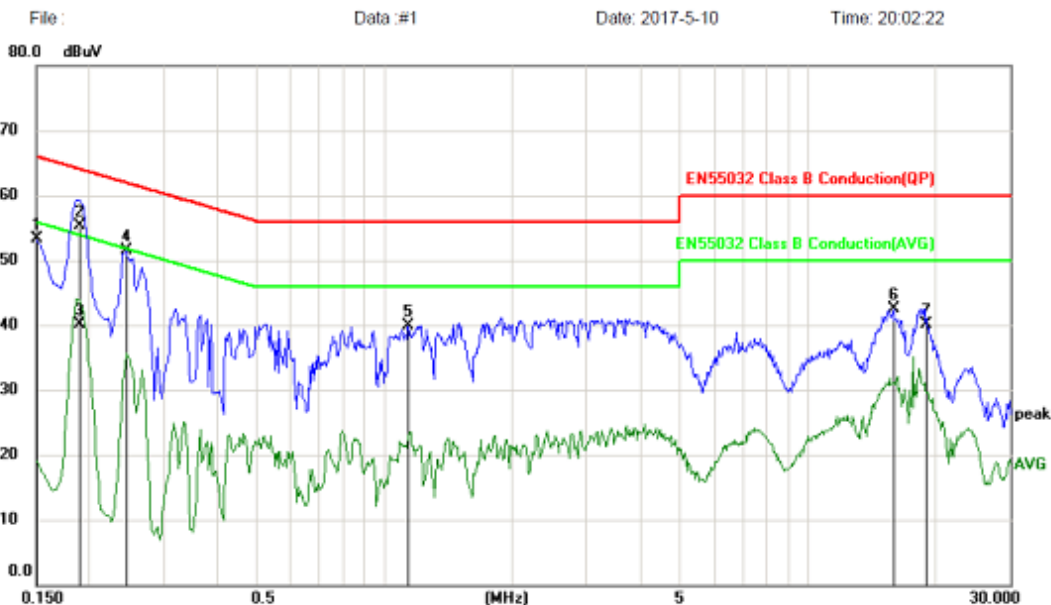

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	43.54	9.73	53.27	66.00	-12.73	peak	
2	*	0.1905	45.47	9.74	55.21	64.01	-8.80	QP	
3		0.1905	30.29	9.74	40.03	54.01	-13.98	AVG	
4		0.2445	41.77	9.76	51.53	61.94	-10.41	peak	
5		1.1400	30.15	9.84	39.99	56.00	-16.01	peak	
6		15.9225	32.11	10.47	42.58	60.00	-17.42	peak	
7		19.0230	29.63	10.49	40.12	60.00	-19.88	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

11. Antenna Requirements

11.1. Standard Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Antenna Connected Construction

The antenna is PCB antenna and no consideration of replacement. Please see EUT photo for details.

11.3. Results

The EUT antenna is PCB Antenna. It comply with the standard requirement.

12. Test setup photo

Please refer to T1870080 04.

13. Photos of EUT

Please refer to T1870080 04.

-----END OF REPORT-----