

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-22N-RWD-095

Reception No. : 2209003086

Applicant : UNION COMMUNITY

Address : 12F, Munjeong Daemyeong Valeon bldg, 127 Beobwon-ro Songpa-gu, Seoul, South Korea

Manufacturer : UNION COMMUNITY

Address : 12F, Munjeong Daemyeong Valeon bldg, 127 Beobwon-ro Songpa-gu, Seoul, South Korea

Type of Equipment : Access controller

FCC ID : XX2-UBIO-X-FACERF

Model Name : UBio-X Face RF

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 14 pages (including this page)

Date of Incoming : November 15, 2022

Date of Issuing : November 29, 2022

SUMMARY

The equipment complies with the requirements of *FCC CFR 47 PART 15 Subpart C Section 15.209 and 15.207*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production.


This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.



Tested by
Joon-Woo, Kim / Assistant Manager
ONETECH Corp.



Reviewed by
Tae-Ho, Kim / General Manager
ONETECH Corp.

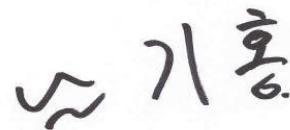

Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION	5
2.1 PRODUCT DESCRIPTION.....	5
2.2 MODEL DIFFERENCES.....	5
2.3 RELATED SUBMITTAL(S) / GRANT(S)	5
2.4 PURPOSE OF THE TEST	5
2.5 TEST METHODOLOGY.....	5
2.6 TEST FACILITY.....	5
3. SYSTEM TEST CONFIGURATION	6
3.1 JUSTIFICATION.....	6
3.2 PERIPHERAL EQUIPMENT	6
3.3 MODE OF OPERATION DURING THE TEST	6
3.4 EQUIPMENT MODIFICATIONS.....	6
3.5 CONFIGURATION OF TEST SYSTEM.....	7
3.6 ANTENNA REQUIREMENT	7
4. PRELIMINARY TEST	7
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	7
4.2 RADIATED EMISSIONS TESTS.....	7
5. FINAL RESULT OF MEASUREMENT.....	8
5.1 CONDUCTED EMISSION TEST.....	8
5.2 RADIATED EMISSION TEST BELOW 30 MHZ.....	10
5.3 RADIATED EMISSION TEST ABOVE 30 MHZ	11
5.4 BANDWIDTH OF THE OPERATING FREQUENCY.....	12
6. FIELD STRENGTH CALCULATION	13
7. LIST OF TEST EQUIPMENT	14

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-22N-RWD-095	November 29, 2022	Initial Release	All

1. VERIFICATION OF COMPLIANCE

- . APPLICANT : UNION COMMUNITY
- . ADDRESS : 12F, Munjeong Daemyeong Valeon bldg, 127 Beobwon-ro Songpa-gu, Seoul, South Korea
- . CONTACT PERSON : Dong Ho, Lee
- . TELEPHONE NO : +82-2-6488-3054
- . FCC ID : XX2-UBIO-X-FACERF
- . MODEL NO/NAME : UBio-X Face RF
- . SERIAL NUMBER : N/A
- . DATE : November 29, 2022

DEVICE TYPE	DCD – Part 15, Low Power Transmitter below 1 705 kHz
E.U.T. DESCRIPTION	Access controller
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR47 Part 15 Subpart C Section 15.207 and 15.209
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	10 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The UNION COMMUNITY, Model UBio-X Face RF (referred to as the EUT in this report) is an Access controller, Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Access controller
TRANSMITTING FREQUENCY	125 kHz, 2 402 MHz ~ 2 480 MHz
MODULATION	ASK
ANTENNA TYPE	Coil Antenna
LIST OF EACH OSC. or CRY. FREQ.(FREQ. >= 1 MHz)	12 MHz, 24 MHz, 25 MHz
USED AC/DC ADAPTER	Output : DC 15 V, 4.0 A Model No : KPL-060H-VI Manufacturer : Channel Well Technology (Guangzhou)Co., LTd.

2.2 Model Differences

-. None

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.209 and 15.207.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	N/A	FR-910B_V1.4	N/A
RF BOARD	N/A	PUBXRF01	N/A
CAMERA BOARD	N/A	M20	N/A
LED BOARD	N/A	PFR910BLD01 V10	N/A
DISPLAY	N/A	N/A	N/A
SPEAKER	N/A	N/A	N/A
Bluetooth Module	Union Community	F1DC2706-A	XX2-F1DC2706-A
ADAPTER	Channel Well Technology (Guangzhou)Co., Ltd.	KPL-060H-VI	N/A

3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
UBio-X Face RF	UNION COMMUNITY	Access controller (EUT)	-
KPL-060H-VI	Channel Well Technology (Guangzhou)Co., Ltd.	ADAPTER	EUT
N/A	N/A	Door Open Switch	EUT
BHL-700C	ELECTRIC BOLT	Door lock	EUT
N/A	N/A	125 kHz Card	EUT

3.3 Mode of operation during the test

-. The EUT has 125 kHz RF boards for reading Card and program was used for making continuous transmission mode during the test.

3.4 Equipment Modifications

-. None

3.5 Configuration of Test System

Line Conducted Test : The EUT was connected to adaptor and the power of adaptor was connected to LISN. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test : Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber.
 For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The measuring antenna is an electrically screened loop antenna.
 The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

3.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is a Coil Antenna so there is no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Emission Test


Humidity Level : 53.6 % R.H. Temperature: 23.6 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)
 Result : PASSED

EUT : Access controller Date: November 16, 2022
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)
 Tested Line : HOT LINE

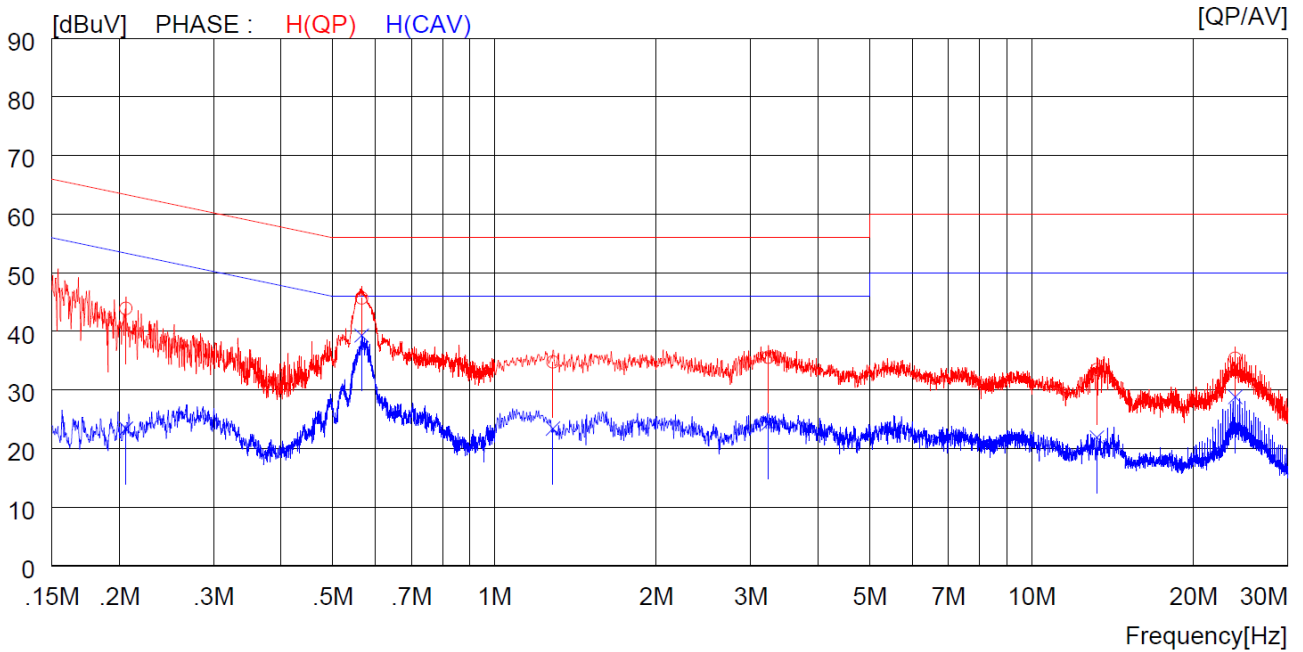

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.20600	33.9	----	10.0	43.9	----	63.4	----	19.5	----	H (QP)
2	0.56600	35.6	----	10.1	45.7	----	56.0	----	10.3	----	H (QP)
3	1.28400	24.5	----	10.3	34.8	----	56.0	----	21.2	----	H (QP)
4	3.23600	25.3	----	10.3	35.6	----	56.0	----	20.4	----	H (QP)
5	13.24000	23.1	----	10.4	33.5	----	60.0	----	26.5	----	H (QP)
6	23.94000	24.7	----	10.7	35.4	----	60.0	----	24.6	----	H (QP)
7	0.20600	----	13.4	10.0	----	23.4	----	53.4	----	30.0	H (CAV)
8	0.56600	----	29.2	10.1	----	39.3	----	46.0	----	6.7	H (CAV)
9	1.28400	----	13.1	10.3	----	23.4	----	46.0	----	22.6	H (CAV)
10	3.23600	----	14.0	10.3	----	24.3	----	46.0	----	21.7	H (CAV)
11	13.24000	----	11.5	10.4	----	21.9	----	50.0	----	28.1	H (CAV)
12	23.94000	----	18.1	10.7	----	28.8	----	50.0	----	21.2	H (CAV)

Tested Line : NEUTRAL LINE

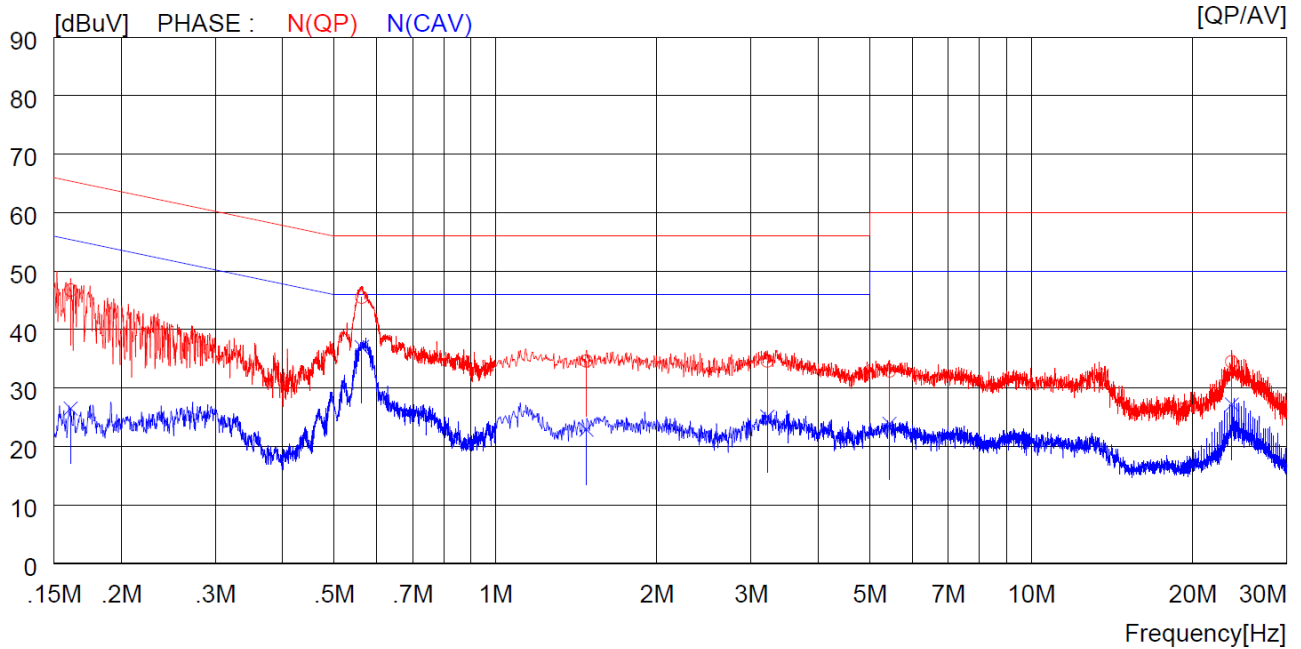

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16100	36.8	----	10.0	46.8	----	65.4	----	18.6	----	N(QP)
2	0.56300	35.4	----	10.1	45.5	----	56.0	----	10.5	----	N(QP)
3	1.47600	24.3	----	10.3	34.6	----	56.0	----	21.4	----	N(QP)
4	3.21600	24.3	----	10.3	34.6	----	56.0	----	21.4	----	N(QP)
5	5.43500	22.6	----	10.3	32.9	----	60.0	----	27.1	----	N(QP)
6	23.69000	23.8	----	10.7	34.5	----	60.0	----	25.5	----	N(QP)
7	0.16100	----	16.5	10.0	----	26.5	----	55.4	----	28.9	N(CAV)
8	0.56300	----	26.9	10.1	----	37.0	----	46.0	----	9.0	N(CAV)
9	1.47600	----	12.6	10.3	----	22.9	----	46.0	----	23.1	N(CAV)
10	3.21600	----	14.8	10.3	----	25.1	----	46.0	----	20.9	N(CAV)
11	5.43500	----	13.6	10.3	----	23.9	----	50.0	----	26.1	N(CAV)
12	23.69000	----	16.5	10.7	----	27.2	----	50.0	----	22.8	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

5.2 Radiated Emission Test below 30 MHz

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 53.5 % R.H. Temperature: 23.5 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209
 Type of Test : Low Power Transmitter below 1 705 kHz
 Result : PASSED

EUT : Access controller Date: November 15, 2022 ~ November 17, 2022

Distance : 3 m

Frequency (MHz)	Reading (dBµV)	Ant. Pol. (H/V)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBµV/m)	Limits (dBµV/m)	Margin (dB)
0.009	43.14	V	270	18.6	0.2	61.94	128.52	66.58
0.015	41.63	H	85	19.0	0.2	60.83	124.08	63.25
0.031	36.86	H	330	19.0	0.2	56.06	117.78	61.72
0.046	25.88	V	277	19.0	0.2	45.08	114.35	69.27
0.062	24.86	V	270	19.0	0.2	44.06	111.76	67.70
0.122	60.09	V	360	19.0	0.2	79.29	105.88	26.59
0.242	24.88	H	270	19.0	0.3	44.18	99.93	55.75
0.366	29.10	H	270	19.0	0.3	48.4	96.33	47.93
1.101	16.89	V	85	18.9	0.5	36.29	66.77	30.48

Radiated Emission Tabulated Data below 30 MHz

Note: According to the distance of measurements was reduced to 3 m, the limit was extrapolated by using the square of an inverse linear distance extrapolation factor (40 dB/decade) as follows.

Limit calculation: Limit at specified distance + 40log (300/3) = Limit + 80 dB for up to 0.49 MHz


Limit at specified distance + 40log (30/3) = Limit + 40 dB for above 0.49 MHz

5.3 Radiated Emission Test above 30 MHz

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 53.6 % R.H. Temperature: 23.6 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Type of Test : Low Power Transmitter below 1 705 kHz
 Result : PASSED

EUT : Access controller Date: November 16, 2022
 Distance : 3 m

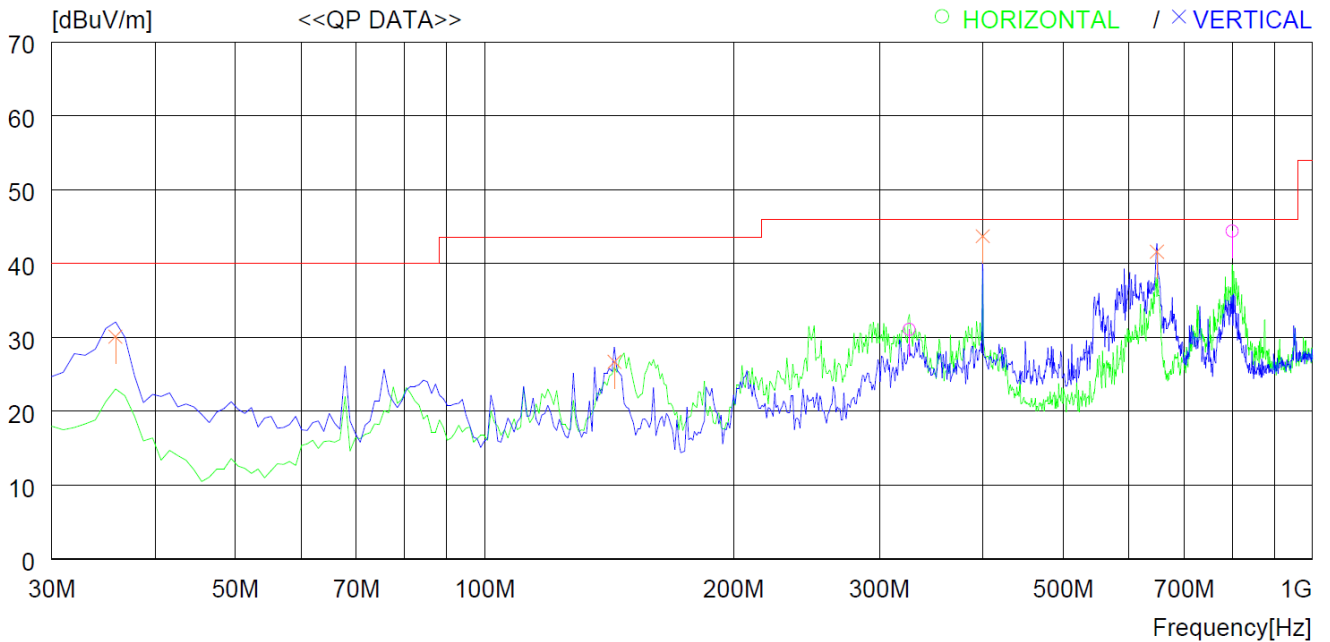

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	325.850	41.3	19.8	3.0	33.0	31.1	46.0	14.9	100	359
2	800.172	45.3	27.1	5.0	33.0	44.4	46.0	1.6	200	292
----- Vertical -----										
3	35.820	43.1	19.0	1.1	33.1	30.1	40.0	9.9	100	341
4	143.490	38.6	19.1	2.0	33.0	26.7	43.5	16.8	100	84
5	399.570	52.0	21.2	3.4	32.9	43.7	46.0	2.3	100	0
6	648.856	45.7	24.9	4.4	33.4	41.6	46.0	4.4	100	191

5.4 Bandwidth of the operating frequency


Humidity Level : 48 % R.H. Temperature: 22 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209
 Type of Test : Low Power Transmitter below 1 705 kHz
 Result : PASSED

EUT : Access controller Date: October 06, 2022 ~ October 12, 2022
 Resolution Bandwidth : 0.3 kHz
 Video Bandwidth : 1.0 kHz
 SPAN : 5.00 kHz

Carrier Freq. (kHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
122.109	0.739 3	None	The point 20 dB down from the modulated carrier

Remark: Please refer to Photo Data for bandwidth for test data.

Photo Data for bandwidth

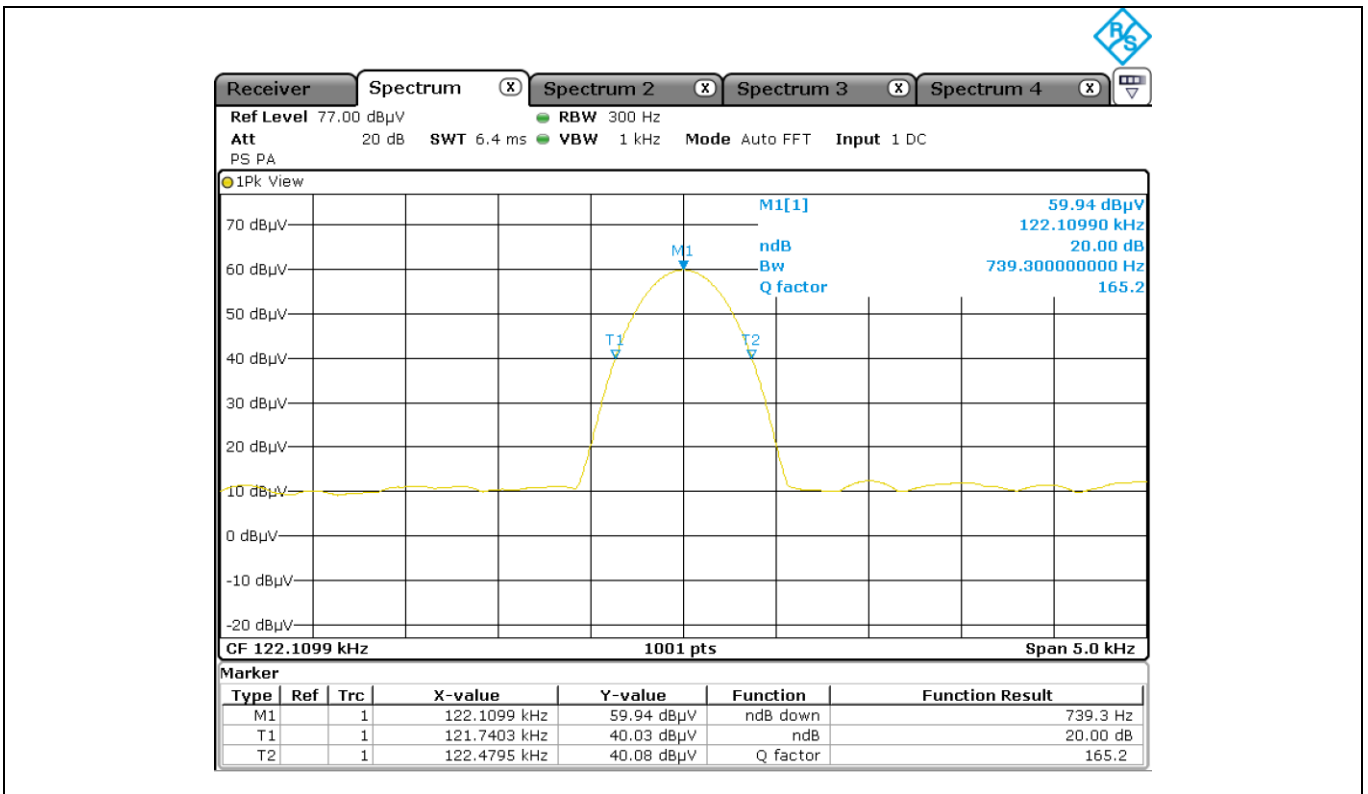

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses.

+ Meter reading	(dB μ V)
- Amplifier Gain	(dB)
+ Cable Loss	(dB)
- Antenna Factor	(dB/m)
<hr/>	
= Corrected Result	(dB μ V/m)

Margin (dB)	
Specification Limit	(dB μ V/m)
- Corrected Result	(dB μ V/m)
<hr/>	
= dB Relative to Spec	(\pm dB)

7. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
FSV40-N	Rohde & Schwarz	SIGNAL ANALYZER	101372	Jul. 14, 2022 (1Y)
ESR	Rohde & Schwarz	EMI Test Receiver	101615	Fed. 24, 2022 (1Y)
310N	Sonoma Instrument	AMPLIFIER	392756	Oct. 14, 2022 (1Y)
HLP-2008	TDK	Hybrid Antenna	131316	Mar. 07, 2022 (2Y)
DT2000-2t	Innco System	Turn Table	N/A	N/A
CO3000	Innco Systems GmbH	Controller	1026/40960617/P	N/A
MA-4640-XPET	Innco Systems GmbH	Antenna Master	MA4640/652/ 43100318/P/-	N/A
HLA 6121	TESEQ	Loop Antenna	50841	Apr. 13, 2022 (2Y)
ESCI	Rohde & Schwarz	Test Receiver	101012	Fed. 24, 2022 (1Y)
NSLK8128	Schwarzbeck	V - LISN (4*32/50A)	8128216	Mar. 14, 2022 (1Y)
ESH3-Z2	Rohde & Schwarz	Pulse Limiter	100655	Mar. 14, 2022 (1Y)
SH-242	ESPEC	Temperature & Humidity Chamber	00931001589	Jan. 18, 2022 (1Y)
GP-4303D	LG Precision Co.,Ltd	DC Power Supply	5071069	Jan. 03, 2022 (1Y)