



# FCC PART 15.247 TEST REPORT

For

## RCA Communications Systems

133 West Market Street, Suite227, Indianapolis, Indiana 46204, United States

**FCC ID: XYH-RDR6350V**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Digital Two-Way Radio
<b>Report Number:</b> RSZ180308008-00B	
<b>Report Date:</b> 2018-04-16	
<b>Reviewed By:</b> Rocky Kang RF Engineer	<i>Rocky Kang</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>FCC §15.247 (i) &amp; §1.1307 (b) (1) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP.....	13
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	14
TEST PROCEDURE .....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST RESULTS SUMMARY.....	14
TEST DATA .....	15
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST DATA .....	23
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>36</b>
APPLICABLE STANDARD .....	36
TEST PROCEDURE .....	36
TEST DATA .....	36

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....39**  
    APPLICABLE STANDARD .....39  
    TEST PROCEDURE .....39  
    TEST DATA .....39

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....55**  
    APPLICABLE STANDARD .....55  
    TEST PROCEDURE .....55  
    TEST DATA .....55

**FCC §15.247(d) - BAND EDGES TESTING .....56**  
    APPLICABLE STANDARD .....56  
    TEST PROCEDURE .....56  
    TEST DATA .....56

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *RCA Communications Systems*'s product, model number: *RDR6350V* (FCC ID: *XYH-RDR6350V*) or the "EUT" in this report was a *Digital Two-Way Radio*, which was measured approximately: 17.0 cm (L) × 17.0 cm (W) × 6.0 cm (H), rated with input voltage: DC 13.6V.

*\*All measurement and test data in this report was gathered from production sample serial number: 1800280. (Assigned by BAACL, Shenzhen). The EUT supplied by the applicant was received on 2018-03-08.*

### Objective

This test report is prepared on behalf of *RCA Communications Systems* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 90 TNB submissions with FCC ID: XYH-RDR6350V.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.5dB
RF conducted test with spectrum		±1.5dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3°C
Humidity		±6%
Supply voltages		±0.4%

### **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 342867, the FCC Designation No. : CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

“bluetest.exe” exercise software was used.  
Power level is default.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
N/A	Battery	N/A	N/A

### External I/O Cable

Cable Description	Length (m)	From/Port	To
N/A	N/A	N/A	N/A

### Block Diagram of Test Setup

For Radiated Emissions:

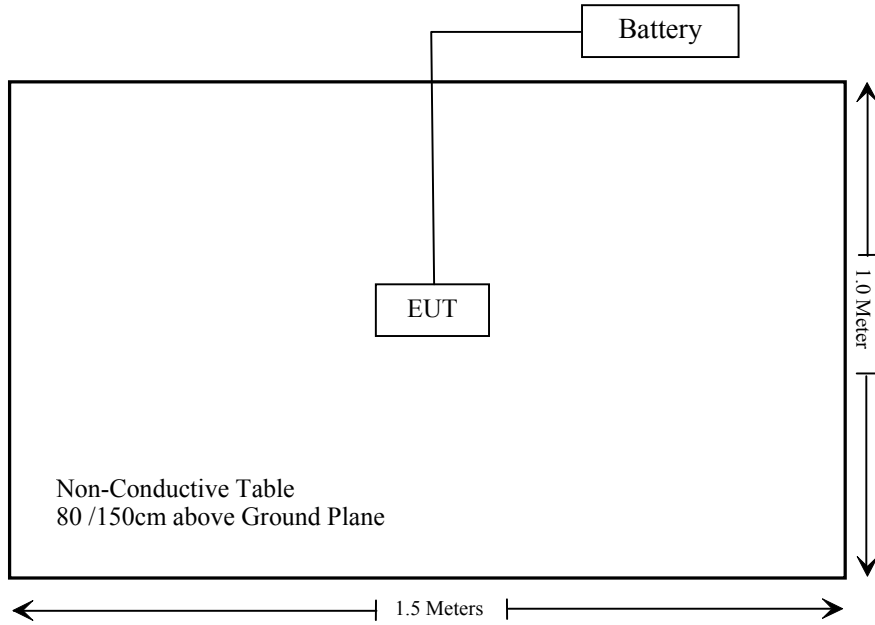

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i) & §1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
A.H.System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-17
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
Sinoscite	Notch Filter	BSF2402-2480MN-0898-001	N/A	2017-05-21	2018-05-21
<b>RF Conducted Test</b>					
Agilent	P-Series Power Meter	N1912A	MY5000448	2017-12-05	2018-12-05
Agilent	Wideband Power Sensor	N1921A	MY54210016	2017-12-05	2018-12-05
WEINSCHL	10dB Attenuator	N/A	N/A	2017-11-22	2018-05-23
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

**Result**

**Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune-Up Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	2.0	1.58	8.0	6.31	80	0.0001	1

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Simultaneous transmitting consideration: (referring to the TNB report, the highest MPE is 0.65mW/cm<sup>2</sup>)

The ratio=MPE/limit<sub>TNB</sub>+MPE/limit<sub>DSS</sub>=0.65/1+0.0001/1=0.6501 < 1.0

**Result: Compliance.** The device meets MPE requirement for Occupational/Controlled use at 80cm distance.

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.


**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**

**Applicable Standard**


FCC §15.205; §15.209; §15.247(d)

**EUT Setup**

**Below 1 GHz:**

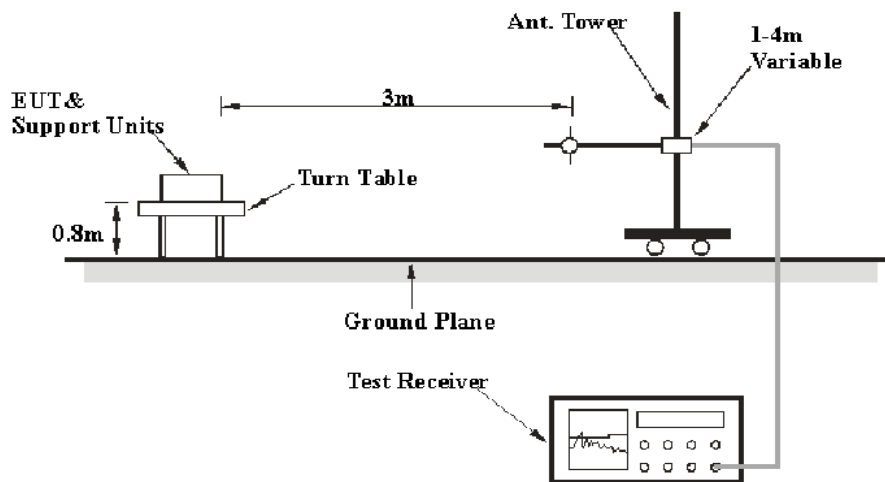

**Above 1GHz:**

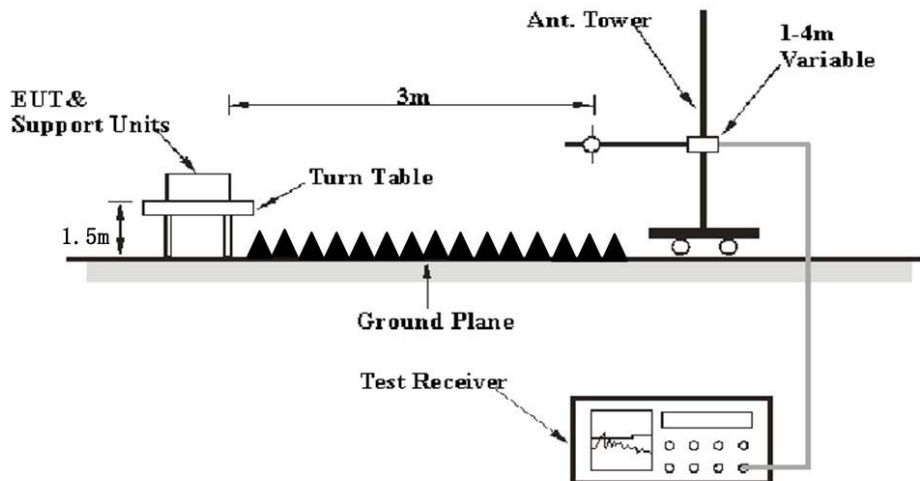

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BAEL,  $U_{(L_m)}$  is less than  $U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

**Test Data**


**Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Tracy Hu on 2018-04-10.

EUT operation mode: Transmitting (Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK mode, the worst case is GFSK Mode)

**30 MHz~1 GHz:**

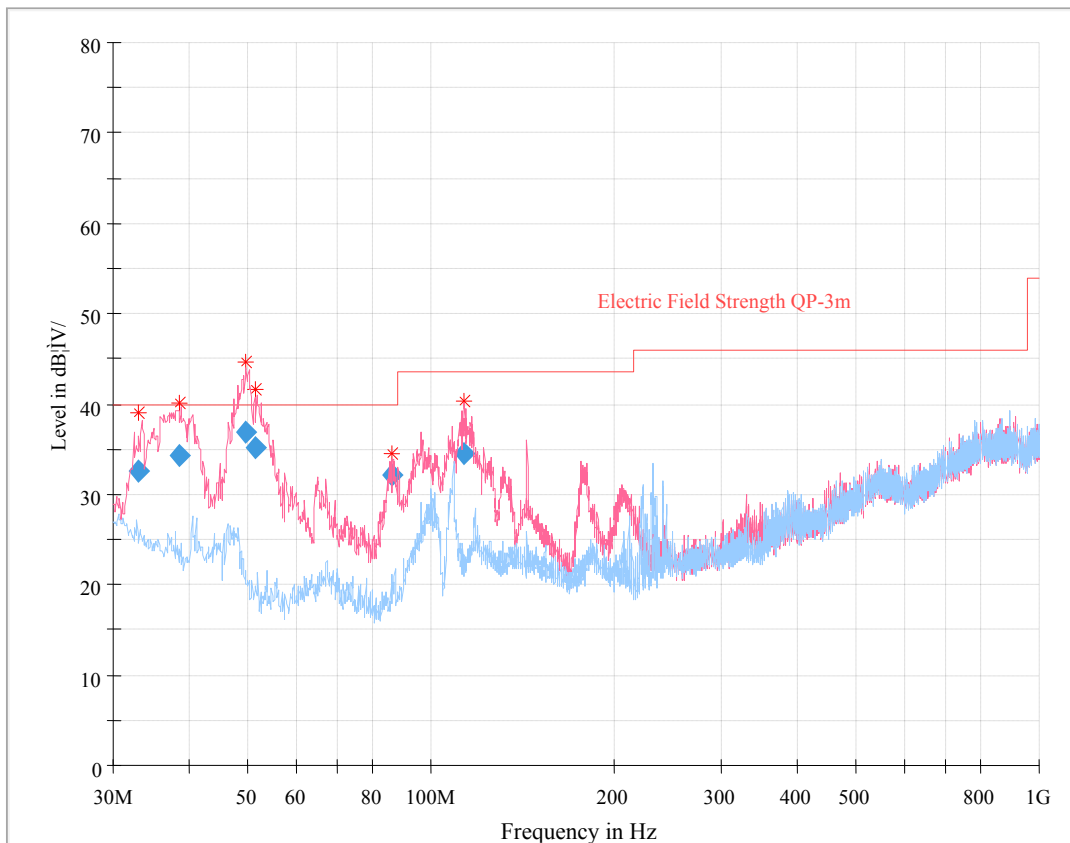

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
32.998125	32.49	116.0	V	266.0	-1.7	40.00	7.51
38.443125	34.20	100.0	V	272.0	-5.1	40.00	5.80
49.440625	36.97	113.0	V	75.0	-10.8	40.00	3.03
51.266250	35.25	124.0	V	160.0	-11.1	40.00	4.75
86.451375	32.22	110.0	V	257.0	-10.8	40.00	7.78
113.711750	34.45	106.0	V	261.0	-7.1	43.50	9.05

**1 GHz - 25 GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
<b>Low Channel (2402 MHz)</b>									
2402.00	57.49	PK	75	1.6	H	33.92	91.41	/	/
2402.00	47.24	Ave.	75	1.6	H	33.92	81.16	/	/
2402.00	61.48	PK	190	1.4	V	33.92	95.40	/	/
2402.00	50.95	Ave.	190	1.4	V	33.92	84.87	/	/
2374.51	27.69	PK	230	1.9	V	33.92	61.61	74	12.39
2374.51	13.05	Ave.	230	1.9	V	33.92	46.97	54	7.03
2486.57	28.15	PK	97	1.8	V	34.08	62.23	74	11.77
2486.57	13.19	Ave.	97	1.8	V	34.08	47.27	54	6.73
4804.00	46.64	PK	84	1.3	V	5.84	52.48	74	21.52
4804.00	33.48	Ave.	84	1.3	V	5.84	39.32	54	14.68
<b>Middle Channel (2441 MHz)</b>									
2441.00	58.43	PK	347	1.4	H	33.92	92.35	/	/
2441.00	47.92	Ave.	347	1.4	H	33.92	81.84	/	/
2441.00	61.19	PK	236	2.2	V	33.92	95.11	/	/
2441.00	50.98	Ave.	236	2.2	V	33.92	84.90	/	/
4882.00	45.21	PK	331	1.8	V	6.21	51.42	74	22.58
4882.00	30.07	Ave.	331	1.8	V	6.21	36.28	54	17.72



Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
<b>High Channel (2480 MHz)</b>									
2480.00	61.32	PK	330	1.1	H	34.08	95.40	/	/
2480.00	51.21	Ave.	330	1.1	H	34.08	85.29	/	/
2480.00	66.09	PK	300	1.7	V	34.08	100.17	/	/
2480.00	55.37	Ave.	300	1.7	V	34.08	89.45	/	/
2358.62	28.33	PK	60	1.7	V	33.92	62.25	74	11.75
2358.62	12.95	Ave.	60	1.7	V	33.92	46.87	54	7.13
2483.53	29.13	PK	108	2.1	V	34.08	63.21	74	10.79
2483.53	14.32	Ave.	108	2.1	V	34.08	48.40	54	5.60
4960.00	42.37	PK	222	1.3	V	7.82	50.19	74	23.81
4960.00	27.95	Ave.	222	1.3	V	7.82	35.77	54	18.23

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading



Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.



And for the pre-scan is performed with the 2400-2483.5MHz band filter.

Pre-scan with Peak low channel



Horizontal

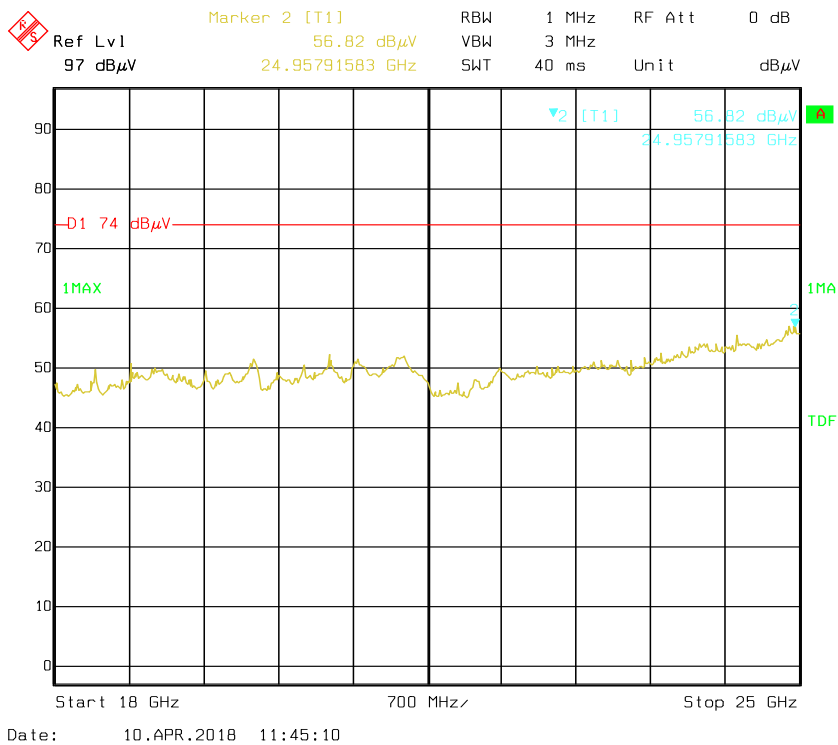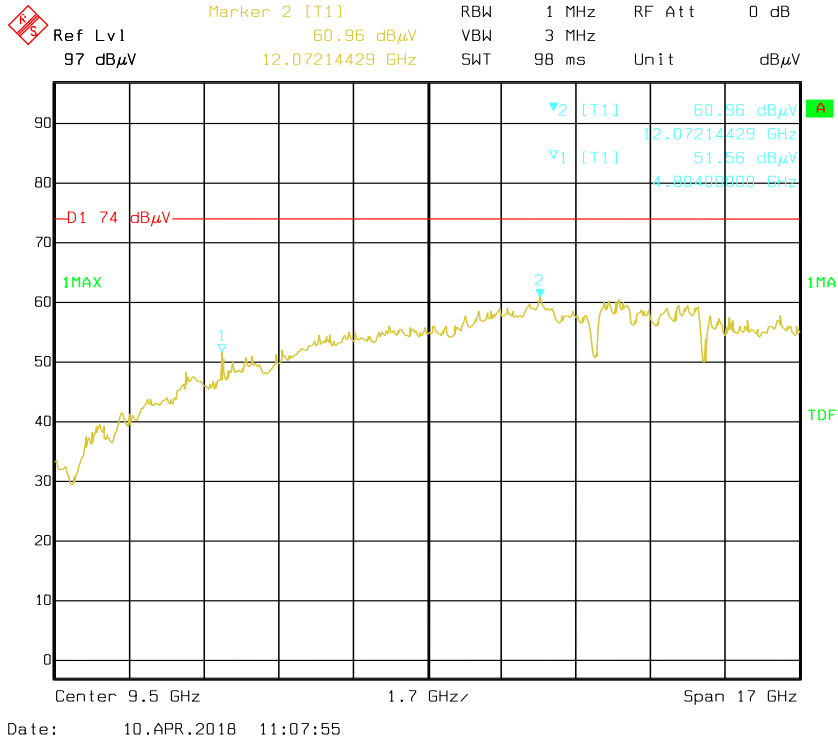


Vertical

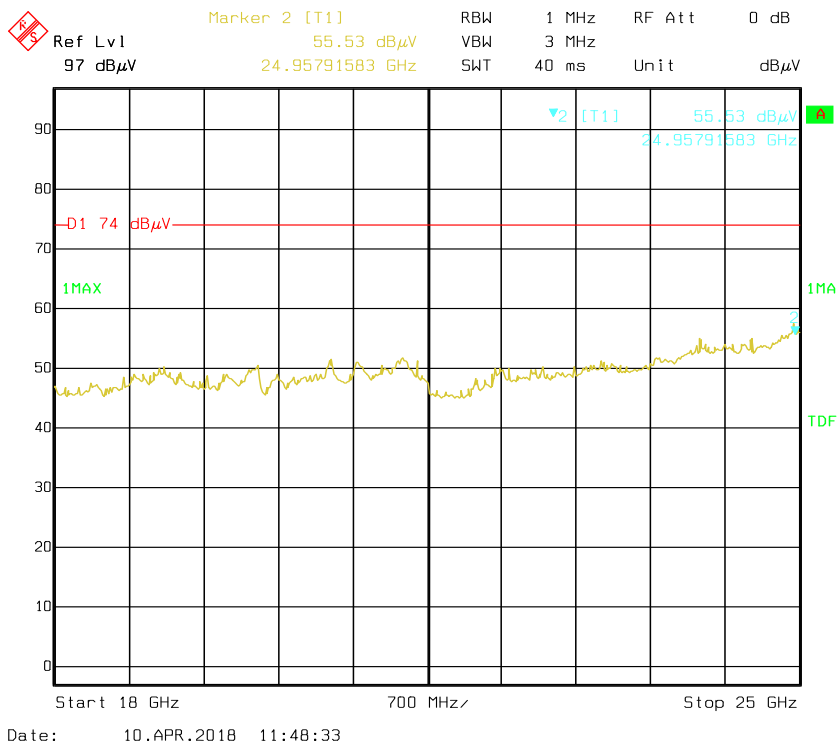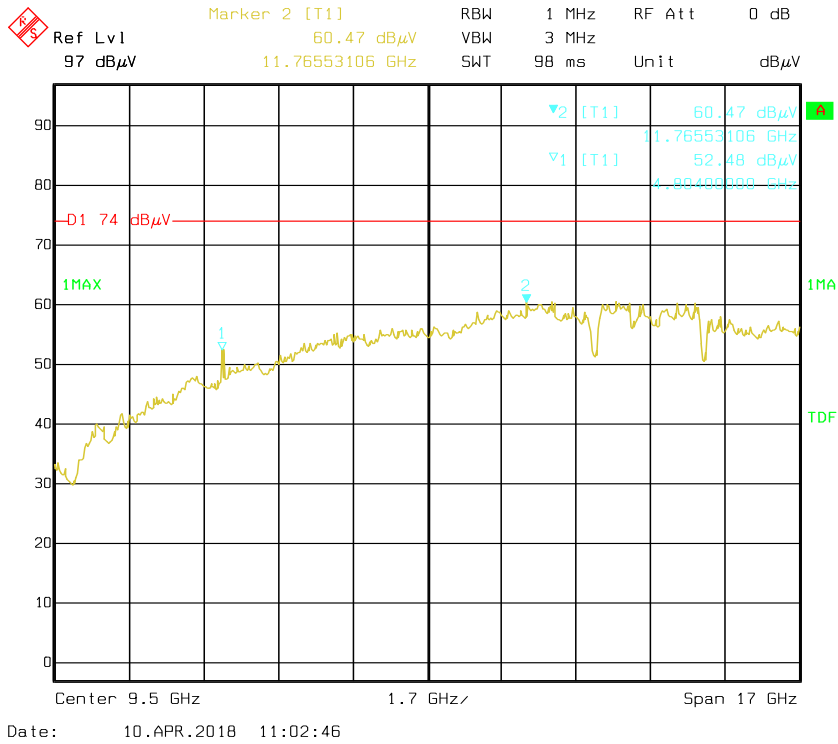




**Pre-scan for Average Value  
Horizontal**

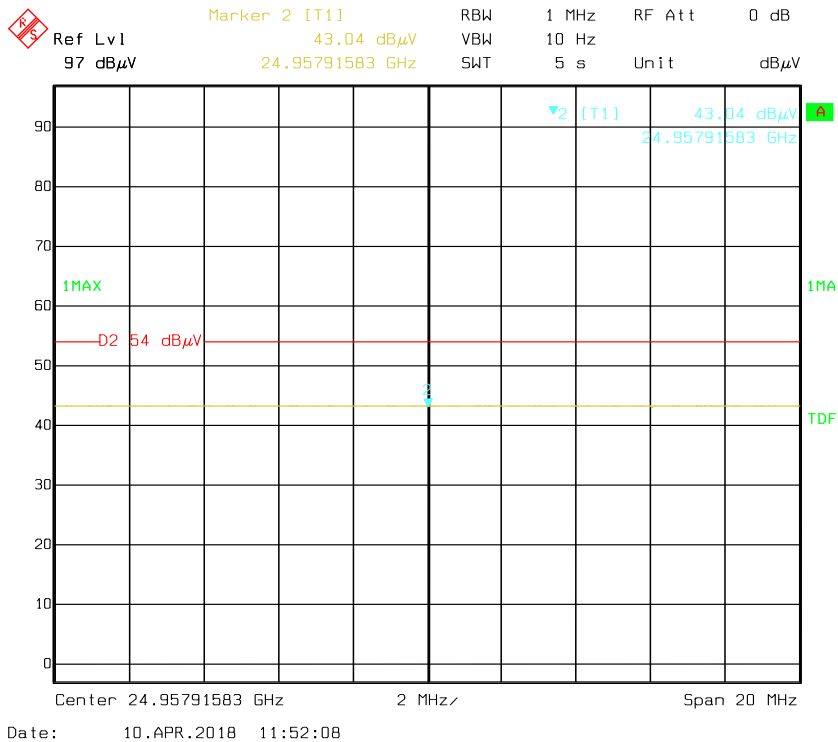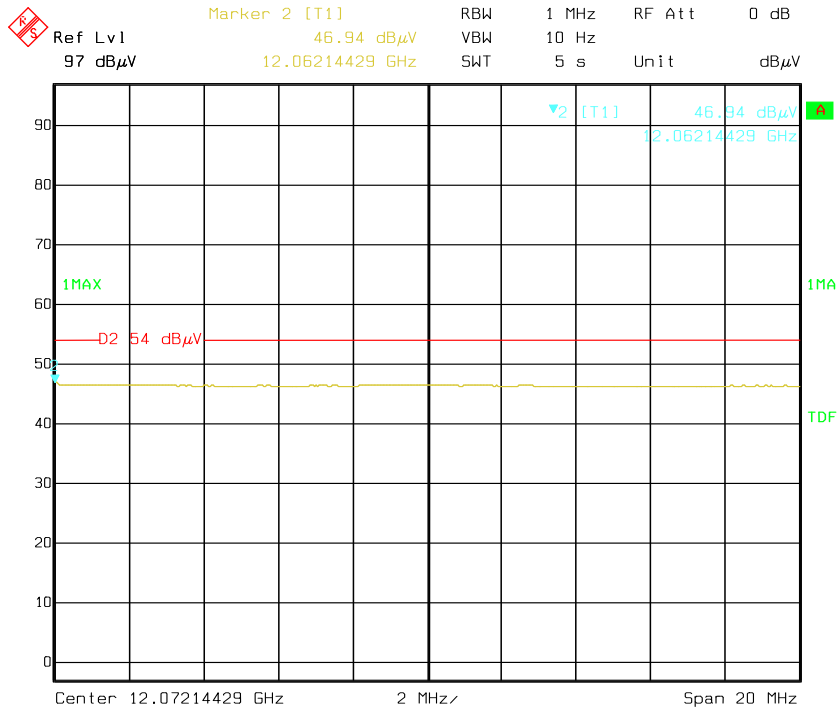

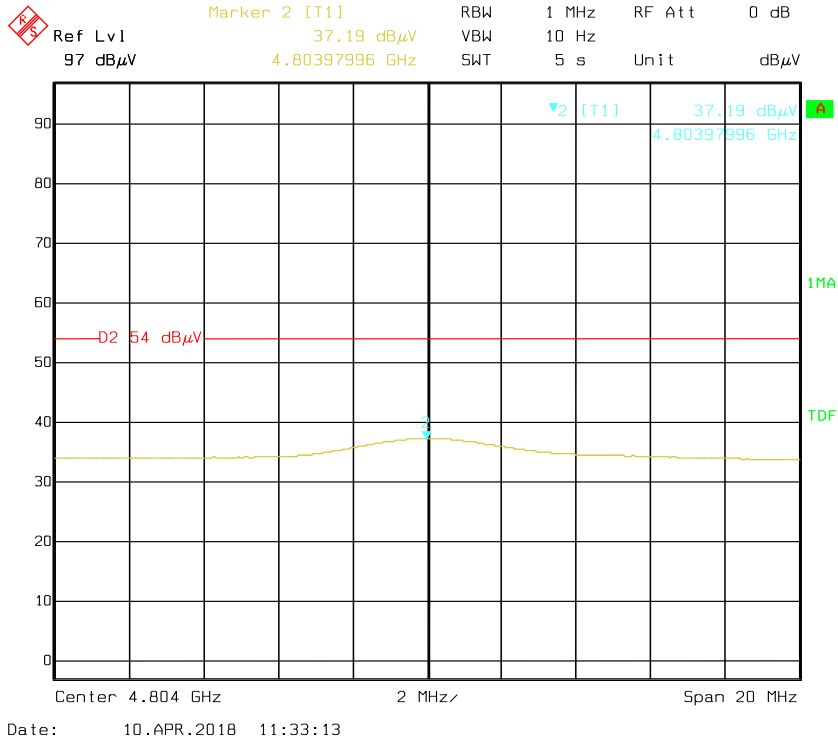

Vertical

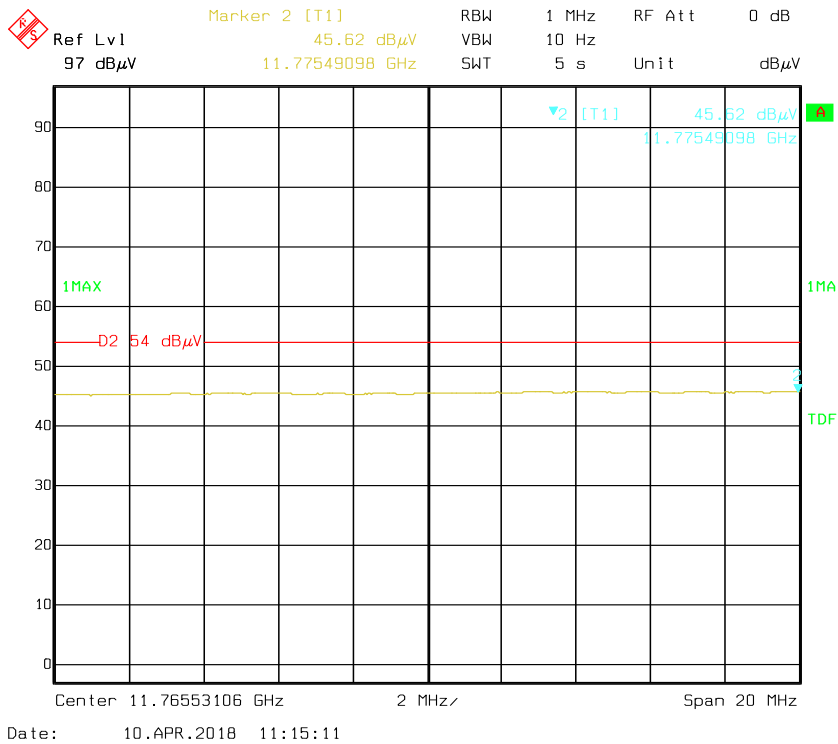

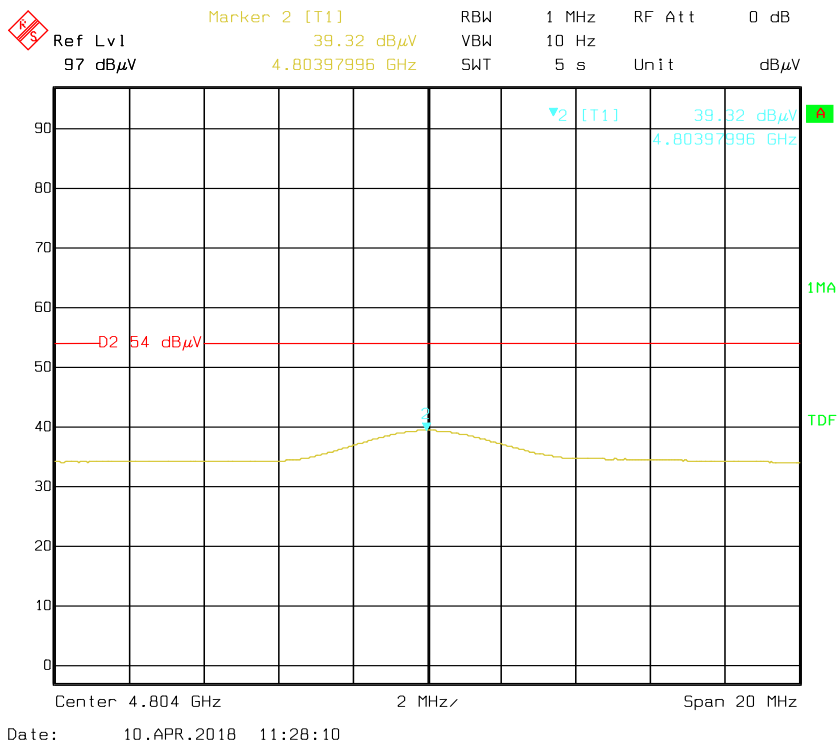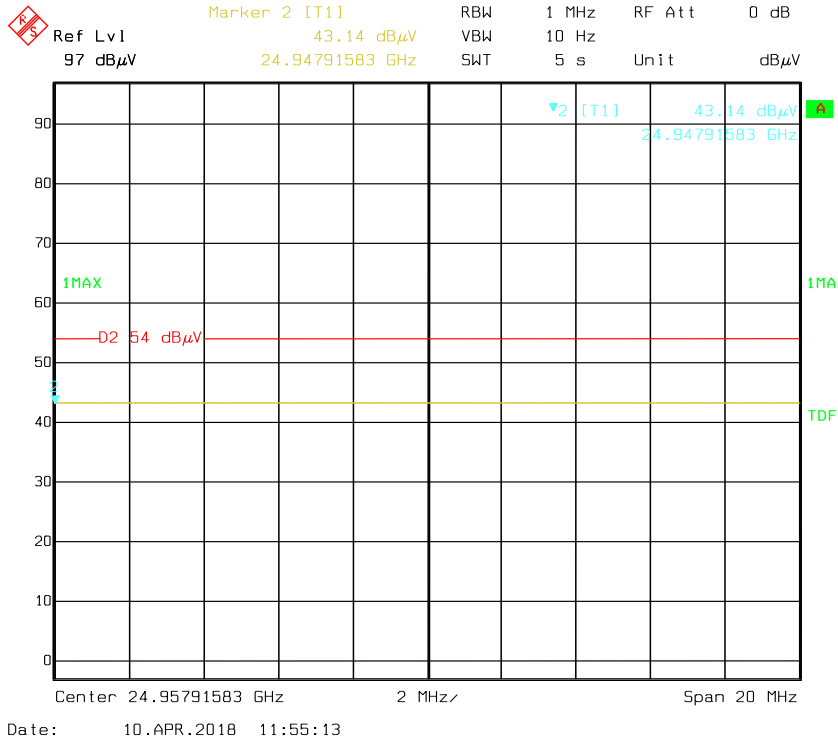

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Tracy Hu on 2018-04-12.*

*EUT operation mode: Transmitting*


Test Result: Compliance. Please refer to following table and plots

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
<b>BDR (GFSK)</b>	Low	2402	1.005	0.590	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.596	Pass
	Adjacent	2442			
	High	2480	1.000	0.590	Pass
	Adjacent	2479			
<b>EDR (π/4-DQPSK)</b>	Low	2402	1.000	0.817	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.824	Pass
	Adjacent	2442			
	High	2480	1.000	0.840	Pass
	Adjacent	2479			
<b>EDR (8DPSK)</b>	Low	2402	1.005	0.814	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.817	Pass
	Adjacent	2442			
	High	2480	1.000	0.817	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth \*2/3




**BDR (GFSK): Low Channel**

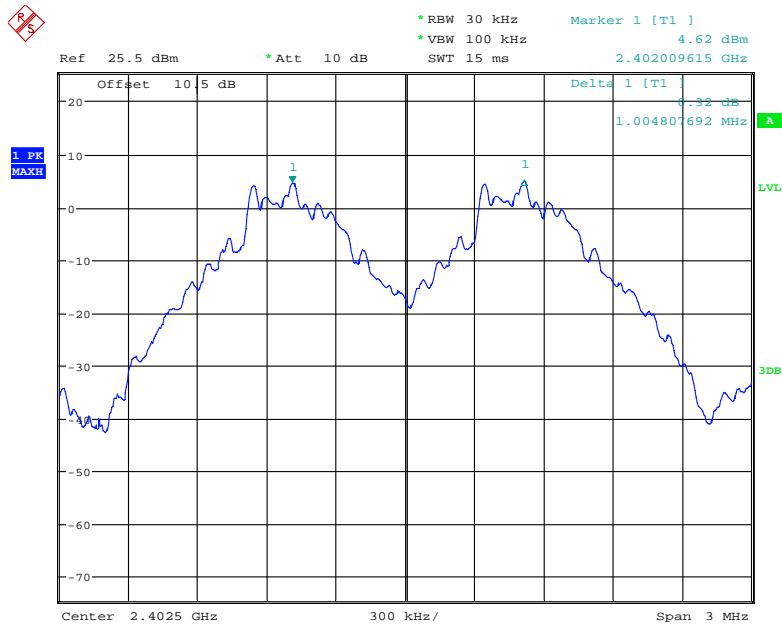


Date: 12.APR.2018 21:48:37

**BDR (GFSK): Middle Channel**

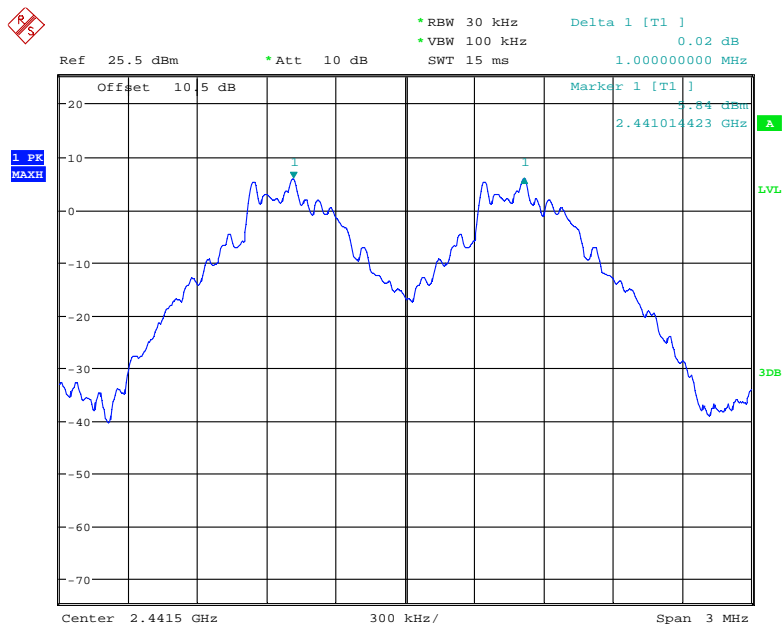


Date: 12.APR.2018 21:46:29

### BDR (GFSK): High Channel

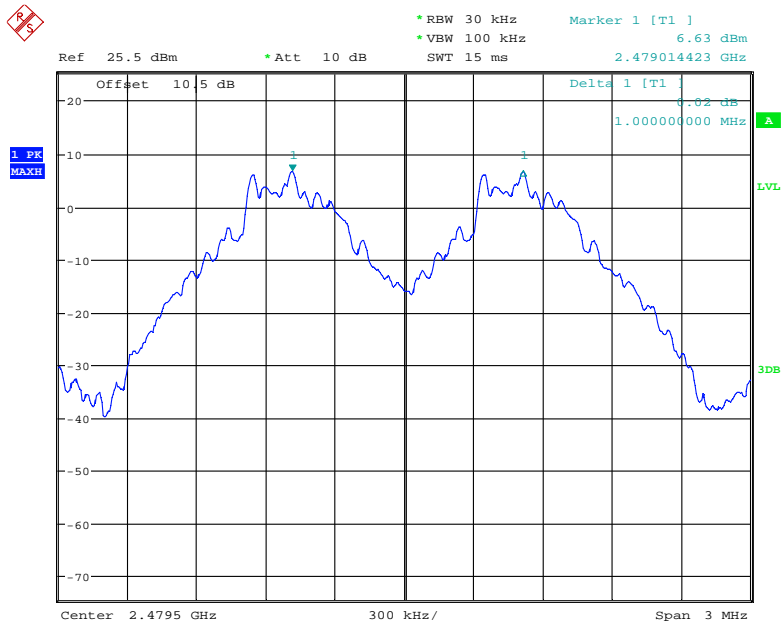


Date: 12.APR.2018 21:44:47

### EDR ( $\pi/4$ -DQPSK): Low Channel

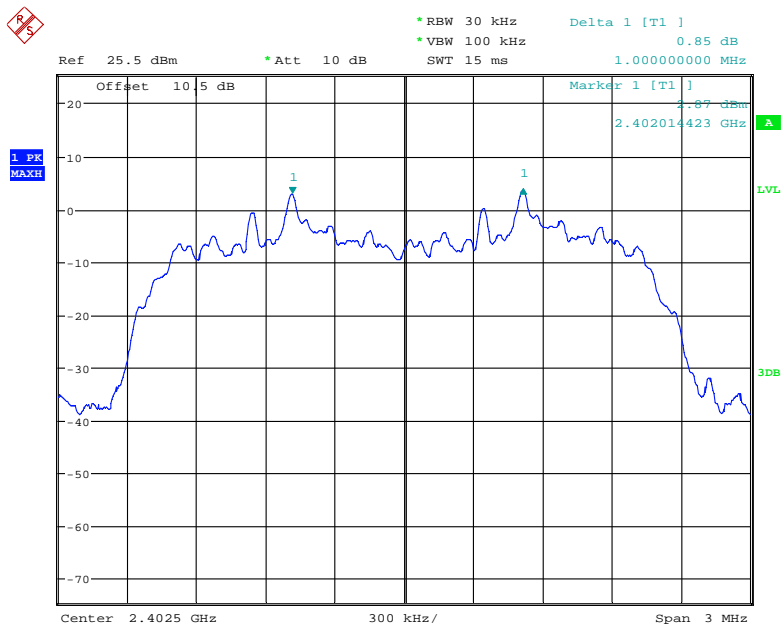


Date: 12.APR.2018 21:52:57

### EDR ( $\pi/4$ -DQPSK): Middle Channel

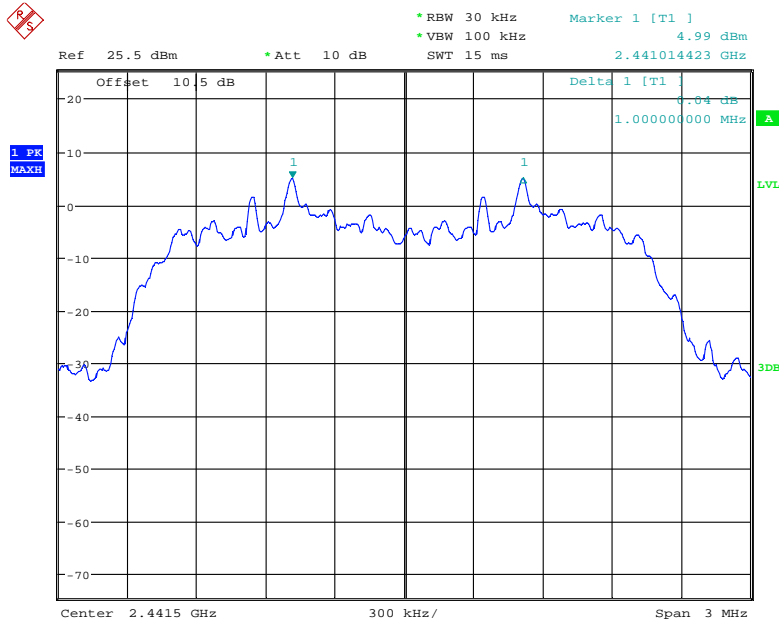


Date: 12.APR.2018 21:53:45

### EDR ( $\pi/4$ -DQPSK): High Channel

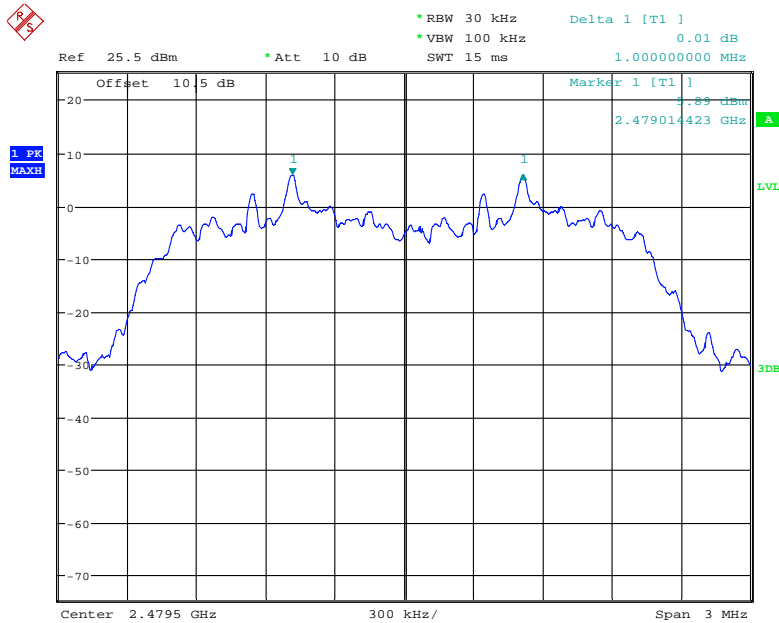


Date: 12.APR.2018 21:55:15

### EDR (8DPSK): Low Channel

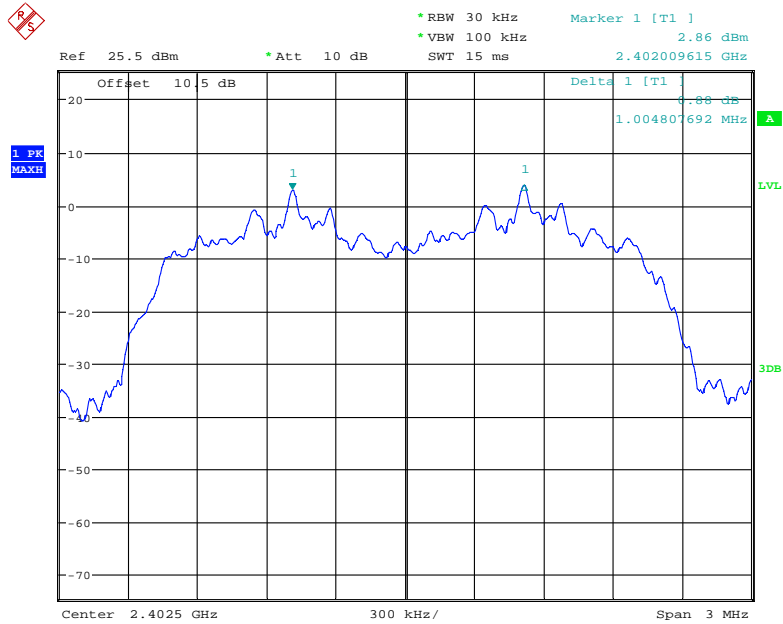


Date: 12.APR.2018 22:04:17

### EDR (8DPSK): Middle Channel

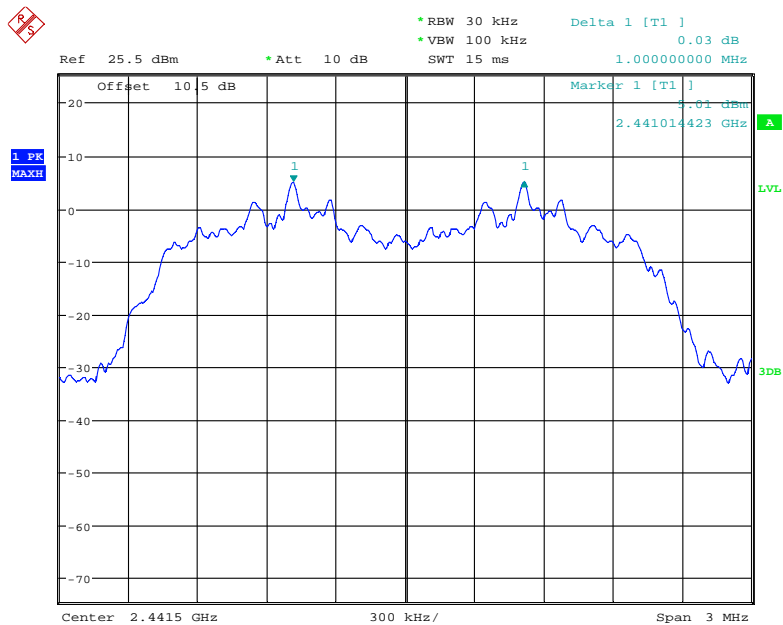

Date: 12.APR.2018 22:01:23

### EDR (8DPSK): High Channel

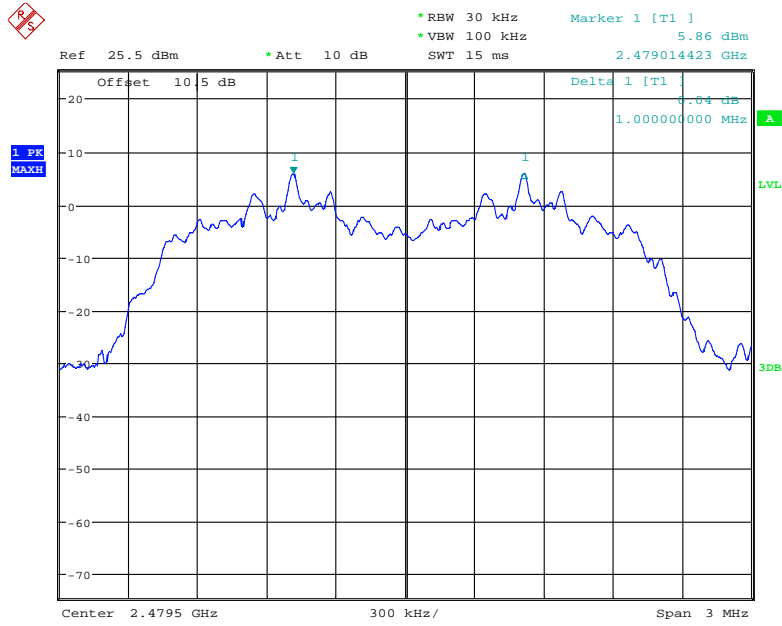

Date: 12.APR.2018 21:56:24

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Tracy Hu on 2018-04-12.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.885
	Middle	2441	0.894
	High	2480	0.885
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.226
	Middle	2441	1.236
	High	2480	1.260
EDR (8DPSK)	Low	2402	1.221
	Middle	2441	1.226
	High	2480	1.226

**BDR (GFSK): Low Channel**

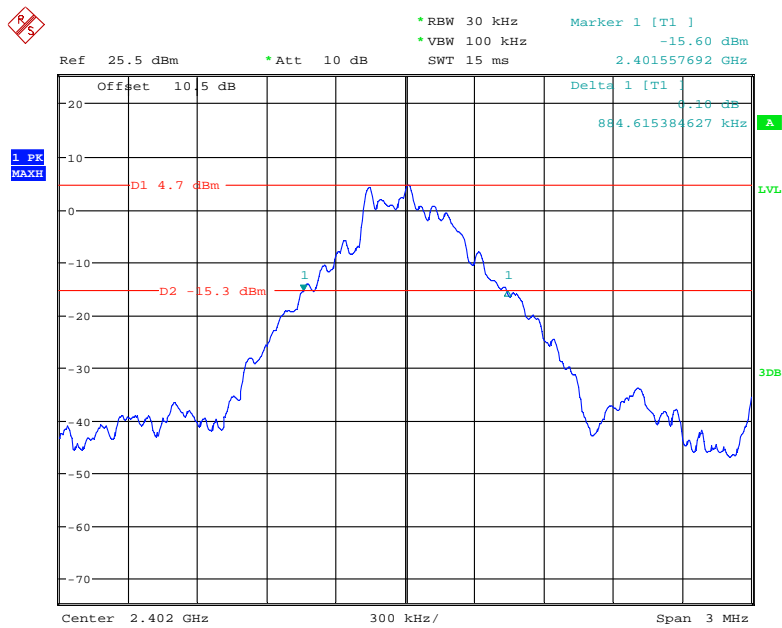


Date: 12.APR.2018 22:26:02

### BDR (GFSK): Middle Channel

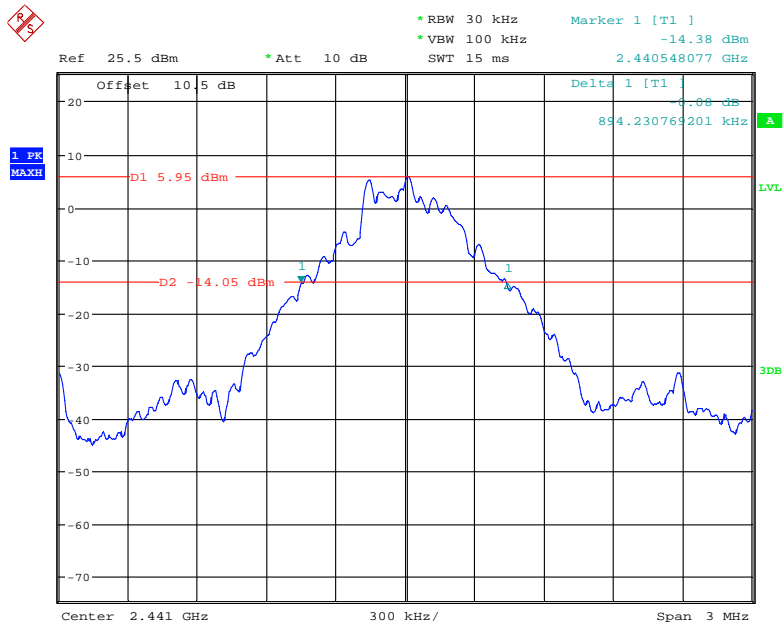

Date: 12.APR.2018 22:27:58


### BDR (GFSK): High Channel

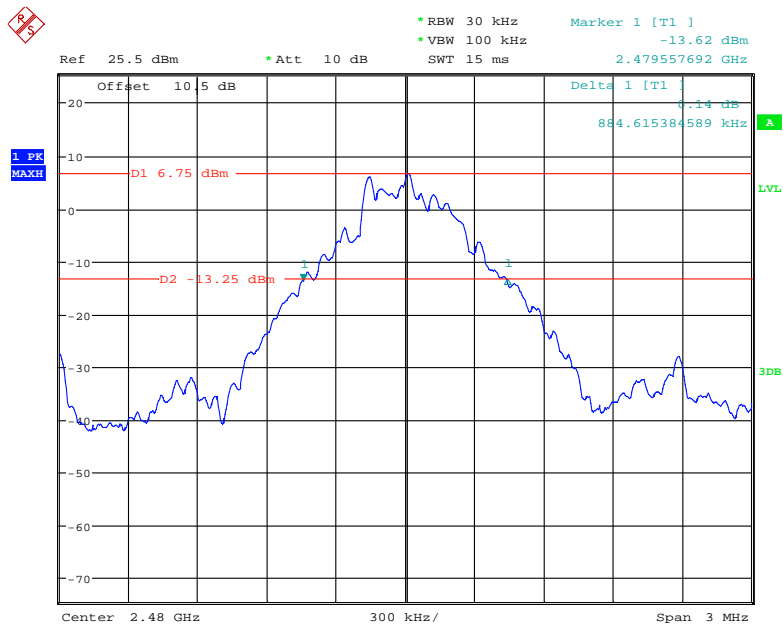

Date: 12.APR.2018 22:29:25




### EDR ( $\pi/4$ -DQPSK): Low Channel

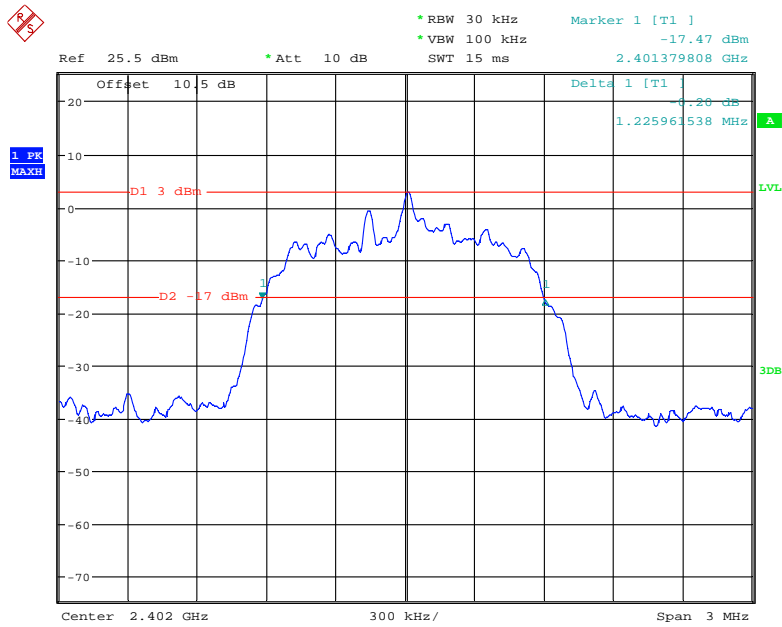


Date: 12.APR.2018 22:24:00

### EDR ( $\pi/4$ -DQPSK): Middle Channel

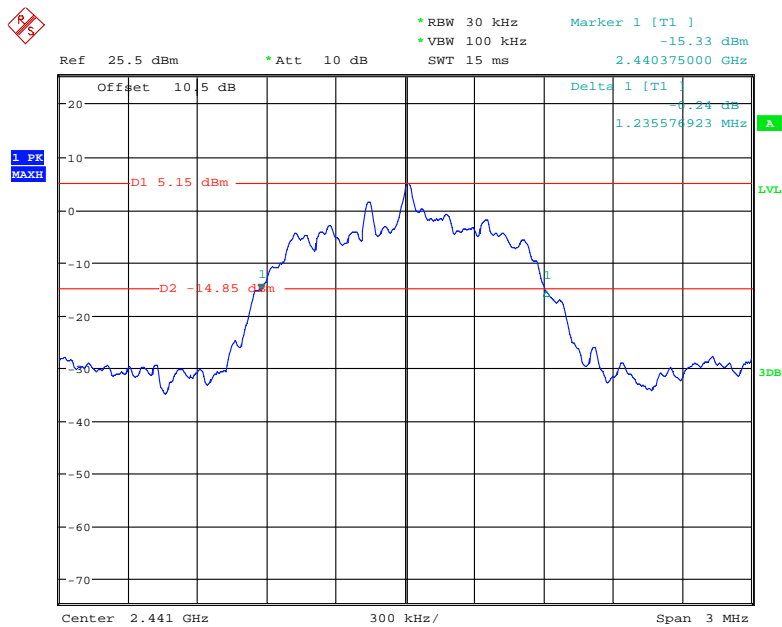


Date: 12.APR.2018 22:21:34

**EDR ( $\pi/4$ -DQPSK): High Channel**

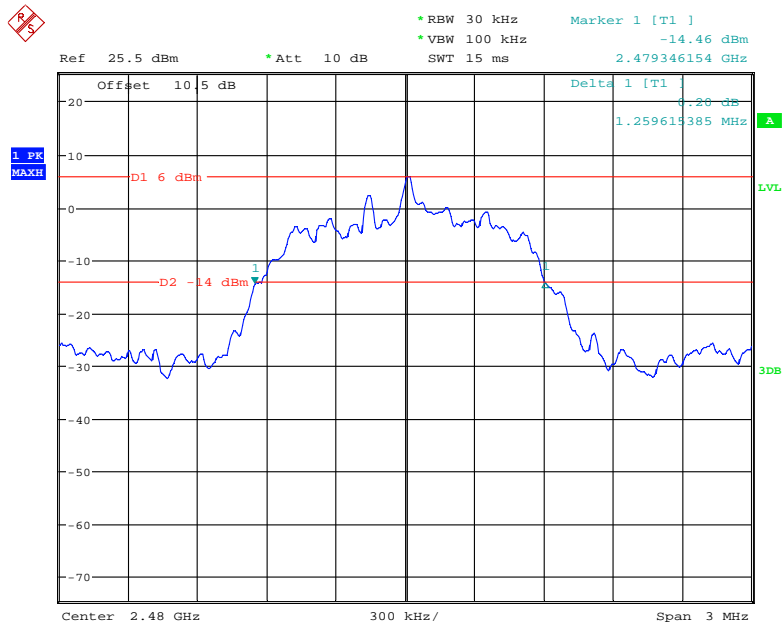


Date: 12.APR.2018 22:18:57

**EDR (8DPSK): Low Channel**

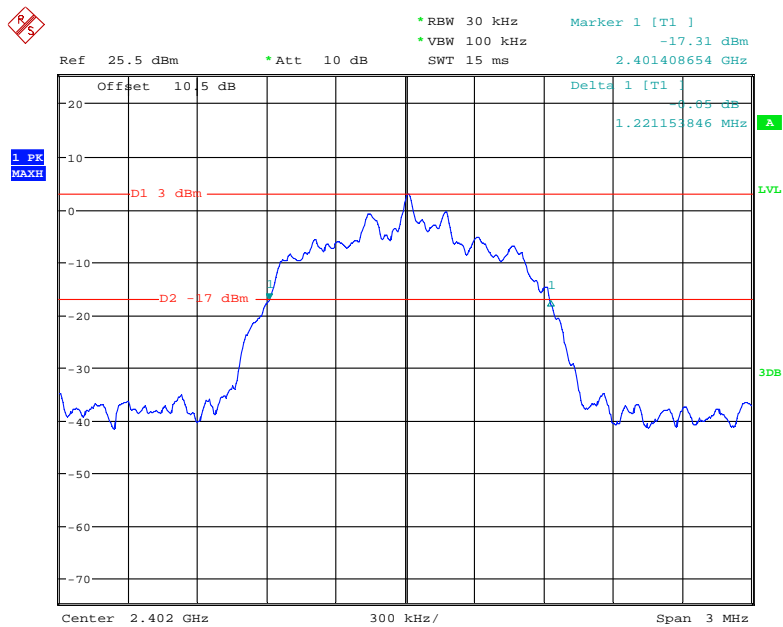


Date: 12.APR.2018 22:10:33

### EDR (8DPSK): Middle Channel

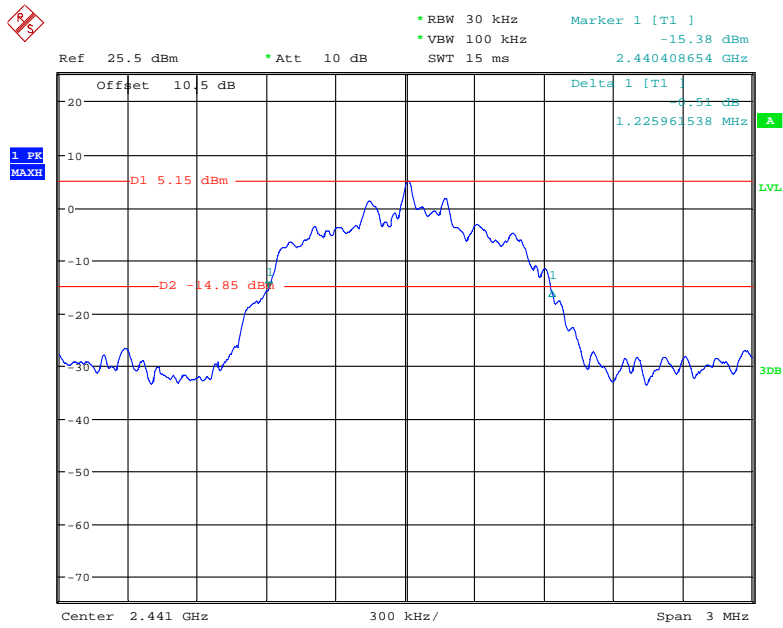

Date: 12.APR.2018 22:12:46

### EDR (8DPSK): High Channel

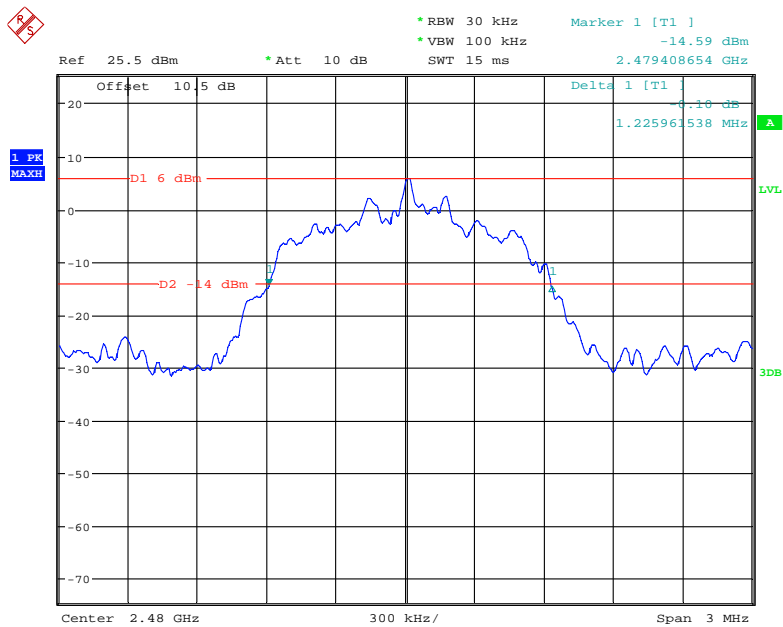

Date: 12.APR.2018 22:15:21

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Tracy Hu on 2018-04-12.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

### BDR (GFSK): Number of Hopping Channels

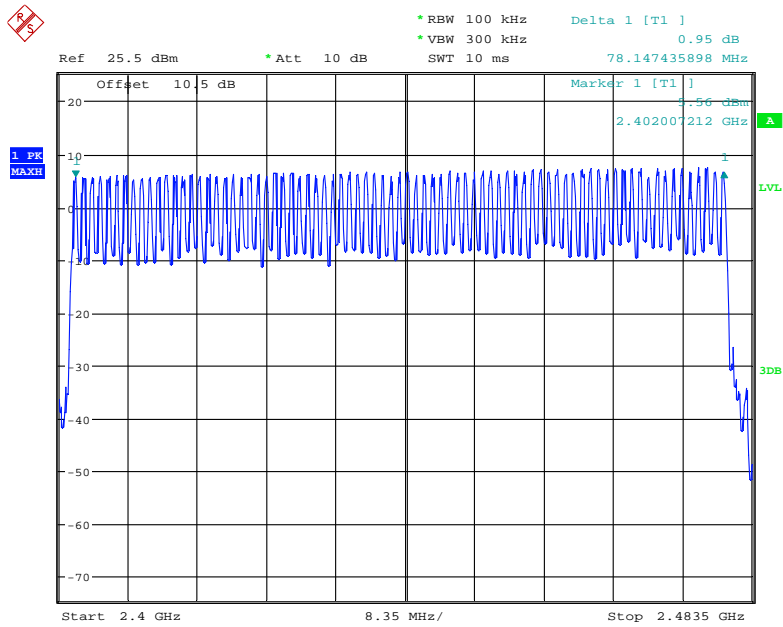


Date: 12.APR.2018 20:54:05

### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

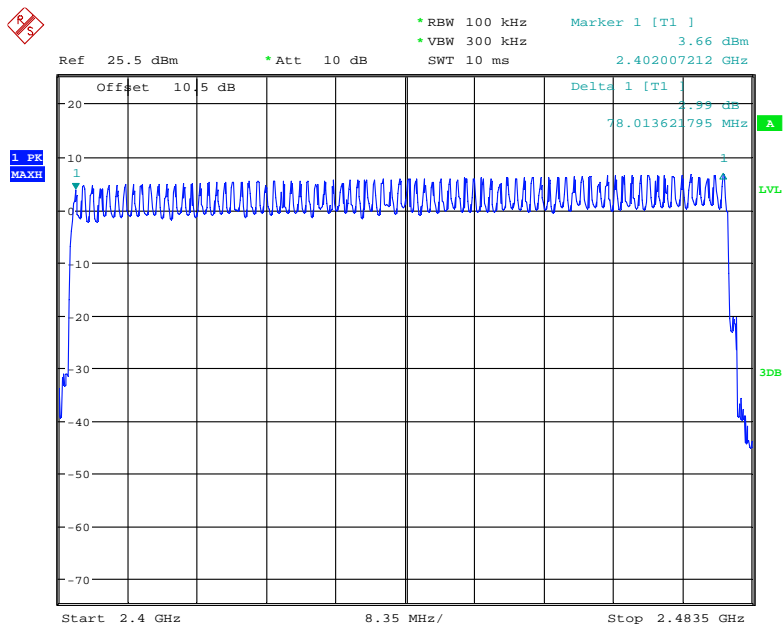

Date: 12.APR.2018 20:51:35

### EDR (8DPSK): Number of Hopping Channels

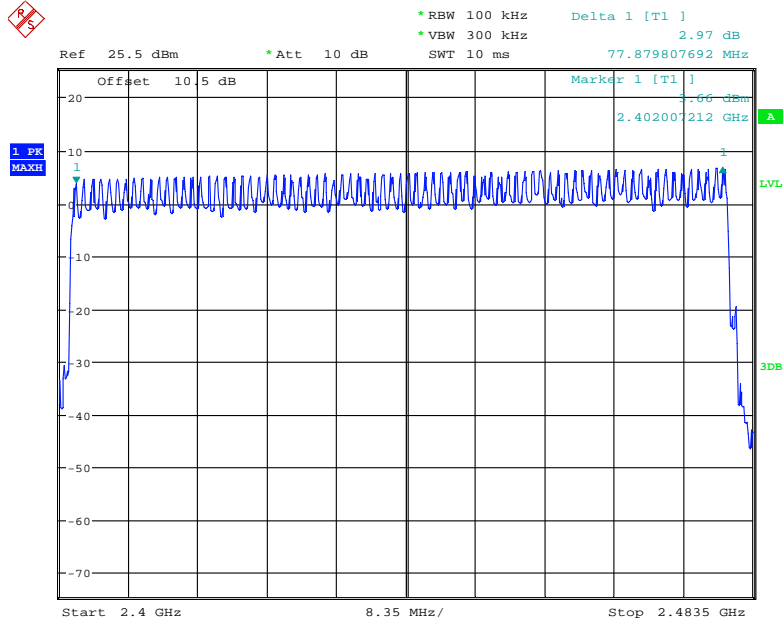

Date: 12.APR.2018 20:47:19

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Tracy Hu on 2018-04-12.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
BDR (GFSK)	DH 1	Low	0.435	0.139	0.4	Pass	
		Middle	0.435	0.139	0.4	Pass	
		High	0.435	0.139	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.703	0.272	0.4	Pass	
		Middle	1.703	0.272	0.4	Pass	
		High	1.703	0.272	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.966	0.316	0.4	Pass	
		Middle	2.966	0.316	0.4	Pass	
		High	2.966	0.316	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
	EDR (π/4-DQPSK)	2DH 1	Low	0.448	0.143	0.4	Pass
Middle			0.446	0.143	0.4	Pass	
High			0.445	0.142	0.4	Pass	
Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S							
2DH 3		Low	1.718	0.275	0.4	Pass	
		Middle	1.718	0.275	0.4	Pass	
		High	1.718	0.275	0.4	Pass	
Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S							
2DH 5		Low	2.966	0.316	0.4	Pass	
		Middle	2.966	0.316	0.4	Pass	
		High	2.966	0.316	0.4	Pass	
Note:2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S							
EDR (8DPSK)		3DH 1	Low	0.449	0.144	0.4	Pass
	Middle		0.449	0.144	0.4	Pass	
	High		0.449	0.144	0.4	Pass	
	Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	3DH 3	Low	1.718	0.275	0.4	Pass	
		Middle	1.718	0.275	0.4	Pass	
		High	1.718	0.275	0.4	Pass	
	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	3DH 5	Low	2.966	0.316	0.4	Pass	
		Middle	2.966	0.316	0.4	Pass	
		High	2.966	0.316	0.4	Pass	
	Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						




### BDR (GFSK): Pulse time, Low Channel, DH1

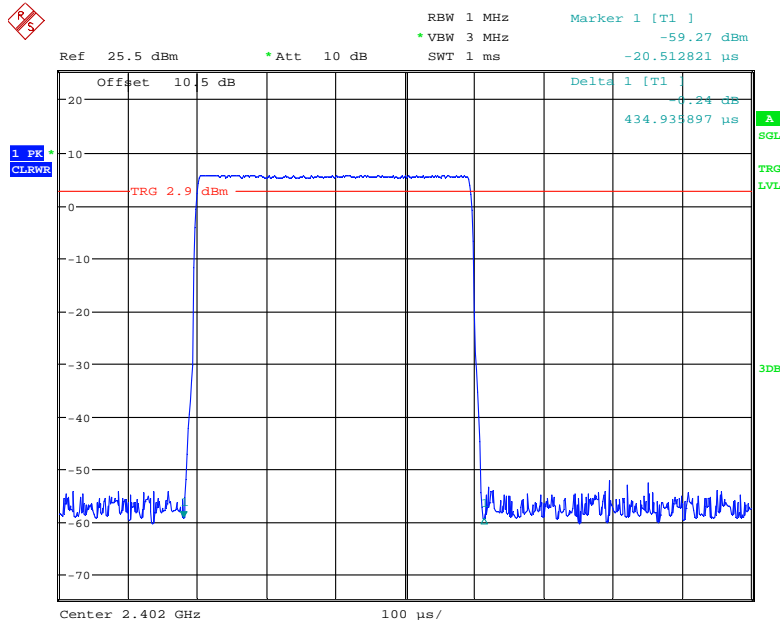


Date: 12.APR.2018 20:37:47

### Pulse time, Middle Channel, DH1

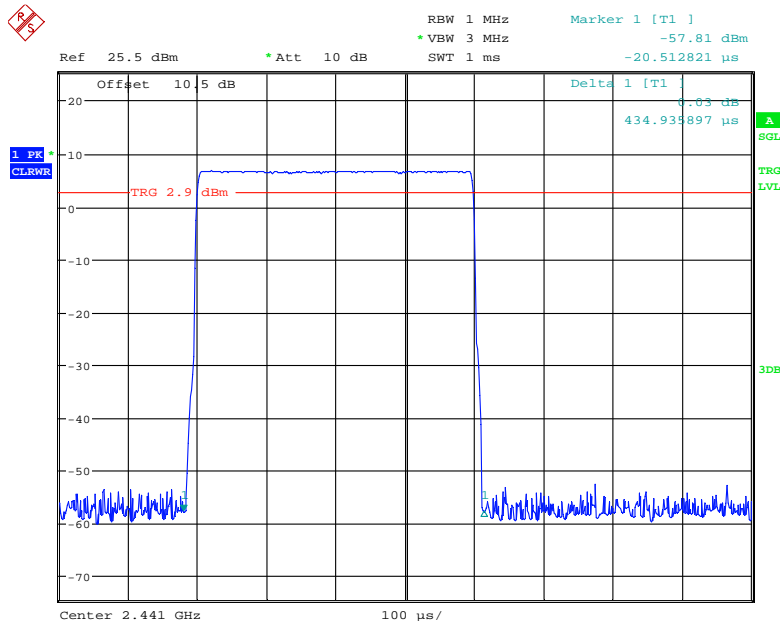


Date: 12.APR.2018 20:38:06

### Pulse time, High Channel, DH1

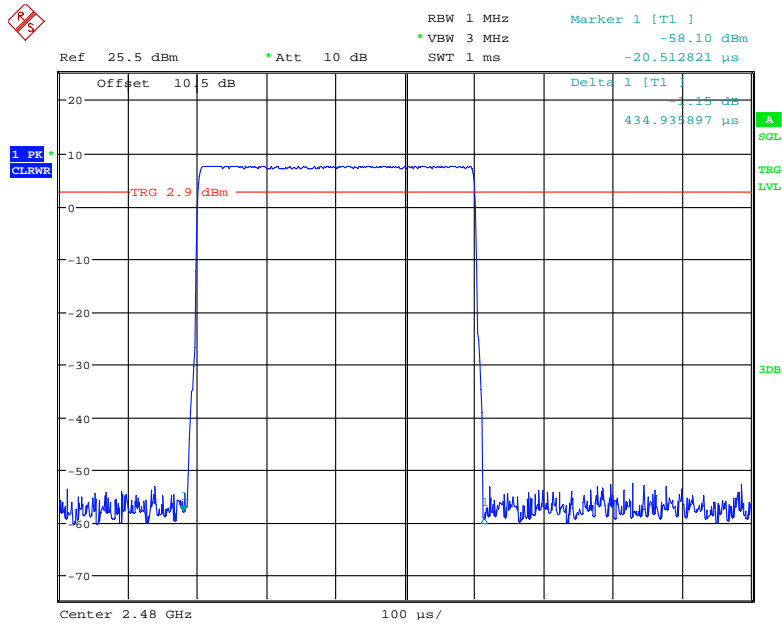


Date: 12.APR.2018 20:38:21

### Pulse time, Low Channel, DH3

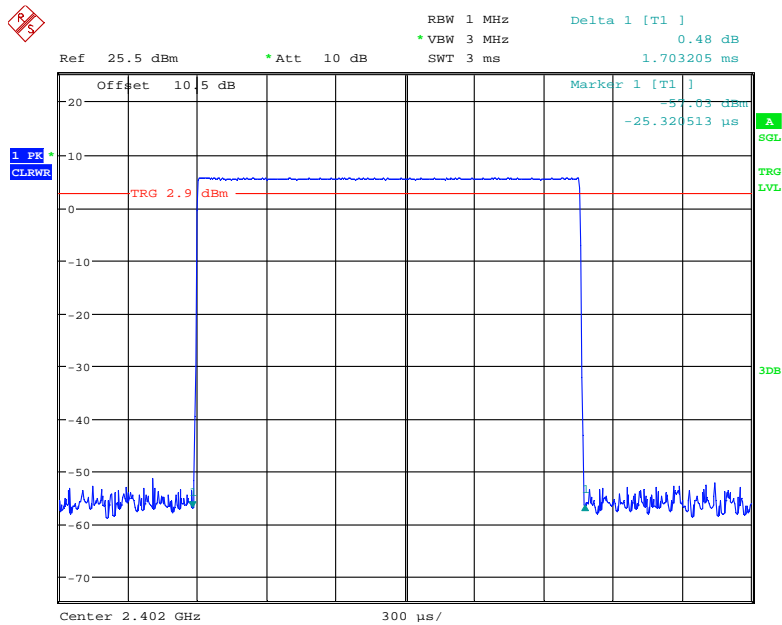


Date: 12.APR.2018 20:36:37

### Pulse time, Middle Channel, DH3

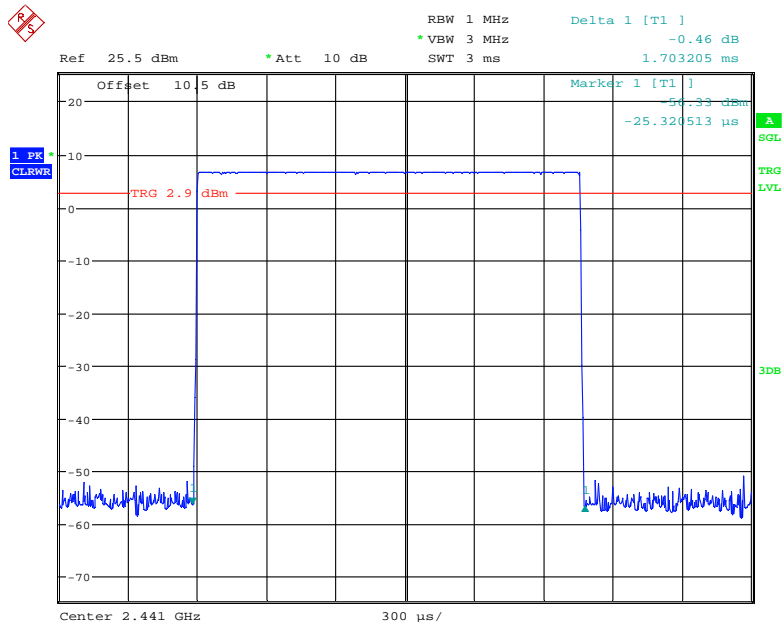


Date: 12.APR.2018 20:36:15

### Pulse time, High Channel, DH3

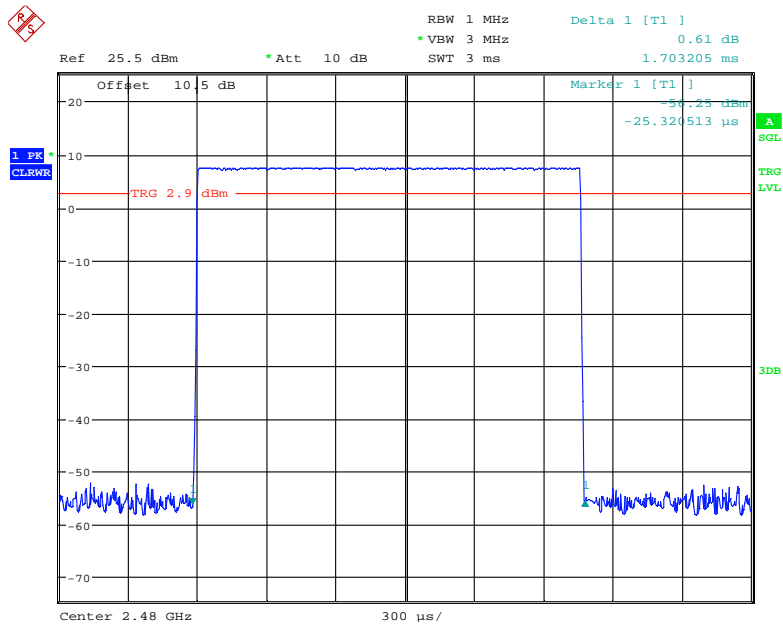


Date: 12.APR.2018 20:35:53

### Pulse time, Low Channel, DH5

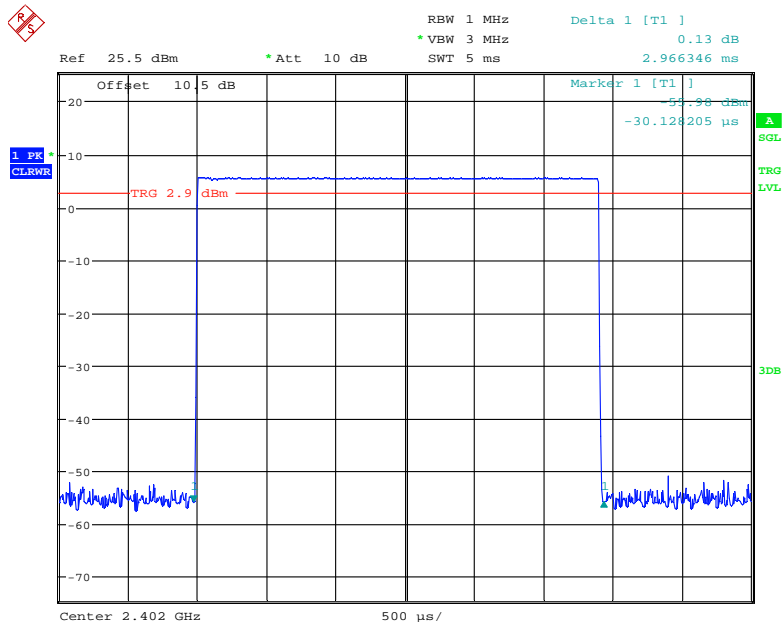


Date: 12.APR.2018 20:23:08

### Pulse time, Middle Channel, DH5

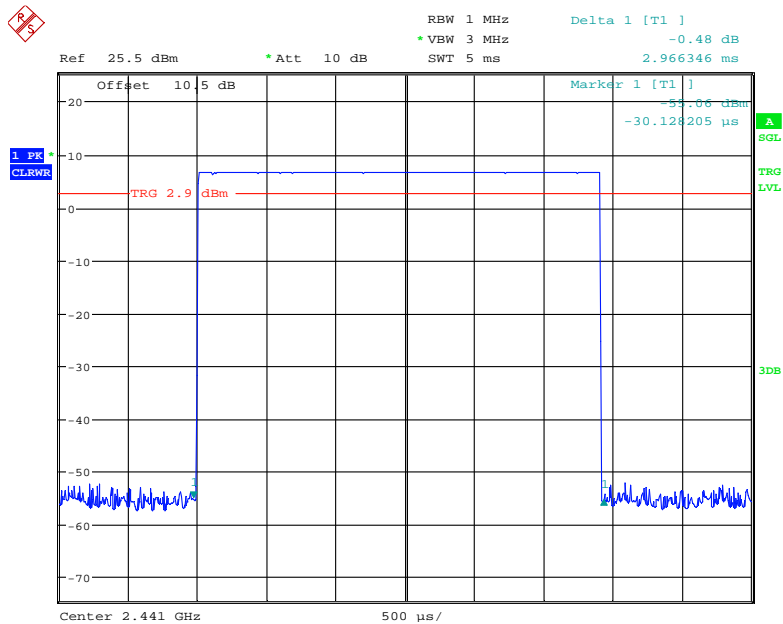

Date: 12.APR.2018 20:23:50


**Pulse time, High Channel, DH5**

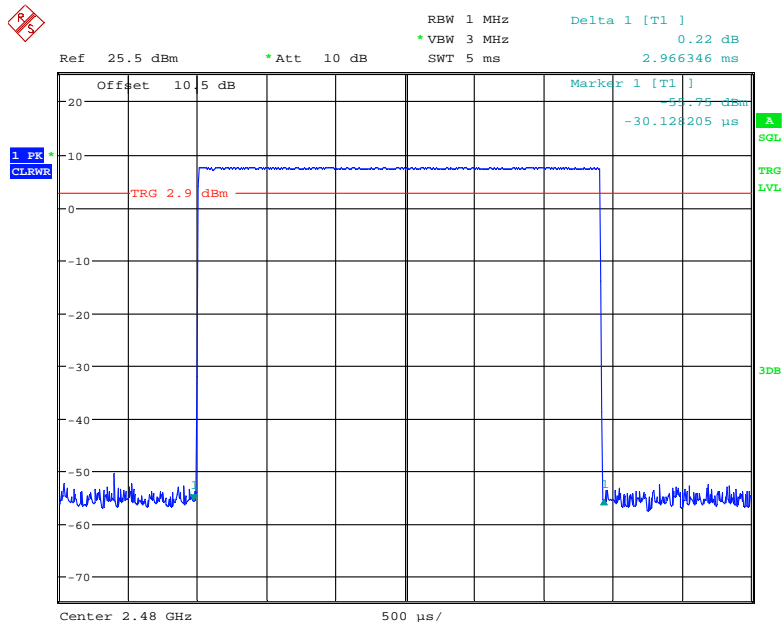

Date: 12.APR.2018 20:24:08


**EDR ( $\pi/4$ -DQPSK):**

**Pulse time, Low Channel, 2DH1**

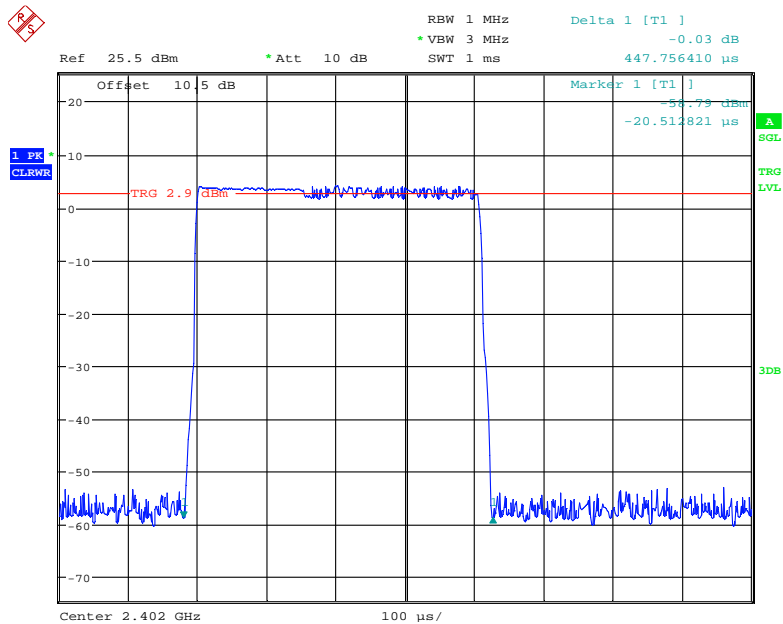


Date: 12.APR.2018 20:40:14

### Pulse time, Middle Channel, 2DH1

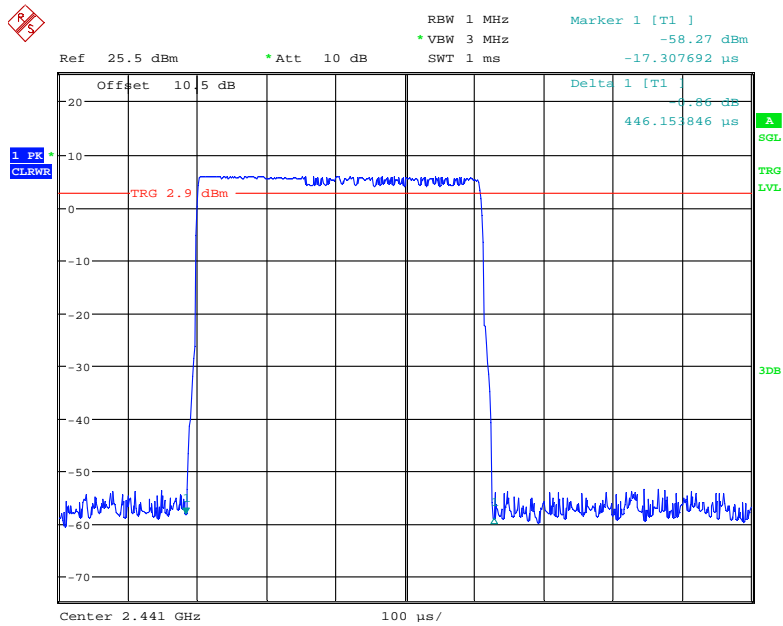


Date: 12.APR.2018 20:39:41

### Pulse time, High Channel, 2DH1

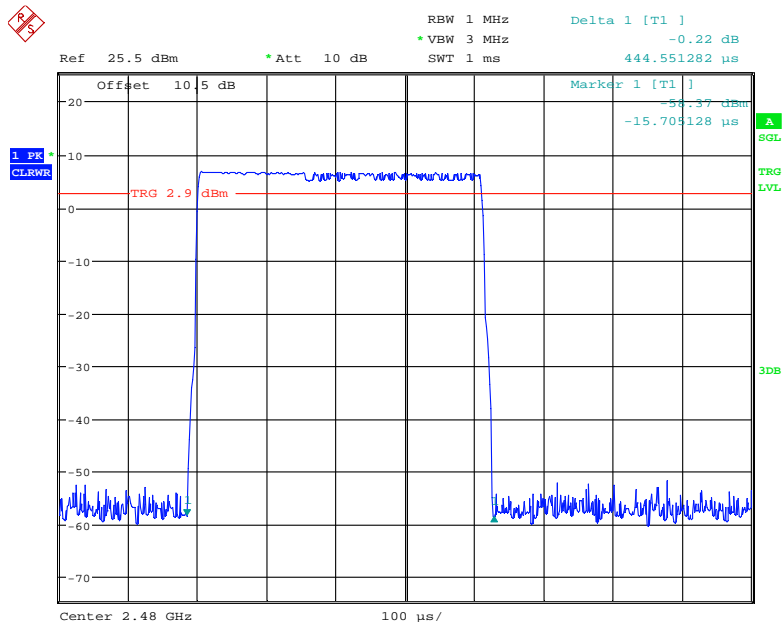


Date: 12.APR.2018 20:39:22

### Pulse time, Low Channel, 2DH3

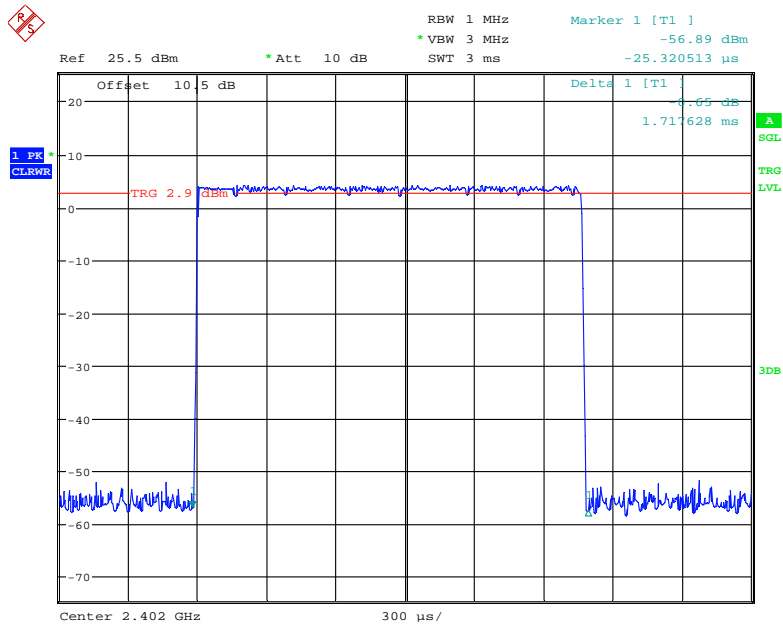


Date: 12.APR.2018 20:33:49

### Pulse time, Middle Channel, 2DH3

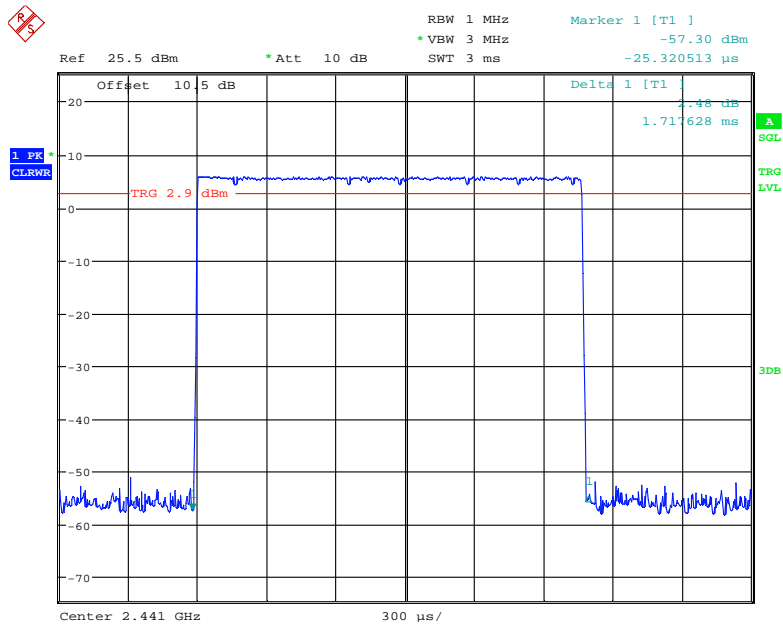


Date: 12.APR.2018 20:34:10

### Pulse time, High Channel, 2DH3

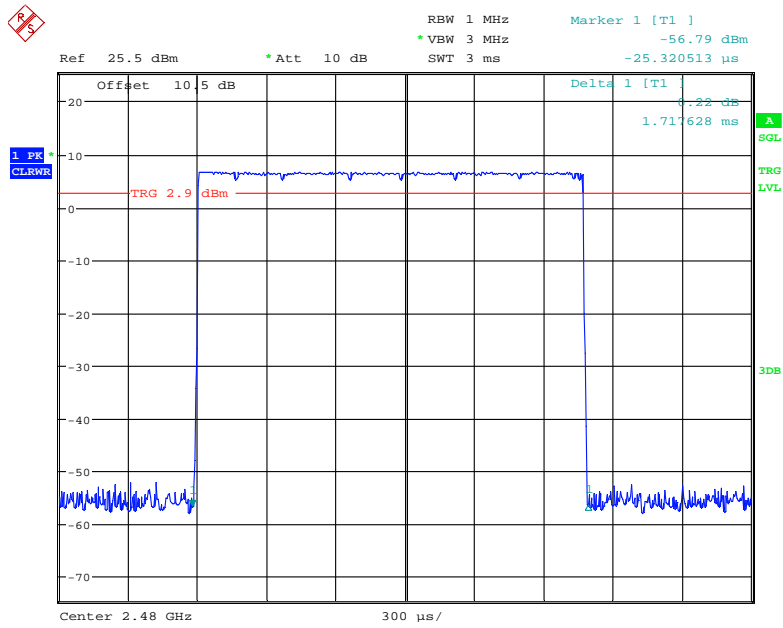

Date: 12.APR.2018 20:34:37


### Pulse time, Low Channel, 2DH5

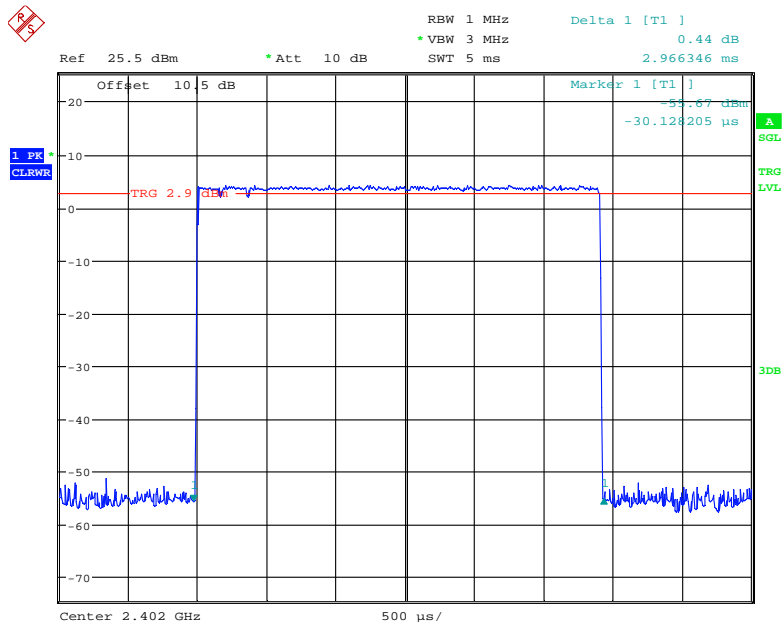

Date: 12.APR.2018 20:25:32




### Pulse time, Middle Channel, 2DH5

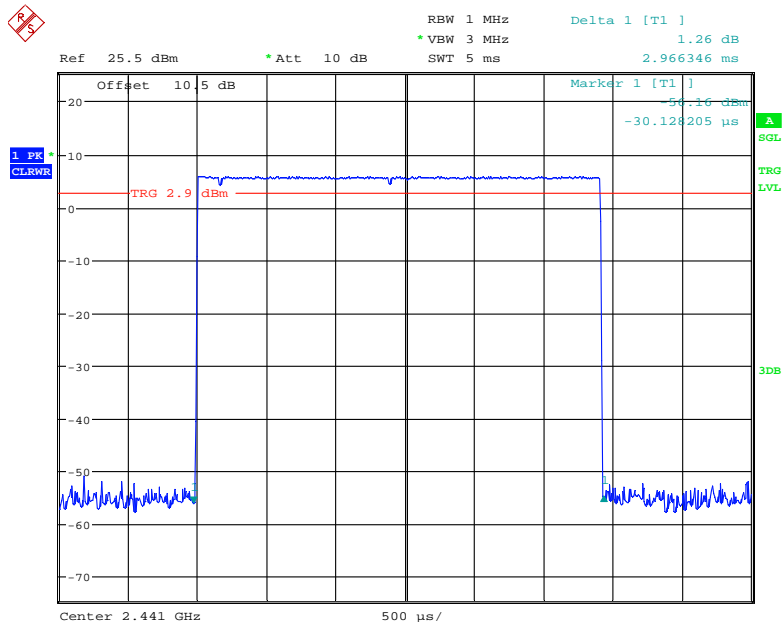


Date: 12.APR.2018 20:25:16

### Pulse time, High Channel, 2DH5

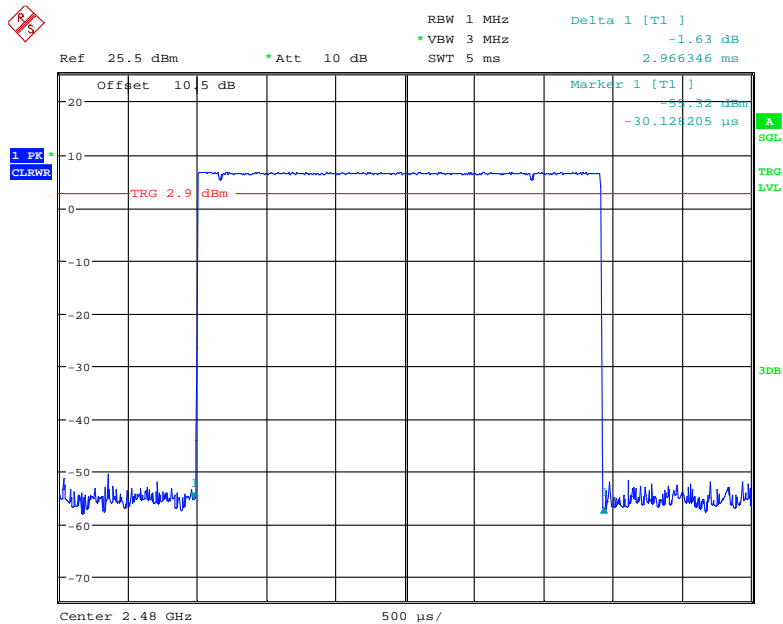


Date: 12.APR.2018 20:24:50

### EDR (8DPSK): Pulse time, Low Channel, 3DH1

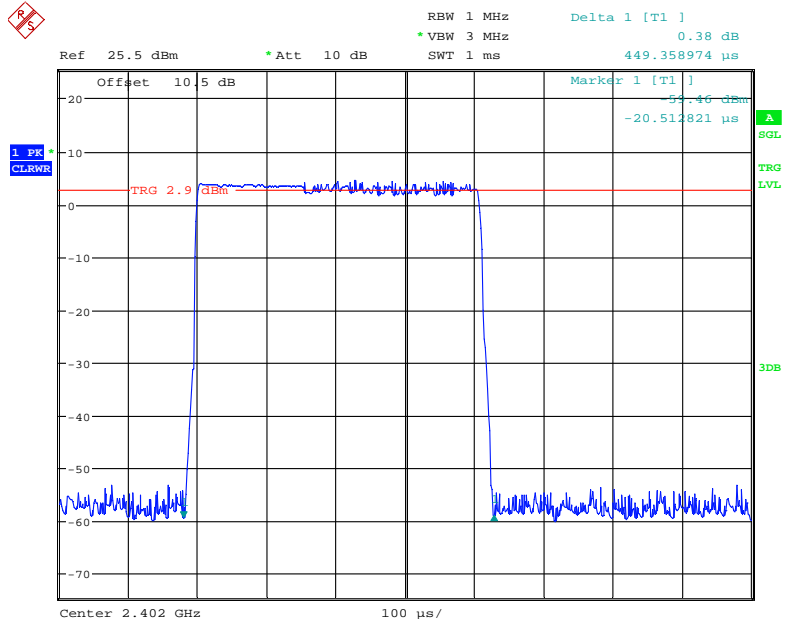


Date: 12.APR.2018 20:40:56

### Pulse time, Middle Channel, 3DH1

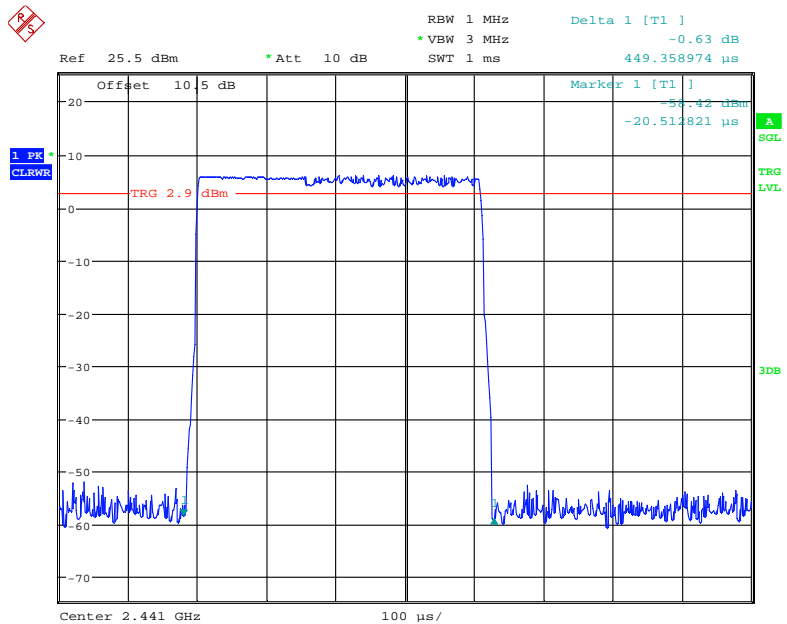


Date: 12.APR.2018 20:41:24

### Pulse time, High Channel, 3DH1

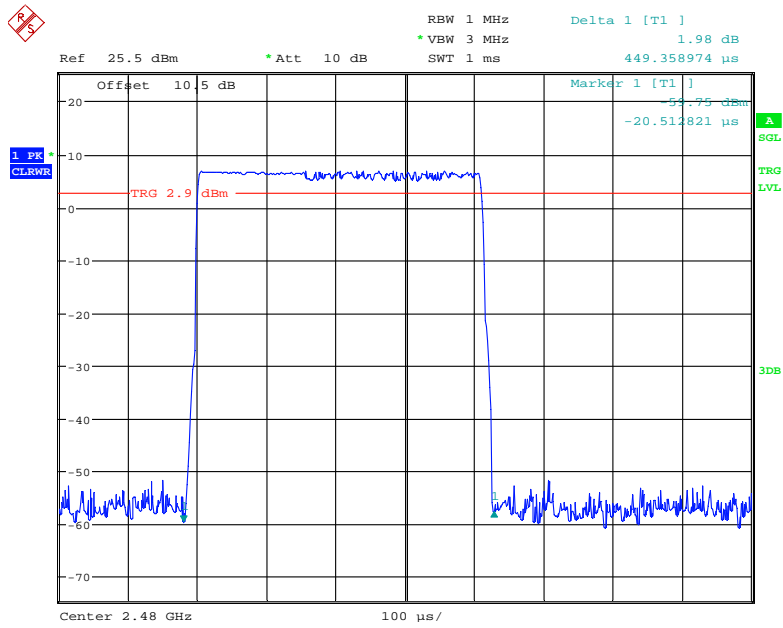


Date: 12.APR.2018 20:41:42

### Pulse time, Low Channel, 3DH3

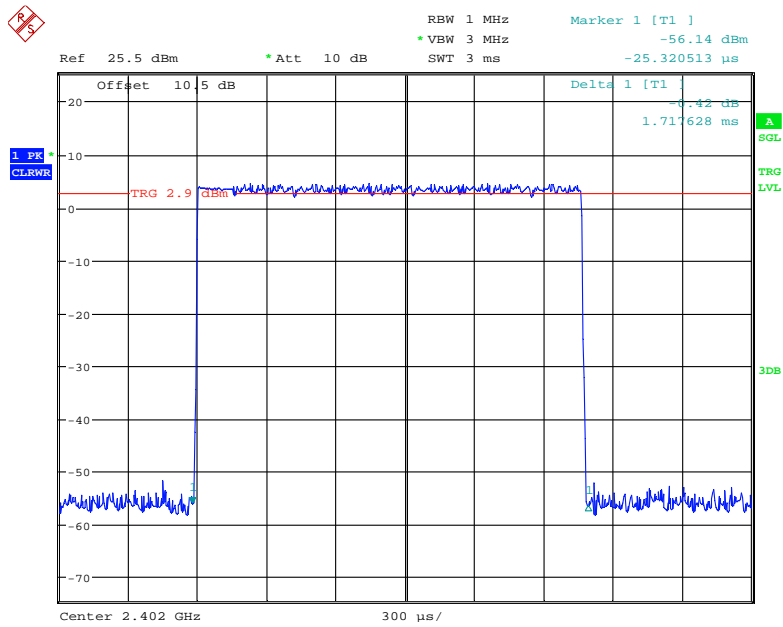


Date: 12.APR.2018 20:33:04

### Pulse time, Middle Channel, 3DH3

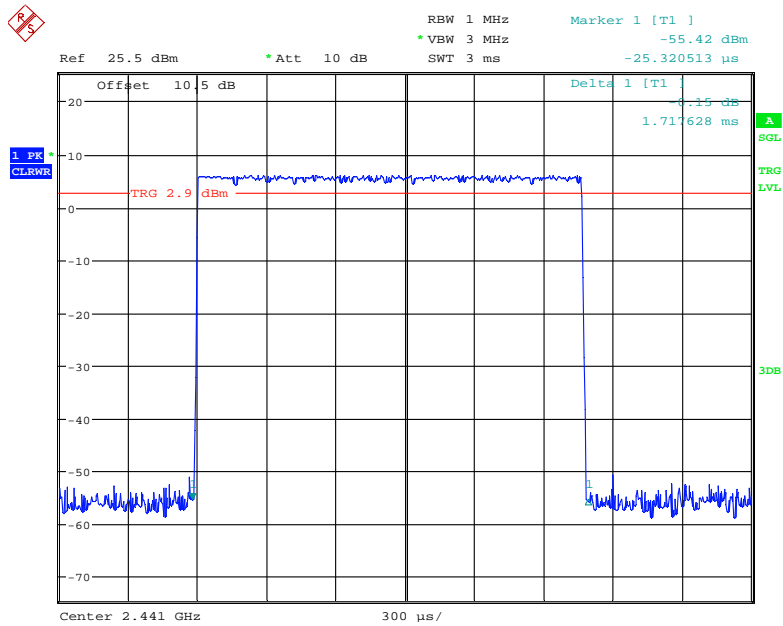


Date: 12.APR.2018 20:32:49

### Pulse time, High Channel, 3DH3

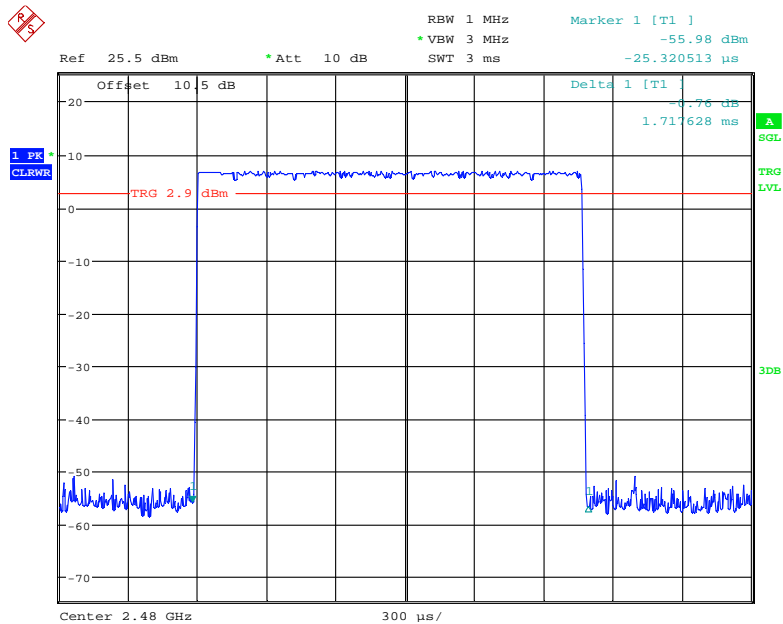


Date: 12.APR.2018 20:32:20

Pulse time, Low Channel, 3DH5

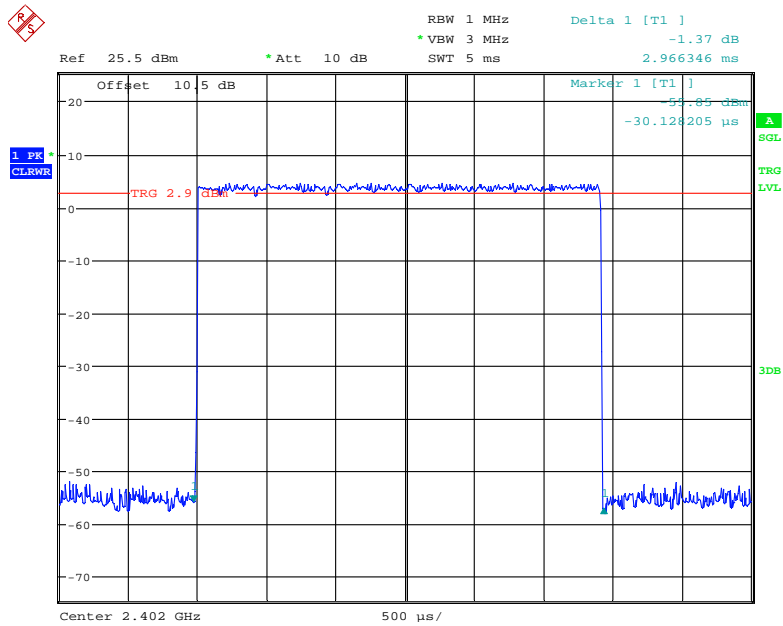


Date: 12.APR.2018 20:26:40

Pulse time, Middle Channel, 3DH5

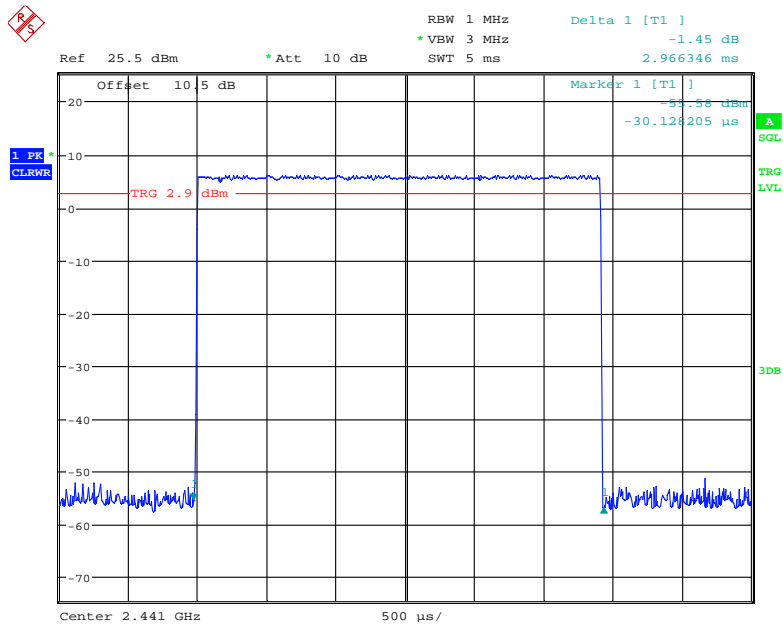

Date: 12.APR.2018 20:27:03

### Pulse time, High Channel, 3DH5

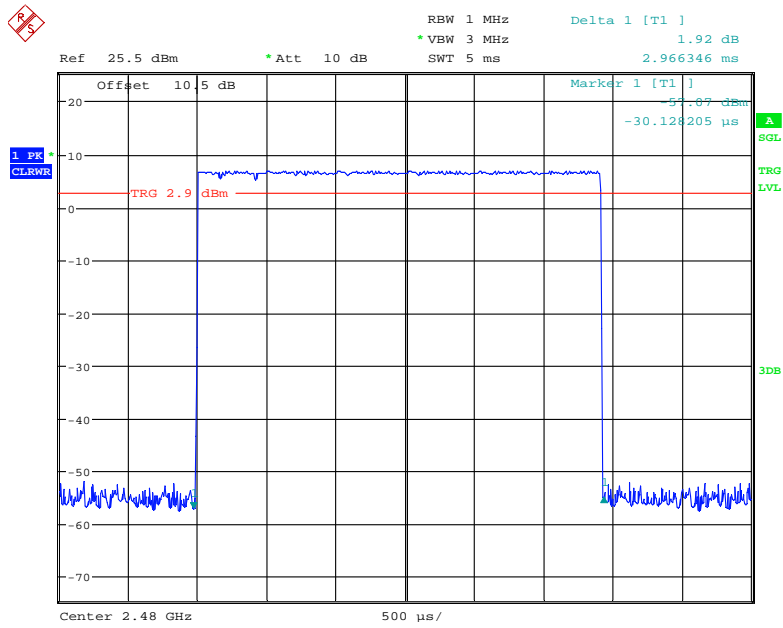

Date: 12.APR.2018 20:27:21

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Tracy Hu on 2018-04-12.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table.*

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
<b>BDR (GFSK)</b>	Low	2402	5.79	3.793	125
	Middle	2441	6.88	4.875	125
	High	2480	7.68	5.861	125
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	4.75	2.985	125
	Middle	2441	6.32	4.285	125
	High	2480	7.13	5.164	125
<b>EDR (8DPSK)</b>	Low	2402	5.02	3.177	125
	Middle	2441	6.42	4.385	125
	High	2480	7.25	5.309	125

## **FCC §15.247(d) - BAND EDGES TESTING**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Tracy Hu on 2018-04-12.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following plots.*




### BDR (GFSK): Band Edge-Left Side

#### Hopping

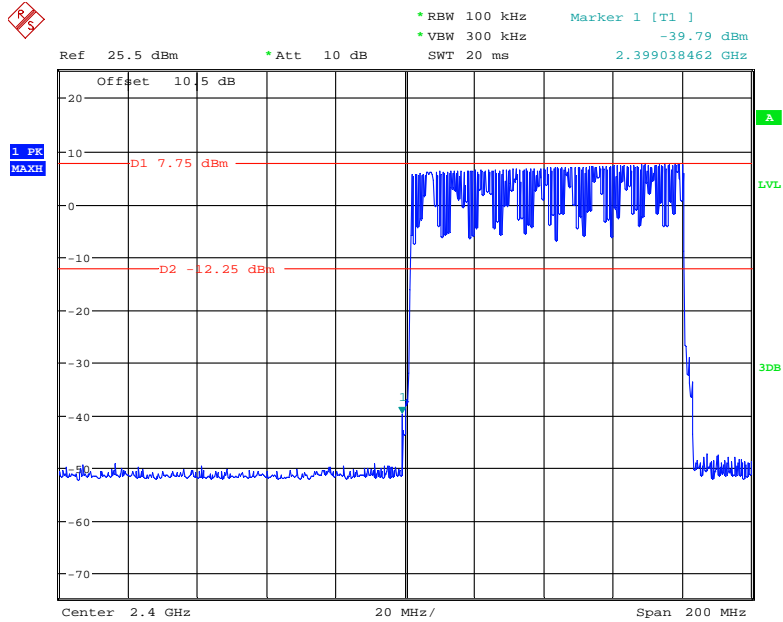


Date: 12.APR.2018 20:58:33

#### Single

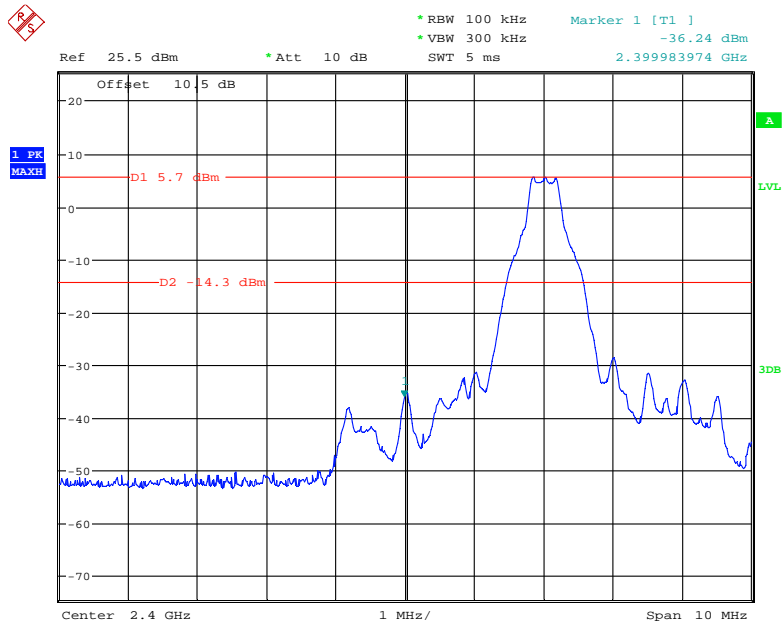


Date: 12.APR.2018 21:22:04

### BDR (GFSK): Band Edge-Right Side Hopping

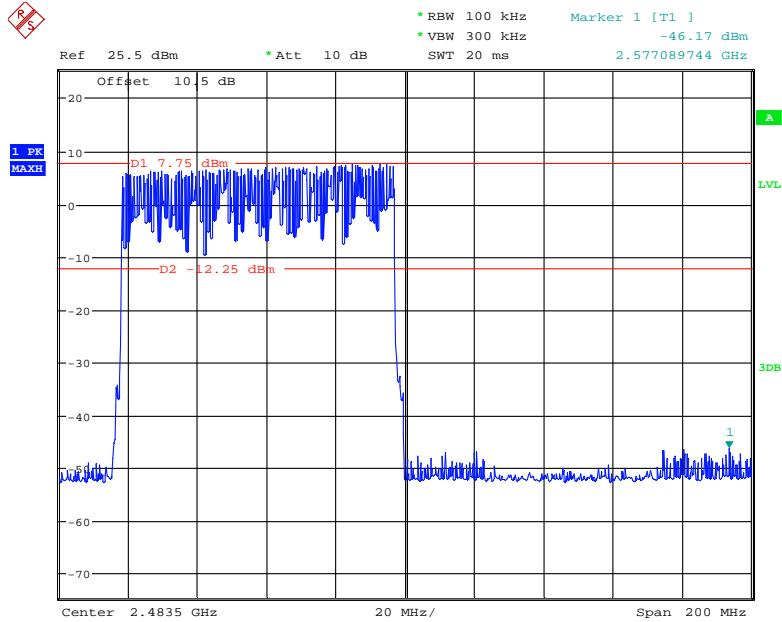

Date: 12.APR.2018 21:00:23


### Single

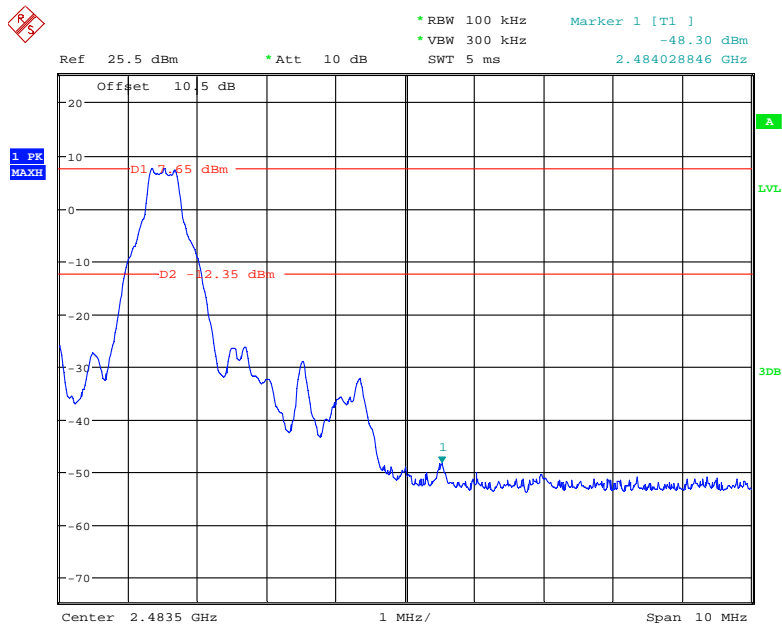

Date: 12.APR.2018 21:22:57


### EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side

#### Hopping

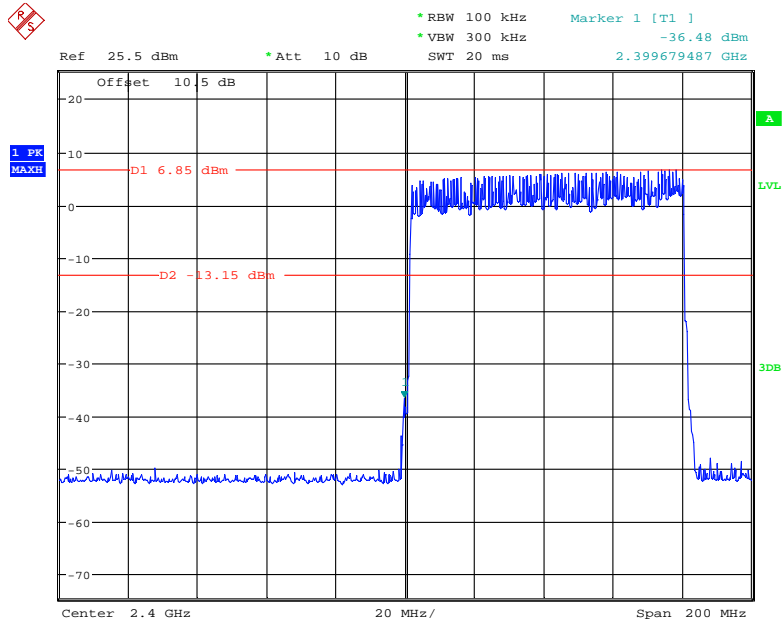


Date: 12.APR.2018 21:05:37

#### Single

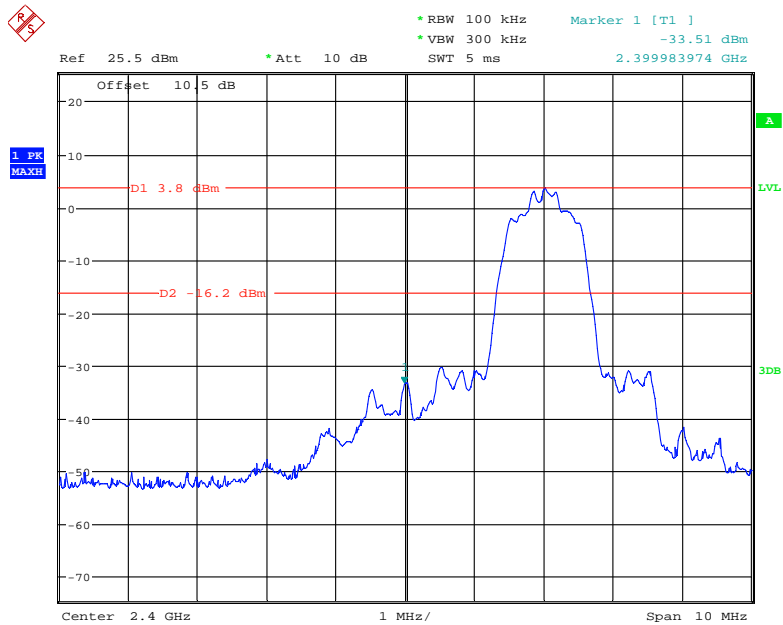


Date: 12.APR.2018 21:19:33

### EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side Hopping

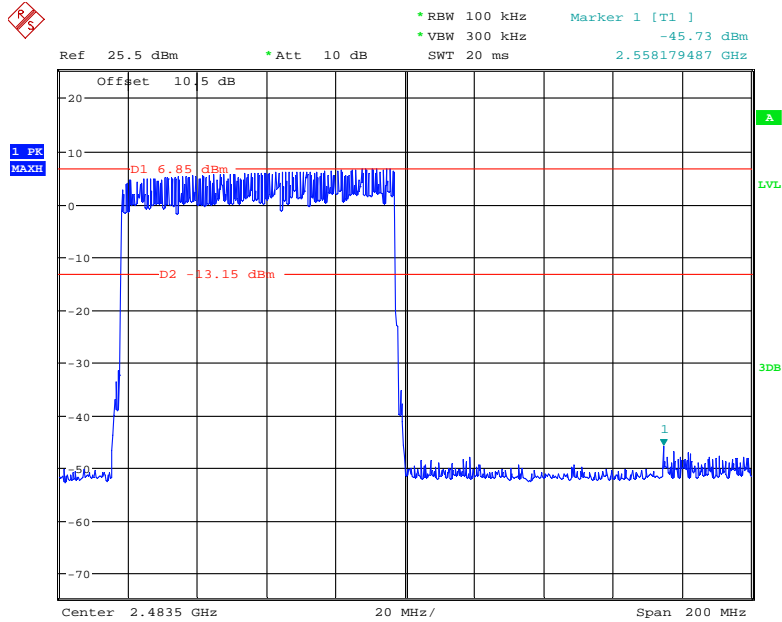

Date: 12.APR.2018 21:03:33


### Single

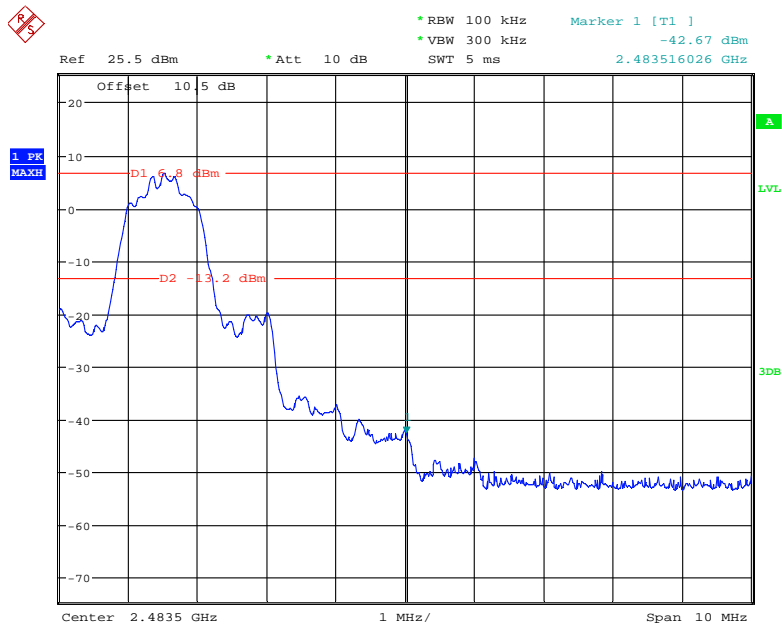

Date: 12.APR.2018 21:18:08


### EDR (8DPSK): Band Edge-Left Side

#### Hopping

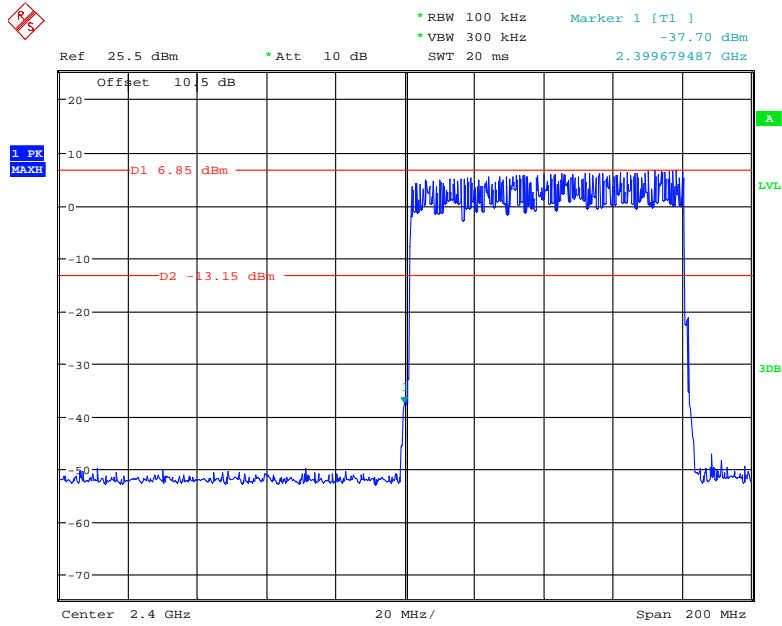


Date: 12.APR.2018 21:07:54

#### Single

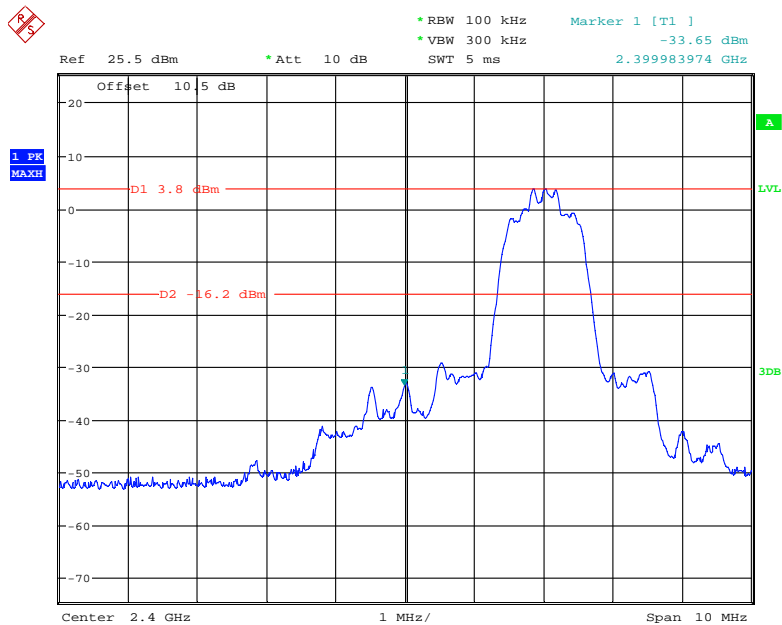


Date: 12.APR.2018 21:15:39

### EDR (8DPSK): Band Edge-Right Side Hopping

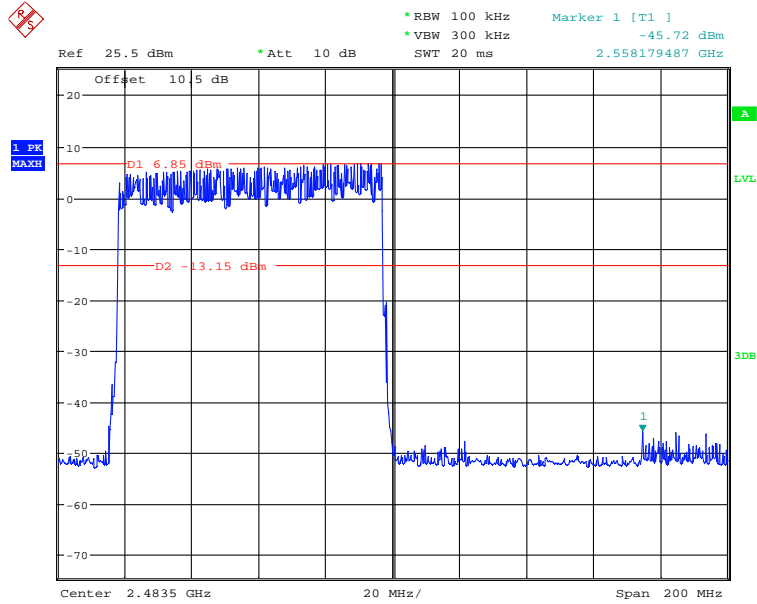

Date: 12.APR.2018 21:09:43

### Single

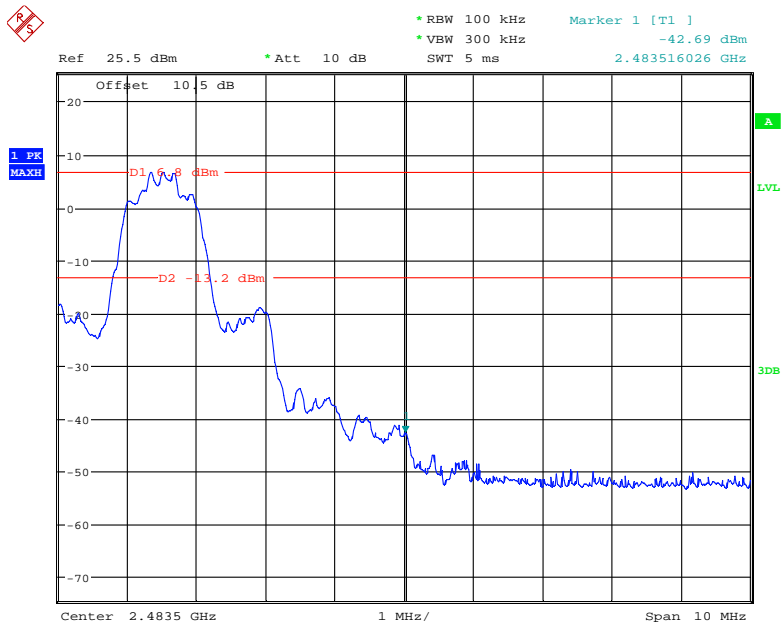

Date: 12.APR.2018 21:16:53

\*\*\*\*\* END OF REPORT \*\*\*\*\*