

TEST REPORT

Issued By: Dongguan New Testing Centre Co., Ltd

Add: 3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China, 523808.

A2LA Number:5426.01

Tel: 86-769-22212079

<http://www.ntc-cert.com>



Marking:

1. The test report is invalid without the official stamp of test center.
2. Nobody is allowed to photocopy or partly photocopy this test report without written permission of test center.
3. The test report is invalid without the signatures of approver, reviewer and testing engineer.
4. The test report is invalid if altered.
5. Objections to the test report must be submitted to NTC within 15 days.
6. The test report is valid for the tested samples only.
7. As for test verdict, “—” means is “no need for judgment” “N/A” means is “not applicable”, “P” means “pass”, “F” means “fail”.

TABLE OF CONTENTS

Test Report Declare	3
1. Summary of test results	5
2. General test information	5
2.1. Description of EUT	5
2.2. Detail models.....	6
2.3. Block diagram EUT configuration for test	6
2.4. Test environment conditions	7
2.5. Measurement uncertainty	8
2.6. Test Peripheral List.....	8
3. Power Line Conducted Emission Test	9
3.1. Test equipment	9
3.2. Block diagram of test setup.....	9
3.3. Power Line Conducted Emission Limits (Class B)	9
3.4. Test Procedure.....	10
3.5. Test Result.....	10
4. Radiated emission test.....	13
4.1. Test equipment	13
4.2. Block diagram of test setup.....	14
4.3. Limit	16
4.4. Test Procedure.....	17
4.5. Test result	17
5. Maximum Peak Output Power	23
5.1. Applied procedures / Limit.....	23
5.2. Test procedure	23
5.3. Deviation from standard.....	23
5.4. Test setup	23
5.5. TEST RESULTS	23
6. BANDWIDTH TEST	29
6.1. Applied procedures / Limit.....	29
6.2. Test procedure	29
6.3. Deviation from standard.....	29
6.4. Test setup	29
6.5. Test results	29

7.	Carrier Frequencies Separated	35
7.1.	Applied procedures / Limit.....	35
7.2.	Test procedure	35
7.3.	Deviation from standard.....	35
7.4.	Test setup	35
7.5.	Test results	35
8.	Hopping Channel Number.....	41
8.1.	Applied procedures / Limit.....	41
8.2.	Test procedure	41
8.3.	Deviation from standard.....	41
8.4.	Test setup	41
8.5.	Test result	41
9.	Dwell time	45
9.1.	Applied procedures / Limit.....	45
9.2.	Test procedure	45
9.3.	Deviation from standard.....	45
9.4.	Test setup	45
9.5.	Test result	45
10.	Band edge.....	60
10.1.	Applied procedures / Limit.....	60
10.2.	Test procedure	60
10.3.	Deviation from standard.....	60
10.4.	Test setup	60
10.5.	Test results	60
11.	Conducted Spurious Emissions.....	67
11.1.	Applied procedures / Limit.....	67
11.2.	Test procedure	67
11.3.	Deviation from standard.....	67
11.4.	Test setup	67
11.5.	Test results	67
12.	Antenna Requirement.....	73
12.1.	Standard requirement	73
12.2.	EUT Antenna.....	73
13.	Test setup photograph	74
14.	Photos of the EUT	76

TEST REPORT DECLARE

FCC ID	: XZH-5570312020
Applicant	: ETI Solid State Lighting (Zhuhai) Ltd
Address	: No.1, Zhongzhu Road South, Science & Technology Innovation Coast, High Tech District, Zhuhai City, Guangdong Prov., China
Equipment under Test	: LED Shop Light
Model No	: 557031XX, 5570312020 where "XX=00-99" denotes color temperature
Trade Mark	: ETI, Commercial Electric, Hampton Bay
Manufacturer 1	: ETI Solid State Lighting (Zhuhai) Ltd
Address 1	: No.1, Zhongzhu Road South, Science & Technology Innovation Coast, High Tech District, Zhuhai City, Guangdong Prov., China
Manufacturer 2	: NVC VIETNAM TECHNOLOGY AND LIGHTING COMPANY LIMITED
Address 2	: Lot CN23-1, Yen Phong Industrial park, Dong Phong commune, Yen Phong district, Bac Ninh province, Vietnam

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C: 2017, ANSI C63.10:2013.

We Declare:

The equipment described above is tested by Dongguan New Testing Centre Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan New Testing Centre Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above standards.

Report No.:	NTC-ER2004043		
Date of Test:	Apr.13, 2020 to Apr.24, 2020	Date of Report:	Apr.27, 2020

Prepared By:

Jeffrey Zhang

Jeffrey Zhang/Engineer

Approved By:



Dave Gao/LAB Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan New Testing Centre Co., Ltd

1. Summary of test results

Description of Test Item	Standard	Results
Antenna Requirement	Section 15.247(c)	PASS
Conduction Emissions	Section 15.207(a)	PASS
Radiated Emissions	Section 15.247(d) 15.209 15.205	PASS
Carrier Frequencies Separated	Section 15.247(a)(1)	PASS
Hopping Channel Number	Section 15.247(a)(1) (iii)	PASS
Dwell Time	Section 15.247(a)(1) (iii)	PASS
Maximum Peak Output Power	Section 15.247(b)	PASS
Band edge	Section 15.247(d)	PASS
Conducted Spurious Emissions	Section 15.247(d)	PASS

2. General test information

2.1. Description of EUT


EUT* Name	: LED Shop Light
Test model	: 55703141
EUT function description	: Please reference user manual of this device
Power supply	: AC 120V 50/60Hz, total 50W, 40W for light, 10W for BLUETOOTH SPEAKER
Trade mark	: ETI, Commercial Electric, Hampton Bay
Operation frequency	: 2402-2480MHz
Number of channel	: 79
Modulation Technology	: GFSK, $\pi/4$ -DQPSK, 8DPSK(1/2/3Mbps)
Bluetooth version	: 5.0
H/W No.	: YX-IJX257-08-F6988-V1.2-2020-05-07
S/W No.	: BK6988V3.1P32.4M_IJX257-08_(Shoplight A)_TXL_NOMIC_NOTF_NOUSB_NOEQ_PWD_NOBUCK_V1.0_20200409_CRC_(5309)
Antenna Type	: PCB antenna
Antenna Gain	: 0 dBi

Note: 1,EUT is the ab. of equipment under test.

2.2. Detail models

Model	Rating	Note
557031XX, 5570312020	AC 120V 50/60Hz 50W	where "XX=00-99" denotes color temperature. total 50W, 40W for light, 10W for BLUETOOTH SPEAKER

2.3. Block diagram EUT configuration for test

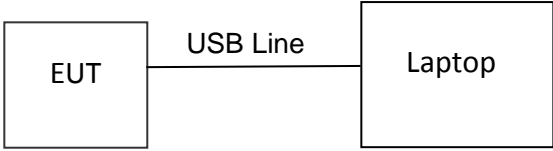1. Block diagram of EUT configuration(TX Mode)	
 <pre> graph LR EUT[EUT] --- USB[USB Line] --- Laptop[Laptop] </pre>	
<p>Note:</p> <ol style="list-style-type: none"> 1.Connect the EUT as above block diagram of configuration, Run the software, set the transmit serial port/power/channel/packet type/data type/hopping or not, send configuration, than EUT enter the TX mode. 2.Set EUT in continuous transmission signal mode. 3.Using the laptop and the transform board to control the fixed transmitting frequency and other test mode. After finishing the test setting, the notebook and the transform board will be removed during measurements. 	

2.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

(1) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(2) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

(3) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.

(4) Pre-test the EUT in all transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode,

The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

2.5. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.44dB
Uncertainty for Radiation Emission test (30MHz – 1GHz)	3.14 dB (Polarize: V)
	3.16 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz – 18GHz)	4.27 dB (Polarize: V)
	4.51 dB (Polarize: H)
Uncertainty for conducted RF Power	0.63dB
Stop Transmitting Time Test	±0.5%
Uncertainty for frequency error	5.8 x 10-8

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.6. Test Peripheral List


No.	Equipment	Manufacturer	FCC approved	Model No.	Serial No.	signal cable
1	Lap top	lenovo	DOC	ThinkPe dE450	2014ap5917	N/A

3. Power Line Conducted Emission Test

3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESCS30	8341151006	2019-05-23	1 Year
2	LISN	R&S	ENV216	3650.6550.06	2019-05-13	1 Year
3	Pulse Limiter	R&S	ESH3-Z2	0357-8810.54	2019-05-13	1 Year
4	RF Cable	HUBER	SUCOFLEX100	30722/4E	2019-05-13	1 Year
5	MEASUREMENT SOFTWARE	FARAD	EZ-EMC(VER:1.1.4.2)	N/A	N/A	N/A

3.2. BLOCK DIAGRAM OF TEST SETUP

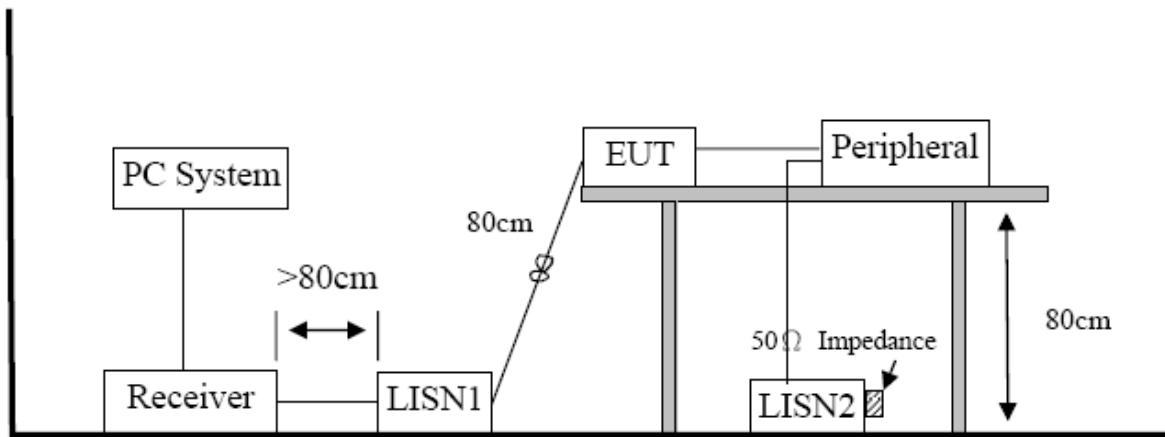

3.3. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

3.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 3.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

3.5. Test Result


PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "-----" means Peak detection; "-----" means Average detection


Note3: Measurement = Reading Level + Factor, Margin= Measurement-Limit

Conducted Emission Test Result

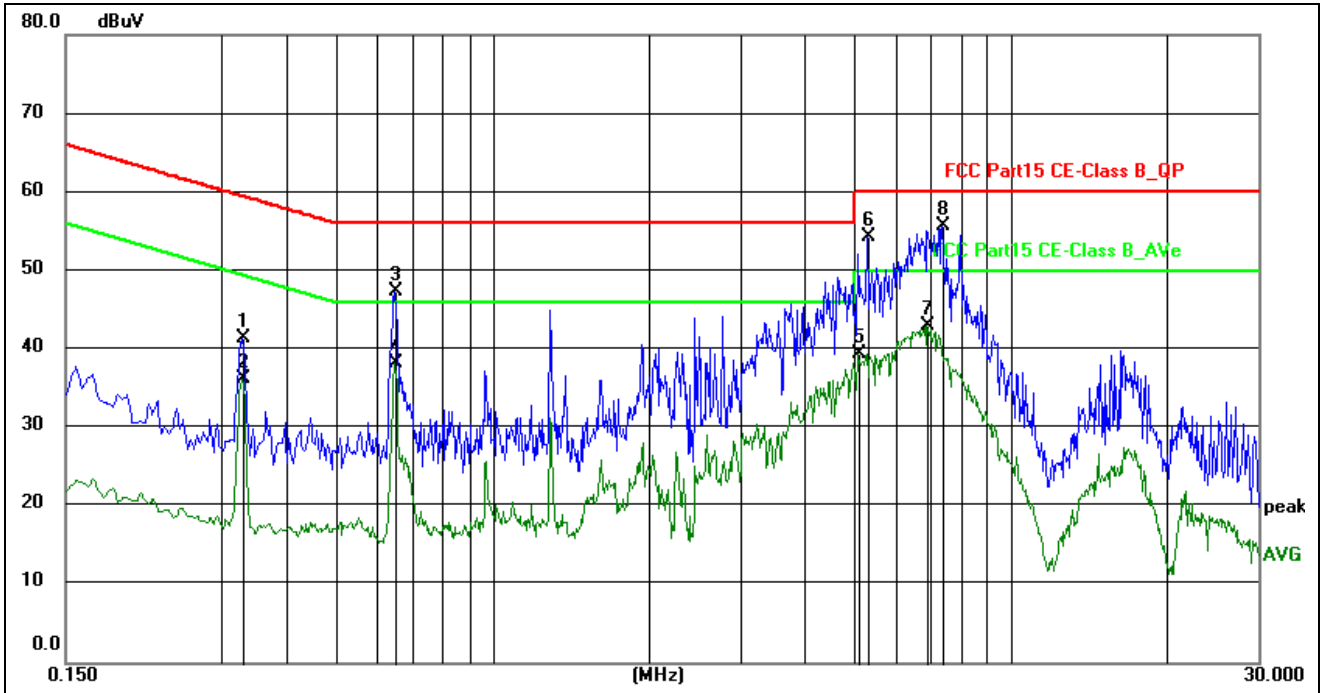

Site:	844 LAB	Phase:	N
Limit:	FCC Part15 CE-Class B_QP	Temperature(C):	24(C)
EUT:	LED Shop Light	Humidity(%):	63%
M/N.:	55703141	Test Time:	2020/4/14 13:32:41
Mode:	Lighting with Bluetooth mode	Power Rating:	AC120V/60Hz
Note:		Test Engineer:	

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.3300	31.81	9.65	41.46	59.45	-17.99	peak	
2	0.3300	26.58	9.65	36.23	49.45	-13.22	AVG	
3	0.6500	37.58	9.68	47.26	56.00	-8.74	peak	
4	0.6500	28.59	9.68	38.27	46.00	-7.73	AVG	
5	5.0660	29.32	10.05	39.37	50.00	-10.63	AVG	
6	5.2860	44.24	10.05	54.29	60.00	-5.71	peak	
7	6.9060	32.86	10.07	42.93	50.00	-7.07	AVG	
8 *	7.3780	45.70	10.07	55.77	60.00	-4.23	peak	

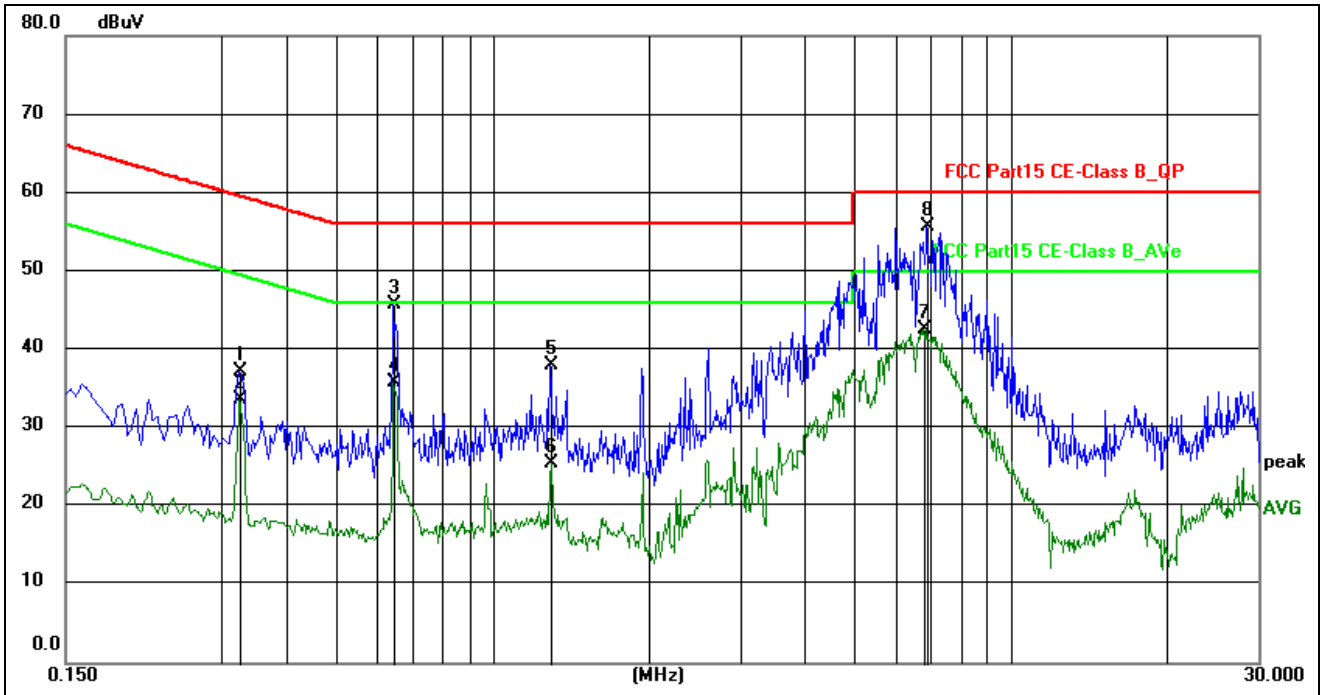

Site:	844 LAB	Phase:L1	Temperature(C):24(C)
Limit:	FCC Part15 CE-Class B_QP		Humidity(%):63%
EUT:	LED Shop Light	Test Time:	2020/4/14 13:34:39
M/N.:	55703141	Power Rating:	AC120V/60Hz
Mode:	Lighting with Bluetooth mode	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.3260	27.46	9.70	37.16	59.55	-22.39	peak	
2	0.3260	23.90	9.70	33.60	49.55	-15.95	AVG	
3	0.6460	35.96	9.77	45.73	56.00	-10.27	peak	
4	0.6460	26.10	9.77	35.87	46.00	-10.13	AVG	
5	1.2940	28.10	9.89	37.99	56.00	-18.01	peak	
6	1.3020	15.64	9.89	25.53	46.00	-20.47	AVG	
7	6.8020	32.59	9.98	42.57	50.00	-7.43	AVG	
8 *	6.8860	45.78	9.98	55.76	60.00	-4.24	peak	


4. Radiated emission test

4.1. Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R&S	ESR	7250-30406 7528	2019-04-30	1Year
2	Trilog Broadband Antenna	Schwarzbeck	VULB9168	00969	2019-06-14	2 Year
3	Pre-amplifier	R&S	8447F	3113A04553	2019-05-13	1Year
4	Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	2019-05-23	1Year
5	Horn antenna	Schwarzbeck	BBHA9120D	453	2019-05-23	2Year
6	Double Ridged Horn Antenna	A.H. System	SAS-574	584	2019-05-23	1Year
7	Pre-amplifier	R&S	SCU18	105326	2019-05-23	1Year
8	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 3	2019-05-23	1Year
9	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 4	2019-05-14	1Year
10	RF Cable	ESCO	ETS-LINGR EN	RFC-SMS-1 00-SMS-340 -IN	2019-05-23	1Year
11	Measurement software	Farad	EZ-EMC(VE R:1.1.4.2)	N/A	N/A	N/A

4.2. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz to 30MHz:

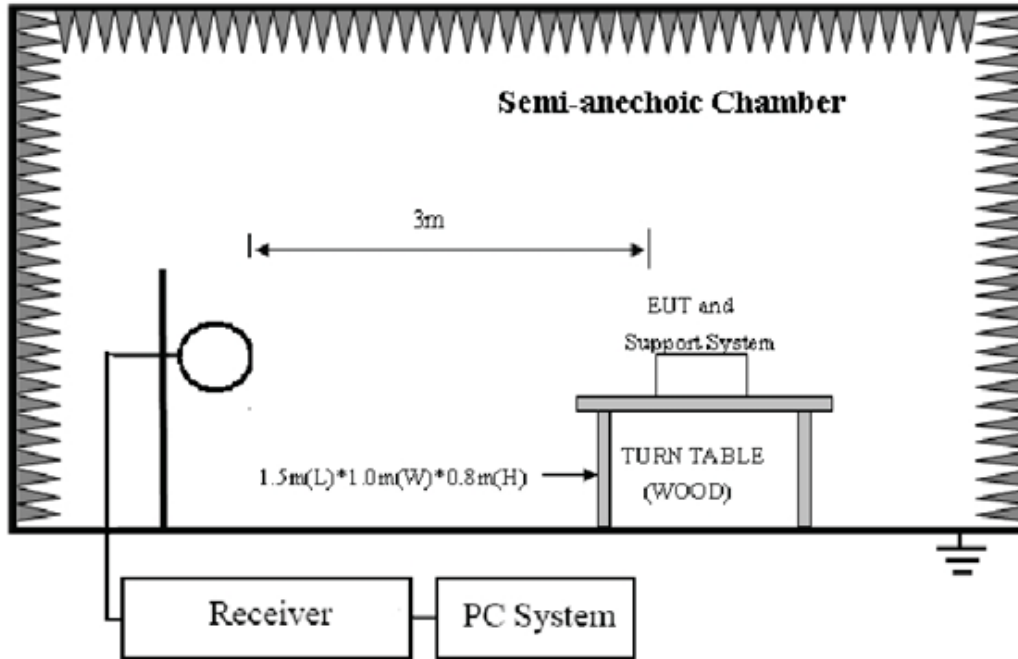

In 3m Anechoic Chamber Test Setup Diagram for 30MHz to 1GHz:

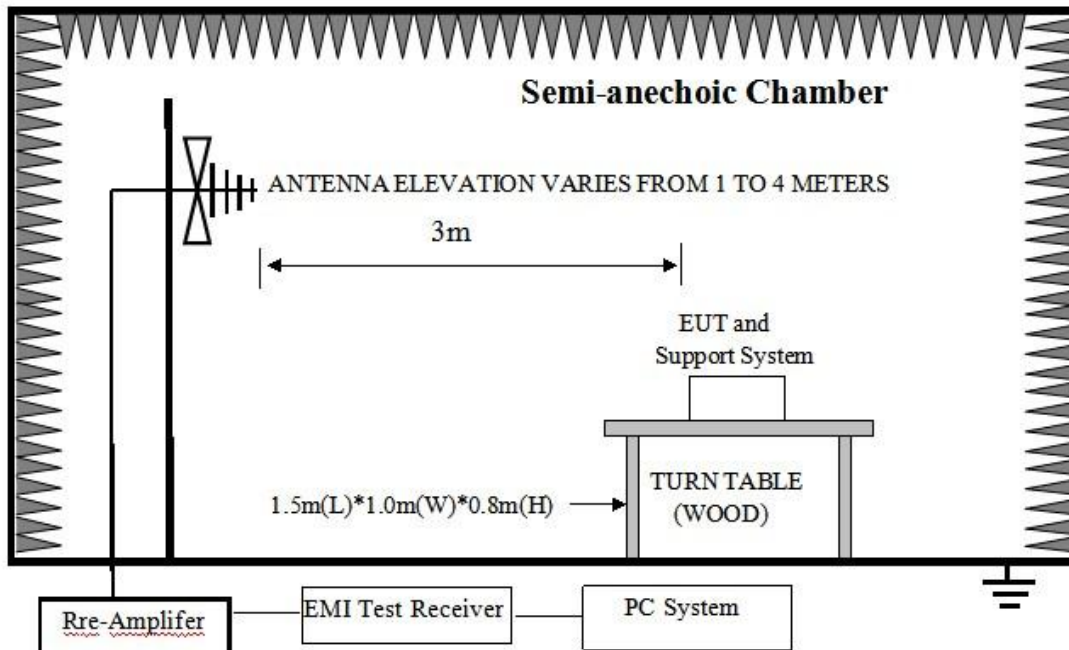

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz:

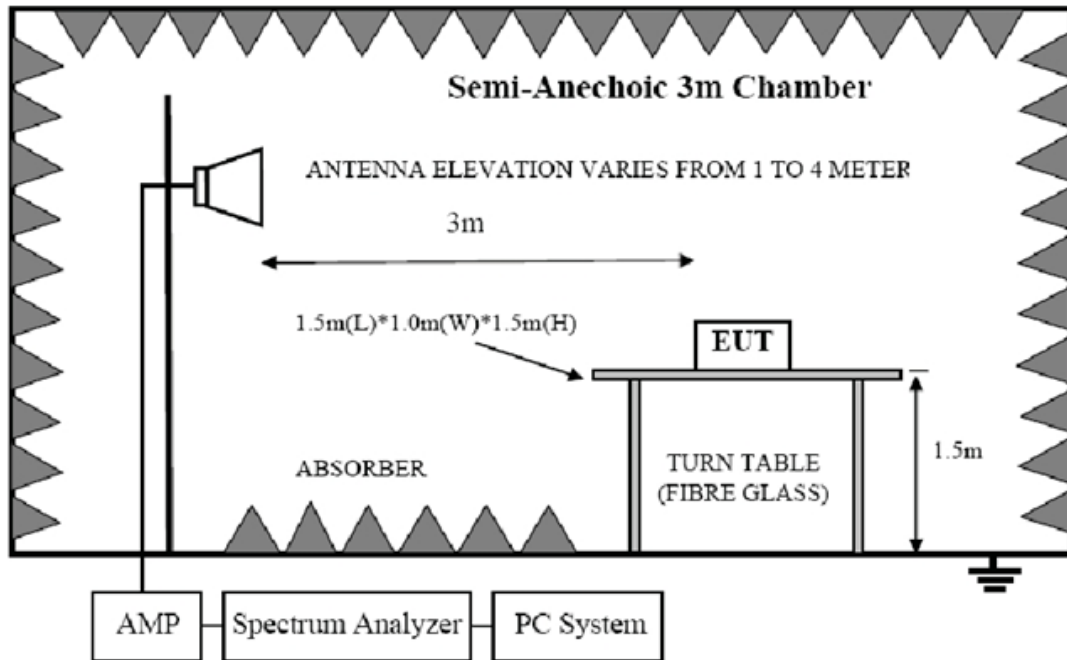

4.3. Limit

FCC 15.205 Restricted frequency band:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

FCC 15.209 Limit

Frequency (MHz)	Distance (Meters)	Field Strengths Limits dB(μV)/m
30--88	3	40.0
88--216	3	43.5
216--960	3	46.0
960--1000	3	54.0
Above 1GHz	3	Peak: 74.0
	3	Average:54.0

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2)Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

(3)The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz.Radiated emissions limits in these three bands are based on measurements employing an average detector.

(4) At frequencies below 30MHz, measurement may be performed at a distance closer then that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV}/\text{m}) = \text{Limit}_{30m}(\text{dBuV}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(5)All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4. Test Procedure

Procedure of Preliminary Test

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 4.2 of this report.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

EUT height should be 0.8m for below 1GHz and 1.5m for above 1GHz at ground with absorbers.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 18GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The X, Y, Z three axial are tested and the report only the worst case.

The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW:

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure.

4.5. Test result

PASS. (See below detailed test result)


All the emissions except fundamental emission from 9 KHz to 40GHz were comply with FCC PART 15.209 limits limit.

Note1: According exploratory test no any obvious emission were detected from 9KHz to 30MHz and 18GHz to 40GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.


Note3: Level = Reading Level + Factor, Margin= Level-Limit

Radiated Emission Test Result

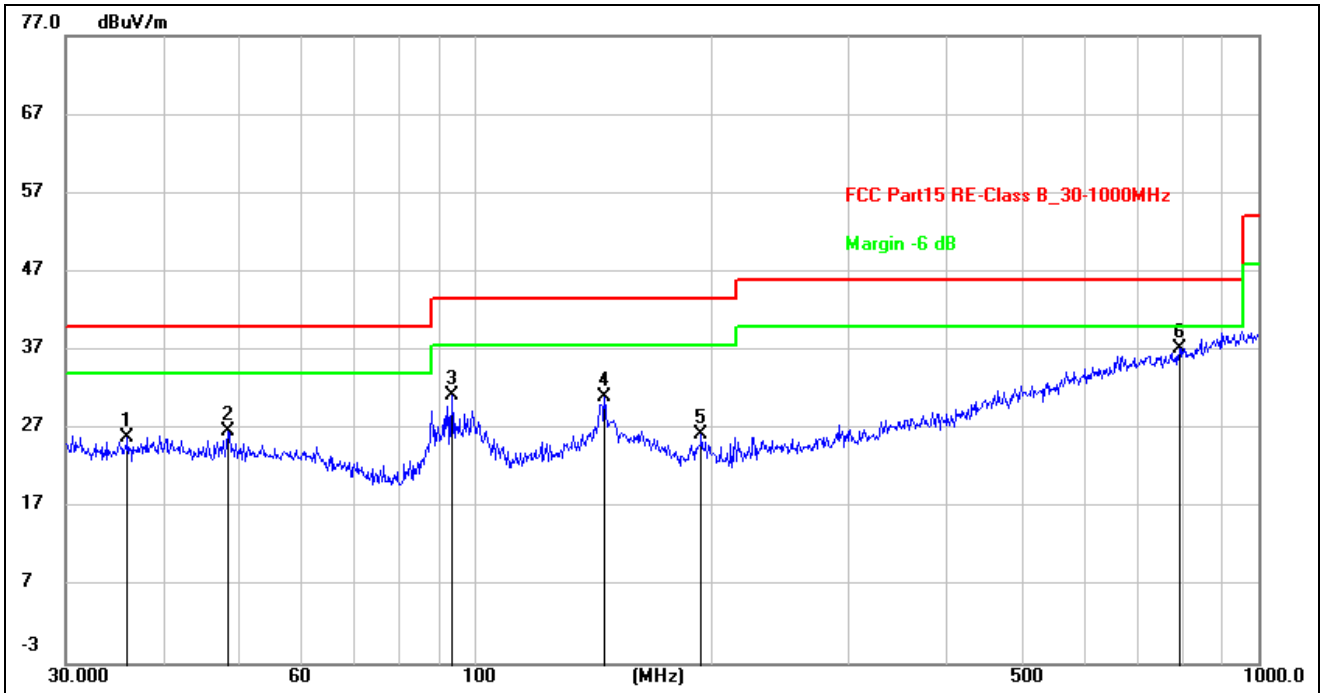

Site:	966 LAB	Antenna::	Horizontal	Temperature(C):	24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz			Humidity(%):	60%
EUT:	LED Shop Light	Test Time:	2020/4/14 13:46:47		
M/N.:	55703141	Power Rating:	AC 120V/60Hz		
Mode:	Lighting with Bluetooth mode	Test Engineer:			
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	36.0007	11.67	14.27	25.94	40.00	-14.06	peak	200	276	
2	48.3316	12.25	14.37	26.62	40.00	-13.38	peak	200	73	
3	93.4402	20.43	10.74	31.17	43.50	-12.33	peak	200	3	
4	146.3734	15.87	15.20	31.07	43.50	-12.43	peak	200	323	
5	194.4534	14.61	11.64	26.25	43.50	-17.25	peak	200	206	
6 *	793.3958	13.62	23.66	37.28	46.00	-8.72	peak	100	234	

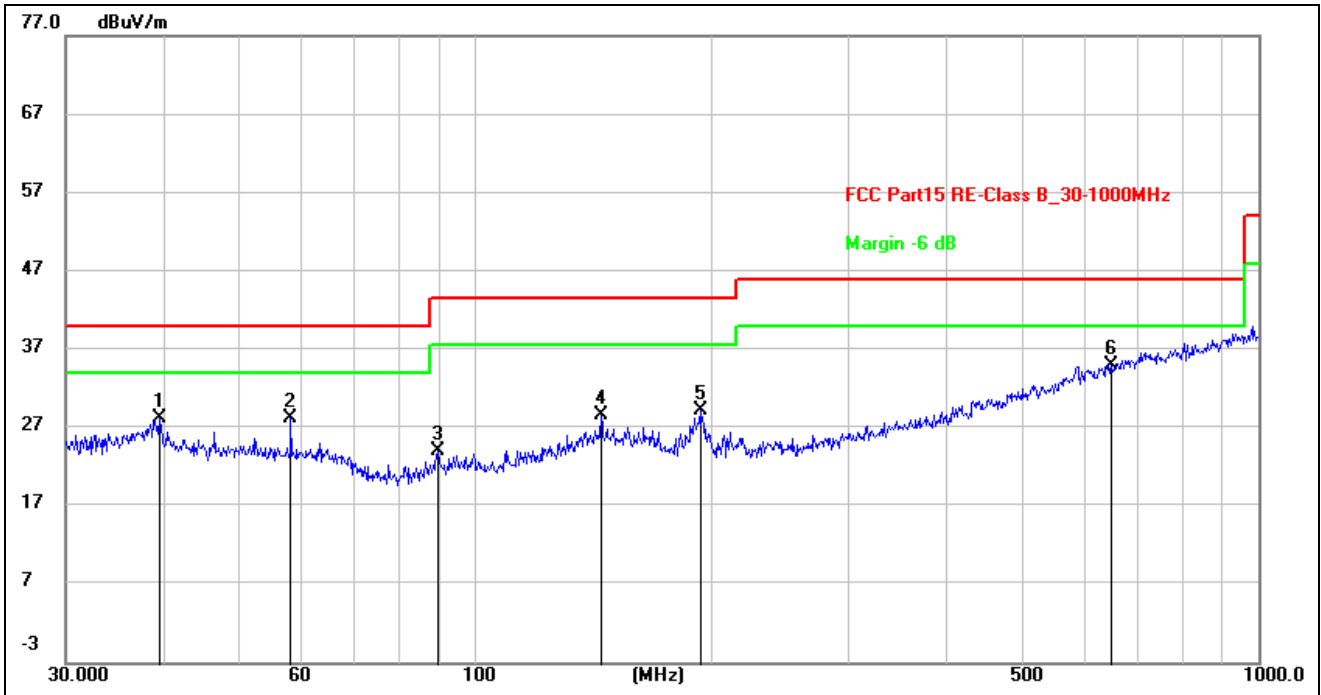

Site:	966 LAB	Antenna::	Vertical	Temperature(C):	24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz			Humidity(%):	60%
EUT:	LED Shop Light	Test Time:			2020/4/14 13:49:20
M/N.:	55703141	Power Rating:			AC 120V/60Hz
Mode:	Lighting with Bluetooth mode	Test Engineer:			
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	39.5757	13.43	14.77	28.20	40.00	-11.80	peak	200	65	
2	58.2029	14.46	13.75	28.21	40.00	-11.79	peak	100	140	
3	89.5899	13.67	10.47	24.14	43.50	-19.36	peak	100	241	
4	144.8417	13.54	15.09	28.63	43.50	-14.87	peak	200	272	
5	193.7727	17.59	11.67	29.26	43.50	-14.24	peak	100	228	
6 *	649.6596	13.26	21.74	35.00	46.00	-11.00	peak	200	141	

EUT:	LED Shop Light	Model Name :	55703141
Temperature:	25 °C	Test Engineer	Jack
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	3Mbps (worst)	Test Voltage :	AC 120V/60HZ
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average, PK detector is for them all.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
2390.00	50.57	4.68	55.25	74.00	-18.75	peak
2390.00	35.40	4.68	40.08	54.00	-13.92	AVG
4804.00	46.29	5.06	51.35	74.00	-22.65	peak
4804.00	36.64	5.06	41.70	54.00	-12.30	AVG
7206.00	43.82	7.03	50.85	74.00	-23.15	peak
7206.00	32.57	7.03	39.60	54.00	-14.40	AVG

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
2390.00	45.12	4.68	49.80	74.00	-24.20	peak
2390.00	37.39	4.68	42.07	54.00	-11.93	AVG
4804.00	48.07	5.06	53.13	74.00	-20.87	peak
4804.00	40.57	5.06	45.63	54.00	-8.37	AVG
7206.00	46.05	7.03	53.08	74.00	-20.92	peak
7206.00	31.97	7.03	39.00	54.00	-15.00	AVG

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Lowest Channel: 2402 MHz

Data rate: 3Mbps

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
4882.00	52.61	5.14	57.75	74.00	-16.25	peak
4882.00	35.32	5.14	40.46	54.00	-13.54	AVG
7323.00	52.62	7.54	60.16	74.00	-13.84	peak
7323.00	34.95	7.54	42.49	54.00	-11.51	AVG

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
4882.00	50.92	5.14	56.06	74.00	-17.94	peak
4882.00	37.52	5.14	42.66	54.00	-11.34	AVG
7323.00	41.59	7.54	49.13	74.00	-24.87	peak
7323.00	34.86	7.54	42.40	54.00	-11.60	AVG

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Middle Channel: 2441 MHz

Data rate: 3Mbps

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
2483.50	49.52	4.71	54.23	74.00	-19.77	peak
2483.50	37.78	4.71	42.49	54.00	-11.51	AVG
4960.00	50.56	5.22	55.78	74.00	-18.22	peak
4960.00	41.14	5.22	46.36	54.00	-7.64	AVG
7440.00	46.52	8.06	54.58	74.00	-19.42	peak
7440.00	37.86	8.06	45.92	54.00	-8.08	AVG

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
2483.50	53.00	4.71	57.71	74.00	-16.29	peak
2483.50	38.79	4.71	43.50	54.00	-10.50	AVG
4960.00	49.32	5.22	54.54	74.00	-19.46	peak
4960.00	40.61	5.22	45.83	54.00	-8.17	AVG
7440.00	41.47	8.06	49.53	74.00	-24.47	peak
7440.00	36.52	8.06	44.58	54.00	-9.42	AVG

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Highest channel: 2480 MHz

Data rate: 3Mbps

5. Maximum Peak Output Power

5.1. Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

15.247(b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.2. Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW, Sweep = auto
Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. Also shall be performed at different modes of operation.

5.3. Deviation from standard

No deviation.


5.4. Test setup




5.5. TEST RESULTS

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	3-DH1	2402	Ant 1	3.469	0	3.469	21	Pass
NVNT	3-DH1	2441	Ant 1	3.105	0	3.105	21	Pass
NVNT	3-DH1	2480	Ant 1	1.879	0	1.879	21	Pass


Power NVNT 3-DH1 2402MHz Ant1

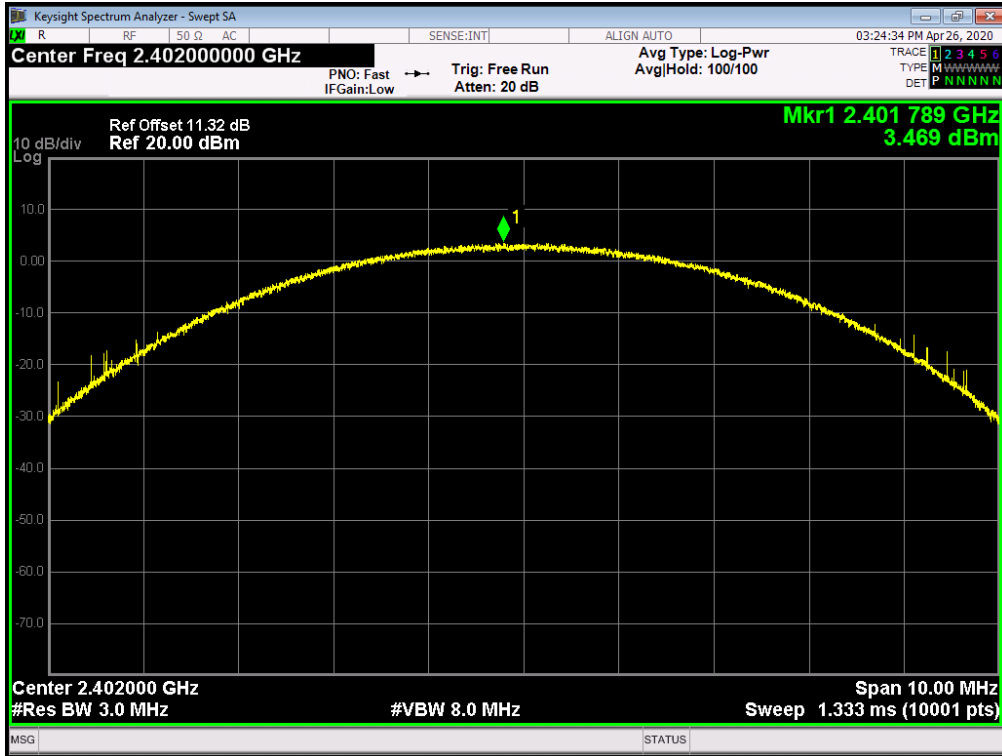

Power NVNT 3-DH1 2441MHz Ant1

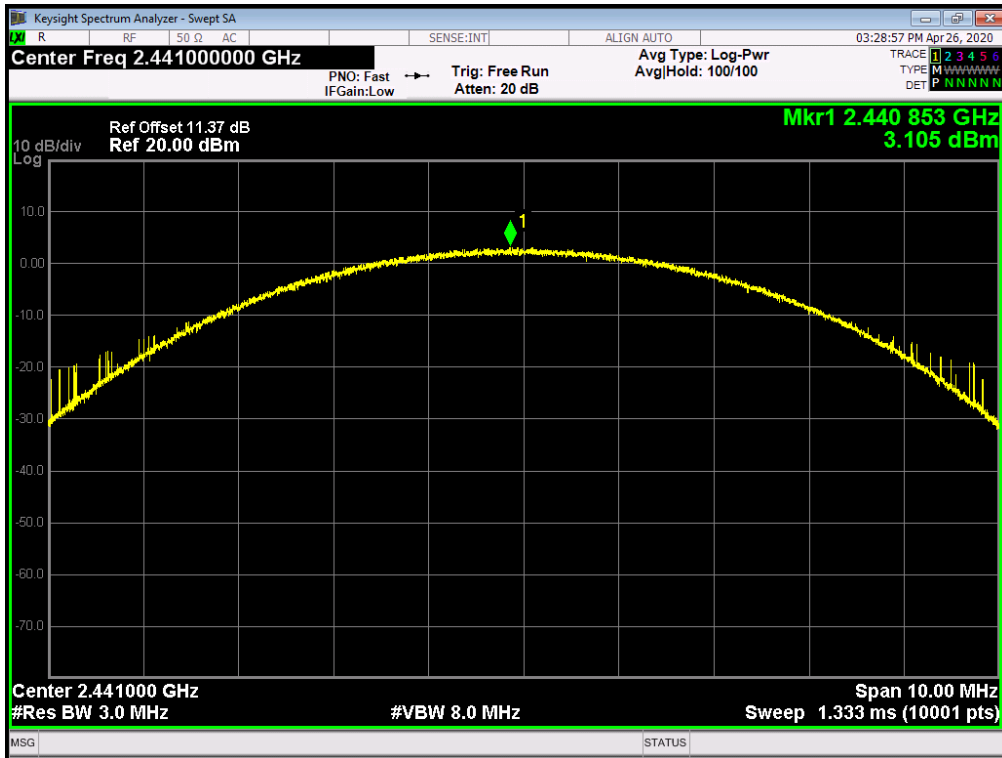


Power NVNT 3-DH1 2480MHz Ant1

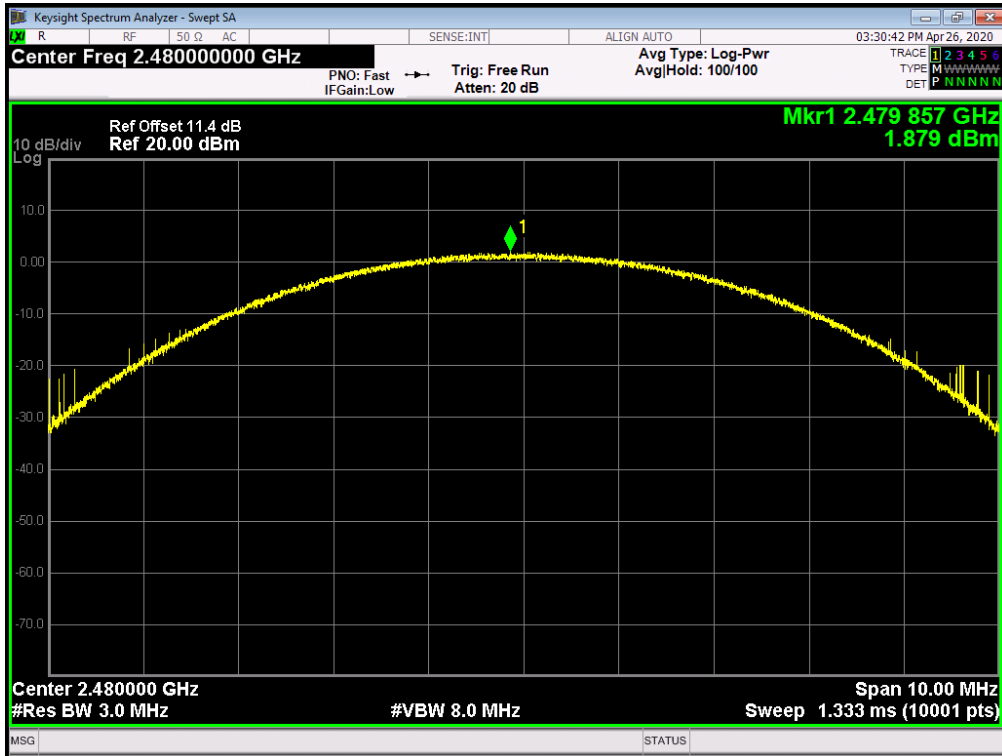


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	3-DH3	2402	Ant 1	3.476	0	3.476	21	Pass
NVNT	3-DH3	2441	Ant 1	2.913	0	2.913	21	Pass
NVNT	3-DH3	2480	Ant 1	1.786	0	1.786	21	Pass


Power NVNT 3-DH3 2402MHz Ant1

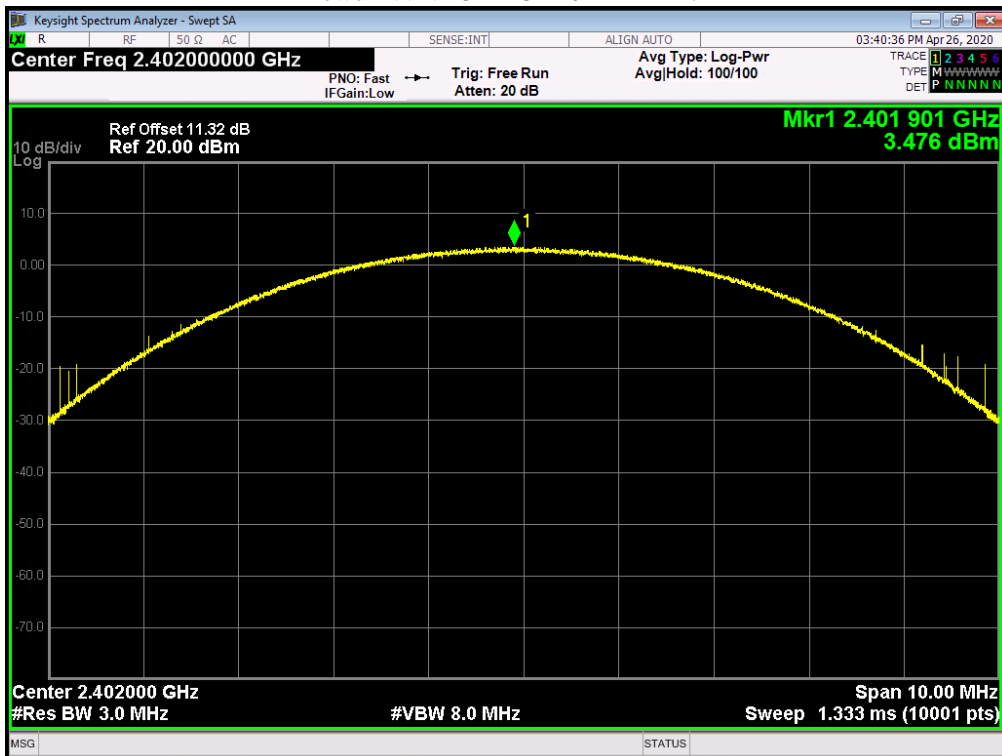

Power NVNT 3-DH3 2441MHz Ant1

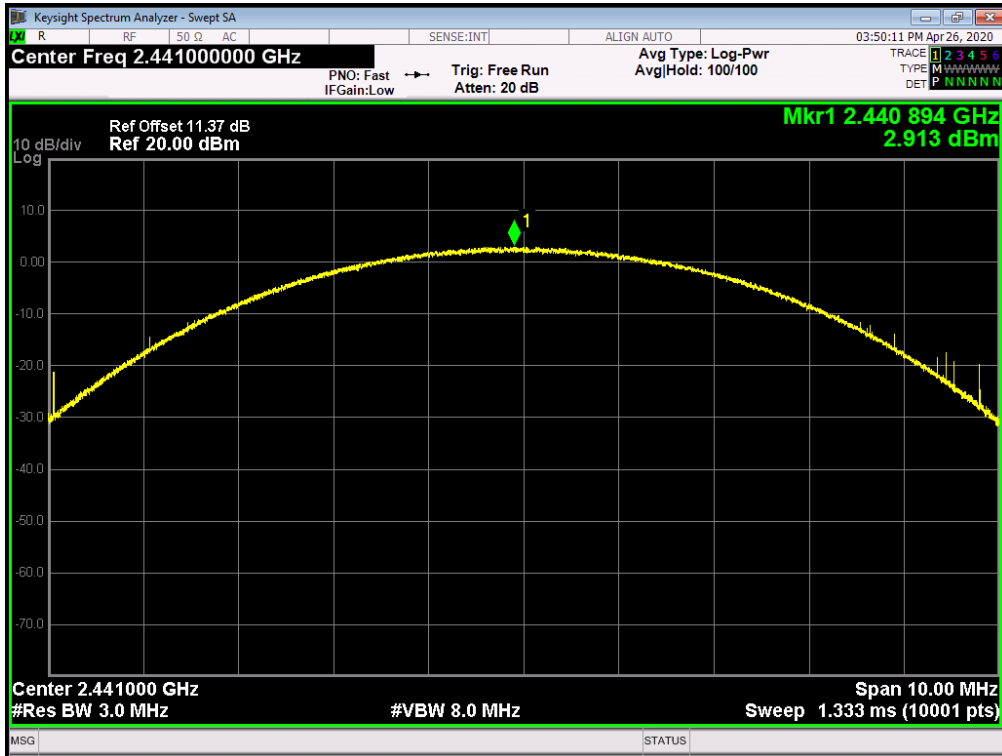


Power NVNT 3-DH3 2480MHz Ant1

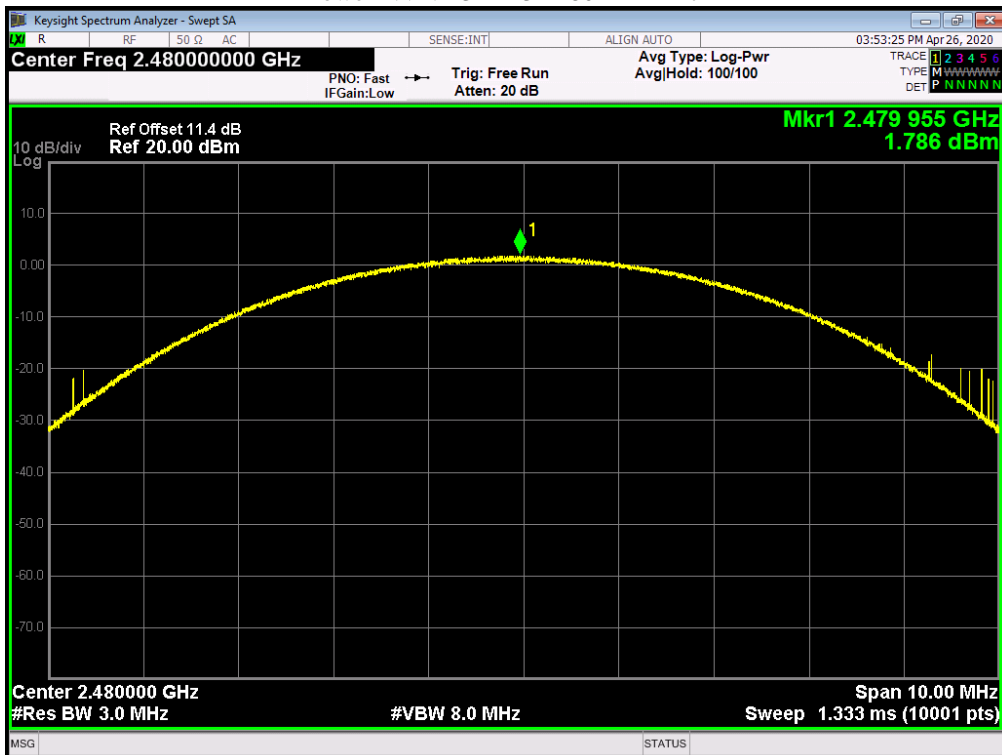



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	3-DH5	2402	Ant 1	3.40	0	3.4	21	Pass
NVNT	3-DH5	2441	Ant 1	2.868	0	2.868	21	Pass
NVNT	3-DH5	2480	Ant 1	1.766	0	1.766	21	Pass

Power NVNT 3-DH5 2402MHz Ant1

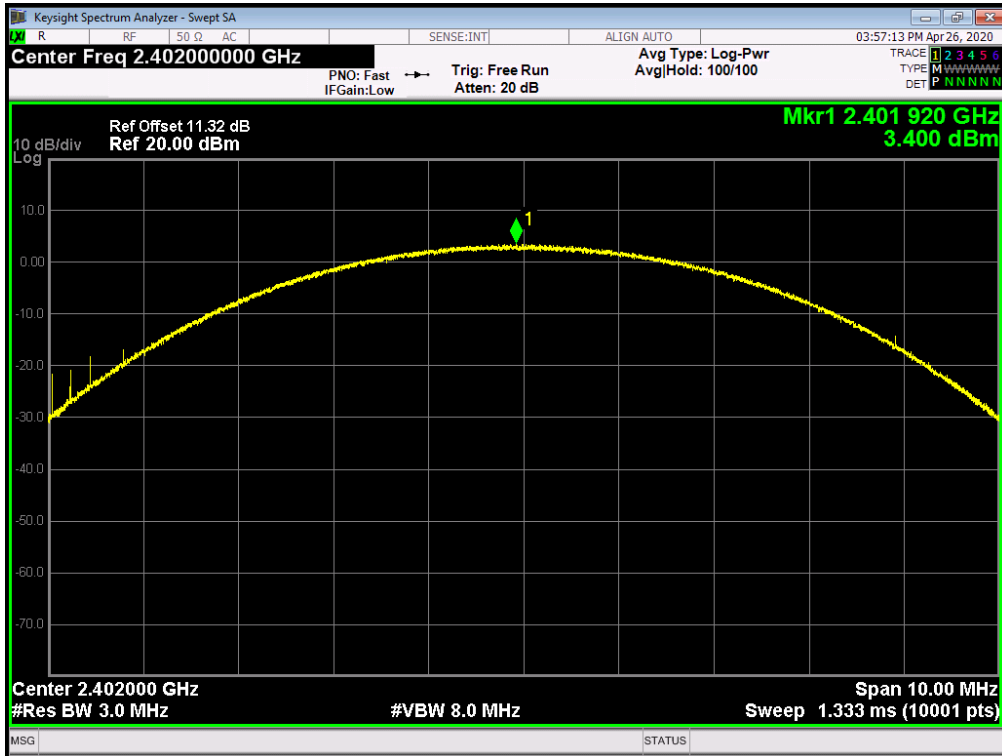

Power NVNT 3-DH5 2441MHz Ant1

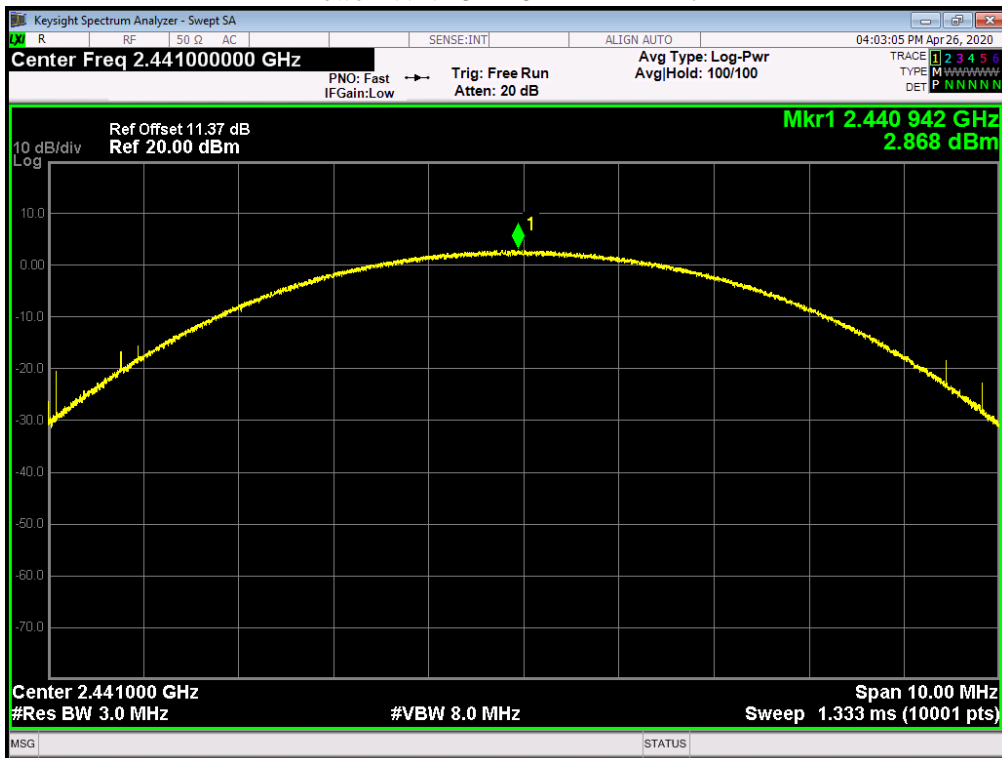

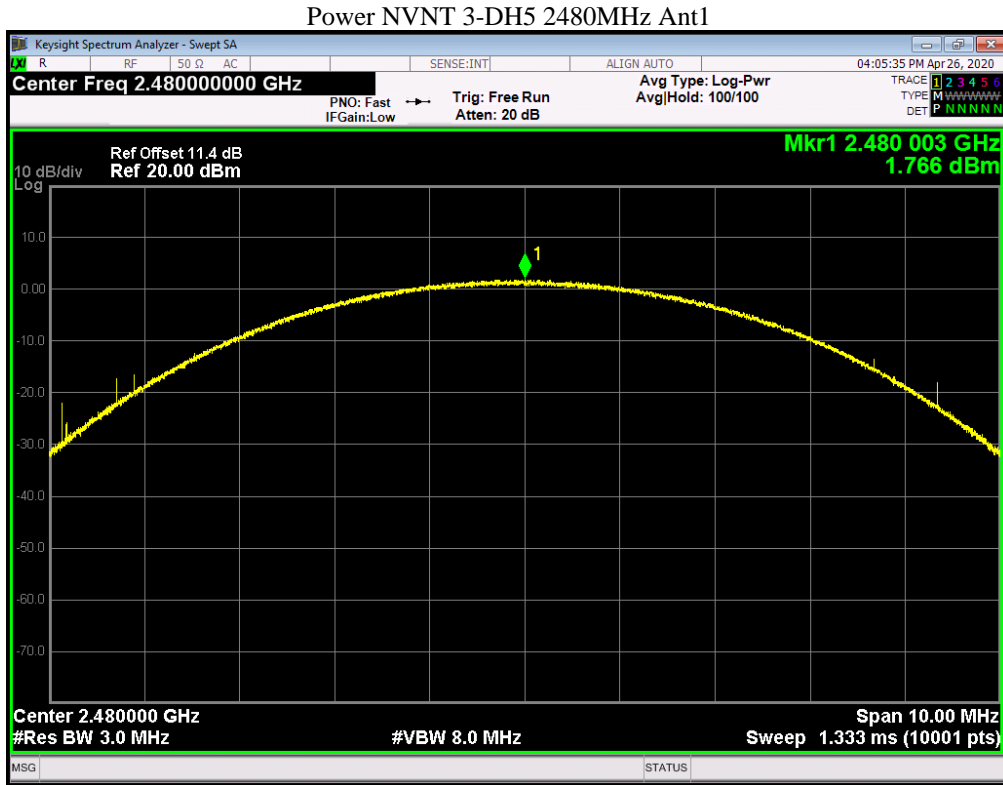

Note: All the modes (1-DH1, 1-DH3,1-DH5,2-DH1,2-DH3,2-DH5,3-DH1,3-DH3,3-DH5) had been test, but only the worst data (3-DH1,3-DH3,3-DH5) record in the report.

6. BANDWIDTH TEST

6.1. Applied procedures / Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.


6.2. Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW, Sweep = auto, Detector function = peak
Trace = max hold

6.3. Deviation from standard

No deviation.


6.4. Test setup

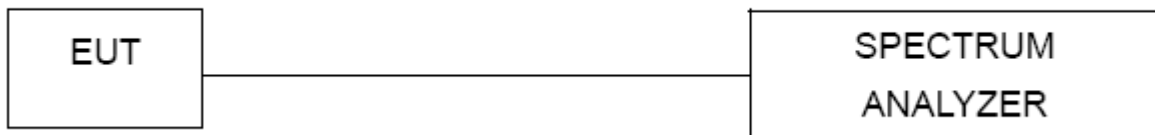


6.5. Test results

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	GFSK	2402	Ant 1	0.9004	0.9578	0	Pass
NVNT	GFSK	2441	Ant 1	0.8975	1.0096	0	Pass
NVNT	GFSK	2480	Ant 1	0.9098	1.0152	0	Pass


OBW NVNT 1-DH1 2402MHz Ant1

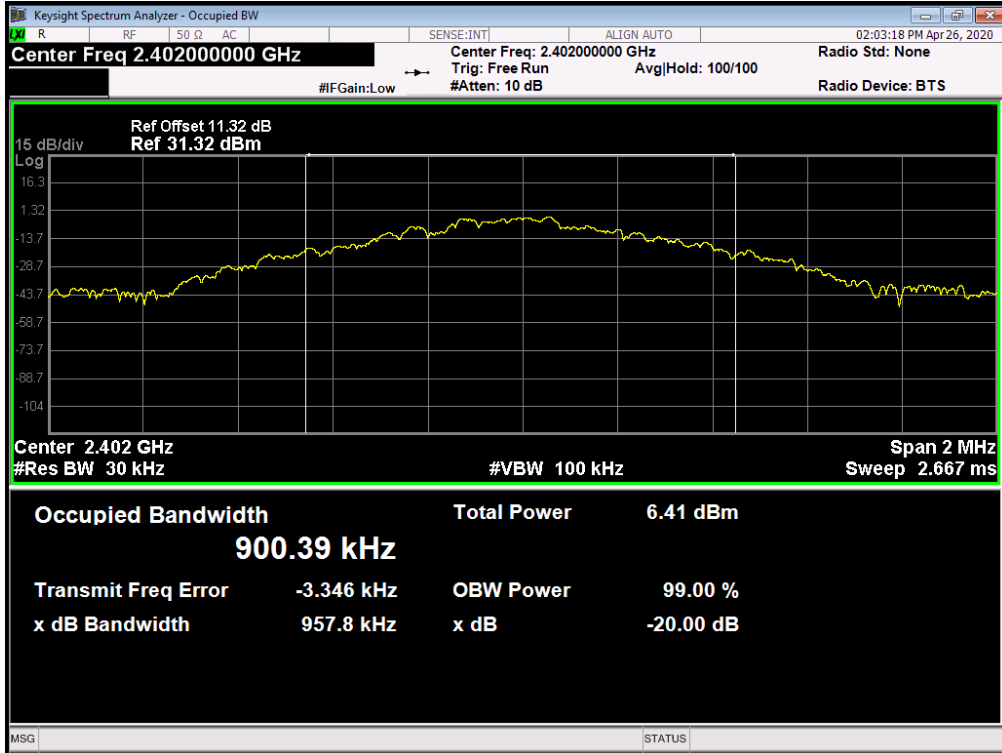

OBW NVNT 1-DH1 2441MHz Ant1

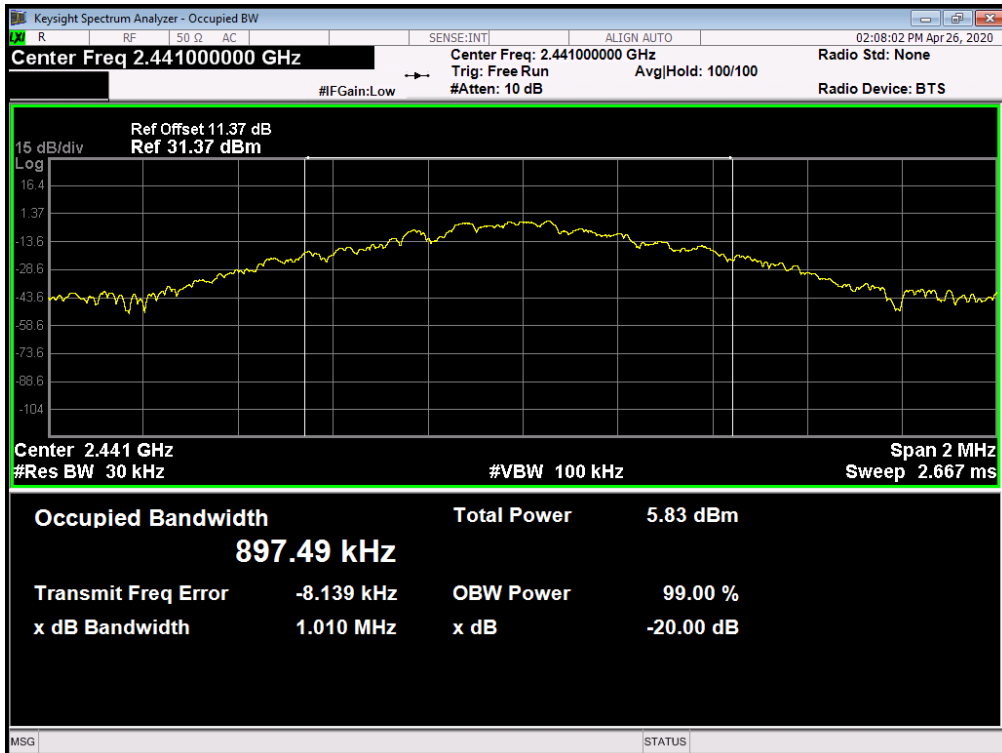


OBW NVNT 1-DH1 2480MHz Ant1

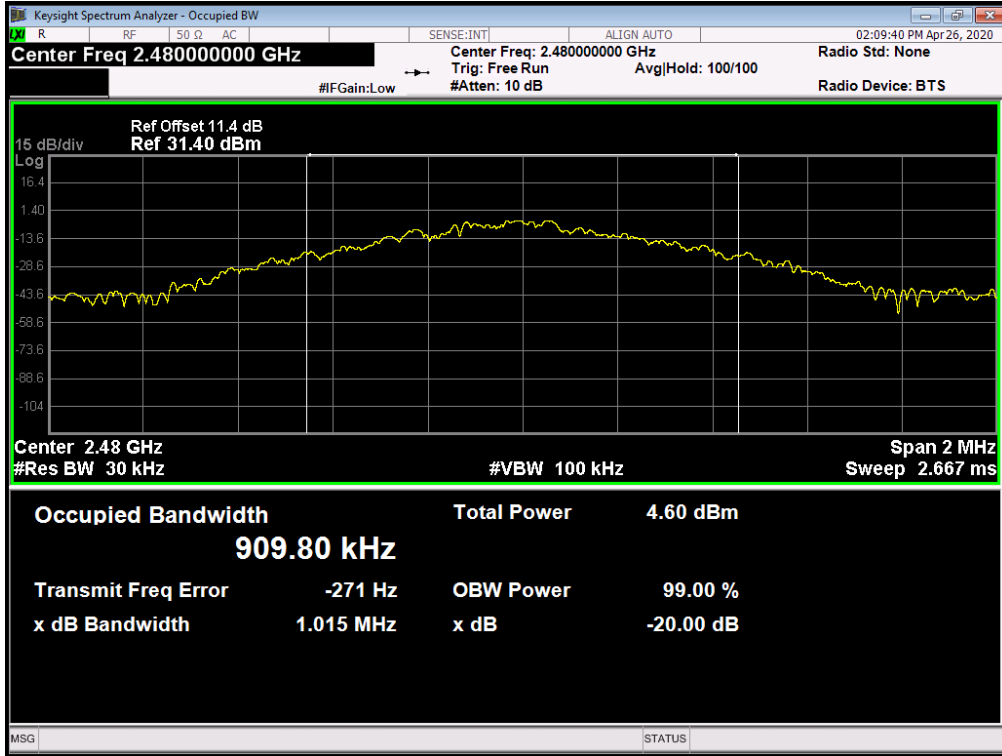


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	2-DH1	$\pi/4$ -DQPSK	Ant 1	1.1911	1.3485	0	Pass
NVNT	2-DH1	$\pi/4$ -DQPSK	Ant 1	1.1888	1.3499	0	Pass
NVNT	2-DH1	$\pi/4$ -DQPSK	Ant 1	1.1929	1.3529	0	Pass


OBW NVNT 2-DH1 2402MHz Ant1

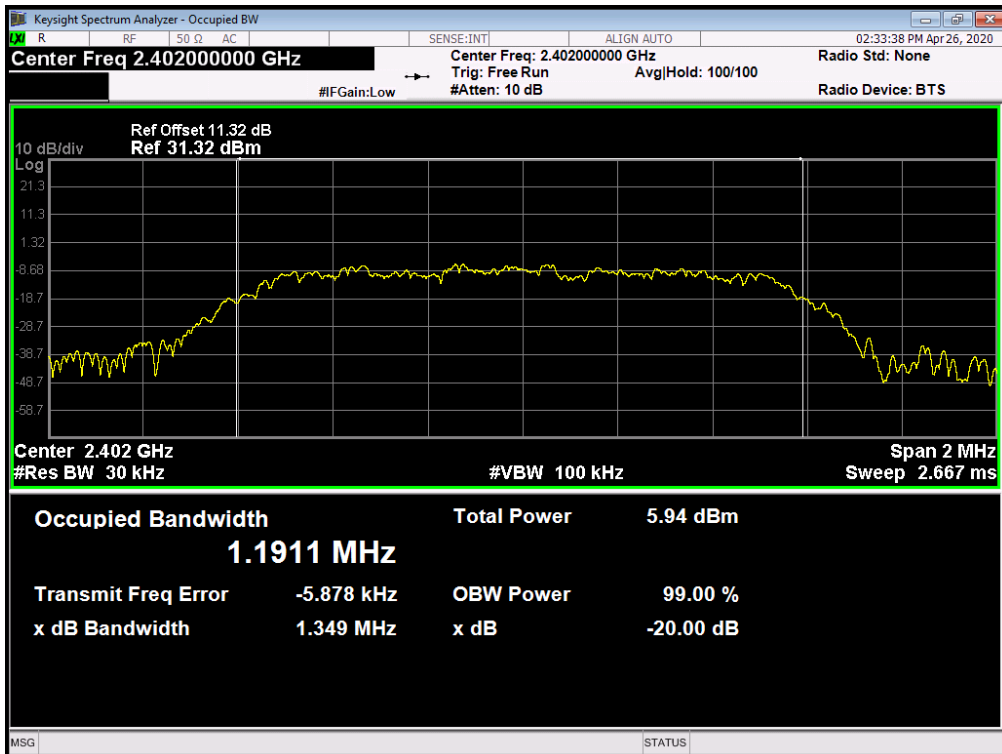

OBW NVNT 2-DH1 2441MHz Ant1

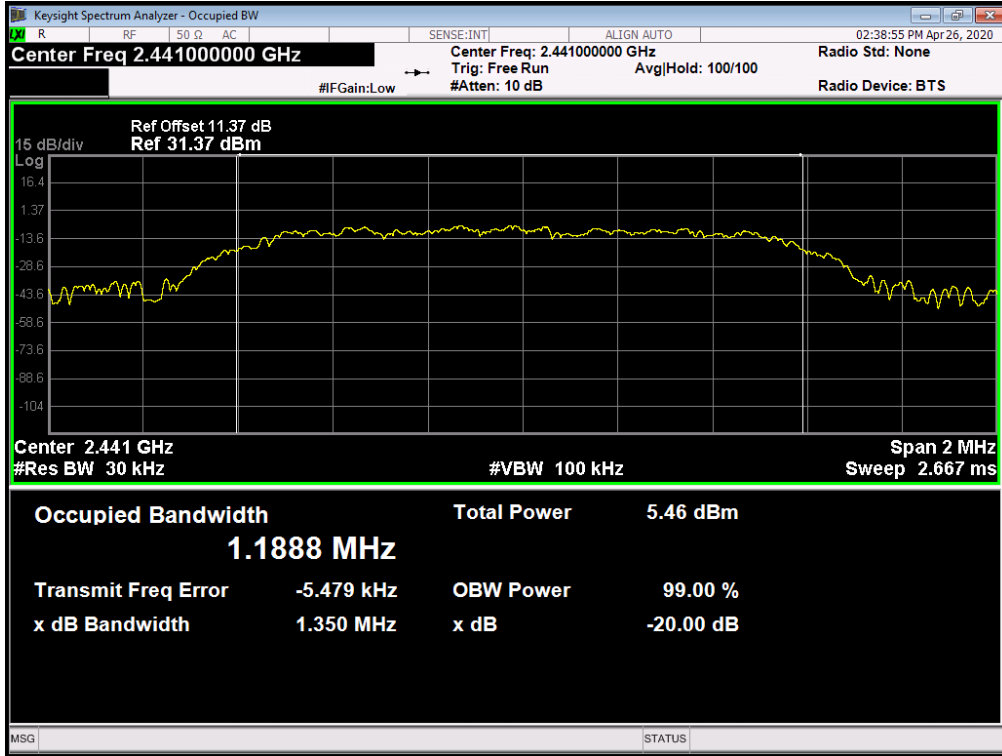


OBW NVNT 2-DH1 2480MHz Ant1

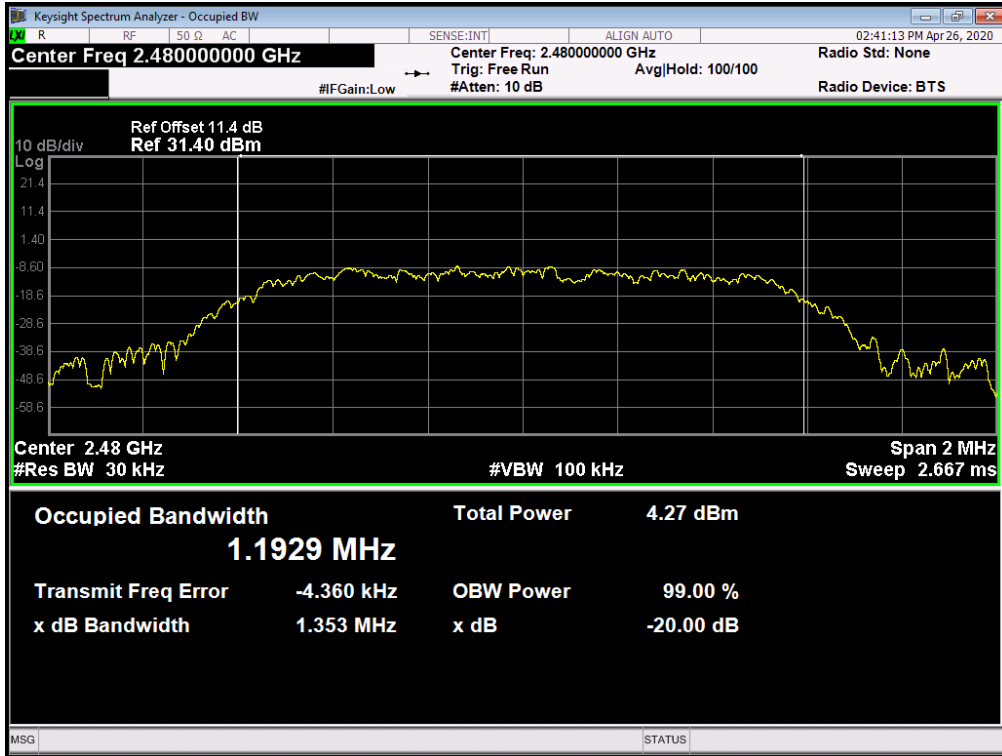


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	8DPSK	2402	Ant 1	1.1946	1.3374	0	Pass
NVNT	8DPSK	2441	Ant 1	1.1931	1.3337	0	Pass
NVNT	8DPSK	2480	Ant 1	1.2001	1.341	0	Pass


OBW NVNT 3-DH5 2402MHz Ant1

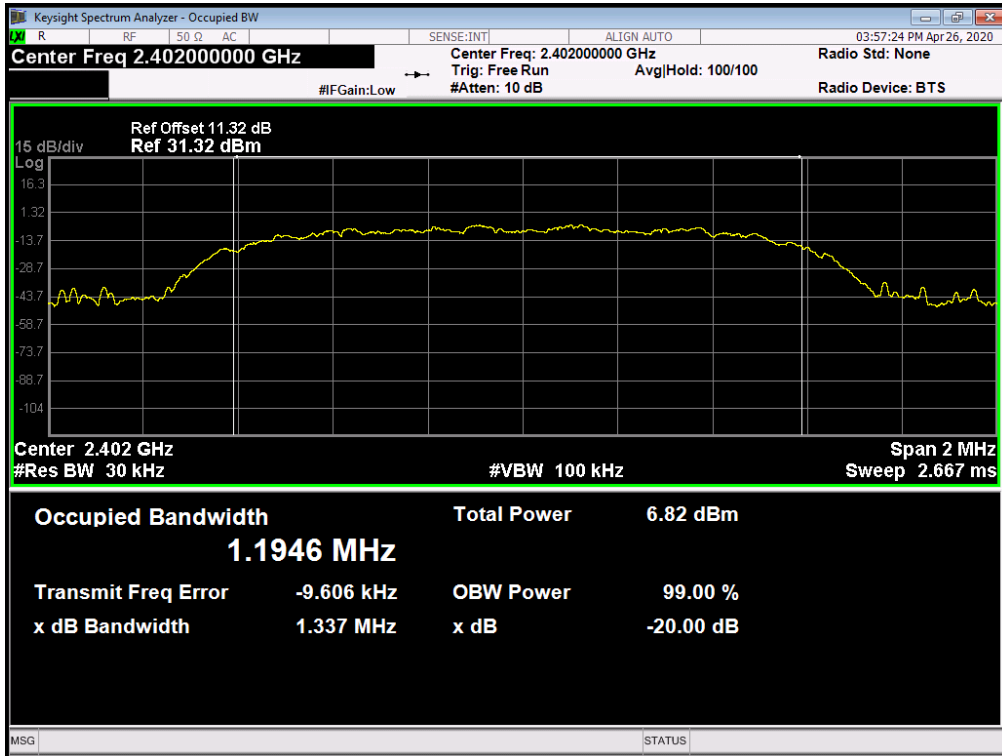

OBW NVNT 3-DH5 2441MHz Ant1

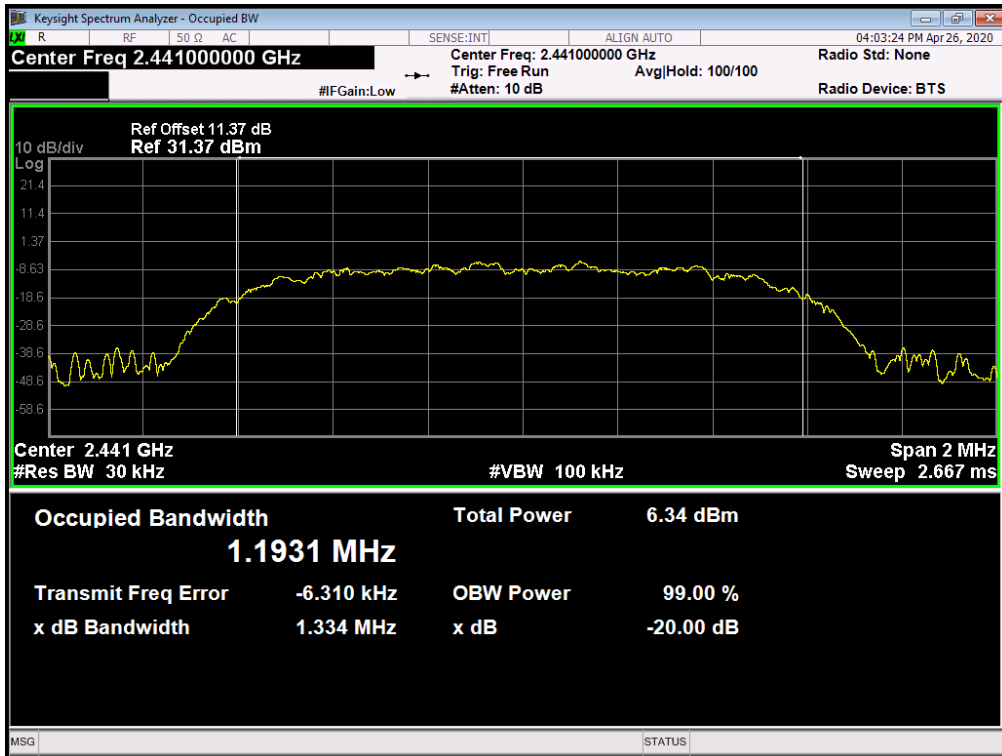

OBW NVNT 3-DH5 2480MHz Ant1

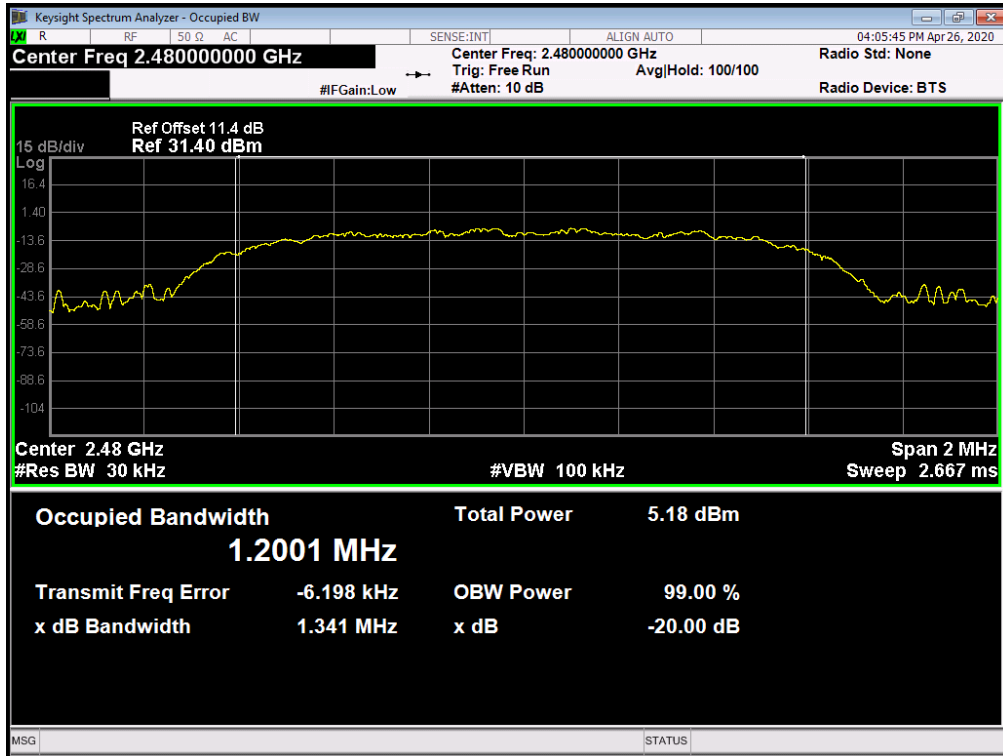

7. Carrier Frequencies Separated

7.1. Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.2. Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as
Span = wide enough to capture the peaks of two adjacent channels, Resolution (or IF) Bandwidth (RBW) \geq 1% of the span, Video (or Average) Bandwidth (VBW) \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

7.3. Deviation from standard



No deviation.

7.4. Test setup



7.5. Test results

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	GFSK	2401.978	2403.019	1.041	0.639	Pass
NVNT	GFSK	2440.993	2442.052	1.059	0.673	Pass
NVNT	GFSK	2478.984	2480.004	1.02	0.677	Pass

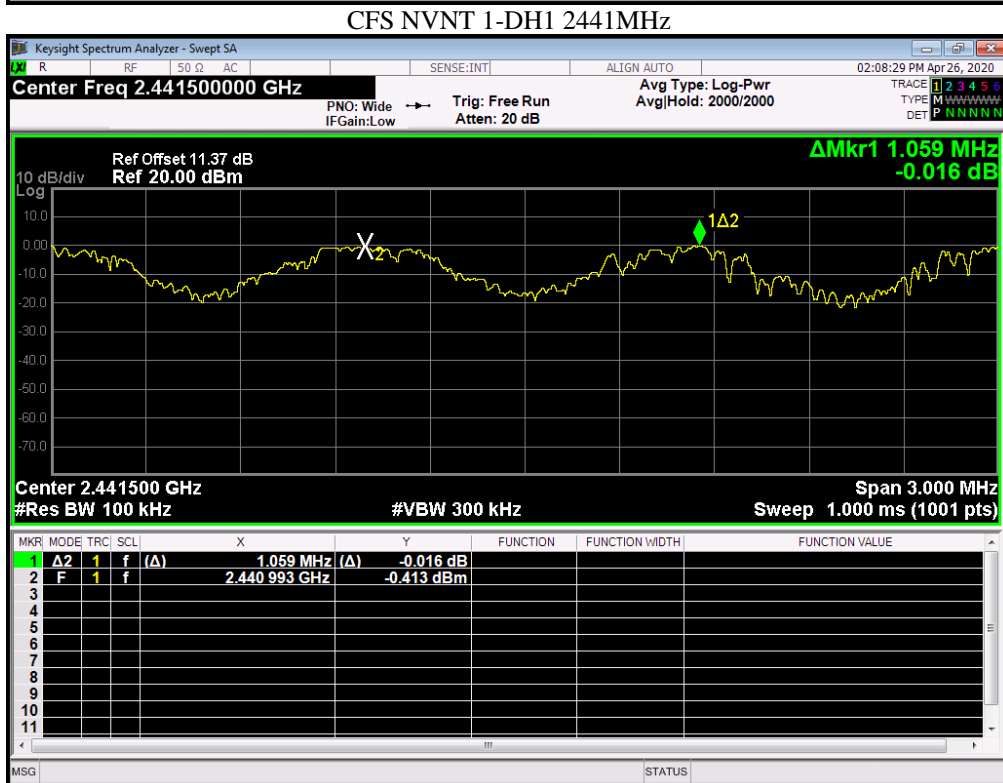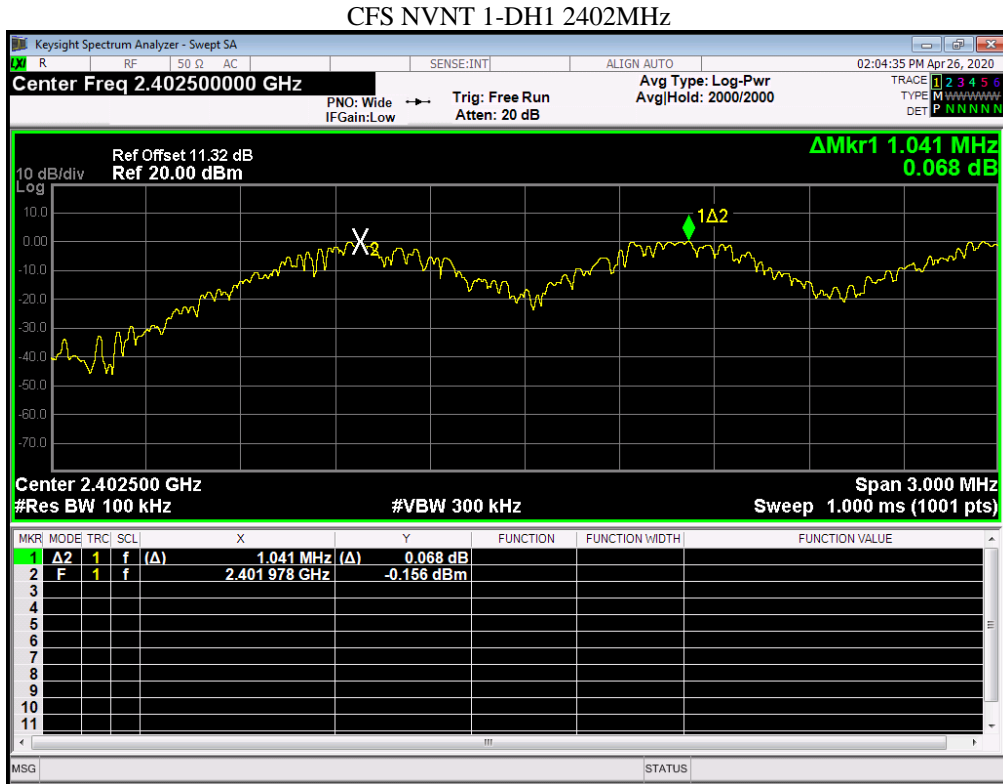


CFS NVNT 1-DH1 2480MHz




Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	$\pi/4$ -DQPSK	2402.041	2402.971	0.93	0.899	Pass
NVNT	$\pi/4$ -DQPSK	2441.047	2441.998	0.951	0.9	Pass
NVNT	$\pi/4$ -DQPSK	2478.987	2479.98	0.993	0.902	Pass


CFS NVNT 2-DH1 2402MHz

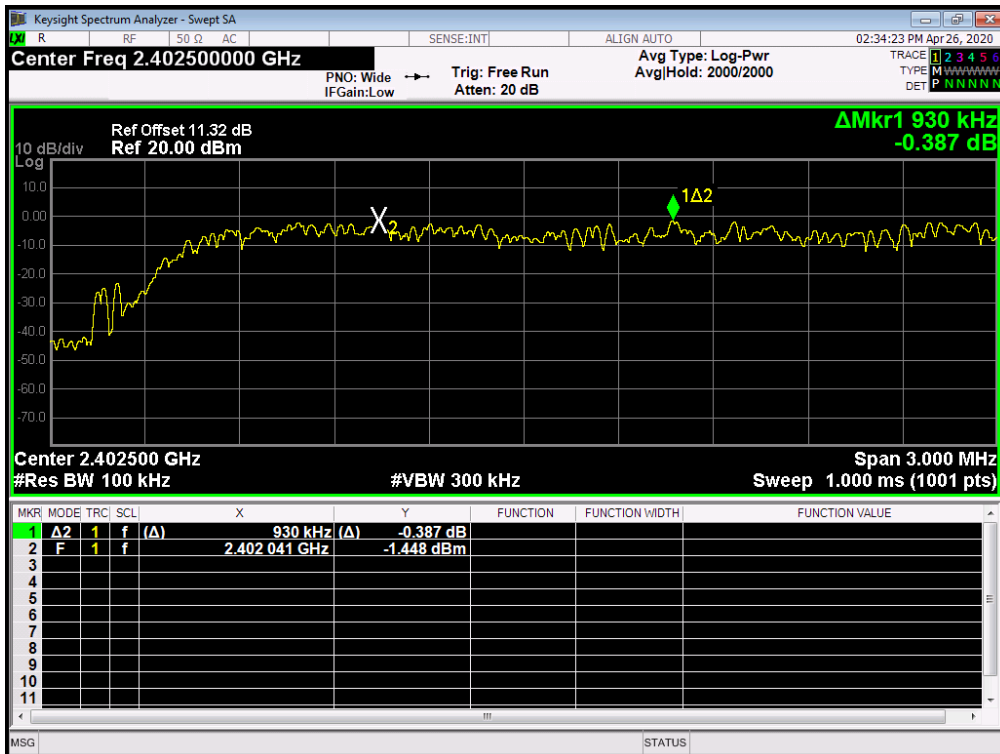

CFS NVNT 2-DH1 2441MHz

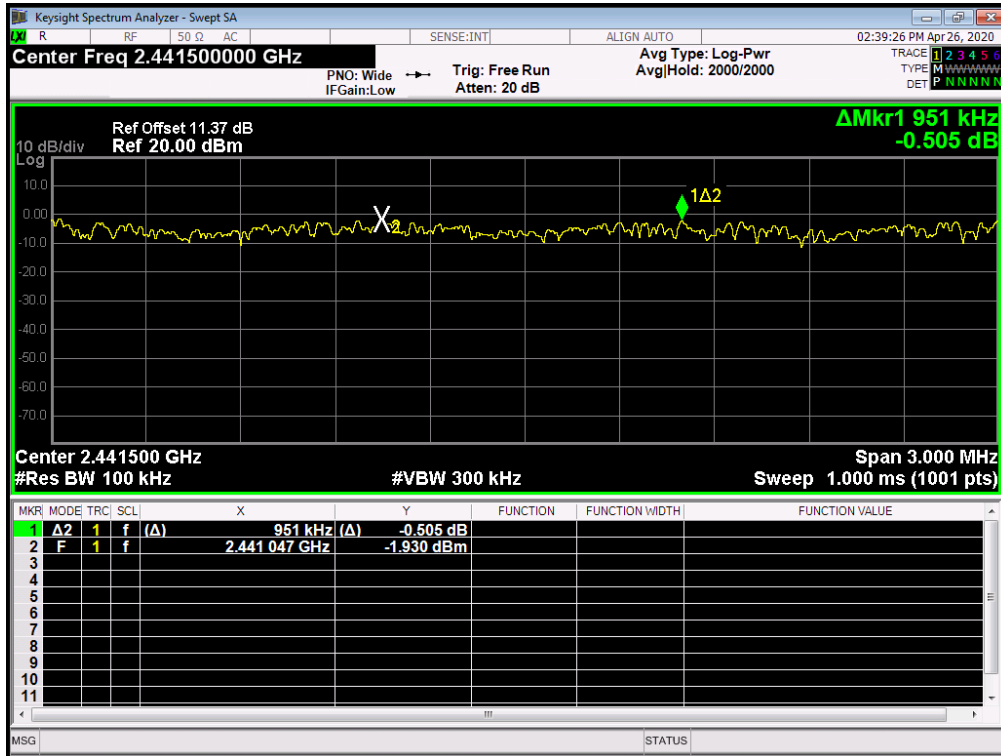


CFS NVNT 2-DH1 2480MHz

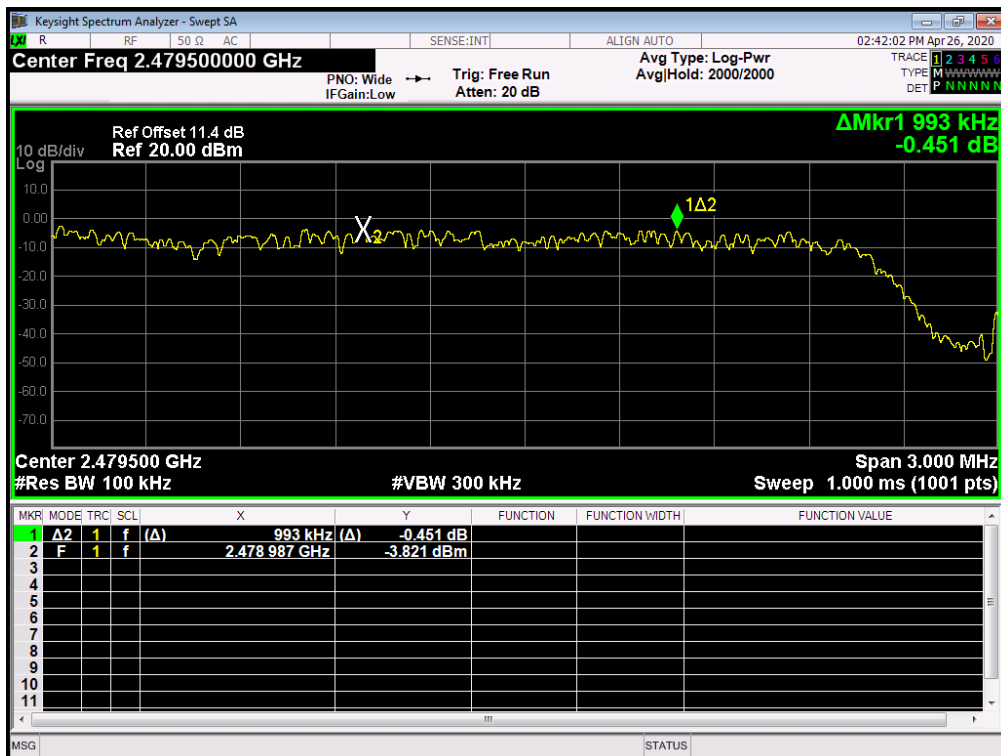


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	8DPSK	2402.089	2403.106	1.017	0.894	Pass
NVNT	8DPSK	2441.089	2442.133	1.044	0.889	Pass
NVNT	8DPSK	2479.9	2480.1	1.20	0.894	Pass


CFS NVNT 3-DH5 2402MHz

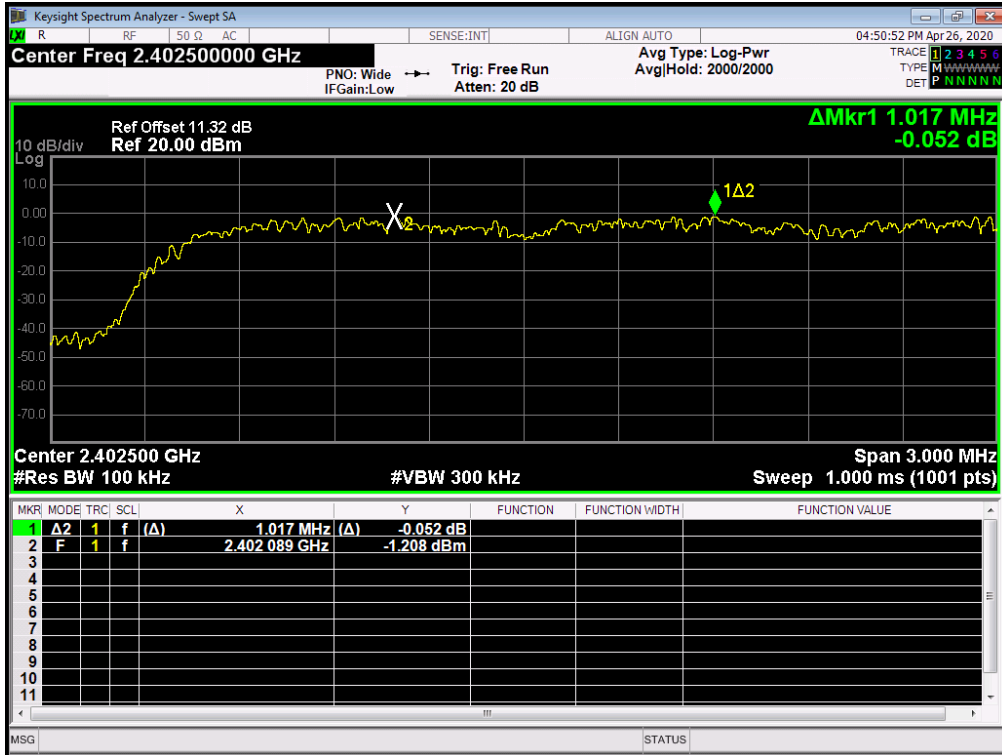

CFS NVNT 3-DH5 2441MHz

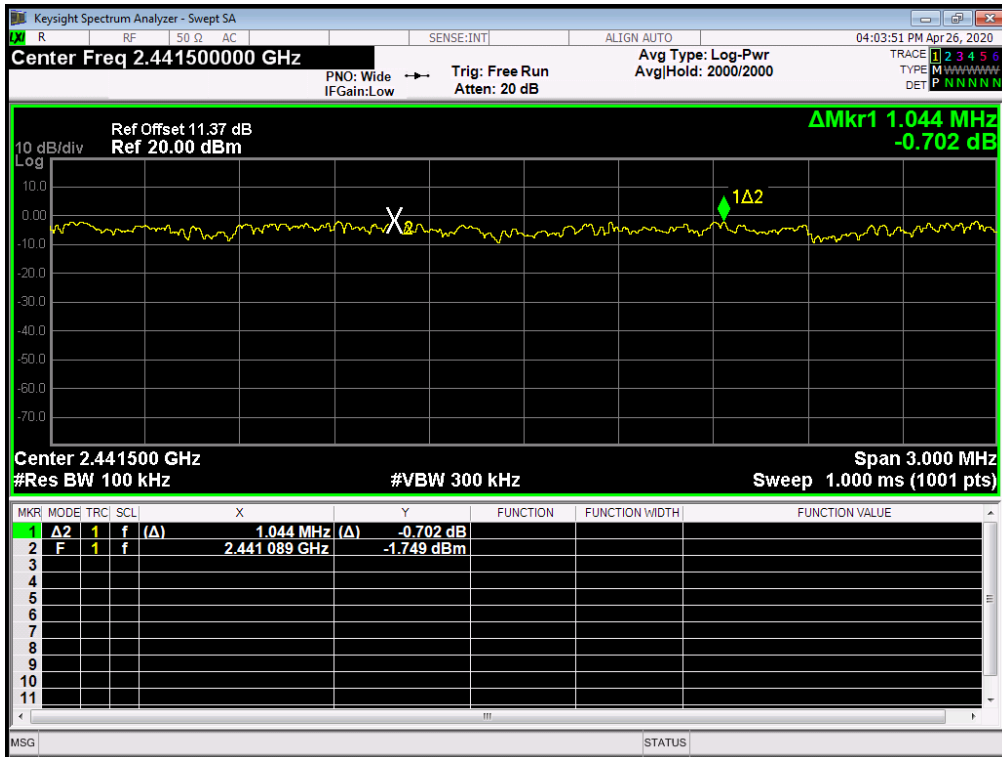

CFS NVNT 3-DH5 2480MHz

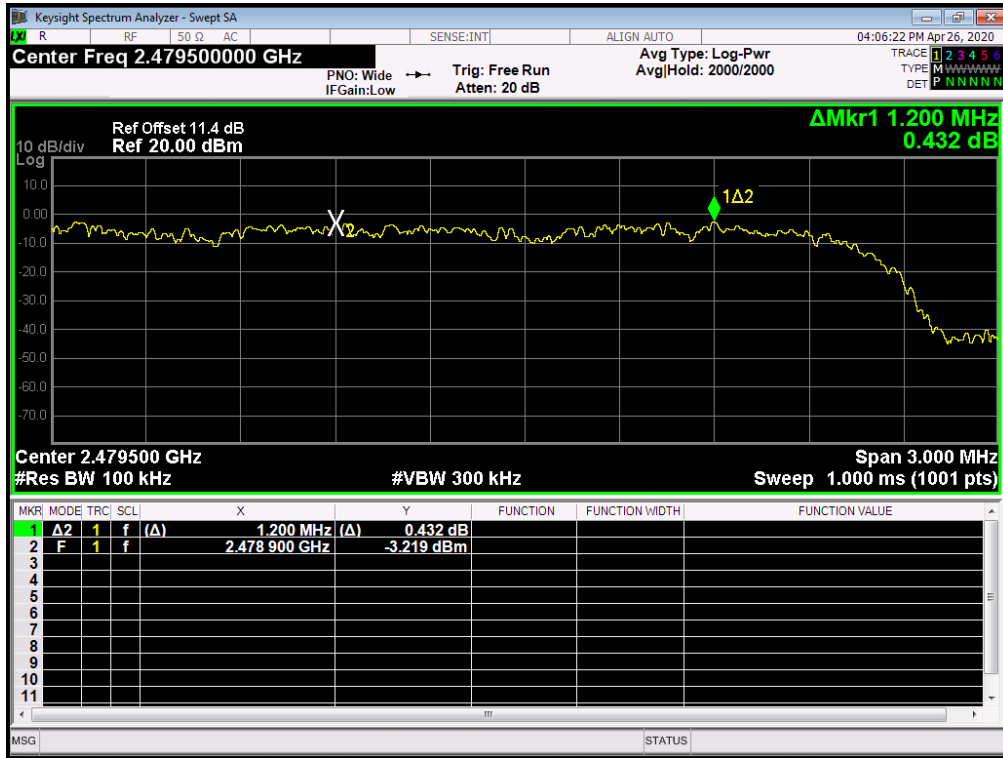

8. Hopping Channel Number

8.1. Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


8.2. Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer , set the Spectrum Analyzer as
Span = the frequency band of operation, RBW \geq 1% of the span, VBW \geq RBW Sweep = auto
Detector function = peak, Trace = max hold
- (2) The EUT should be have its hopping function enabled. Maxhold and record hopping channels
It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

8.3. Deviation from standard

No deviation.

8.4. Test setup

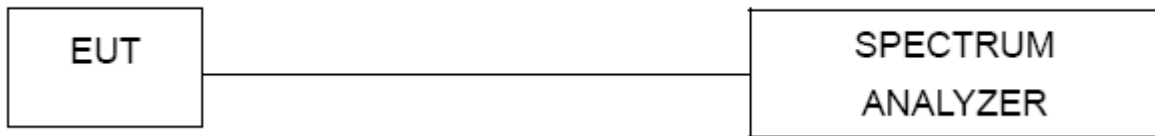


8.5. Test result


Number of Hopping Channel

Description of Channel:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		


GFSK

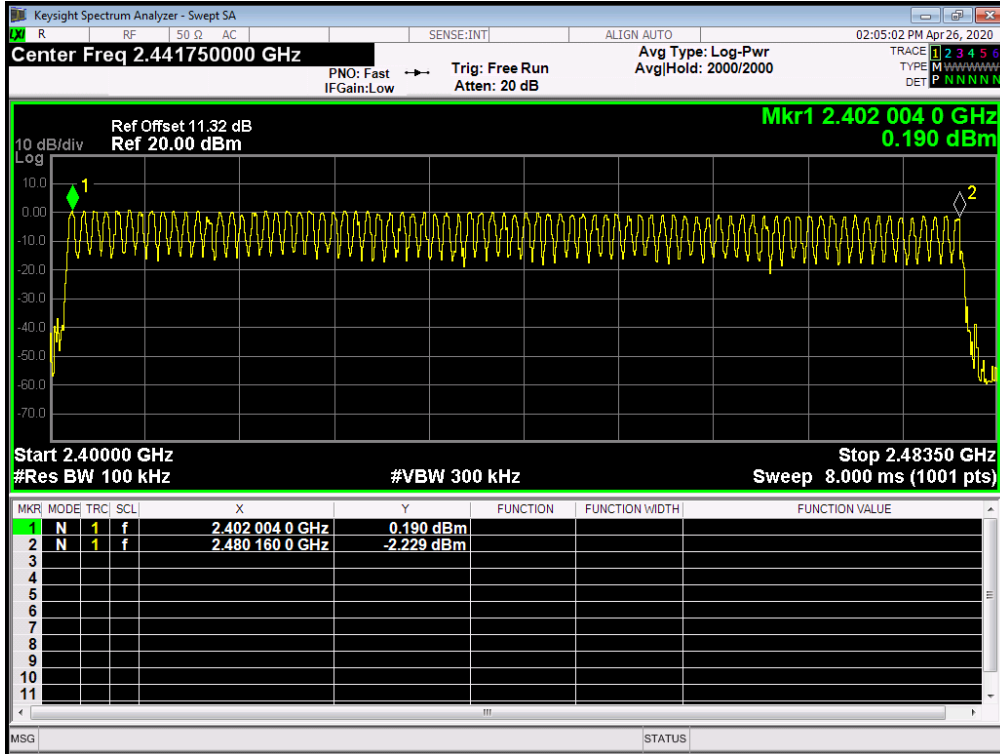

$\pi/4$ -DQPSK

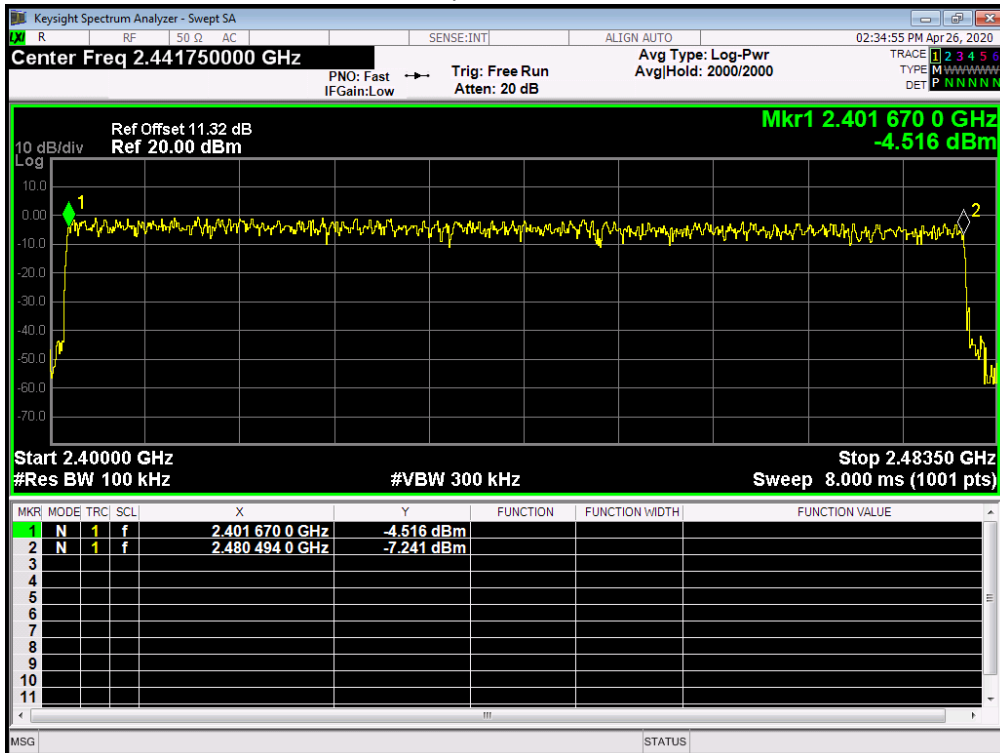

8DPSK

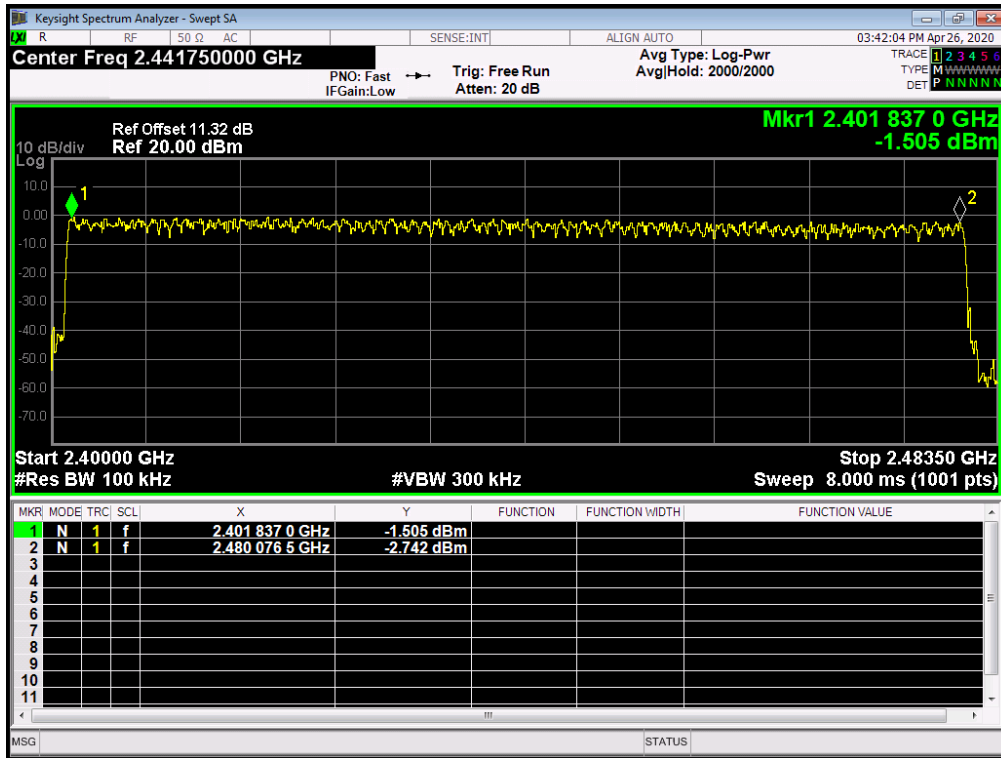

9. Dwell time

9.1. Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


9.2. Test procedure

- (1) Place the EUT on the table in the chamber or connect the antenna port of the EUT to spectrum analyzer and set it in transmitting mode.
- (2) Set RBW of spectrum analyzer to 1MHz, $VBW \geq RBW$
- (3) Use a video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for DH5, DH3 and DH1 packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) A Period Time = $79 \times 0.4 = 31.6$ S
DH1 Time Slot: Reading * $(1600/2) \times 31.6/79$
DH3 Time Slot: Reading * $(1600/4) \times 31.6/79$
DH5 Time Slot: Reading * $(1600/6) \times 31.6/79$

9.3. Deviation from standard

No deviation.

9.4. Test setup

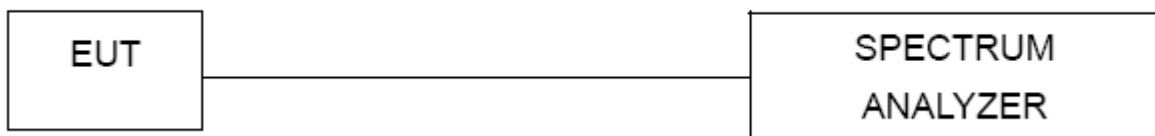

9.5. Test result