

FCC&IC CERTIFICATION TEST REPORT FOR

Applicant	:	Elec-Tech International Co., Ltd.
Address	:	No.1 Jinfeng Road, Tangjiawan Town, Xiangzhou District, Zhuhai City, Guangdong Province, P.R. China 519085
Equipment under Test	:	Motion Sensor
FCC Model No.	:	90600120
IC Model No.	:	90600120, 90600121, 90600122, 90600123
Trade Mark	:	ETI; Commercial Electric
FCC ID	:	XZH-90600120
IC	:	20122-90600120
Manufacturer	:	Elec-Tech International Co., Ltd.
Address	:	No.1 Jinfeng Road, Tangjiawan Town, Xiangzhou District, Zhuhai City, Guangdong Province, P.R. China 519085
Factory 1	:	Wuhu 3E Lighting Co., Ltd.
Address	:	11 Wei er ci RD Eastern Wuhu Economic & Technological Development Area, Wuhu City, Anhui Province 241000 China
Factory 2	:	Elec-Tech International Co., Ltd.
Address	:	18-1 Keji 6th Road Gangwan Ave Tangjiawan Town Xiangzhou District Zhuhai City Guangdong Province, P.R. China 519085
Factory 3	:	Guangdong NVCETi Lighting Co., Ltd.
Address	:	Factory#2-2, No. 1, South Zhongzhu Science & Technology Road, Innovation Coast, High Tech District, Zhuhai City, Guangdong Province, P.R.China 519085

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City,

Guangdong Province, China, 523808

Tel: +86-0769-89201699 [Http://www.dgddt.com](http://www.dgddt.com)

REPORT

TABLE OF CONTENTS

1.	Summary of test results	4
2.	General test information.....	5
2.1.	Description of EUT	5
2.2.	Accessories of EUT.....	5
2.3.	Assistant equipment used for test.....	5
2.4.	Block diagram of EUT configuration for test	5
2.5.	Test environment conditions	6
2.6.	Deviations of test standard	6
2.7.	Test laboratory.....	6
2.8.	Measurement uncertainty	6
3.	Equipment used during test.....	7
4.	20dB Bandwidth.....	7
4.1.	Block diagram of test setup.....	7
4.2.	Limits	7
4.3.	Test Procedure.....	8
4.4.	Test Result.....	8
4.5.	Original test data	8
5.	Radiated emission	9
5.1.	Block diagram of test setup.....	9
5.2.	Limit	10
5.3.	Test Procedure.....	11
5.4.	Test result	12
6.	Power Line Conducted Emission	16
6.1.	Block diagram of test setup.....	16
6.2.	Power Line Conducted Emission Limits(Class B).....	16
6.3.	Test Procedure.....	16
6.4.	Test Result.....	17
7.	Antenna Requirements	20
7.1.	Limit	20
7.2.	Result.....	20

TEST REPORT DECLARE

Applicant	:	Elec-Tech International Co., Ltd.
Address	:	No. 1 Jinfeng Road, Tangjiawan Town, Xiangzhou District, Zhuhai City, GuangDong Province, P.R. China 519085
Equipment under Test	:	Motion Sensor
FCC Model No.	:	90600120
IC Model No.	:	90600120, 90600121, 90600122, 90600123
Trade mark	:	ETI; Commercial Electric
FCC ID	:	XZH-90600120
IC	:	20122-90600120
Manufacturer	:	Elec-Tech International Co., Ltd.
Address	:	No. 1 Jinfeng Road, Tangjiawan Town, Xiangzhou District, Zhuhai City, GuangDong Province, P.R. China 519085
Factory 1	:	Wuhu 3E Lighting Co., Ltd.
Address	:	11 Wei er ci RD Eastern Wuhu Economic & Technological Development Area, Wuhu City, Anhui Province 241000 China
Factory 2	:	Elec-Tech International Co., Ltd.
Address	:	18-1 Keji 6 th Road Gangwan Ave Tangjiawan Town Xiangzhou District Zhuhai City Guangdong Province P.R. China 519085
Factory 3	:	Guangdong NVCETi Lighting Co., Ltd.
Address	:	Factory#2-2, No. 1, South Zhongzhu Science & Technology Road, Innovation Coast, High Tech District, Zhuhai City, Guangdong Province, P.R.China 519085

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-210 Issue 9 Aug 2016

Test procedure used:

ANSI C63.10:2013, ANSI C63.4:2014, RSS-Gen Issue 4 Nov 2014.

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No:	DDT-R17Q0214-10E1		
Date of Test:	Feb. 14, 2017 ~ Mar. 20, 2017	Date of Report:	Mar. 23, 2017

Prepared By:

Damon Hu

 Damon Hu/Engineer



Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

1. Summary of test results

Description of Test Item	Standard	Results
20dB Bandwidth	FCC Part 15: 15.215 RSS-GEN ISSUE 4 6.6 ANSI C63.10:2013 ANSI C63.4:2014	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.245 RSS-210 Issue 9 Annex F ANSI C63.10:2013 ANSI C63.4:2014	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 RSS-Gen Issue 4 8.8 ANSI C63.10:2013 ANSI C63.4:2014	PASS

Note: N/A is an abbreviation for Not Applicable.

2. General test information

2.1. Description of EUT

EUT* Name	:	Motion Sensor
FCC Model Number	:	90600120
IC Model Number	:	90600120, 90600121, 90600122, 90600123
EUT function description	:	Please reference user manual of this device
Power supply	:	AC 120V 60Hz
Operation frequency	:	5790MHz
Antenna Type	:	PCB antenna, maximum PK gain: 2.58dBi
Date of Receipt	:	Feb. 14, 2017
Sample Type	:	Series production

Note 1: EUT is the ab. of equipment under test.

Note 2: all models are identical except model number.


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number or Type	Serial No.	Other
/	/	/	/	/

2.3. Assistant equipment used for test

Description of Assistant equipment	Manufacturer	Model number or Type	EMC Compliance	SN
/	/	/	/	/

2.4. Block diagram of EUT configuration for test



The system was configured for test as normally used by user.

2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.6. Deviations of test standard

No Deviation.

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808 Tel: +86-0769-89201699 <http://www.dgddt.com>

FCC Registration Number: 270092

2.8. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±2.44dB (150KHz-30MHz)
	±2.94dB (9KHz-150KHz)
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	±3.14 dB (Antenna Polarize: V)
	±3.16 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz to 18GHz)(include Fundamental emission)	±4.14dB(1-6GHz)
	±4.46dB (6GHz-18Gz)
Bandwidth	±1.1%
Stop Transmitting Time Test	±0.6%
Uncertainty for frequency error	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5 x 10 ⁻⁸ (Conducted method)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test					
Spectrum analyzer	R&S	FSU26	1166.1660.26	2016/10/24	1 Year
Attenuator	Mini-Circuits	BW-S10W2	101109	2016/08/18	1 Year
RF Cable	Micable	C10-01-01-1	100309	2016/08/18	1 Year
Radiated Emission Test					
EMI Test Receiver	R&S	ESU8	100316	2016/10/24	1Year
Spectrum analyzer	R&S	FSU26	1166.1660.26	2016/10/24	1Year
Spectrum analyzer	Agilent	E4447A	MY50180031	2016/09/08	1Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	2016/10/27	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	2016/10/24	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	2016/10/27	1 Year
Horn antenna	A.H.	SAS-573	2522	2016/12/19	1 Year
Pre-amplifier	A.H.	PAM-0118	360	2016/08/18	1 Year
RF Cable	HUBSER	CP-X2	W11.03	2016/10/24	1Year
RF Cable	HUBSER	CP-X1	W12.02	2016/10/24	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	2016/10/24	1 Year
Test software	Audix	E3	V 6.11111b	/	/
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESU8	100316	2016/10/24	1 Year
LISN 1	R&S	ENV216	101109	2016/10/24	1 Year
LISN 2	R&S	ESH2-Z5	100309	2016/10/24	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	2016-10-24	1 Year
CE Cable 1	HUBSER	ESU8/RF2	W10.01	2016/10/24	1 Year
Test software	Audix	E3	V 6.11111b	/	/

4. 20dB Bandwidth

4.1. Block diagram of test setup



4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test Procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4. Test Result

EUT: Motion Sensor M/N: 90600120						
Mode	Cent. Freq. (MHz)	20dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Limit (MHz)	Margin (MHz)	Conclusion
TX mode	5790	0.33768	0.33768	/	/	PASS
Test Date : Feb. 22, 2016				Test Engineer: Damon Hu		

4.5. Original test data


5790MHz (20dB and 99% bandwidth)

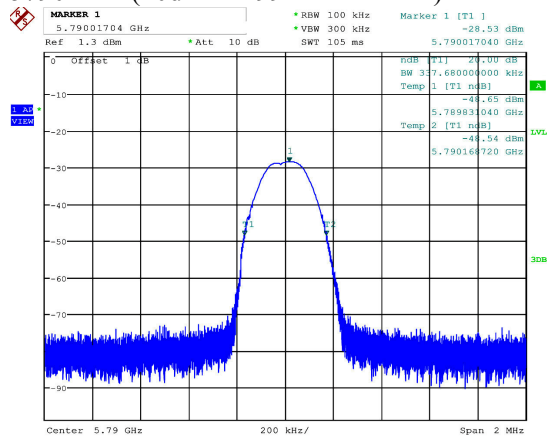


5. Radiated emission

5.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz-30MHz

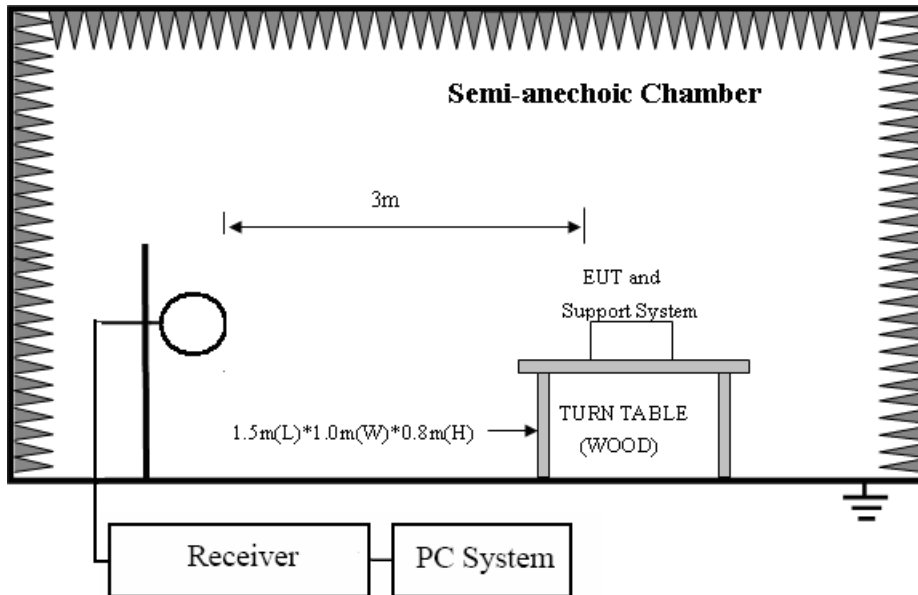

In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

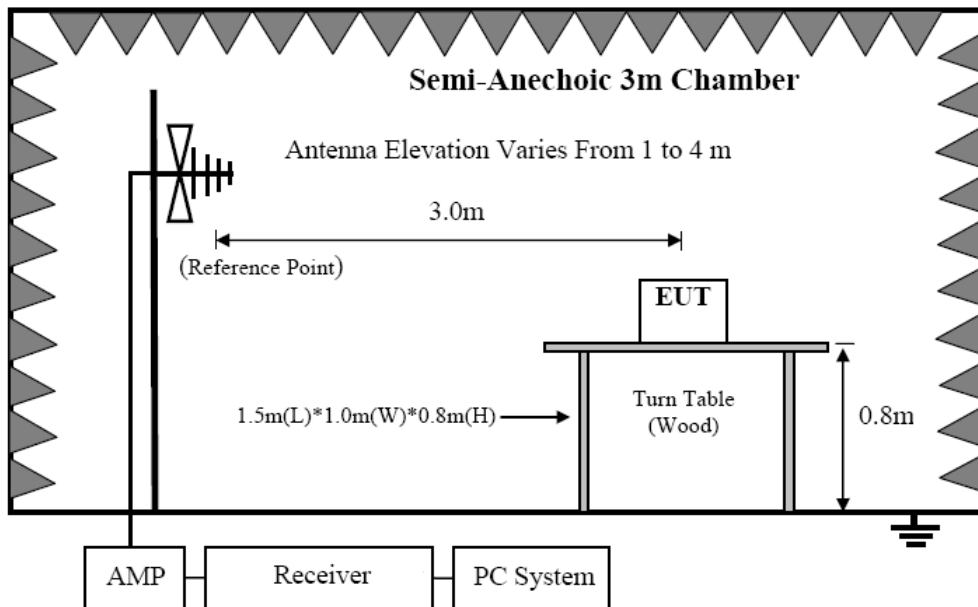

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

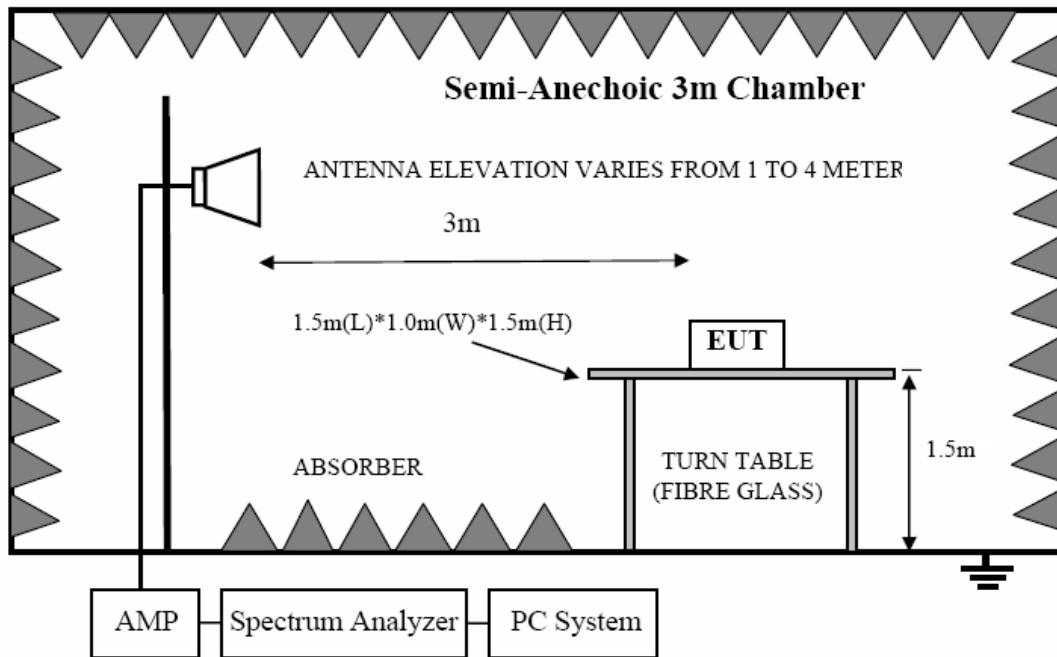

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

5.2. Limit

1. FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

2. FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(KHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(KHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5

216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

3. Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

5.3. Test Procedure

(1) EUT height should be 0.8m for below 1GHz at a semi - anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi - anechoic chamber ground with absorbers.

(2) Test antenna was located 1m/3m from the EUT on an adjustable mast, and the antenna used as below table:

Test frequency range	Test antenna used	Test distance
9KHz-30MHz	Active Loop antenna	3 m
30MHz-1GHz	Trilog Broadband Antenna	3 m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9KHz to 40GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above

ground.)

- (b) Change work frequency or channel of device if practicable.
- (c) Change modulation type of device if practicable.
- (d) Change power supply range from 85% to 115% of the rated supply voltage
- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9KHz to 40GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 40GHz, so below final test was performed with frequency range from 9KHz to 18GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.
- (5) The emissions from 9KHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz, for emissions from 9KHz-90KHz,110KHz-490KHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).
- (8) X, Y, Z three axial are tested and the report only the worst case.

5.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9 KHz to 40GHz were comply with FCC PART 15.209 limits limit.


Note1: According exploratory test no any obvious emission were detected from 9KHz to 30MHz and 18GHz to 40GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber	E:\2017 RE2# Report Data\17Q0214-10\RE.EM6
Test Date	: 2017-02-16	Tested By : Aaron
EUT	: Motion Sensor	Model Number : 90600120
Power Supply	: AC 120V/60Hz	Test Mode : Eut on
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	Antenna/Distance : 2016 VULB9163 2#/3m/VERTICAL
Memo	:	

Data: 3

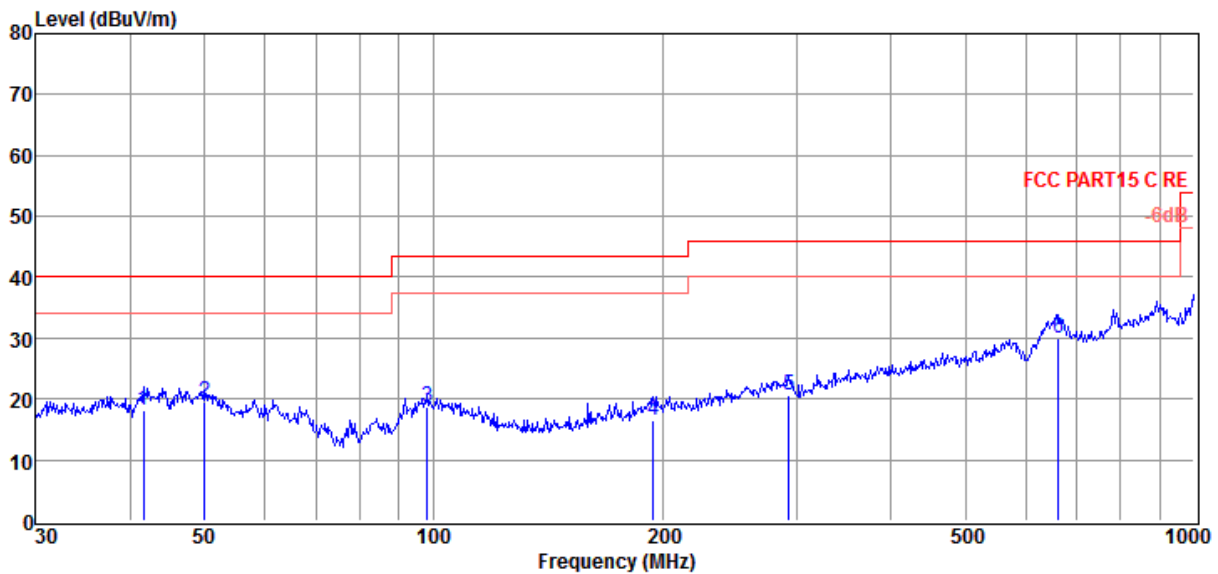


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	41.567	1.73	12.81	3.49	18.03	40.00	-21.97	QP	VERTICAL
2	50.057	2.59	13.21	3.63	19.43	40.00	-20.57	QP	VERTICAL
3	98.142	3.81	10.77	3.98	18.56	43.50	-24.94	QP	VERTICAL
4	194.453	1.57	10.48	4.38	16.43	43.50	-27.07	QP	VERTICAL
5	293.084	2.70	13.06	4.82	20.58	46.00	-25.42	QP	VERTICAL
6	663.473	2.73	21.16	6.02	29.91	46.00	-16.09	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber E:\2017 RE2# Report Data\17Q0214-10\RE.EM6
Test Date : 2017-02-16 **Tested By** : Aaron
EUT : Motion Sensor **Model Number** : 90600120
Power Supply : AC 120V/60Hz **Test Mode** : Eut on
Condition : Temp:24.5°C,Humi:55%,
 : Press:100.1kPa **Antenna/Distance** : 2016 VULB9163 2#/3m/HORIZONTAL
Memo :

Data: 4

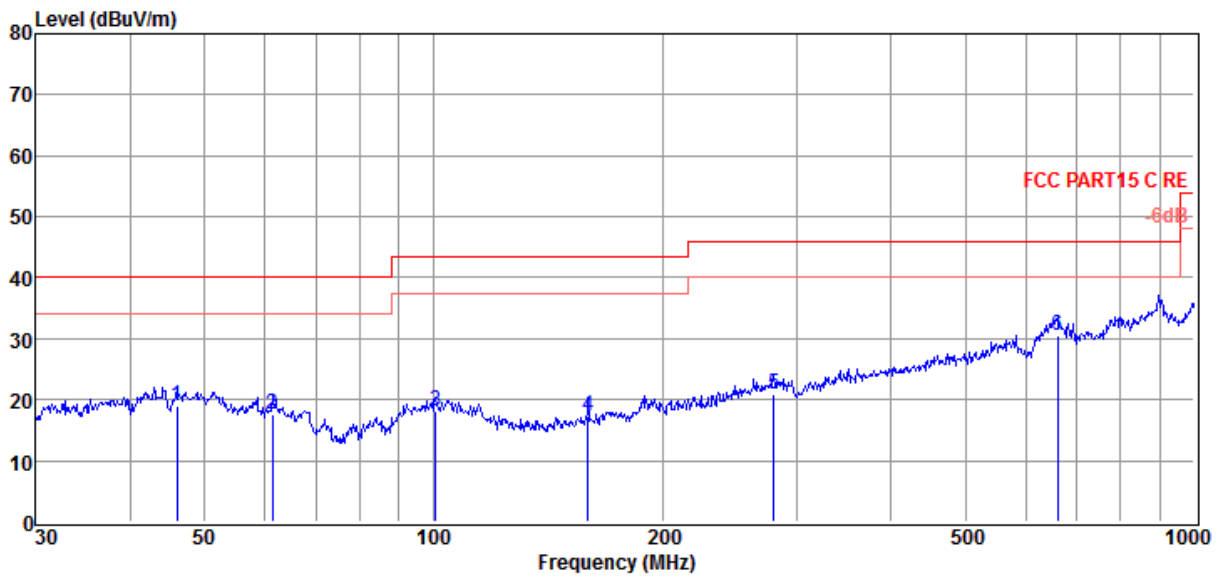

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	46.016	2.26	13.26	3.57	19.09	40.00	-20.91	QP	HORIZONTAL
2	61.346	3.23	10.76	3.72	17.71	40.00	-22.29	QP	HORIZONTAL
3	100.581	3.15	11.04	4.00	18.19	43.50	-25.31	QP	HORIZONTAL
4	159.784	5.15	7.89	4.27	17.31	43.50	-26.19	QP	HORIZONTAL
5	280.024	3.39	12.77	4.77	20.93	46.00	-25.07	QP	HORIZONTAL
6	661.150	3.03	21.38	6.02	30.43	46.00	-15.57	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


Radiated Emission test (above 1GHz)

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	1901.00	39.81	27.66	29.01	5.38	43.84	74.00	-30.16	Peak	VERTICAL
2	5785.00	31.65	34.87	29.21	9.47	46.78	74.00	-27.22	Peak	VERTICAL
3	5790.00	64.35	35.77	29.21	8.73	79.64	114.00	-34.36	Peak	VERTICAL
4	5815.00	37.86	34.89	29.21	9.50	53.04	74.00	-20.96	Peak	VERTICAL
5	6814.00	27.08	36.05	30.25	10.26	43.14	74.00	-30.86	Peak	VERTICAL
6	11625.00	29.56	36.93	34.60	13.74	45.63	74.00	-28.37	Peak	VERTICAL
7	13971.00	27.85	39.77	34.76	14.97	47.83	74.00	-26.17	Peak	VERTICAL
8	16470.00	26.81	44.65	35.99	17.48	52.95	74.00	-21.05	Peak	VERTICAL
1	3754.00	30.70	32.69	29.19	7.45	41.65	74.00	-32.35	Peak	HORIZONTAL
2	5785.00	34.22	34.87	29.21	9.47	49.35	74.00	-24.65	Peak	HORIZONTAL
3	5790.00	62.61	35.77	29.21	8.73	77.90	114.00	-36.10	Peak	HORIZONTAL
4	5815.00	38.31	34.89	29.21	9.50	53.49	74.00	-20.51	Peak	HORIZONTAL
5	7375.00	27.24	36.50	30.63	10.75	43.86	74.00	-30.14	Peak	HORIZONTAL
6	9041.00	25.51	37.41	32.34	11.85	42.43	74.00	-31.57	Peak	HORIZONTAL
7	11625.00	29.06	36.93	34.60	13.74	45.13	74.00	-28.87	Peak	HORIZONTAL
8	16504.00	26.51	44.69	36.06	17.51	52.65	74.00	-21.35	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

6. Power Line Conducted Emission

6.1. Block diagram of test setup

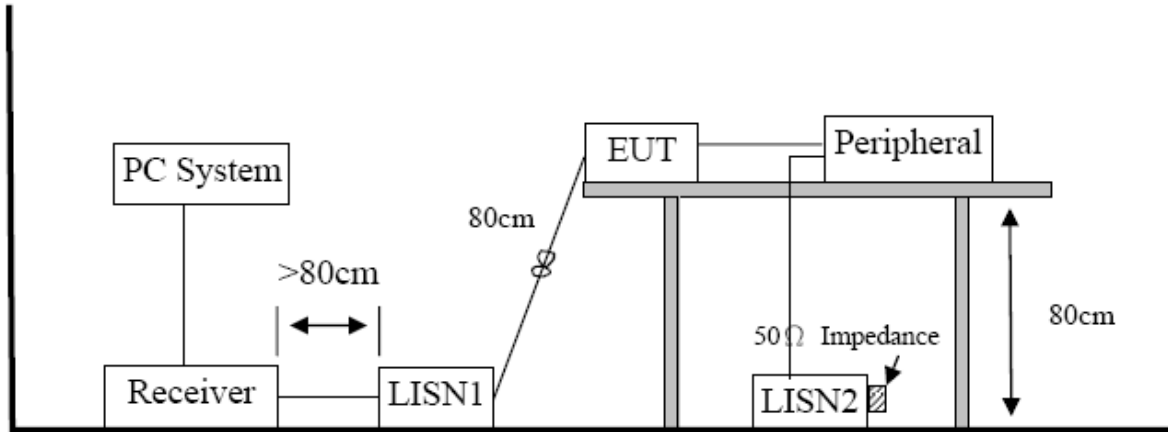

6.2. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

6.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 6.1 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

6.4. Test Result

PASS. (See below detailed test result)


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “-----” means Peak detection; “-----” mans Average detection

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room E:\2017 CE report data\17Q0214-10\CE.EM6
Test Date : 2017-02-16 **Tested By** : Aaron
EUT : Motion Sensor **Model Number** : 90600120
Power Supply : AC 120V/60Hz **Test Mode** : EUT ON
Condition : Temp:24.5°C,Humi:55%,
LISN : 2016 ENV216/NEUTRAL
Press:100.1kPa
Memo :

Data: 6

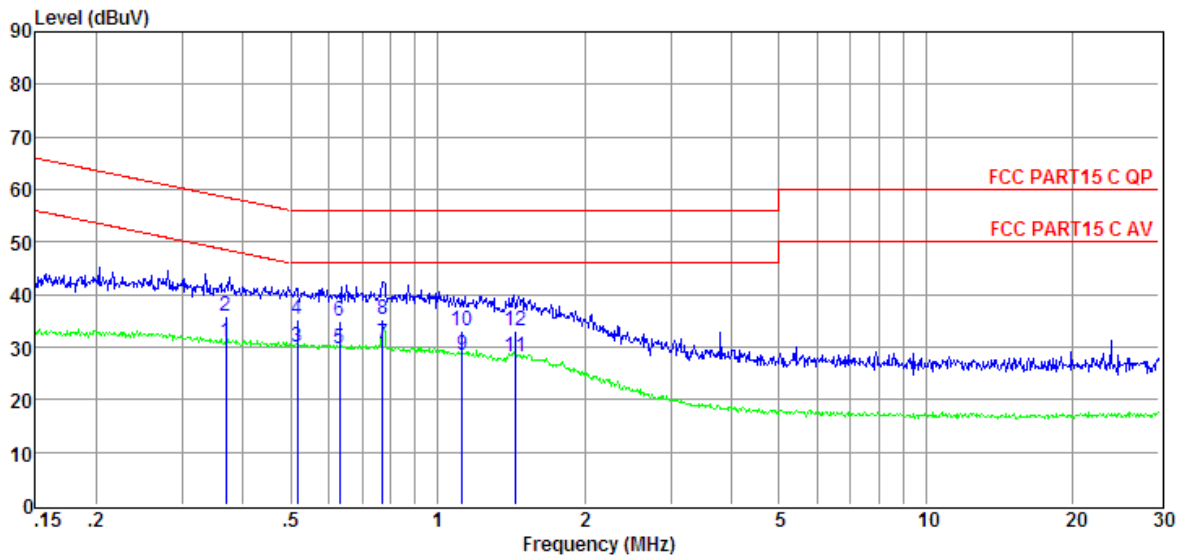


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.369	11.32	9.61	0.02	9.86	30.81	48.52	-17.71	Average	NEUTRAL
2	0.369	16.35	9.61	0.02	9.86	35.84	58.52	-22.68	QP	NEUTRAL
3	0.516	10.58	9.61	0.03	9.86	30.08	46.00	-15.92	Average	NEUTRAL
4	0.516	15.71	9.61	0.03	9.86	35.21	56.00	-20.79	QP	NEUTRAL
5	0.630	10.24	9.61	0.03	9.86	29.74	46.00	-16.26	Average	NEUTRAL
6	0.630	15.37	9.61	0.03	9.86	34.87	56.00	-21.13	QP	NEUTRAL
7	0.771	10.97	9.61	0.03	9.86	30.47	46.00	-15.53	Average	NEUTRAL
8	0.771	15.61	9.61	0.03	9.86	35.11	56.00	-20.89	QP	NEUTRAL
9	1.123	9.01	9.61	0.03	9.86	28.51	46.00	-17.49	Average	NEUTRAL
10	1.123	13.72	9.61	0.03	9.86	33.22	56.00	-22.78	QP	NEUTRAL
11	1.441	8.53	9.62	0.03	9.86	28.04	46.00	-17.96	Average	NEUTRAL
12	1.441	13.64	9.62	0.03	9.86	33.15	56.00	-22.85	QP	NEUTRAL

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room E:\2017 CE report data\17Q0214-10\CE.EM6
Test Date : 2017-02-16 **Tested By** : Aaron
EUT : Motion Sensor **Model Number** : 90600120
Power Supply : AC 120V/60Hz **Test Mode** : EUT ON
Condition : Temp:24.5°C,Humi:55%,
LISN : 2016 ENV216/LINE
 Press:100.1kPa
Memo :

Data: 8

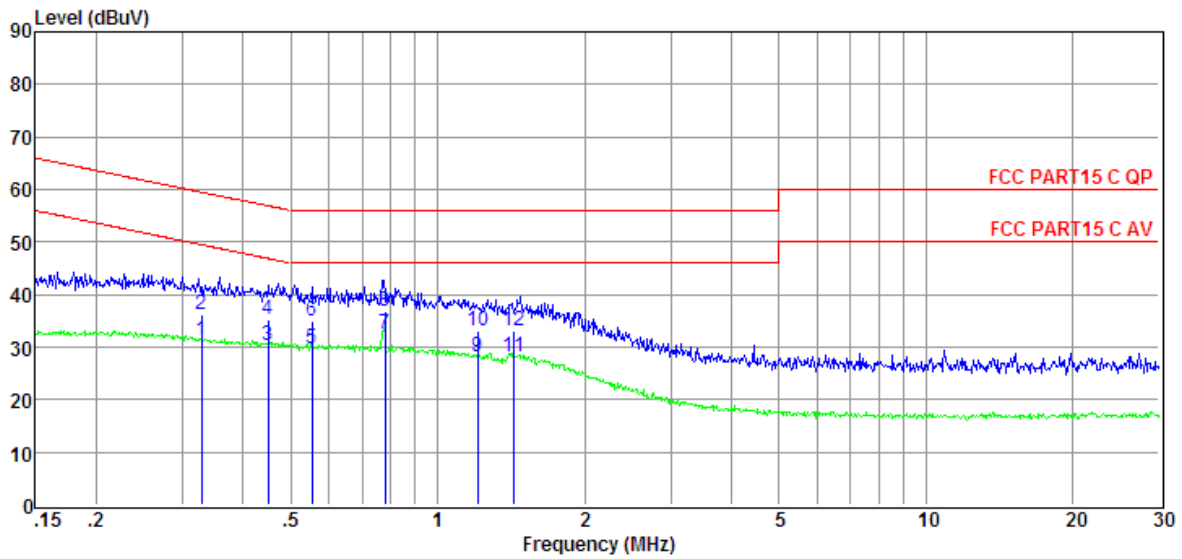

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.329	11.60	9.61	0.02	9.86	31.09	49.49	-18.40	Average	LINE
2	0.329	16.70	9.61	0.02	9.86	36.19	59.49	-23.30	QP	LINE
3	0.449	10.73	9.61	0.02	9.86	30.22	46.89	-16.67	Average	LINE
4	0.449	15.79	9.61	0.02	9.86	35.28	56.89	-21.61	QP	LINE
5	0.552	10.09	9.61	0.03	9.86	29.59	46.00	-16.41	Average	LINE
6	0.552	15.52	9.61	0.03	9.86	35.02	56.00	-20.98	QP	LINE
7	0.779	12.84	9.61	0.03	9.86	32.34	46.00	-13.66	Average	LINE
8	0.779	17.17	9.61	0.03	9.86	36.67	56.00	-19.33	QP	LINE
9	1.210	8.70	9.62	0.03	9.86	28.21	46.00	-17.79	Average	LINE
10	1.210	13.46	9.62	0.03	9.86	32.97	56.00	-23.03	QP	LINE
11	1.433	8.66	9.62	0.03	9.86	28.17	46.00	-17.83	Average	LINE
12	1.433	13.46	9.62	0.03	9.86	32.97	56.00	-23.03	QP	LINE

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

7. Antenna Requirements

7.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2. Result

The antennas used for this product are Integral antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2.58dBi.

END OF REPORT