

TEST REPORT

FCC ID: Y3HCP070292016818

Product: FREECAST Transmitter

Model No.: SH800T

Additional Model No.: CP07029

Trade Mark: N/A

Report No.: TCT160713E015

Issued Date: Oct. 11, 2016

Issued for:

Shenzhen Crystal Video Technology Co.,LTD.

F13, F518 Idea Land, Baoyuan Road, Baoan Central Area, Shenzhen, China

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification..... 3

2. Test Result Summary 4

3. EUT Description 5

4. Genera Information..... 9

 4.1. Test environment and mode 9

 4.2. Description of Support Units 10

5. Facilities and Accreditations 11

 5.1. Facilities 11

 5.2. Location 11

 5.3. Measurement Uncertainty 11

6. Test Results and Measurement Data 12

 6.1. Antenna requirement 12

 6.2. Conducted Emission..... 13

 6.3. Maximum Conducted Output Power 17

 6.4. 6dB Emission Bandwidth 21

 6.5. 26dB Bandwidth and 99% Occupied Bandwidth 27

 6.6. Power Spectral Density 38

 6.7. Band edge 48

 6.8. Spurious Emission..... 54

 6.9. Frequency Stability Measurement..... 67

Appendix A: Photographs of Test Setup

Appendix B: Photographs of EUT

1. Test Certification

Product:	FREECAST Transmitter
Model No.:	SH800T
Additional Model No.:	CP07029
Applicant:	Shenzhen Crystal Video Technology Co.,LTD.
Address:	F13, F518 Idea Land, Baoyuan Road, Baoan Central Area, Shenzhen, China
Manufacturer:	Shenzhen Crystal Video Technology Co.,LTD.
Address:	F13, F518 Idea Land, Baoyuan Road, Baoan Central Area, Shenzhen, China
Date of Test:	July 13 – Oct. 11, 2016
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart E Section 15.407:2014 KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Garen

Garen

Date:

Oct. 11, 2016

Reviewed By:

Joe Zhou

Joe Zhou

Date:

Oct. 11, 2016

Approved By:

Tomsin

Tomsin

Date:

Oct. 11, 2016

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(a) §2.1049	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a) §2.1049	PASS
Power Spectral Density	§15.407(a)	PASS
Restricted Bands around fundamental frequency	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	FREECAST Transmitter
Model :	SH800T
Additional Model:	CP07029
Trade Mark:	N/A
Operation Frequency:	Band I: 5180MHz~5240MHz Band IV: 5745MHz~5825MHz
Channel Bandwidth:	802.11n :20MHz, 40MHz
Modulation Technology:	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type	64QAM, 16QAM, BPSK, QPSK
Antenna Type:	R-SMA antenna
Antenna Gain:	Band I: 5180MHz~5240MHz: 2dBi Band IV: 5745MHz~5825MHz: 2dBi
Power Supply:	Rechargeable Li-ion Battery DC3.8V
Remark:	All models above are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement.

Band I (5150MHz~5250MHz) Power level setup in software			
Mode	Channel	Frequency	Soft set
11n(HT20)	CH36	5180	14
11n(HT20)	CH44	5220	18
11n(HT20)	CH48	5240	14
11n(HT40)	CH38	5190	14
11n(HT40)	CH46	5230	14

Band IV (5725 - 5850 MHz) Power level setup in software			
Mode	Channel	Frequency	Soft set
11n (HT20)	CH149	5745	13
11n (HT20)	CH157	5785	19
11n (HT20)	CH165	5825	13
11n (HT40)	CH151	5755	13
11n (HT40)	CH159	5795	13

Note: The Soft set value is the internal setting required to meet the requirements and does not necessarily mean the 'dBm' value

Operation Frequency each of channel

20MHz		40MHz	
Channel	Frequency	Channel	Frequency
36	5180	38	5190
40	5200	46	5230
44	5220	54	5270
48	5240	62	5310
52	5260	102	5510
56	5280	110	5550
60	5300	134	5670
64	5320	151	5755
100	5500	159	5790
104	5520		
108	5540		
112	5560		
116	5580		
132	5660		
136	5680		
140	5700		
149	5745		
153	5765		
157	5785		
161	5805		
165	5825		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11n (HT20)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	149	Low	5745
44	Mid	5220	157	Mid	5785
48	High	5240	165	High	5805

For 802.11n (HT40)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	151	Low	5755
46	High	5230	159	High	5795

4. Genera Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

<p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11n(HT20)	6.5 Mbps
802.11n(HT40)	13.5 Mbps
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Notebook	G485	/	/	Lenovo

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142


5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Antenna requirement

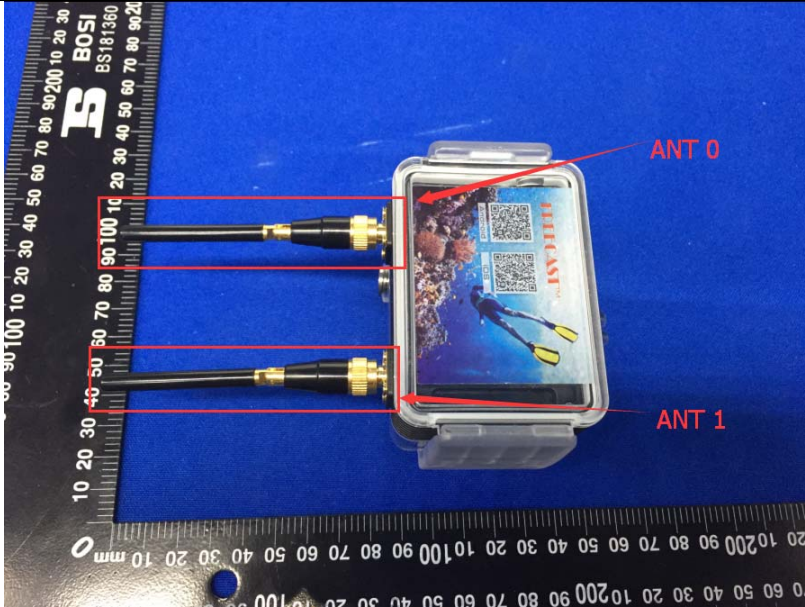Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
E.U.T Antenna:	
<p>The EUT two antennas are R-SMA antennas which is only the antenna type used, and the best case gain of the antennas all are 2dBi.</p>	
	

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Tx Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														

6.2.2. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Aug. 11, 2017
LISN	Schwarzbeck	NSLK 8126	8126453	Aug. 16, 2017
Coax cable	TCT	CE-05	N/A	Aug. 11, 2017
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

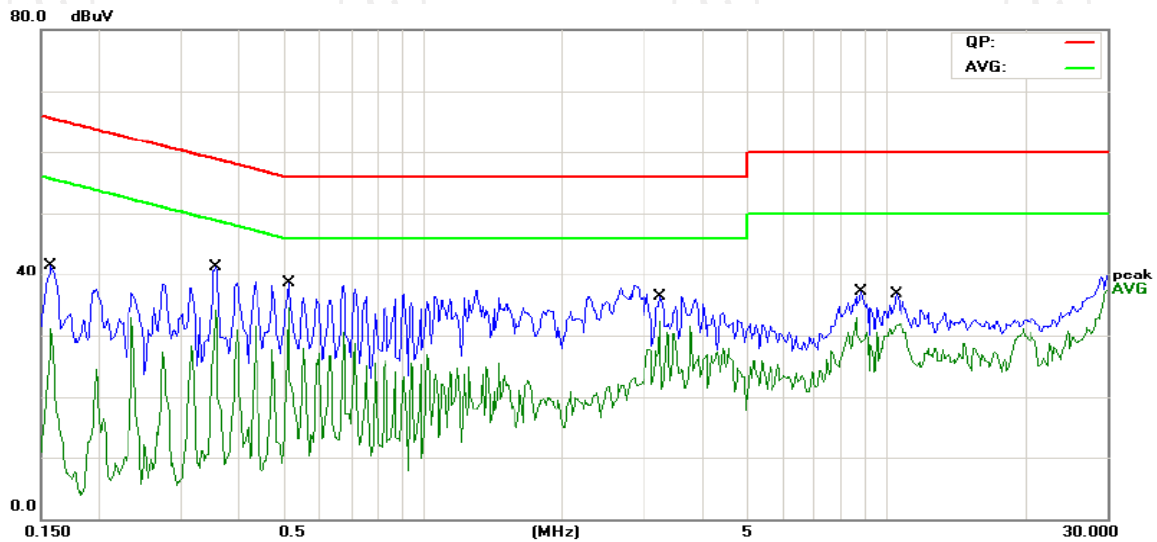


Site Chamber #2 Phase: L1 Temperature: 23 (C)
Limit: FCC Part 15B Class B Conduction(QP) Power: Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1578	28.71	11.49	40.20	65.57	-25.37	QP	
2		0.1578	17.41	11.49	28.90	55.57	-26.67	AVG	
3		0.3570	27.02	11.38	38.40	58.80	-20.40	QP	
4	*	0.3570	21.34	11.38	32.72	48.80	-16.08	AVG	
5		0.5132	23.81	11.29	35.10	56.00	-20.90	QP	
6		0.5132	17.42	11.29	28.71	46.00	-17.29	AVG	
7		3.2461	19.07	11.23	30.30	56.00	-25.70	QP	
8		3.2461	12.18	11.23	23.41	46.00	-22.59	AVG	
9		8.8125	19.61	11.17	30.78	60.00	-29.22	QP	
10		8.8125	13.26	11.17	24.43	50.00	-25.57	AVG	
11		10.5430	17.98	11.35	29.33	60.00	-30.67	QP	
12		10.5430	14.24	11.35	25.59	50.00	-24.41	AVG	

Note:

- Freq. = Emission frequency in MHz
- Reading level (dBuV) = Receiver reading
- Corr. Factor (dB) = Antenna factor + Cable loss
- Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
- Limit (dBuV) = Limit stated in standard
- Margin (dB) = Measurement (dBuV) – Limits (dBuV)
- Q.P. =Quasi-Peak
- AVG =average
- * is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

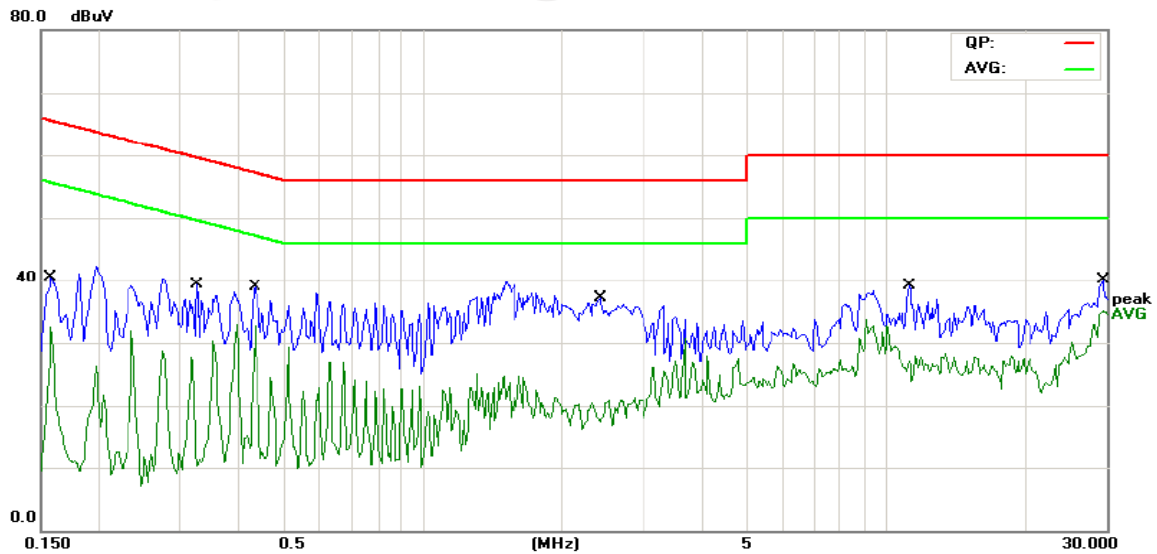

Site Chamber #2 Phase: **N** Temperature: 23 (C)
Limit: FCC Part 15B Class B Conduction(QP) Power: Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1578	23.92	11.49	35.41	65.57	-30.16	QP	
2		0.1578	15.75	11.49	27.24	55.57	-28.33	AVG	
3		0.3258	13.50	11.40	24.90	59.56	-34.66	QP	
4		0.3258	9.84	11.40	21.24	49.56	-28.32	AVG	
5		0.4352	21.49	11.33	32.82	57.15	-24.33	QP	
6	*	0.4352	16.42	11.33	27.75	47.15	-19.40	AVG	
7		2.4117	19.36	11.53	30.89	56.00	-25.11	QP	
8		2.4117	10.11	11.53	21.64	46.00	-24.36	AVG	
9		11.2813	19.62	11.36	30.98	60.00	-29.02	QP	
10		11.2813	14.44	11.36	25.80	50.00	-24.20	AVG	
11		29.3984	18.11	10.58	28.69	60.00	-31.31	QP	
12		29.3984	12.16	10.58	22.74	50.00	-27.26	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = attenuator factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak


AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Maximum Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046	
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section E	
Limit:	Frequency Band (MHz)	Limit
	5150-5250	1W for indoor access point
	5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
	5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
	5725-5850	1 W
	Note: Where "B" is the 26 dB emissions bandwidth in MHz.	
	RSS-247, 6.2	
	Frequency Band (MHz)	Limit
	5150-5250	N/A
	5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
	5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
	5725-5850	1 W
	Note: Where "B" is the 99% emissions bandwidth in MHz.	
	The maximum e.i.r.p. shall not exceed:	
	Frequency Band (MHz)	Limit
5150-5250	200 mW or 10 dBm + 10log B, whichever is less.	
5250-5350	1W or 17 dBm + 10log B, whichever is less.	
5470-5725	1W or 17 dBm + 10log B, whichever is less.	
5725-5850	N/A	
Note: Where "B" is the 99% emissions bandwidth in MHz.		

Test Setup:	 <p style="text-align: center;">Power meter EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section E, 3, a The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Measure the conducted output power and record the results in the test report.
Test Result:	PASS
Remark:	<p>Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0</p> <p>Conducted output power= measurement power</p>

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Agilent	N1911A	MY45101557	Aug. 12, 2017
Power Sensor	Agilent	N1922A	MY44124432	Aug. 12, 2017
RF cable	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

Configuration Band I (5150 - 5250 MHz) / Antenna 0+Antenna 1						
Mode	Test channel	Maximum Conducted (Average) Output Power (dBm)			FCC Limit (dBm)	Result
		Ant0	Ant1	Total		
11n(HT20)	CH36	2.65	2.23	5.46	30	PASS
11n(HT20)	CH44	2.74	2.34	5.55	30	PASS
11n(HT20)	CH48	2.60	2.11	5.37	30	PASS
11n(HT40)	CH38	2.48	2.25	5.38	30	PASS
11n(HT40)	CH46	2.80	2.09	5.47	30	PASS

Note 1: $G_{ANT}=2dBi$, $Array\ Gain=10\log(N_{ANT}/N_{SS})=3.01dBi$, $Directional\ Gain=G_{ANT} + Array\ Gain=5.01dBi$, $5.01dBi < 6dBi$ so $limit=30dBm/MHz$

Note2: The limit is 250 mW or 11 dBm + 10log B, whichever is less. In IC Standard, Where "B" is the 99% emissions bandwidth in MHz. In FCC Standard, Where "B" is the 26dB emissions bandwidth in MHz. Please refer to section 6.4.


Configuration Band IV (5725 - 5850 MHz) / Antenna 0+Antenna 1						
Mode	Test channel	Maximum Conducted (Average) Output Power (dBm)			FCC Limit (dBm)	Result
		Ant0	Ant1	Total		
11n (HT20)	CH149	2.55	2.48	5.53	30	PASS
11n (HT20)	CH157	2.67	2.50	5.60	30	PASS
11n (HT20)	CH165	2.51	2.81	5.67	30	PASS
11n (HT40)	CH151	2.37	2.66	5.53	30	PASS
11n (HT40)	CH159	2.73	2.42	5.59	30	PASS

Note 1: $G_{ANT}=2dBi$, $Array\ Gain=10\log(N_{ANT}/N_{SS})=3.01dBi$, $Directional\ Gain=G_{ANT} + Array\ Gain=5.01dBi$, $5.01dBi < 6dBi$ so $limit=30dBm/MHz$

Note2: The limit is 250 mW or 11 dBm + 10log B, whichever is less. In IC Standard, Where "B" is the 99% emissions bandwidth in MHz. In FCC Standard, Where "B" is the 26dB emissions bandwidth in MHz. Please refer to section 6.4.

6.4. 6dB Emission Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section C
Limit:	>500kHz
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 12, 2017
RF cable	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.4.3. Test data

ANT 0

Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11n(HT20)	CH149	5745	17.58	0.5	PASS
11n(HT20)	CH157	5785	17.59	0.5	PASS
11n(HT20)	CH161	5825	17.33	0.5	PASS
11n(HT40)	CH151	5755	35.72	0.5	PASS
11n(HT40)	CH159	5795	35.71	0.5	PASS


ANT 1

Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11n(HT20)	CH149	5745	17.39	0.5	PASS
11n(HT20)	CH157	5785	17.58	0.5	PASS
11n(HT20)	CH161	5825	17.10	0.5	PASS
11n(HT40)	CH151	5755	35.86	0.5	PASS
11n(HT40)	CH159	5795	35.56	0.5	PASS


Test plots as follows:

ANT 0
Band IV (5725 – 5850 MHz)
11n(HT20)


CH149

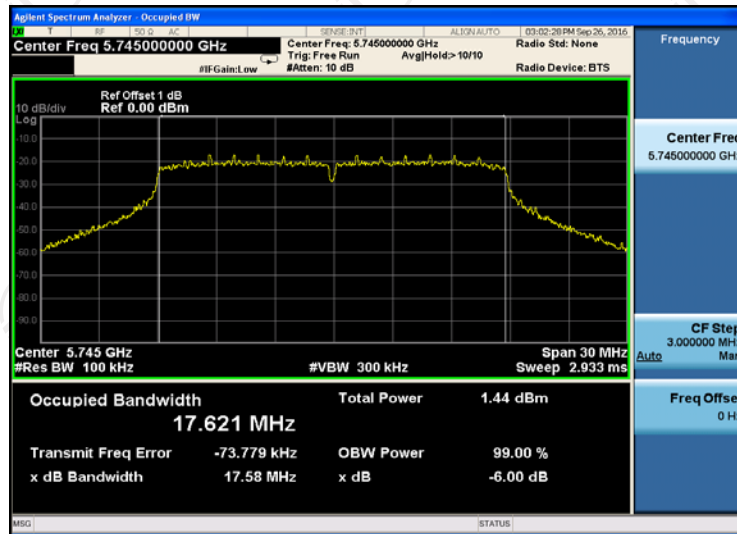

CH157

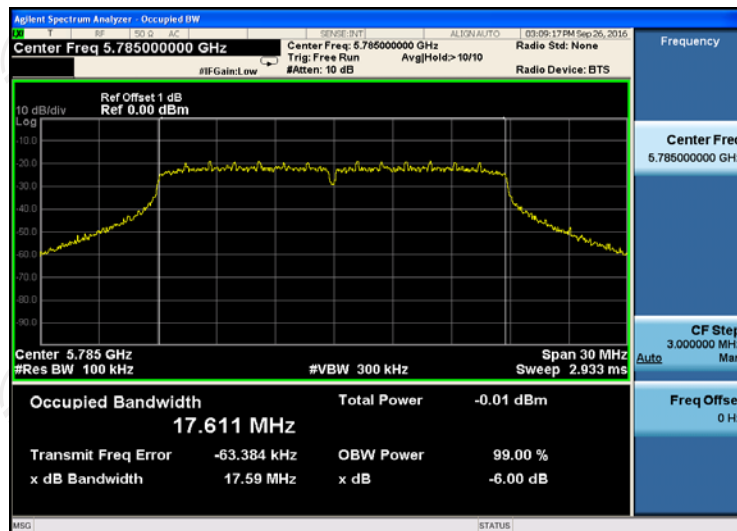


CH161

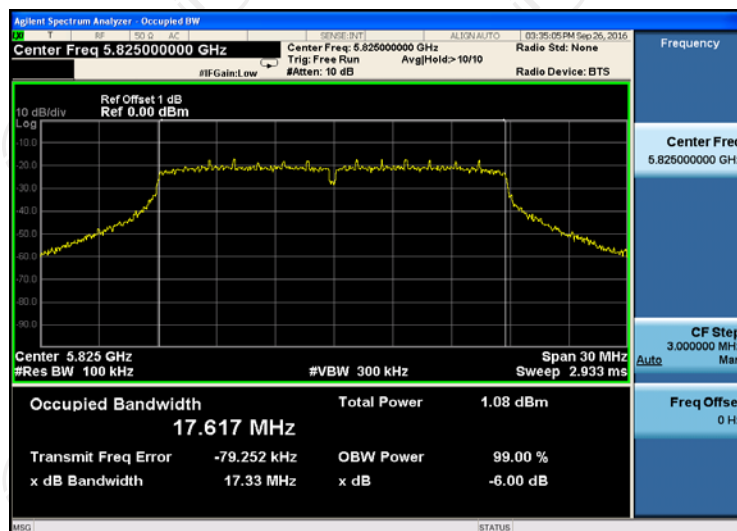


11n(HT40)

CH151

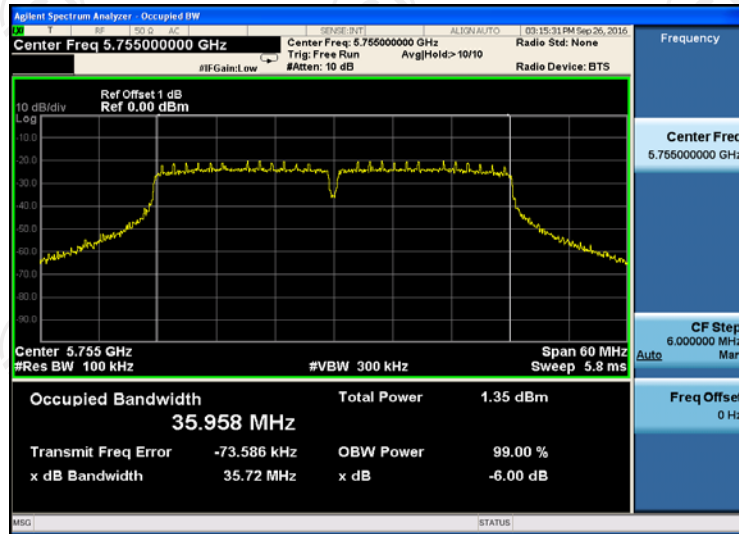


CH159

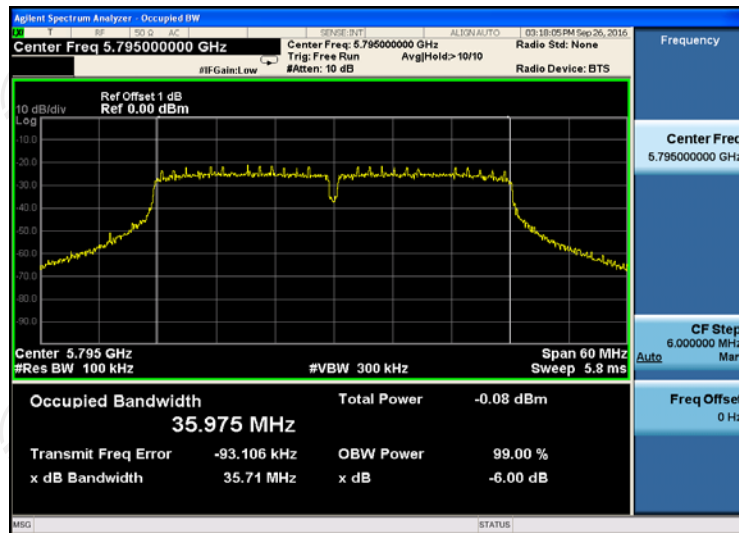


ANT 1
Band IV (5725 – 5850 MHz)
11n(HT20)


CH149

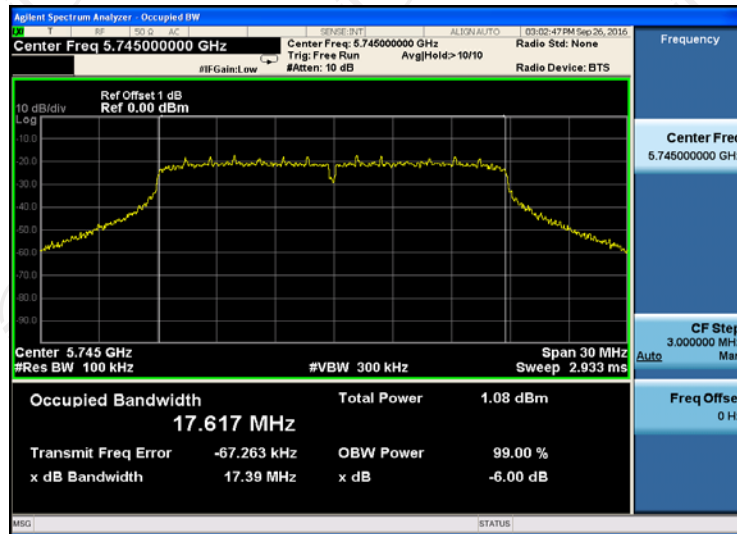

CH157

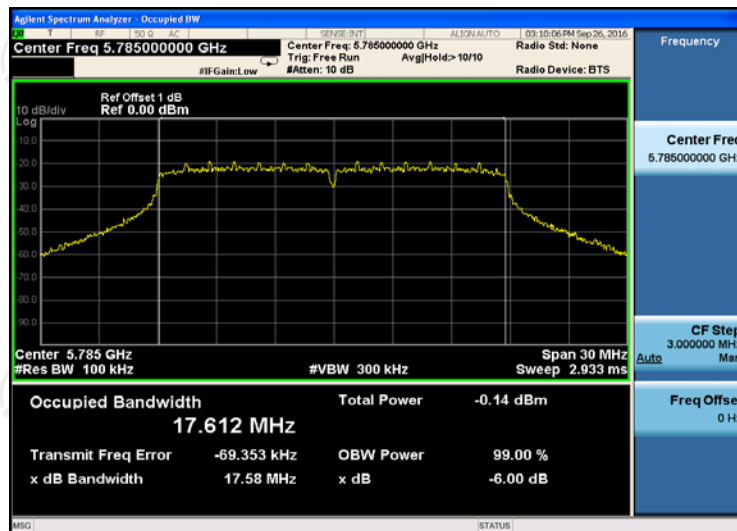


CH161

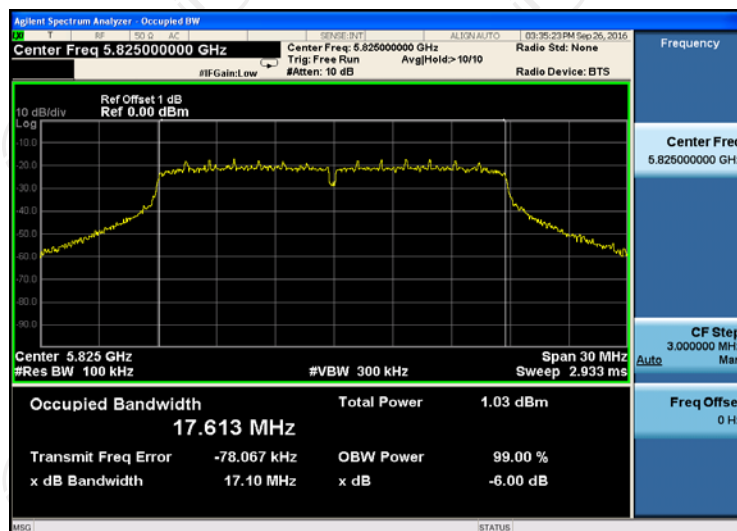


11n(HT40)

CH151

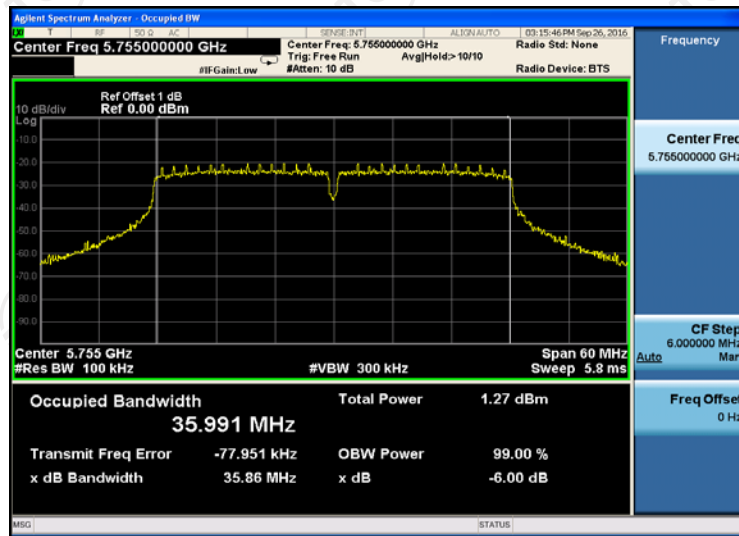


CH159

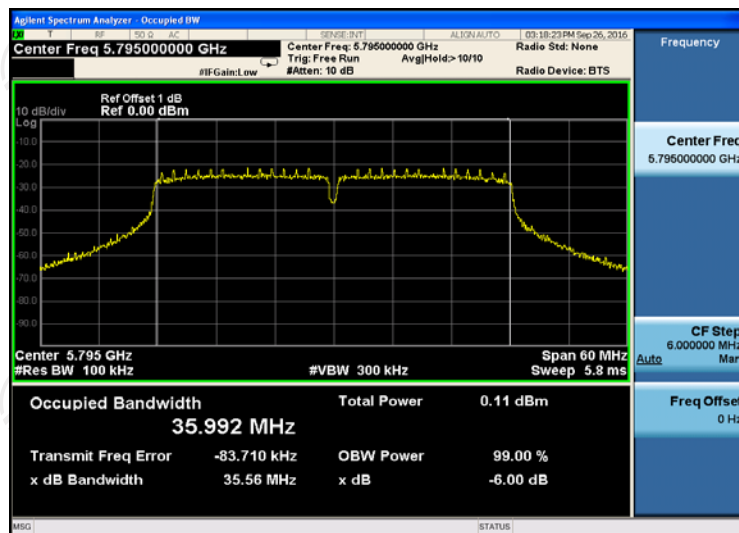

6.5. 26dB Bandwidth and 99% Occupied Bandwidth

6.5.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section D
Limit:	No restriction limits
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 12, 2017
RF cable	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.3. Test data

ANT 0

Band I

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11n(HT20)	CH36	5180	22.98	17.929
11n(HT20)	CH44	5220	23.33	17.972
11n(HT20)	CH48	5240	23.71	17.916
11n(HT40)	CH38	5190	44.54	36.178
11n(HT40)	CH46	5230	43.19	36.163

Band IV

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11n(HT20)	CH149	5745	23.25	17.924
11n(HT20)	CH157	5785	23.76	17.921
11n(HT20)	CH161	5825	23.52	17.934
11n(HT40)	CH151	5755	43.53	36.140
11n(HT40)	CH159	5795	43.49	36.139

**ANT 1
Band I**

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11n(HT20)	CH36	5180	23.34	17.908
11n(HT20)	CH44	5220	24.21	17.948
11n(HT20)	CH48	5240	23.25	17.914
11n(HT40)	CH38	5190	43.72	36.197
11n(HT40)	CH46	5230	43.50	36.154


Band IV

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11n(HT20)	CH149	5745	23.64	17.908
11n(HT20)	CH157	5785	23.11	17.925
11n(HT20)	CH161	5825	23.52	17.934
11n(HT40)	CH151	5755	44.20	36.104
11n(HT40)	CH159	5795	44.73	36.145


Test plots as follows:

ANT 0
 Band I (5150 – 5250 MHz)
 11n(HT20)


CH36

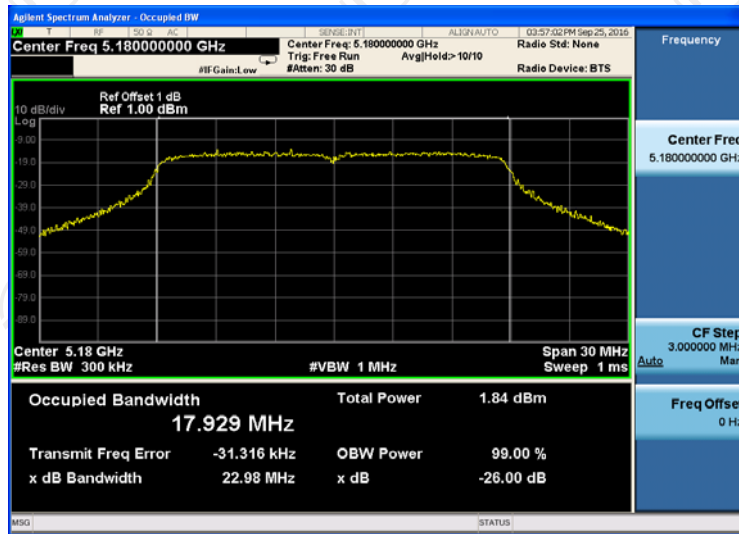

CH44

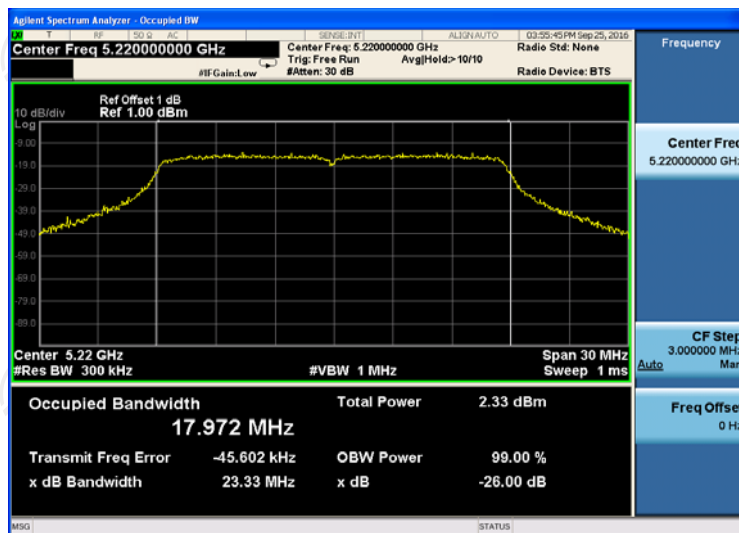


CH48

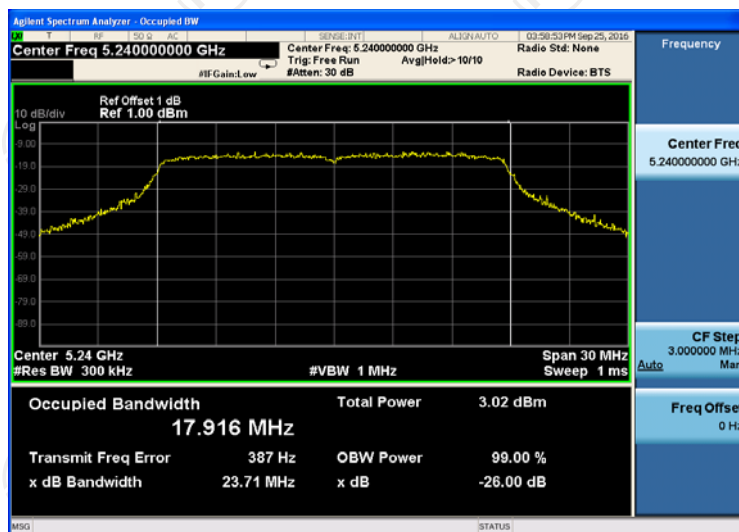


11n(HT40)

CH38

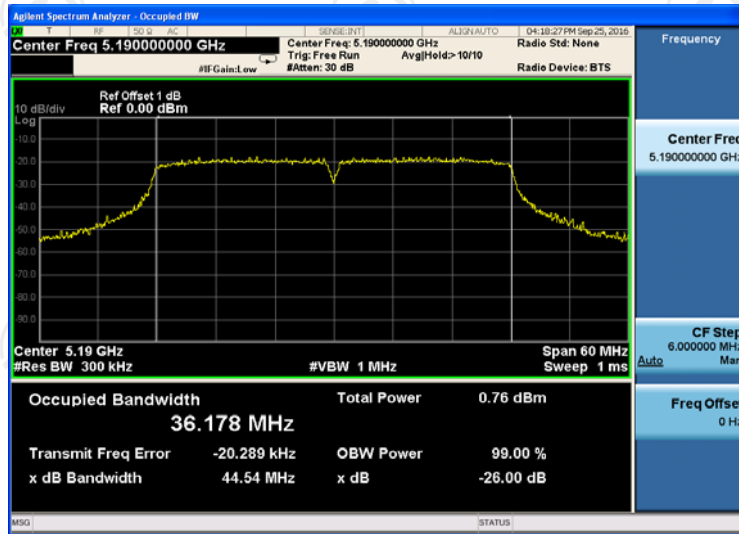


CH46

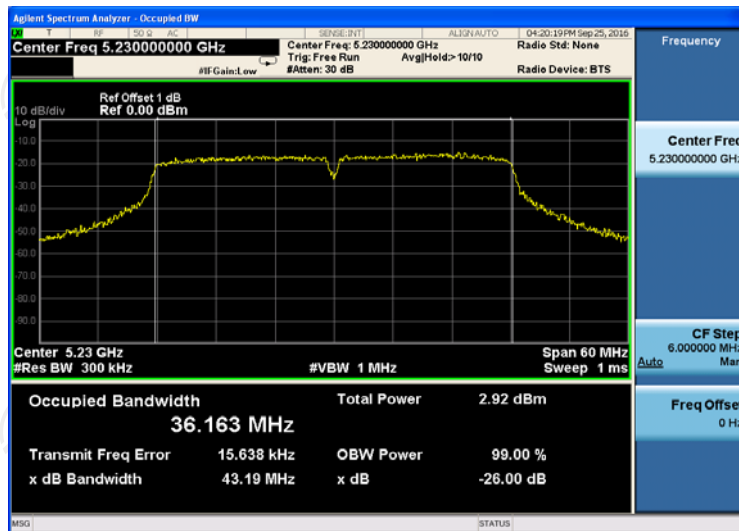


Band IV (5725 – 5850 MHz)
11n(HT20)


CH149

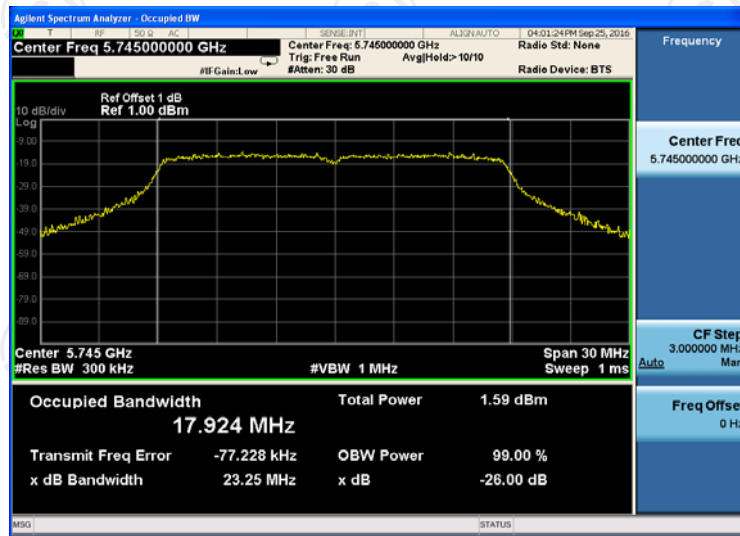

CH157

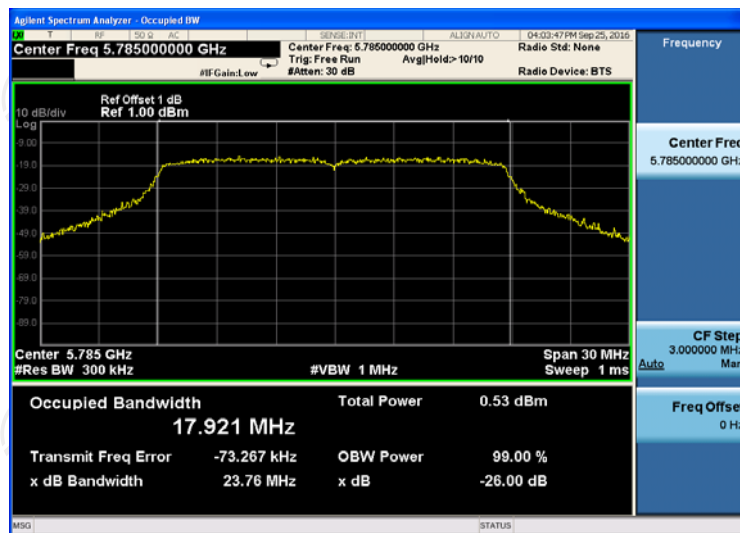


CH161

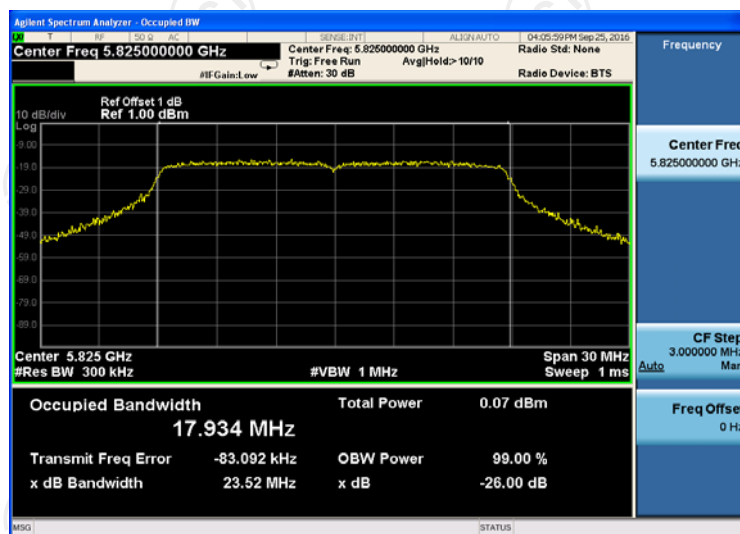


11n(HT40)

CH151

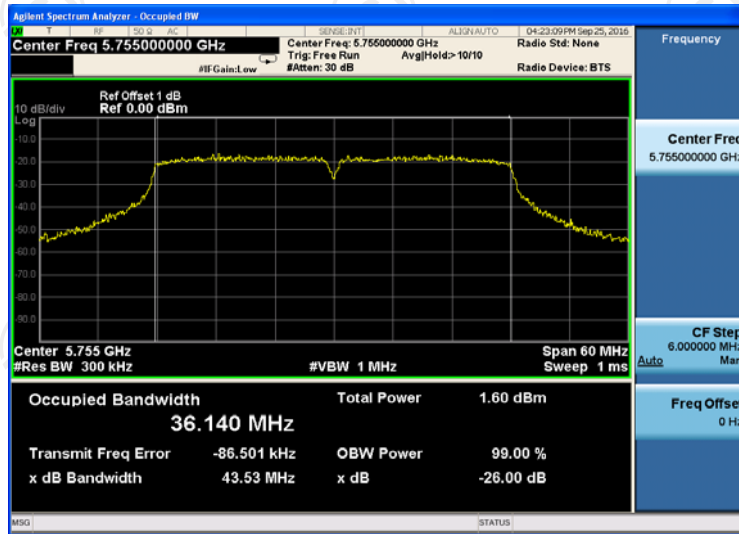


CH159

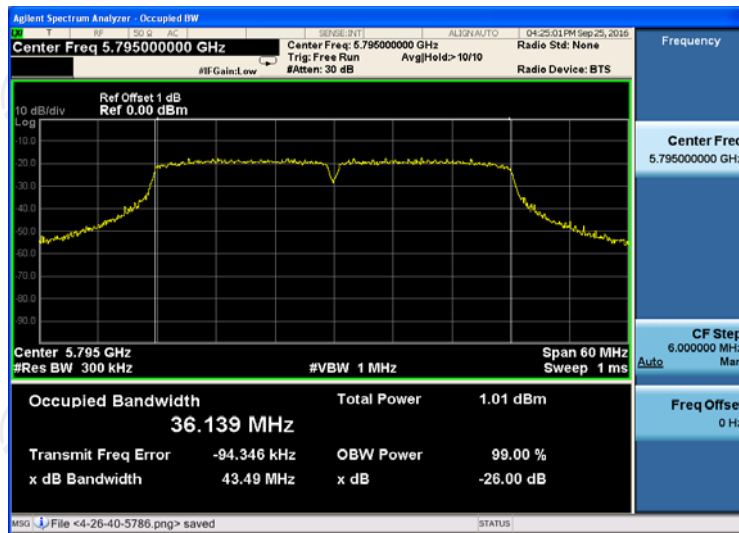


ANT 1
 Band I (5150 – 5250 MHz)
 11n(HT20)


CH36

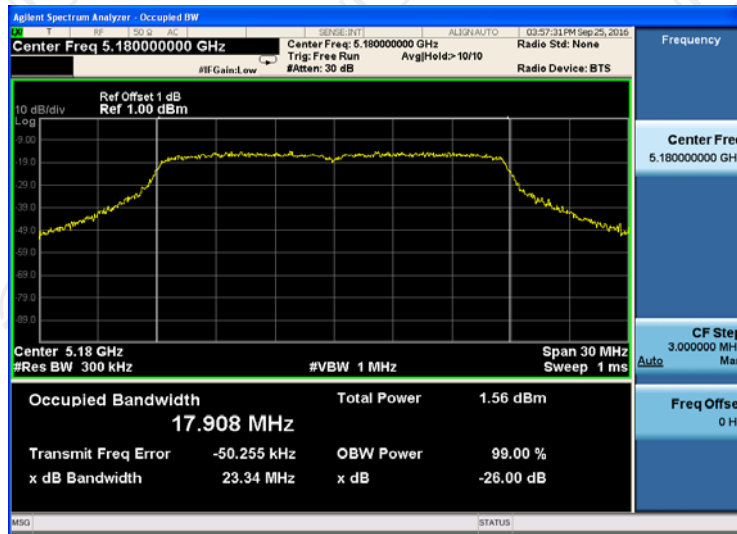

CH44

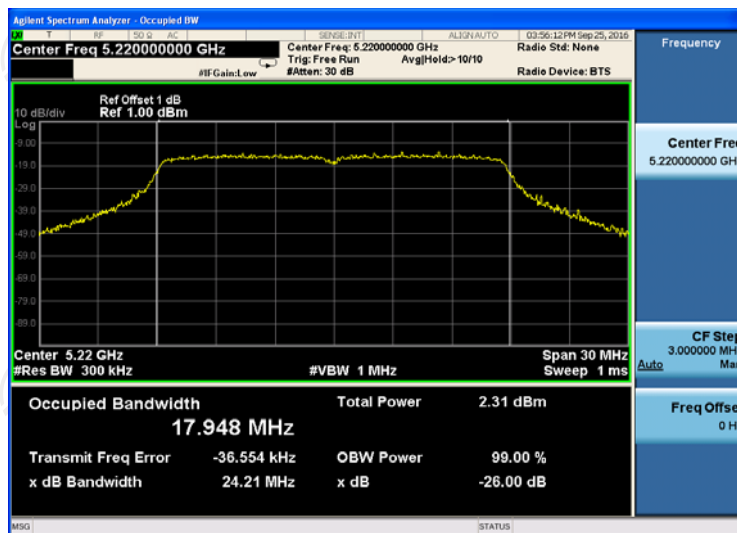


CH48

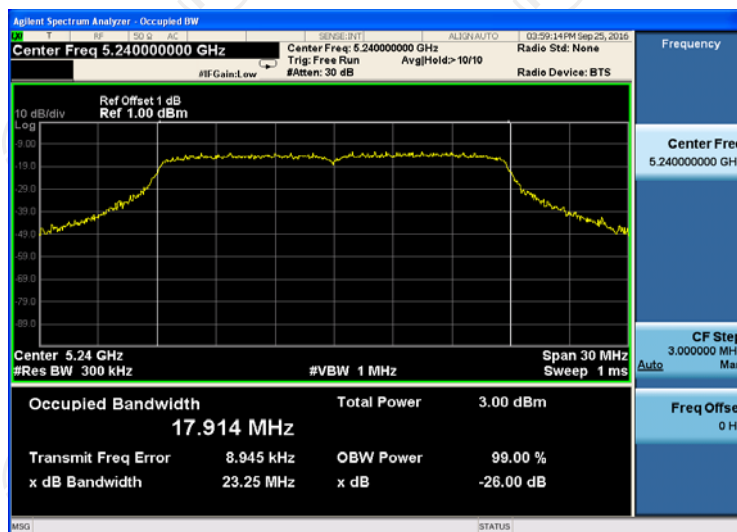


11n(HT40)

CH38

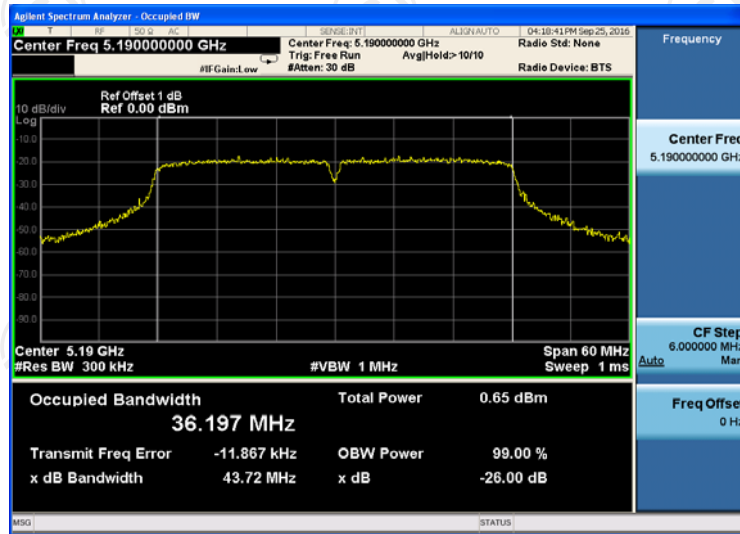


CH46

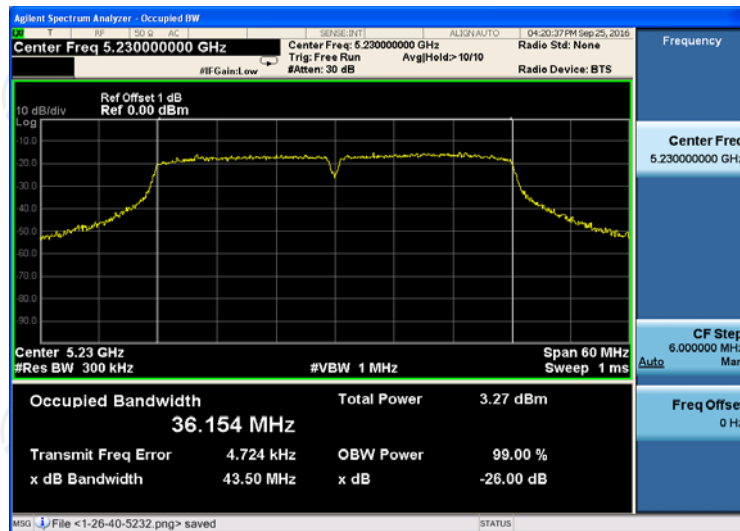


Band IV (5725 – 5850 MHz)

11n(HT20)

CH149

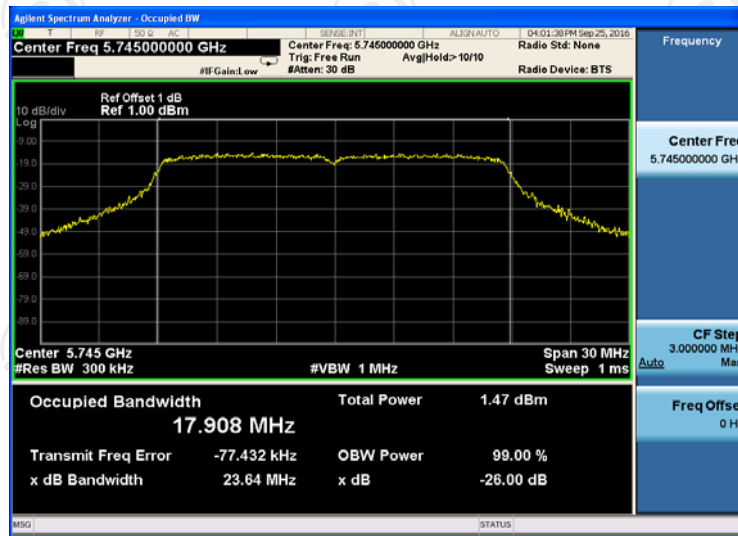

CH157

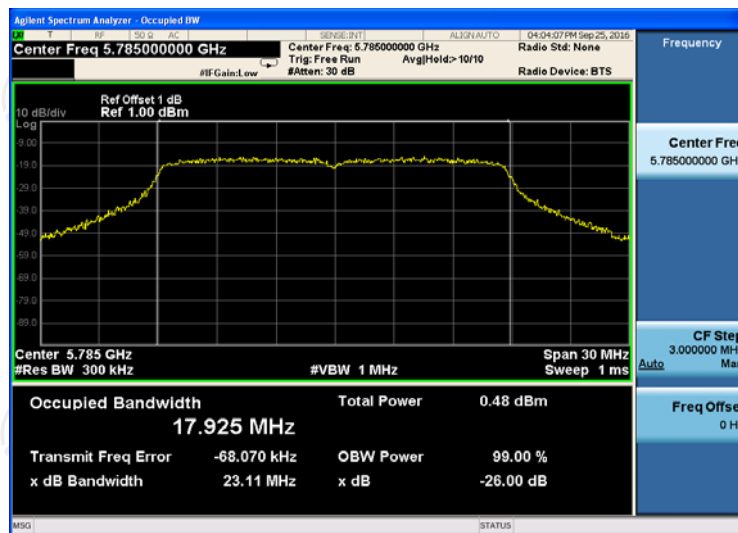

CH161

