

RF TEST REPORT

Test Equipment : Leisure Tour 2.4G
Model Name : DCX-L103
FCC ID : Y3J-DCX-L103
IC : 9409A-DCXL103
Date of receipt : 2021-09-01
Test duration : 2021-09-07 ~ 2021-09-13
Date of issue : 2021-09-16

Applicant : David Clark Company Inc.
360 Franklin Street PO Box 15054 Worcester, MA 01615-0054
United States

Test Laboratory : Lab-T, Inc.
2182-42 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si
Gyeonggi-do, 17036, Korea


Test specification : FCC Part 15 Subpart C 15.247
RSS-247 Issue 2(2017-02), RSS-GEN Issue 5 A2(2021-02)

RF Output Power : 18.41 dBm

Test result : Pass

The above equipment was tested by Lab-T Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.
The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.
This test report shall not be reproduced except in full, without the written approval of Lab-T, Inc
This test report is not related to KOLAS.

Tested by:



Engineer
SungSin Kim

Reviewed by:



Technical Manager
SangHoon Yu

CONTENTS

1. Revision history.....	3
2. Information	4
2.1 Applicant Information	4
2.2 Test Laboratory information.....	4
2.3 Test Site.....	4
3. Information About Test Equipment	5
3.1 Equipment Information	5
3.2 Antenna Information	5
3.3 Test Frequency.....	5
3.4 Tested Companion Device Information	5
3.5 Operating conditions for the EUT.....	6
3.5 Equipment Channel List	7
4. Test Report.....	8
4.1 Summary	8
4.2 Measurement Uncertainty.....	9
4.3 Transmitter Requirements	10
4.3.1 Antenna Requirement.....	10
4.3.2 20 dB Bandwidth and Occupied Bandwidth.....	11
4.3.3 Number of Hopping Frequencies	16
4.3.4 Time of occupancy (Dwell Time)	19
4.3.5 Carrier Frequencies Separation	22
4.3.6 Peak Output Power	26
4.3.7 Spurious Emission, Band Edge, and Restricted bands	30
4.3.8 Conducted Emission	45
APPENDIX I.....	46

1. Revision history

Test Report No.	Date	Description
TRRFCC21-0009	2021-09-16	Initial issue

2. Information

2.1 Applicant Information

Applicant name	David Clark Company Inc.
Address	360 Franklin Street PO Box 15054 Worcester, MA 01615-0054, United States
Telephone No.	+1-508-751-5800 331
Person in charge	David J Truesdell / dtruesdell@davidclark.com
Manufacturer	Maytel Co., Ltd
Address	#417 Doosan Venture Digm 126-1, Pyeongchon-dong,Dongan-gu, Anyang-si Gyeonggi-do, Republic of Korea

2.2 Test Laboratory information

Corporate name	Lab-T, Inc.
Representative	Duke(Jongyoung) Kim
Address	2182-42 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 17036, Korea(Republic of)
Telephone	+82-31-322-6767
Fax	+82-31-322-6768
E-mail	info@lab-t.net
FCC Designation No.	KR0159
FCC Registration No.	133186
IC Registration No.	22000

2.3 Test Site

Test Site	used	Address
Building L	<input checked="" type="checkbox"/>	2182-40 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 17036, Korea(Republic of)
Building A	<input type="checkbox"/>	2182-44 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 17036, Korea(Republic of)
Building T	<input checked="" type="checkbox"/>	2182-42 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 17036, Korea(Republic of)

3. Information About Test Equipment

3.1 Equipment Information

Equipment type	Leisure Tour 2.4G
Model name	DCX-L103
Variant model name ^{NOTE2}	FCC : DCX-G103, DCX-L203, DCX-L213, DCX-G203, TP2.4-L, TP2.4-G, TM2.4-XT1, TM2.4-XT2, TM2.4-G, Translate Tour 2.4G
	IC : DCX-G103, DCX-L203, DCX-L213, DCX-G203
Frequency range	2407 ~ 2476 MHz (Number of Channels : 139, Hopping Channels : 40)
Modulation type (Symbol rate / Bit rate)	GFSK (625 ksps / 1250 kbps)
Modulation technology	FHSS
Power supply	DC 3.7 V
H/W version	1.0.0
S/W version	1.0.0

NOTE1: The above EUT information was declared by the manufacturer.

NOTE2: Variant model name by Buyer request

3.2 Antenna Information

Antenna	Type	Chip Antenna
	Gain	0 dBi

3.3 Test Frequency

Test mode	Test frequency (MHz)		
	Lowest frequency	Middle frequency	Highest frequency
GFSK	2 407	2 441.5	2 476

3.4 Tested Companion Device Information

Type	Manufacturer	Model	Note
-	-	-	-

3.5 Operating conditions for the EUT

Firmware state		1.0.0
Test software name(version)		Used native test mode(-)
Test power setting		default
Serial number (Setup mode)	EUT #1	#1 (Conducted Emission)
	EUT #2	#2 (Radiated Emission)

3.5 Equipment Channel List

Chnnel	Freq,(MHz)	Chnnel	Freq,(MHz)	Chnnel	Freq,(MHz)	Chnnel	Freq,(MHz)
0	2407	37	2425.5	74	2444	111	2462.5
1	2407.5	38	2426	75	2444.5	112	2463
2	2408	39	2426.5	76	2445	113	2463.5
3	2408.5	40	2427	77	2445.5	114	2464
4	2409	41	2427.5	78	2446	115	2464.5
5	2409.5	42	2428	79	2446.5	116	2465
6	2410	43	2428.5	80	2447	117	2465.5
7	2410.5	44	2429	81	2447.5	118	2466
8	2411	45	2429.5	82	2448	119	2466.5
9	2411.5	46	2430	83	2448.5	120	2467
10	2412	47	2430.5	84	2449	121	2467.5
11	2412.5	48	2431	85	2449.5	122	2468
12	2413	49	2431.5	86	2450	123	2468.5
13	2413.5	50	2432	87	2450.5	124	2469
14	2414	51	2432.5	88	2451	125	2469.5
15	2414.5	52	2433	89	2451.5	126	2470
16	2415	53	2433.5	90	2452	127	2470.5
17	2415.5	54	2434	91	2452.5	128	2471
18	2416	55	2434.5	92	2453	129	2471.5
19	2416.5	56	2435	93	2453.5	130	2472
20	2417	57	2435.5	94	2454	131	2472.5
21	2417.5	58	2436	95	2454.5	132	2473
22	2418	59	2436.5	96	2455	133	2473.5
23	2418.5	60	2437	97	2455.5	134	2474
24	2419	61	2437.5	98	2456	135	2474.5
25	2419.5	62	2438	99	2456.5	136	2475
26	2420	63	2438.5	100	2457	137	2475.5
27	2420.5	64	2439	101	2457.5	138	2476
28	2421	65	2439.5	102	2458		
29	2421.5	66	2440	103	2458.5		
30	2422	67	2440.5	104	2459		
31	2422.5	68	2441	105	2459.5		
32	2423	69	2441.5	106	2460		
33	2423.5	70	2442	107	2460.5		
34	2424	71	2442.5	108	2461		
35	2424.5	72	2443	109	2461.5		
36	2425	73	2443.5	110	2462		

Note1 : Test frequencies are the lowest channel: 0 channel(2 407 MHz), middle channel: 69 channel(2 441.5 MHz) and highest channel: 138 channel(2 476 MHz)

Note2 : This device uses 40 random hopping channels among total 139 channels

Note3 : When hen hen frequency selection, it is selected to spread at least 1 MHz.

4. Test Report

4.1 Summary

FCC Rule	IC Rule	Parameter	Clause	Status
Transmitter Requirements				
15.203 15.247(b)(4)	-	Antenna Requirement	4.3.1	C
15.247(a)(1)	RSS-247 5.1(b)	20 dB Channel Bandwidth	4.3.2	C
-	RSS-GEN 6.7	Occupied Bandwidth	4.3.2	-
15.247(a)(1)(iii)	RSS-247 5.1(d)	Number of Hopping Frequencies	4.3.3	C
15.247(a)(1)(iii)	RSS-247 5.1(d)	Time of occupancy (Dwell Time)	4.3.4	C
15.247(a)(1)	RSS-247 5.1(b)	Carrier Frequencies Separation	4.3.5	C
15.247(b)(1)	RSS-247 5.4(b)	Peak Output Power	4.3.6	C
15.247(d) 15.205(a) 15.209(a)	RSS-247 5.5	Spurious Emission, Band Edge and Restricted bands	4.3.7	C
15.207(a)	RSS-GEN 8.8	Conducted Emissions	4.4.8	N/A ^{NOTE2}
Note 1 : C = Comply N/C = Not Comply N/T = Not Tested N/A = Not Applicable Note 2 : This device gets power supply from only battery(DC 3.7 V). The battery only charges with a excusive cradle.				

* The general test methods used to test this device is ANSI C63.10:2013

4.2 Measurement Uncertainty

Measurement items	Expanded Uncertainty	
RF Output Power	0.76 dB	(The confidence level is about 95 %, $k=2$)
Power Spectral Density	0.93 dB	(The confidence level is about 95 %, $k=2$)
Occupied Channel Bandwidth	17.25 kHz	(The confidence level is about 95 %, $k=2$)
Conducted Spurious Emissions	0.40 dB	(The confidence level is about 95 %, $k=2$)
Radiated Spurious Emissions (1 GHz under)	4.84 dB	(The confidence level is about 95 %, $k=2$)
Radiated Spurious Emissions (Above 1 GHz)	5.96 dB	(The confidence level is about 95 %, $k=2$)

4.3 Transmitter Requirements

4.3.1 Antenna Requirement

4.3.1.1 Regulation

According to §15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to §15.247(b)(4) e conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.1.2 Result

Comply

(The transmitter has a internal Chip Antenna. The directional peak gain of the antenna is 0 dBi.)

4.3.2 20 dB Bandwidth and Occupied Bandwidth

4.3.2.1 Regulation

20 dB and 99% emission bandwidth reporting only, measurement is also used to determine limits for other requirements of FHSS transmitters.

4.4.2.2 Measurement Procedure

ANSI C63.10 § 6.9.2 Occupied bandwidth 20dB Relative procedure
ANSI C63.10 § 6.9.3 Occupied bandwidth 99% procedure

4.4.2.3 Result

Comply (measurement data : refer to the next page)

4.3.2.4 Measurement data

Test mode : GFSK


Frequency (MHz)	20 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % Bandwidth)(MHz)
2 402	0.61	0.25	0.88
2 441	0.60	0.25	0.85
2 480	0.61	0.25	0.85

4.3.2.5 Test Plot

GFSK_2 407 MHz(20 dB Bandwidth)




GFSK_2 407 MHz(99% Occupied Bandwidth)

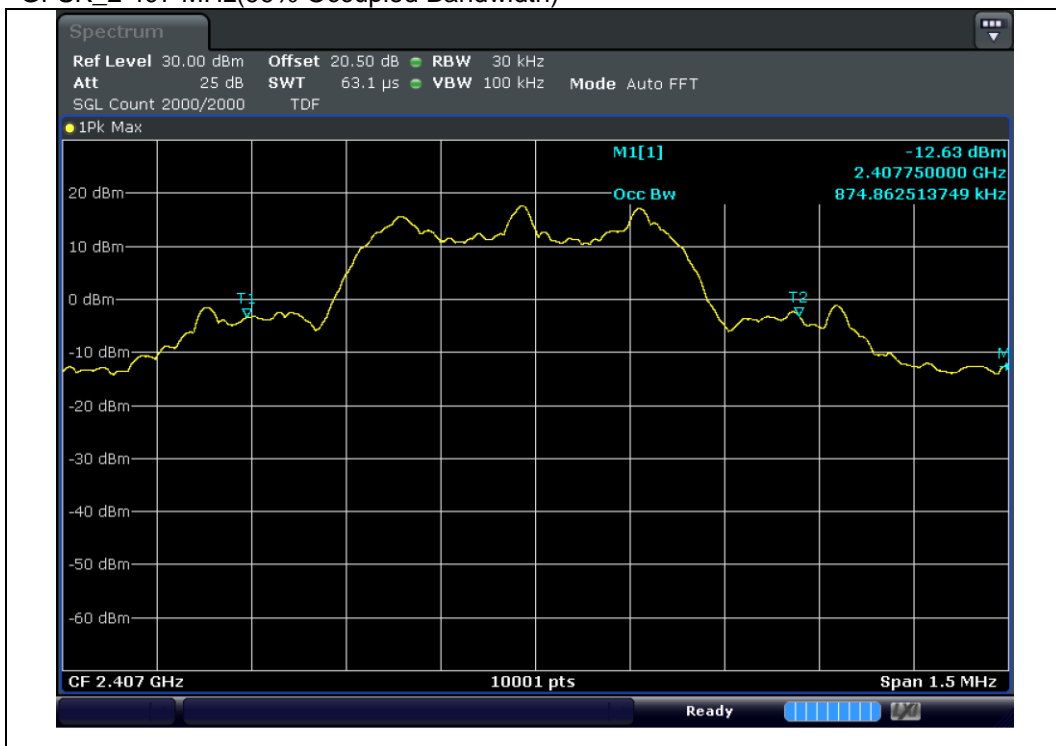

GFSK_2 441.5 MHz(20 dB Bandwidth)




GFSK_2 441.5 MHz(99% Occupied Bandwidth)

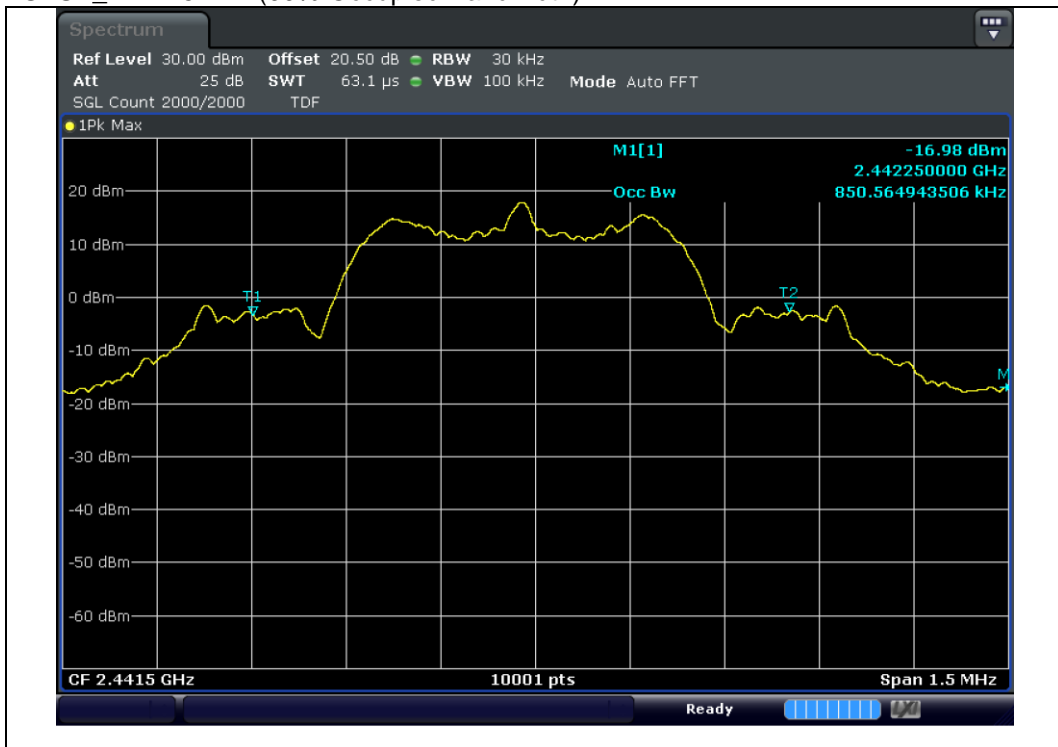

GFSK_2 476 MHz(20 dB Bandwidth)



GFSK_2 476 MHz(99% Occupied Bandwidth)

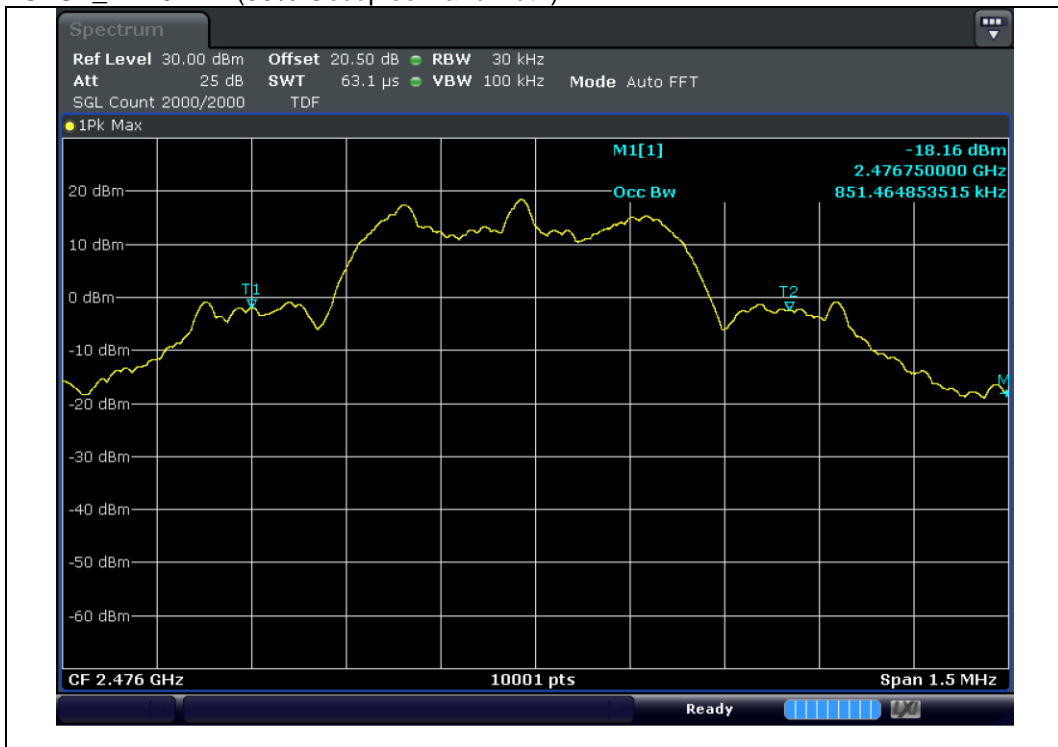

4.3.3 Number of Hopping Frequencies

4.3.3.1 Regulation

According to §15.247(a)(1)(iii) and RSS-247 §5.1(d) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

4.3.3.2 Measurement Procedure

ANSI C63.10 § 7.8.3 Number of hopping frequencies

4.3.3.3 Result


Comply (measurement data : refer to the next page)

4.3.3.4 Measurement data


TEST MODE	Number of Hopping channels
GFSK	40

4.3.3.5 Test Plot

GFSK_Low

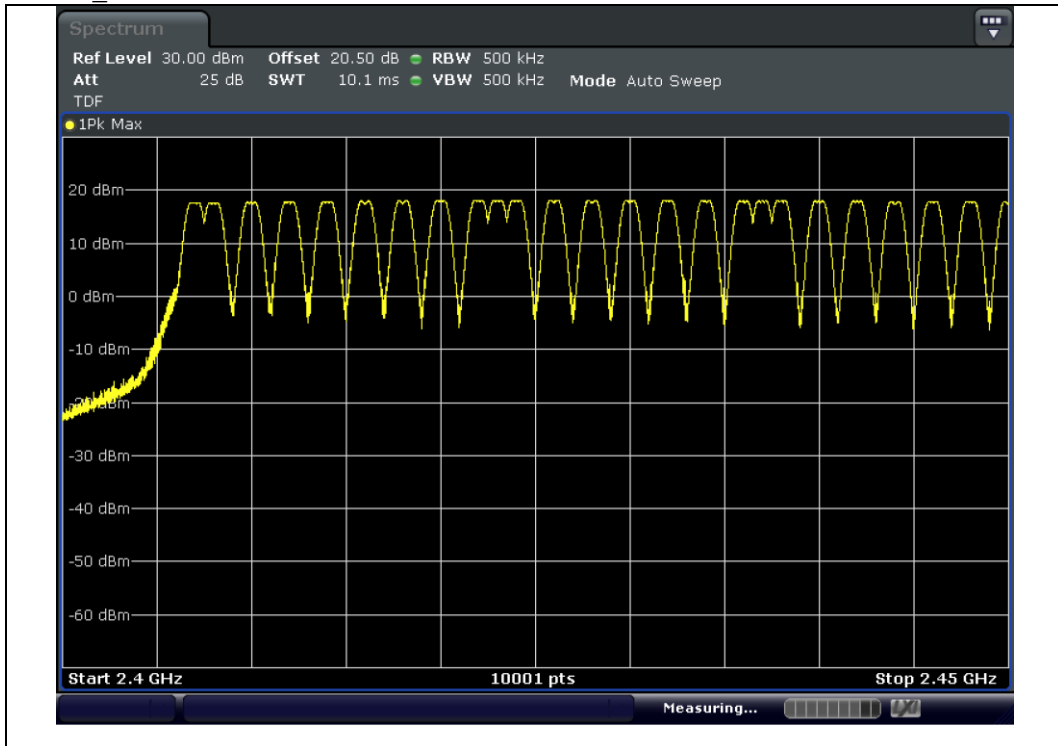

GFSK_High

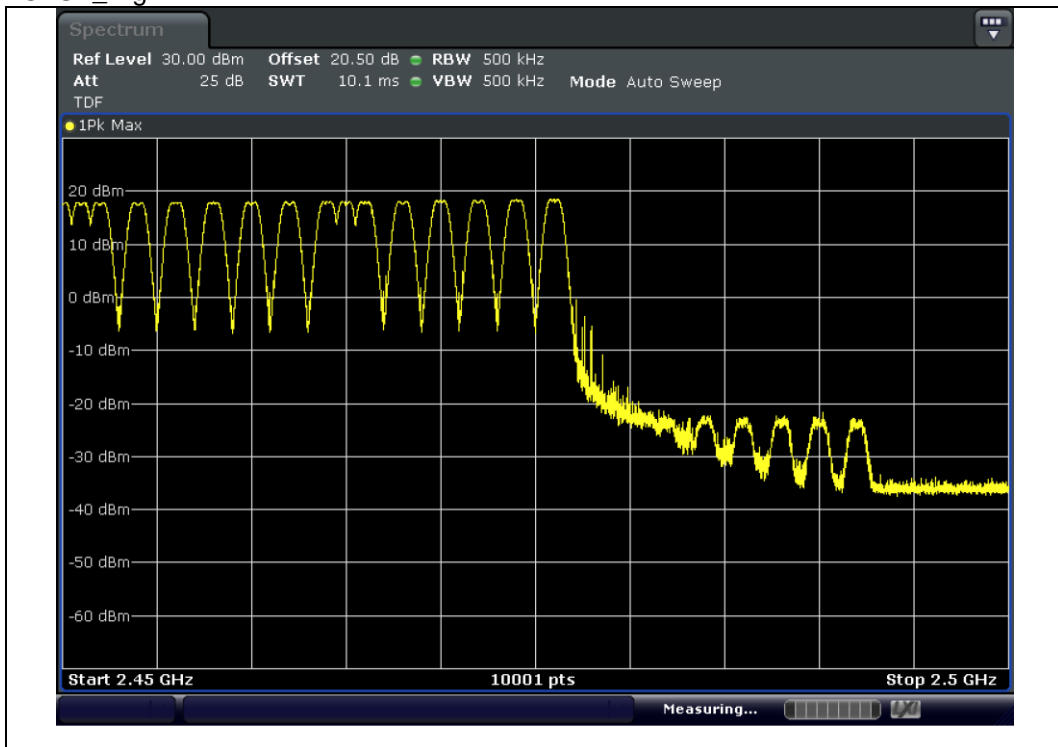

4.3.4 Time of occupancy (Dwell Time)

4.4.4.1 Regulation

According to §15.247(a)(1)(iii) and RSS-247 §5.1(d) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

4.3.4.2 Measurement Procedure

ANSI C63.10 § 7.8.3 Time of Occupancy

4.3.4.3 Result

Comply (measurement data : refer to the next page)

4.3.4.4 Measurement data


Test mode : GFSK_Hopping

Time of occupancy				
Number of hopping Channels	Burst On Time (ms)	Period (ms)	Result (sec)	Limit (sec)
40	13.25	39.96	0.13	0.40


NOTE1 : $Result = (0.4 * \text{Number of hopping channels}) * \text{Burst On Time} / (\text{Period} * \text{Number of hopping channels})$

4.3.4.5 Test Plot

Burst On Time

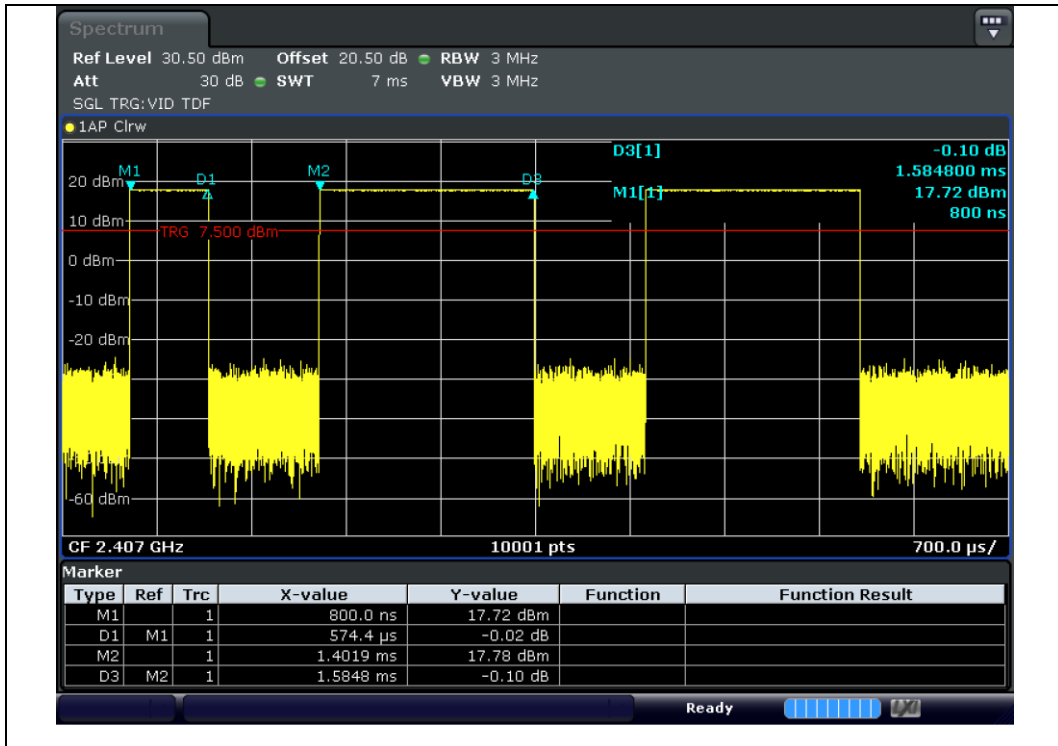

Period

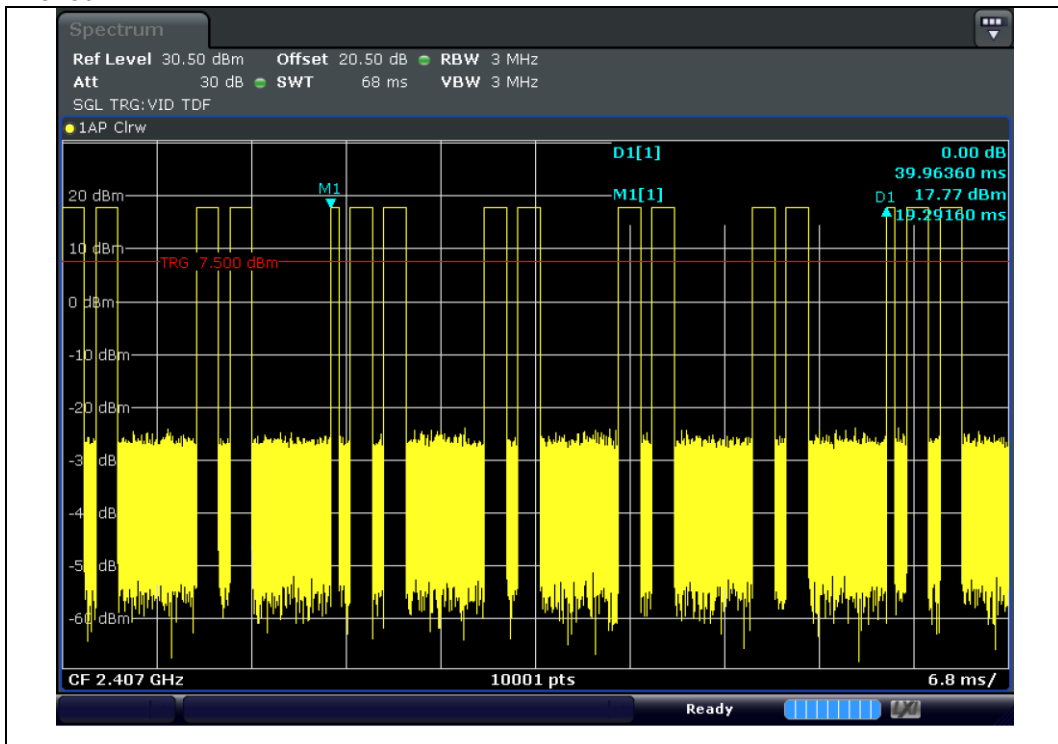

On Time : 0.57 ms + (1.5848 ms * 8) = 13.25 ms
 Period : 39.9636 ms

4.3.5 Carrier Frequencies Separation

4.3.5.1 Regulation

According to §15.247(a)(1) and RSS-247 §5.1(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

4.3.5.2 Measurement Procedure

ANSI C63.10 § 7.8.2 Carrier frequency separation

4.3.5.3 Result

Comply (measurement data : refer to the next page)

4.3.5.4 Measurement data


Test mode : GFSK

Carrier Frequency Separation		
Test hopping channel No.	Result (MHz)	Min. Limit (MHz)
Channel 0 to Channel 2	1.00	0.61
Channel 70 to Channel 74	2.00	0.60
Channel 134 to Channel 138	2.00	0.61


NOTE1 : Limit(kHz) : Result of 20 dB Bandwidth

4.3.5.5 Test Plot


GFSK_Channel 0 to Channel 2

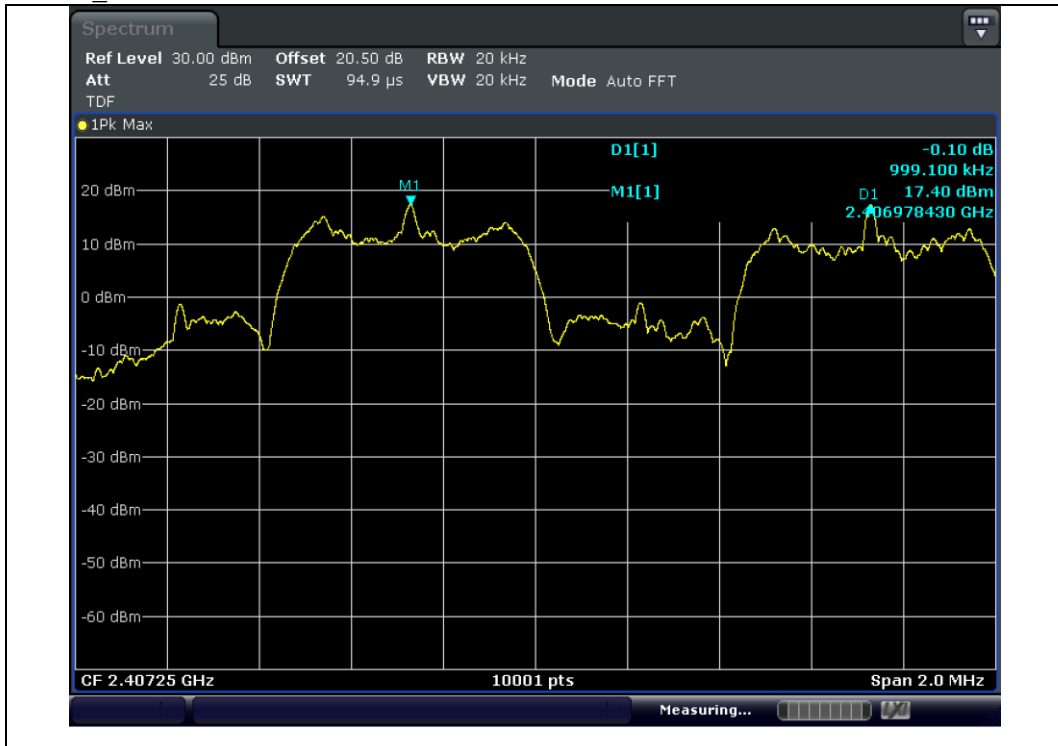

GFSK_Channel 70 to Channel 74

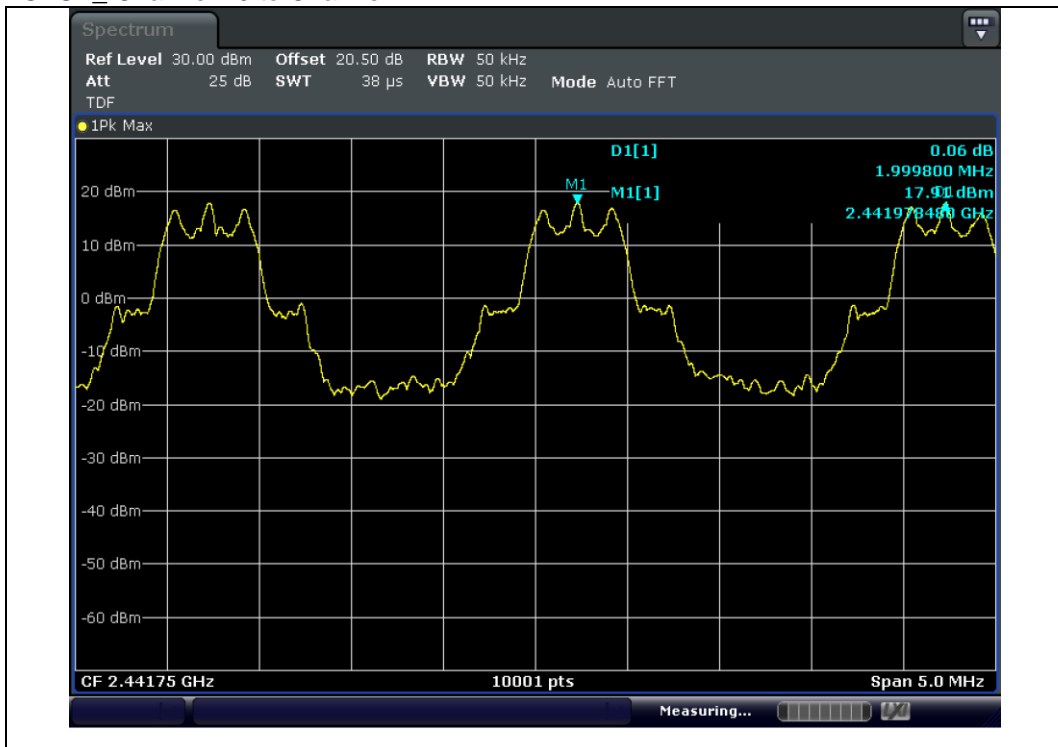

GFSK Channel 134 to Channel 138

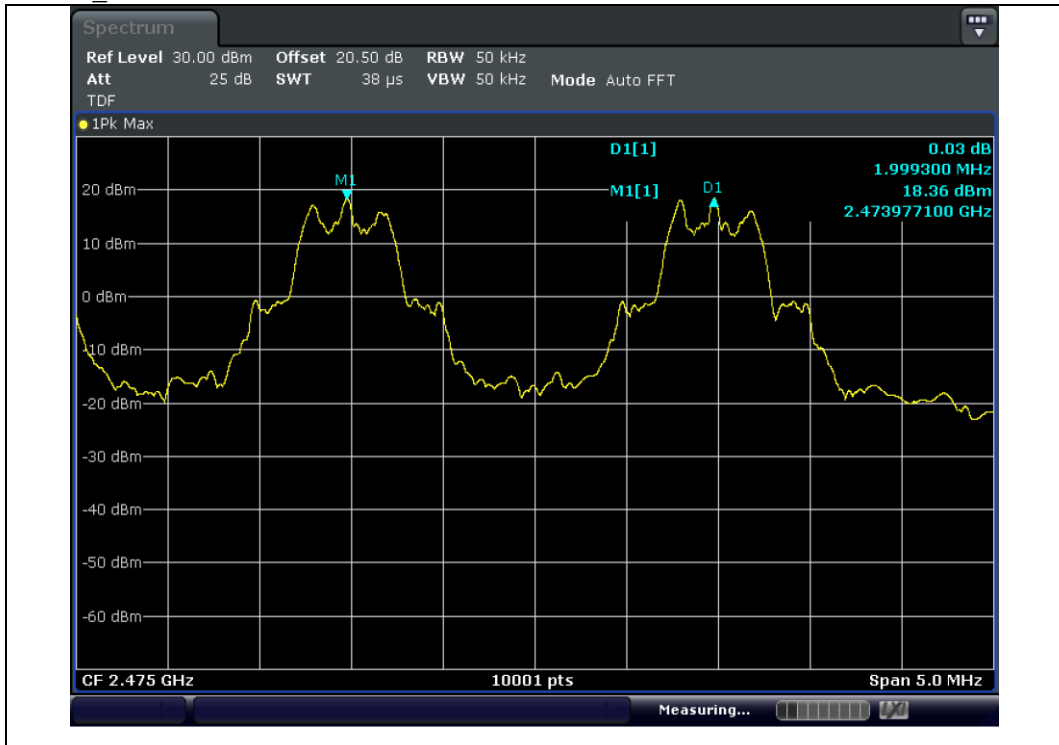

4.3.6 Peak Output Power

4.3.6.1 Regulation

According to §15.247(a)(1) and RSS-247 §5.4(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1) and RSS-247 §5.4(b) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 nonoverlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

4.3.6.2 Measurement Procedure

ANSI C63.10 § 7.8.5 Output Power test procedure for FHSS

4.3.6.3 Result

Comply (measurement data : refer to the next page)

4.3.6.4 Measurement data

Test mode : GFSK


Frequency (MHz)	Peak Output Power Result (dBm)	Peak Output Power Result (mW)	Peak Output Power Limit (mW)	Avg Output Power Result (dBm)
2 407	17.64	58.02	1000.00	13.37
2 441.5	17.93	62.06	1000.00	13.59
2 476	18.41	69.29	1000.00	14.09

NOTE1 : Since the directional gain of Antenna declared by the manufacturer, does not exceed 6.0 dBi ,there was no need to reduce the output power.


NOTE2 : Peak Output Power Result(mW) = (10^{(Peak Output Power Result(dBm)/10)})

4.3.6.5 Test Plot


GFSK_2 407 MHz

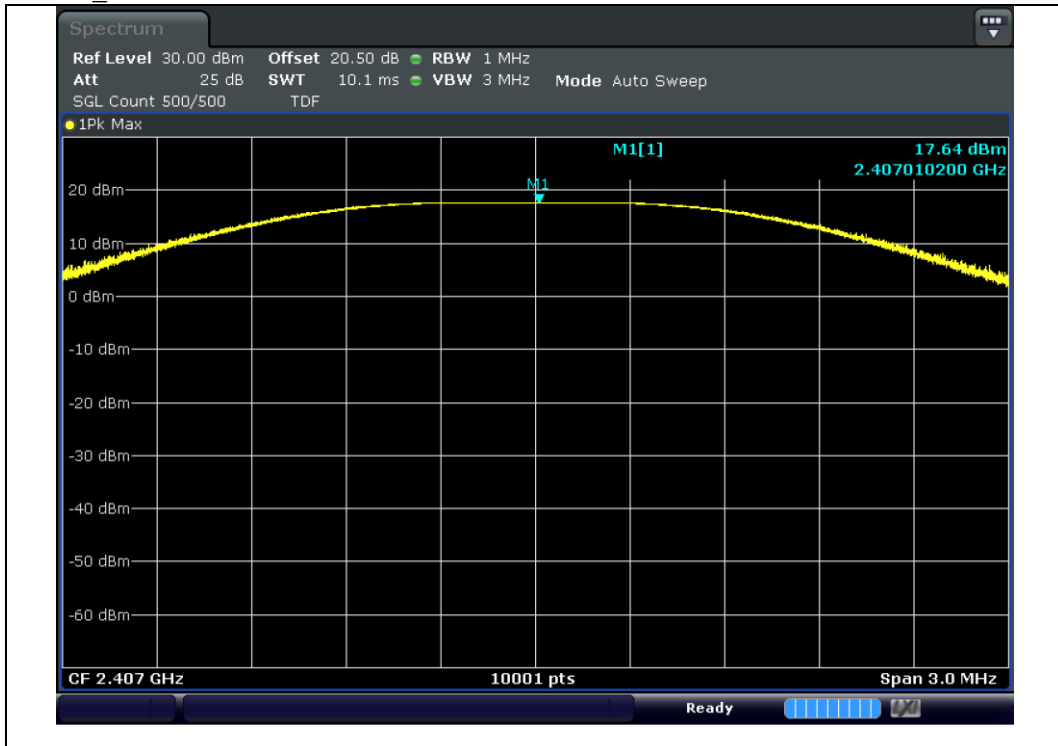

GFSK_2 441.5 MHz

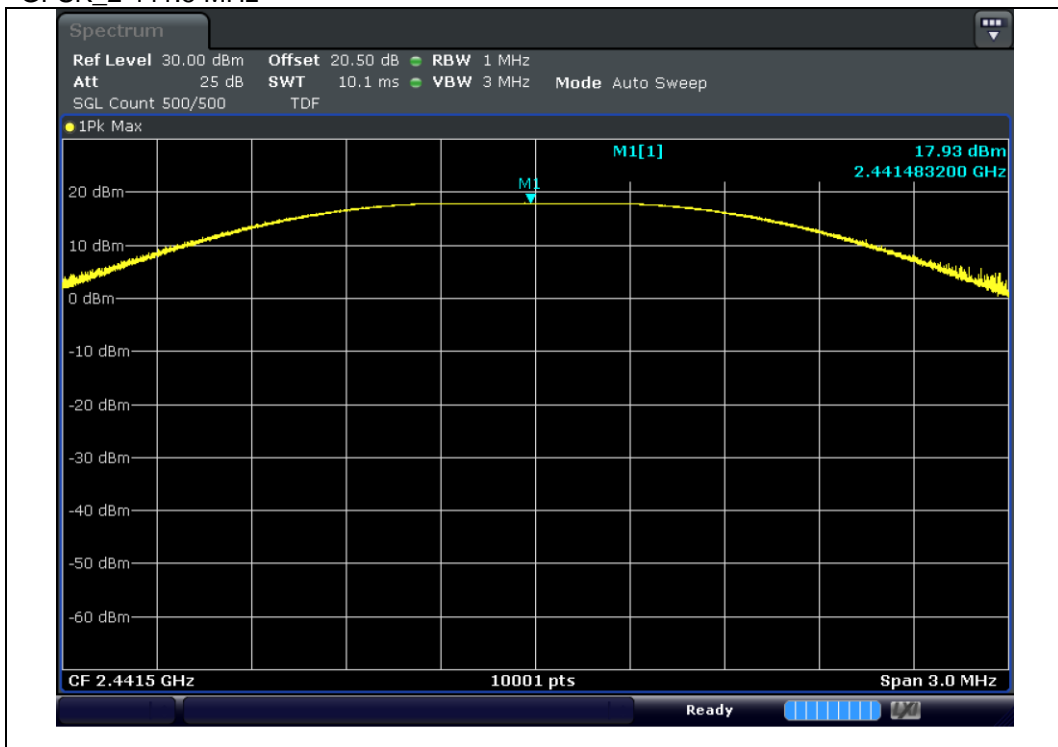

GFSK_2 476 MHz

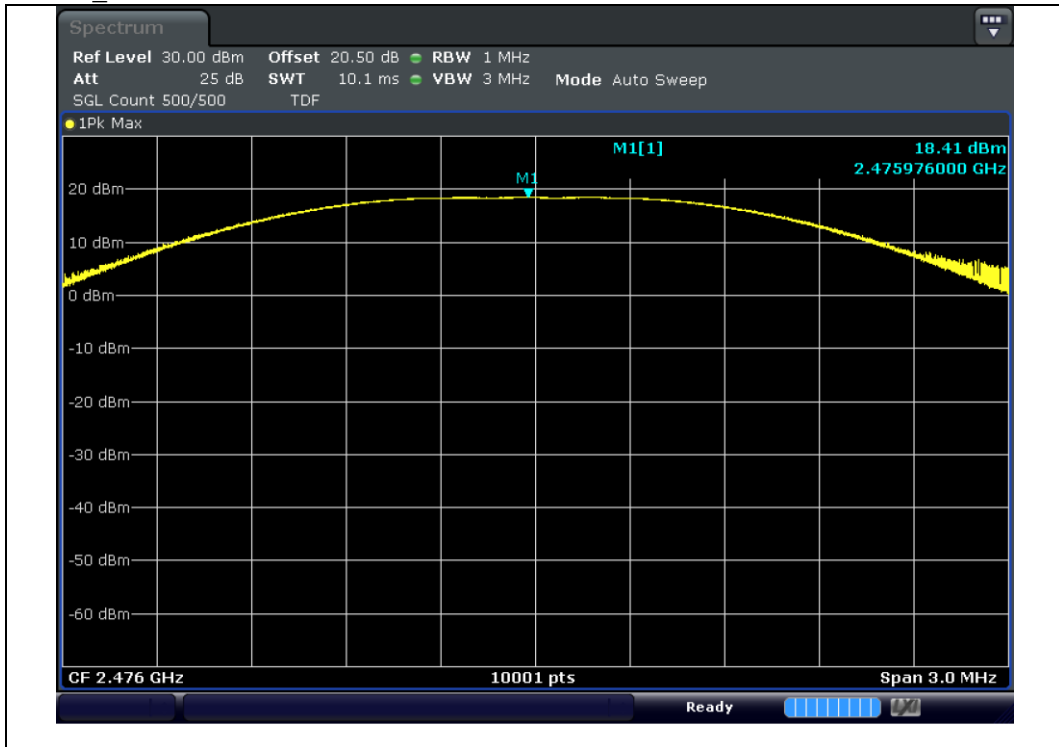

4.3.7 Spurious Emission, Band Edge, and Restricted bands

4.3.7.1 Regulation

According to §15.247(d) and RSS-247 §5.5 in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a) and RSS-GEN §8.9 Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

According to §15.205(a),(b) and RSS-GEN §8.10 only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 – 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 – 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 – 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 – 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 – 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 – 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 – 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 – 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 – 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 – 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 – 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 – 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 – 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 – 4 400	Above 38.6
13.36 - 13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurement

4.3.7.2 Measurement Procedure

- ANSI C63.10 § 6.10.4 Authorized band-edge relative method (lower bandedge)
- ANSI C63.10 § 6.10.6 Marker Delta Method (upper restricted bandedge)
- ANSI C63.10 § 11.11.1 General Information
- ANSI C63.10 § 11.11.3 Emission level measurement

4.3.7.2.1 Band-edge Compliance of RF Conducted Emissions

- Span : wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
- RBW : $\geq 1\%$ of the span
- VBW : \geq RBW
- Sweep : Auto
- Detector : Peak
- Trace : Max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section. Submit this plot.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit. Submit this plot.

4.3.7.2.2 Conducted Spurious Emissions

Span : wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW : $\geq 1\%$ of the span

VBW : \geq RBW

Sweep : Auto

Detector : Peak

Trace : Max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section. Submit these plots.

4.3.7.2.3 Radiated Spurious Emissions

1) The preliminary and final radiated measurements were performed to determine the frequency producing the maximum emissions in at a 10m anechoic chamber. The EUT was tested at a distance 3 m(Below 1 GHz) and 1 m(Above 1 GHz).

2) The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

3) The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1 000 MHz using the BILOG broadband antenna, and from 1 000 MHz to 10 000 MHz using the horn antenna.

4) Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

Span : wide enough to fully capture the emission being measured

RBW : ≥ 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW : \geq RBW

Sweep : Auto

Detector : Peak

Trace : Max hold

Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

NOTE1 : The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.

NOTE2 : The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

NOTE3 : The 0.8 m height is for below 1 GHz testing, and 1.5 m is for above 1 GHz testing

NOTE4 : Below 1 GHz Measured distance : 3 m, Above 1 GHz Measured distance : 1 m
Above 1 GHz Distance Factor = $20\log(1 / 3) = -9.54$

NOTE5 : (Below 1 GHz) Loss : Cable loss – Amp gain, Result : Reading + Ant Factor + Loss

NOTE6 : (Above 1 GHz) Factor : Ant Factor + Cable loss - Amp gain + Distance Factor

Peak Result : Reading + Factor

DCCF(Duty Cycle Correction Factor) : $20 \times \text{Log}(\text{worst case dwell time} / 100 \text{ ms}) \text{ dB}$, refer to 4.4.7.7

Average Result : Average Reading + Factor + DCCF

NOTE7 : Peak measurement did not take place because it is more than 20dB difference in the limit

4.3.7.3 Result

Comply (measurement data : refer to the next page)

4.3.7.4 Measurement data_Radiated Spurious Emissions

Test mode : Below 1 GHz (Worst case : GFSK_2 476 MHz)

Frequency (MHz)	Detector	Pol. (V/H)	Reading (dB μ V)	Ant Factor (dB)	Loss (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
437.51	QP	V	30.00	23.00	-26.40	26.60	46.00	19.40
500.07	QP	V	30.80	24.00	-26.30	28.50	46.00	17.50

Test mode : Above 1 GHz_GFSK_2 407

Frequency (MHz)	Detector	Pol. (V/H)	Reading (dB μ V)	Factor (dB)	DCCF (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4813.13	PK	V	58.80	0.00	-	58.76	74.00	15.24
	AV	V	35.20	0.00	-17.56	17.60	54.00	36.40
4813.13	PK	H	57.00	0.00	-	56.96	74.00	17.04
	AV	H	35.00	0.00	-17.56	17.40	54.00	36.60
7218.75	PK	H	60.10	4.10	-	64.16	74.00	9.84
	AV	H	38.10	4.10	-17.56	24.60	54.00	29.40
7218.75	PK	V	59.30	4.10	-	63.36	74.00	10.64
	AV	V	37.90	4.10	-17.56	24.40	54.00	29.60
9626.25	PK	V	49.70	7.60	-	57.26	74.00	16.74
	AV	V	27.60	7.60	-17.56	17.60	54.00	36.40
12033.75	PK	H	52.70	12.10	-	64.76	74.00	9.24
	AV	H	31.10	12.10	-17.56	25.60	54.00	28.40
12033.75	PK	V	55.60	12.10	-	67.66	74.00	6.34
	AV	V	33.10	12.10	-17.56	27.60	54.00	26.40

Test mode : Above 1 GHz_GFSK_2 441.5


Frequency (MHz)	Detector	Pol. (V/H)	Reading (dB μ V)	Factor (dB)	DCCF (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4880.63	PK	V	55.40	0.00	-	55.36	74.00	18.64
	AV	V	33.10	0.00	-17.56	15.50	54.00	38.50
4882.50	PK	H	57.60	0.00	-	57.56	74.00	16.44
	AV	H	33.80	0.00	-17.56	16.20	54.00	37.80
7323.75	PK	H	61.90	4.40	-	66.26	74.00	7.74
	AV	H	37.90	4.40	-17.56	24.70	54.00	29.30
7323.75	PK	V	59.60	4.40	-	63.96	74.00	10.04
	AV	V	37.70	4.40	-17.56	24.50	54.00	29.50
9765.00	PK	V	51.80	7.80	-	59.56	74.00	14.44
	AV	V	31.20	7.80	-17.56	21.40	54.00	32.60
12208.13	PK	V	51.10	12.30	-	63.36	74.00	10.64
	AV	V	32.00	12.30	-17.56	26.70	54.00	27.30
12208.13	PK	V	51.10	12.30	-	63.36	74.00	10.64
	AV	V	32.00	12.30	-17.56	26.70	54.00	27.30
12208.13	PK	H	46.00	12.30	-	58.26	74.00	15.74
	AV	H	27.20	12.30	-17.56	21.90	54.00	32.10
14649.38	PK	V	41.40	15.50	-	56.86	74.00	17.14
	AV	V	23.60	15.50	-17.56	21.50	54.00	32.50

Test mode : Above 1 GHz_GFSK_2 476


Frequency (MHz)	Detector	Pol. (V/H)	Reading (dBμV)	Factor (dB)	DCCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4951.58	PK	V	56.80	0.10	-	56.86	74.00	17.14
	AV	V	34.20	0.10	-17.56	16.70	54.00	37.30
7426.88	PK	V	58.60	4.50	-	63.06	74.00	10.94
	AV	V	35.20	4.50	-17.56	22.10	54.00	31.90
7428.75	PK	H	57.90	4.50	-	62.36	74.00	11.64
	AV	H	34.90	4.50	-17.56	21.80	54.00	32.20
9901.88	PK	V	53.60	8.10	-	61.66	74.00	12.34
	AV	V	32.10	8.10	-17.56	22.60	54.00	31.40
12380.63	PK	V	47.70	12.60	-	60.26	74.00	13.74
	AV	V	27.70	12.60	-17.56	22.70	54.00	31.30

4.3.7.5 Measurement Plot_Radiated Spurious Emissions


Test mode : 9 kHz ~ 30 MHz (Worst case : GFSK_2 476 MHz)

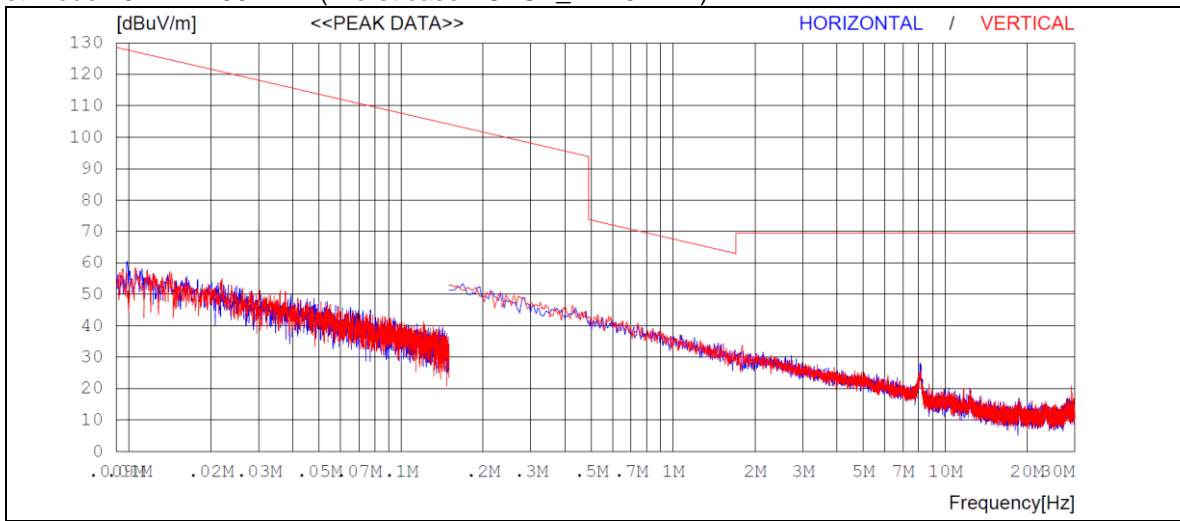


Test mode : 30 MHz ~ 1 GHz (Worst case : GFSK_2 476 MHz)

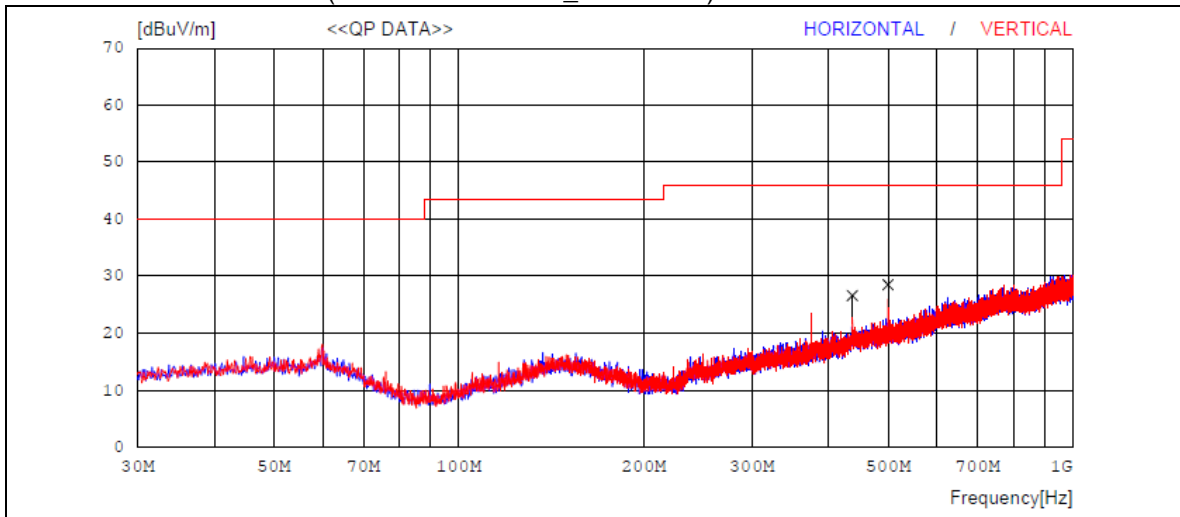


Test mode : 1 GHz ~ 3 GHz (Worst case : GFSK_2 476 MHz)

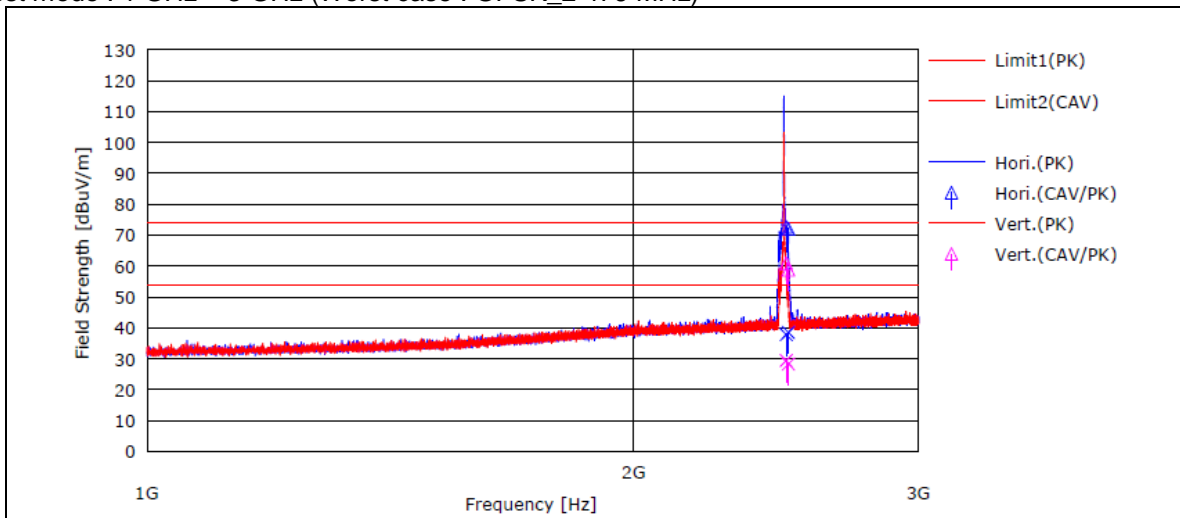

Test mode : 3 GHz ~ 18 GHz (Worst case : GFSK_2 476 MHz)

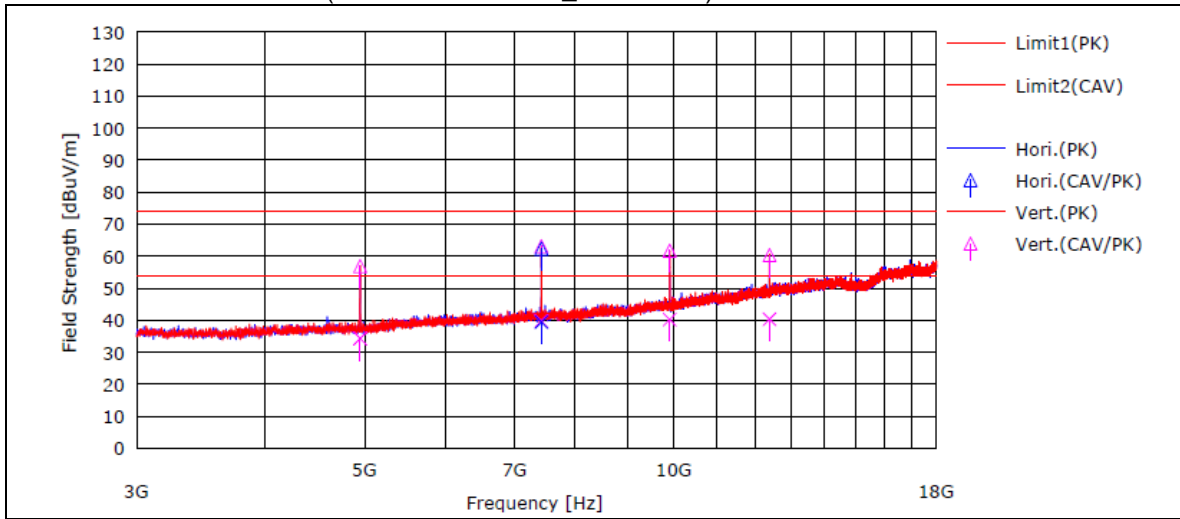


Test mode : 18 GHz ~ 26 GHz (Worst case : GFSK_2 476 MHz)

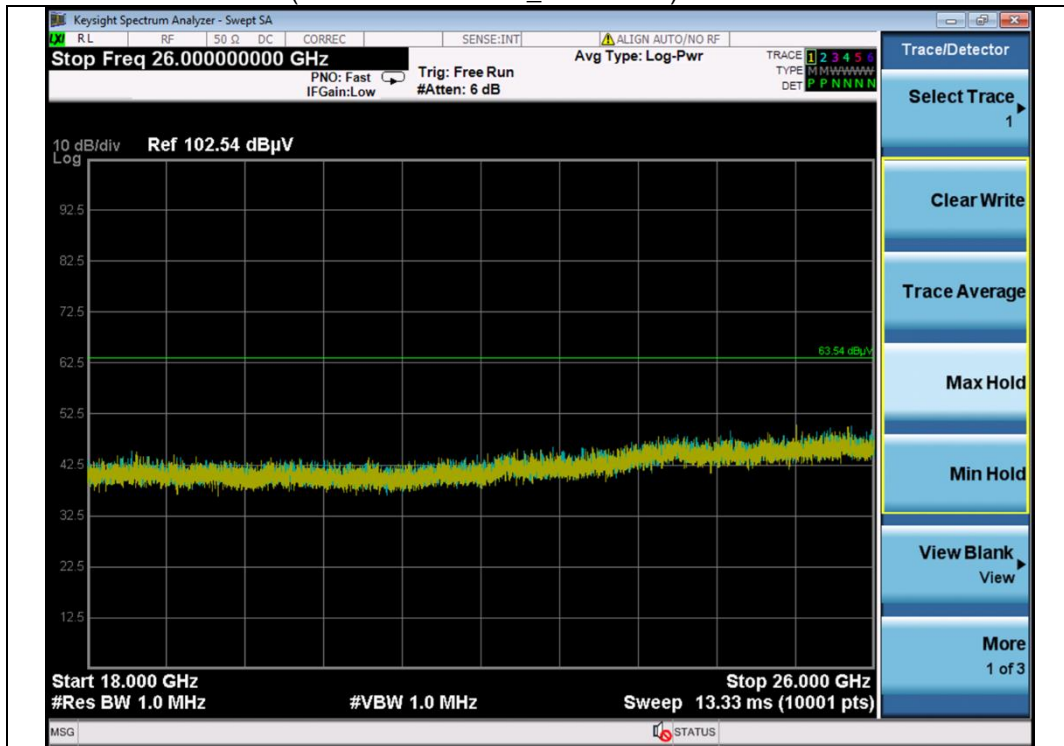


NOTE 1 : Measured distance : 1 m
NOTE 2 : Limit : Peak : 83.54 dBuV/m, Average : 63.54 dBuV/m

4.3.7.6 Measurement data_Conducted Spurious Emissions

GFSK_2 407 MHz(reference)

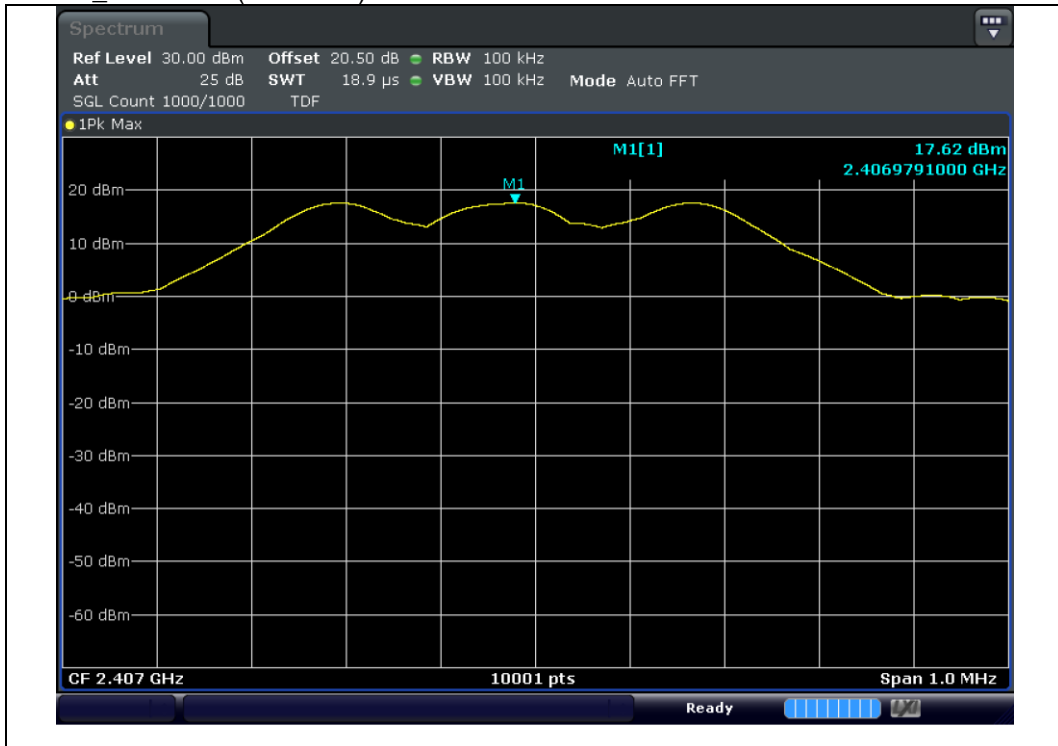


GFSK_2 407 MHz(Bandedge_Single)

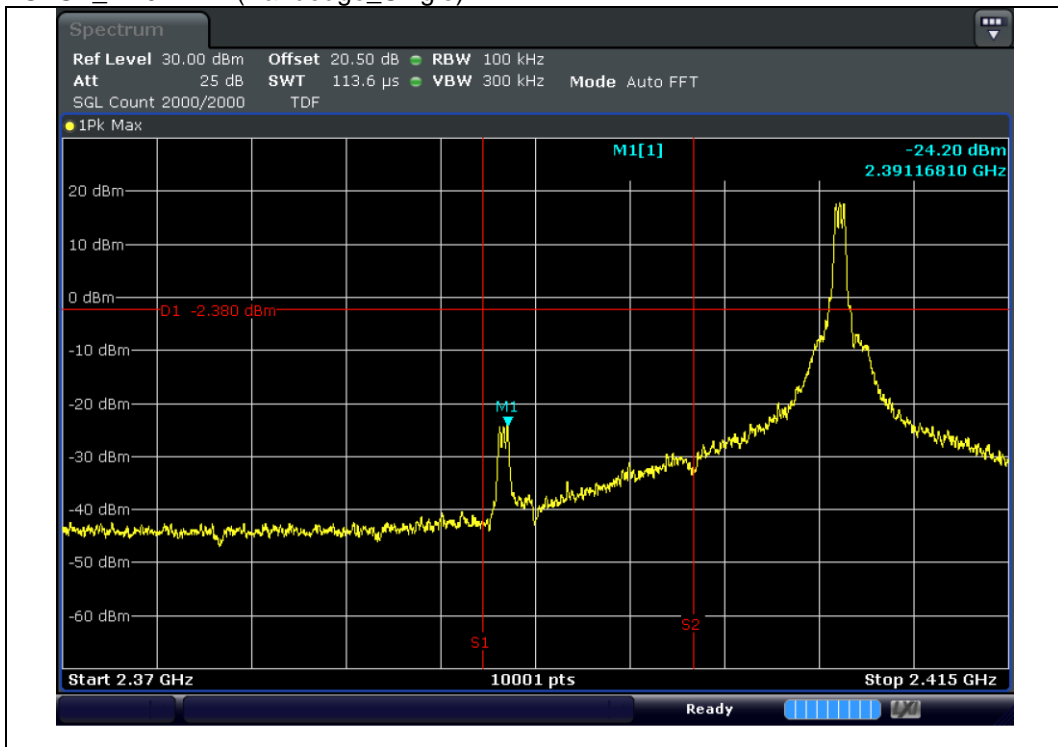


NOTE: F1 : 2 390 MHz, F2 : 2 400 MHz

GFSK_2 407 MHz(Bandedge_Hopping)

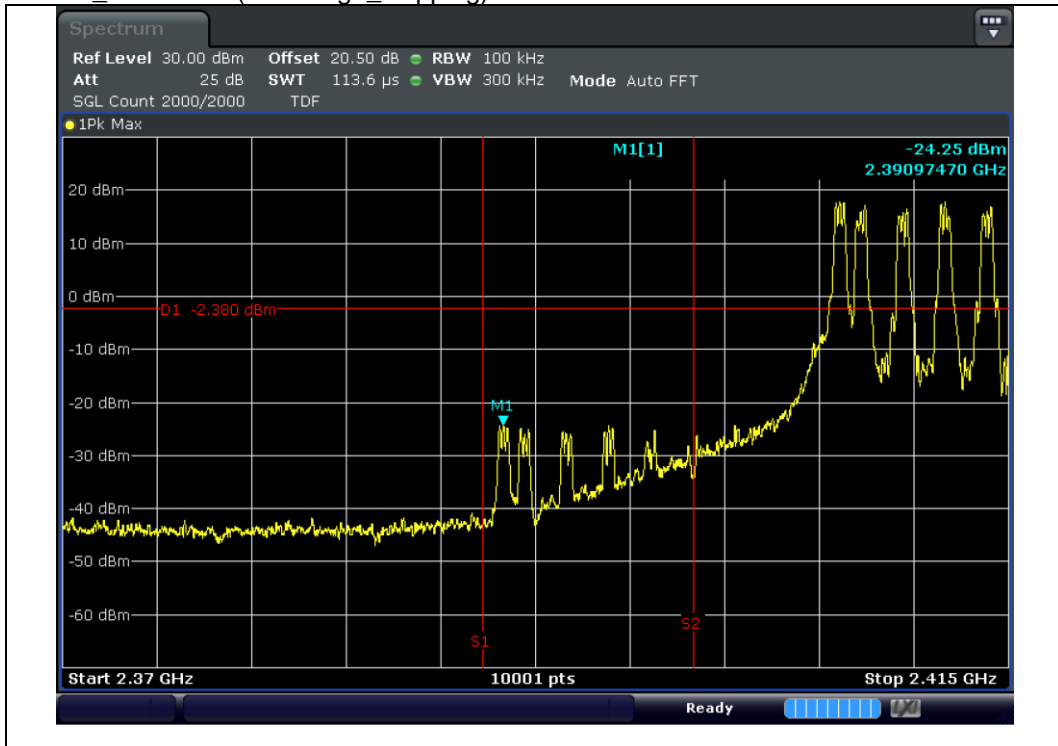


NOTE: F1 : 2 390 MHz, F2 : 2 400 MHz


GFSK_2 407 MHz(Spurious)

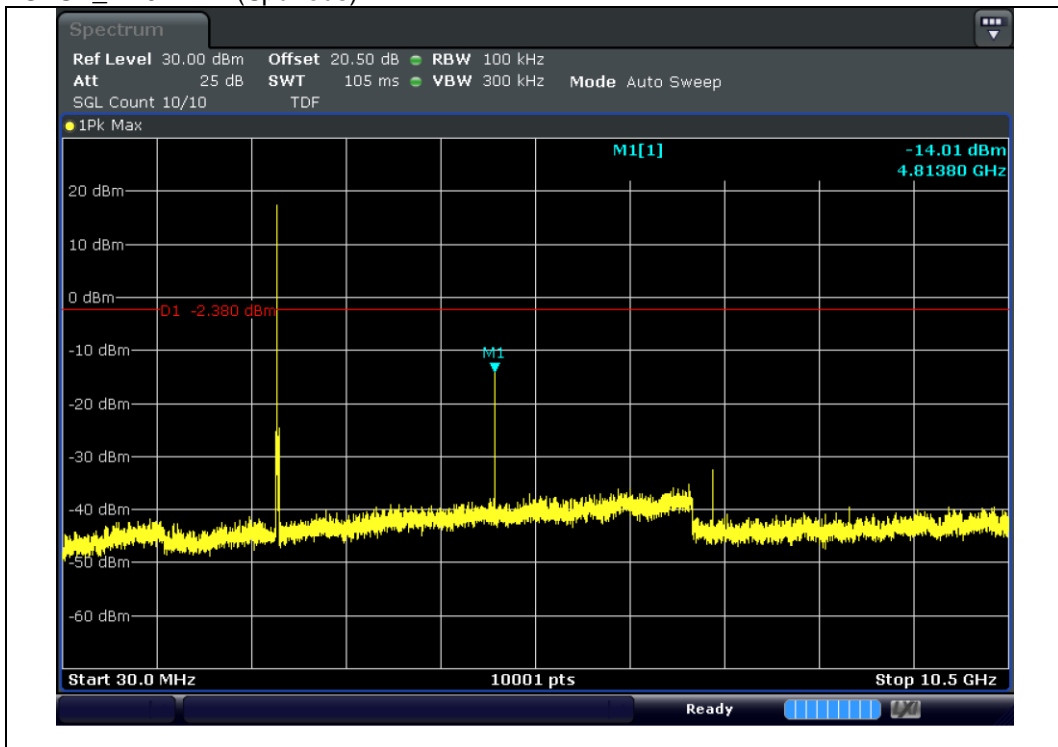


GFSK_2 441.5 MHz(reference)

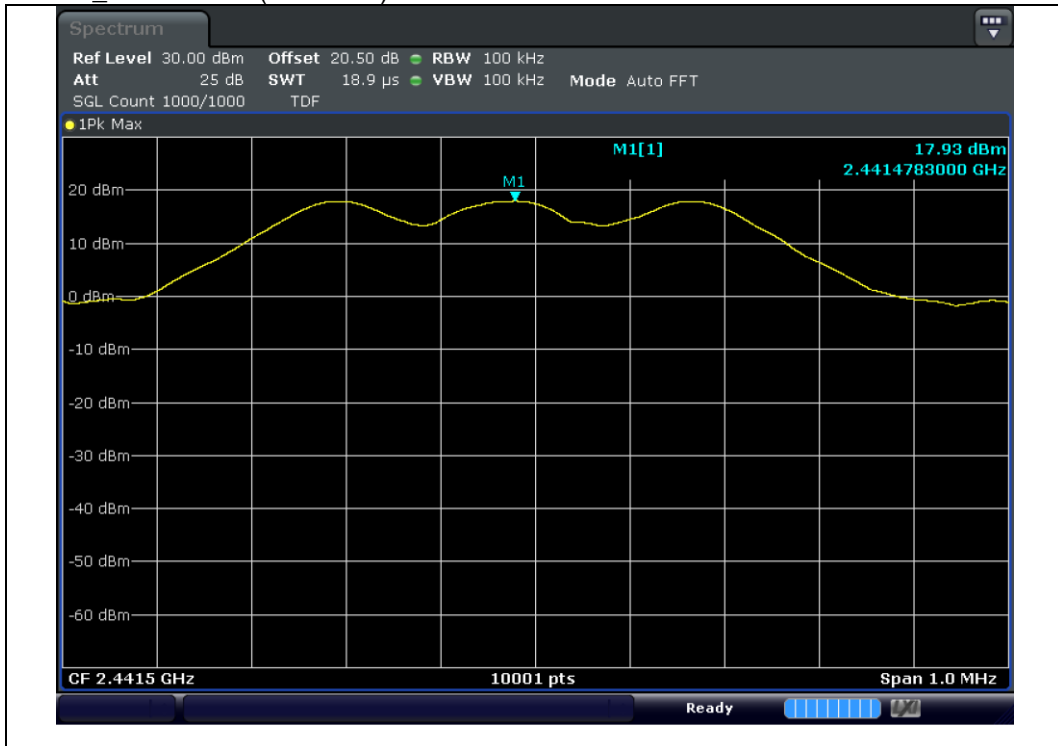


GFSK_2 441.5 MHz(Spurious)

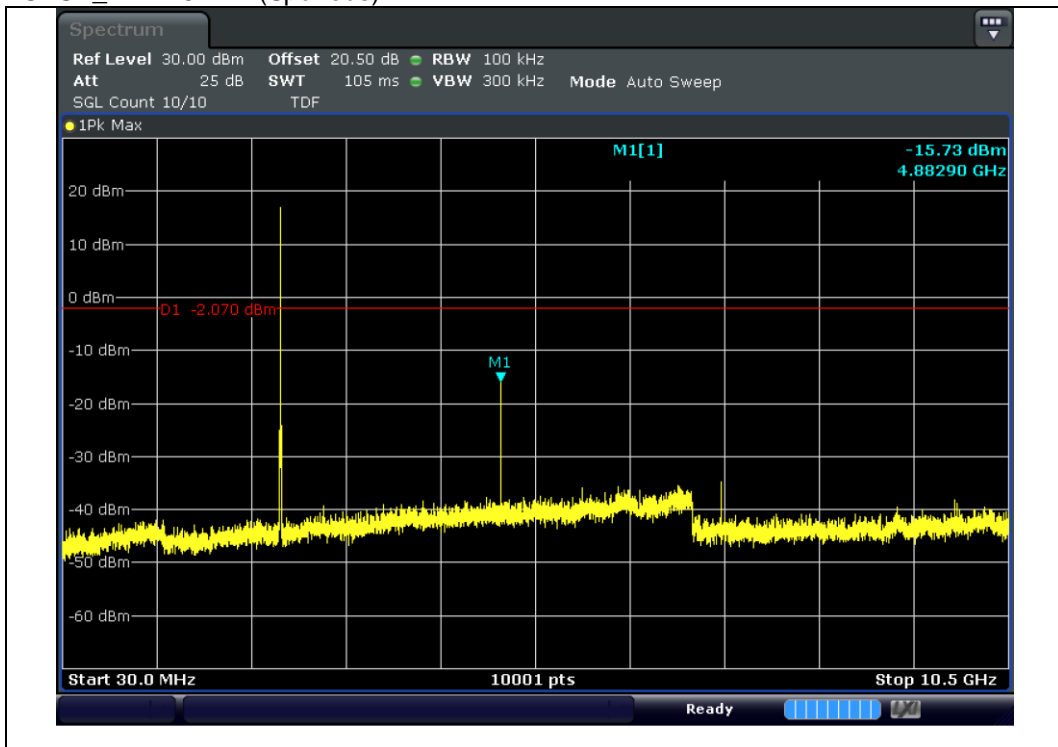

GFSK_2 476 MHz(reference)

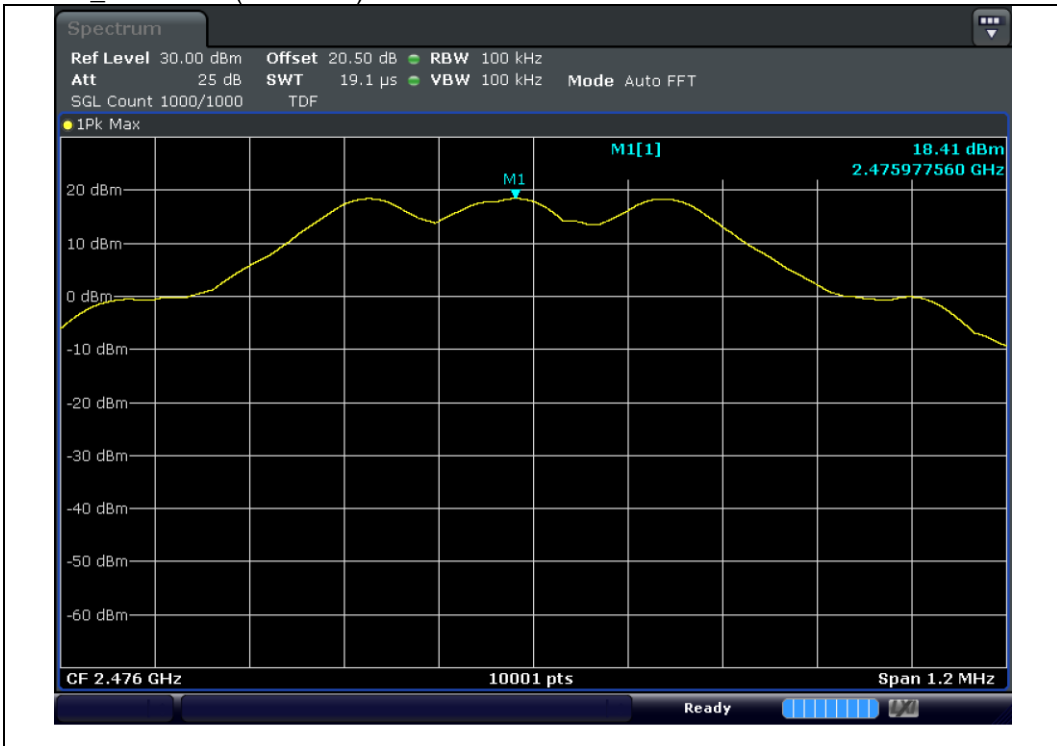


GFSK_2 476 MHz(Bandedge_Single)

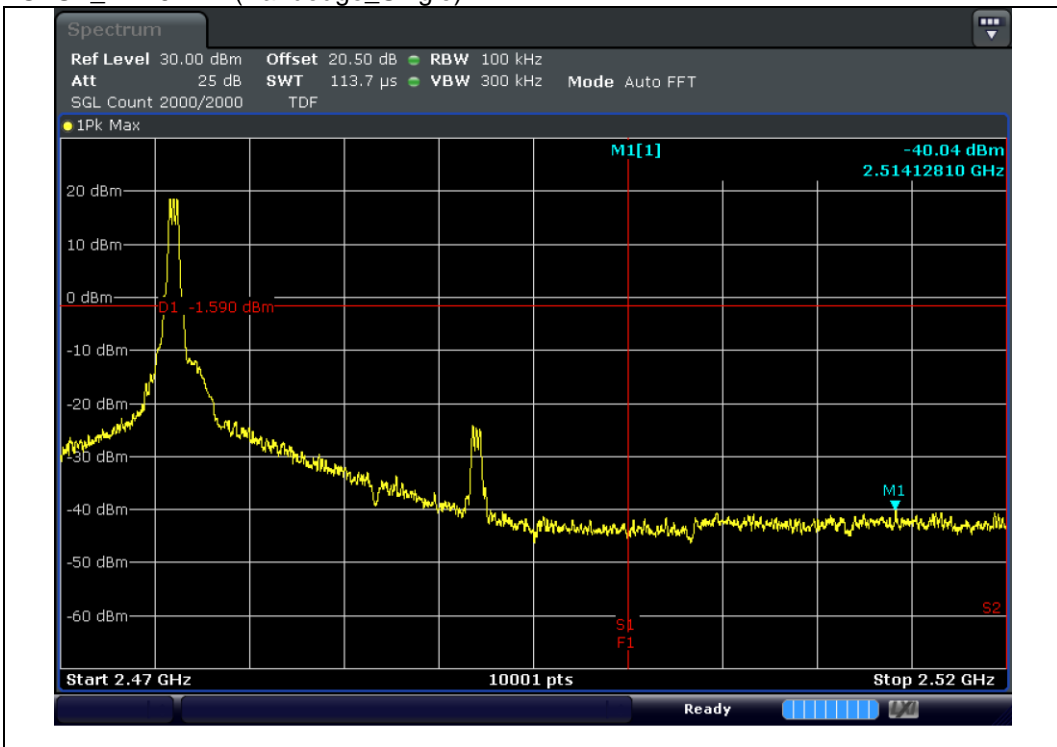


NOTE: F1 : 2 500 MHz

GFSK_2 476 MHz(Bandedge_Hopping)

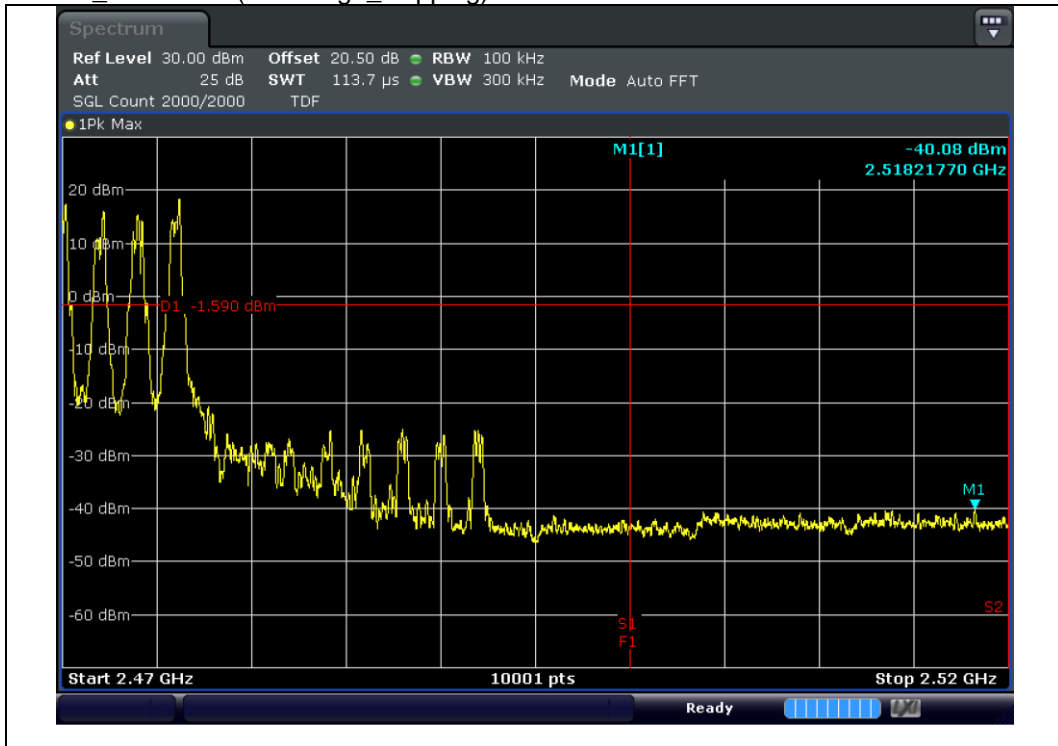


NOTE: F1 : 2 500 MHz

GFSK_2 476 MHz(Spurious)

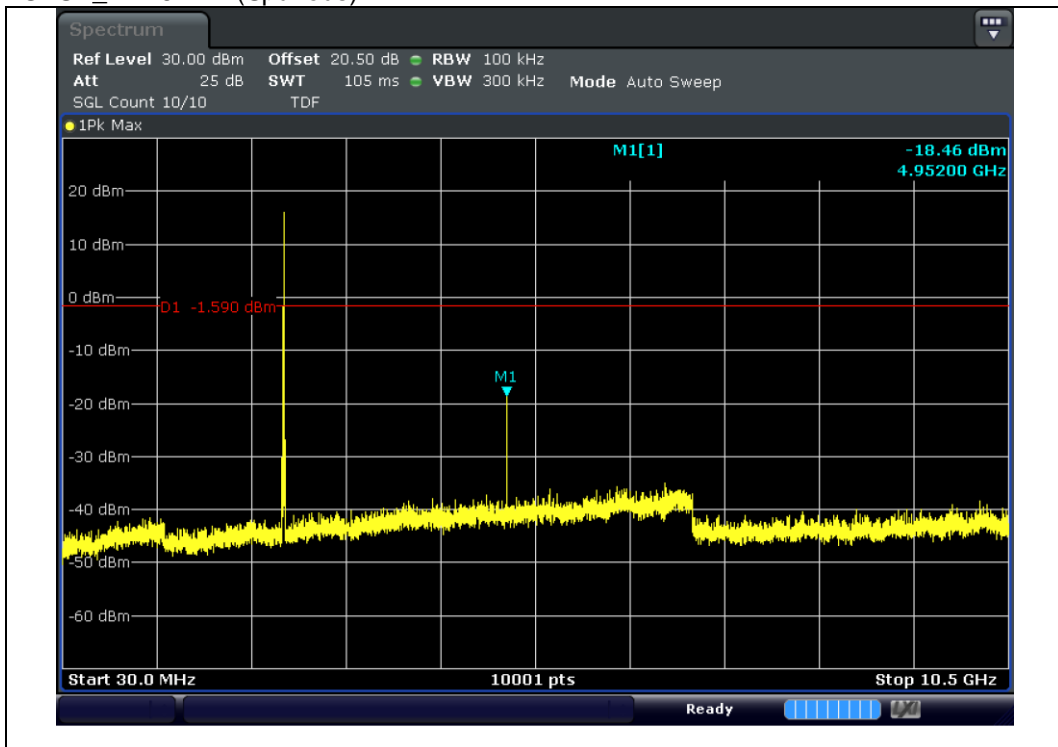


4.3.7.7 Measurement Plot_Dutycycle

on time

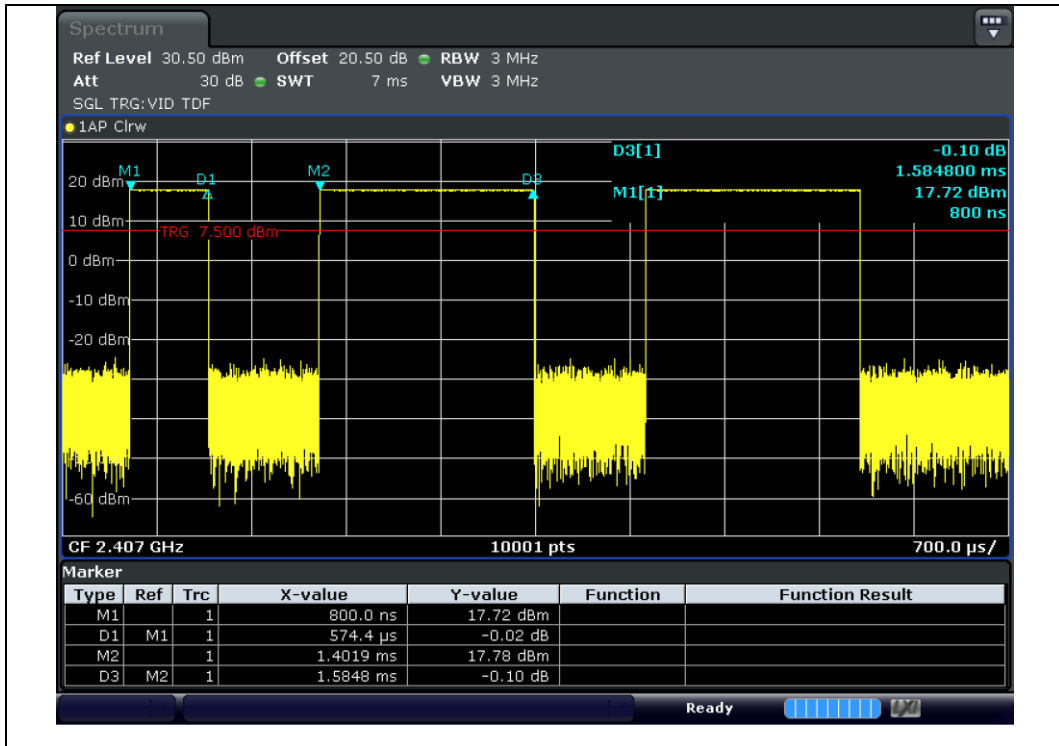

NOTE: on time : 0.57 ms + (1.5848 ms * 8) = 13.25 ms

Test mode : 8DPSK_2 441 MHz

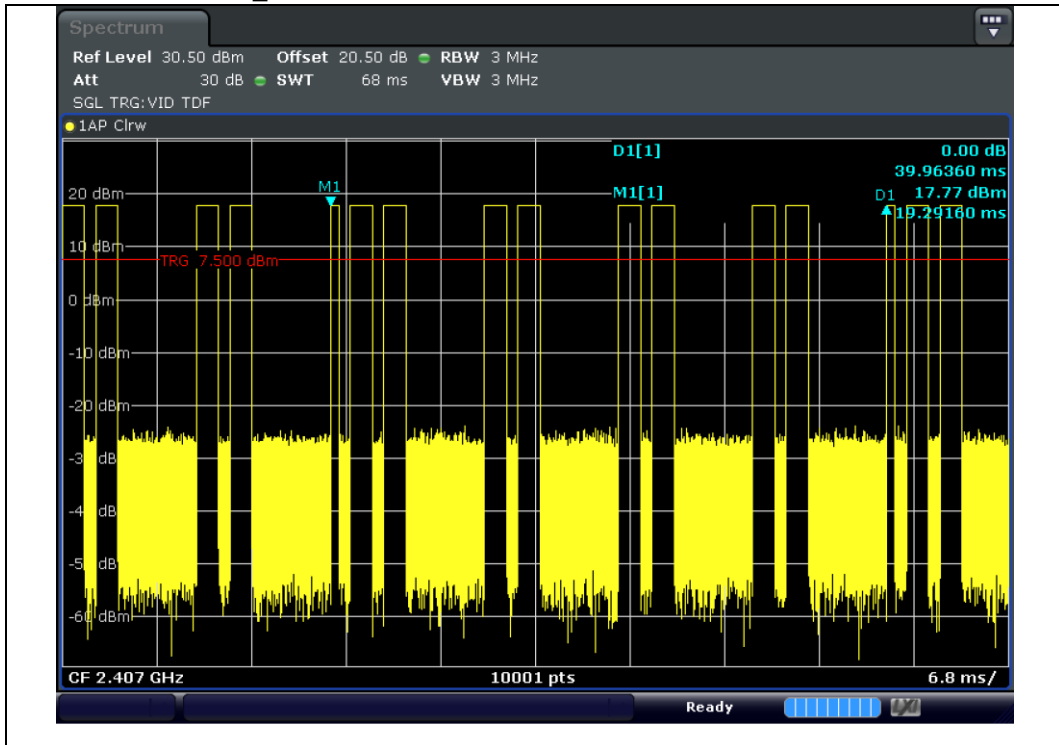

NOTE: Dwell time: on time*No. of hop
Dutycycle Factor : $20\log(\text{dwell time}/100) = 20\log((13.25*1)/100) = -17.56$

4.3.8 Conducted Emission

4.3.8.1 Regulation

According to §15.207(a) and RSS-GEN8.8 for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Qausi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

4.3.8.2 Measurement Procedure

1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5 m away from the side wall of the shielded room.

2) Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.

3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.

4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.

5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASPEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

4.3.8.3 Result

Not Applicable (This device gets power supply from vehicle battery. (DC 12 V)
Therefore this test item was not performed)

APPENDIX I

TEST EQUIPMENT USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

Equipment	Manufacturer	Model	Serial No.	Cal. Date (yy.mm.dd)	Next Cal.Date (yy.mm.dd)
FSV Signal Analyzer	ROHDE&SCHWARZ	FSV40	101010	2021-04-20	2022-04-20
Power Sensor	KEYSIGHT	U2022XA	MY55320008	2020-08-21	2021-08-21
DC Power Supply	AGILENT	E3632A	MY51160055	2021-04-21	2022-04-21
Digital MultiMeter	HP	34401A	US36025428	2021-01-13	2022-01-13
ATTENUATOR	INMET	26A-20	TR010	2020-10-12	2021-10-12
Signal Generator	ROHDE&SCHWARZ	SMB100A	178384	2020-10-13	2021-10-13
EMI Test Receiver	ROHDE&SCHWARZ	ESU40	100445	2021-09-10	2022-09-10
BiLog Antenna	Schwarzbeck	VULB9168	00821	2021-03-31	2023-03-31
Attenuator	JFW	50F-006	6 dB-3	2021-04-22	2022-04-22
Preamplifier	TSJ	MLA-10k01-b01-27	1870367	2021-04-21	2022-04-21
Antenna Mast(10 m)	TOKIN	5977	-	-	-
Antenna Mast(10 m)	Innco	MA4640-XPET-0800	578	-	-
Controller(10 m)	TOKIN	5909L	141909L-1	-	-
Controller(10 m)	Innco	CO3000	40040217	-	-
Turn Table(10 m)	TOKIN	5983-1.5	-	-	-
10 m Semi-Anechoic Chamber	SY CORPORATION	-	-	-	-
Active Loop H-Field	ETS	6502	00150598	2021-05-25	2023-05-25
Double Ridege Horn Antenna	ETS	3117	00168719	2020-08-23	2022-08-23
PREAMPLIFIER	Agilent	8449B	3008A02110	2021-01-11	2022-01-11
High pass filter	Wainwright Instruments GmbH	WHKX10-2580-3000-18000-60SS	14	2021-01-11	2022-01-11