

FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Mobi Technologies, Inc.

5913 Blackwelder Street, Culver City, CA 90232, USA

FCC ID: Y4N70055T

Report Type: Original Report	Product Type: Digital Video Baby Monitor
Test Engineer: <u>Alvin Huang</u>	<i>Alvin Huang</i>
Report Number: <u>RSZ10122416</u>	
Report Date: <u>2011-02-18</u>	
Reviewed By: <u>EMC Engineer</u>	<i>Merry Zhao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION6

 EQUIPMENT MODIFICATIONS6

 EUT EXERCISE SOFTWARE6

 EXTERNAL I/O CABLE.....6

 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....8

 STANDARD APPLICABLE8

 TEST DATA8

FCC §15.203 – ANTENNA REQUIREMENT9

 APPLICABLE STANDARD9

 ANTENNA CONNECTOR CONSTRUCTION9

FCC §15.207(a) – AC LINE CONDUCTED EMISSIONS10

 APPLICABLE STANDARD10

 MEASUREMENT UNCERTAINTY10

 EUT SETUP.....10

 EMI TEST RECEIVER SETUP.....11

 TEST EQUIPMENT LIST AND DETAILS.....11

 TEST PROCEDURE11

 TEST RESULTS SUMMARY.....11

 TEST DATA11

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....14

 APPLICABLE STANDARD14

 MEASUREMENT UNCERTAINTY14

 EUT SETUP.....14

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP15

 TEST EQUIPMENT LIST AND DETAILS.....15

 TEST PROCEDURE15

 CORRECTED AMPLITUDE & MARGIN CALCULATION15

 TEST RESULTS SUMMARY.....16

 TEST DATA16

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST20

 APPLICABLE STANDARD20

 TEST EQUIPMENT LIST AND DETAILS.....20

 TEST PROCEDURE20

 TEST DATA20

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....23
APPLICABLE STANDARD23
TEST EQUIPMENT LIST AND DETAILS.....23
TEST PROCEDURE23
TEST DATA23

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST26
APPLICABLE STANDARD26
TEST EQUIPMENT LIST AND DETAILS.....26
TEST PROCEDURE26
TEST DATA26

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....28
APPLICABLE STANDARD28
TEST EQUIPMENT LIST AND DETAILS.....28
TEST PROCEDURE28
TEST DATA28

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT31
APPLICABLE STANDARD31
TEST EQUIPMENT LIST AND DETAILS.....31
TEST PROCEDURE31
TEST DATA31

FCC §15.247(d) - BAND EDGES TESTING34
APPLICABLE STANDARD34
TEST EQUIPMENT LIST AND DETAILS.....34
TEST PROCEDURE34
TEST DATA35

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Mobi Technologies, Inc.*'s product, model number: 70055T (FCC ID: Y4N70055T) or the "EUT" as referred to in this report is a *Digital video baby monitor*, which measures approximately: 8.3 cm (L) x 5.4 cm (W) x 13.0 cm (H), rated input voltage: DC 1.2V *4 AAA battery or DC 6.0 V adapter.

Adapter information:

Model: Y06FE-060-0800U;

Input: AC 100-240 V 50/60 Hz 0.2A;

Output: DC 6.0 V 800 mA

All measurement and test data in this report was gathered from production sample serial number: 1012246 (Assigned by BACL, Shenzhen). The EUT was received on 2010-12-24.

Objective

This Type approval report is prepared on behalf of *Mobi Technologies, Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with the Part of a system FCC ID: Y4N70055R

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode which was selected by manufacturer.

Equipment Modifications

No modification was made to the unit tested.


EUT Exercise Software

N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detachable DC Cable	1.9	Adapter	EUT

Block Diagram of Test Setup

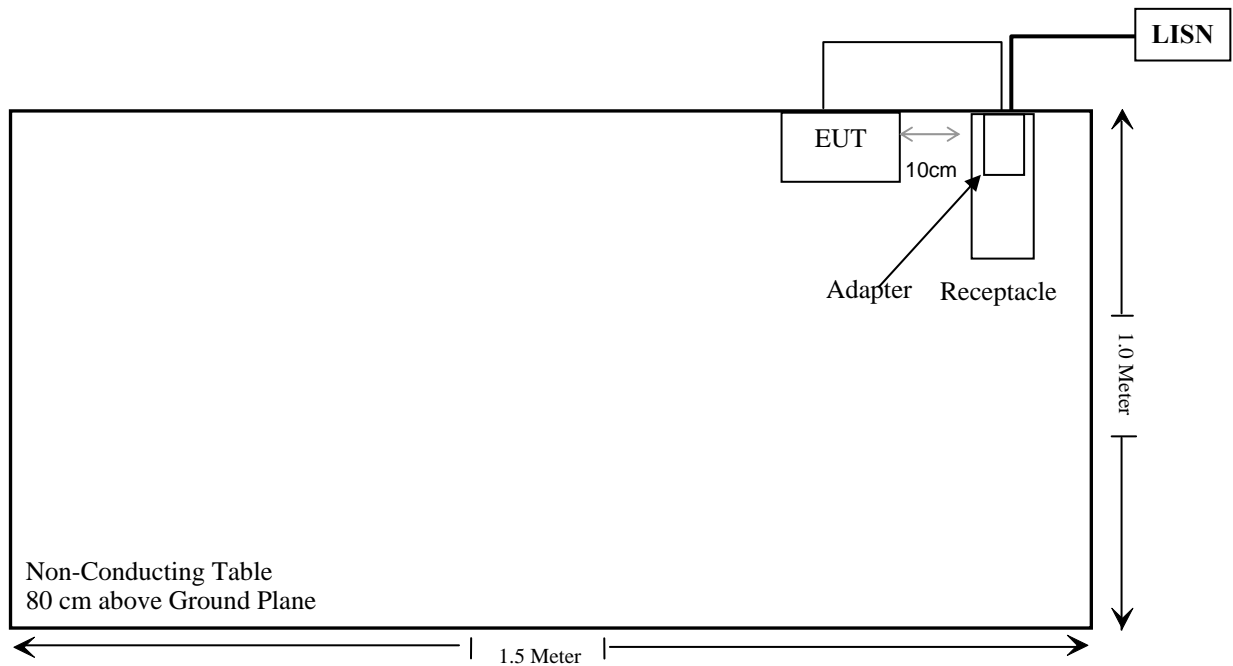

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Spurious Emissions	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of Hopping Channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to FCC subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mw/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally *numeric* gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input terminal: 16.42 (dBm)

Maximum peak output power at antenna input terminal: 43.85(mW)

Prediction distance: >20 (cm)

Predication frequency: 2471.625 (MHz)

Antenna Gain (typical): 1.6 (dBi)

Maximum Antenna Gain: 1.45 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.013 (mW/cm²)

MPE limit for general population exposure at prediction frequency: 1.0 (mW/cm²)

Result:

The predicted power density level at 20 cm is 0.013 mw/cm² which is below the uncontrolled exposure limit of 1.0 mw/cm², The EUT is used at least 20 cm away from user's body. It is determined as mobile equipment and complies with the MPE limit.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an internal antenna connect to RF board, which in accordance to section 15.203, the maximum gain is 1.6 dBi; please refer to the internal photos.

Result: Compliance.

FCC §15.207(a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

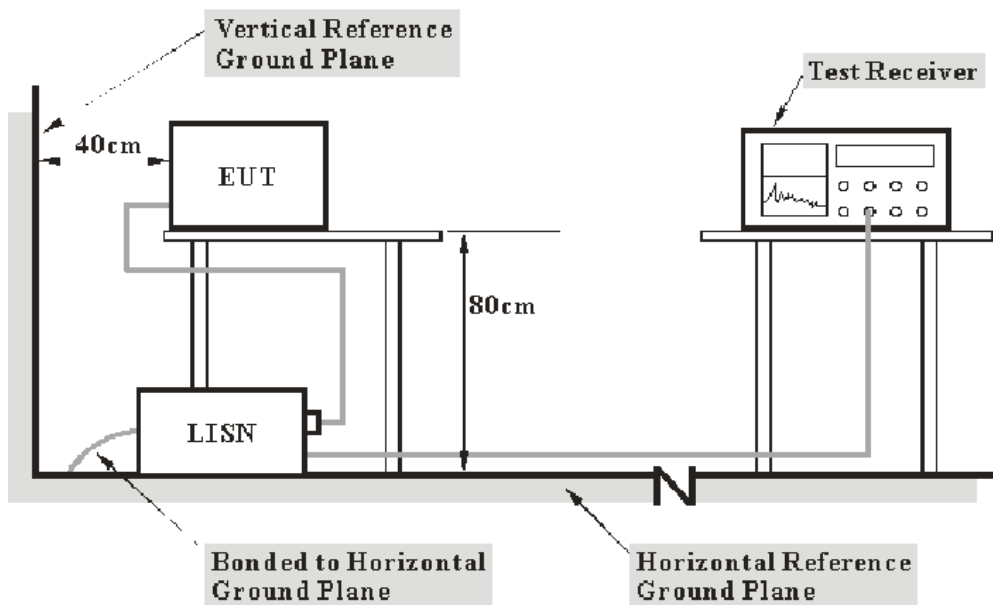

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2010-03-03	2011-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2010-03-09	2011-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

12.02 dB at 0.305 MHz in the Neutral conductor mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	101 kPa

The testing was performed by Alvin Huang on 2011-02-15.


Test Mode: Transmitting

AC 120 V/60 Hz, Line:

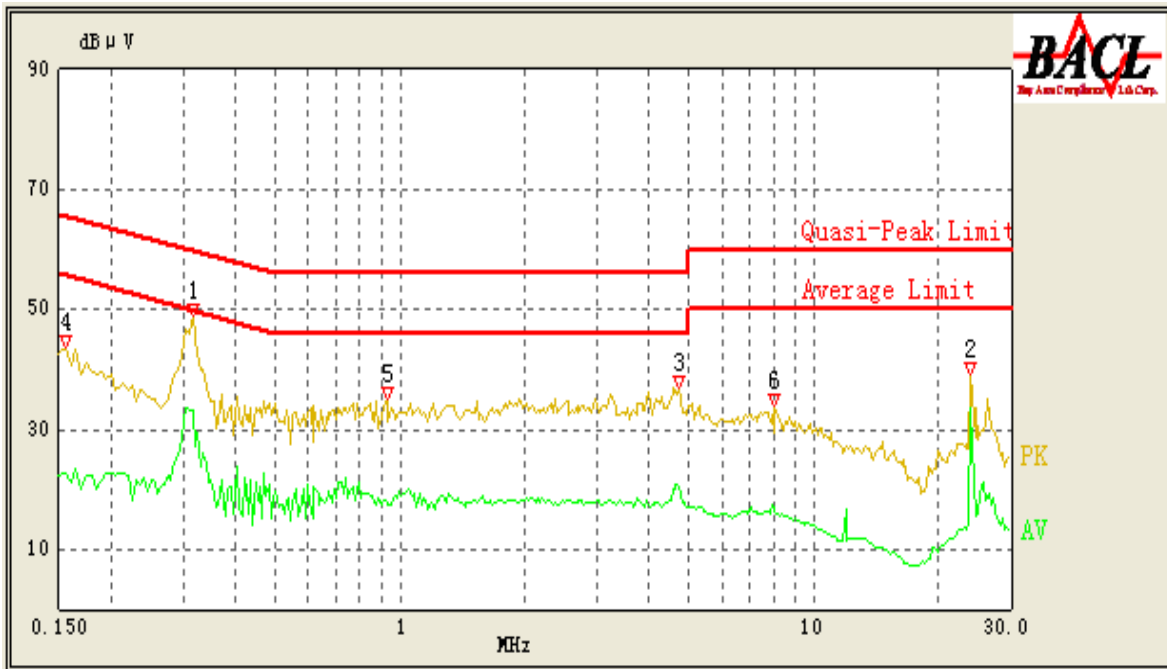

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Cord. Result (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave)
24.000	33.59	10.16	50.00	16.41	Ave
0.315	43.53	10.02	61.29	17.76	QP
0.315	33.09	10.02	51.29	18.20	Ave
24.000	37.12	10.16	60.00	22.88	QP
4.725	20.50	10.10	46.00	25.50	Ave
0.155	40.06	10.10	65.86	25.80	QP
0.930	17.76	10.11	46.00	28.24	Ave
0.930	27.17	10.11	56.00	28.83	QP
4.710	25.38	10.10	56.00	30.62	QP
0.155	22.83	10.10	55.86	33.03	Ave
8.045	16.30	10.10	50.00	33.70	Ave
8.050	22.88	10.10	60.00	37.12	QP

AC 120 V/ 60 Hz, Neutral:

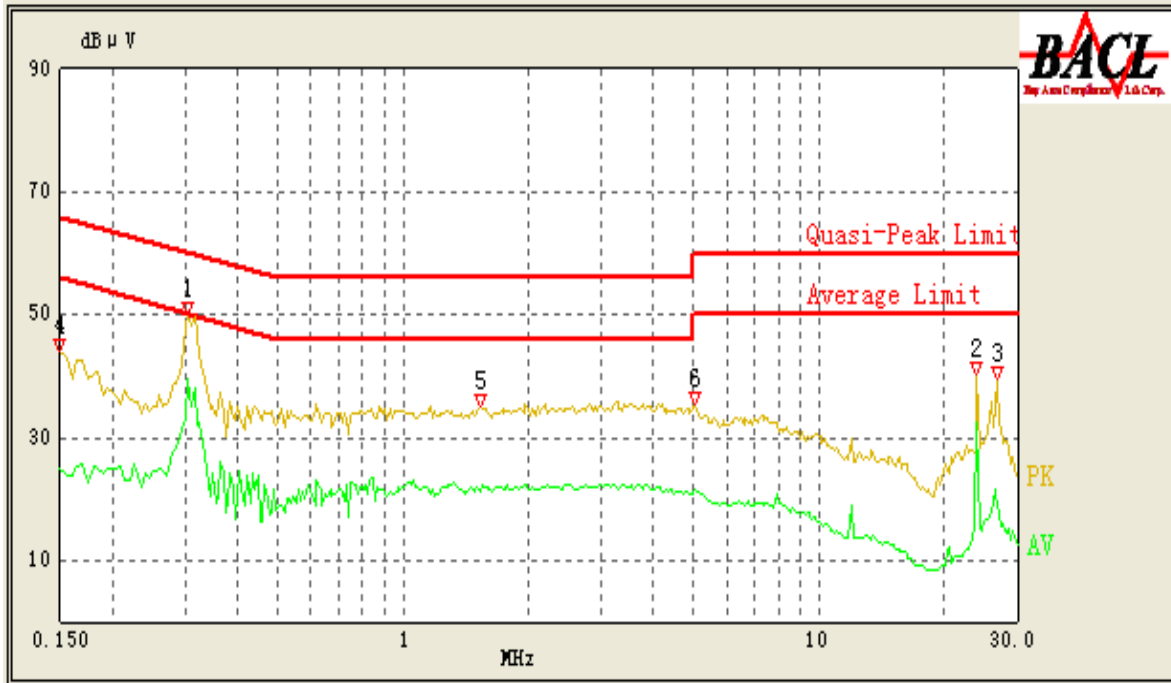

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Cord. Result (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave)
0.305	39.55	10.01	51.57	12.02	Ave
0.305	47.27	10.01	61.57	14.30	QP
24.000	32.28	10.16	50.00	17.72	Ave
24.000	36.31	10.16	60.00	23.69	QP
1.540	21.33	10.15	46.00	24.67	Ave
1.530	30.52	10.15	56.00	25.48	QP
0.150	38.88	10.10	66.00	27.12	QP
5.010	21.50	10.10	50.00	28.50	Ave
26.670	20.93	10.13	50.00	29.07	Ave
5.010	29.08	10.10	60.00	30.92	QP
0.150	25.06	10.10	56.00	30.94	Ave
26.760	23.59	10.13	60.00	36.41	QP

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

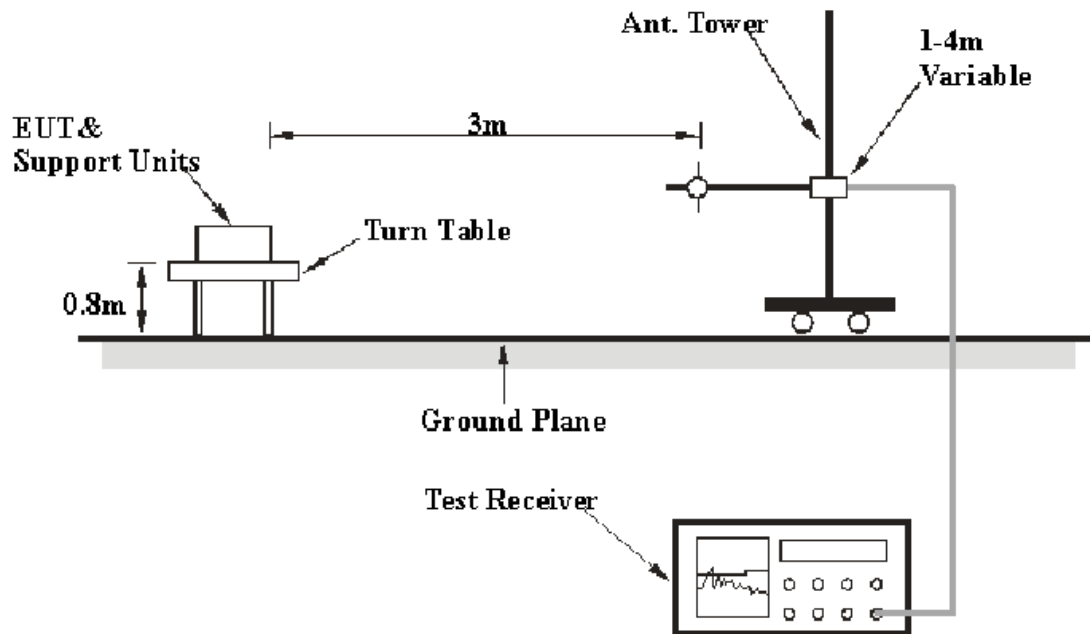

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2010-08-02	2011-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-24
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11
HP	Amplifier	2VA-213+	T-E27H	2010-03-08	2011-03-08
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-05-05	2011-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

4.31 dB at 7232.625 MHz in the Vertical polarization

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	101 kPa

** The testing was performed by Alvin Huang on 2011-02-15.*

Test mode: Transmitting

Below 1 GHz: (worse case)

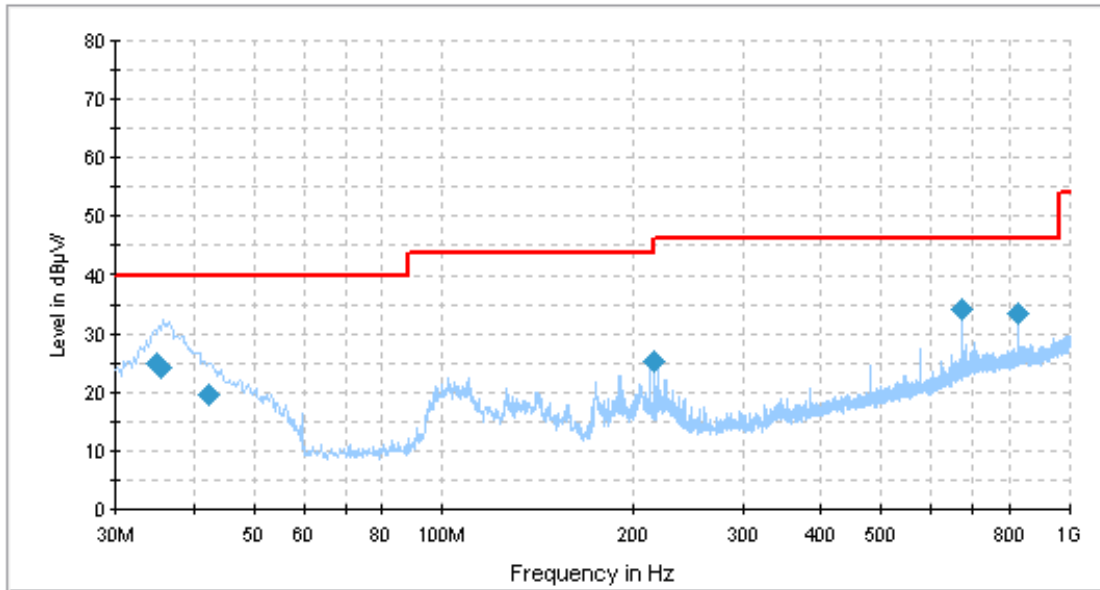

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
671.987250	34.4	102.0	V	25.0	-4.0	46.0	11.6
824.277500	33.7	261.0	H	30.0	-1.5	46.0	12.3
34.894000	25.0	103.0	V	225.0	-8.7	40.0	15.0
35.387000	24.4	104.0	V	277.0	-9.1	40.0	15.6
215.978750	25.3	102.0	V	328.0	-14.1	43.5	18.2
42.214250	19.6	105.0	V	73.0	-13.5	40.0	20.4

Above 1 GHz:

Indicated		Detector (PK/ Ave)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209			
Frequency (MHz)	S.A. Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel, 2410.875 MHz												
7232.625	54.13	PK	140	1.23	V	37.0	5.2	26.64	69.69	74	4.31	harmonic
4821.750	54.15	PK	99	1.10	V	35.0	4.3	26.81	66.64	74	7.36	harmonic
7232.625	51.30	PK	125	1.87	H	36.5	5.2	26.64	66.36	74	7.64	harmonic
4821.750	51.10	PK	45	2.18	H	36.3	4.3	26.81	64.89	74	9.11	harmonic
Middle Channel, 2437.875 MHz												
7313.625	53.22	PK	124	1.25	V	37.0	5.2	26.64	68.78	74	5.22	harmonic
7313.625	51.35	PK	0	2.15	H	36.4	5.2	26.64	66.31	74	7.69	harmonic
4875.750	49.86	PK	163	2.27	V	35.0	4.3	26.78	62.38	74	11.62	harmonic
4875.750	48.24	PK	174	2.24	H	36.3	4.3	26.78	62.06	74	11.94	harmonic
High Channel, 2471.625 MHz												
7414.875	52.60	PK	217	1.60	H	36.4	5.2	26.86	67.34	74	6.66	harmonic
7414.875	51.60	PK	95	1.42	V	37.0	5.2	26.86	66.94	74	7.06	harmonic
4943.250	48.15	PK	120	1.25	V	35.0	4.4	26.75	60.80	74	13.20	harmonic
4943.250	46.70	PK	175	2.19	H	36.3	4.4	26.75	60.65	74	13.35	harmonic

Indicated		Detector (PK/Ave)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Duty Cycle Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Low Channel, 2410.875 MHz												
7232.625	54.13	Ave	140	1.23	V	37.0	5.2	26.64	-25	44.69	54	9.31
4821.750	54.15	Ave	99	1.10	V	35.0	4.3	26.81	-25	41.64	54	12.36
7232.625	51.30	Ave	125	1.87	H	36.5	5.2	26.64	-25	41.36	54	12.64
4821.750	51.10	Ave	45	2.18	H	36.3	4.3	26.81	-25	39.89	54	14.11
Middle Channel, 2437.875 MHz												
7313.625	53.22	Ave	124	1.25	V	37.0	5.2	26.64	-25	43.78	54	10.22
7313.625	51.35	Ave	0	2.15	H	36.4	5.2	26.64	-25	41.31	54	12.69
4875.750	49.86	Ave	163	2.27	V	35.0	4.3	26.78	-25	37.38	54	16.62
4875.750	48.24	Ave	174	2.24	H	36.3	4.3	26.78	-25	37.06	54	16.94
High Channel, 2471.625 MHz												
7414.875	52.60	Ave	280	1.71	V	36.4	5.2	26.86	-25	42.34	54	11.66
7414.875	51.60	Ave	50	1.79	V	37.0	5.2	26.86	-25	41.94	54	12.06
4943.250	48.15	Ave	149	1.70	H	35.0	4.4	26.75	-25	35.80	54	18.20
4943.250	46.70	Ave	0	2.51	H	36.3	4.4	26.75	-25	35.65	54	18.35

Note: Correction Data = Reading + Correction Factor + Duty cycle Correction Factor

Duty Cycle Correction Factor = $20 \log(\text{dwell time}/100\text{ms}) = 20 \log(5.6/100\text{ms}) = -25.0 \text{ dB}$

Spurious Emissions in the Restrict Bands

Indicated		Detector (PK/Ave)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247\15.209\15.205			
Frequency (MHz)	S.A. Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
2483.5	28.30	PK	280	1.71	V	33.9	3.18	0	65.38	74	8.62	spurious
2483.5	23.16	PK	0	2.51	H	33.9	3.18	0	60.24	74	13.76	spurious
2390.0	21.38	PK	50	1.79	V	33.9	3.03	0	58.31	74	15.69	spurious
2390.0	20.42	PK	149	1.70	H	33.9	3.03	0	57.35	74	16.65	spurious

Indicated		Detector (PK/Ave)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	Receiver Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Duty Cycle Ffactor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2483.5	28.30	Ave	280	1.71	V	33.9	3.18	0	-25	40.38	54	13.62
2483.5	23.16	Ave	0	2.51	H	33.9	3.18	0	-25	35.24	54	18.76
2390.0	21.38	Ave	50	1.79	V	33.9	3.03	0	-25	33.31	54	20.69
2390.0	20.42	Ave	149	1.70	H	33.9	3.03	0	-25	32.35	54	21.65

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Alvin Huang on 2011-01-16.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2410.875	3.440	2.427	Pass
Adjacency Channel	2414.250			
Mid Channel	2437.875	3.360	2.240	Pass
Adjacency Channel	2441.250			
High Channel	2471.625	3.344	2.427	Pass
Adjacency Channel	2468.250			


Please refer to the following plots.

Low Channel

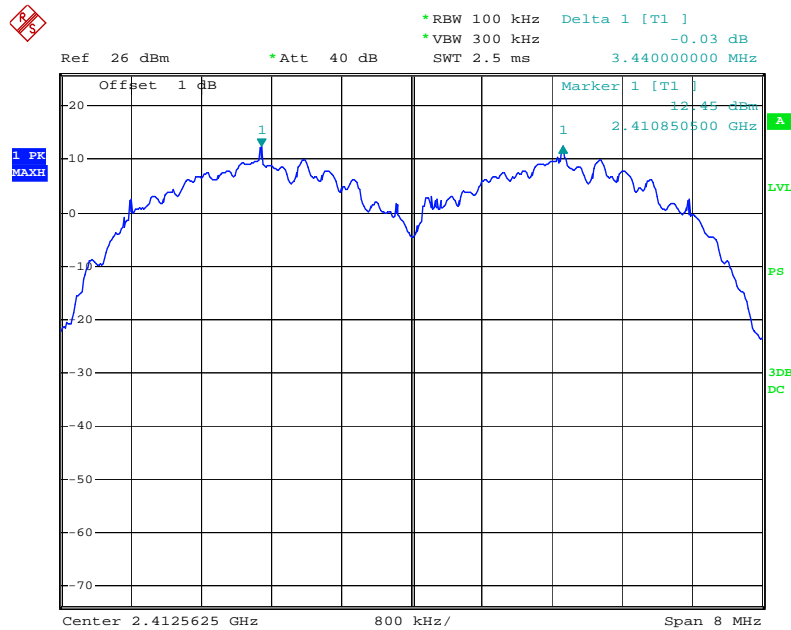


Date: 16.JAN.2011 15:27:50

Middle Channel

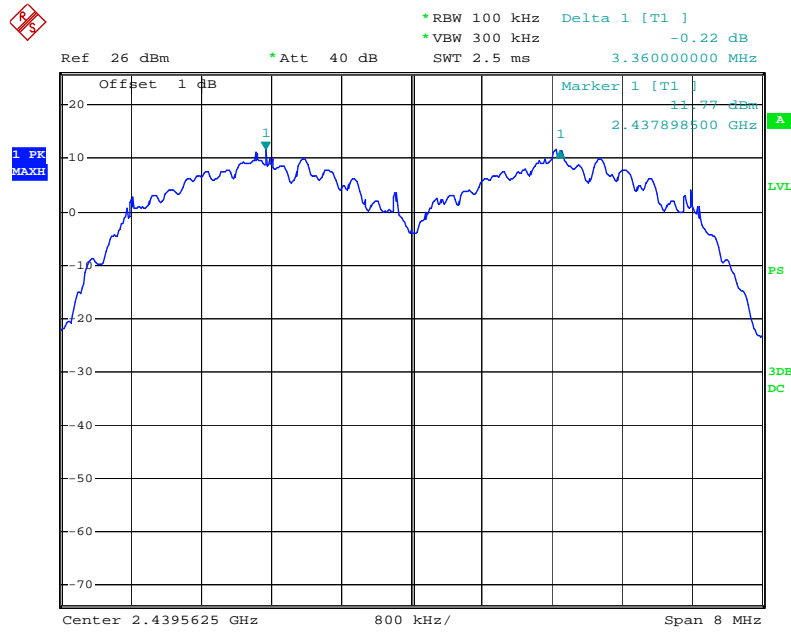

Date: 16.JAN.2011 15:30:07

High Channel

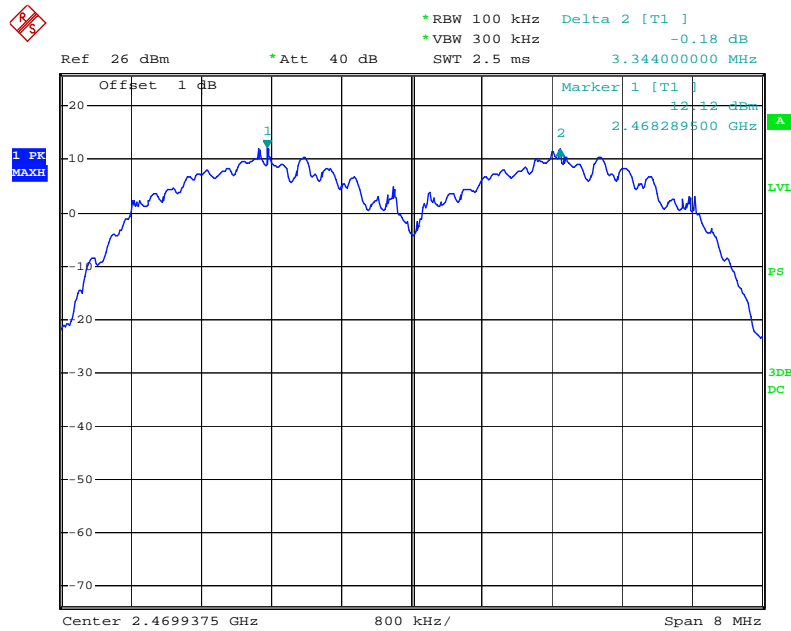

Date: 16.JAN.2011 15:32:05

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Alvin Huang on 2011-01-16.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2410.875	3.64
Middle	2437.875	3.61
High	2471.625	3.64


Please refer to the following plots.

Low Channel

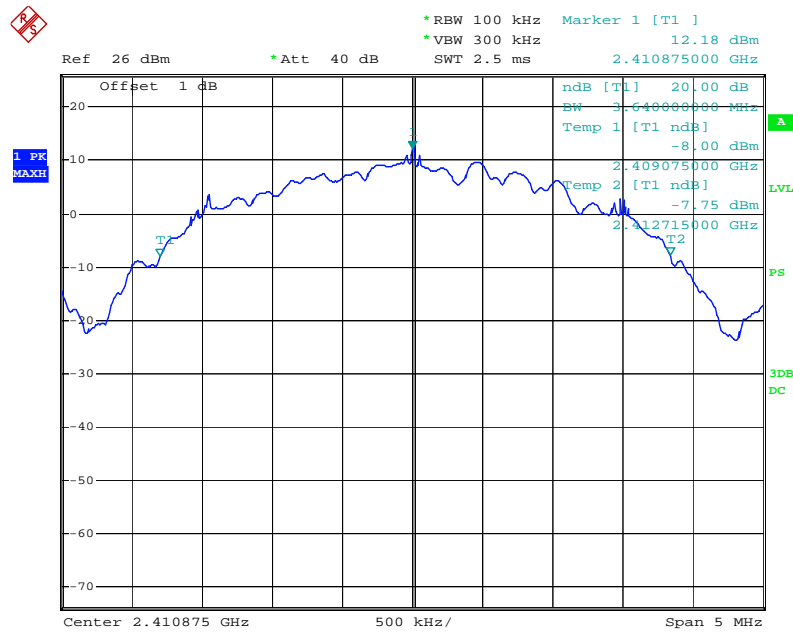


Date: 16.JAN.2011 15:25:10

Middle Channel

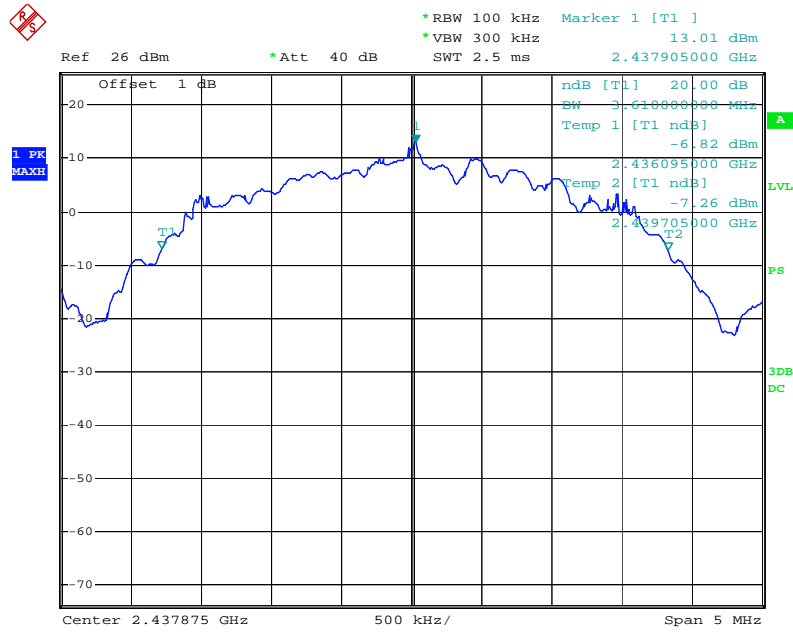

Date: 16.JAN.2011 15:15:12

High Channel

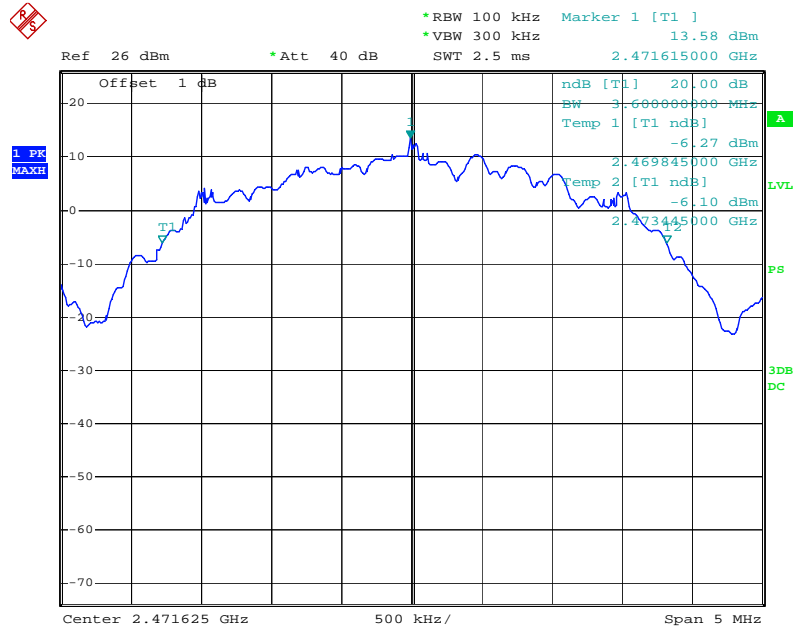

Date: 16.JAN.2011 15:16:44

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

The testing was performed by Alvin Huang on 2011-01-16.


Test Mode: Transmitting

Test Result: Compliance.

Please refer to following tables and plots

Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
2400~2483.5	19	>15

Number of Hopping Channels

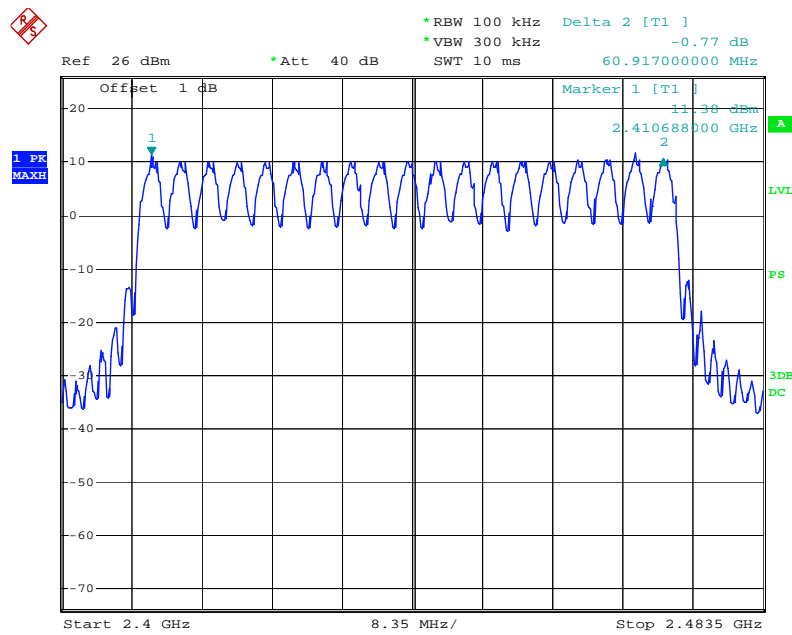

Date: 16.JAN.2011 15:22:36

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*314.5/2/18*(0.4S*18)

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Alvin Huang on 2011-02-18.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	5.6076	0.3527	0.4	Pass
Middle	5.6075	0.3527	0.4	Pass
High	5.6275	0.3540	0.4	Pass
<i>Note: Dwell time = Pulse time*314.5/2/18*(0.4S*18)</i>				


Please refer to the following plots.

Low Channel

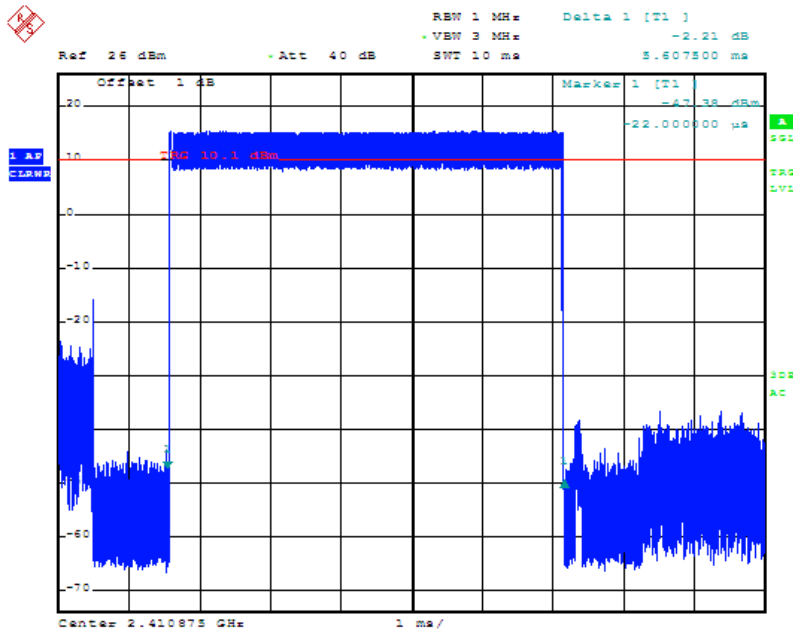


Date: 18.FEB.2011 18:36:56

Middle Channel

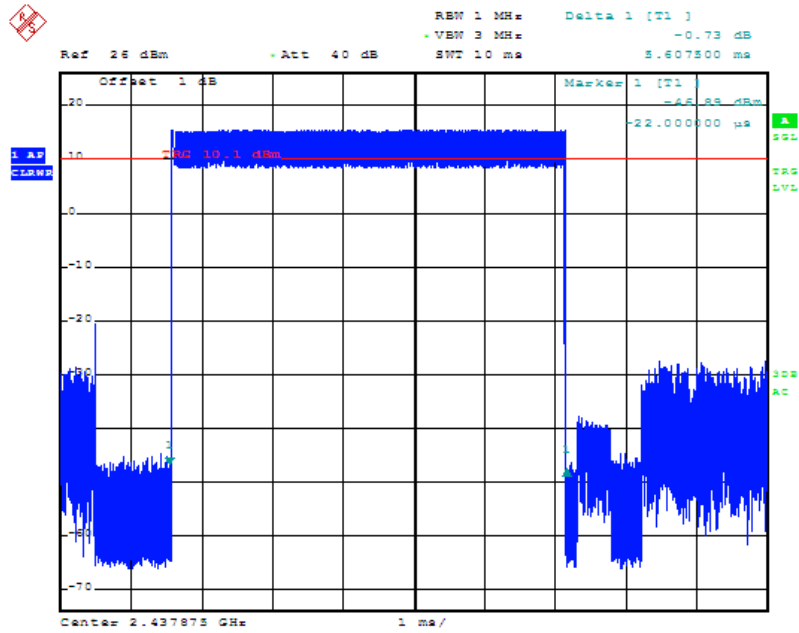

Date: 18.FEB.2011 18:35:59

High Channel

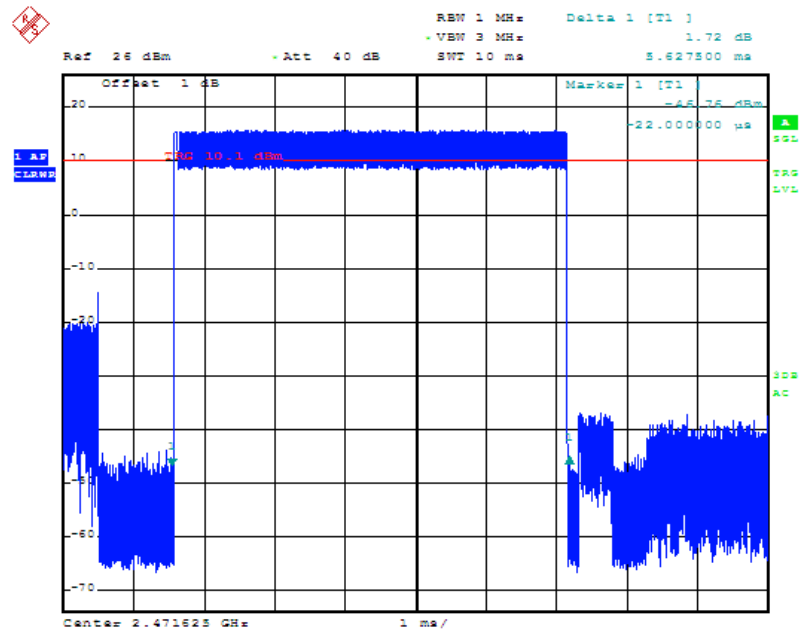

Date: 18.FEB.2011 18:37:37

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* *The testing was performed by Alvin Huang on 2011-01-16.*


Test Result: Compliance.

Middle Channel

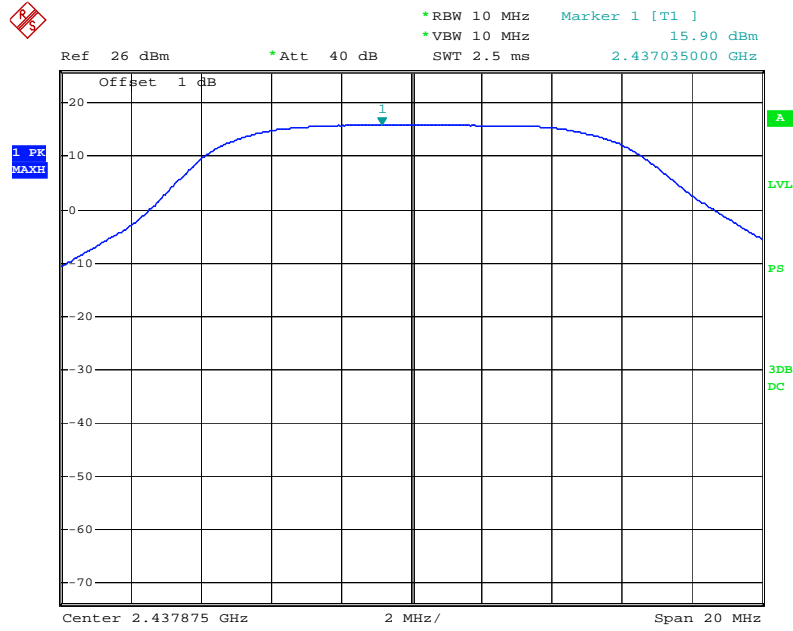

Date: 16.JAN.2011 15:11:36

High Channel

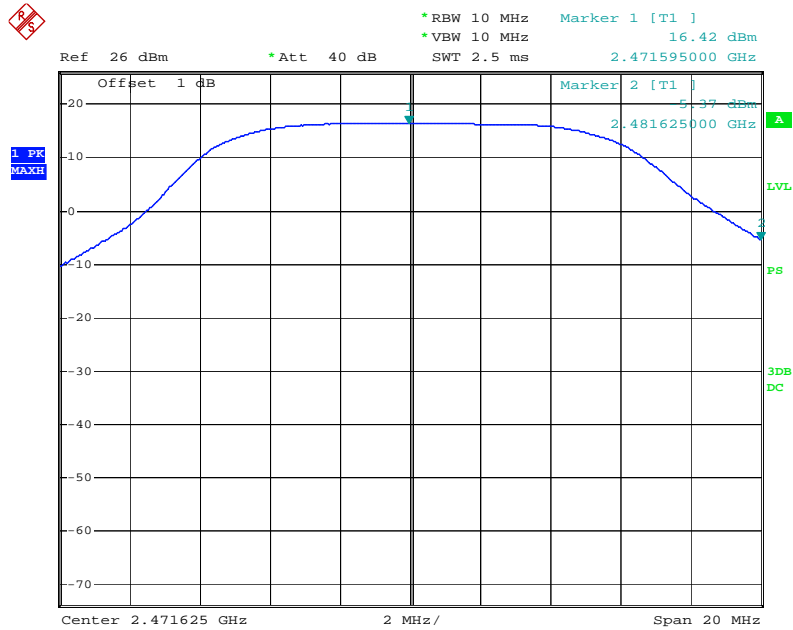

Date: 16.JAN.2011 15:18:43

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1 MHz, VBW=3 MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

**The testing was performed by Alvin Huang on 2011-01-16*


Test Result: Compliance

Please refer to the following table and plots.

Test Mode: Transmitting


Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2398.90000	45.65	>20
2483.63625	47.20	>20

Band Edge: Left Side

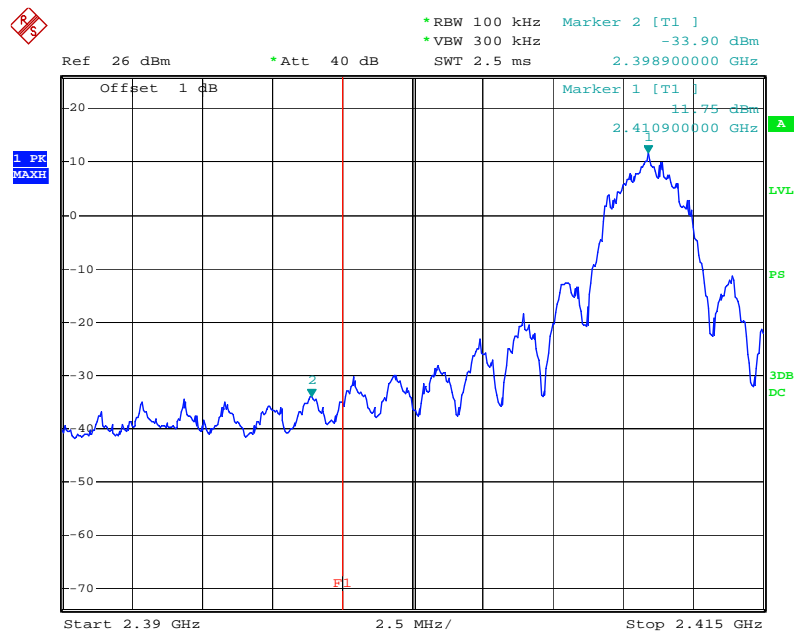

Date: 16.JAN.2011 15:09:31

Band Edge: Right Side

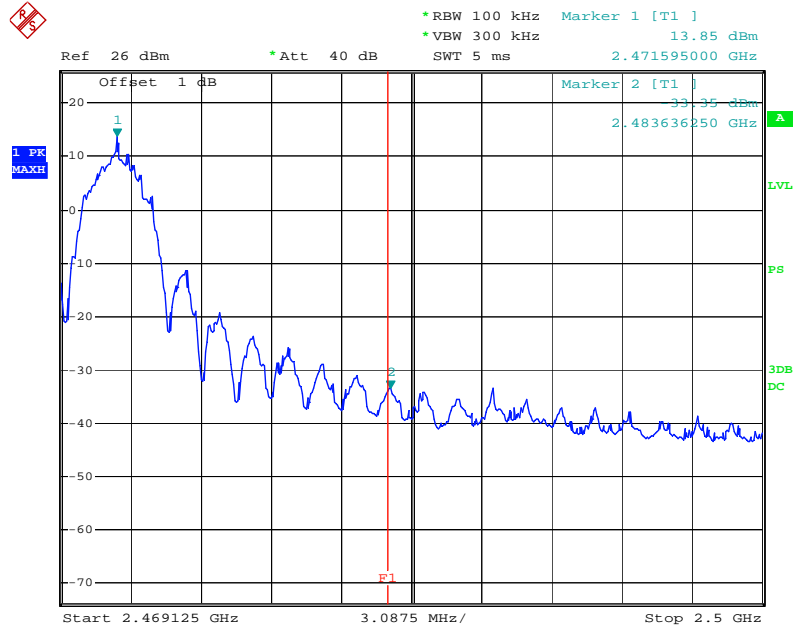

Date: 16.JAN.2011 15:17:53

***** END OF REPORT *****