



FCC PART 22, 74, 80 and 90

## TEST REPORT

For

### Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, 518057 China

**FCC ID: YAMPD50XIVHF**

|  |   |
|--|---|
| <b>Report Type:</b><br>Original Report | <b>Product Type:</b><br>Digital Portable Radio  |
| <b>Report Number:</b> RDG171220007-00A |   |
| <b>Report Date:</b> 2018-01-11         |   |
| <b>Reviewed By:</b>                    | Jerry Zhang<br>EMC Manager  |
| <b>Prepared By:</b>                    | Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industry Area,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>GENERAL INFORMATION.....</b>  | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....  | 4         |
| OBJECTIVE.....   | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....   | 4         |
| TEST METHODOLOGY.....  | 4         |
| MEASUREMENT UNCERTAINTY.....   | 5         |
| TEST FACILITY.....   | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>  | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION.....   | 6         |
| EUT EXERCISE SOFTWARE.....   | 6         |
| SPECIAL ACCESSORIES.....   | 6         |
| EQUIPMENT MODIFICATIONS.....   | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS.....  | 6         |
| BLOCK DIAGRAM OF TEST SETUP.....   | 7         |
| <b>SUMMARY OF TEST RESULTS.....</b>  | <b>8</b>  |
| <b>TEST EQUIPMENT LIST.....</b>  | <b>9</b>  |
| <b>FCC §1.1310 &amp; §2.1093 - RF EXPOSURE.....</b>  | <b>10</b> |
| APPLICABLE STANDARD.....   | 10        |
| TEST RESULT.....   | 10        |
| <b>FCC §2.1046 &amp; § 22.727 &amp; §74.461 &amp; §80.215&amp; §90.205 - RF OUTPUT POWER.....</b>  | <b>11</b> |
| APPLICABLE STANDARD.....   | 11        |
| TEST PROCEDURE.....  | 11        |
| TEST DATA.....   | 11        |
| <b>FCC §2.1047- MODULATION CHARACTERISTIC.....</b>   | <b>13</b> |
| APPLICABLE STANDARD.....   | 13        |
| TEST PROCEDURE.....  | 13        |
| TEST DATA.....   | 13        |
| <b>FCC §2.1049 &amp; §22.357 &amp; § 22.731 &amp; §74.462 &amp; 80.205&amp; §80.207&amp; §90.209 &amp; §90.210 – OCCUPIED BANDWIDTH &amp; EMISSION MASK.....</b> | <b>20</b> |
| APPLICABLE STANDARD.....   | 20        |
| TEST PROCEDURE.....  | 20        |
| TEST DATA.....   | 20        |
| <b>FCC §2.1051 &amp; §22.861 &amp; §74.462 &amp; § 80.211 &amp; §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</b>                                       | <b>40</b> |
| APPLICABLE STANDARD.....   | 40        |
| TEST PROCEDURE.....  | 40        |
| TEST DATA.....   | 40        |
| <b>FCC §2.1053 &amp; §22.861 &amp; §74.462 &amp; §80.211 &amp; §90.210 - RADIATED SPURIOUS EMISSIONS.....</b>  | <b>50</b> |
| APPLICABLE STANDARD.....   | 50        |
| TEST PROCEDURE.....  | 50        |
| TEST DATA.....   | 50        |
| <b>FCC §2.1055 &amp; § 22.355 &amp; §74.464&amp; §80.209 &amp; §90.213 - FREQUENCY STABILITY.....</b>  | <b>57</b> |
| APPLICABLE STANDARD.....   | 57        |

---

|  |           |
|--|-----------|
| TEST PROCEDURE .....                                   | 57        |
| TEST DATA .....  | 57        |
| <b>FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....</b> | <b>61</b> |
| APPLICABLE STANDARD .....                              | 61        |
| TEST PROCEDURE .....                                   | 61        |
| TEST DATA .....  | 62        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                             |                |  |
|-----------------------------|----------------|--|
| <b>EUT Name:</b>            |                | Digital Portable Radio                     |
| <b>EUT Model:</b>           |                | PD502i VHF                                 |
| <b>Multiple Model:</b>      |                | PD505i VHF,PD506i VHF,PD508i VHF           |
| <b>FCC ID:</b>              |                | YAMPD50XIVHF                               |
| <b>Rated Input Voltage:</b> |                | DC7.4V from battery or DC12V from adapter. |
| <b>Adapter Information</b>  | <b>Model:</b>  | HKA01212010-XQ                             |
|                             | <b>Input:</b>  | 100-240V~50/60Hz, 0.5A                     |
|                             | <b>Output:</b> | DC12.0V, 1.0A                              |
| <b>External Dimension:</b>  |                | Length (12.5cm)*Width (6cm)*High (4.5cm)   |
| <b>Serial Number:</b>       |                | 171220007                                  |
| <b>EUT Received Date:</b>   |                | 2017.12.22                                 |

*Note: The series product, models PD502i VHF, PD505i VHF,PD506i VHF,PD508i VHF are electrically identical, the differences between them just the model name for marketing purpose, we selected PD502i VHF for full test , and please refer to the declaration letter for details.*

### Objective

This test report is prepared on behalf of *Hytera Communications Corporation Limited* in accordance with Part 2, and Part 22,74,80 and 90 of the Federal Communication Commissions rules.

### Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service  
 Part 74 – Experimental Radio, Auxiliary, Special Broadcast and other Program Distributonal Service  
 Part 80 –Stations in the Maritime Services  
 Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Parameter                     | Measurement Uncertainty                      |
|-------------------------------|--|
| Occupied Channel Bandwidth    | ±5 %   |
| RF output power, conducted    | ±0.61dB                                      |
| Unwanted Emissions, radiated  | 30MHz ~ 1GHz: 5.85 dB<br>1G~26.5GHz: 5.23 dB |
| Unwanted Emissions, conducted | ±1.5 dB                                      |
| Temperature                   | ±1 °C  |
| Humidity                      | ±5%  |
| DC and low frequency voltages | ±0.4%  |
| Duty Cycle                    | 1%   |

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

---

### Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

### EUT Specification:

|                          |                     |
|--------------------------|---------------------|
| Operating Frequency Band | 136-174MHz          |
| Modulation Mode          | FM/4FSK             |
| Channel Spacing          | 12.5/25kHz          |
| Rated Output Power       | High: 5W<br>Low: 1W |

### EUT Exercise Software

No exercise software was used.

### Special Accessories

No special accessory was used.


### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details

| Manufacturer | Description                | Model | Serial Number |
|--------------|----------------------------|-------|---------------|
| N/A          | Terminal Load<br>(50 Ω)    | N/A   | N/A           |
| HP           | RF Communications Test Set | 8920A | 00 247        |

### Block Diagram of Test Setup

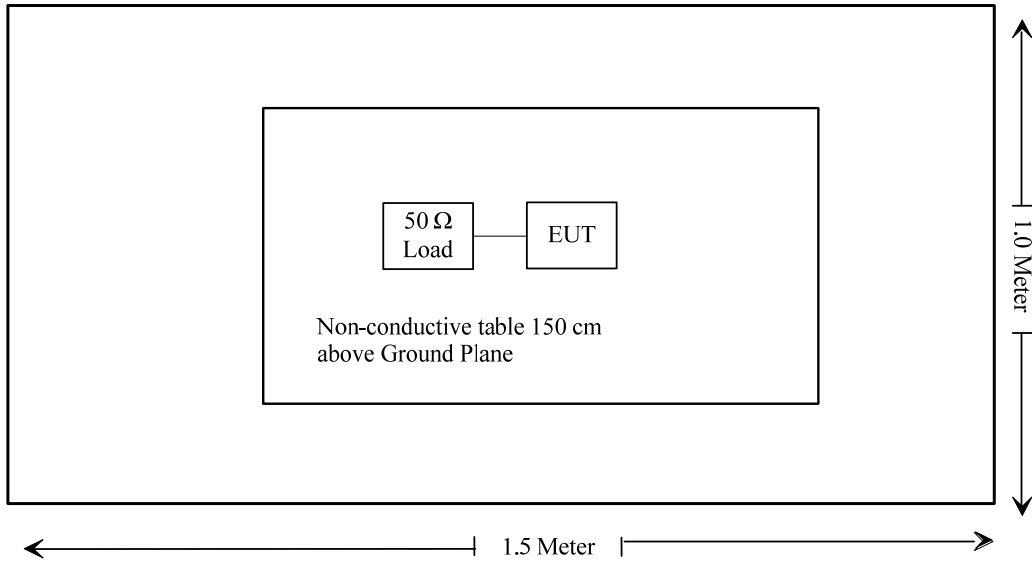

**SUMMARY OF TEST RESULTS**

| FCC Rules  | Description of Test                   | Results    |
|--|---------------------------------------|------------|
| §1.1310 and §2.1093  | RF Exposure                           | Compliance |
| §2.1046; § 22.727;<br>§80.215; §74.461; §90.205                              | RF Output Power                       | Compliance |
| §2.1047  | Modulation Characteristic             | Compliance |
| §2.1049; §22.357; § 22.731;<br>§74.462; §80.205; §80.207<br>§90.209; §90.210 | Occupied Bandwidth & Emission Mask    | Compliance |
| §2.1051; §22.861; §74.462;<br>§80.211; §90.210                               | Spurious Emission at Antenna Terminal | Compliance |
| §2.1053; §22.861;<br>§74.462; §80.211; §90.210                               | Spurious Radiated Emissions           | Compliance |
| §2.1055; § 22.355;<br>§74.464; §80.209; §90.213                              | Frequency Stability                   | Compliance |
| §90.214  | Transient Frequency Behavior          | Compliance |



**TEST EQUIPMENT LIST**

| Manufacturer                  | Description                   | Model                  | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|-------------------------------|------------------------|---------------|------------------|----------------------|
| <b>Radiated Emission Test</b> |                               |                        |               |                  |                      |
| R&S                           | Spectrum Analyzer             | FSEM                   | 831259/019    | 2017-07-18       | 2018-07-18           |
| R&S                           | EMI Test Receiver             | ESCI                   | 100224        | 2017-09-01       | 2018-09-01           |
| Sunol Sciences                | Antenna                       | JB3                    | A060611-1     | 2017-11-10       | 2020-11-10           |
| HP                            | Amplifier                     | 8447D                  | 2727A05902    | 2017-09-05       | 2018-09-05           |
| Agilent                       | Spectrum Analyzer             | E4440A                 | SG43360054    | 2017-12-08       | 2018-12-08           |
| ETS LINDGREN                  | Horn Antenna                  | 3115                   | 000 527 35    | 2016-01-05       | 2019-01-04           |
| MITEQ                         | Amplifier                     | AFS42-00101800-25-S-42 | 2001271       | 2017-09-05       | 2018-09-05           |
| HP                            | Signal Generator              | 1026                   | 320408        | 2017-12-14       | 2018-12-14           |
| EMCO                          | Adjustable Dipole Antenna     | 3121C                  | 9109-753      | N/A              | N/A                  |
| TDK RF                        | Horn Antenna                  | HRN-0118               | 130 084       | 2016-01-05       | 2019-01-04           |
| N/A                           | Coaxial Cable                 | C-NJNJ-50              | C-0400-01     | 2017-09-05       | 2018-09-05           |
| N/A                           | Coaxial Cable                 | C-NJNJ-50              | C-0075-01     | 2017-09-05       | 2018-09-05           |
| N/A                           | Coaxial Cable                 | C-NJNJ-50              | C-1000-01     | 2017-09-05       | 2018-09-05           |
| N/A                           | Coaxial Cable                 | C-SJSJ-50              | C-0800-01     | 2017-09-05       | 2018-09-05           |
| <b>RF Conducted Test</b>      |                               |                        |               |                  |                      |
| Rohde & Schwarz               | Signal Analyzer               | FSIQ26                 | 831929/005    | 2017-08-31       | 2018-08-31           |
| HP                            | RF Communications Test Set    | 8920A                  | 00 235        | 2017-07-11       | 2018-07-11           |
| Pro instrument                | DC Power Supply               | pps3300                | N/A           | N/A              | N/A                  |
| LEADER                        | Millivoltmeter                | LMV-181A               | 601788        | 2017-08-11       | 2018-08-10           |
| Dongzhixu                     | High Temperature Test Chamber | DP1000                 | 201105083-4   | 2017-08-28       | 2018-08-28           |
| E-Microwave                   | DC Blocking                   | EMDCB-00036            | 0E01201047    | Each Time        | /                    |
| E-Microwave                   | RF Attenuator                 | 20dB                   | 20dB-1        | Each Time        | /                    |
| N/A                           | Coaxial Cable                 | C-SJ00-0010            | C0010/05      | Each time        | N/A                  |
| N/A                           | Coaxial Cable                 | C-SJ00-0010            | C0010/01      | Each Time        | /                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

---

## **FCC §1.1310 & §2.1093 - RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RDG171220007-20.

## **FCC §2.1046 & § 22.727 & §74.461 & §80.215& §90.205 - RF OUTPUT POWER**

---

### **Applicable Standard**

FCC §2.1046, § 22.727, §74.461, §80.215 and §90.205

### **Test Procedure**

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

|         |           |
|---------|-----------|
| R B/W   | Video B/W |
| 100 kHz | 300 kHz   |

### **Test Data**

#### **Environmental Conditions**

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 25.8~26.8 °C    |
| <b>Relative Humidity:</b> | 30.6~30.8 %     |
| <b>ATM Pressure:</b>      | 101.4~101.5 kPa |

*The testing was performed by Sunny Cen on 2017-12-30 and Steven Zuo on 2017-12-31.*

*Test Mode: Transmitting*

**Test Result:** Compliance. Please refer to following table.

| Modulation Mode | Channel Separation (kHz) | f <sub>c</sub> (MHz) | Reading (W)      |                 | Note               |
|-----------------|--------------------------|----------------------|------------------|-----------------|--------------------|
|                 |                          |                      | High Power Level | Low Power Level |                    |
| FM              | 12.5                     | 136.0125             | 4.85             | 1.09            | <b>For Federal</b> |
|                 |                          | 155.7525             | 4.49             | 1.11            | <b>FCC part 90</b> |
|                 |                          | 173.3875             | 4.85             | 1.04            |                    |
| 4FSK            | 12.5                     | 136.0125             | 4.85             | 1.05            | <b>For Federal</b> |
|                 |                          | 155.725              | 4.50             | 1.02            | <b>FCC part 90</b> |
|                 |                          | 173.3875             | 4.87             | 0.96            |                    |
| FM              | 25                       | 154.0125             | 4.74             | 1.13            | <b>FCC part 80</b> |
| FM              | 12.5                     | 161.1                | 4.85             | 1.15            | <b>FCC part 74</b> |
|                 | 25                       | 161.1                | 4.88             | 1.12            |                    |
| 4FSK            | 12.5                     | 161.1                | 4.97             | 1.02            |                    |
| FM              | 12.5                     | 150.8125             | 5.02             | 1.12            | <b>FCC part 22</b> |
|                 | 25                       | 150.8125             | 4.77             | 1.08            |                    |
| 4FSK            | 12.5                     | 150.8125             | 5.04             | 0.99            |                    |

Note: The high rated power level is 5W, and low rated power level is 1W.

## **FCC §2.1047- MODULATION CHARACTERISTIC**

### **Applicable Standard**

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

### **Test Procedure**

Test Method: TIA/EIA-603 2.2.3

### **Test Data**

#### **Environmental Conditions**

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 25.9~26.3 °C    |
| <b>Relative Humidity:</b> | 41~44 %         |
| <b>ATM Pressure:</b>      | 100.8~101.1 kPa |

*The testing was performed by Tiago Huang from 2018-01-03 to 2018-01- 05.*


*Test Mode: Transmitting*

**Result:** Compliance.

**Audio Frequency Response – High Power,12.5kHz**

Carrier Frequency: 155.7525 MHz, Channel Separation:12.5kHz


| Modulation Frequency (Hz) | Response data (dB) |
|---------------------------|--------------------|
| 300                       | -10.35             |
| 400                       | -8.50              |
| 500                       | -6.16              |
| 600                       | -4.18              |
| 700                       | -2.76              |
| 800                       | -1.62              |
| 900                       | -0.54              |
| 1000                      | 0.00               |
| 1200                      | 1.66               |
| 1400                      | 2.82               |
| 1600                      | 4.20               |
| 1800                      | 5.05               |
| 2000                      | 5.91               |
| 2200                      | 6.48               |
| 2400                      | 6.74               |
| 2600                      | 6.84               |
| 2800                      | 7.02               |
| 3000                      | 7.15               |

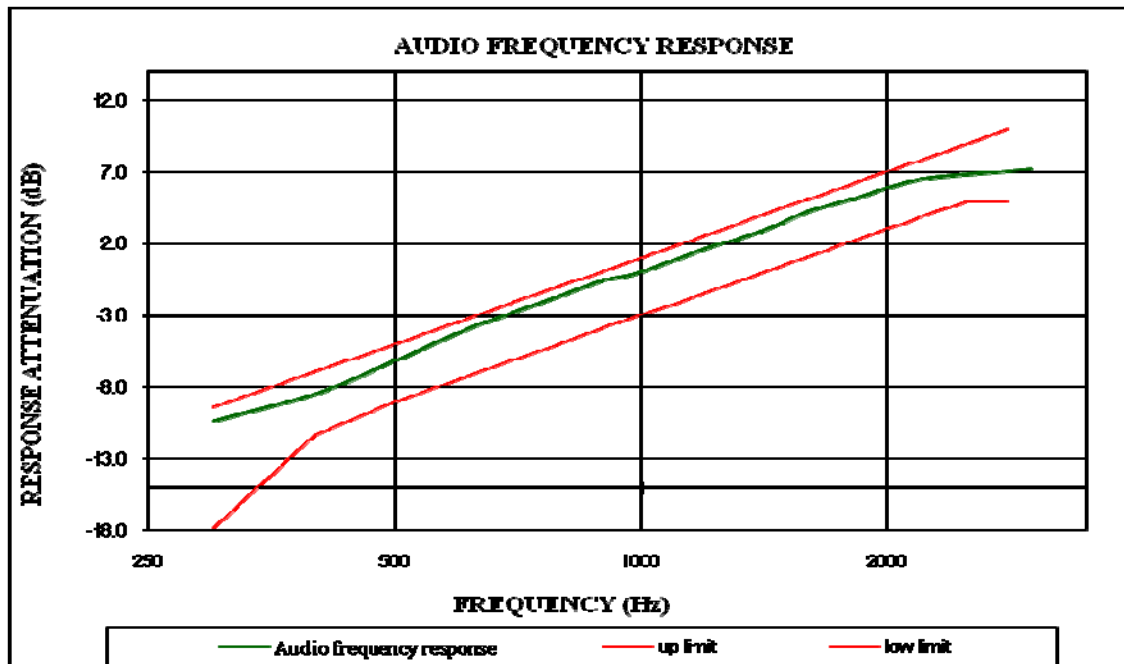

**25kHz:**

Carrier Frequency: 154.0125 MHz, Channel Separation:25kHz

| Modulation Frequency (Hz) | Response data (dB) |
|---------------------------|--------------------|
| 300                       | -10.36             |
| 400                       | -8.74              |
| 500                       | -6.20              |
| 600                       | -4.35              |
| 700                       | -2.67              |
| 800                       | -1.56              |
| 900                       | -0.60              |
| 1000                      | 0.00               |
| 1200                      | 1.04               |
| 1400                      | 2.71               |
| 1600                      | 3.73               |
| 1800                      | 5.02               |
| 2000                      | 5.68               |
| 2200                      | 6.55               |
| 2400                      | 7.07               |
| 2600                      | 7.28               |
| 2800                      | 6.90               |
| 3000                      | 6.63               |

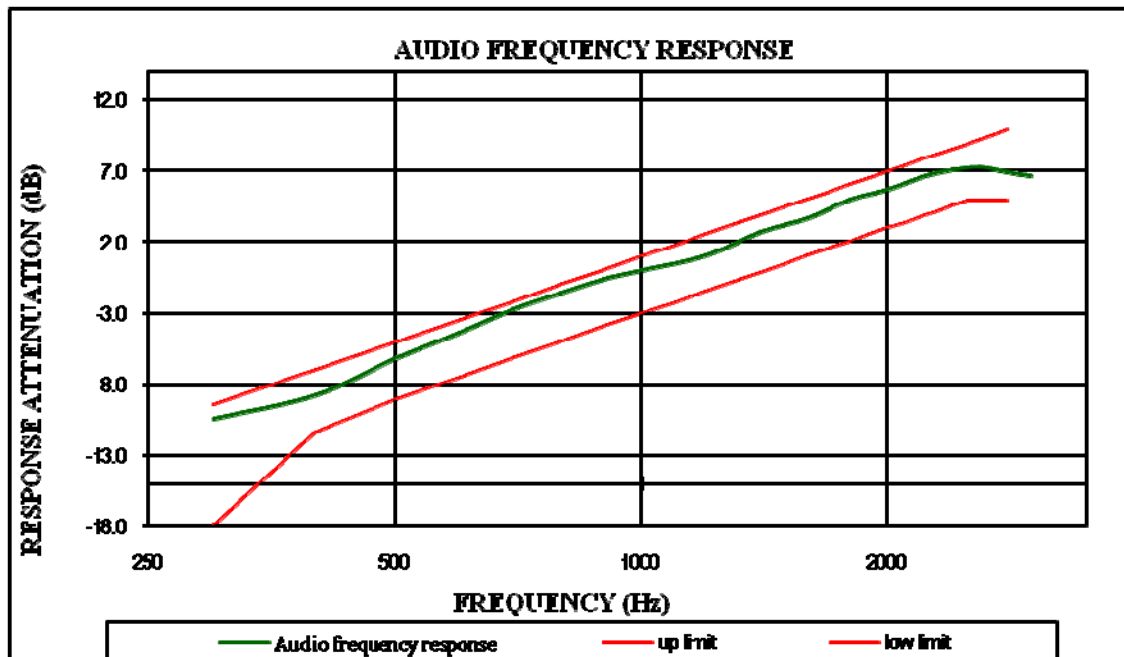


**MODULATION LIMITING – High Power**

12.5kHz

Carrier Frequency: 155.7525 MHz, Channel Separation: 12.5kHz

| Audio Frequency (Hz) | Instantaneous            |                          | Steady-state             |                          | Limit [KHz] |
|----------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------|
|                      | Deviation (@+20dB) [KHz] | Deviation (@-20dB) [KHz] | Deviation (@+20dB) [KHz] | Deviation (@-20dB) [KHz] |             |
| 300                  | 1.451                    | 0.118                    | 1.46                     | 0.172                    | 2.5         |
| 400                  | 1.709                    | 0.154                    | 1.74                     | 0.24                     | 2.5         |
| 500                  | 1.867                    | 0.157                    | 1.89                     | 0.21                     | 2.5         |
| 600                  | 2.046                    | 0.246                    | 2.083                    | 0.343                    | 2.5         |
| 700                  | 2.073                    | 0.276                    | 2.087                    | 0.319                    | 2.5         |
| 800                  | 2.076                    | 0.205                    | 2.084                    | 0.297                    | 2.5         |
| 900                  | 2.141                    | 0.186                    | 2.196                    | 0.234                    | 2.5         |
| 1000                 | 2.05                     | 0.307                    | 2.11                     | 0.358                    | 2.5         |
| 1200                 | 2.121                    | 0.232                    | 2.16                     | 0.287                    | 2.5         |
| 1400                 | 2.059                    | 0.132                    | 2.108                    | 0.173                    | 2.5         |
| 1600                 | 2.091                    | 0.282                    | 2.125                    | 0.328                    | 2.5         |
| 1800                 | 1.986                    | 0.223                    | 2.068                    | 0.27                     | 2.5         |
| 2000                 | 2.029                    | 0.306                    | 2.042                    | 0.311                    | 2.5         |
| 2200                 | 1.963                    | 0.374                    | 2.055                    | 0.452                    | 2.5         |
| 2400                 | 2.009                    | 0.303                    | 2.089                    | 0.397                    | 2.5         |
| 2600                 | 2.115                    | 0.353                    | 2.124                    | 0.441                    | 2.5         |
| 2800                 | 2.018                    | 0.427                    | 2.028                    | 0.484                    | 2.5         |
| 3000                 | 2.001                    | 0.499                    | 2.041                    | 0.51                     | 2.5         |

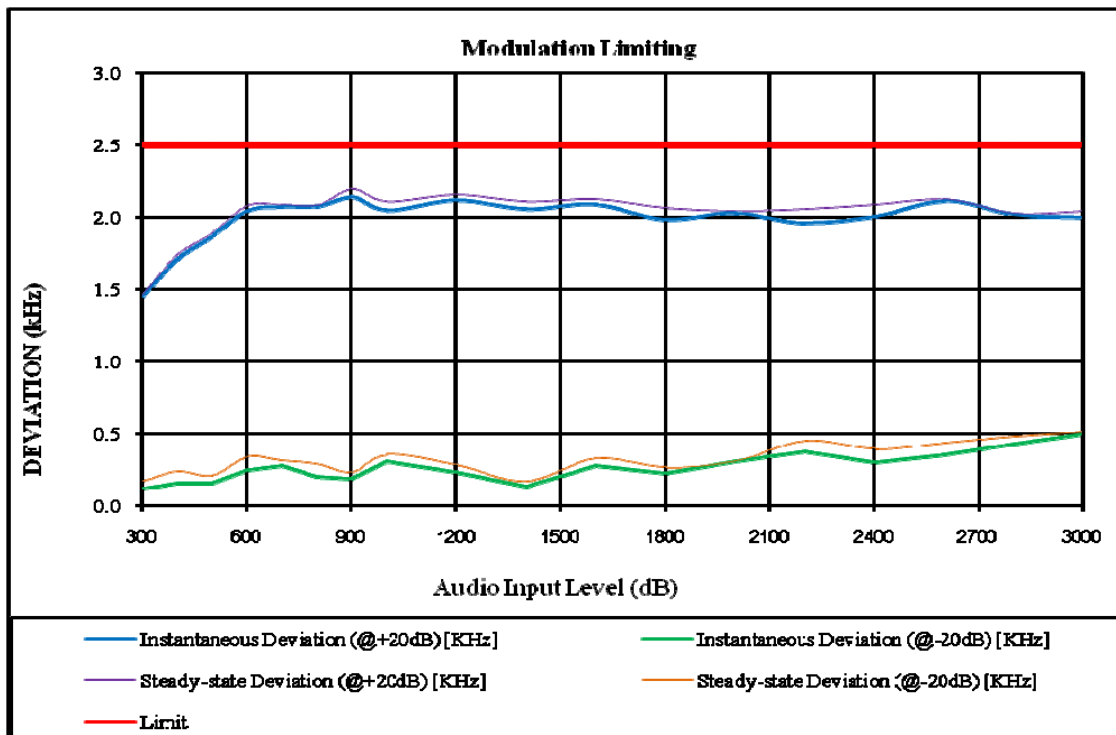




25kHz:

Carrier Frequency: 154.0125 MHz, Channel Separation:25kHz

| Audio Frequency (Hz) | Instantaneous            |                          | Steady-state             |                          | Limit [KHz] |
|----------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------|
|                      | Deviation (@+20dB) [KHz] | Deviation (@-20dB) [KHz] | Deviation (@+20dB) [KHz] | Deviation (@-20dB) [KHz] |             |
| 300                  | 1.044                    | 0.218                    | 1.053                    | 0.297                    | 5.0         |
| 400                  | 1.357                    | 0.296                    | 1.42                     | 0.368                    | 5.0         |
| 500                  | 1.66                     | 0.208                    | 1.702                    | 0.291                    | 5.0         |
| 600                  | 2.187                    | 0.418                    | 2.258                    | 0.471                    | 5.0         |
| 700                  | 2.652                    | 0.532                    | 2.68                     | 0.56                     | 5.0         |
| 800                  | 3.357                    | 0.524                    | 3.408                    | 0.541                    | 5.0         |
| 900                  | 3.636                    | 0.675                    | 3.712                    | 0.683                    | 5.0         |
| 1000                 | 4.088                    | 0.539                    | 4.114                    | 0.602                    | 5.0         |
| 1200                 | 4.024                    | 0.903                    | 4.072                    | 0.935                    | 5.0         |
| 1400                 | 4.135                    | 0.999                    | 4.182                    | 1.089                    | 5.0         |
| 1600                 | 4.016                    | 0.991                    | 4.072                    | 1.068                    | 5.0         |
| 1800                 | 4.115                    | 1.186                    | 4.2                      | 1.234                    | 5.0         |
| 2000                 | 4.145                    | 1.114                    | 4.24                     | 1.153                    | 5.0         |
| 2200                 | 4.161                    | 1.109                    | 4.24                     | 1.158                    | 5.0         |
| 2400                 | 3.973                    | 1.042                    | 4.049                    | 1.128                    | 5.0         |
| 2600                 | 4.143                    | 1.129                    | 4.172                    | 1.14                     | 5.0         |
| 2800                 | 3.934                    | 0.958                    | 4.011                    | 1.035                    | 5.0         |
| 3000                 | 3.911                    | 0.937                    | 3.953                    | 0.988                    | 5.0         |

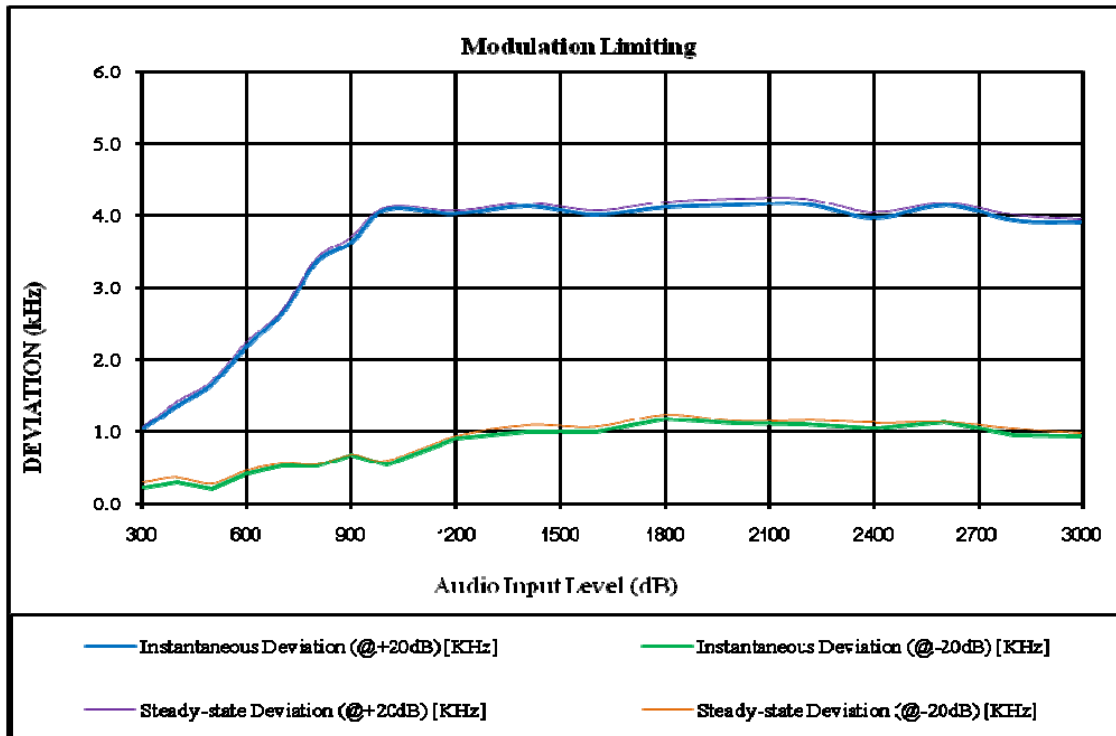


**Audio Frequency Low Pass Filter Response – High Power**

**12.5kHz:**

Carrier Frequency: 155.7525 MHz, Channel Spacing 12.5 kHz


| Audio Frequency (kHz) | Response Attenuation (dB) | Limit (dB) |
|-----------------------|---------------------------|------------|
| 3.0                   | -3.3                      | 0.0        |
| 3.5                   | -9.8                      | -6.7       |
| 4.0                   | -15.4                     | -12.5      |
| 5.0                   | -25.9                     | -22.2      |
| 7.0                   | -40.1                     | -36.8      |
| 10.0                  | -55.7                     | -52.3      |
| 15.0                  | -74.2                     | -69.9      |
| 20.0                  | -85.9                     | -82.5      |
| 30.0                  | -86.6                     | -82.5      |
| 50.0                  | -85.7                     | -82.5      |
| 70.0                  | -86.5                     | -82.5      |

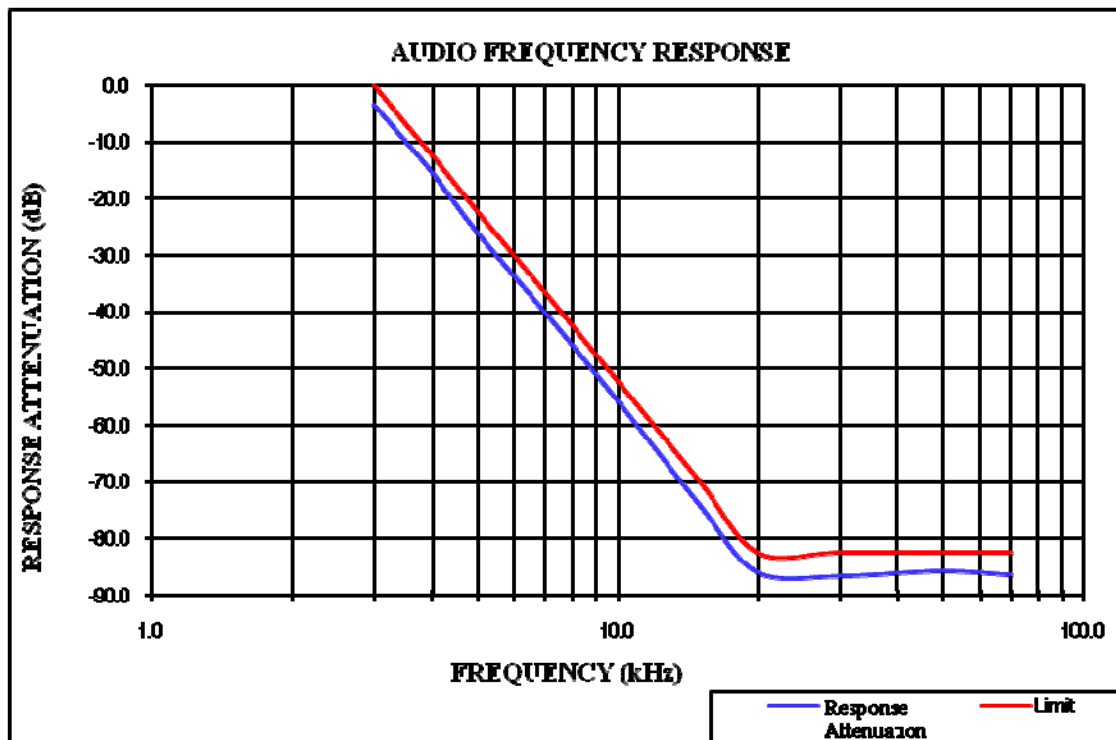

25kHz:

Carrier Frequency: 154.0125 MHz, Channel Spacing 25 kHz

| Audio Frequency (kHz) | Response Attenuation (dB) | Limit (dB) |
|-----------------------|---------------------------|------------|
| 3.0                   | -3.8                      | 0.0        |
| 3.5                   | -9.9                      | -4.0       |
| 4.0                   | -15.4                     | -7.5       |
| 5.0                   | -25.6                     | -13.3      |
| 7.0                   | -40.1                     | -21.1      |
| 10.0                  | -55.9                     | -31.4      |
| 15.0                  | -72.5                     | -41.9      |
| 20.0                  | -85.7                     | -50.0      |
| 30.0                  | -86.7                     | -50.0      |
| 50.0                  | -86.2                     | -50.0      |
| 70.0                  | -86.5                     | -50.0      |

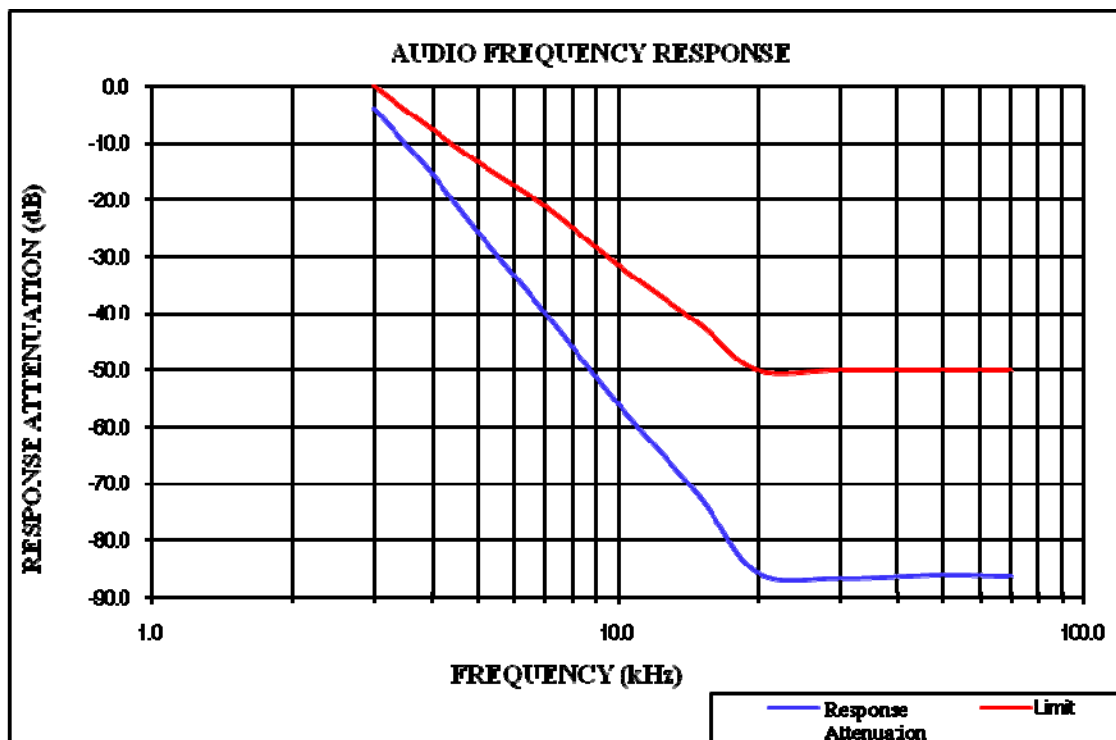

**FCC §2.1049 & §22.357 & § 22.731 & §74.462 & 80.205& §80.207& §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK****Applicable Standard**

FCC §2.1049, §22.357, § 22.731, §74.462, §80.205, §80.207,§90.209 and §90.210

**Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band  $\pm 50$  kHz from the carrier frequency.

**Test Data****Environmental Conditions**

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 25.9~26.3 °C    |
| <b>Relative Humidity:</b> | 41~44 %         |
| <b>ATM Pressure:</b>      | 100.8~101.1 kPa |

*The testing was performed by Tiago Huang from 2018-01-03 to 2018-01- 05.*

Test mode: transmitting

| Modulation Mode | Channel Separation (kHz) | f <sub>c</sub> (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) | Power Level | Note        |
|-----------------|--------------------------|----------------------|------------------------------|-----------------------|-------------|-------------|
| FM              | 12.5                     | 155.7525             | 9.920                        | 10.321                | High        | FCC part 90 |
|                 |                          |                      | 9.919                        | 10.321                | Low         |             |
| 4FSK            | 12.5                     |                      | 7.715                        | 9.519                 | High        |             |
|                 |                          |                      | 7.315                        | 9.018                 | Low         |             |
| FM              | 25                       | 154.0125             | 15.030                       | 16.032                | High        | FCC part 80 |
|                 |                          |                      | 15.030                       | 16.032                | Low         |             |
| FM              | 12.5                     | 161.1                | 9.920                        | 10.320                | High        | FCC part 74 |
|                 | 25                       |                      | 9.920                        | 10.321                | Low         |             |
| 4FSK            |                          |                      | 12.5                         | 14.780                | 15.957      |             |
|                 | 14.780                   |                      |                              | 16.032                | Low         |             |
| FM              | 12.5                     | 150.8125             | 7.315                        | 9.218                 | High        | FCC part 22 |
|                 |                          |                      | 25                           | 7.515                 | 9.519       |             |
| 4FSK            | 12.5                     |                      |                              | 9.920                 | 10.321      |             |
|                 |                          |                      | 9.920                        | 10.321                | Low         |             |
| FM              | 25                       | 150.8125             | 14.780                       | 15.782                | High        |             |
|                 |                          |                      | 15.030                       | 15.782                | Low         |             |
| 4FSK            | 12.5                     | 150.8125             | 7.615                        | 9.419                 | High        |             |
|                 |                          |                      | 7.315                        | 9.619                 | Low         |             |

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator

Per CFR 47 §2.201& §2.202, BW = 2M + 2D

**For FM Mode (Channel Spacing: 12.5 kHz)**

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

**For FM Mode (Channel Spacing: 25 kHz)**

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

**For Digital Mode (Channel Spacing: 12.5 kHz)**

Emission Designator 7K60F1D and 7K60F1E


The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.


Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

**Part 90:**


**FM,12.5kHz,High Power - Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth**

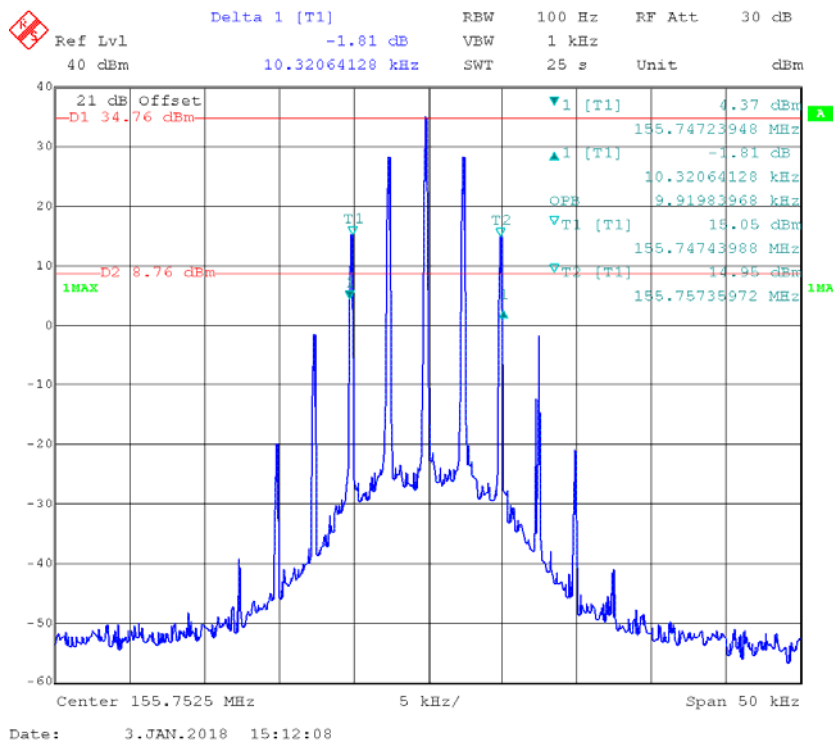


**Emission Mask D**

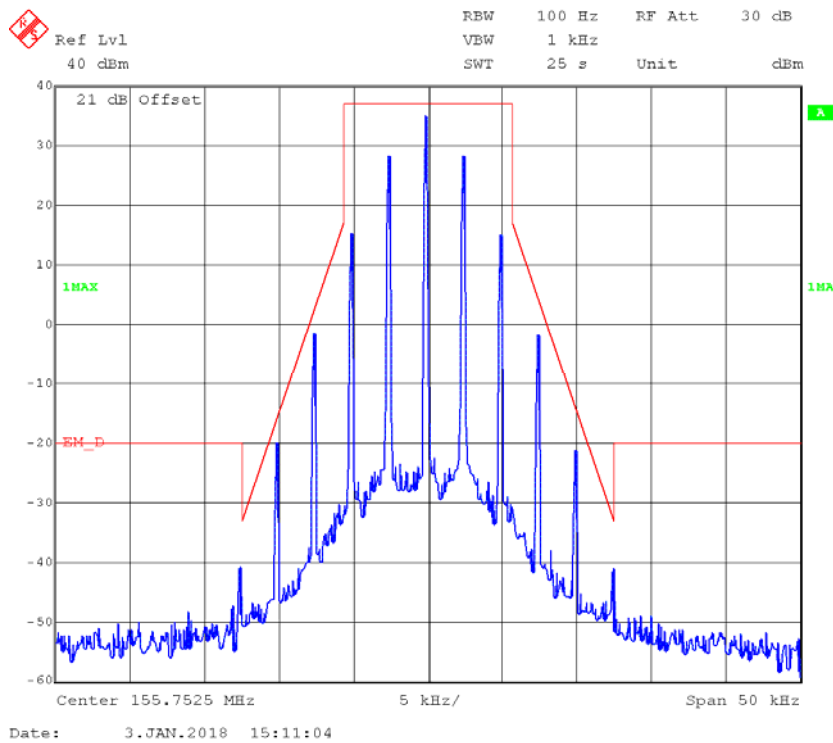


**FM,12.5kHz,Low Power - Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth**

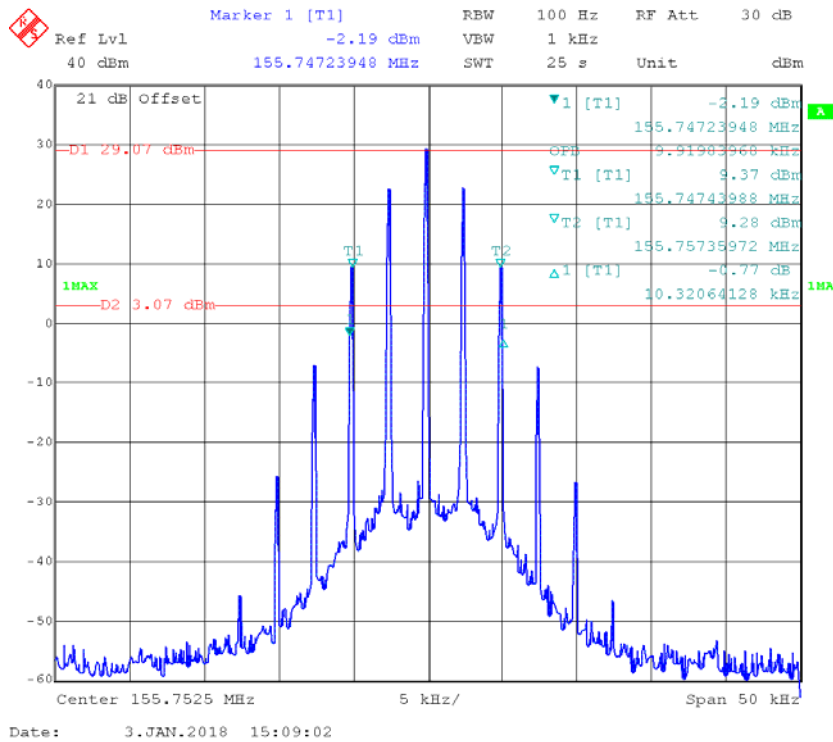


**Emission Mask D**

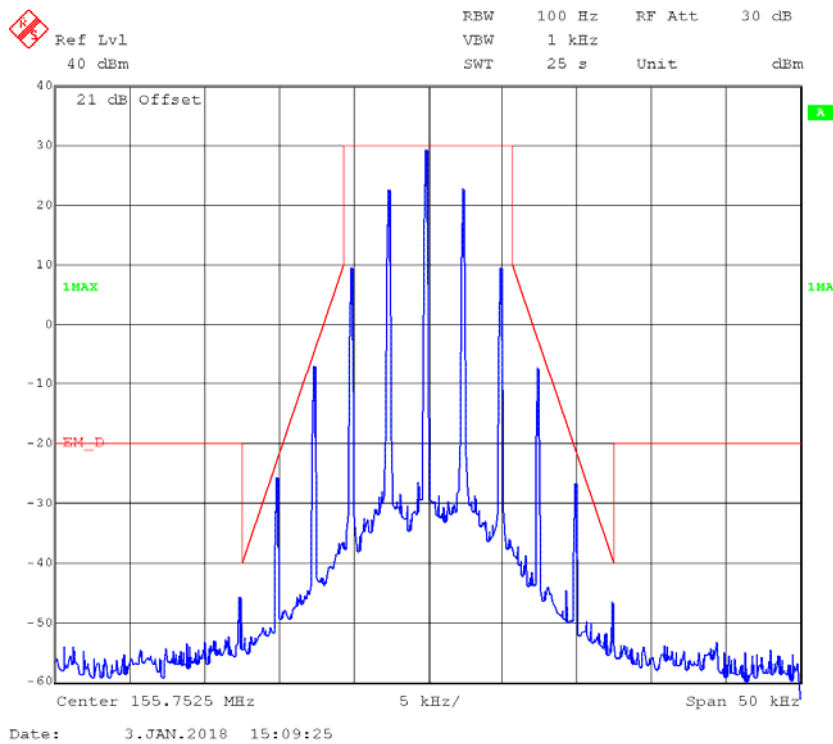

**4FSK,12.5kHz,High Power - Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth**

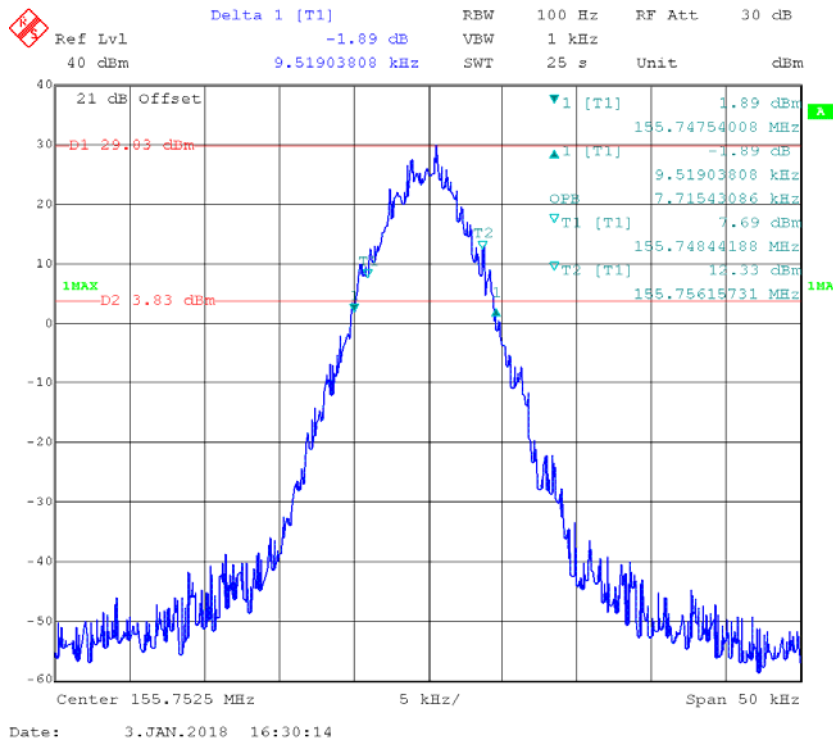


**Emission Mask D**

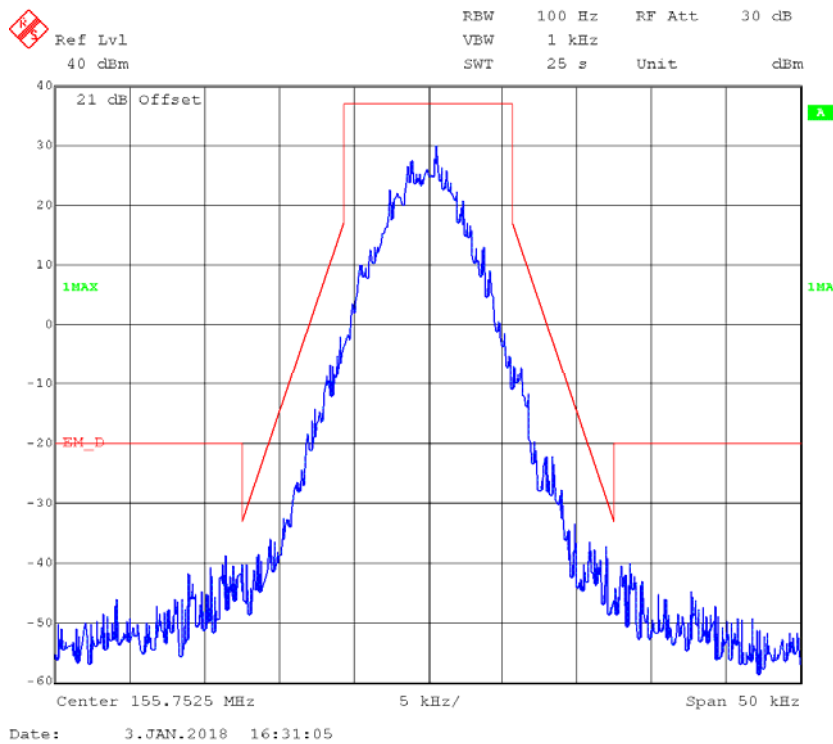




**4FSK,12.5kHz,Low Power - Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth**

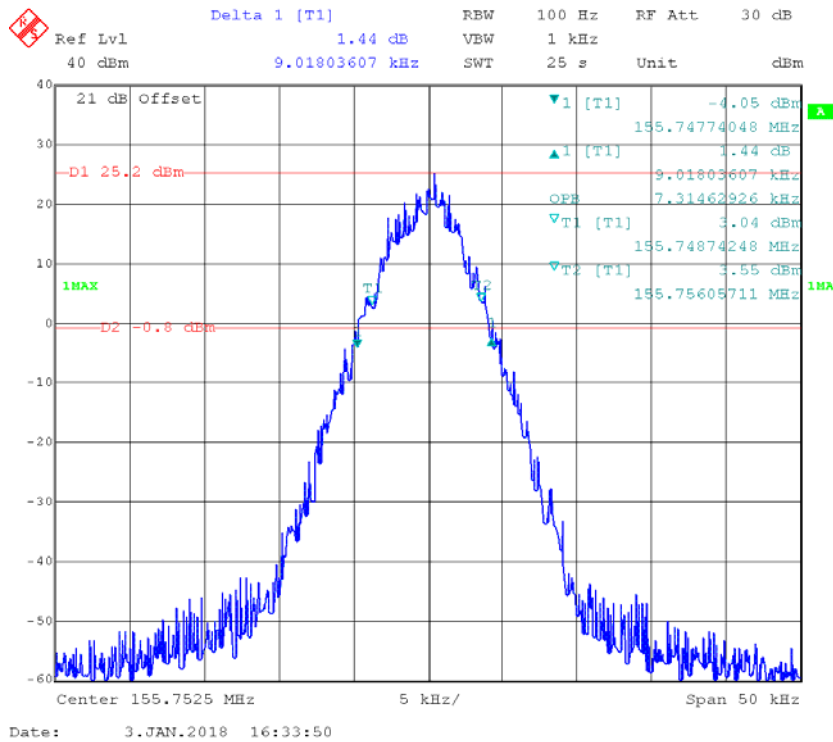


**Emission Mask D**

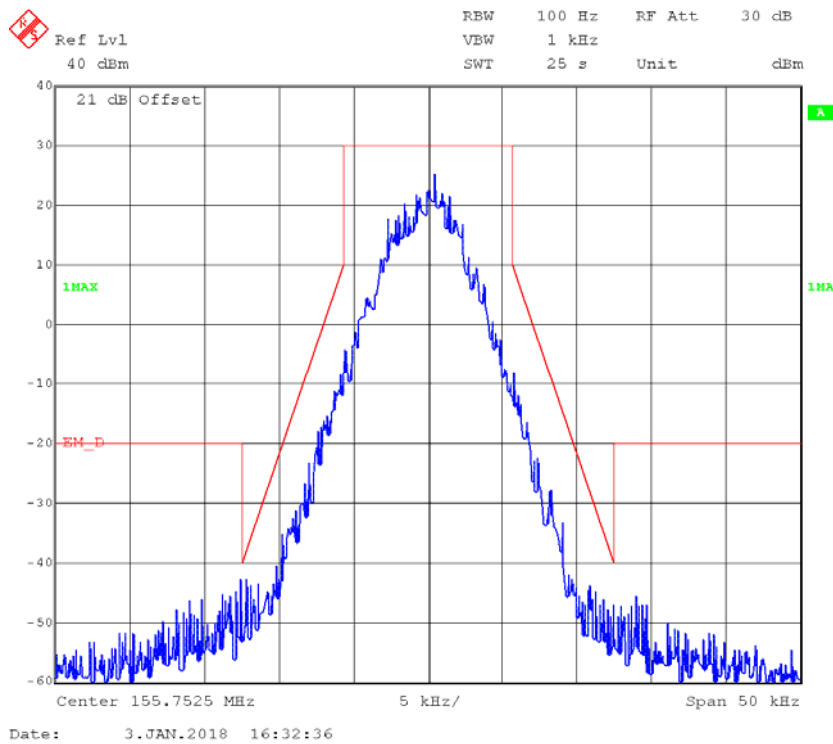


**Part 80:**


**FM,25kHz,High Power - Frequency 154.0125 MHz MHz: 99% Occupied & 26 dB Bandwidth**

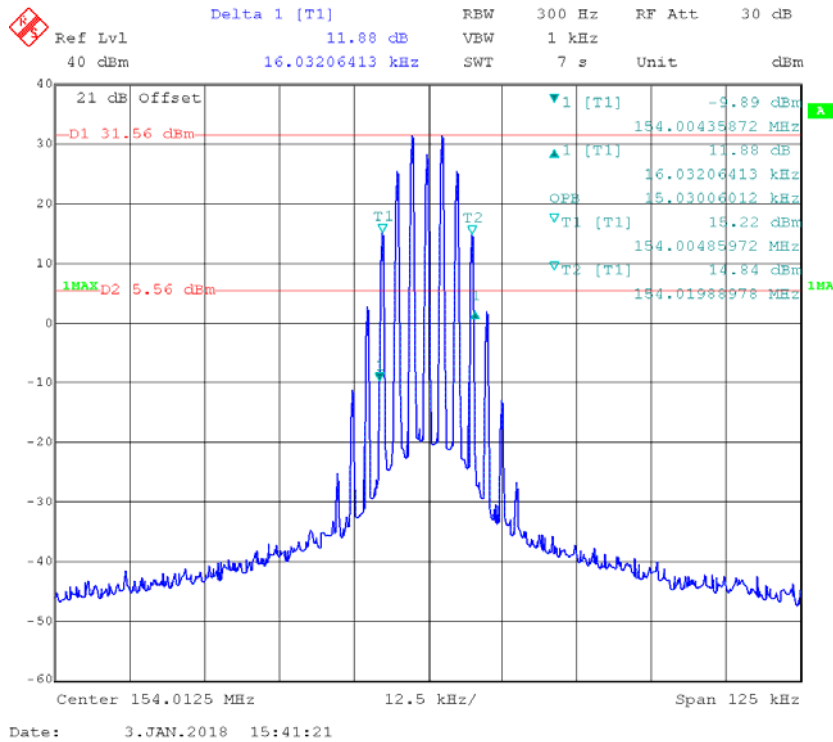


**Emission Mask B**

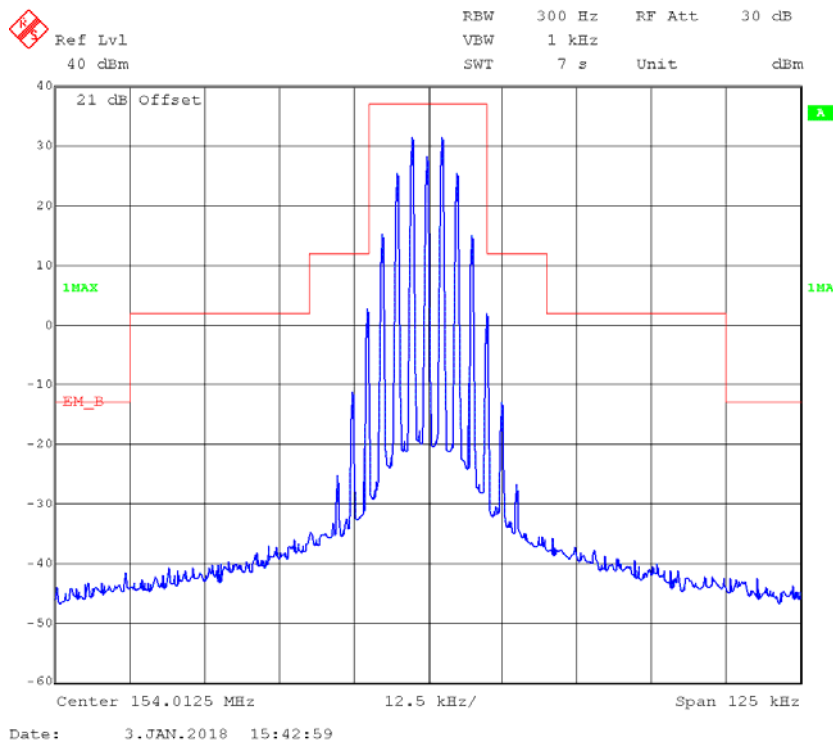

**FM,25kHz,Low Power - Frequency 154.0125 MHz MHz: 99% Occupied & 26 dB Bandwidth**

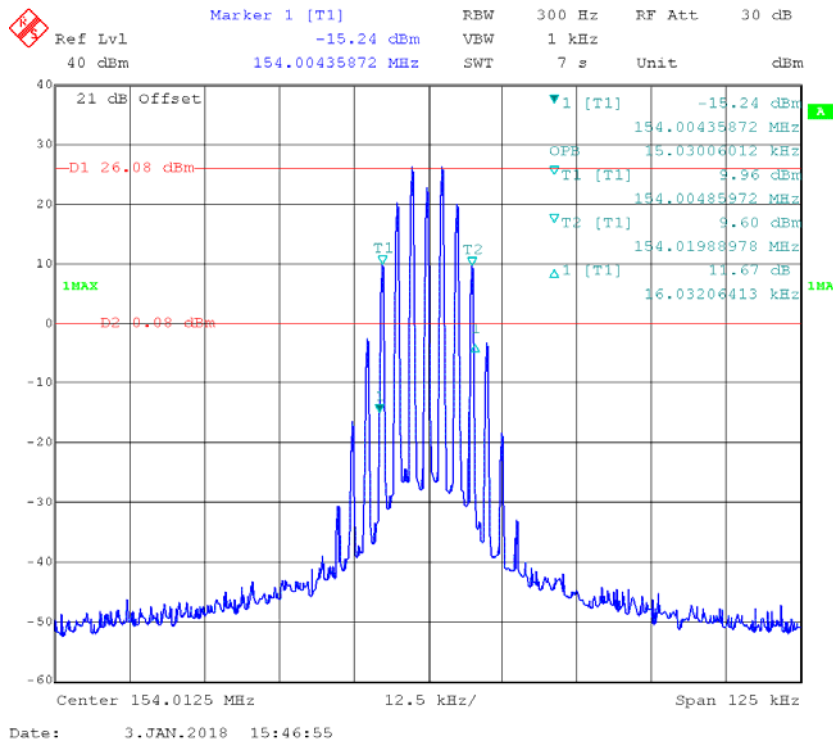


**Emission Mask B**

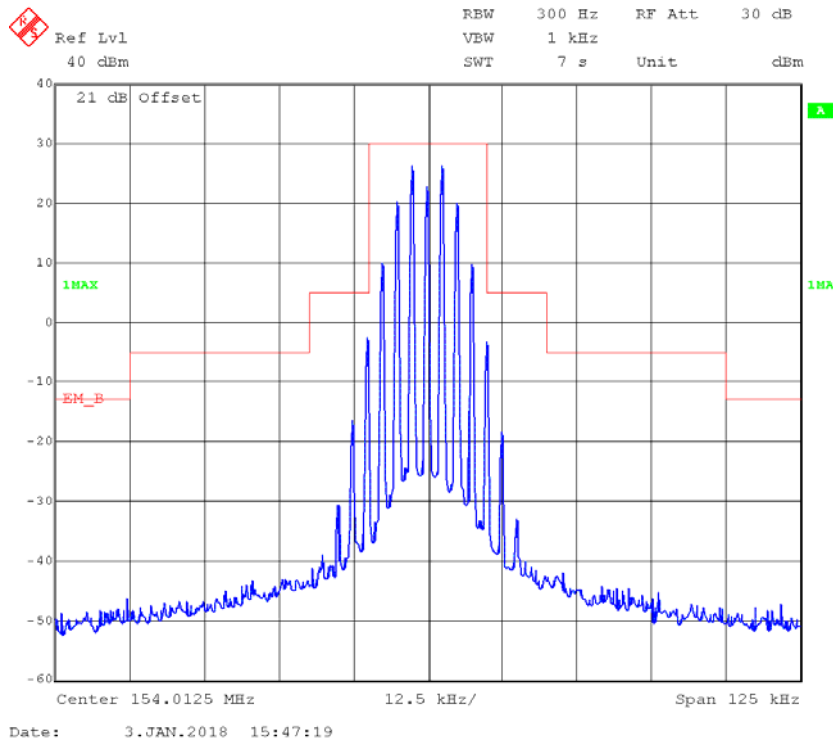


**Part 74**


**FM,12.5kHz,High Power - Frequency 161.1 MHz: 99% Occupied & 26 dB Bandwidth**

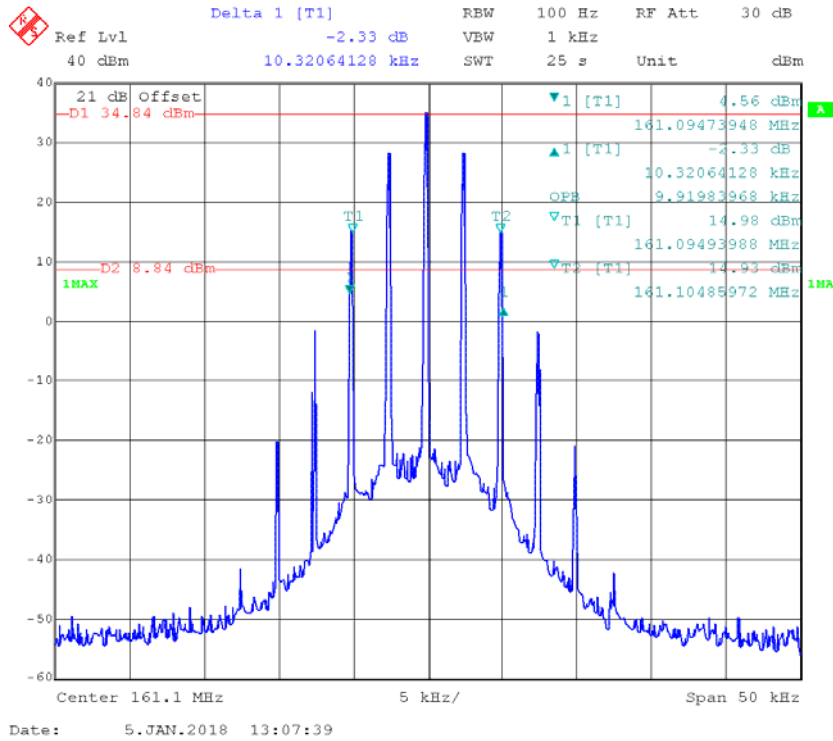


**Emission Mask D**

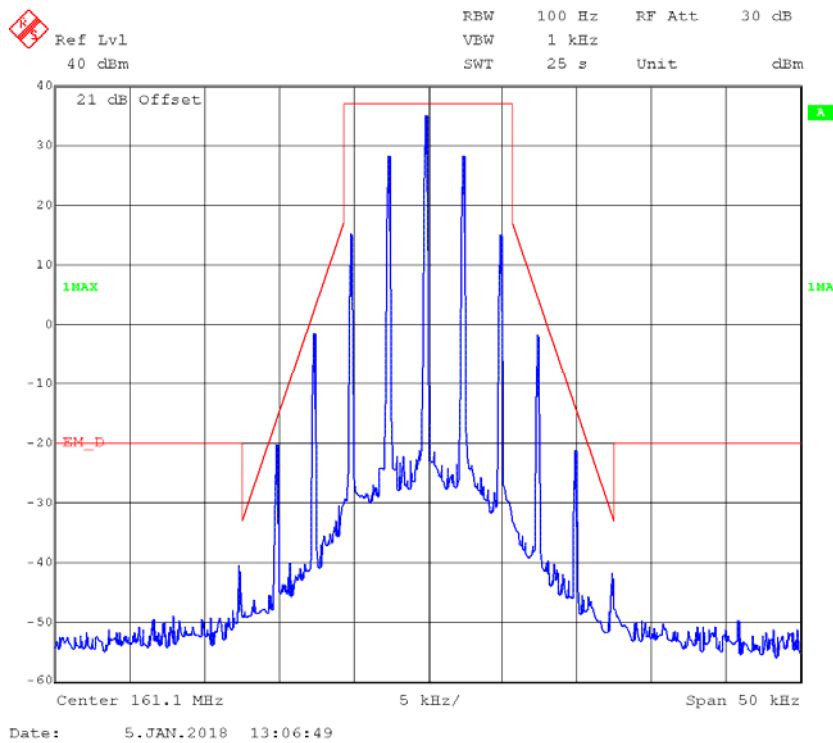


**FM,12.5kHz,Low Power - Frequency 161.1 MHz: 99% Occupied & 26 dB Bandwidth**

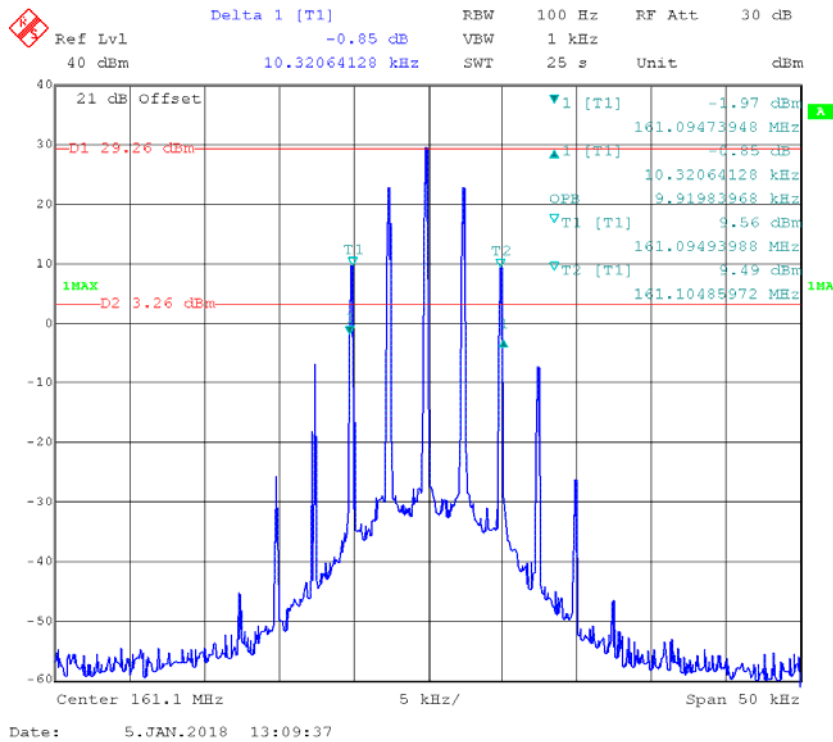


**Emission Mask D**

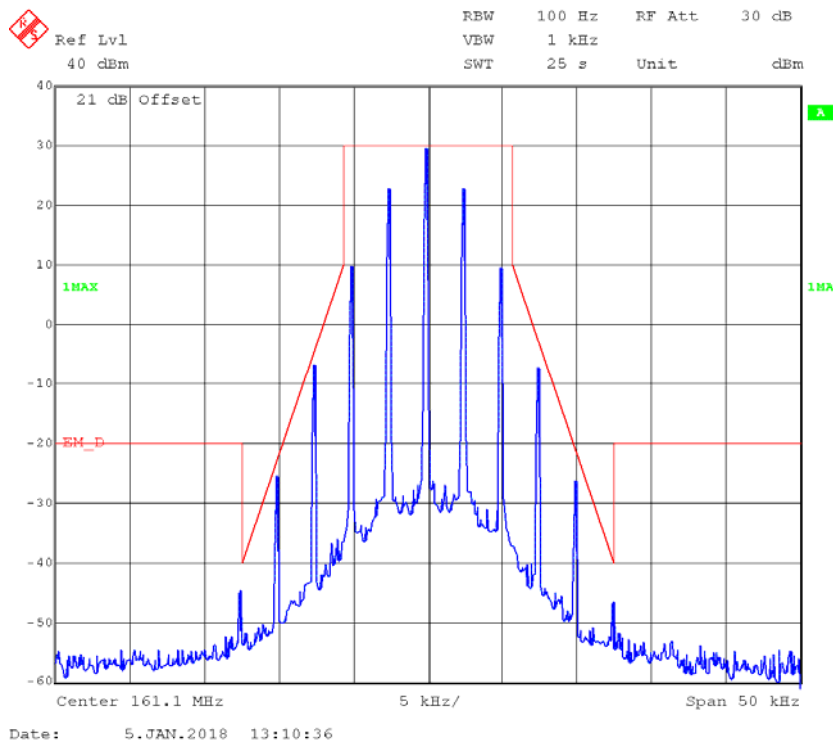


**FM,25kHz,High Power - Frequency 161.1 MHz: 99% Occupied & 26 dB Bandwidth**

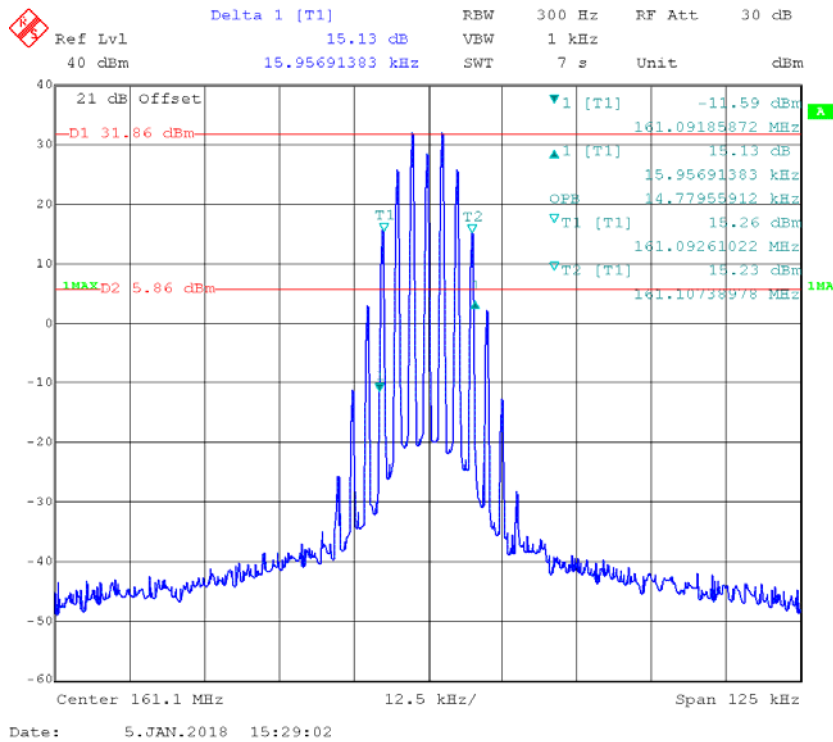


**Emission Mask B**

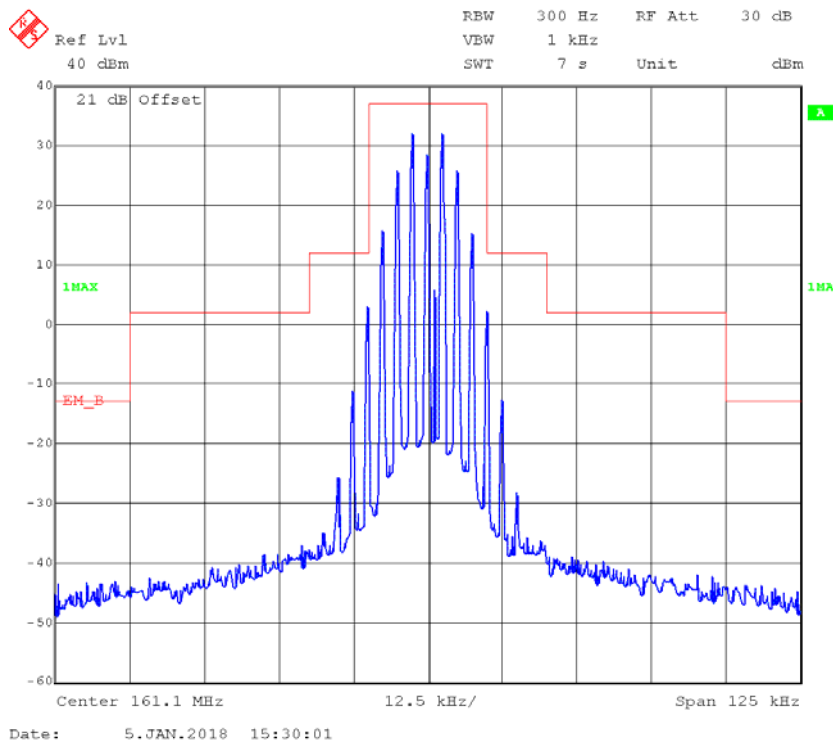


**FM,25kHz,Low Power - Frequency 161.1 MHz: 99% Occupied & 26 dB Bandwidth**

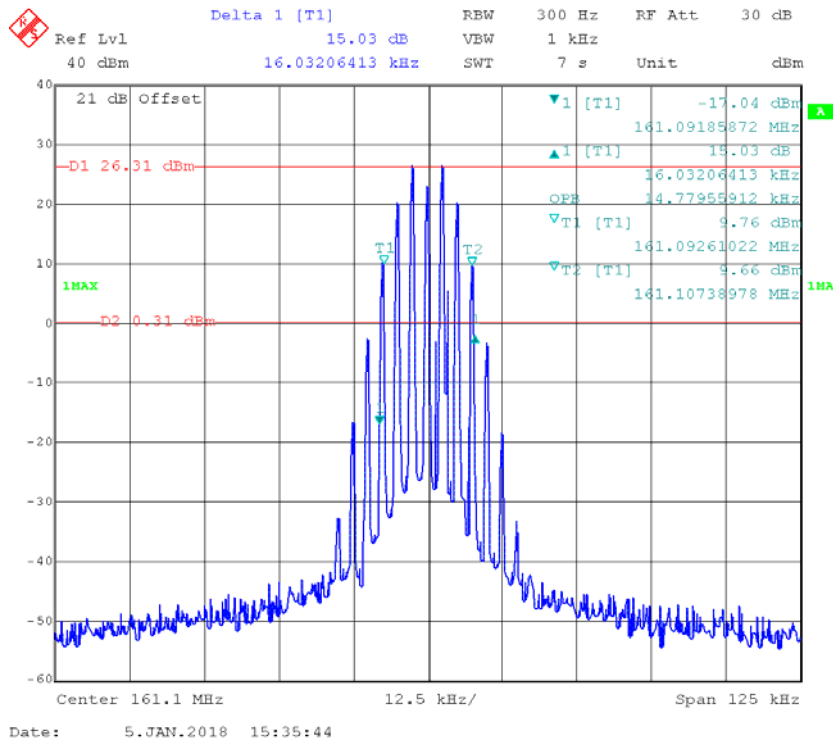


**Emission Mask B**

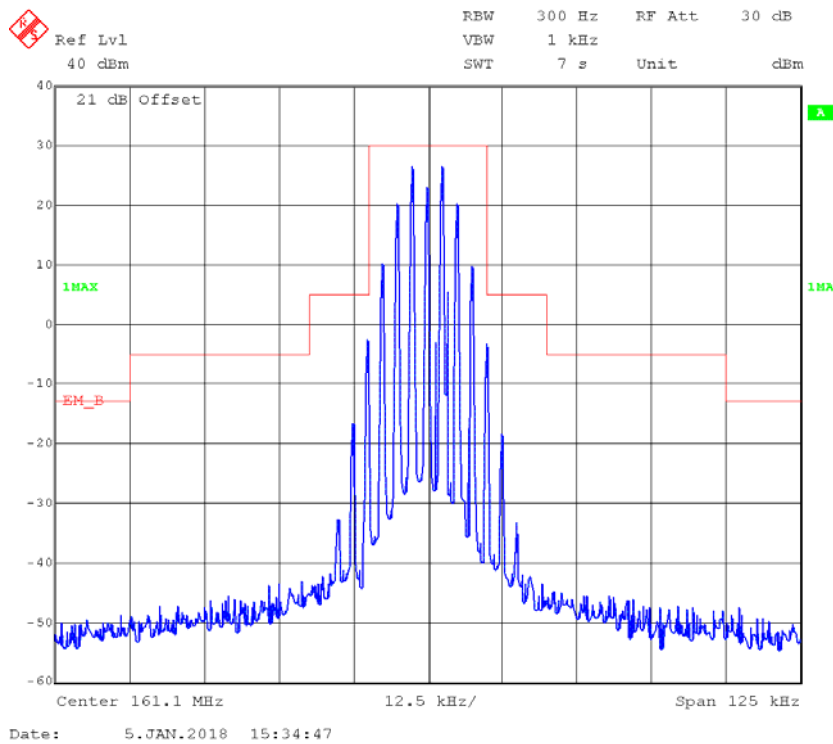

**4FSK,12.5kHz,High Power - Frequency 161.1 MHz: 99% Occupied & 26 dB Bandwidth**

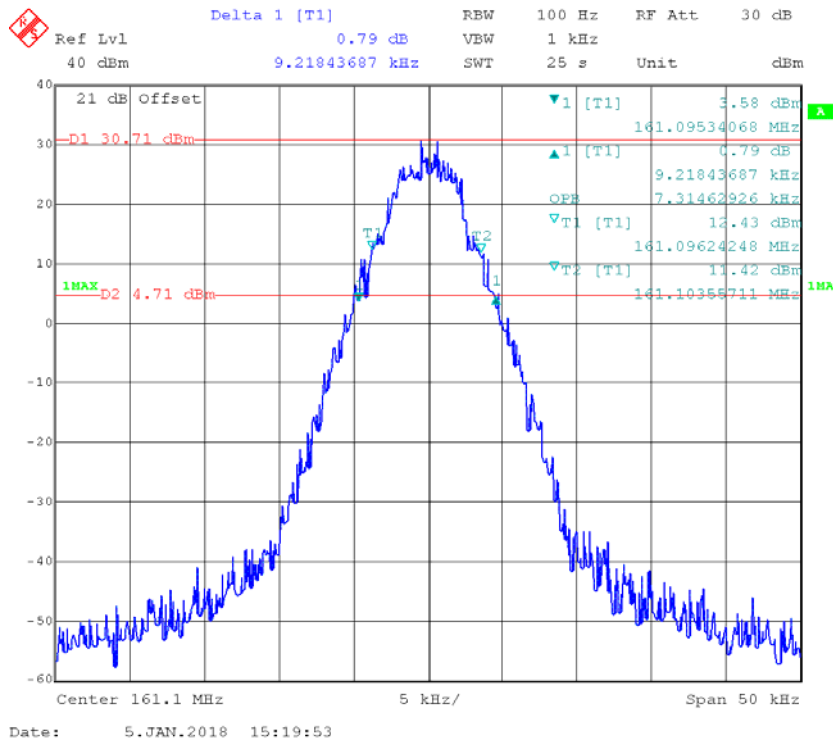


**Emission Mask D**

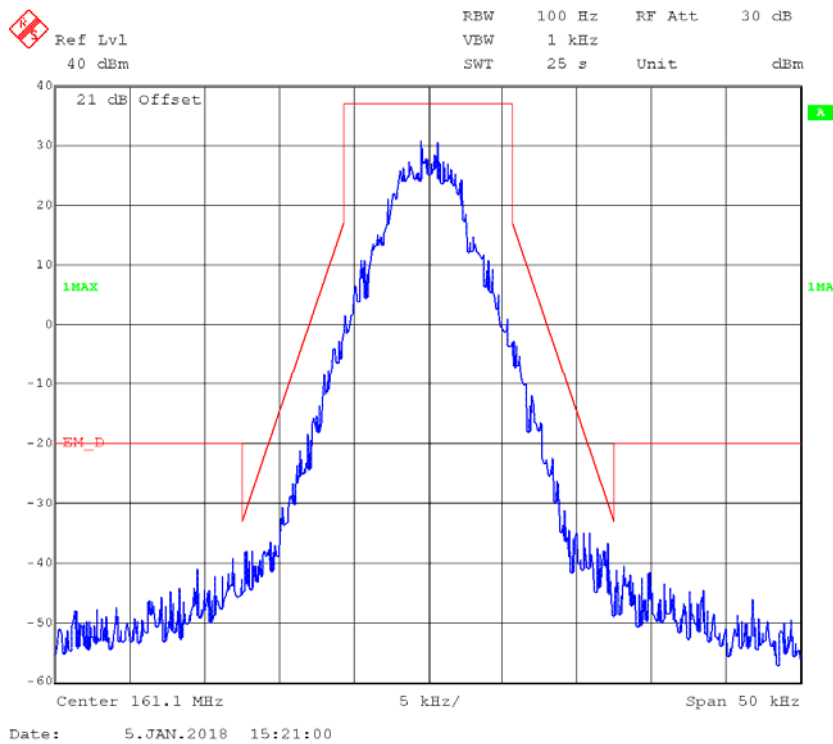




**4FSK,12.5kHz,Low Power - Frequency 161.1 MHz: 99% Occupied & 26 dB Bandwidth**

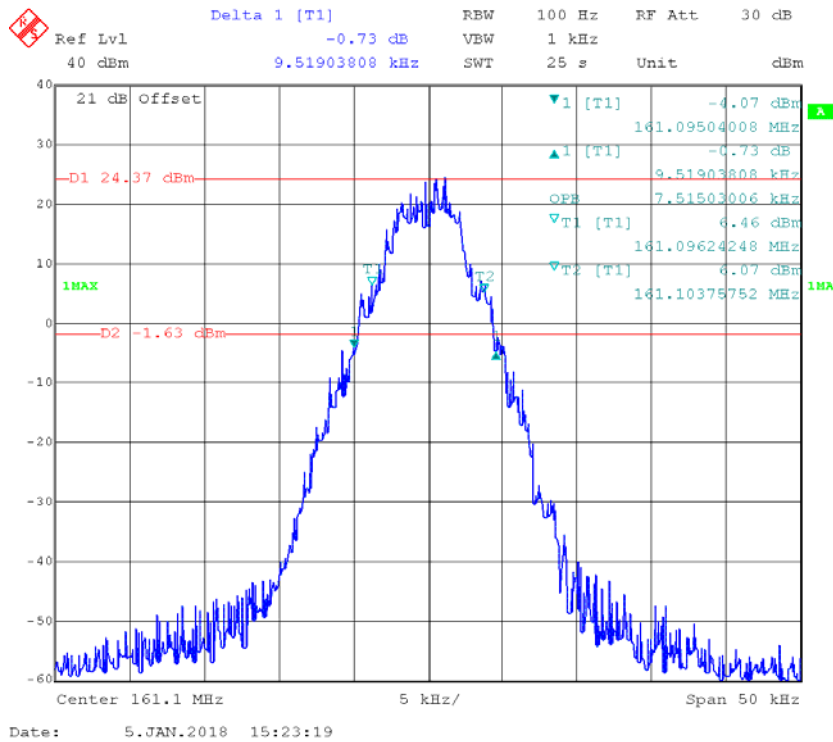


**Emission Mask D**

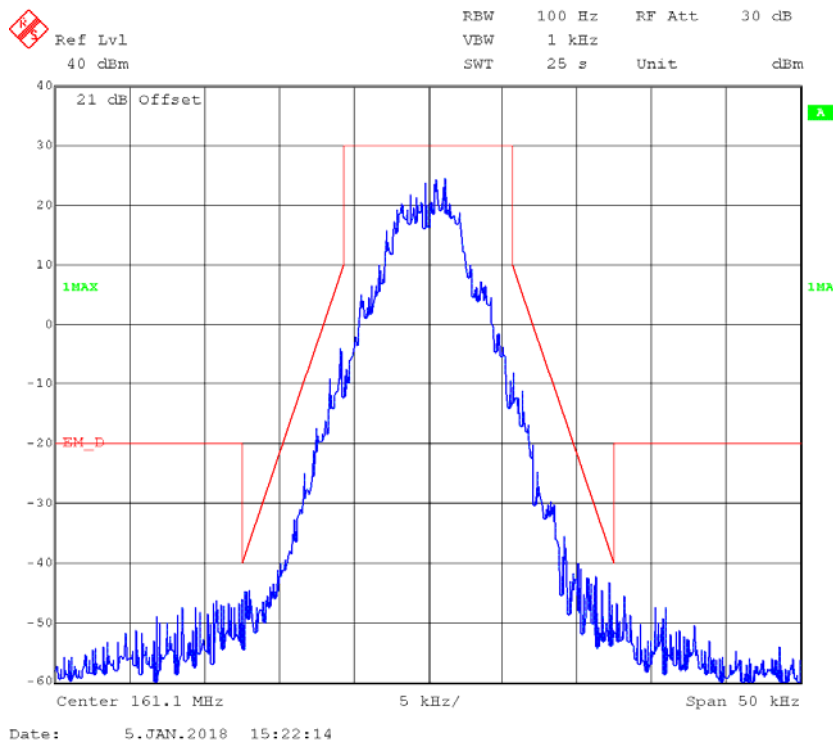


Part 22


FM,12.5kHz,High Power - Frequency 150.8125 MHz: 99% Occupied & 26 dB Bandwidth

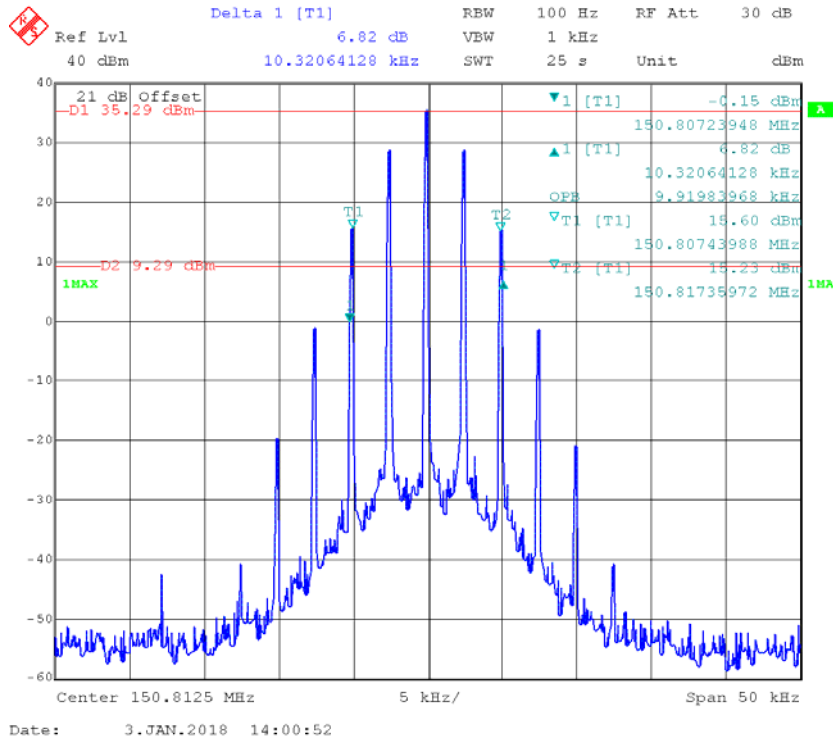


Emission Mask-§22.359

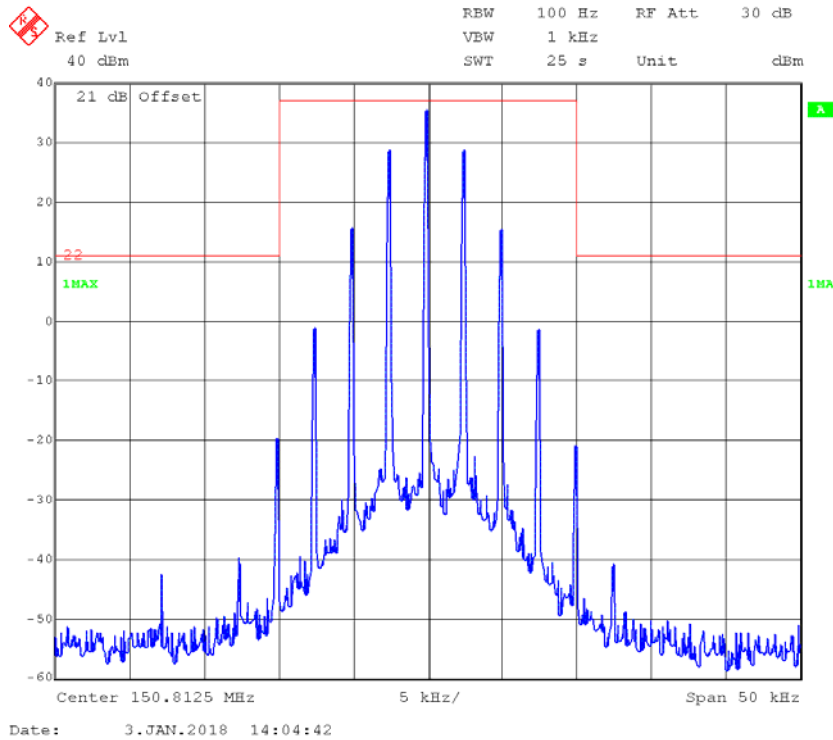


**FM,12.5kHz,Low Power - Frequency 150.8125 MHz: 99% Occupied & 26 dB Bandwidth**

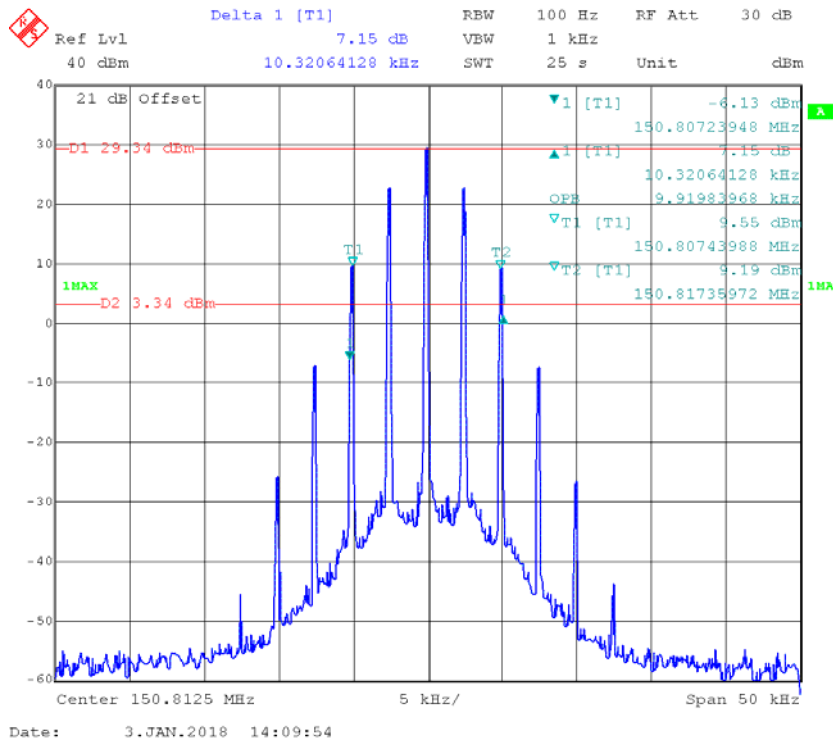


**Emission Mask-§22.359**

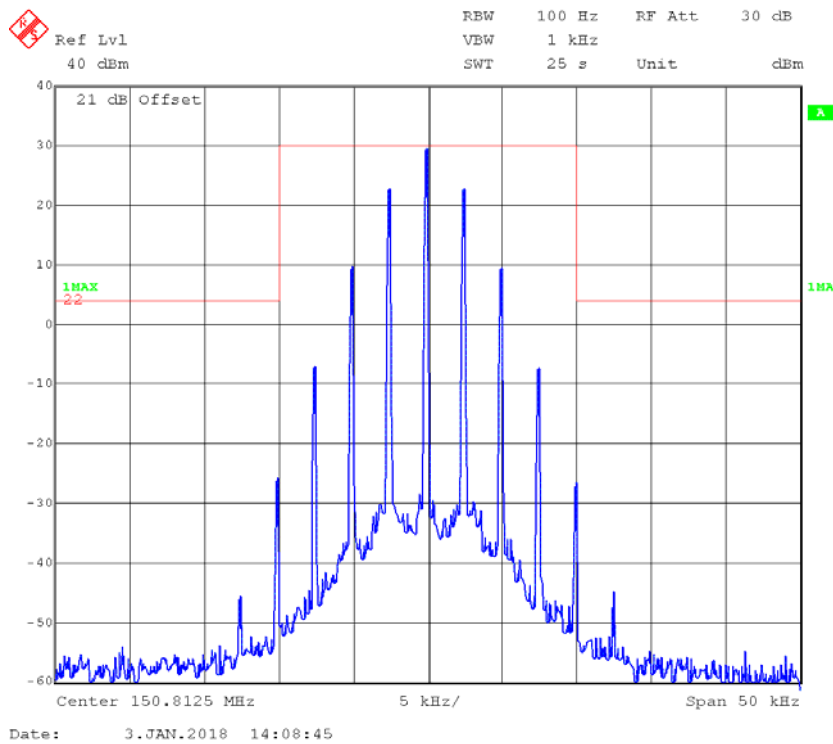


**FM,25kHz,High Power - Frequency 150.8125 MHz: 99% Occupied & 26 dB Bandwidth**

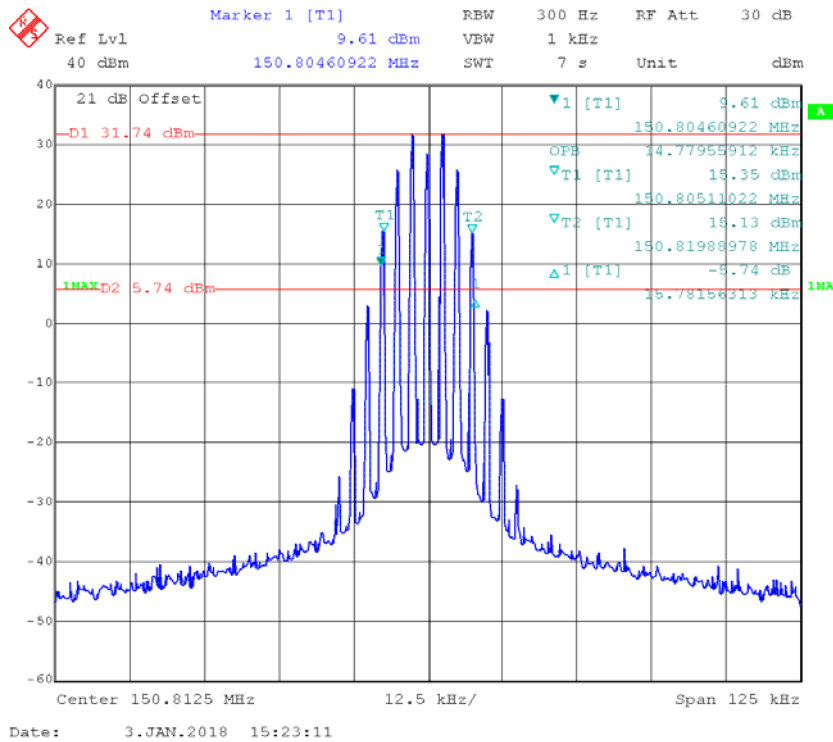


**Emission Mask D-§22.359**

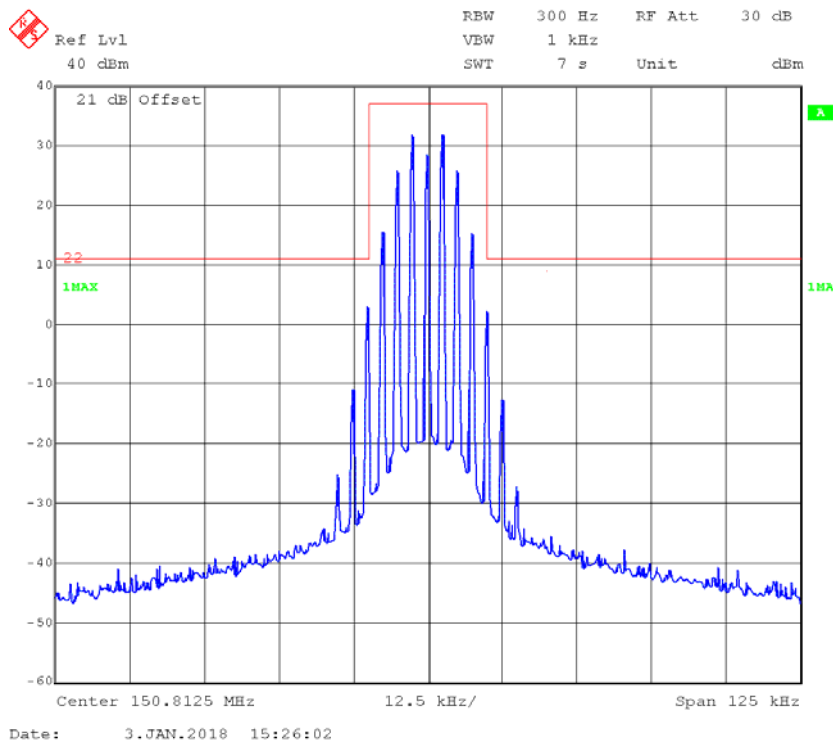


**FM,25kHz,Low Power - Frequency 150.8125 MHz: 99% Occupied & 26 dB Bandwidth**

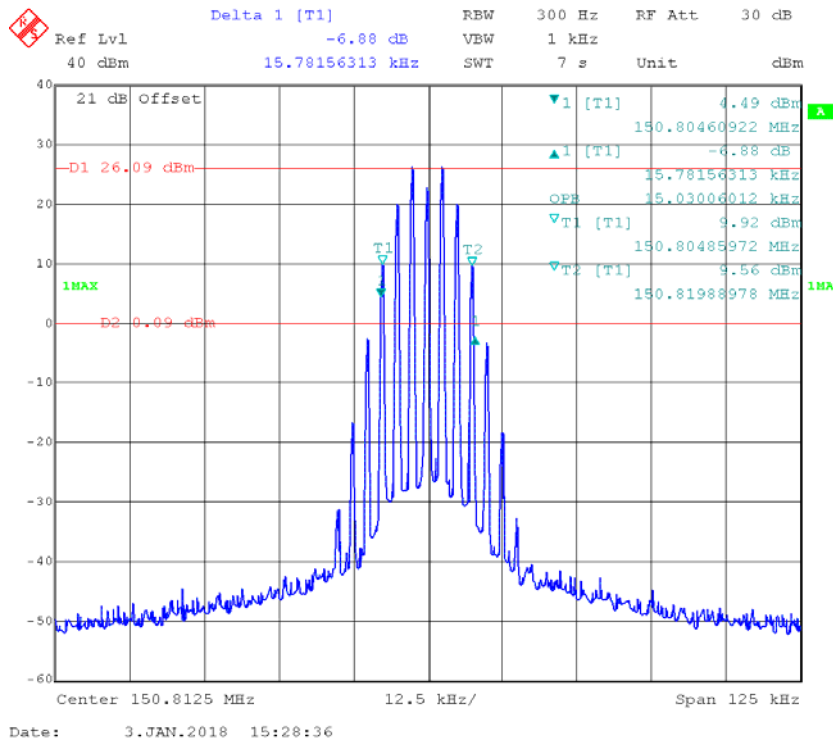


**Emission Mask D-§22.359**

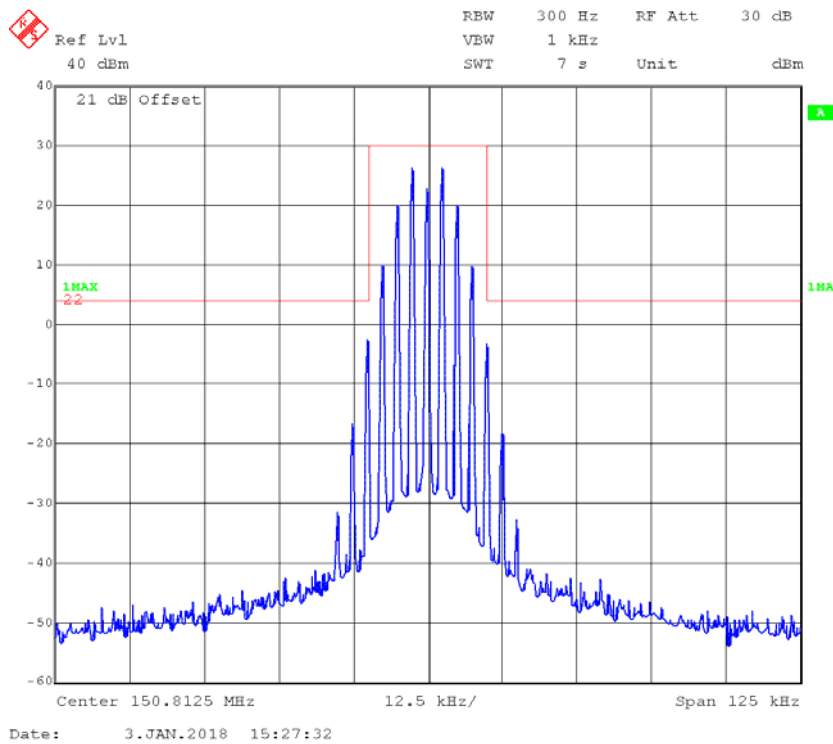


**4FSK,12.5kHz,High Power - Frequency 150.8125 MHz: 99% Occupied & 26 dB Bandwidth**

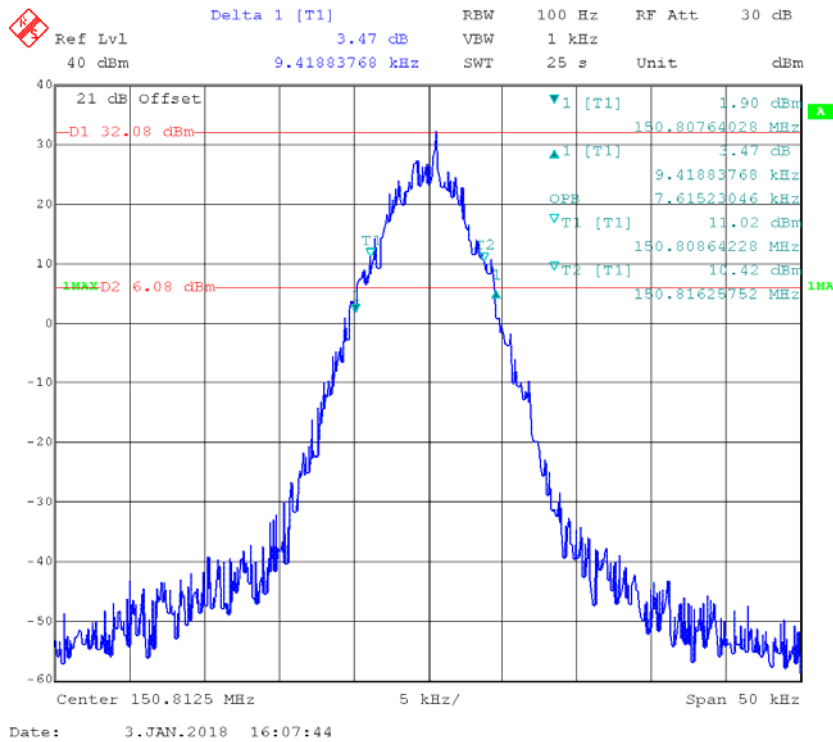


**Emission Mask D-§22.359**

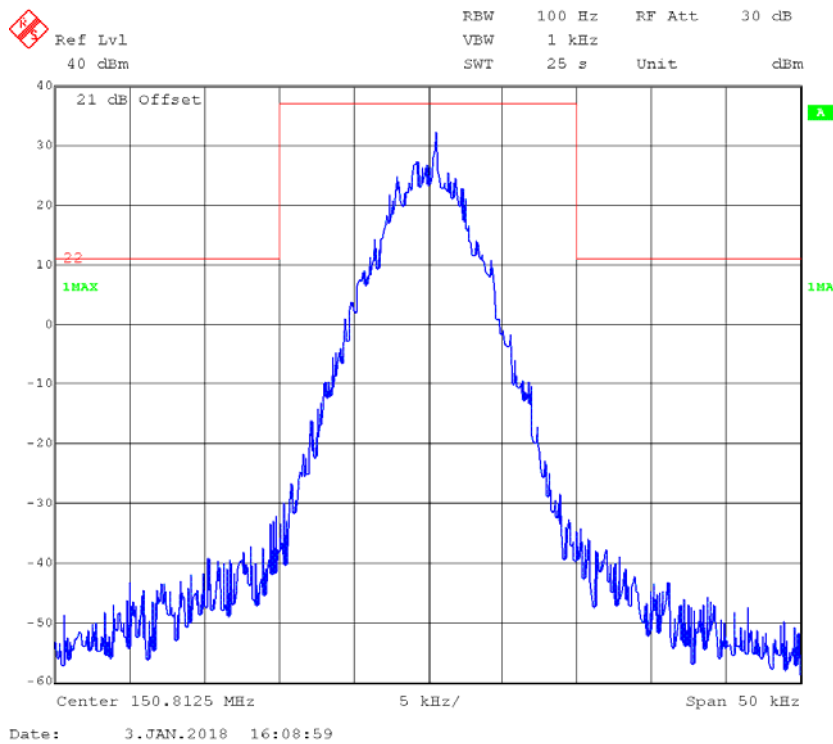

**4FSK,12.5kHz,Low Power - Frequency 150.8125 MHz: 99% Occupied & 26 dB Bandwidth**

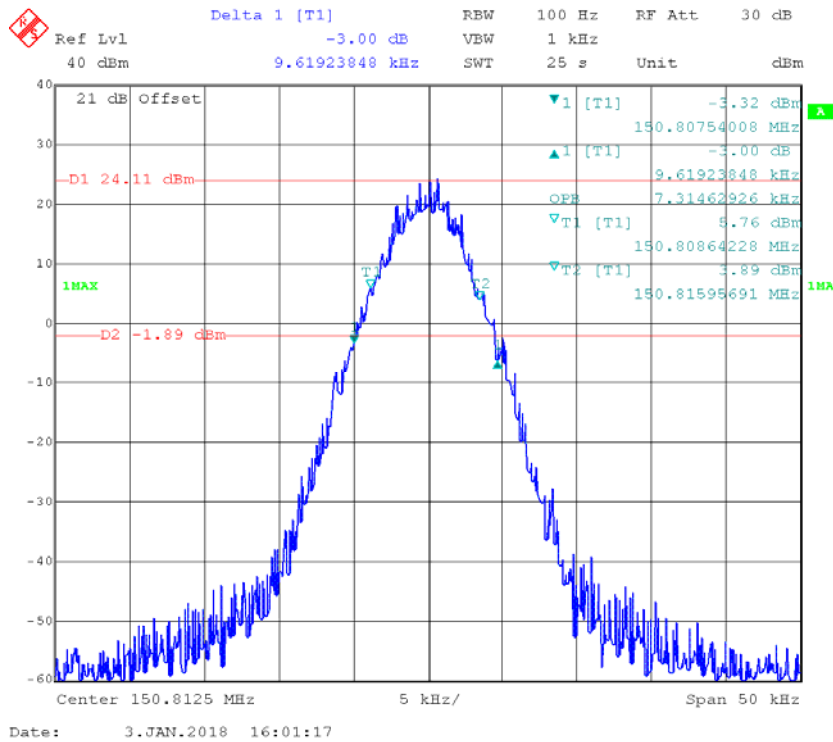

**Emission Mask D-§22.359**

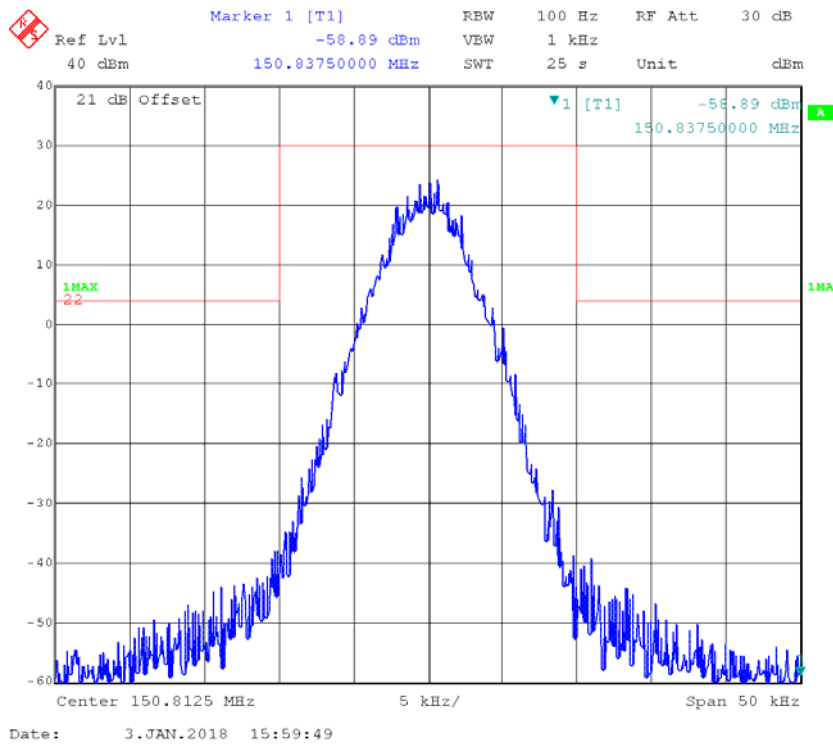

## **FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

---

### **Applicable Standard**

FCC §2.1051, §22.861, §74.462, §80.211, and §90.210

### **Test Procedure**

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### **Test Data**

#### **Environmental Conditions**

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 25.9~26.3 °C    |
| <b>Relative Humidity:</b> | 41~44 %         |
| <b>ATM Pressure:</b>      | 100.8~101.1 kPa |

*The testing was performed by Tiago Huang from 2018-01-03 to 2018-01- 05.*


*Test Mode: Transmitting, please refer to the following plots.*




**Part 90,  
12.5kHz,FM, High power:**

**30MHz – 1 GHz, Channel Spacing 12.5 kHz, 155.7525 MHz**


Fund.test

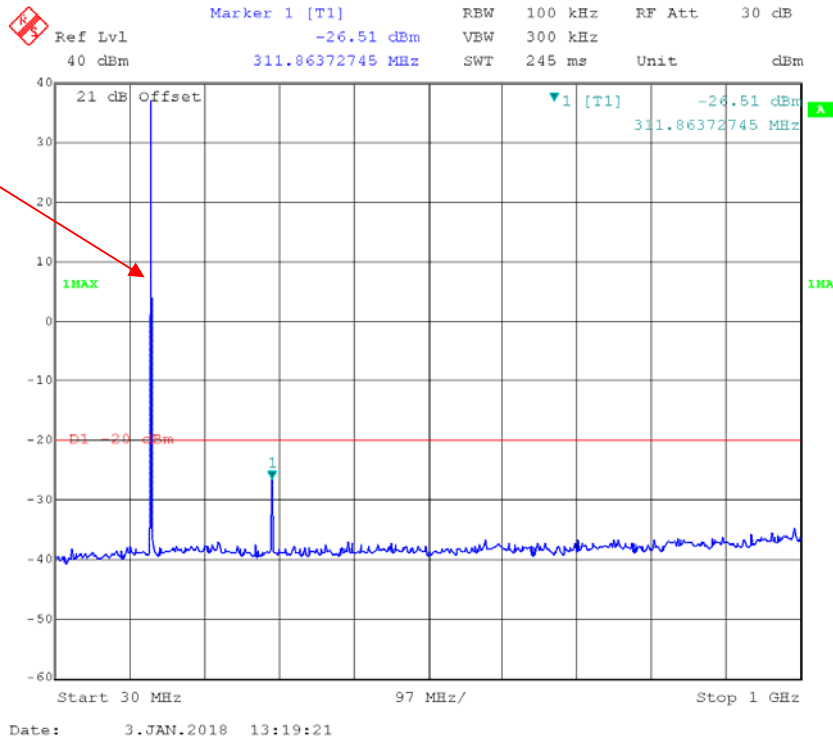


**1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 155.7525 MHz**

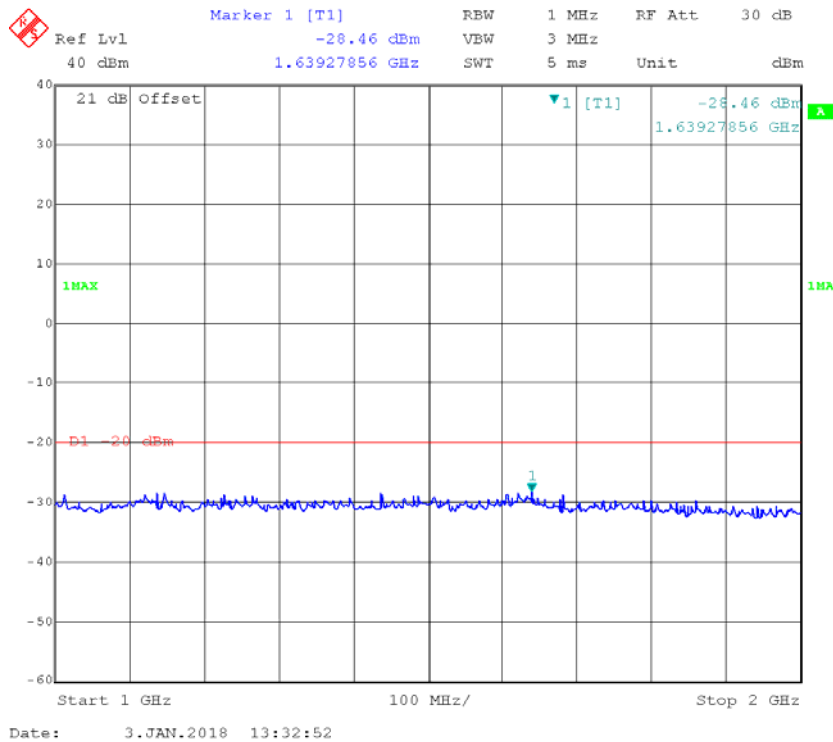

**12.5kHz, 4FSK, High power:  
30MHz – 1 GHz, Channel Spacing 12.5 kHz, 155.7525 MHz**

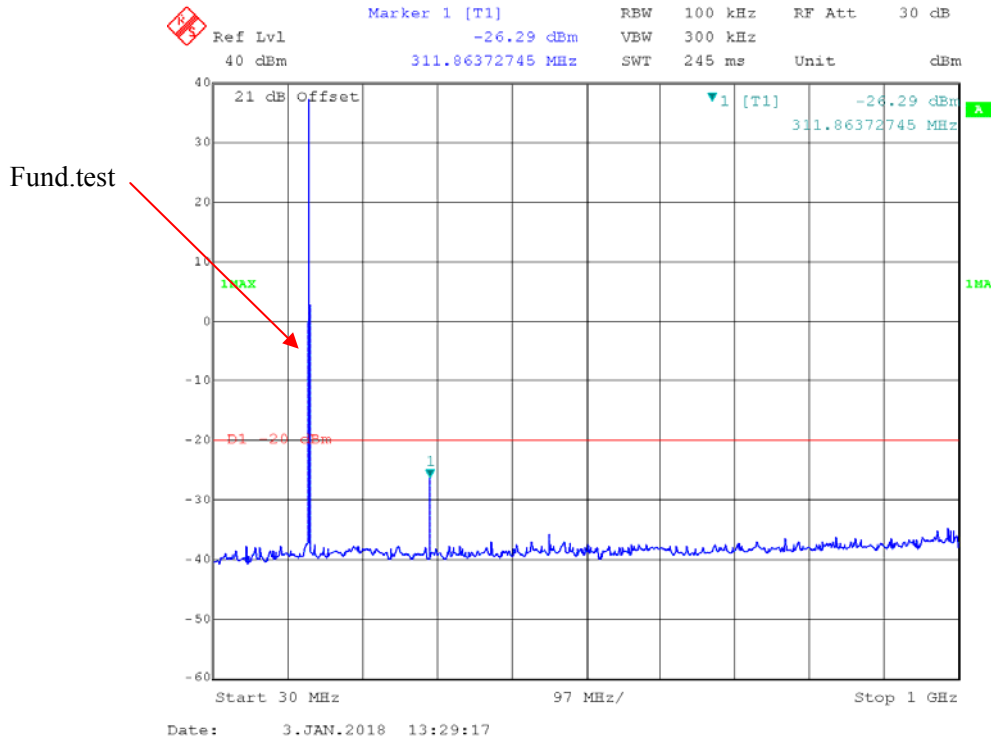


**1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 155.7525 MHz**

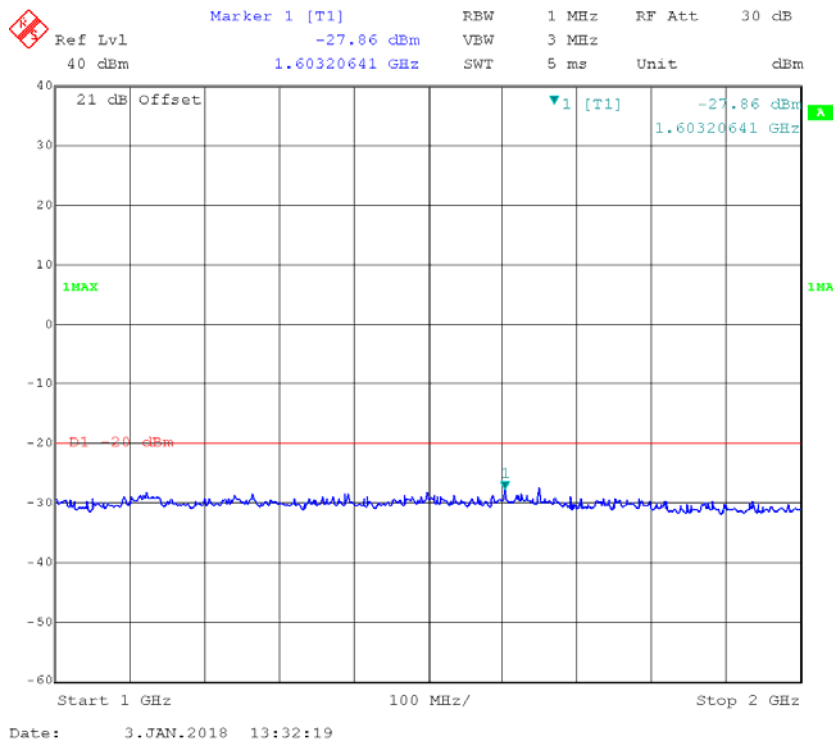


**Part 80,**

**25kHz, FM, High power:**

**30MHz – 1 GHz, Channel Spacing 25 kHz, 154.0125 MHz**

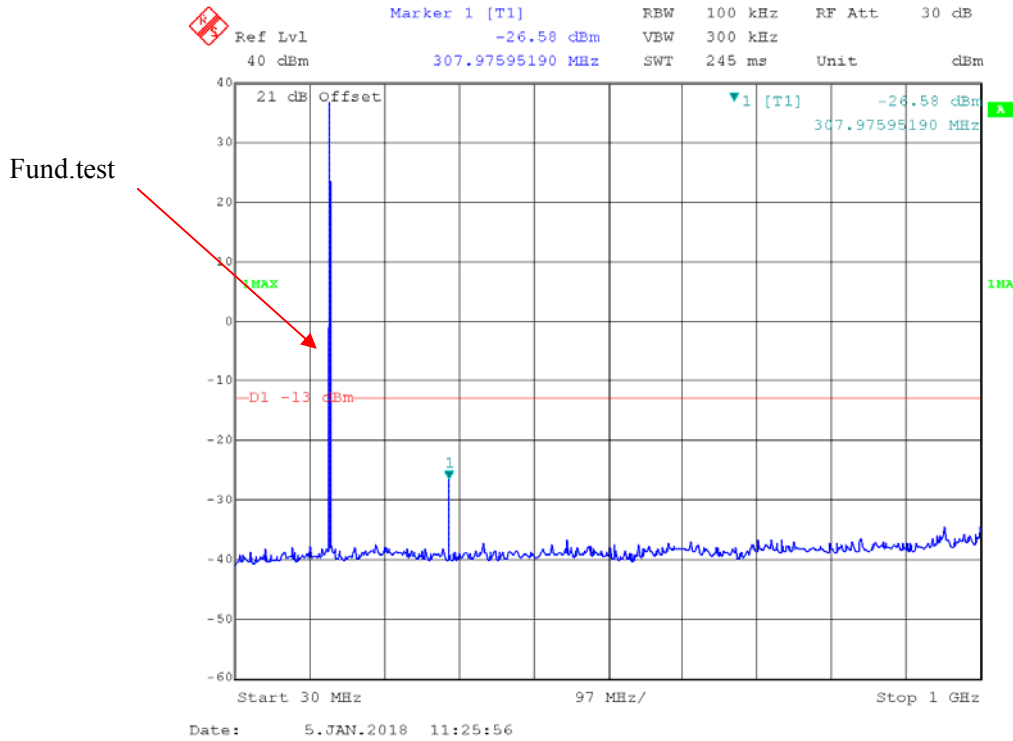


**1 GHz – 2 GHz, Channel Spacing 25 kHz, 154.0125 MHz**

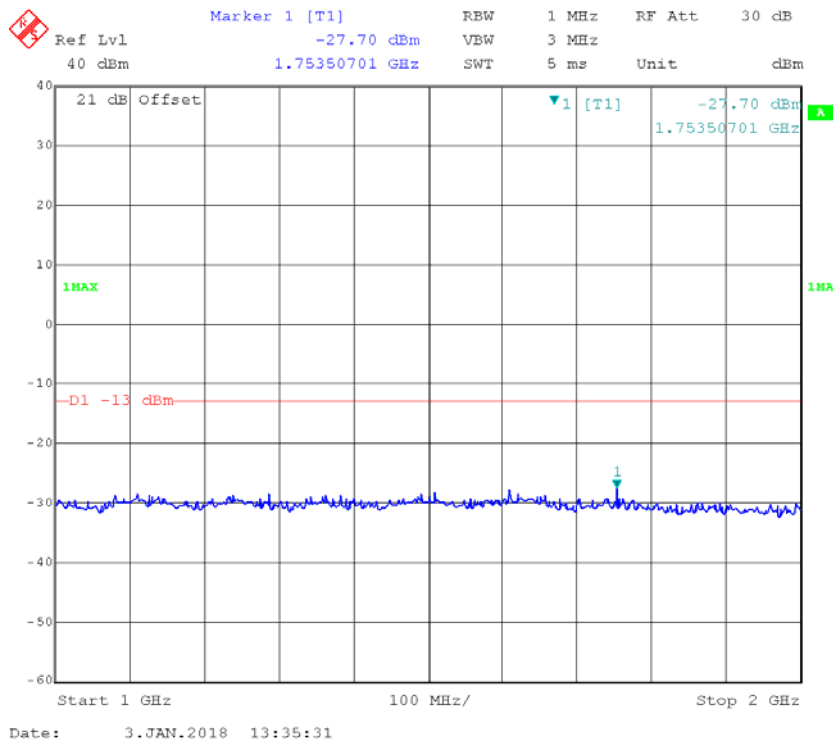


**Part 74,  
12.5kHz, FM, High power:**

**30MHz – 1 GHz, Channel Spacing 12.5 kHz, 161.1 MHz**

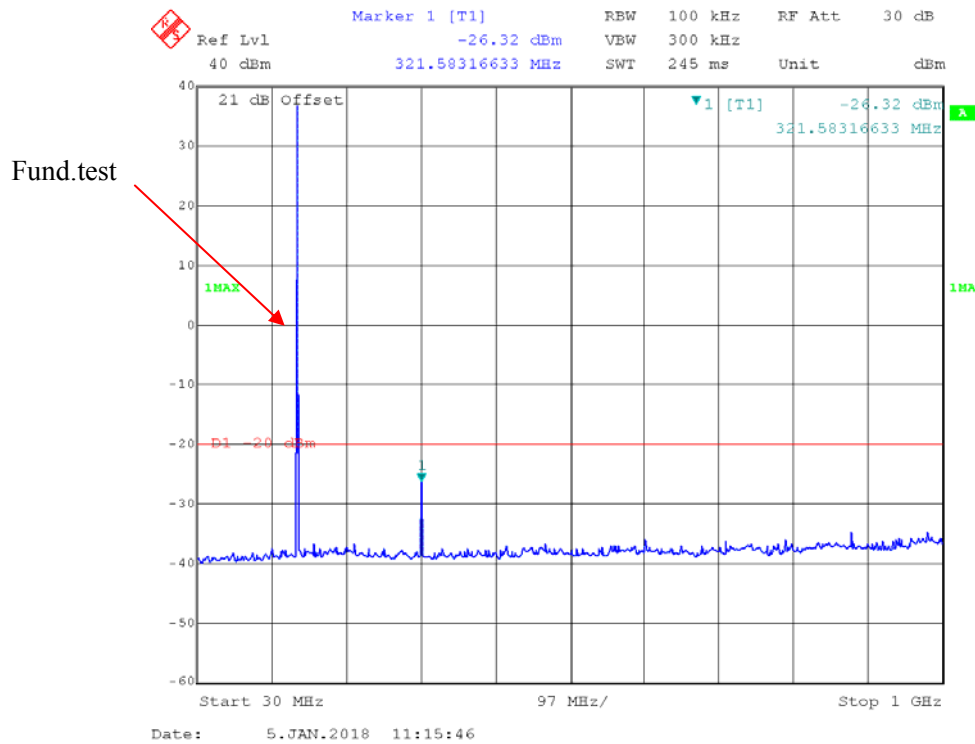


**1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 161.1 MHz**

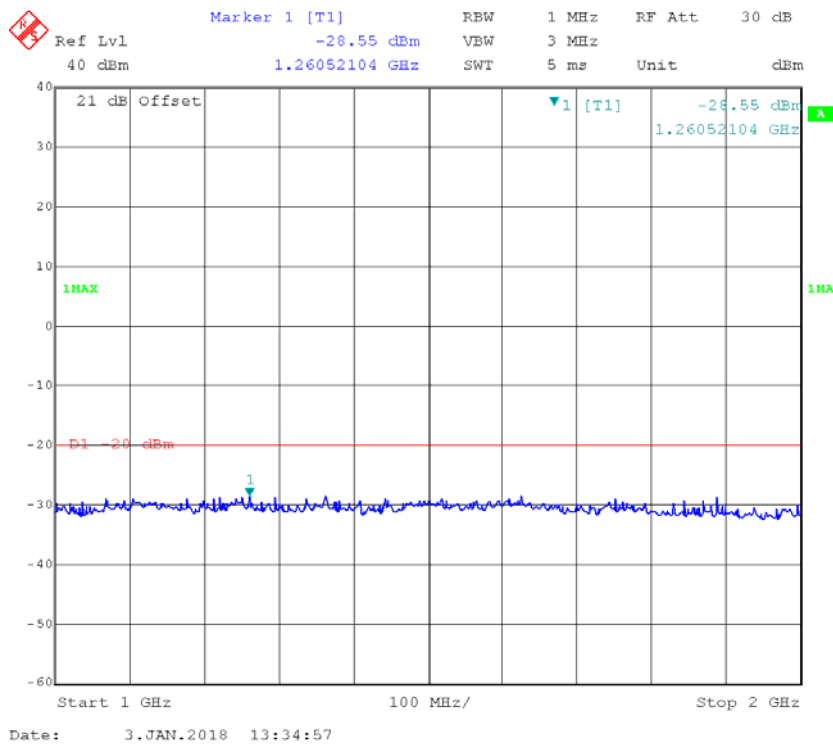


**25kHz, FM, High power:**


**30MHz – 1 GHz, Channel Spacing 25 kHz, 161.1 MHz**

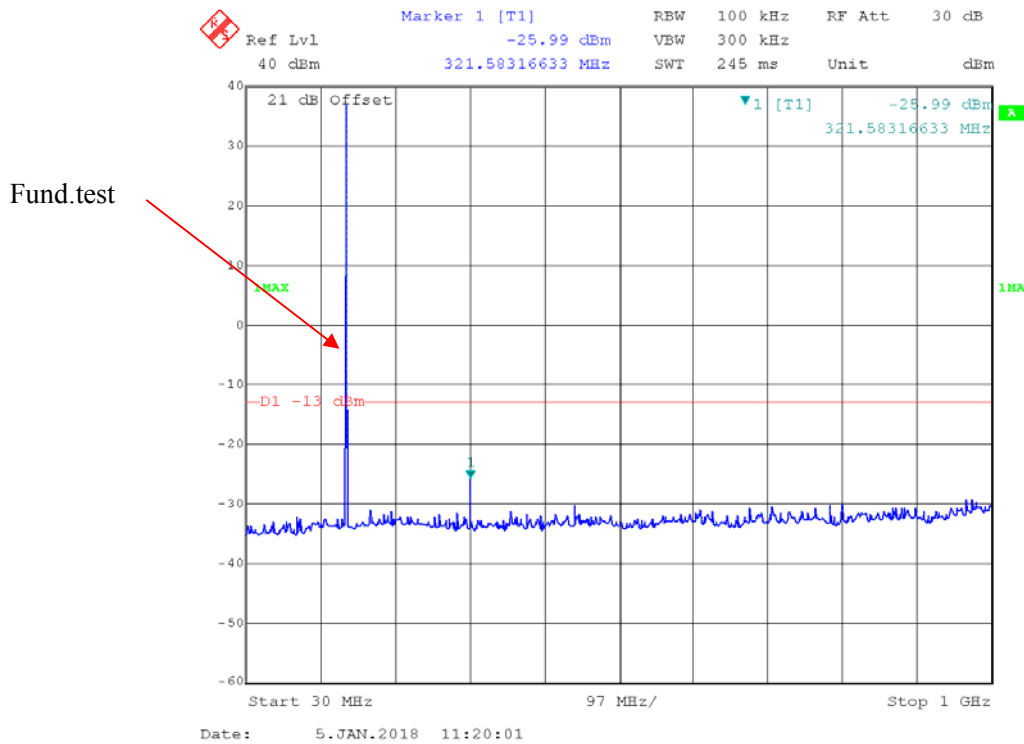


**1 GHz – 2 GHz, Channel Spacing 25 kHz, 161.1 MHz**

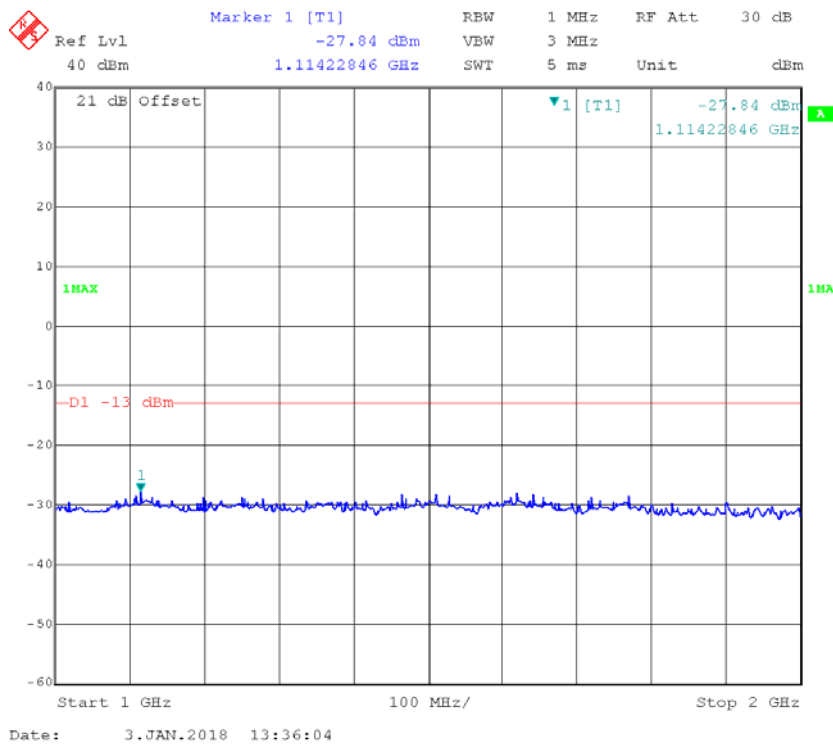

**12.5kHz, 4FSK, High power:  
30MHz – 1 GHz, Channel Spacing 12.5 kHz, 161.1 MHz**

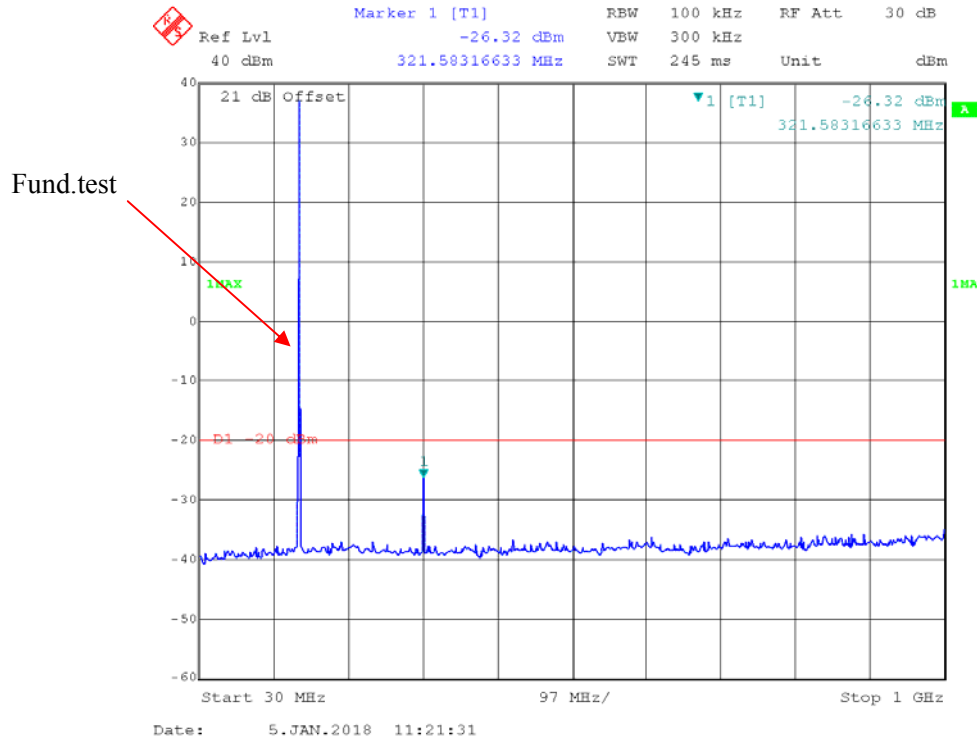

**1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 161.1 MHz**

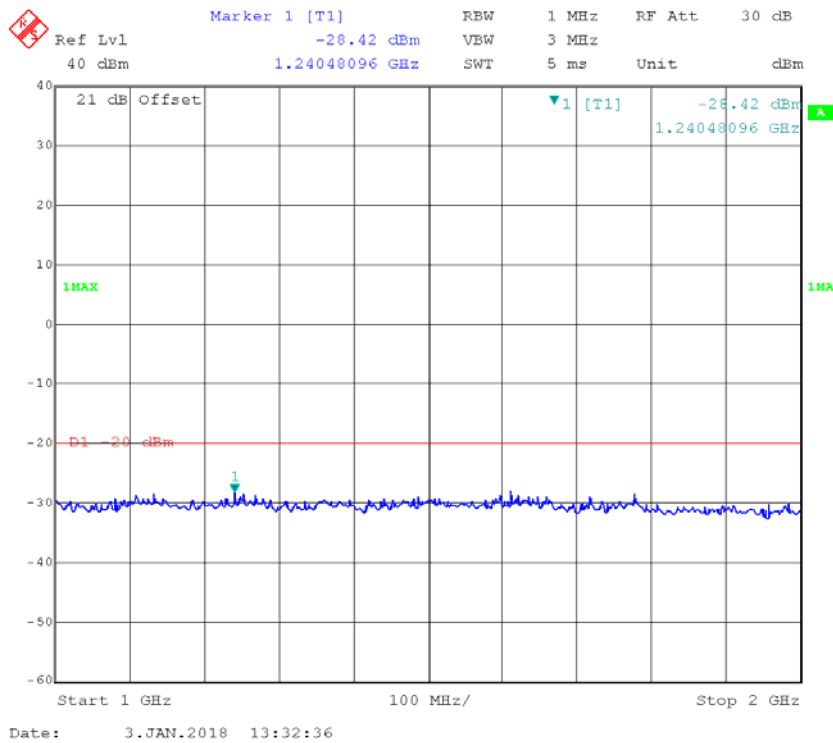





**25kHz,FM, High power:**

**30MHz – 1 GHz, Channel Spacing 25 kHz, 150.8125 MHz**

Fund.test

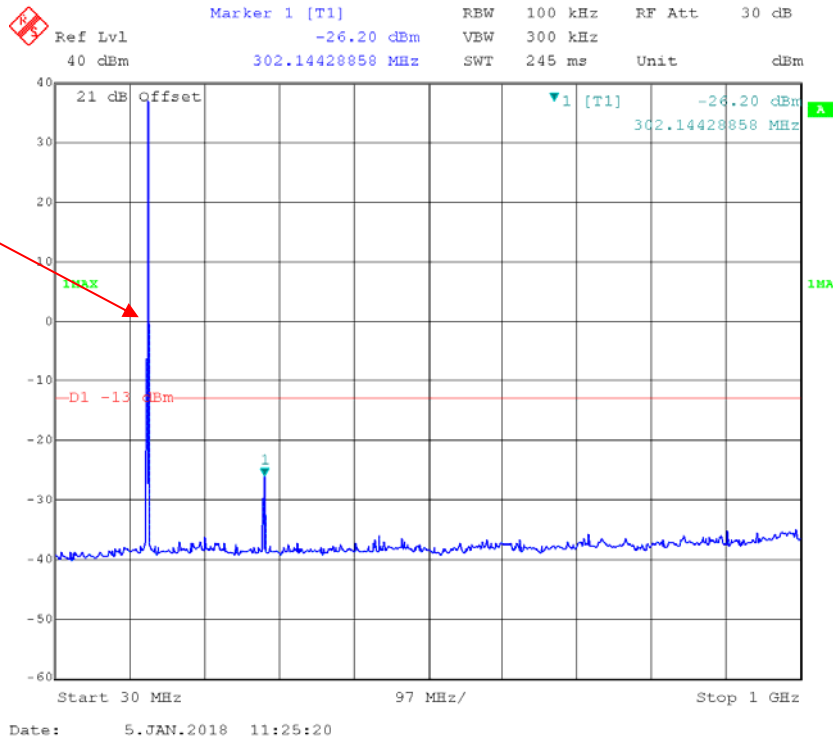


**1 GHz – 2 GHz, Channel Spacing 25 kHz, 150.8125 MHz**

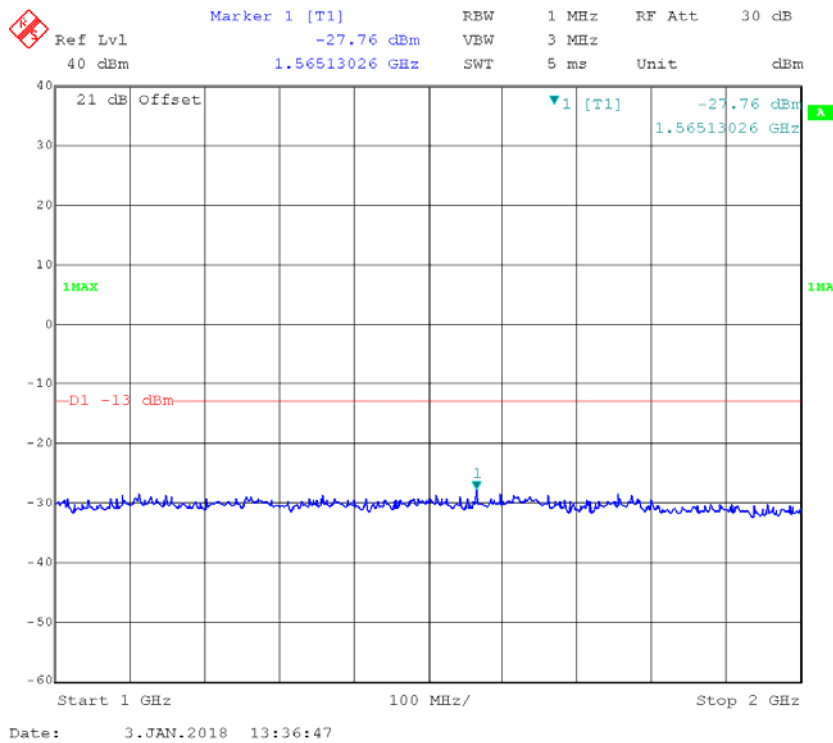




**12.5kHz, 4FSK, High power:  
30MHz – 1 GHz, Channel Spacing 12.5 kHz, 150.8125 MHz**

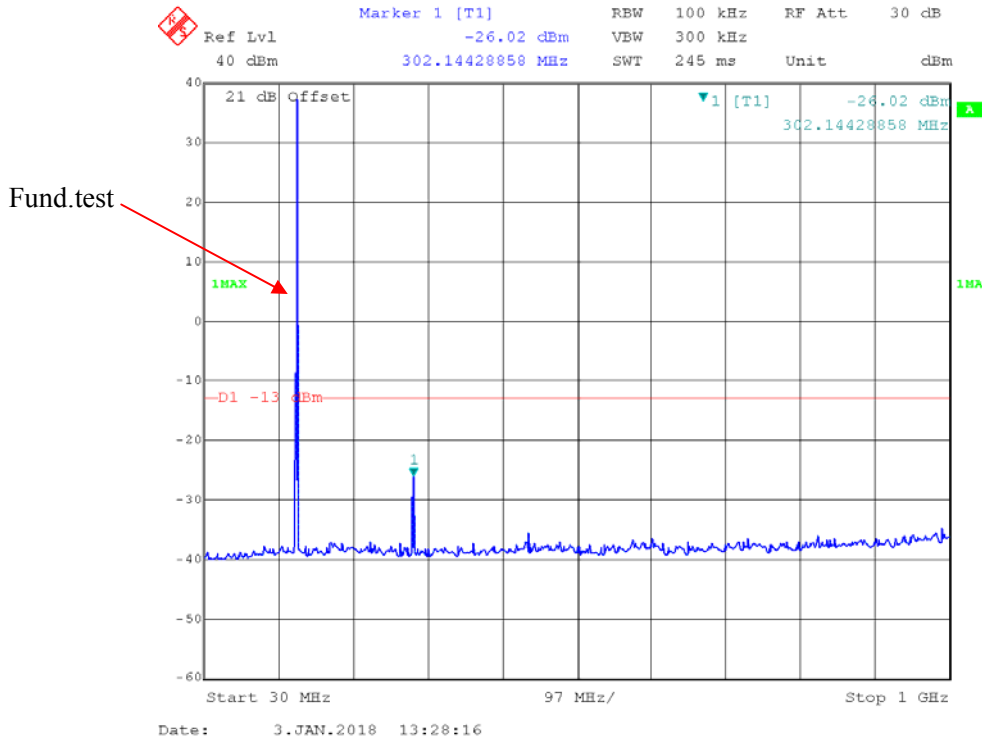

**1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 150.8125 MHz**

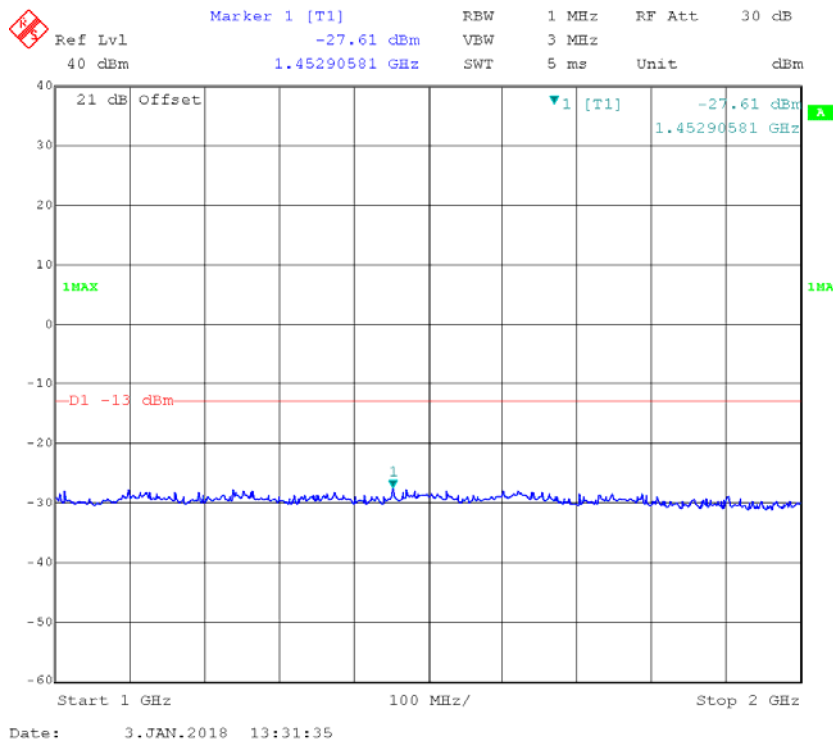

## FCC §2.1053 & §22.861 & §74.462 & §80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard

FCC §2.1053, §22.861, §74.462, §80.211 and §90.210

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

### Test Data

#### Environmental Conditions

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 25.8~26.8 °C    |
| <b>Relative Humidity:</b> | 30.6~30.8 %     |
| <b>ATM Pressure:</b>      | 101.4~101.5 kPa |

*The testing was performed by Sunny Cen on 2017-12-30 and Steven Zuo on 2017-12-31.*

*Test Mode: Transmitting*

**30MHz - 2GHz:  
Part 90**

| Frequency (MHz)                       | Polar (H/V) | Receiver Reading (dBµV) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                                       |             |                         | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| FM, Frequency: 155.7525MHz-12.5 kHz   |             |                         |                         |                        |                 |                      |             |             |
| 1090.268                              | H           | 61.34                   | -52.2                   | 7.4                    | 1               | -45.8                | -20.0       | 25.8        |
| 1090.268                              | V           | 65.44                   | -48.5                   | 7.4                    | 1               | -42.1                | -20.0       | 22.1        |
| 1246.020                              | H           | 66.26                   | -46.8                   | 7.8                    | 1.1             | -40.1                | -20.0       | 20.1        |
| 1246.020                              | V           | 64.43                   | -49.6                   | 7.8                    | 1.1             | -42.9                | -20.0       | 22.9        |
| 1401.773                              | H           | 51.43                   | -61.8                   | 9.0                    | 1.2             | -54.0                | -20.0       | 34.0        |
| 1401.773                              | V           | 53.31                   | -60.5                   | 9.0                    | 1.2             | -52.7                | -20.0       | 32.7        |
| 1557.525                              | H           | 59.35                   | -55.6                   | 9.8                    | 1               | -46.8                | -20.0       | 26.8        |
| 1557.525                              | V           | 61.05                   | -54.3                   | 9.8                    | 1               | -45.5                | -20.0       | 25.5        |
| 311.505                               | H           | 41.44                   | -43.2                   | 0.0                    | 0.5             | -43.7                | -20.0       | 23.7        |
| 311.505                               | V           | 44.20                   | -38.7                   | 0.0                    | 0.5             | -39.2                | -20.0       | 19.2        |
| 467.258                               | H           | 41.44                   | -39.8                   | 0.0                    | 0.7             | -40.5                | -20.0       | 20.5        |
| 467.258                               | V           | 43.53                   | -34.7                   | 0.0                    | 0.7             | -35.4                | -20.0       | 15.4        |
| 623.010                               | H           | 35.33                   | -43.7                   | 0.0                    | 0.8             | -44.5                | -20.0       | 24.5        |
| 623.010                               | V           | 37.66                   | -38.8                   | 0.0                    | 0.8             | -39.6                | -20.0       | 19.6        |
| 778.763                               | H           | 33.08                   | -42.5                   | 0.0                    | 0.9             | -43.4                | -20.0       | 23.4        |
| 778.763                               | V           | 36.61                   | -36.1                   | 0.0                    | 0.9             | -37.0                | -20.0       | 17.0        |
| 934.515                               | H           | 35.28                   | -38.2                   | 0.0                    | 1.1             | -39.3                | -20.0       | 19.3        |
| 934.515                               | V           | 36.14                   | -34                     | 0.0                    | 1.1             | -35.1                | -20.0       | 15.1        |
| 4FSK, Frequency: 155.7525MHz-12.5 kHz |             |                         |                         |                        |                 |                      |             |             |
| 1090.268                              | H           | 61.18                   | -52.3                   | 7.4                    | 1               | -45.9                | -20.0       | 25.9        |
| 1090.268                              | V           | 65.13                   | -48.8                   | 7.4                    | 1               | -42.4                | -20.0       | 22.4        |
| 1246.020                              | H           | 64.48                   | -48.6                   | 7.8                    | 1.1             | -41.9                | -20.0       | 21.9        |
| 1246.020                              | V           | 52.81                   | -61.3                   | 7.8                    | 1.1             | -54.6                | -20.0       | 34.6        |
| 1401.773                              | H           | 51.29                   | -61.9                   | 9.0                    | 1.2             | -54.1                | -20.0       | 34.1        |
| 1401.773                              | V           | 53.52                   | -60.3                   | 9.0                    | 1.2             | -52.5                | -20.0       | 32.5        |
| 1557.525                              | H           | 59.57                   | -55.4                   | 9.8                    | 1               | -46.6                | -20.0       | 26.6        |
| 1557.525                              | V           | 60.73                   | -54.6                   | 9.8                    | 1               | -45.8                | -20.0       | 25.8        |
| 311.505                               | H           | 43.82                   | -40.8                   | 0.0                    | 0.5             | -41.3                | -20.0       | 21.3        |
| 311.505                               | V           | 47.13                   | -35.7                   | 0.0                    | 0.5             | -36.2                | -20.0       | 16.2        |
| 467.258                               | H           | 42.50                   | -38.7                   | 0.0                    | 0.7             | -39.4                | -20.0       | 19.4        |
| 467.258                               | V           | 45.45                   | -32.8                   | 0.0                    | 0.7             | -33.5                | -20.0       | 13.5        |
| 623.010                               | H           | 42.94                   | -36.1                   | 0.0                    | 0.8             | -36.9                | -20.0       | 16.9        |
| 623.010                               | V           | 46.99                   | -29.5                   | 0.0                    | 0.8             | -30.3                | -20.0       | 10.3        |
| 778.763                               | H           | 38.45                   | -37.1                   | 0.0                    | 0.9             | -38.0                | -20.0       | 18.0        |
| 778.763                               | V           | 42.16                   | -30.5                   | 0.0                    | 0.9             | -31.4                | -20.0       | 11.4        |
| 934.515                               | H           | 35.98                   | -37.5                   | 0.0                    | 1.1             | -38.6                | -20.0       | 18.6        |
| 934.515                               | V           | 41.51                   | -28.6                   | 0.0                    | 1.1             | -29.7                | -20.0       | 9.7         |

**Part 80**

| Frequency (MHz)                   | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                                   |             |                         | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| FM, Frequency: 154.0125MHz-25 kHz |             |                         |                         |                        |                 |                      |             |             |
| 1078.088                          | H           | 60.53                   | -53                     | 7.5                    | 1               | -46.5                | -13.0       | 33.5        |
| 1078.088                          | V           | 59.87                   | -54.1                   | 7.5                    | 1               | -47.6                | -13.0       | 34.6        |
| 1232.100                          | H           | 54.37                   | -58.6                   | 7.6                    | 1.1             | -52.1                | -13.0       | 39.1        |
| 1232.100                          | V           | 53.68                   | -60.3                   | 7.6                    | 1.1             | -53.8                | -13.0       | 40.8        |
| 1386.113                          | H           | 54.26                   | -59                     | 8.9                    | 1.2             | -51.3                | -13.0       | 38.3        |
| 1386.113                          | V           | 53.34                   | -60.6                   | 8.9                    | 1.2             | -52.9                | -13.0       | 39.9        |
| 1540.125                          | H           | 51.25                   | -63.8                   | 9.7                    | 1.1             | -55.2                | -13.0       | 42.2        |
| 1540.125                          | V           | 49.98                   | -65.4                   | 9.7                    | 1.1             | -56.8                | -13.0       | 43.8        |
| 308.025                           | H           | 42.02                   | -42.7                   | 0.0                    | 0.5             | -43.2                | -13.0       | 30.2        |
| 308.025                           | V           | 44.02                   | -38.9                   | 0.0                    | 0.5             | -39.4                | -13.0       | 26.4        |
| 462.038                           | H           | 40.17                   | -41.2                   | 0.0                    | 0.7             | -41.9                | -13.0       | 28.9        |
| 462.038                           | V           | 43.19                   | -35.2                   | 0.0                    | 0.7             | -35.9                | -13.0       | 22.9        |
| 616.050                           | H           | 35.46                   | -43.7                   | 0.0                    | 0.8             | -44.5                | -13.0       | 31.5        |
| 616.050                           | V           | 39.32                   | -37.4                   | 0.0                    | 0.8             | -38.2                | -13.0       | 25.2        |
| 770.063                           | H           | 34.16                   | -41.6                   | 0.0                    | 0.9             | -42.5                | -13.0       | 29.5        |
| 770.063                           | V           | 35.49                   | -37.4                   | 0.0                    | 0.9             | -38.3                | -13.0       | 25.3        |
| 924.075                           | H           | 34.40                   | -39.3                   | 0.0                    | 1.1             | -40.4                | -13.0       | 27.4        |
| 924.075                           | V           | 36.65                   | -33.8                   | 0.0                    | 1.1             | -34.9                | -13.0       | 21.9        |

**Part 74**

| Frequency (MHz)                    | Polar (H/V) | Receiver Reading (dBµV) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                                    |             |                         | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| FM, Frequency: 161.1MHz-12.5 kHz   |             |                         |                         |                        |                 |                      |             |             |
| 1127.700                           | H           | 61.46                   | -51.8                   | 7.4                    | 1               | -45.4                | -20.0       | 25.4        |
| 1127.700                           | V           | 65.52                   | -48.3                   | 7.4                    | 1               | -41.9                | -20.0       | 21.9        |
| 1288.800                           | H           | 66.23                   | -47.3                   | 8.2                    | 1.2             | -40.3                | -20.0       | 20.3        |
| 1288.800                           | V           | 64.32                   | -50.1                   | 8.2                    | 1.2             | -43.1                | -20.0       | 23.1        |
| 1449.900                           | H           | 51.35                   | -62.8                   | 9.2                    | 1.3             | -54.9                | -20.0       | 34.9        |
| 1449.900                           | V           | 53.44                   | -61.1                   | 9.2                    | 1.3             | -53.2                | -20.0       | 33.2        |
| 1611.000                           | H           | 59.47                   | -55.2                   | 10.2                   | 0.7             | -45.7                | -20.0       | 25.7        |
| 1611.000                           | V           | 60.91                   | -54.4                   | 10.2                   | 0.7             | -44.9                | -20.0       | 24.9        |
| 322.200                            | H           | 43.29                   | -41.1                   | 0.0                    | 0.5             | -41.6                | -20.0       | 21.6        |
| 322.200                            | V           | 48.07                   | -34.5                   | 0.0                    | 0.5             | -35.0                | -20.0       | 15.0        |
| 483.300                            | H           | 41.77                   | -39                     | 0.0                    | 0.7             | -39.7                | -20.0       | 19.7        |
| 483.300                            | V           | 45.95                   | -31.8                   | 0.0                    | 0.7             | -32.5                | -20.0       | 12.5        |
| 644.400                            | H           | 42.37                   | -36.1                   | 0.0                    | 0.8             | -36.9                | -20.0       | 16.9        |
| 644.400                            | V           | 46.76                   | -29.2                   | 0.0                    | 0.8             | -30.0                | -20.0       | 10.0        |
| 805.500                            | H           | 40.01                   | -35.2                   | 0.0                    | 0.9             | -36.1                | -20.0       | 16.1        |
| 805.500                            | V           | 43.75                   | -28.4                   | 0.0                    | 0.9             | -29.3                | -20.0       | 9.3         |
| 966.600                            | H           | 36.65                   | -35.9                   | 0.0                    | 1.2             | -37.1                | -20.0       | 17.1        |
| 966.600                            | V           | 40.65                   | -28.6                   | 0.0                    | 1.2             | -29.8                | -20.0       | 9.8         |
| 4FSK, Frequency: 161.1MHz-12.5 kHz |             |                         |                         |                        |                 |                      |             |             |
| 1127.700                           | H           | 61.27                   | -52                     | 7.4                    | 1               | -45.6                | -20.0       | 25.6        |
| 1127.700                           | V           | 65.18                   | -48.7                   | 7.4                    | 1               | -42.3                | -20.0       | 22.3        |
| 1288.800                           | H           | 64.54                   | -48.9                   | 8.2                    | 1.2             | -41.9                | -20.0       | 21.9        |
| 1288.800                           | V           | 52.68                   | -61.7                   | 8.2                    | 1.2             | -54.7                | -20.0       | 34.7        |
| 1449.900                           | H           | 51.21                   | -63                     | 9.2                    | 1.3             | -55.1                | -20.0       | 35.1        |
| 1449.900                           | V           | 53.63                   | -60.9                   | 9.2                    | 1.3             | -53.0                | -20.0       | 33.0        |
| 1611.000                           | H           | 59.72                   | -55                     | 10.2                   | 0.7             | -45.5                | -20.0       | 25.5        |
| 1611.000                           | V           | 60.86                   | -54.5                   | 10.2                   | 0.7             | -45.0                | -20.0       | 25.0        |
| 322.200                            | H           | 41.05                   | -43.4                   | 0.0                    | 0.5             | -43.9                | -20.0       | 23.9        |
| 322.200                            | V           | 43.82                   | -38.7                   | 0.0                    | 0.5             | -39.2                | -20.0       | 19.2        |
| 483.300                            | H           | 40.46                   | -40.3                   | 0.0                    | 0.7             | -41.0                | -20.0       | 21.0        |
| 483.300                            | V           | 43.16                   | -34.6                   | 0.0                    | 0.7             | -35.3                | -20.0       | 15.3        |
| 644.400                            | H           | 34.76                   | -43.7                   | 0.0                    | 0.8             | -44.5                | -20.0       | 24.5        |
| 644.400                            | V           | 38.17                   | -37.8                   | 0.0                    | 0.8             | -38.6                | -20.0       | 18.6        |
| 805.500                            | H           | 34.09                   | -41.1                   | 0.0                    | 0.9             | -42.0                | -20.0       | 22.0        |
| 805.500                            | V           | 35.16                   | -37                     | 0.0                    | 0.9             | -37.9                | -20.0       | 17.9        |
| 966.600                            | H           | 34.70                   | -37.8                   | 0.0                    | 1.2             | -39.0                | -20.0       | 19.0        |
| 966.600                            | V           | 37.49                   | -31.8                   | 0.0                    | 1.2             | -33.0                | -20.0       | 13.0        |

| Frequency (MHz)                | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                                |             |                         | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| FM, Frequency: 161.1MHz-25 kHz |             |                         |                         |                        |                 |                      |             |             |
| 1127.700                       | H           | 61.11                   | -52.1                   | 7.4                    | 1               | -45.7                | -13.0       | 32.7        |
| 1127.700                       | V           | 65.17                   | -48.7                   | 7.4                    | 1               | -42.3                | -13.0       | 29.3        |
| 1288.800                       | H           | 54.24                   | -59.2                   | 8.2                    | 1.2             | -52.2                | -13.0       | 39.2        |
| 1288.800                       | V           | 52.71                   | -61.7                   | 8.2                    | 1.2             | -54.7                | -13.0       | 41.7        |
| 1449.900                       | H           | 51.52                   | -62.7                   | 9.2                    | 1.3             | -54.8                | -13.0       | 41.8        |
| 1449.900                       | V           | 53.52                   | -61                     | 9.2                    | 1.3             | -53.1                | -13.0       | 40.1        |
| 1611.000                       | H           | 59.42                   | -55.3                   | 10.2                   | 0.7             | -45.8                | -13.0       | 32.8        |
| 1611.000                       | V           | 60.61                   | -54.7                   | 10.2                   | 0.7             | -45.2                | -13.0       | 32.2        |
| 322.200                        | H           | 43.80                   | -40.6                   | 0.0                    | 0.5             | -41.1                | -13.0       | 28.1        |
| 322.200                        | V           | 48.02                   | -34.5                   | 0.0                    | 0.5             | -35.0                | -13.0       | 22.0        |
| 483.300                        | H           | 42.44                   | -38.4                   | 0.0                    | 0.7             | -39.1                | -13.0       | 26.1        |
| 483.300                        | V           | 44.48                   | -33.3                   | 0.0                    | 0.7             | -34.0                | -13.0       | 21.0        |
| 644.400                        | H           | 43.50                   | -34.9                   | 0.0                    | 0.8             | -35.7                | -13.0       | 22.7        |
| 644.400                        | V           | 45.36                   | -30.6                   | 0.0                    | 0.8             | -31.4                | -13.0       | 18.4        |
| 805.500                        | H           | 39.99                   | -35.2                   | 0.0                    | 0.9             | -36.1                | -13.0       | 23.1        |
| 805.500                        | V           | 42.36                   | -29.8                   | 0.0                    | 0.9             | -30.7                | -13.0       | 17.7        |
| 966.600                        | H           | 35.13                   | -37.4                   | 0.0                    | 1.2             | -38.6                | -13.0       | 25.6        |
| 966.600                        | V           | 40.43                   | -28.8                   | 0.0                    | 1.2             | -30.0                | -13.0       | 17.0        |

**Part 22**

| Frequency (MHz)                       | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                                       |             |                         | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| FM, Frequency: 150.8125MHz-12.5 kHz   |             |                         |                         |                        |                 |                      |             |             |
| 1055.688                              | H           | 64.57                   | -49                     | 7.6                    | 0.9             | -42.3                | -13.0       | 29.3        |
| 1055.688                              | V           | 67.35                   | -46.7                   | 7.6                    | 0.9             | -40.0                | -13.0       | 27.0        |
| 1206.500                              | H           | 68.12                   | -44.5                   | 7.4                    | 1.1             | -38.2                | -13.0       | 25.2        |
| 1206.500                              | V           | 66.28                   | -47.5                   | 7.4                    | 1.1             | -41.2                | -13.0       | 28.2        |
| 1357.313                              | H           | 51.45                   | -61.9                   | 8.7                    | 1.2             | -54.4                | -13.0       | 41.4        |
| 1357.313                              | V           | 53.48                   | -60.6                   | 8.7                    | 1.2             | -53.1                | -13.0       | 40.1        |
| 1508.125                              | H           | 59.64                   | -55.5                   | 9.5                    | 1.3             | -47.3                | -13.0       | 34.3        |
| 1508.125                              | V           | 60.87                   | -54.4                   | 9.5                    | 1.3             | -46.2                | -13.0       | 33.2        |
| 301.625                               | H           | 43.27                   | -41.6                   | 0.0                    | 0.5             | -42.1                | -13.0       | 29.1        |
| 301.625                               | V           | 47.82                   | -35.3                   | 0.0                    | 0.5             | -35.8                | -13.0       | 22.8        |
| 452.438                               | H           | 42.69                   | -38.9                   | 0.0                    | 0.7             | -39.6                | -13.0       | 26.6        |
| 452.438                               | V           | 45.17                   | -33.5                   | 0.0                    | 0.7             | -34.2                | -13.0       | 21.2        |
| 603.250                               | H           | 43.54                   | -36                     | 0.0                    | 0.8             | -36.8                | -13.0       | 23.8        |
| 603.250                               | V           | 46.27                   | -30.7                   | 0.0                    | 0.8             | -31.5                | -13.0       | 18.5        |
| 754.063                               | H           | 39.57                   | -36.5                   | 0.0                    | 0.9             | -37.4                | -13.0       | 24.4        |
| 754.063                               | V           | 43.28                   | -30                     | 0.0                    | 0.9             | -30.9                | -13.0       | 17.9        |
| 904.875                               | H           | 35.85                   | -38.4                   | 0.0                    | 1.1             | -39.5                | -13.0       | 26.5        |
| 904.875                               | V           | 41.07                   | -29.9                   | 0.0                    | 1.1             | -31.0                | -13.0       | 18.0        |
| 4FSK, Frequency: 150.8125MHz-12.5 kHz |             |                         |                         |                        |                 |                      |             |             |
| 1055.688                              | H           | 61.18                   | -52.4                   | 7.6                    | 0.9             | -45.7                | -13.0       | 32.7        |
| 1055.688                              | V           | 65.53                   | -48.5                   | 7.6                    | 0.9             | -41.8                | -13.0       | 28.8        |
| 1206.500                              | H           | 64.47                   | -48.2                   | 7.4                    | 1.1             | -41.9                | -13.0       | 28.9        |
| 1206.500                              | V           | 52.75                   | -61                     | 7.4                    | 1.1             | -54.7                | -13.0       | 41.7        |
| 1357.313                              | H           | 51.22                   | -62.2                   | 8.7                    | 1.2             | -54.7                | -13.0       | 41.7        |
| 1357.313                              | V           | 53.59                   | -60.5                   | 8.7                    | 1.2             | -53.0                | -13.0       | 40.0        |
| 1508.125                              | H           | 59.48                   | -55.7                   | 9.5                    | 1.3             | -47.5                | -13.0       | 34.5        |
| 1508.125                              | V           | 60.89                   | -54.4                   | 9.5                    | 1.3             | -46.2                | -13.0       | 33.2        |
| 301.625                               | H           | 43.89                   | -40.9                   | 0.0                    | 0.5             | -41.4                | -13.0       | 28.4        |
| 301.625                               | V           | 48.32                   | -34.8                   | 0.0                    | 0.5             | -35.3                | -13.0       | 22.3        |
| 452.438                               | H           | 43.05                   | -38.5                   | 0.0                    | 0.7             | -39.2                | -13.0       | 26.2        |
| 452.438                               | V           | 44.23                   | -34.5                   | 0.0                    | 0.7             | -35.2                | -13.0       | 22.2        |
| 603.250                               | H           | 43.74                   | -35.8                   | 0.0                    | 0.8             | -36.6                | -13.0       | 23.6        |
| 603.250                               | V           | 46.52                   | -30.5                   | 0.0                    | 0.8             | -31.3                | -13.0       | 18.3        |
| 754.063                               | H           | 38.99                   | -37                     | 0.0                    | 0.9             | -37.9                | -13.0       | 24.9        |
| 754.063                               | V           | 42.69                   | -30.6                   | 0.0                    | 0.9             | -31.5                | -13.0       | 18.5        |
| 904.875                               | H           | 35.21                   | -39.1                   | 0.0                    | 1.1             | -40.2                | -13.0       | 27.2        |
| 904.875                               | V           | 41.03                   | -30                     | 0.0                    | 1.1             | -31.1                | -13.0       | 18.1        |

| Frequency (MHz)                   | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                                   |             |                         | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| FM, Frequency: 150.8125MHz-25 kHz |             |                         |                         |                        |                 |                      |             |             |
| 1055.688                          | H           | 61.65                   | -51.9                   | 7.6                    | 0.9             | -45.2                | -13.0       | 32.2        |
| 1055.688                          | V           | 65.38                   | -48.7                   | 7.6                    | 0.9             | -42.0                | -13.0       | 29.0        |
| 1206.500                          | H           | 66.26                   | -46.4                   | 7.4                    | 1.1             | -40.1                | -13.0       | 27.1        |
| 1206.500                          | V           | 64.24                   | -49.5                   | 7.4                    | 1.1             | -43.2                | -13.0       | 30.2        |
| 1357.313                          | H           | 51.38                   | -62                     | 8.7                    | 1.2             | -54.5                | -13.0       | 41.5        |
| 1357.313                          | V           | 53.52                   | -60.6                   | 8.7                    | 1.2             | -53.1                | -13.0       | 40.1        |
| 1508.125                          | H           | 59.67                   | -55.5                   | 9.5                    | 1.3             | -47.3                | -13.0       | 34.3        |
| 1508.125                          | V           | 60.77                   | -54.5                   | 9.5                    | 1.3             | -46.3                | -13.0       | 33.3        |
| 301.625                           | H           | 43.43                   | -41.4                   | 0.0                    | 0.5             | -41.9                | -13.0       | 28.9        |
| 301.625                           | V           | 47.79                   | -35.4                   | 0.0                    | 0.5             | -35.9                | -13.0       | 22.9        |
| 452.438                           | H           | 41.77                   | -39.8                   | 0.0                    | 0.7             | -40.5                | -13.0       | 27.5        |
| 452.438                           | V           | 45.92                   | -32.8                   | 0.0                    | 0.7             | -33.5                | -13.0       | 20.5        |
| 603.250                           | H           | 42.55                   | -37                     | 0.0                    | 0.8             | -37.8                | -13.0       | 24.8        |
| 603.250                           | V           | 46.99                   | -30                     | 0.0                    | 0.8             | -30.8                | -13.0       | 17.8        |
| 754.063                           | H           | 39.23                   | -36.8                   | 0.0                    | 0.9             | -37.7                | -13.0       | 24.7        |
| 754.063                           | V           | 42.34                   | -30.9                   | 0.0                    | 0.9             | -31.8                | -13.0       | 18.8        |
| 904.875                           | H           | 35.93                   | -38.4                   | 0.0                    | 1.1             | -39.5                | -13.0       | 26.5        |
| 904.875                           | V           | 41.30                   | -29.7                   | 0.0                    | 1.1             | -30.8                | -13.0       | 17.8        |

**Note:**

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level



## **FCC §2.1055 & § 22.355 & §74.464& §80.209 & §90.213 - FREQUENCY STABILITY**

---

### **Applicable Standard**

FCC §2.1055, § 22.355, §74.464, §80.209 and §90.213

### **Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

### **Test Data**

#### **Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.9 °C   |
| <b>Relative Humidity:</b> | 41 %      |
| <b>ATM Pressure:</b>      | 101.1 kPa |

*The testing was performed by Tiago Huang on 2018-01-03.*

*Test Mode: Transmitting*

FCC Part 90:

| <b>FM,12.5kHz, Reference Frequency: 155.7525 MHz, Limit: ±2.5 ppm</b> |  |                                 |                              |
|---|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>   | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30   | 7.4                                      | 155.752363                      | -0.88                        |
| -20   | 7.4                                      | 155.752413                      | -0.56                        |
| -10   | 7.4                                      | 155.752423                      | -0.49                        |
| 0   | 7.4                                      | 155.752353                      | -0.94                        |
| 10  | 7.4                                      | 155.752453                      | -0.30                        |
| 20  | 7.4                                      | 155.752383                      | -0.75                        |
| 30  | 7.4                                      | 155.752343                      | -1.01                        |
| 40  | 7.4                                      | 155.752423                      | -0.49                        |
| 50  | 7.4                                      | 155.752453                      | -0.30                        |
| 25  | 6.4                                      | 155.752393                      | -0.69                        |
| 25  | 8.4                                      | 155.752363                      | -0.88                        |

| <b>4FSK, 12.5kHz, Reference Frequency: 155.7525 MHz, Limit: ±2.5 ppm</b> |  |                                 |                              |
|--|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>  | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30  | 7.4                                      | 155.752454                      | -0.30                        |
| -20  | 7.4                                      | 155.752358                      | -0.91                        |
| -10  | 7.4                                      | 155.752390                      | -0.71                        |
| 0  | 7.4                                      | 155.752395                      | -0.67                        |
| 10   | 7.4                                      | 155.752451                      | -0.31                        |
| 20   | 7.4                                      | 155.752437                      | -0.40                        |
| 30   | 7.4                                      | 155.752412                      | -0.56                        |
| 40   | 7.4                                      | 155.752410                      | -0.58                        |
| 50   | 7.4                                      | 155.752424                      | -0.49                        |
| 25   | 6.4                                      | 155.752359                      | -0.91                        |
| 25   | 8.4                                      | 155.752405                      | -0.61                        |

FCC Part 80:

| <b>FM,25kHz, Reference Frequency: 154.0125 MHz, Limit: ±5.0 ppm</b> |  |                                 |                              |
|---|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>   | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30   | 7.4                                      | 154.012457                      | -0.28                        |
| -20   | 7.4                                      | 154.012467                      | -0.21                        |
| -10   | 7.4                                      | 154.012437                      | -0.41                        |
| 0   | 7.4                                      | 154.012347                      | -0.99                        |
| 10  | 7.4                                      | 154.012477                      | -0.15                        |
| 20  | 7.4                                      | 154.012387                      | -0.73                        |
| 30  | 7.4                                      | 154.012457                      | -0.28                        |
| 40  | 7.4                                      | 154.012457                      | -0.28                        |
| 50  | 7.4                                      | 154.012447                      | -0.34                        |
| 25  | 6.4                                      | 154.012407                      | -0.60                        |
| 25  | 8.4                                      | 154.012497                      | -0.02                        |

FCC Part 74:

| <b>FM, 12.5kHz, Reference Frequency: 161.1 MHz, Limit: <math>\pm 2.5</math> ppm</b> |  |                                 |                              |
|---|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>   | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30   | 7.4                                      | 161.099873                      | -0.79                        |
| -20   | 7.4                                      | 161.099833                      | -1.04                        |
| -10   | 7.4                                      | 161.099893                      | -0.66                        |
| 0   | 7.4                                      | 161.099873                      | -0.79                        |
| 10  | 7.4                                      | 161.099953                      | -0.29                        |
| 20  | 7.4                                      | 161.099873                      | -0.79                        |
| 30  | 7.4                                      | 161.099973                      | -0.17                        |
| 40  | 7.4                                      | 161.099963                      | -0.23                        |
| 50  | 7.4                                      | 161.099963                      | -0.23                        |
| 25  | 6.4                                      | 161.099983                      | -0.10                        |
| 25  | 8.4                                      | 161.099913                      | -0.54                        |

| <b>4FSK, 12.5kHz, Reference Frequency: 161.1 MHz, Limit: <math>\pm 2.5</math> ppm</b> |  |                                 |                              |
|---|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>   | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30   | 7.4                                      | 161.099922                      | -0.48                        |
| -20   | 7.4                                      | 161.099919                      | -0.50                        |
| -10   | 7.4                                      | 161.099951                      | -0.30                        |
| 0   | 7.4                                      | 161.099966                      | -0.21                        |
| 10  | 7.4                                      | 161.099940                      | -0.37                        |
| 20  | 7.4                                      | 161.099967                      | -0.20                        |
| 30  | 7.4                                      | 161.099892                      | -0.67                        |
| 40  | 7.4                                      | 161.099911                      | -0.55                        |
| 50  | 7.4                                      | 161.099921                      | -0.49                        |
| 25  | 6.4                                      | 161.099873                      | -0.79                        |
| 25  | 8.4                                      | 161.099953                      | -0.29                        |

| <b>FM, 25kHz, Reference Frequency: 161.1 MHz, Limit: <math>\pm 5.0</math> ppm</b> |  |                                 |                              |
|---|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>   | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30   | 7.4                                      | 161.099903                      | -0.60                        |
| -20   | 7.4                                      | 161.099883                      | -0.72                        |
| -10   | 7.4                                      | 161.099883                      | -0.72                        |
| 0   | 7.4                                      | 161.099893                      | -0.66                        |
| 10  | 7.4                                      | 161.099863                      | -0.85                        |
| 20  | 7.4                                      | 161.099963                      | -0.23                        |
| 30  | 7.4                                      | 161.099873                      | -0.79                        |
| 40  | 7.4                                      | 161.099893                      | -0.66                        |
| 50  | 7.4                                      | 161.099903                      | -0.60                        |
| 25  | 6.4                                      | 161.099953                      | -0.29                        |
| 25  | 8.4                                      | 161.099933                      | -0.41                        |

FCC Part 22:

| <b>FM, 12.5kHz, Reference Frequency: 150.8125 MHz, Limit: ±2.5 ppm</b> |  |                                 |                              |
|--|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>  | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30  | 7.4                                      | 150.812351                      | -0.99                        |
| -20  | 7.4                                      | 150.812431                      | -0.46                        |
| -10  | 7.4                                      | 150.812441                      | -0.39                        |
| 0  | 7.4                                      | 150.812491                      | -0.06                        |
| 10   | 7.4                                      | 150.812441                      | -0.39                        |
| 20   | 7.4                                      | 150.812391                      | -0.72                        |
| 30   | 7.4                                      | 150.812441                      | -0.39                        |
| 40   | 7.4                                      | 150.812361                      | -0.92                        |
| 50   | 7.4                                      | 150.812471                      | -0.19                        |
| 25   | 6.4                                      | 150.812341                      | -1.05                        |
| 25   | 8.4                                      | 150.812381                      | -0.79                        |

| <b>4FSK, 12.5kHz, Reference Frequency: 150.8125 MHz, Limit: ±2.5 ppm</b> |  |                                 |                              |
|--|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>  | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30  | 7.4                                      | 150.812401                      | -0.65                        |
| -20  | 7.4                                      | 150.812409                      | -0.60                        |
| -10  | 7.4                                      | 150.812479                      | -0.14                        |
| 0  | 7.4                                      | 150.812394                      | -0.70                        |
| 10   | 7.4                                      | 150.812382                      | -0.78                        |
| 20   | 7.4                                      | 150.812381                      | -0.79                        |
| 30   | 7.4                                      | 150.812460                      | -0.26                        |
| 40   | 7.4                                      | 150.812454                      | -0.30                        |
| 50   | 7.4                                      | 150.812476                      | -0.16                        |
| 25   | 6.4                                      | 150.812406                      | -0.62                        |
| 25   | 8.4                                      | 150.812480                      | -0.13                        |

| <b>FM, 25kHz, Reference Frequency: 150.8125 MHz, Limit: ±5 ppm</b> |  |                                 |                              |
|--|--|---------------------------------|------------------------------|
| <b>Temperature (°C)</b>  | <b>Voltage Supplied (V<sub>DC</sub>)</b> | <b>Measured Frequency (MHz)</b> | <b>Frequency Error (ppm)</b> |
| -30  | 7.4                                      | 150.812421                      | -0.52                        |
| -20  | 7.4                                      | 150.812551                      | 0.34                         |
| -10  | 7.4                                      | 150.812451                      | -0.32                        |
| 0  | 7.4                                      | 150.812551                      | 0.34                         |
| 10   | 7.4                                      | 150.812431                      | -0.46                        |
| 20   | 7.4                                      | 150.812451                      | -0.32                        |
| 30   | 7.4                                      | 150.812551                      | 0.34                         |
| 40   | 7.4                                      | 150.812451                      | -0.32                        |
| 50   | 7.4                                      | 150.812451                      | -0.32                        |
| 25   | 6.4                                      | 150.812481                      | -0.12                        |
| 25   | 8.4                                      | 150.812571                      | 0.47                         |

## FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR


### Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

### Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 12.5$  kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as  $P_0$ .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to  $P_0$ . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at  $\pm 4$  divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be  $t_{on}$ . The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period  $t_3$ .

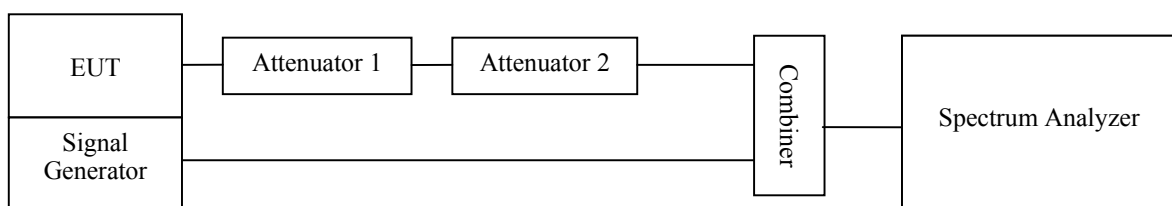

**Test Data**

**Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.9 °C   |
| <b>Relative Humidity:</b> | 41 %      |
| <b>ATM Pressure:</b>      | 101.1 kPa |


*The testing was performed by Tiago Huang on 2018-01-03.*

| <b>Channel Spacing (kHz)</b> | <b>Transient Period (ms)</b> | <b>Transient Frequency</b> | <b>Result</b> |
|------------------------------|------------------------------|----------------------------|---------------|
| 12.5                         | <5(t <sub>1</sub> )          | ±12.5 kHz                  | Pass          |
|                              | <20(t <sub>2</sub> )         | ±6.25 kHz                  |               |
|                              | <5(t <sub>3</sub> )          | ±12.5 kHz                  |               |


Please refer to the following plots.

**High Power Channel: 155.7525 MHz**

**Turn on**

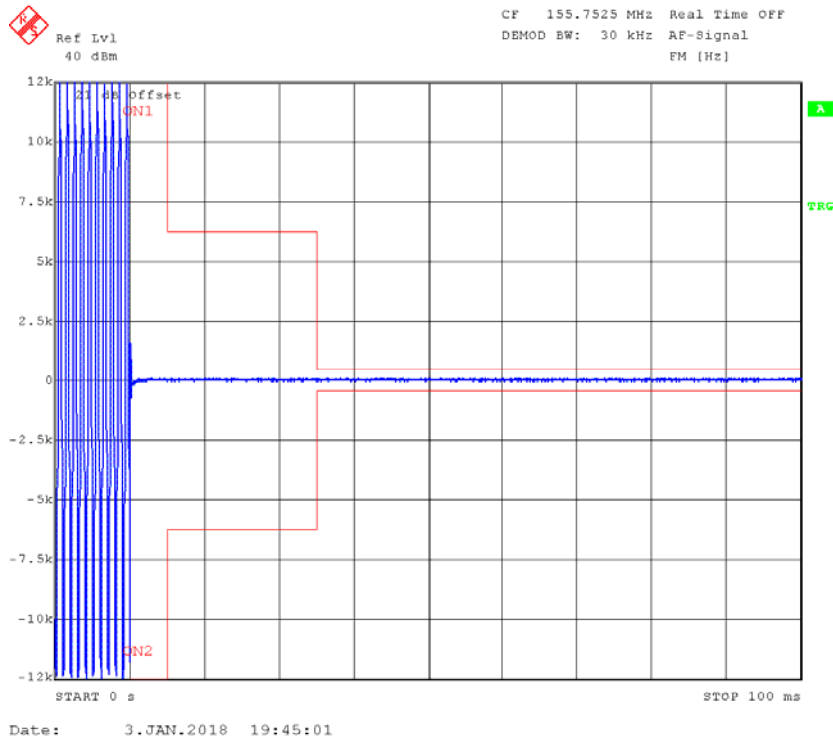

**Turn off**

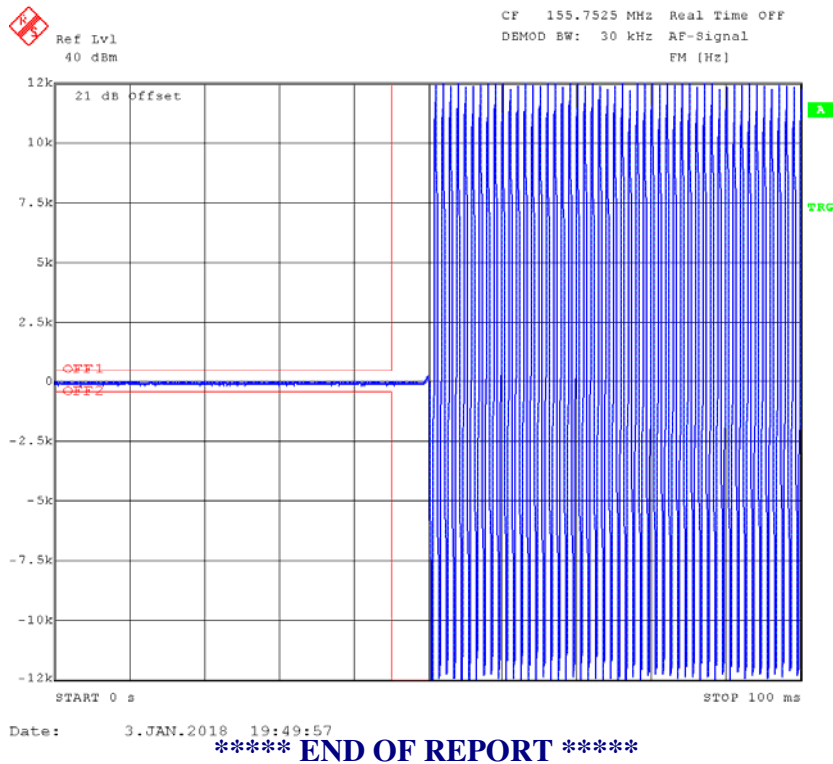

\*\*\*\*\* END OF REPORT \*\*\*\*\*