



# FCC PART 15C TEST REPORT

**BLUETOOTH LOW ENERGY (BLE) PART**

**No. I19Z60700-IOT03**

**for**

**Hytera Communications Corporation Limited**

**Smart LTE Terminal**

**Model Name: PNC550**

**FCC ID:YAMPNC550B9**

**with**

**Hardware Version:1.01**

**Software Version:V1.0.01.001.01**

**Issued Date: 2019-5-15**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:[ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website:[www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I19Z60700-IOT03	Rev.0	1st edition	2019-5-15

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT .....	6
1.4. PROJECT DATA .....	6
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION .....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT .....	8
3.3. INTERNAL IDENTIFICATION OF AE .....	8
3.4. NORMAL ACCESSORY SETTING .....	9
3.5. GENERAL DESCRIPTION .....	9
3.6. EUT SET-UPS .....	9
<b>4. REFERENCE DOCUMENTS .....</b>	<b>10</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	10
4.2. REFERENCE DOCUMENTS FOR TESTING .....	10
<b>5. TEST RESULTS .....</b>	<b>11</b>
5.1. SUMMARY OF TEST RESULTS .....	11
5.2. STATEMENTS .....	11
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>12</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>13</b>
7.1. PEAK OUTPUT POWER - CONDUCTED .....	13
7.2. FREQUENCY BAND EDGES .....	13
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	13
7.4. TRANSMITTER SPURIOUS EMISSION - RADIATED .....	13
7.5. 6dB BANDWIDTH .....	13
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	13
7.7. AC POWERLINE CONDUCTED EMISSION .....	14
<b>ANNEX A: DETAILED TEST RESULTS .....</b>	<b>15</b>
A.1. MEASUREMENT METHOD .....	15
A.2. PEAK OUTPUT POWER - CONDUCTED .....	16
A.3. FREQUENCY BAND EDGES - CONDUCTED .....	17
A.4. TRANSMITTER SPURIOUS EMISSION-CONDUCTED .....	19
A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED .....	28



A.6. 6dB BANDWIDTH.....	32
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	35
A.8. AC POWERLINE CONDUCTED EMISSION .....	38
<b>ANNEX E: ACCREDITATION CERTIFICATE.....</b>	<b>42</b>



## **1. Test Laboratory**

### **1.1. Introduction &Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. TestingLocation**

Conducted testing Location:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191


### 1.3. TestingEnvironment

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%

### 1.4. Project data

Testing Start Date: 2019-4-17  
Testing End Date: 2019-5-15

### 1.5. Signature

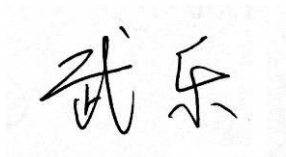

---

Wu Le

(Prepared this test report)



---

Sun Zhenyu

(Reviewed this test report)



---

Li Zhuofang

(Approved this test report)



## **2. ClientInformation**

### **2.1. Applicant Information**

Company Name: Hytera Communications Corporation Limited  
Address/Post: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road,  
Nanshan District, Shenzhen, People's Republic of China  
City: Shenzhen  
Postal Code: /  
Country: China  
Telephone: 13717055929  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Hytera Communications Corporation Limited  
Address/Post: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road,  
Nanshan District, Shenzhen, People's Republic of China  
City: Shenzhen  
Postal Code: /  
Country: China  
Telephone: 13717055929  
Fax: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Smart LTE Terminal
Model Name	PNC550
FCC ID	YAMPNC550B9
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.8V DC by Battery

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
EUT1	864608040026119/ 864608040026101	1.01	V1.0.01.001.01
EUT2	864608040026085/ 864608040026093	1.01	V1.0.01.001.01

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>Note</b>
AE1	Battery	Inbuilt
AE2	Charger	CH008
AE3	USB Cable	DC002
<b>AE1</b>		
Model	BP4003	
Manufacturer	FPR Connectivity Technology Inc.	
Capacitance	4000mAh	
Nominal voltage	V	
<b>AE2</b>		
Model	PS2032	
Manufacturer	TENPAO	
Length of cable	/	
<b>AE3</b>		
Model	PC143(C-type)	
Manufacturer	TENPAO	
Length of cable	/	

\*AE ID: is used to identify the test sample in the lab internally.





### 3.4. Normal Accessory setting

Fully charged battery is used during the test.

### 3.5. General Description

The Equipment Under Test (EUT) is a model of Smart LTE Terminal with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

### 3.6. EUT set-ups

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.4	EUT1+ AE1+ AE2+ AE3	Charger

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the client or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements;	2016
ANSI C63.10	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz. American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

## 5. Test Results

### 5.1. Summary of Test Results

Abbreviations used in this clause:

**P** Pass, The EUT complies with the essential requirements in the standard.

**F** Fail, The EUT does not comply with the essential requirements in the standard

**NA** Not Applicable, The test was not applicable

**NP** Not Performed, The test was not performed by CTTL

<b>SUMMARY OF MEASUREMENT RESULTS</b>	<b>Sub-clause</b>	<b>Verdict</b>
6dB Bandwidth	15.247 (a)(2)	<b>P</b>
Peak Output Power - Conducted	15.247 (b)(1)	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	<b>P</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	<b>P</b>
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	<b>P</b>
Frequency Band Edges	15.247 (d)	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>P</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2019-11-21
2	LISN	ENV216	101459	Rohde & Schwarz	1 year	2020-04-10
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2020-02.14
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2020-03-01
2	BiLog Antenna	VULB9163	483	Schwarzbeck	3 years	2021-08-21
3	Dual-Ridge Waveguide Horn Antenna	3117	00167250	ETS-Lindgren	3 years	2020-05-21

## 7. Measurement Uncertainty

### 7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

### 7.2. Frequency Band Edges

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

### 7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

FrequencyRange	Uncertainty(k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### 7.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

FrequencyRange	Uncertainty(k=2)
< 1 GHz	4.86dB
> 1 GHz	5.26dB

### 7.5. 6dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty(k=2)	61.936Hz
------------------------------	----------

### 7.6. Maximum Power Spectral Density Level

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------



### 7.7. AC Powerline Conducted Emission

#### Measurement Uncertainty:

Measurement Uncertainty(k=2)	3.38dB
------------------------------	--------



## A.2. Peak Output Power - Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.9.1.1

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

### Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
0	2402	-5.36	P
19	2440	-3.28	P
39	2480	-4.36	P

**Conclusion: PASS**



### A.3. Frequency Band Edges - Conducted

**Method of Measurement: See ANSI C63.10-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: Auto
- c) Set the RBW=100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	<-20

**Measurement Result:**

**For GFSK**

Channel No.	Frequency (MHz)	Hopping	Band Edge Power ( dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-52.31	P
39	2480	Hopping OFF	Fig.2	-53.82	P

**Conclusion: PASS**

Test graphs as below

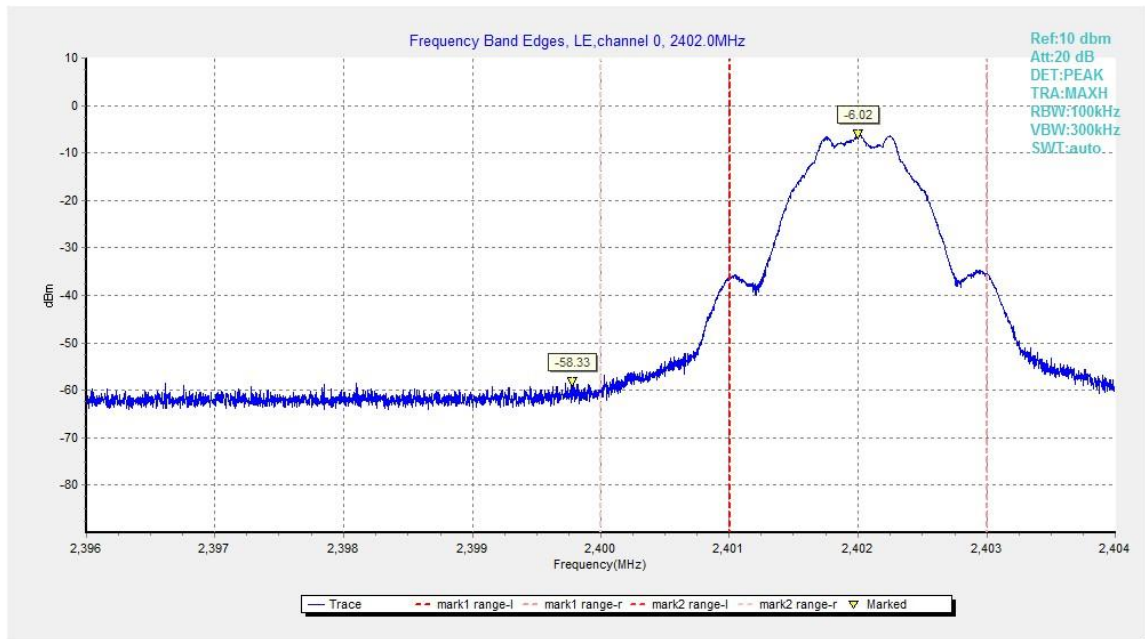


Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

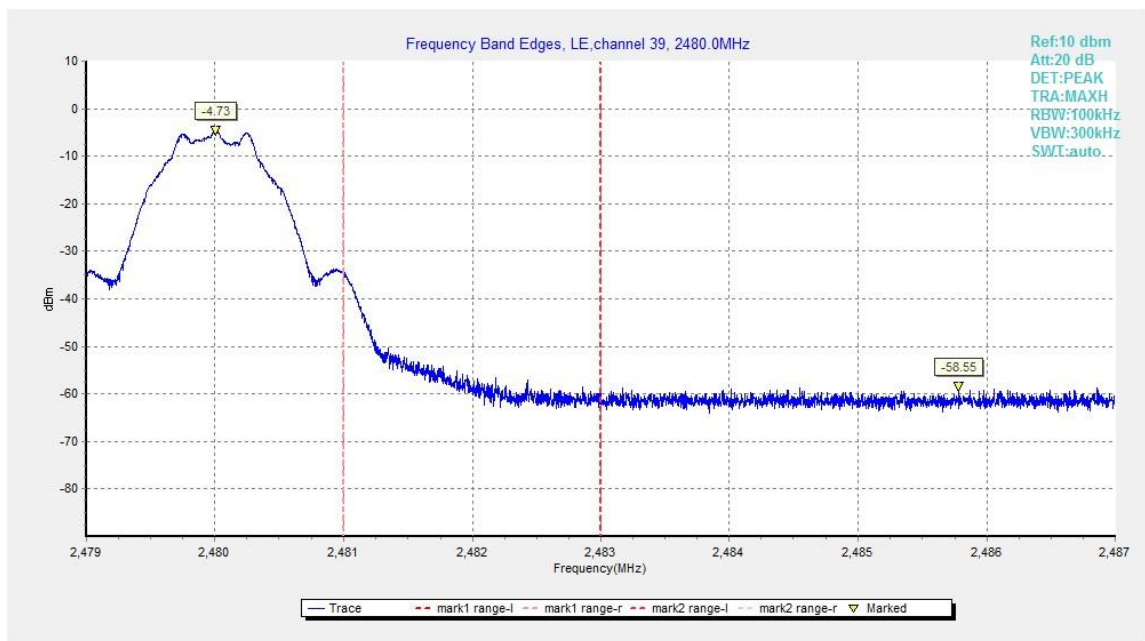


Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off



#### A.4. Transmitter Spurious Emission-Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.11.2 and clause 11.11.3

##### Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to  $\geq 1.5$  times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

##### Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
  2. Set VBW = 300 kHz.
  3. Set span to encompass the spectrum to be examined.
  4. Detector = peak.
  5. Trace Mode = max hold.
  6. Sweep = auto couple.
  7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

##### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**Measurement Results:  
For GFSK**

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
39	2480	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

**Conclusion: PASS**

**Test graphs as below**

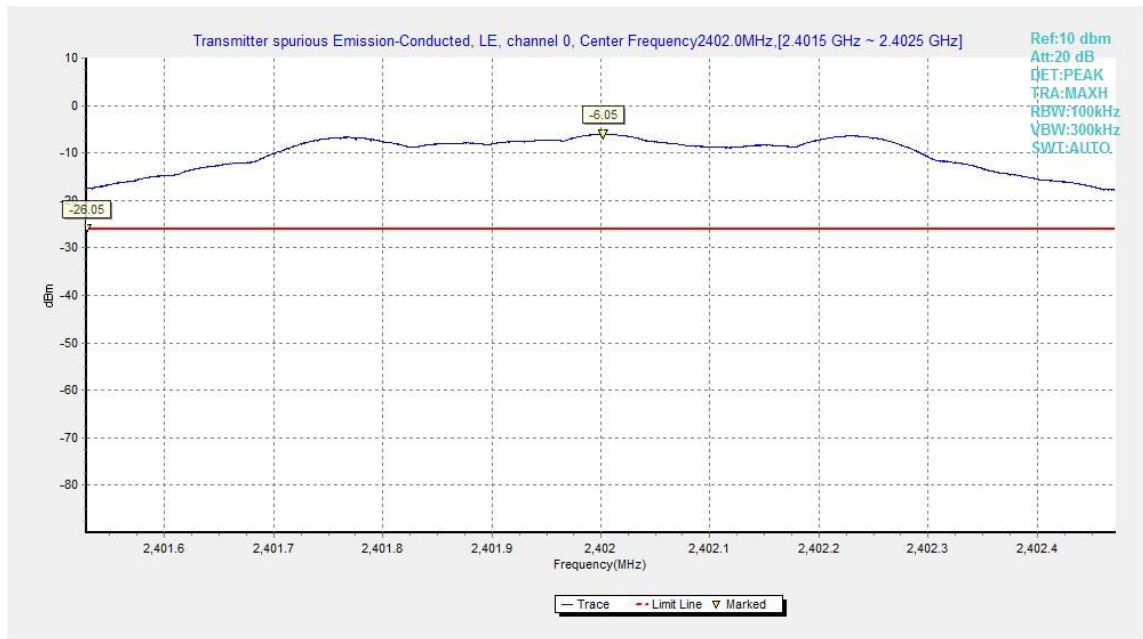


Fig.3. Transmitter Spurious Emission -Conducted: GFSK,2402MHz

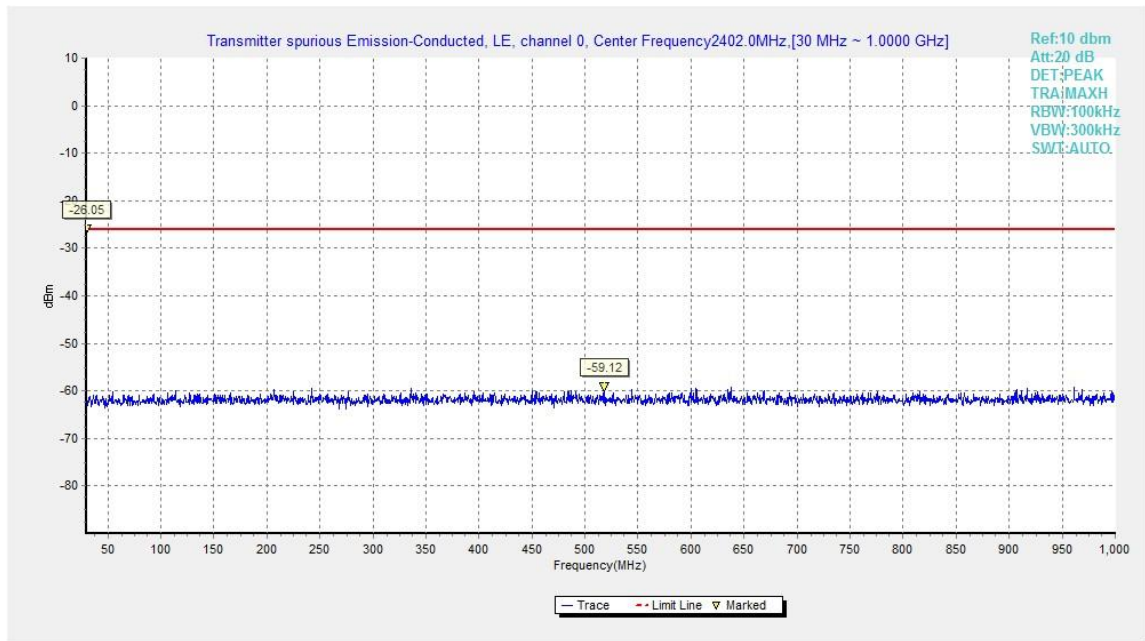


Fig.4. Transmitter Spurious Emission -Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

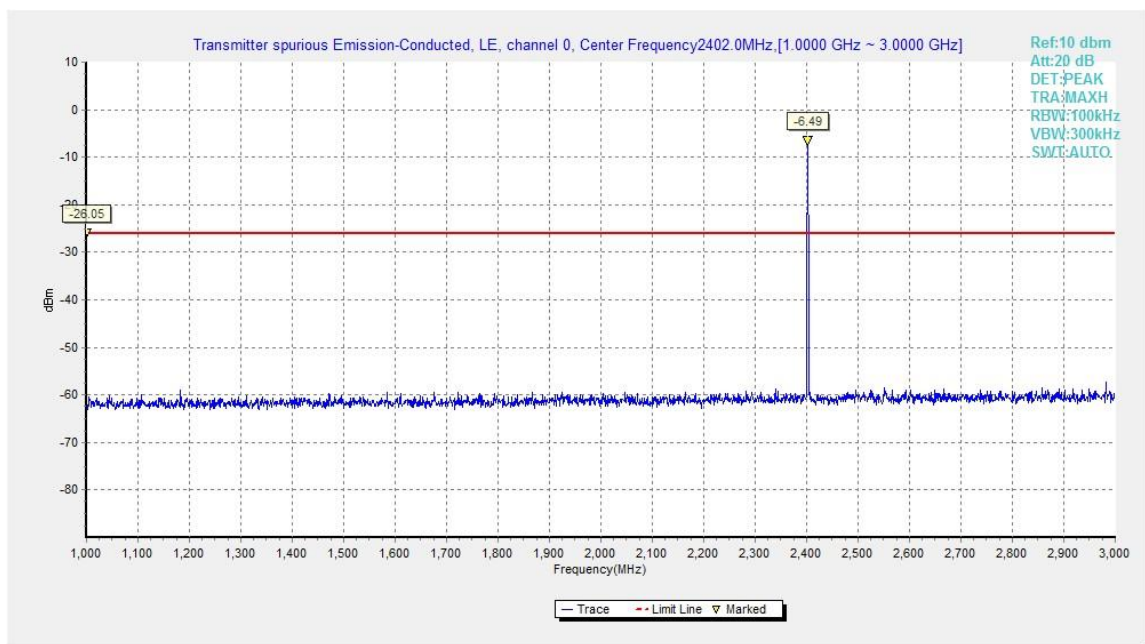


Fig.5. Transmitter Spurious Emission -Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

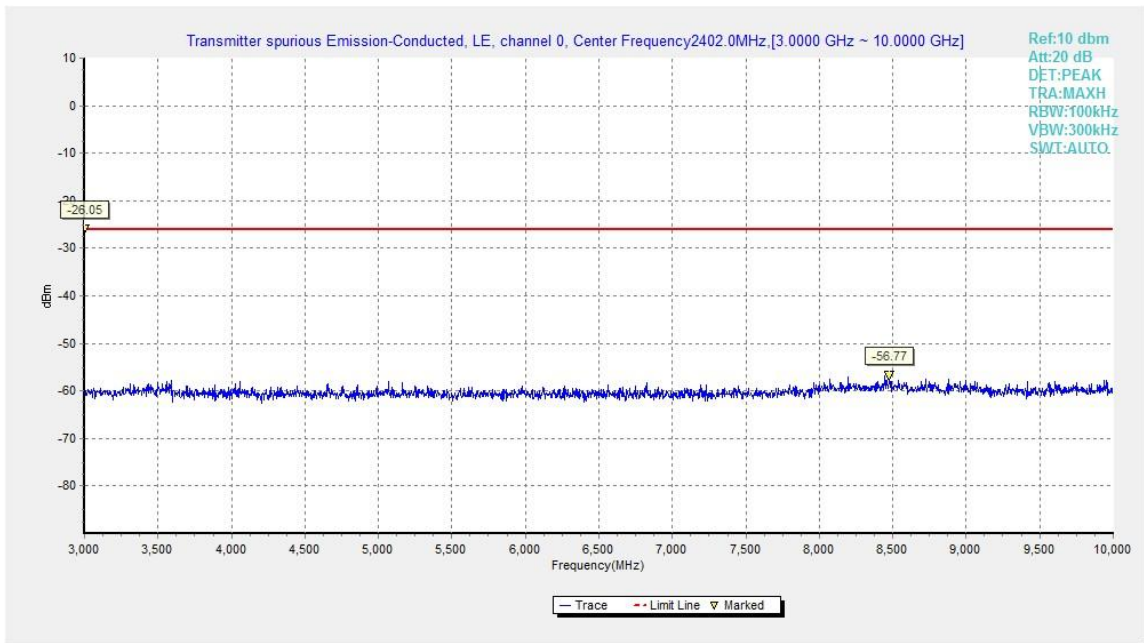


Fig.6. Transmitter Spurious Emission -Conducted: GFSK, 2402 MHz, 3GHz - 10GHz

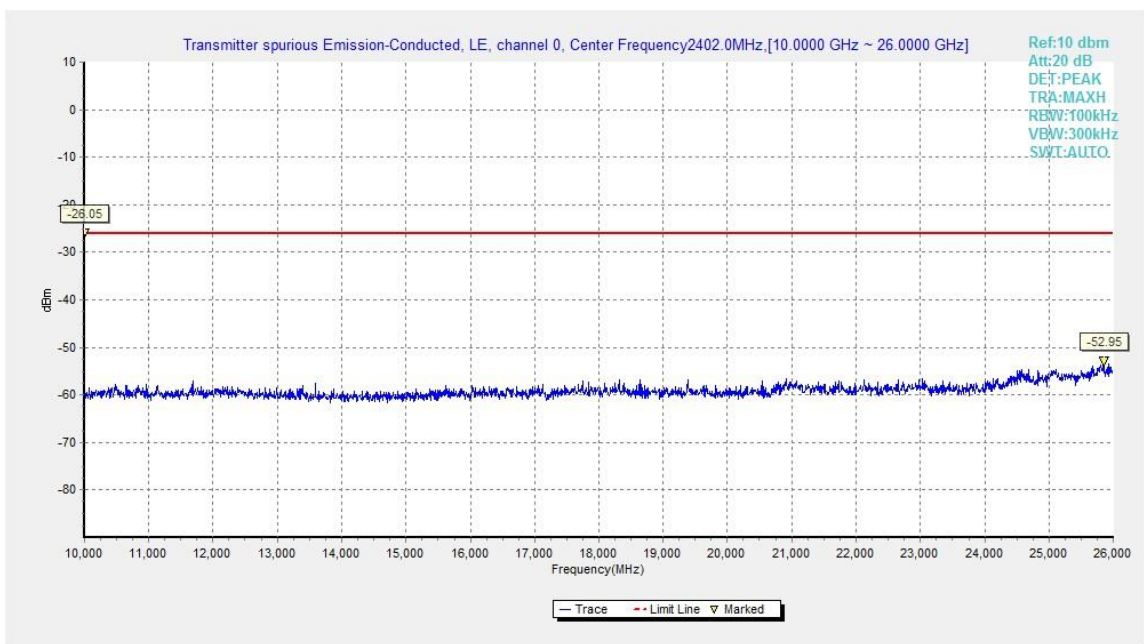


Fig.7. Transmitter Spurious Emission -Conducted: GFSK, 2402 MHz, 10GHz - 26GHz



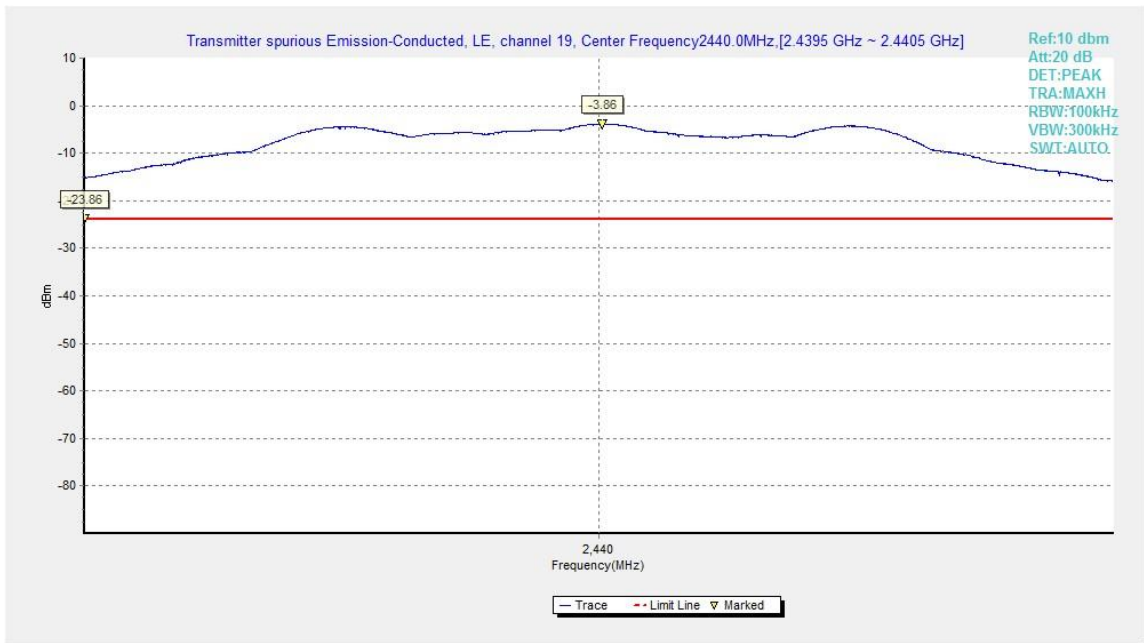


Fig.8. Transmitter Spurious Emission -Conducted: GFSK, 2440MHz

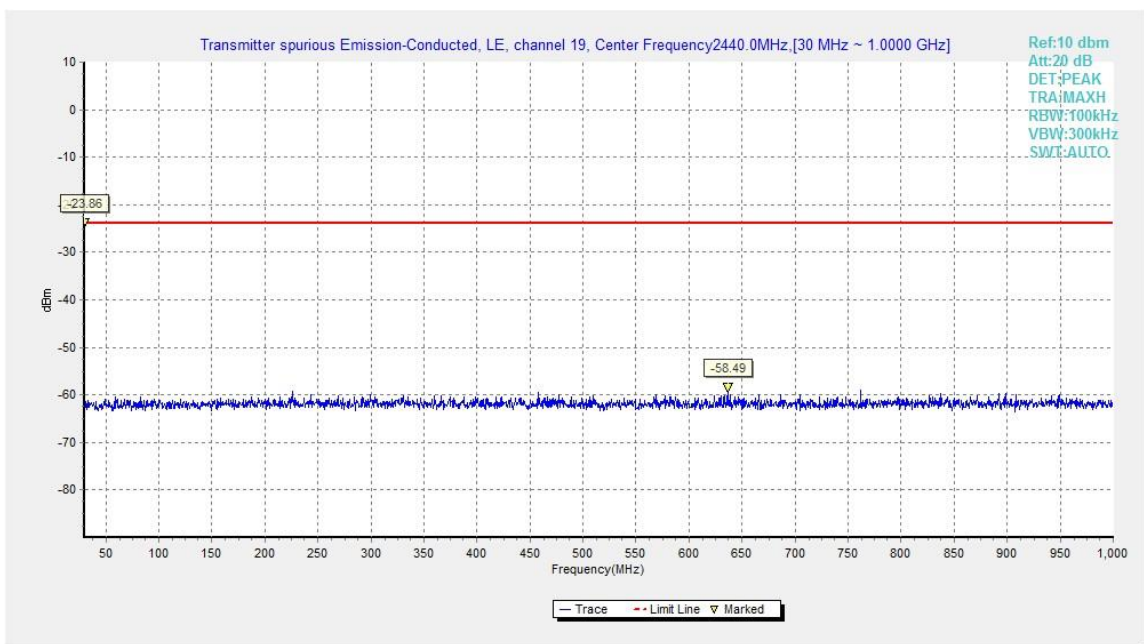


Fig.9. Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

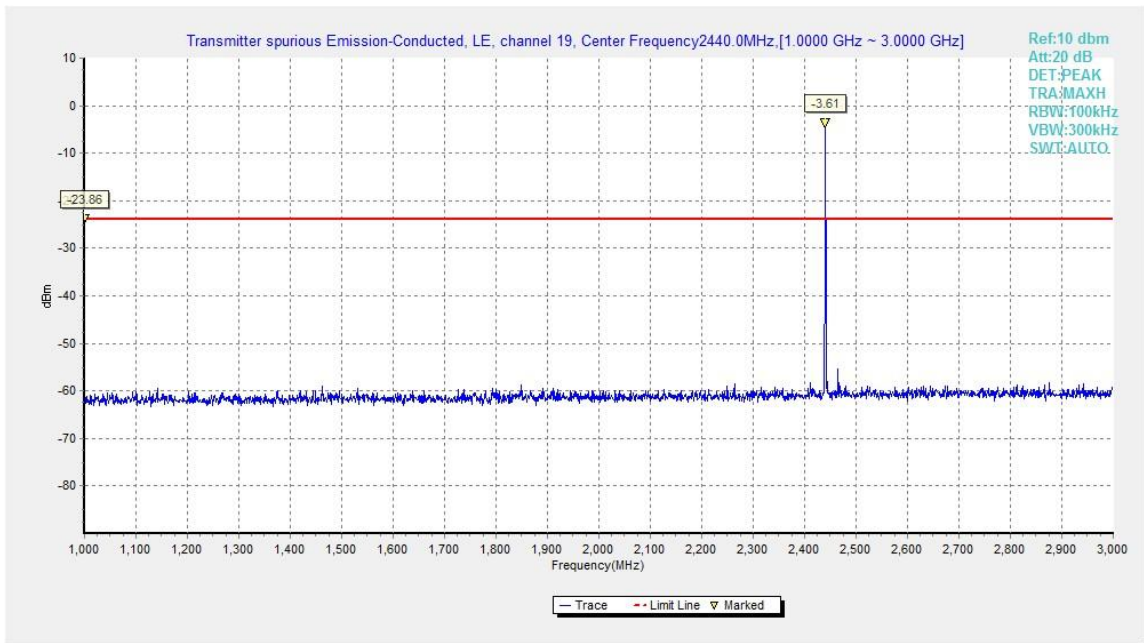


Fig.10. Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

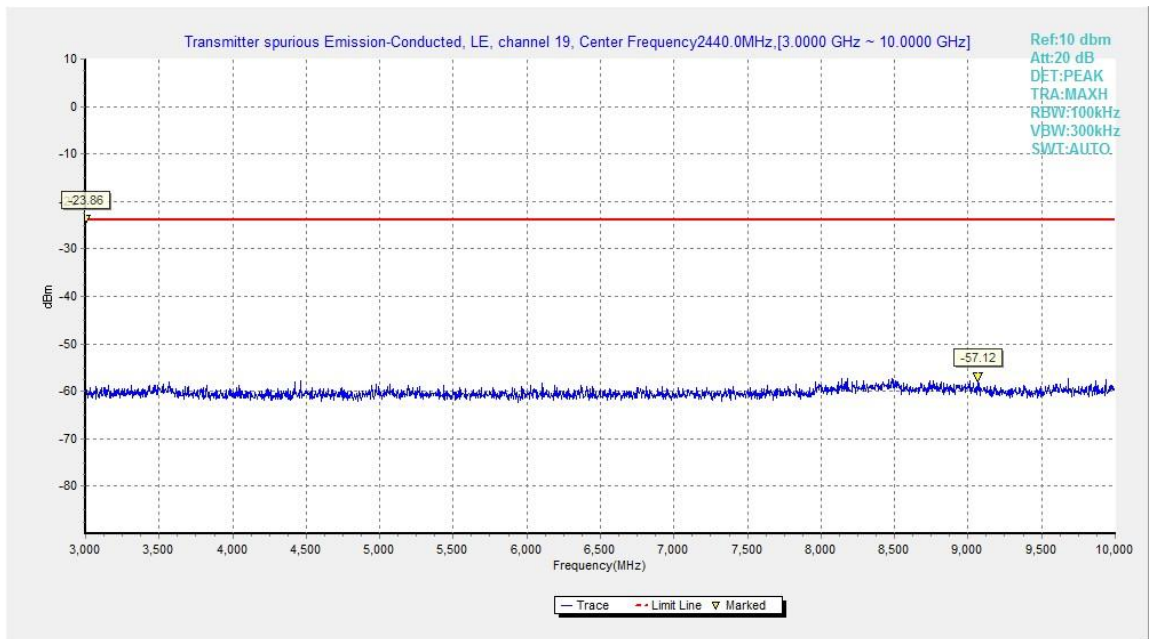


Fig.11. Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 3GHz – 10GHz



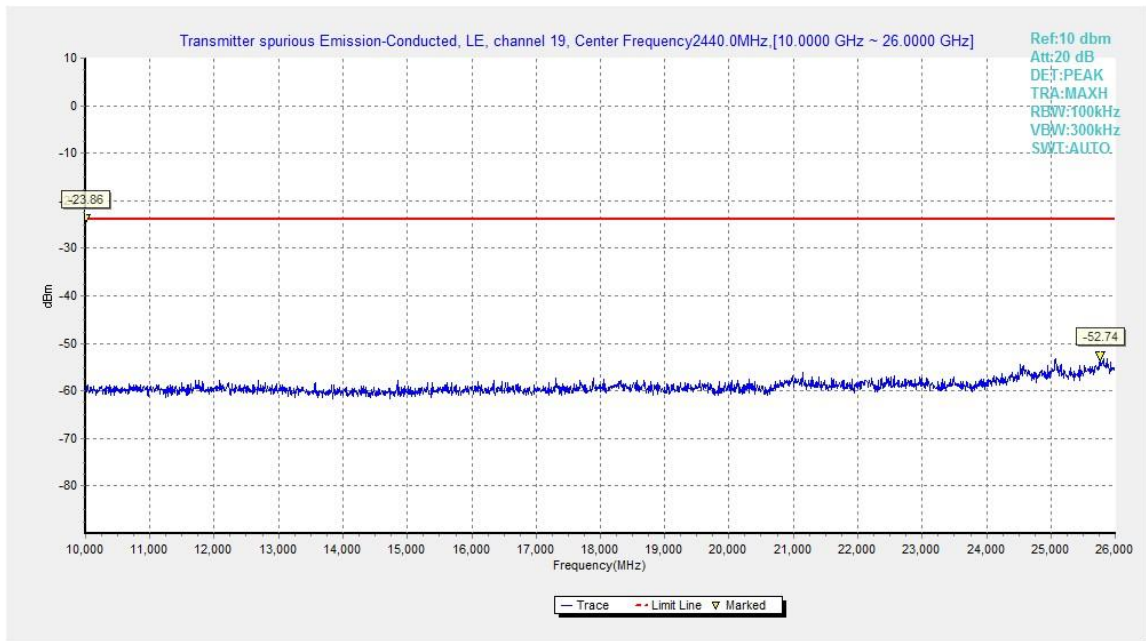


Fig.12. Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

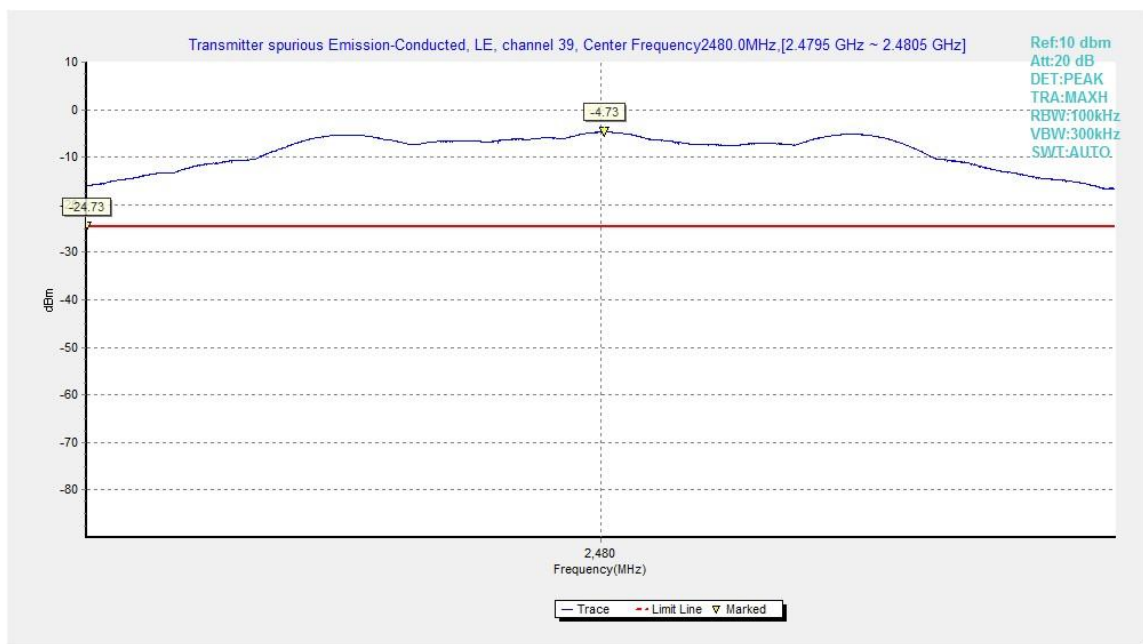


Fig.13. Transmitter Spurious Emission -Conducted: GFSK, 2480 MHz

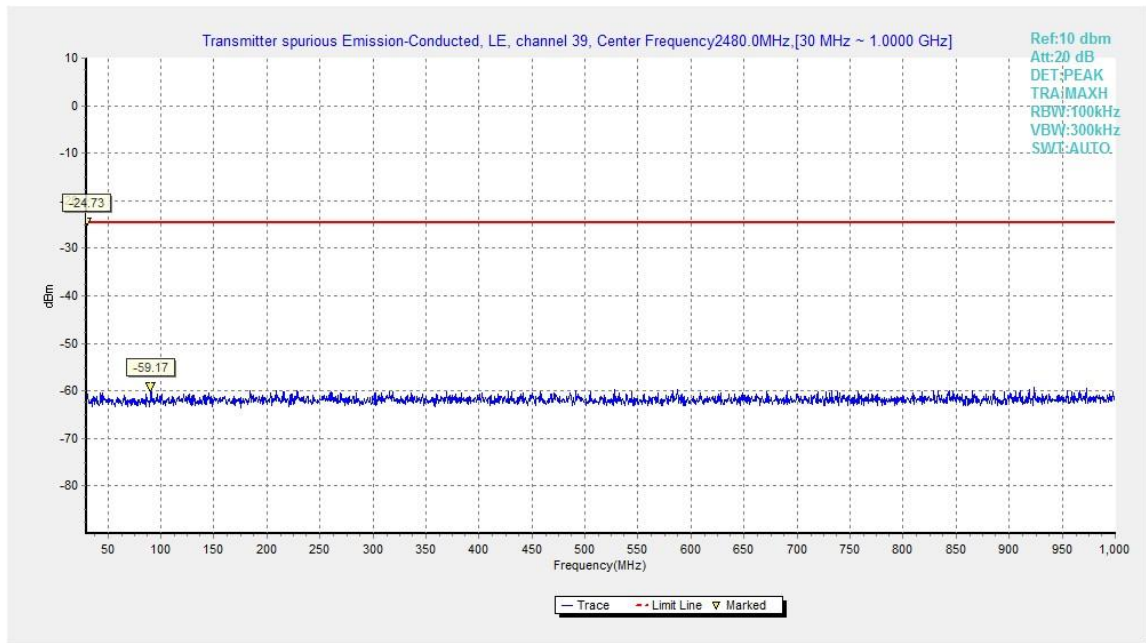


Fig.14. Transmitter Spurious Emission -Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

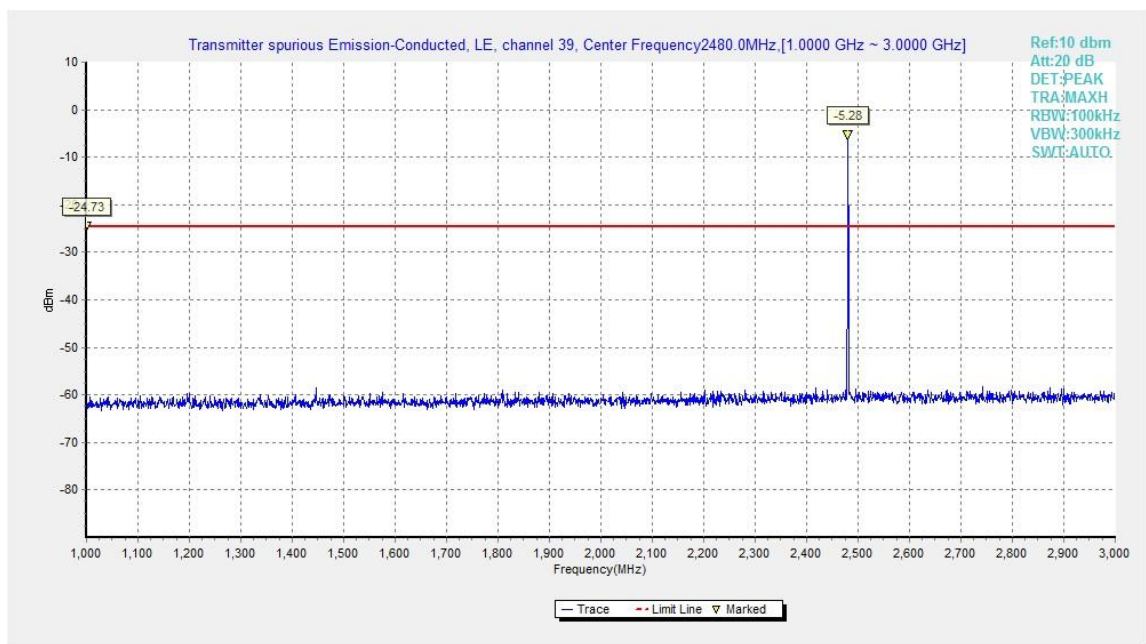


Fig.15. Transmitter Spurious Emission -Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

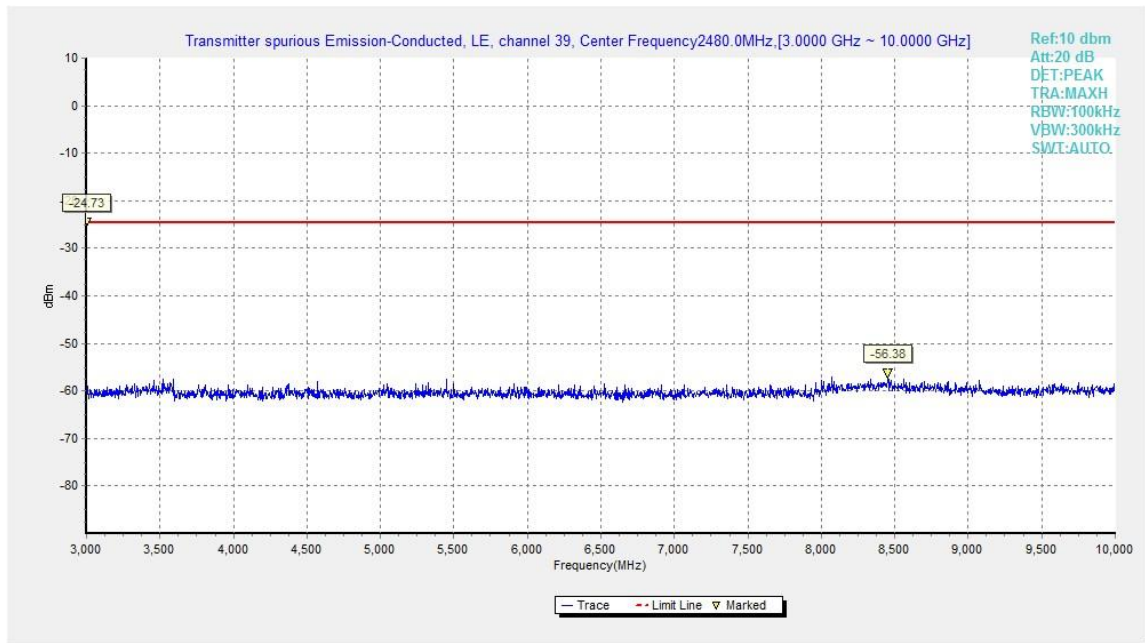


Fig.16. Transmitter Spurious Emission -Conducted:GFSK, 2480 MHz,3GHz - 10GHz

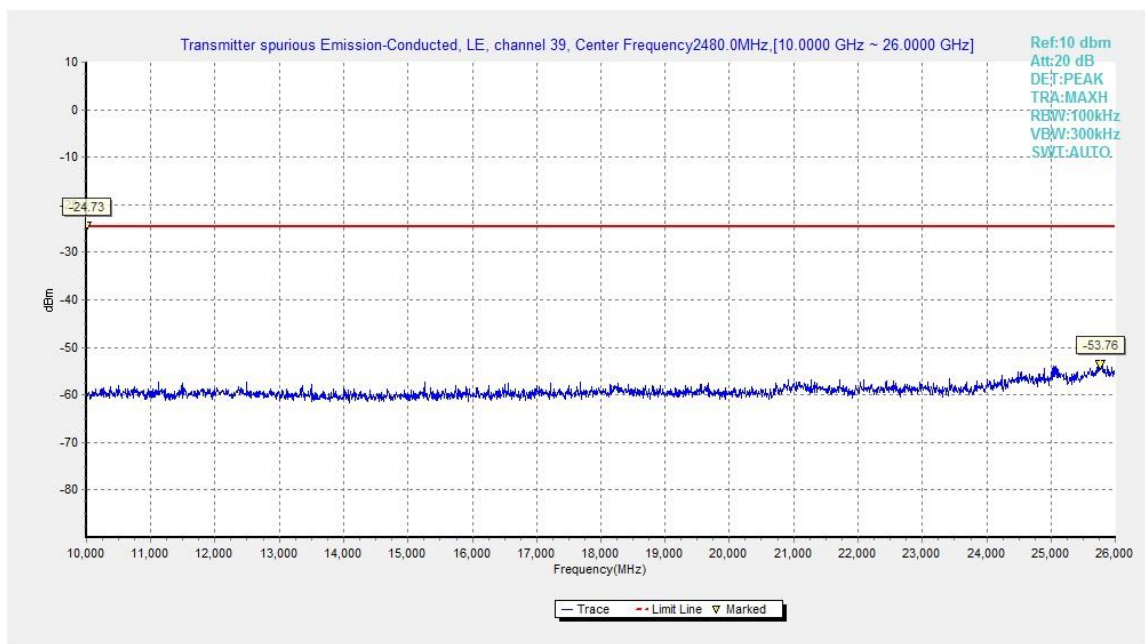


Fig.17. Transmitter Spurious Emission -Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

### A.5. Transmitter Spurious Emission - Radiated

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

#### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

#### Measurement Results:

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

#### For GFSK

Frequency	Frequency Range	Test Results	Conclusion
Power	2.38GHz~2.4GHz---L	Fig.18	P
Power	2.45GHz~2.5GHz---H	Fig.19	P

**GFSK 2402MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2389.510	39.2	-38.8	27.7	50.3	H
5760.000	40.7	-33.8	35.1	39.4	H
5989.500	40.4	-33.5	35.1	38.8	V
5758.500	33.9	-33.8	35.1	32.6	H
17490.000	31.3	-19.2	41.5	9.0	H
17796.000	31.3	-18.5	45.6	4.2	H

**GFSK 2440MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5760.000	40.9	-33.8	35.1	39.6	H
5989.500	40.4	-33.5	35.1	38.8	H
5758.500	34.0	-33.8	35.1	32.7	V
17967.000	31.6	-17.7	45.6	3.7	H
17977.500	31.5	-17.7	45.6	3.6	H
17971.500	31.5	-17.7	45.6	3.6	H

**GFSK 2480MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2485.505	38.6	-38.9	27.7	49.8	H
5989.500	41.3	-33.5	35.1	39.7	H
5760.000	40.9	-33.8	35.1	39.6	V
5758.500	34.4	-33.8	35.1	33.1	H
17790.000	32.0	-18.5	45.6	4.9	H
17967.000	31.9	-17.7	45.6	4.0	H

**GFSK 2402MHz–Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2389.615	51.4	-38.8	27.7	62.5	H
5760.000	46.8	-33.8	35.1	45.5	H
5989.500	46.6	-33.5	35.1	45.0	V
5758.500	46.0	-33.8	35.1	44.7	H
17482.500	45.1	-19.2	41.5	22.8	H
17406.000	43.7	-19.2	41.5	21.4	H

**GFSK 2440MHz–Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5760.000	46.8	-33.8	35.1	45.5	H
5758.500	46.7	-33.8	35.1	45.4	H
5989.500	46.6	-33.5	35.1	45.0	V
5991.000	45.0	-33.5	35.1	43.4	H
17968.500	44.3	-17.7	45.6	16.4	H
17421.000	44.2	-19.2	41.5	21.9	H

**GFSK 2480MHz–Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2485.010	50.6	-38.9	27.7	61.8	H
5760.000	47.6	-33.8	35.1	46.3	H
5989.500	47.5	-33.5	35.1	45.9	V
5758.500	46.1	-33.8	35.1	44.8	H
17860.500	44.2	-18.5	45.6	17.1	H
17821.500	44.1	-18.5	45.6	17.0	H

**Conclusion: PASS**

**Test graphs as below:**

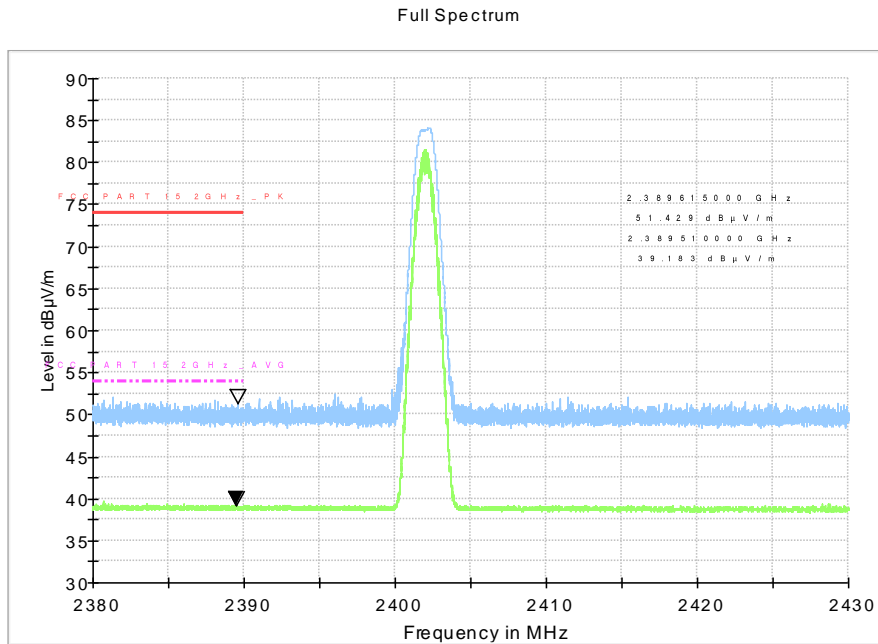


Fig.18. Transmitter Spurious Emission -Radiated: GFSK, 2402MHz, 1 GHz - 3GHz

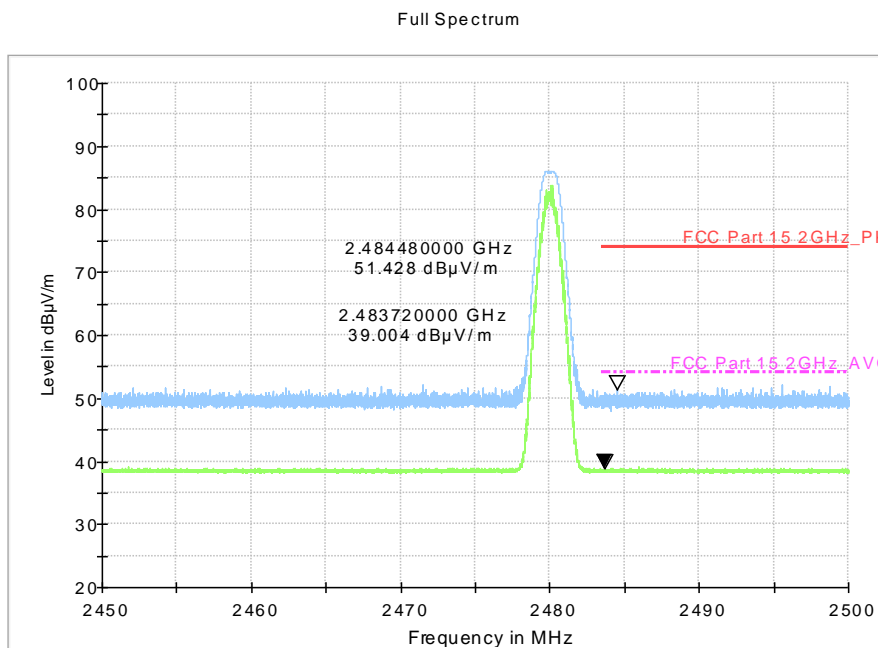


Fig.19. Transmitter Spurious Emission -Radiated: GFSK, 2402MHz, 3 GHz - 18 GHz



## A.6. 6dB Bandwidth

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$

### Measurement Results:

#### For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
0	2402	Fig.20	687.00	P
19	2440	Fig.21	690.50	P
39	2480	Fig.22	696.00	P

**Conclusion: PASS**

Test graphs as below:



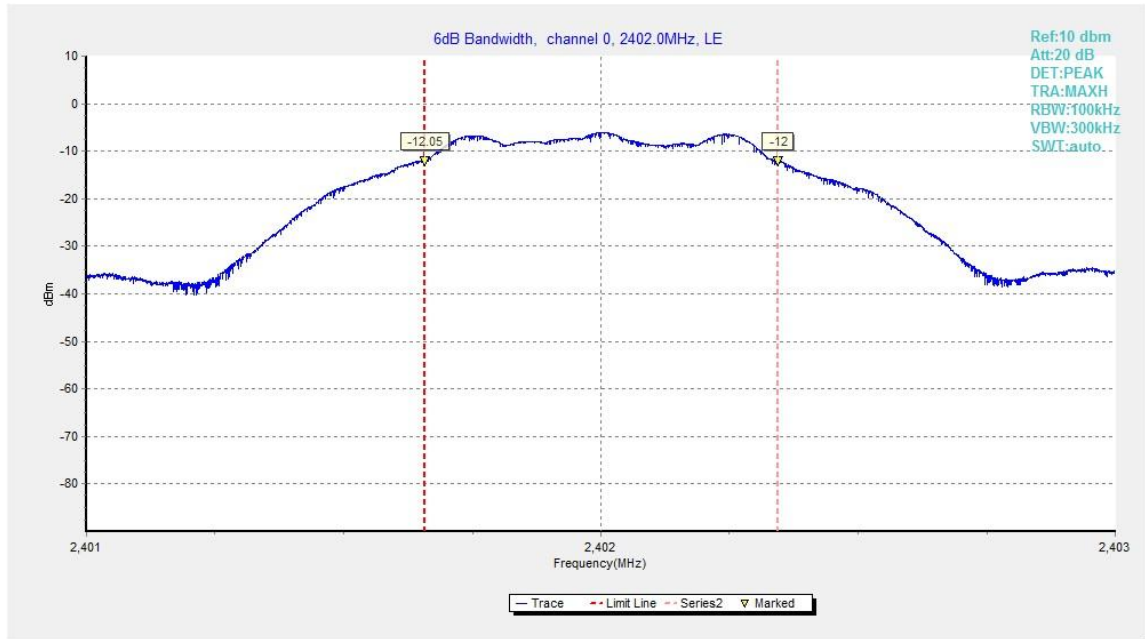


Fig.20. 6dB Bandwidth: GFSK, 2402 MHz



Fig.21. 6dB Bandwidth: GFSK, 2440 MHz

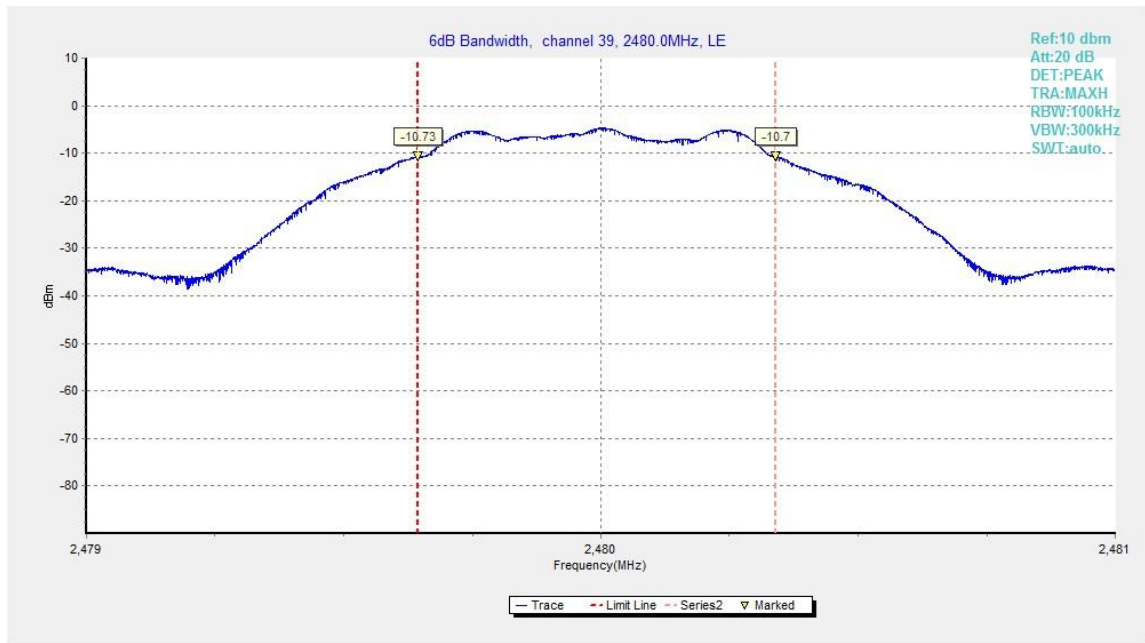


Fig.22. 6dB Bandwidth: GFSK, 2480 MHz

## A.7. Maximum Power Spectral Density Level

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW =10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0\text{dBm}/3\text{kHz}$

### Measurement Results:

#### For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)		Conclusion
		Fig.	Level	
0	2402	Fig.23	-21.10	P
19	2440	Fig.24	-18.84	P
39	2480	Fig.25	-19.71	P

Test graphs as below:

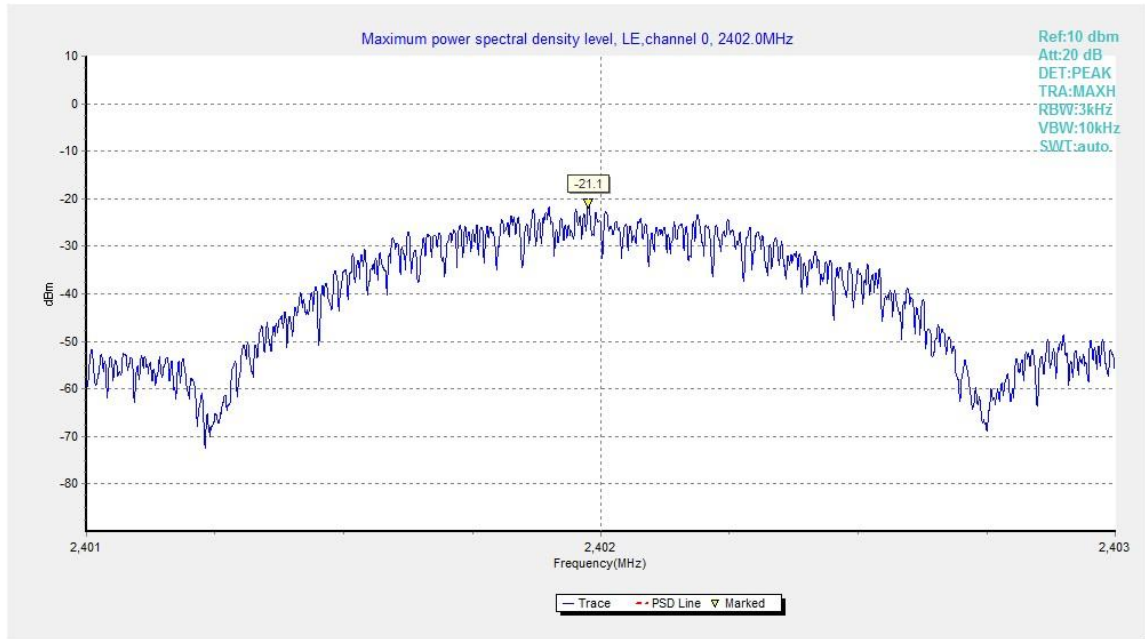


Fig.23. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

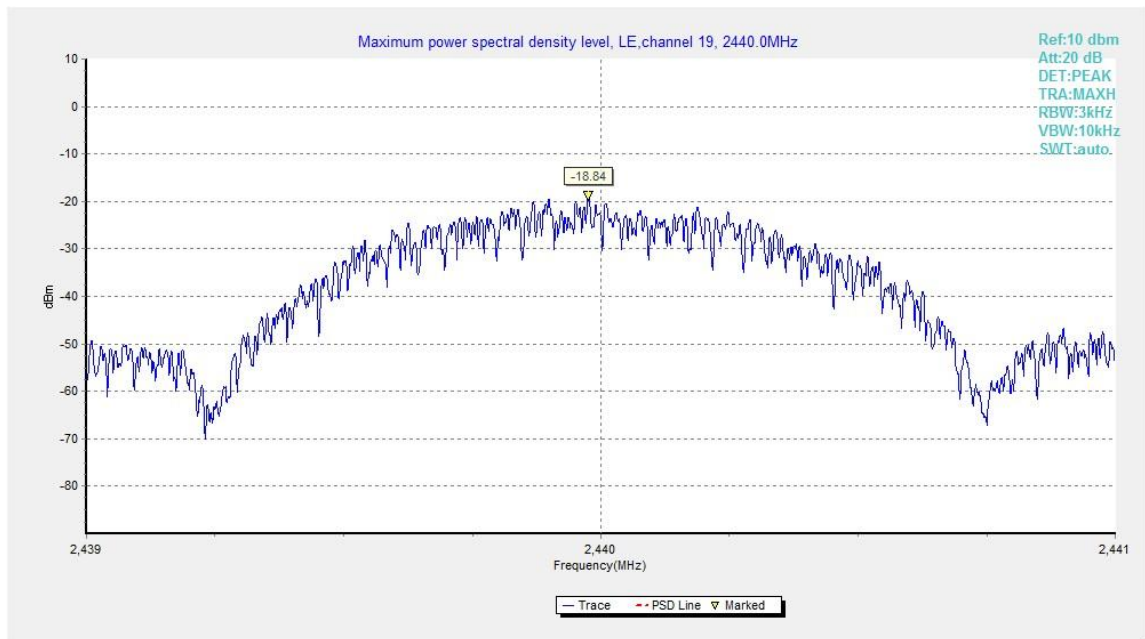


Fig.24. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

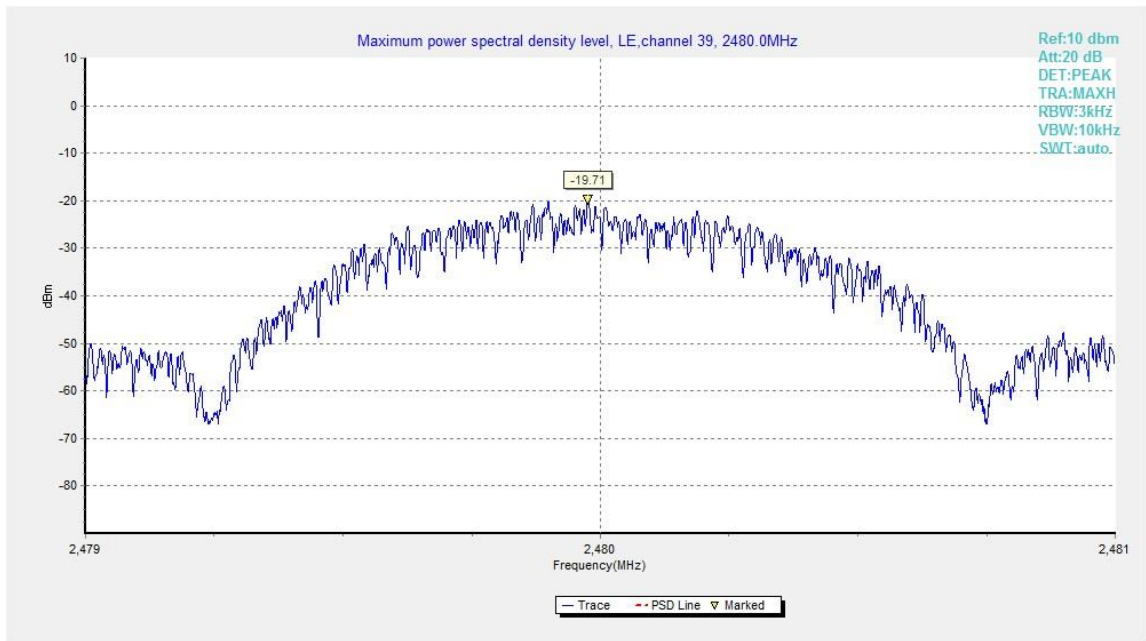


Fig.25. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

## A.8. AC Powerline Conducted Emission

### Method of Measurement: See ANSI C63.10-clause 6.2

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### Test Condition

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit:

#### Bluetooth (Quasi-peak Limit)

Frequency range(MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



**Bluetooth (Average Limit)**

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

**Conclusion: PASS**

**Test graphs as below:**

Traffic:

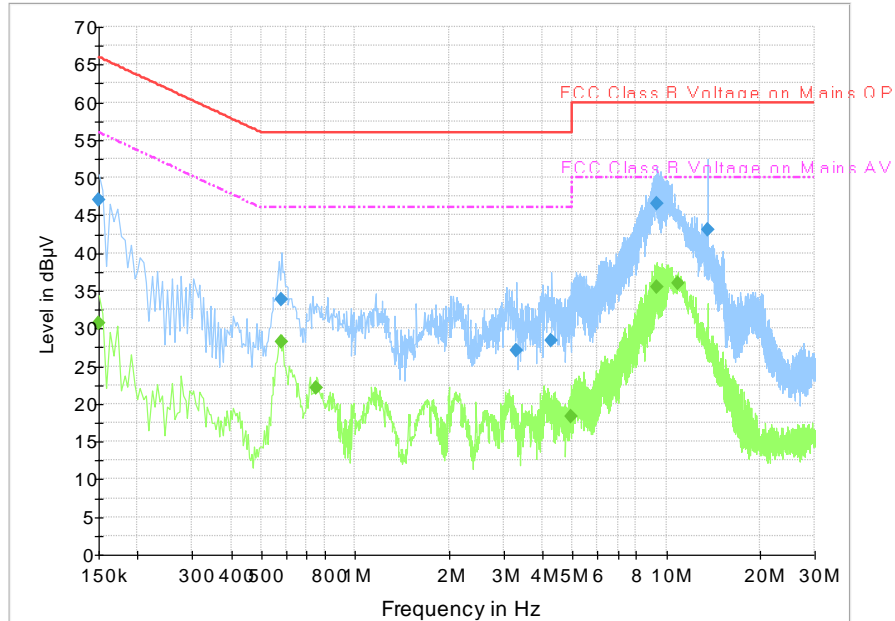

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	47.0	2000.0	9.000	On	L1	30.7	19.0	66.0
0.582000	33.8	2000.0	9.000	On	N	19.8	22.2	56.0
3.295500	27.0	2000.0	9.000	On	N	19.6	29.0	56.0
4.285500	28.4	2000.0	9.000	On	N	19.6	27.6	56.0
9.370500	46.6	2000.0	9.000	On	L1	19.7	13.4	60.0
13.560000	43.1	2000.0	9.000	On	N	19.8	16.9	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	30.7	2000.0	9.000	On	L1	30.7	25.3	56.0
0.577500	28.3	2000.0	9.000	On	L1	19.8	17.7	46.0
0.753000	22.1	2000.0	9.000	On	L1	19.8	23.9	46.0
4.960500	18.4	2000.0	9.000	On	L1	19.6	27.6	46.0
9.294000	35.5	2000.0	9.000	On	L1	19.7	14.5	50.0
10.941000	35.9	2000.0	9.000	On	L1	19.7	14.1	50.0



Idle:

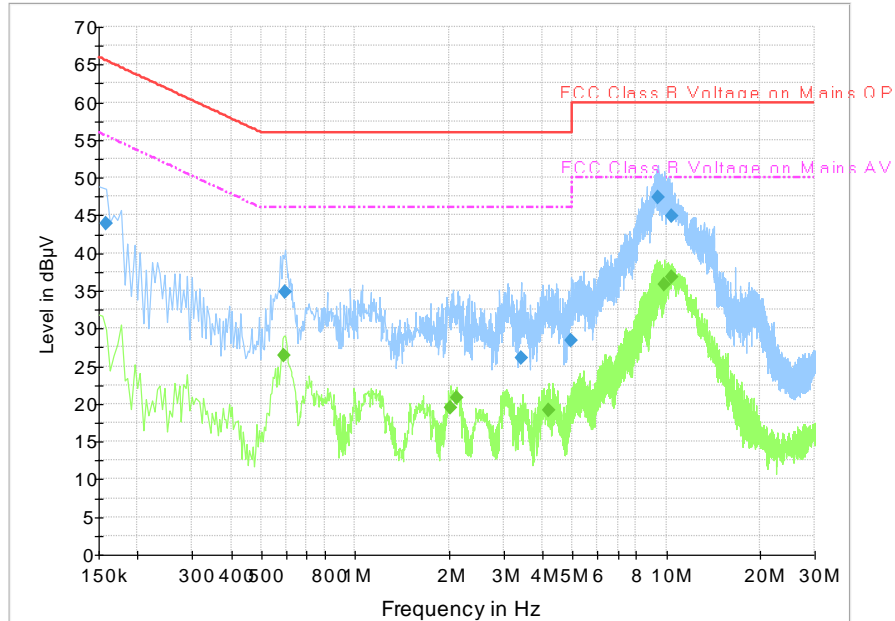

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	44.0	2000.0	9.000	On	L1	28.7	21.5	65.5
0.595500	34.8	2000.0	9.000	On	L1	19.8	21.2	56.0
3.408000	26.2	2000.0	9.000	On	N	19.6	29.8	56.0
4.956000	28.5	2000.0	9.000	On	N	19.6	27.5	56.0
9.384000	47.5	2000.0	9.000	On	L1	19.7	12.5	60.0
10.401000	44.9	2000.0	9.000	On	L1	19.7	15.1	60.0

### Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.591000	26.4	2000.0	9.000	On	L1	19.8	19.6	46.0
2.022000	19.5	2000.0	9.000	On	L1	19.6	26.5	46.0
2.130000	20.8	2000.0	9.000	On	L1	19.6	25.2	46.0
4.173000	19.2	2000.0	9.000	On	L1	19.6	26.8	46.0
9.883500	35.8	2000.0	9.000	On	L1	19.7	14.2	50.0
10.401000	36.8	2000.0	9.000	On	L1	19.7	13.2	50.0

**ANNEX E: Accreditation Certificate**

United States Department of Commerce  
National Institute of Standards and Technology



---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 600118-0

**Telecommunication Technology Labs, CAICT**  
Beijing  
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

---

2018-09-28 through 2019-09-30  
*Effective Dates*



  
*For the National Voluntary Laboratory Accreditation Program*

\*\*\*END OF REPORT\*\*\*