

## FCC PART 90 TEST REPORT

### FCC Part 90

**Report Reference No.**.....: **TRE12020033**

**FCC ID**.....: **YAMTC-508U1**

Compiled by  
 ( position+printed name+signature)..: File administrators Tim Zhang

*Tim Zhang*

Supervised by  
 ( position+printed name+signature)..: Test Engineer Eric Zhang

*Eric Zhang*

Approved by  
 ( position+printed name+signature)..: Manager Wenliang Li

*Wenliang Li*

Date of issue.....: Apr 01, 2012

**Testing Laboratory Name** .....: **Shenzhen Huatongwei International Inspection Co., Ltd**

Address.....: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

**Applicant's name** .....: **Hytera Communications Corporation Ltd.**

Address.....: HYT Tower, Hi-Tech Industrial Park North, Nanshan District, Shenzhen China. 518057

**Test specification:**

Standard .....: **FCC Part 90: PRIVATE LAND MOBILE RADIO SERVICES**


TRF Originator.....: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF.....: Dated 2006-06

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: Two-way Radio

Trade Mark .....: 

Manufacturer .....: **Hytera Communications Corporation Ltd.**

Model/Type reference.....: TC-508 U(1)

Listed Models .....: /

Ratings.....: DC 7.40 V

Modulation .....: FM

Channel Separation.....: 12.5KHz

Rated Power .....: 4 Watts(36.02dBm)/2 Watts(33.00dBm)

Operation Frequency Range .....: From 400MHz to 470MHz

Result.....: **Positive**

# TEST REPORT

<b>Test Report No. :</b>	<b>TRE12020033</b>	Apr 01, 2012
		Date of issue

Equipment under Test : Two-way Radio

Model /Type : TC-508 U(1)

Listed Models : /

**Applicant** : **Hytera Communications Corporation Ltd.**

Address : HYT Tower,Hi-Tech Industrial Park North,Nanshan District,Shenzhen China.518057

**Manufacturer** : **Hytera Communications Corporation Ltd.**

Address : HYT Tower,Hi-Tech Industrial Park North,Nanshan District,Shenzhen China.518057

<b>Test Result</b> according to the standards on page 4:	<b>Positive</b>
--	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS</u></b>	<b>4</b>
<b>2.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment under Test	5
2.4.	Short description of the Equipment under Test (EUT)	5
2.5.	EUT Configuration	6
2.6.	EUT operation mode	6
2.7.	EUT configuration	6
2.8.	Related Submittal(s) / Grant (s)	6
2.9.	Modifications	6
2.10.	Note	6
<b>3.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	8
3.4.	Configuration of Tested System	8
3.5.	Discription of Tested Modes	8
3.6.	Statement of the measurement uncertainty	8
3.7.	Test Description	9
3.8.	Equipments Used during the Test	9
<b>4.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>11</b>
4.1.	Conducted Emissions Test	11
4.2.	Occupied Bandwidth and Emission Mask Test	14
4.3.	Transmitter Radiated Spurious Emssion	23
4.4.	Spurious Emssion on Antenna Port	28
4.5.	Modulation Charcateristics	40
4.6.	Frequency Stability Test	43
4.7.	Maximum Transmitter Power	45
4.8.	Transmitter Frequency Behavior	51
4.9.	Receiver Radiated Spurious Emssion	53
4.10.	Receiver Conducted Spurious Emssion	59
<b>5.</b>	<b><u>TEST SETUP PHOTOS OF THE EUT</u></b>	<b>65</b>
<b>6.</b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u></b>	<b>69</b>

## **1. TEST STANDARDS**

The tests were performed according to following standards:

**FCC Rules Part 90: PRIVATE LAND MOBILE RADIO SERVICES.**

**TIA/EIA 603: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.**

**47 CFR FCC Part 15 Subpart B - Unintentional Radiators**

**FCC Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS**

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample	:	Feb 10, 2012
Testing commenced on	:	Feb 10, 2012
Testing concluded on	:	Apr 01, 2012

### 2.2. Product Description

The Hytera Communications Corporation Ltd.'s Model: TC-508 U(1) or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Two-way Radio	
Model Number	TC-508 U(1)	
FCC ID	YAMTC-508U1	
Rated Output Power	4 Watts(36.02dBm)/2 Watts(33.00dBm)	
Modulation Type	FM for Analog Voice	
	Analog	11K0F3E for 12.5KHz Channel Separation
Channel Separation	Analog Voice	12.5KHz
Antenna Type	External	
Frequency Range	From 400 MHz to 470 MHz	
Maximum Output Power	Analog	4.80W for 12.5 KHz Channel Separation

### 2.3. Equipment under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 7.40V from battery

#### Test frequency list

Modulation Type	Test Channel	Test Frequency
Analog/FM	Low Channel	406.5000 MHz
	Low Channel	418.0000 MHz
	Middle Channel	435.5000 MHz
	High Channel	453.0000 MHz
	High Channel	469.5000 MHz

### 2.4. Short description of the Equipment under Test (EUT)

400-470 MHz U frequency band Two-way Radio (TC-508 U(1)).

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

**FCC ID: YAMTC-508U1**

## 2.5. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 2.6. EUT operation mode

The EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

## 2.8. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **YAMTC-508U1** filing to comply with FCC Part 90 Rules

## 2.9. Modifications

No modifications were implemented to meet testing criteria.

## 2.10. Note

The EUT is is a U frequency band (400-470MHz) Two-way Radio, The functions of the EUT listed as below:

	Test Standards	Reference Report
Radio	FCC Part 90	TRE12020033

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Shenzhen Huatongwei International Inspection Co., Ltd  
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China  
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar 30, 2009. Valid time is until Feb 28, 2015.

##### **A2LA-Lab Cert. No. 2243.01**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept 30, 2013.

##### **FCC-Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jun 01, 2009.

##### **IC-Registration No.: 5377**

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on Jan 25, 2011. Valid time is until Jan 24, 2014

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

##### **NEMKO-Aut. No.: ELA125**

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025:2005 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the Authorization is valid through July 07, 2013.

##### **VCCI**

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2006. Valid time is until December 20, 2012.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2006. Valid time is until December 19, 2012.

**DNV**

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug 24, 2013.


**3.3. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

**3.4. Configuration of Tested System**

**Fig. 2-1 Configuration of Tested System**

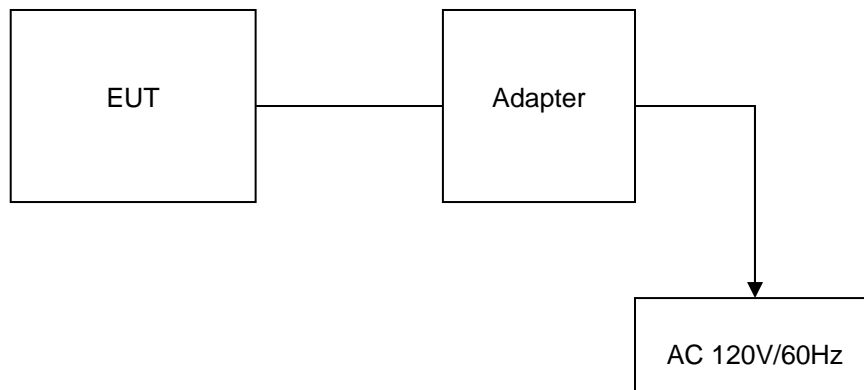

**Table 2-1 Equipment Used in Tested System**

**Adapter:** P/N: PS1014  
 Model: DSA-15P-12 US 120120  
 Input:100-240V~50/60Hz 0.5A  
 Output: +12V DC 1A  
 Power Cable: 180cm  
 ◇ Shielded      ◆ Unshielded

**3.5. Discription of Tested Modes**

The EUT (Two-way Radio) has been tested under normal operating condition. Five channels (the high, the middle and the low) are chosen for testing at each channel separation (12.5 KHz).

**3.6. Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.



Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	150 Hz	(1)
Transmitter power conducted	0.30 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

### 3.7. Test Description

FCC Rules	Description of Test	Test Result
§ 15.107	Conducted Emission	Complies
§ 15.109	Receiver Radiated Spurious Emssion	Complies
§ 15.109	Receiver Conducted Spurious Emssion	Complies
§ 90.205	Maximum Transmitter Power	Complies
§ 90.207	Modulation Characteristic	Complies
§ 90.209	Occupied Bandwidth	Complies
§ 90.210	Emission Mask	Complies
§ 90.213	Frequency Stability	Complies
§ 90.214	Transmitter Frequency Behavior	Complies
§ 90.210	Transmitter Radiated Spurious Emssion	Complies
§ 90.210	Spurious Emssion On Antenna Port	Complies

### 3.8. Equipments Used during the Test

AC Power Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	10/23/2012
EMI Test Receiver	Rohde&Schwarz	ESCS 30	100038	10/23/2012
Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	10/23/2012
EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	10/23/2012

Modulation Characteristic				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	10/23/2012

Transmitter Radiated Spurious Emission & Occupied Bandwidth & Emission Mask & Receiver Radiated Spurious Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Ultra-Broadband Antenna	Rohde&Schwarz	HL562	100015	10/23/2012
EMI Test Receiver	Rohde&Schwarz	ESI 26	100009	10/23/2012
RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	N/A
HORN ANTENNA	Rohde&Schwarz	HF906	100039	10/23/2012
Turntable	ETS	2088	2149	N/A
Antenna Mast	ETS	2075	2346	N/A
EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	10/23/2012
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	10/23/2012
Spectrum Analyzer	AGILENT	E4407B	MY44210775	10/23/2012

Frequency Stability				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Communication Test Set	HP	HP8920B	US35010135	10/23/2012
Signal Generator	Rohde&Schwarz	SMT03	100059	10/23/2012
Climate Chamber	ESPEC	EL-10KA	05107008	10/23/2012

Maximum Transmitter Power & Spurious Emission On Antenna Port				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	AGILENT	E4407B	MY44210775	10/23/2012
Attenuator	R&S	ESH3-22	100449	10/23/2012
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	10/23/2012
High-Pass Filter	Anritsu	MP526B	6220875256	10/23/2012
High-Pass Filter	Anritsu	MP526D	6220878392	10/23/2012

Transient Frequency Behavior				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Signal Generator	Rohde&Schwarz	SMT03	100059	10/23/2012
Storage Oscilloscope	Tektronix	TDS3054B	B033027	10/23/2012
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	10/23/2012


## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST APPLICABLE

The EUT was tested according to ANSI C63.4 - 2009. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm / 50 u Henry as specified by section 5.1 of ANSI C63.4 - 2009. Cables and peripherals were moved to find the maximum emission levels for each frequency.

#### TEST CONFIGURATION

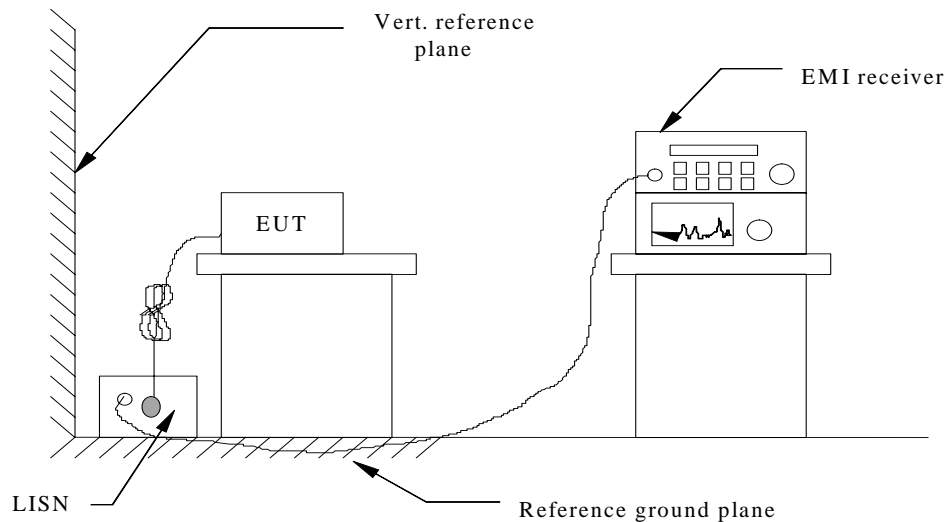

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
- 4 If a EUT received DC power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

**TEST RESULTS**

**For FM Modulation @ 12.5 KHz**

**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

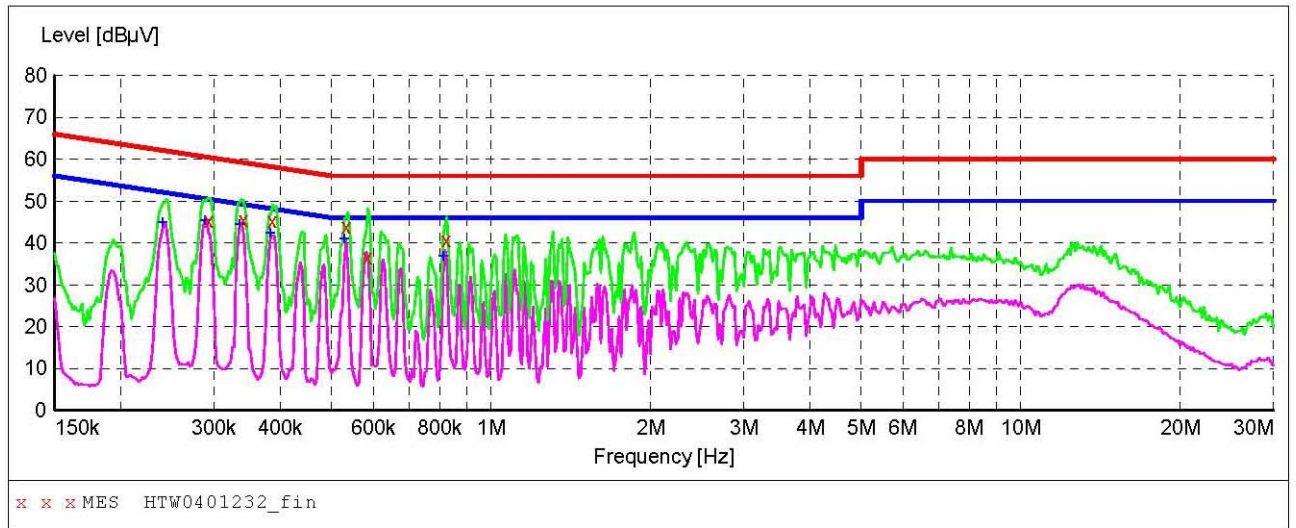

**MEASUREMENT RESULT: "HTW0401232\_fin"**

4/1/2012 10:25AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.292935	45.30	10.1	60	15.1	QP	L1	GND
0.340818	45.40	10.1	59	13.8	QP	L1	GND
0.387163	45.20	10.1	58	12.9	QP	L1	GND
0.532490	44.00	10.1	56	12.0	QP	L1	GND
0.585920	36.60	10.1	56	19.4	QP	L1	GND
0.825360	40.60	10.1	56	15.4	QP	L1	GND


**MEASUREMENT RESULT: "HTW0401232\_fin2"**

4/1/2012 10:25AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.240020	44.90	10.1	52	7.2	AV	L1	GND
0.288298	45.30	10.1	51	5.3	AV	L1	GND
0.335430	44.30	10.1	49	5.0	AV	L1	GND
0.384088	42.30	10.1	48	5.9	AV	L1	GND
0.528260	40.80	10.1	46	5.2	AV	L1	GND
0.812310	36.80	10.1	46	9.2	AV	L1	GND

**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

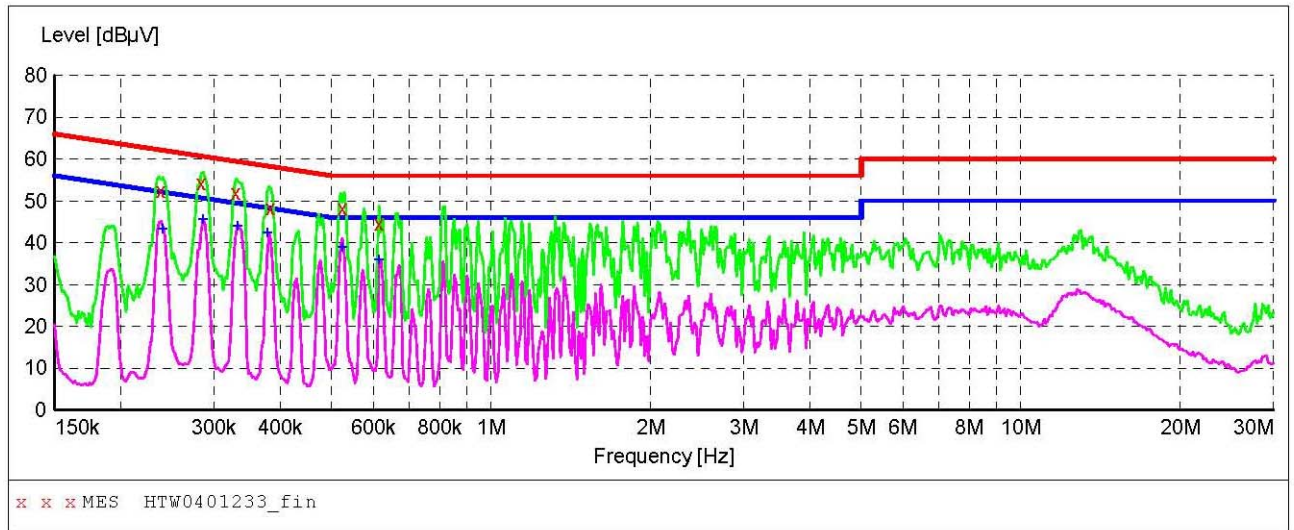

**MEASUREMENT RESULT: "HTW0401233\_fin"**

4/1/2012 10:33AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.238115	52.40	10.1	62	9.8	QP	N	GND
0.283740	54.20	10.1	61	6.5	QP	N	GND
0.330120	52.00	10.1	59	7.4	QP	N	GND
0.384090	48.20	10.1	58	10.0	QP	N	GND
0.524070	48.30	10.1	56	7.7	QP	N	GND
0.614618	44.50	10.1	56	11.5	QP	N	GND

**MEASUREMENT RESULT: "HTW0401233\_fin2"**

4/1/2012 10:33AM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.240020	43.20	10.1	52	8.9	AV	N	GND
0.286010	45.50	10.1	51	5.1	AV	N	GND
0.332761	43.80	10.1	49	5.6	AV	N	GND
0.378010	42.30	10.1	48	6.0	AV	N	GND
0.524069	38.90	10.1	46	7.1	AV	N	GND
0.614610	35.80	10.1	46	10.2	AV	N	GND

## 4.2. Occupied Bandwidth and Emission Mask Test

### TEST APPLICABLE

- (a). Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.
- (b). Emission Mask B: For transmitters that are equipped with an audio low-pass filter pursuant to §90.211(a), the power of any emission must be below the unmodulated carrier power (P) as follows:
- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
  - (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
  - (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.
- (c). Emission Mask D, 12.5 kHz channel bandwidth equipment: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
  - (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.
  - (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.

### TEST CONFIGURATION

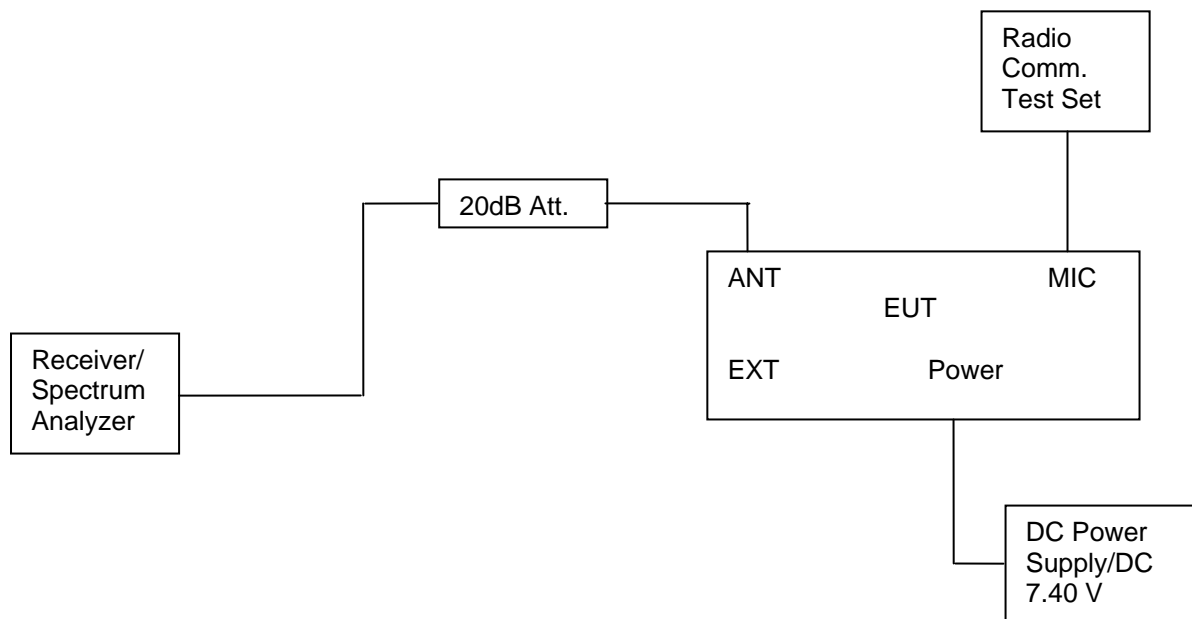

### TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 The EUT was modulated by 2.5 KHz Sine wave audio signal; the level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing).
- 3 Set EUT as normal operation.
- 4 Set SPA Center Frequency = fundamental frequency, RBW=300Hz, VBW= 3 KHz, span =50 KHz.
- 5 Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 6 Set SPA Center Frequency=fundamental frequency, set =100Hz, VBW=1 KHz, span=50 KHz for 12.5 channel spacing.


**TEST RESULTS**

**4.2.1 Occupied Bandwidth**


Modulation Type	Channel Separation	Test Channel	Test Frequency	99% Occupied Bandwidth	26dB Occupied Band width
FM	12.5KHz	Low	406.5000 MHz	9.985 KHz	10.563 KHz
		Low	418.0000 MHz	9.993 KHz	10.567 KHz
		Middle	435.5000 MHz	9.986 KHz	10.567 KHz
		High	453.0000 MHz	9.990 KHz	10.581 KHz
		High	469.5000 MHz	9.997 KHz	10.592 KHz
Limit		11.25KHz for 12.5KHz Channel Separation			
Test Results		Compliance			

**Plots of 99% and 26dB Bandwidth Measurement**


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	406.5000	9.985	10.563	11.25	Compliance

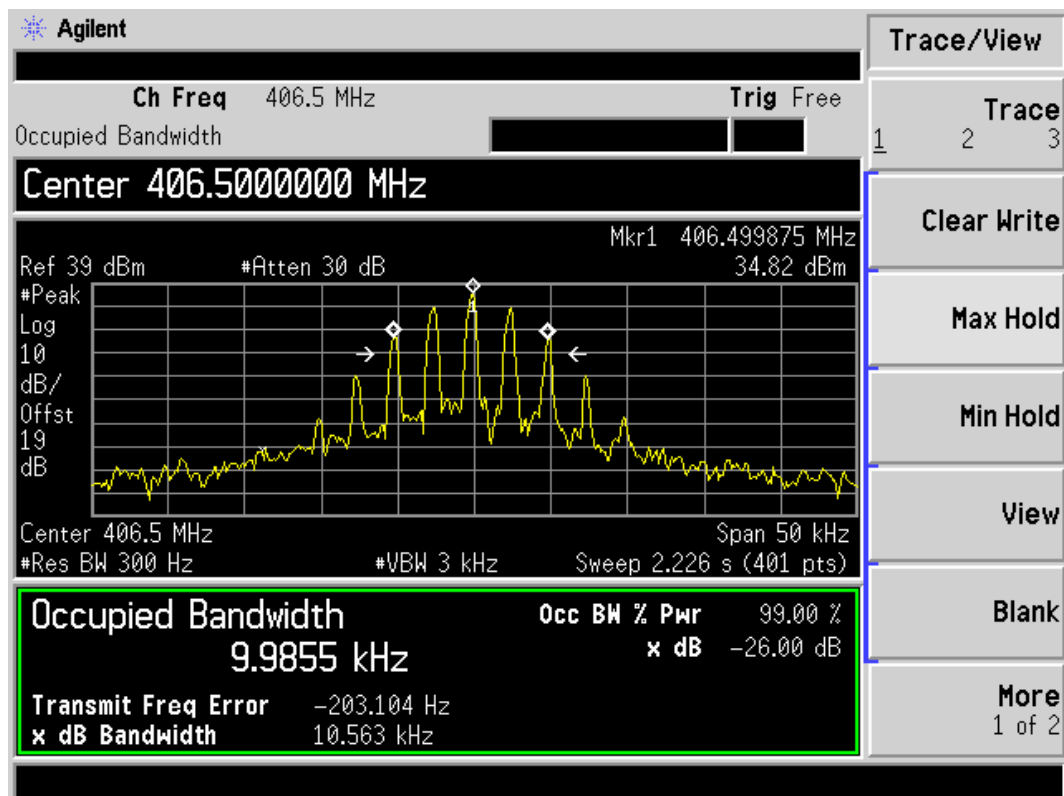

Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	418.0000	9.993	10.567	11.25	Compliance

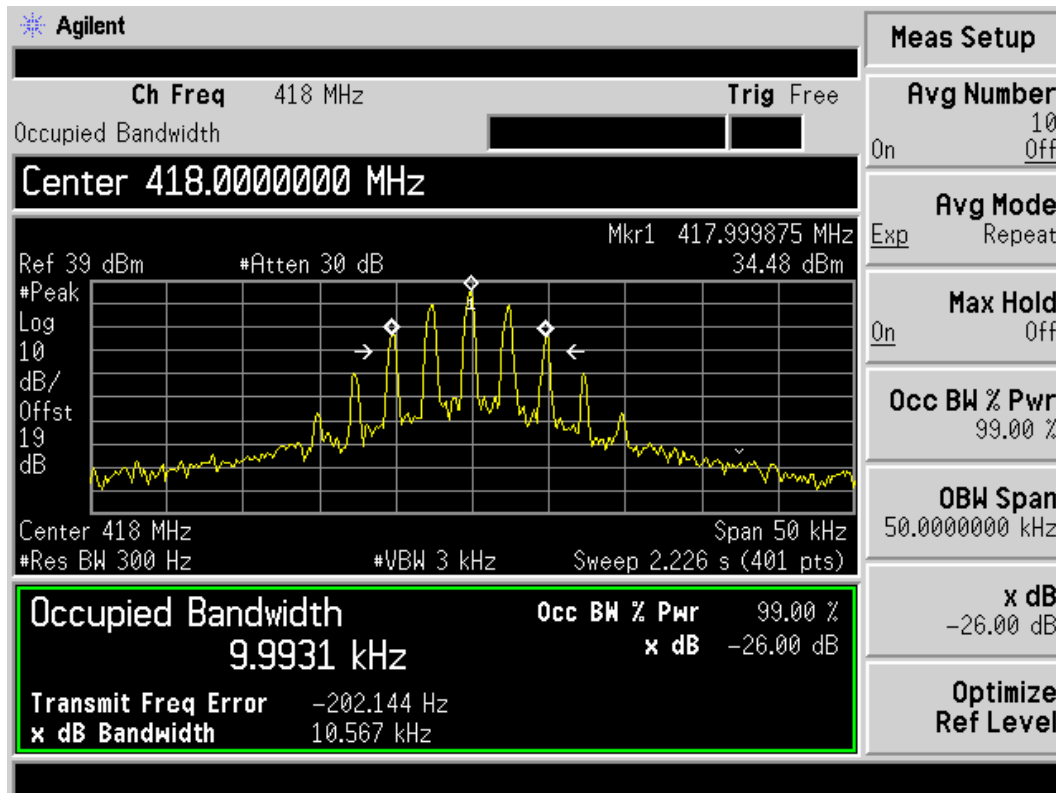


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	435.5000	9.986	10.567	11.25	Compliance

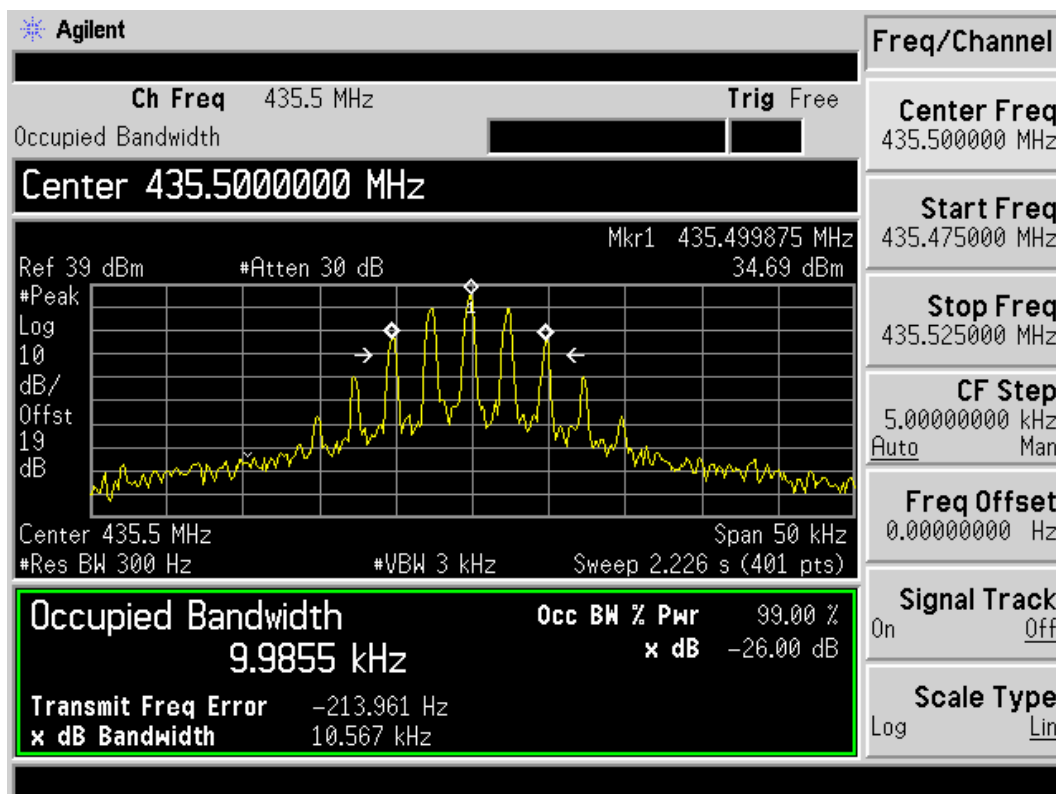




Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	453.0000	9.990	10.581	11.25	Compliance

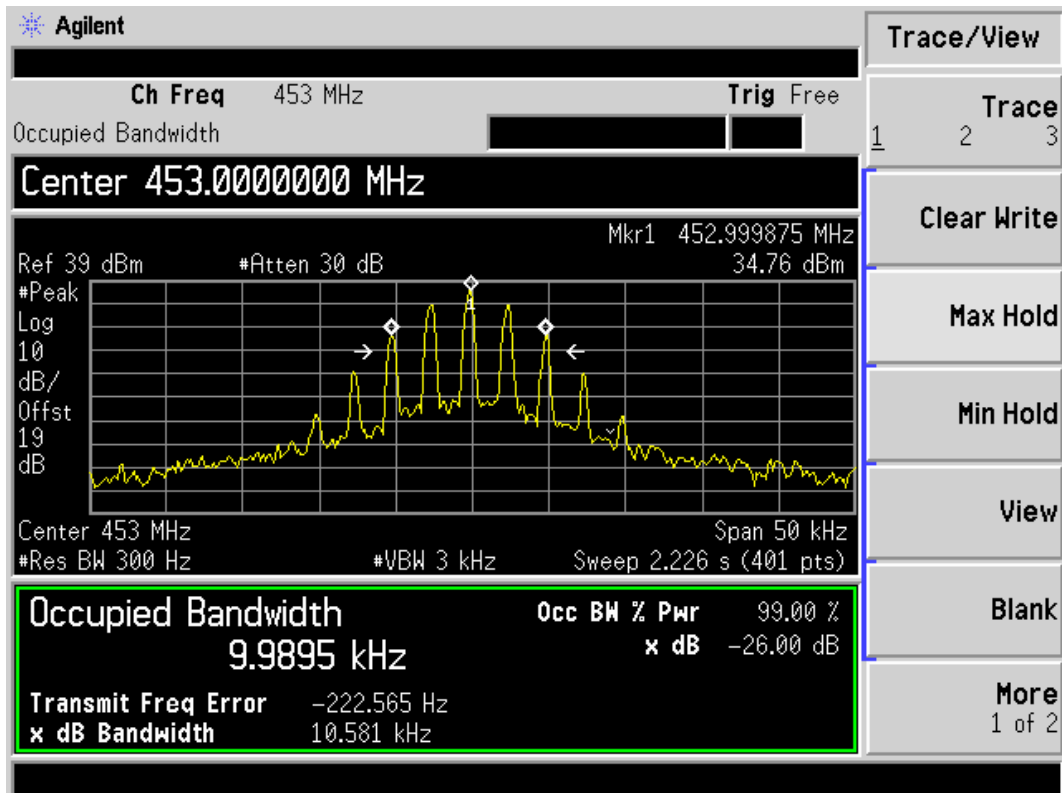

Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	469.5000	9.997	10.592	11.25	Compliance

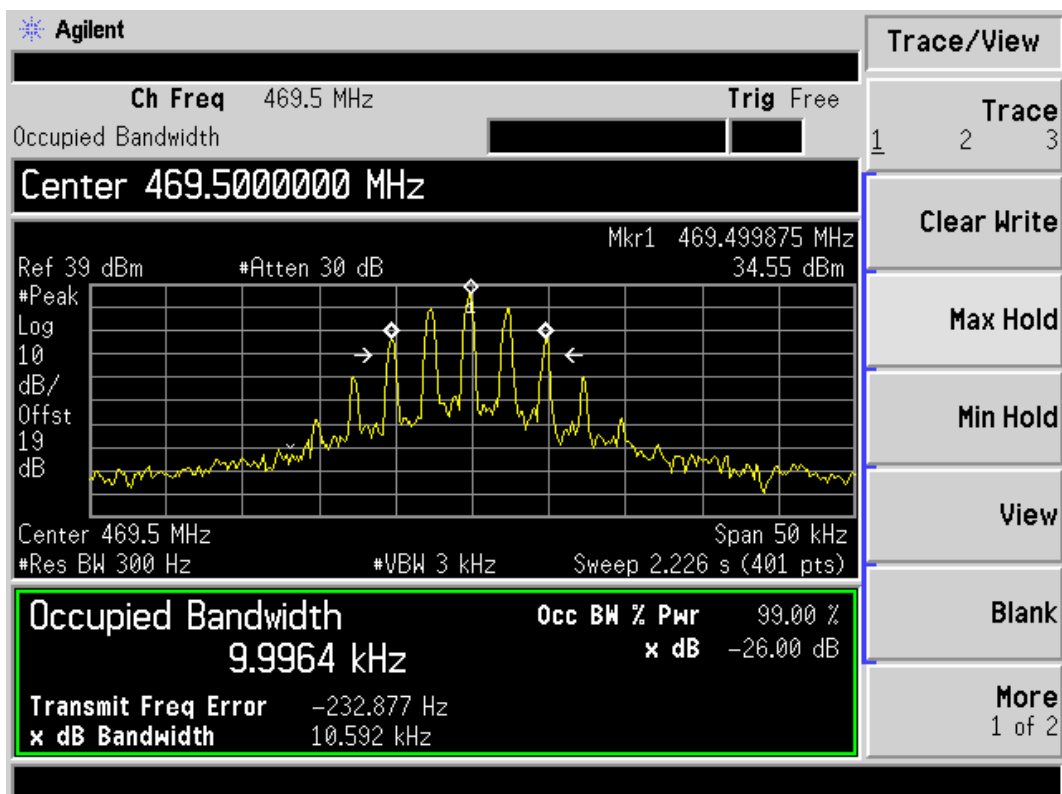

### 4.2.2 Emission Mask


Modulation Type	Channel Separation	Test Channel	Test Frequency	FCC Applicable Mask	RBW
FM	12.5KHz	Low	406.5000 MHz	D	100 Hz
		Low	418.0000 MHz	D	100 Hz
		Middle	435.5000 MHz	D	100 Hz
		High	453.0000 MHz	D	100 Hz
		High	469.5000 MHz	D	100 Hz
Test Results		Compliance			

#### Plots of Emission Mask Measurement

Referred as the attached plot hereinafter

Note: The yellow curve represents unmodulated signal.  
The green curve represents modulated signal.


Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Audio Freq. (KHz)	Results
FM	12.5 KHz	406.5000	D	100	2.5	Compliance

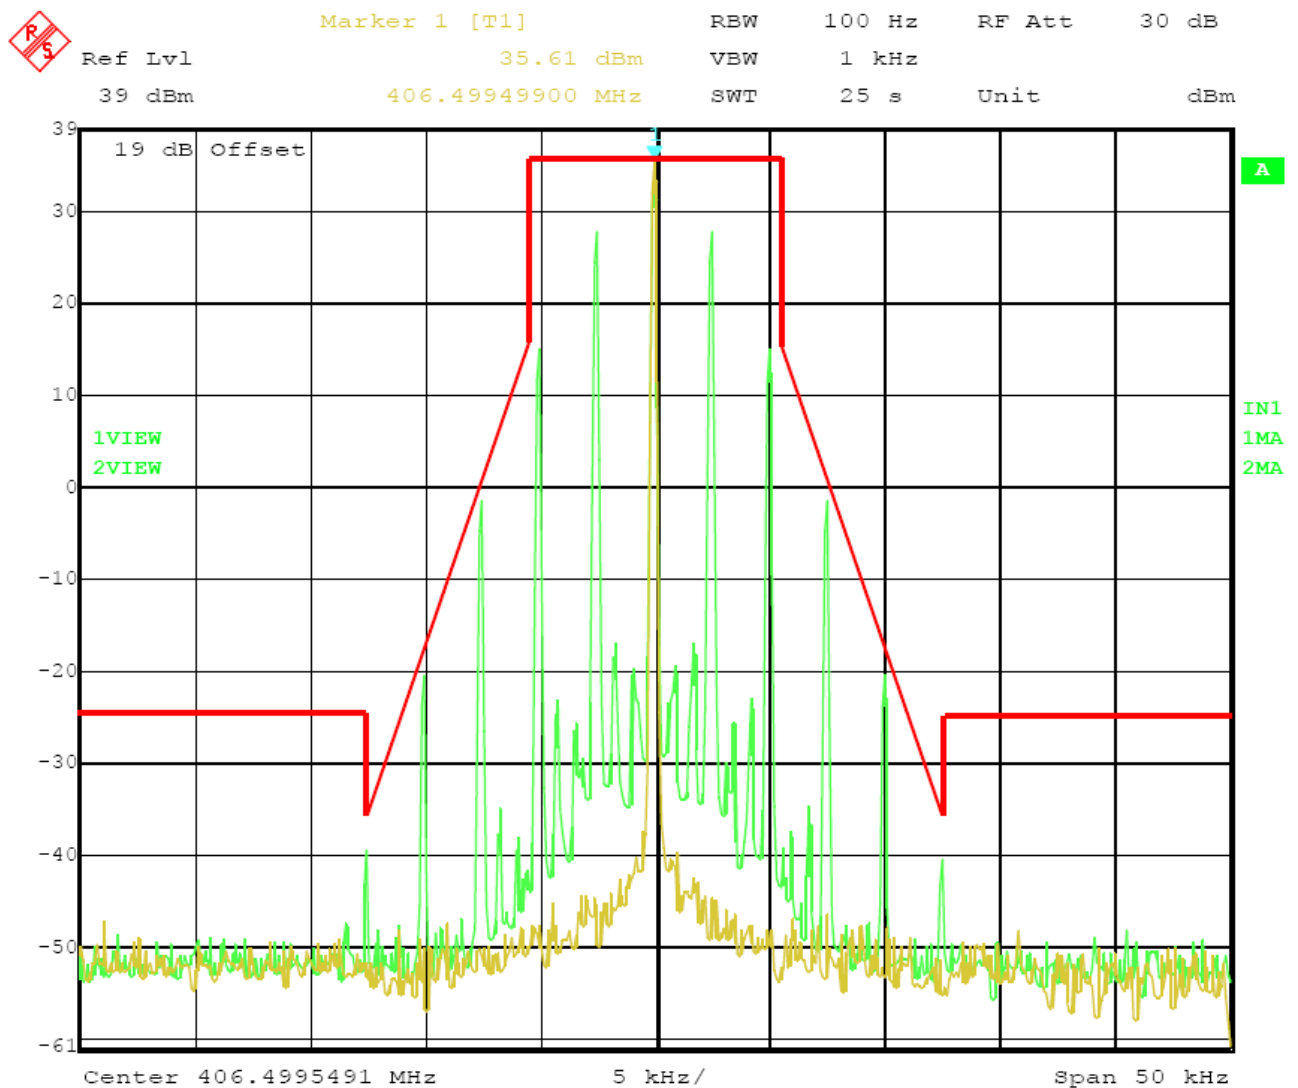

Date: 30.MAR.2012 11:50:04

12.5 kHz Channel Spacing, 406.5000 MHz, 2500 Hz Audio Modulation Only


Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Audio Freq. (KHz)	Results
FM	12.5 KHz	418.0000	D	100Hz	2.5	Compliance

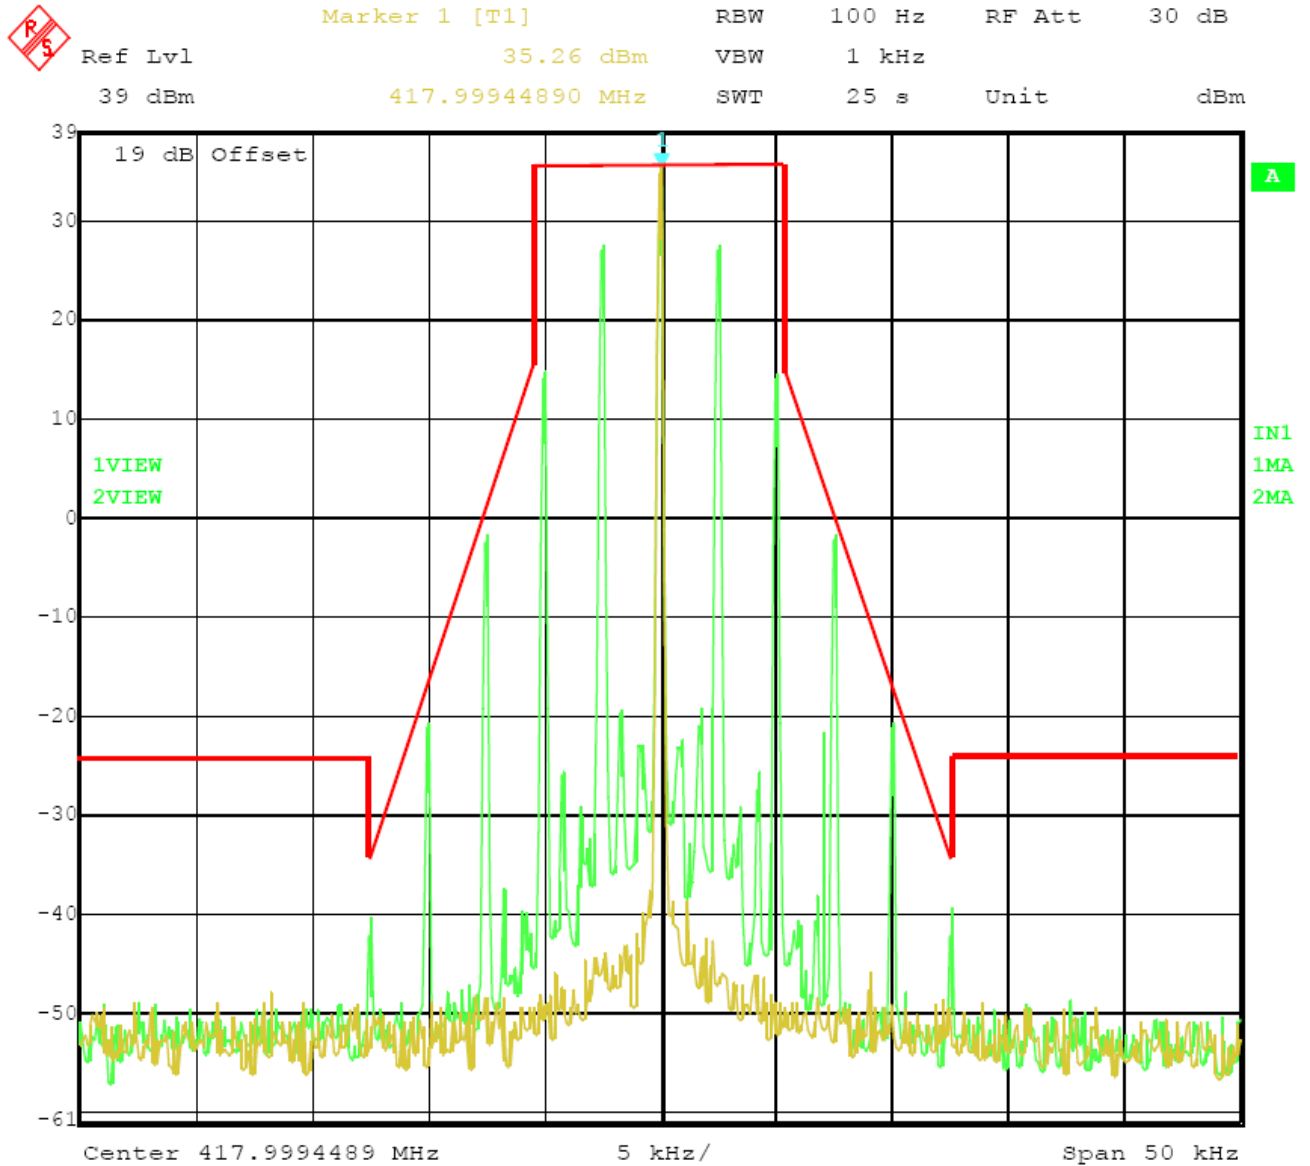


Date: 30.MAR.2012 12:01:36

12.5 kHz Channel Spacing, 418.0000 MHz, 2500 Hz Audio Modulation Only

Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Audio Freq. (KHz)	Results
FM	12.5 KHz	435.5000	D	100Hz	2.5	Compliance


Marker 1 [T1]
RBW 100 Hz
RF Att 30 dB  
Ref Lvl 39 dBm
35.35 dBm
VBW 1 kHz  
19 dB Offset
435.49939880 MHz
SWT 25 s
Unit dBm

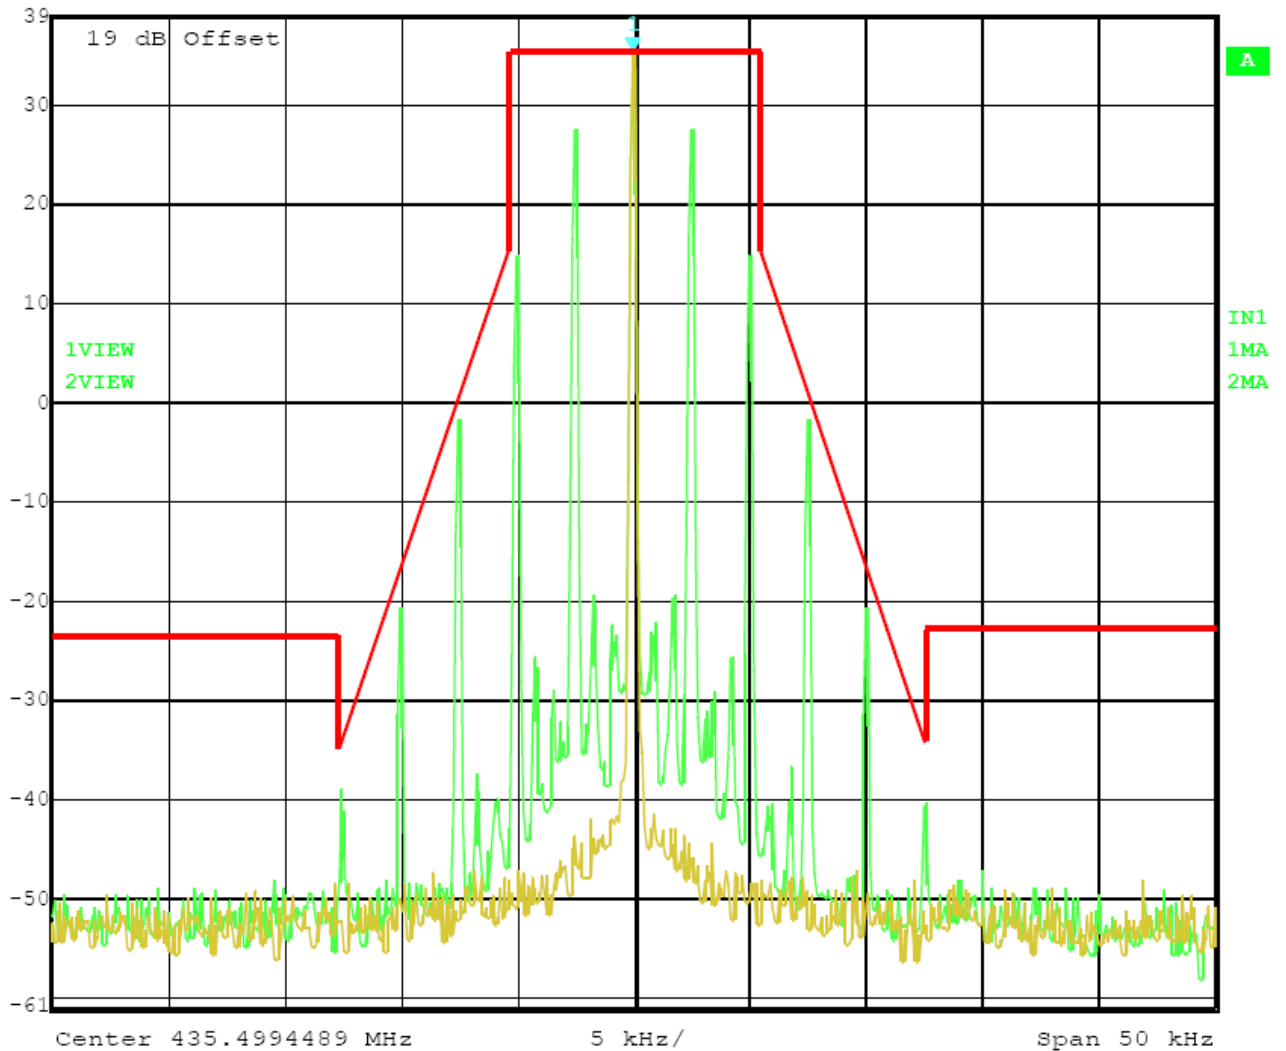


Date: 30.MAR.2012 12:03:36

12.5 kHz Channel Spacing, 435.5000 MHz, 2500 Hz Audio Modulation Only

Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Audio Freq. (KHz)	Results
FM	12.5 KHz	453.0000	D	100Hz	2.5	Compliance



Marker 1 [T1] RBW 100 Hz RF Att 30 dB  
 Ref Lvl 35.40 dBm VBW 1 kHz  
 39 dBm 452.99939880 MHz SWT 25 s Unit dBm

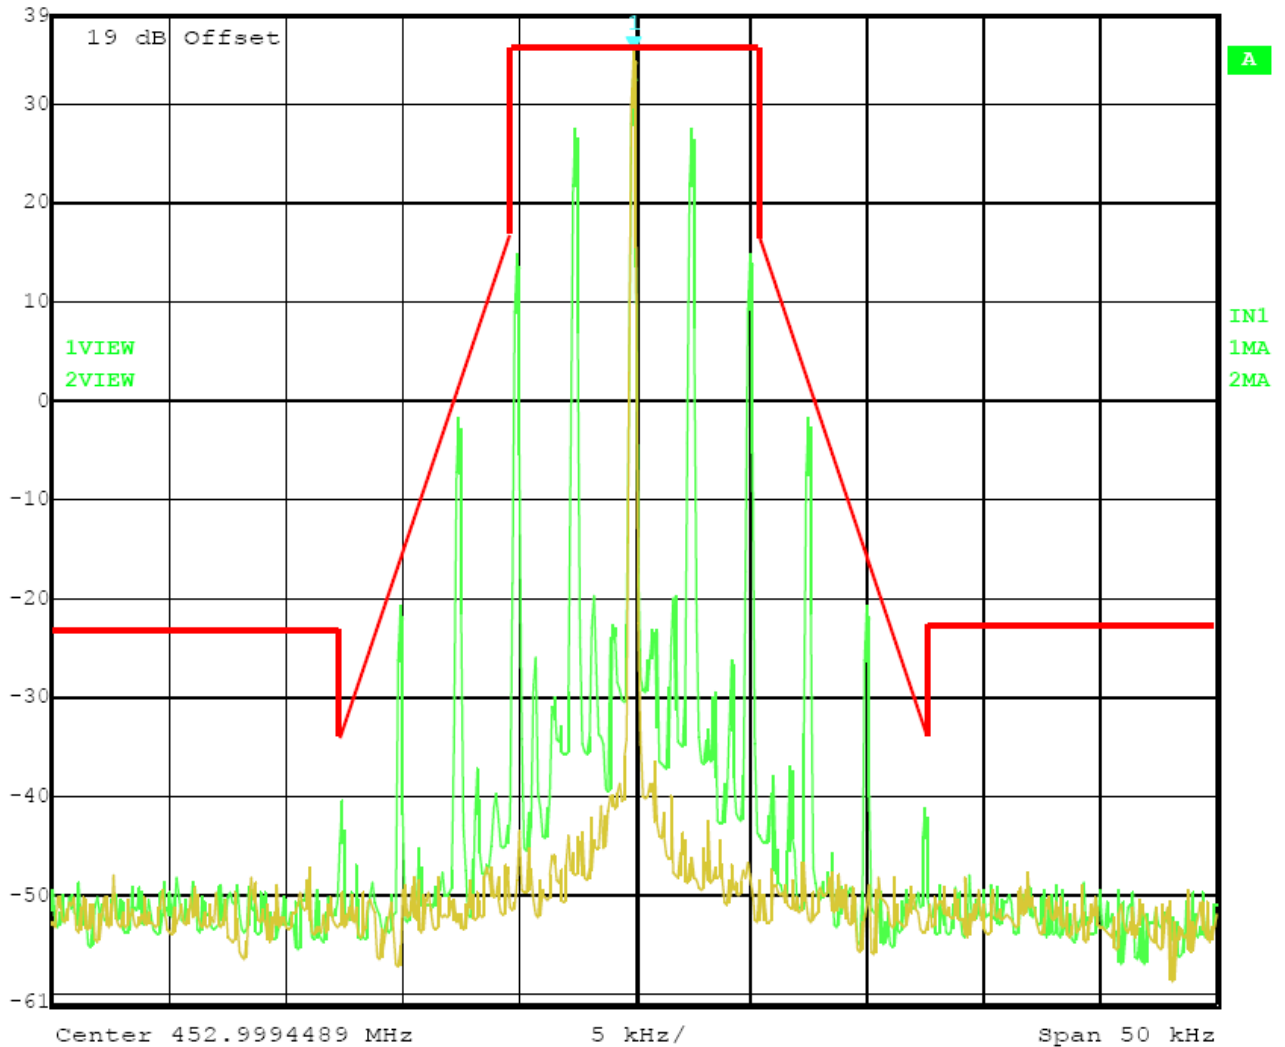


Date: 30.MAR.2012 12:05:50

12.5 kHz Channel Spacing, 453.0000 MHz, 2500 Hz Audio Modulation Only

Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Audio Freq. (KHz)	Results
FM	12.5 KHz	469.5000	D	100Hz	2.5	Compliance



Marker 1 [T1] RBW 100 Hz RF Att 30 dB  
 Ref Lvl 35.16 dBm VBW 1 kHz  
 39 dBm 469.49934870 MHz SWT 25 s Unit dBm

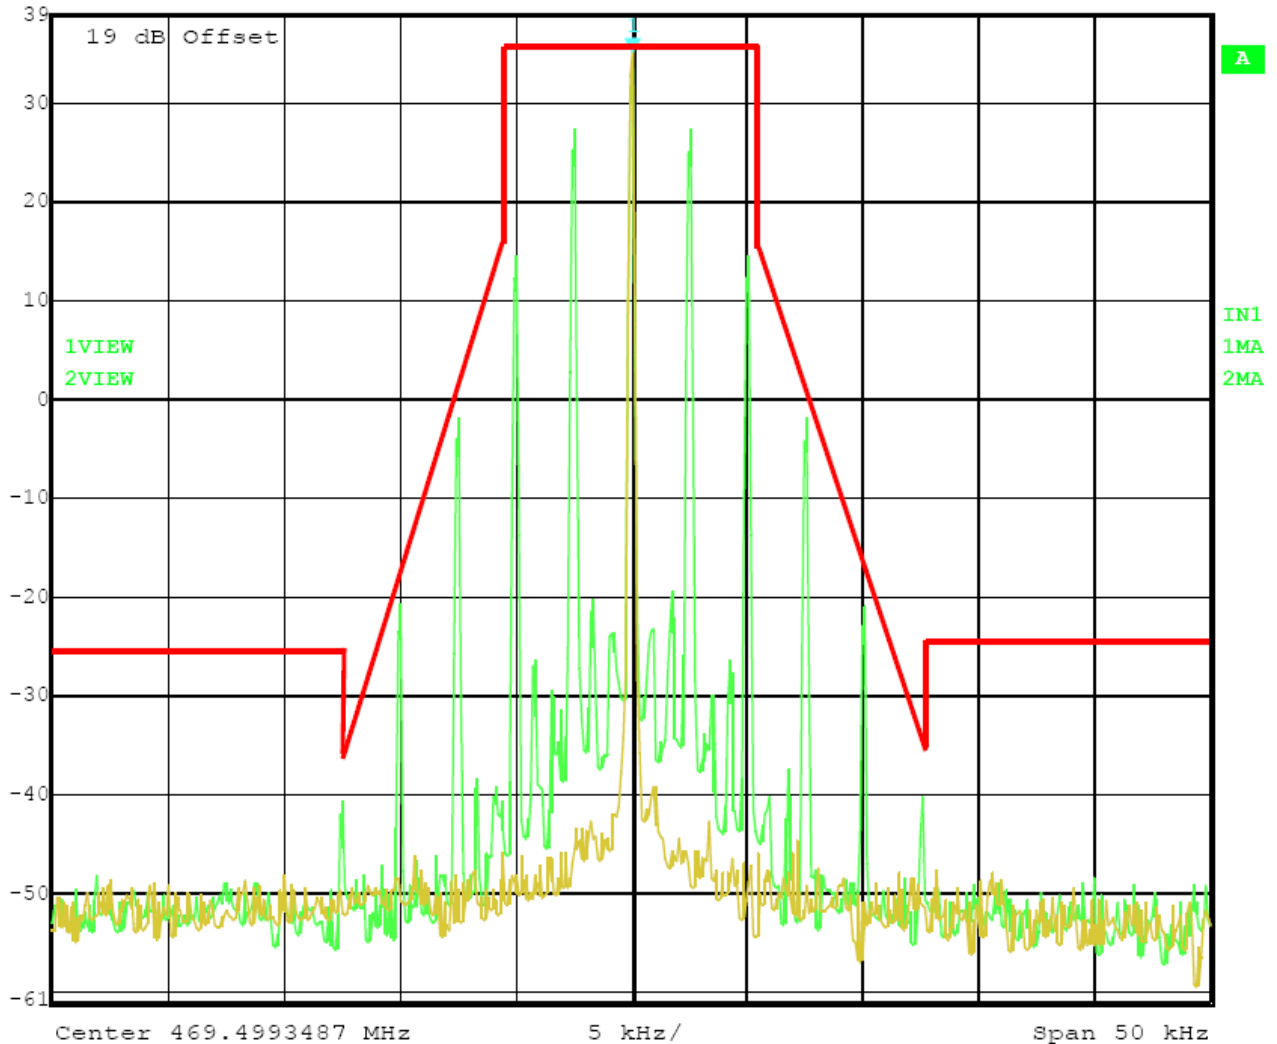

Date: 30.MAR.2012 12:07:49

12.5 kHz Channel Spacing, 469.5000 MHz, 2500 Hz Audio Modulation Only

### 4.3. Transmitter Radiated Spurious Emission

#### TEST APPLICABLE



According to the TIA/EIA 603 test method, and according to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:



- 1 On any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 KHz removed from  $f_0$ : Zero dB
  - 2 On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in KHz)  $f_0$  of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27dB
  - 3 On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in KHz)  $f_0$  of more than 12.5 KHz: At least  $50+10 \log (P)$  dB or 70 dB, which ever is lesser attenuation.
- For transmitters designed to transmit with 25 KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:

- 1 On any frequency removed from the assigned frequency by more than 50 percent, but no more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2 On any frequency removed from the assigned frequency by more than 100 percent, but no more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3 On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43+10\log (P)$  dB.

#### TEST CONFIGURATION

Below 1GHz

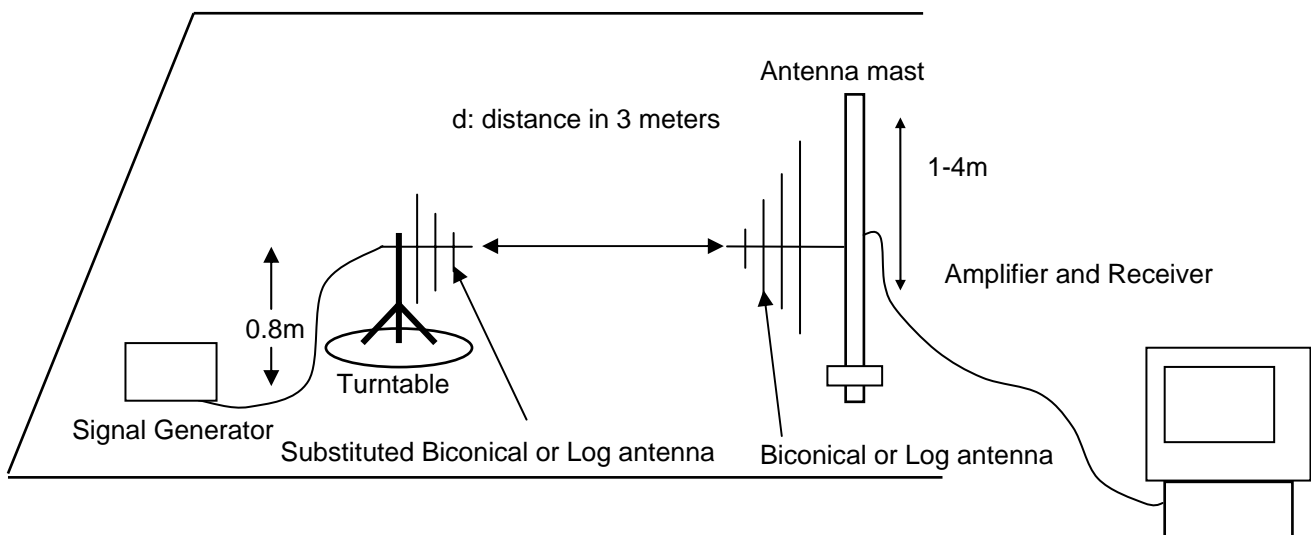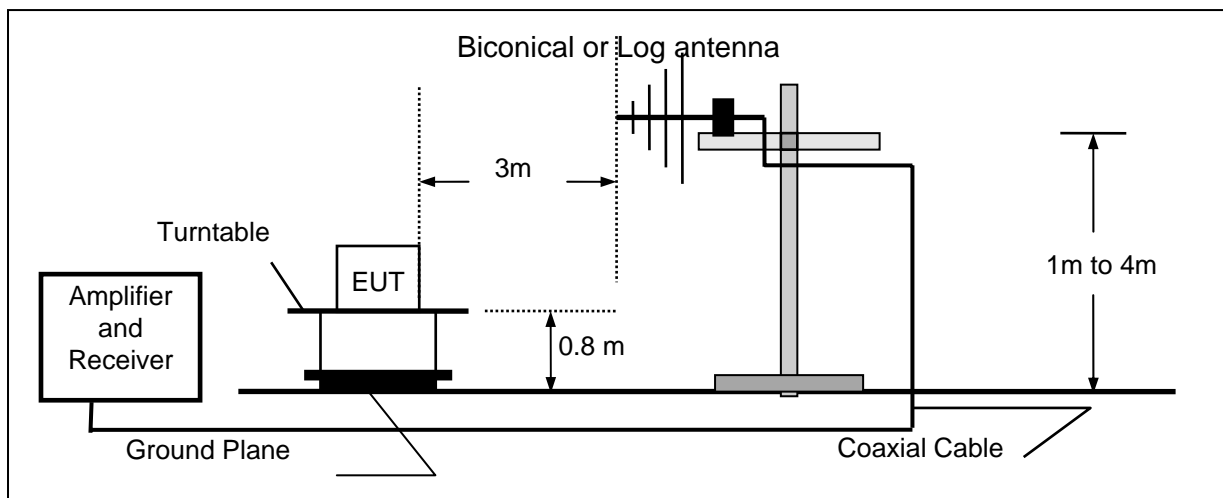

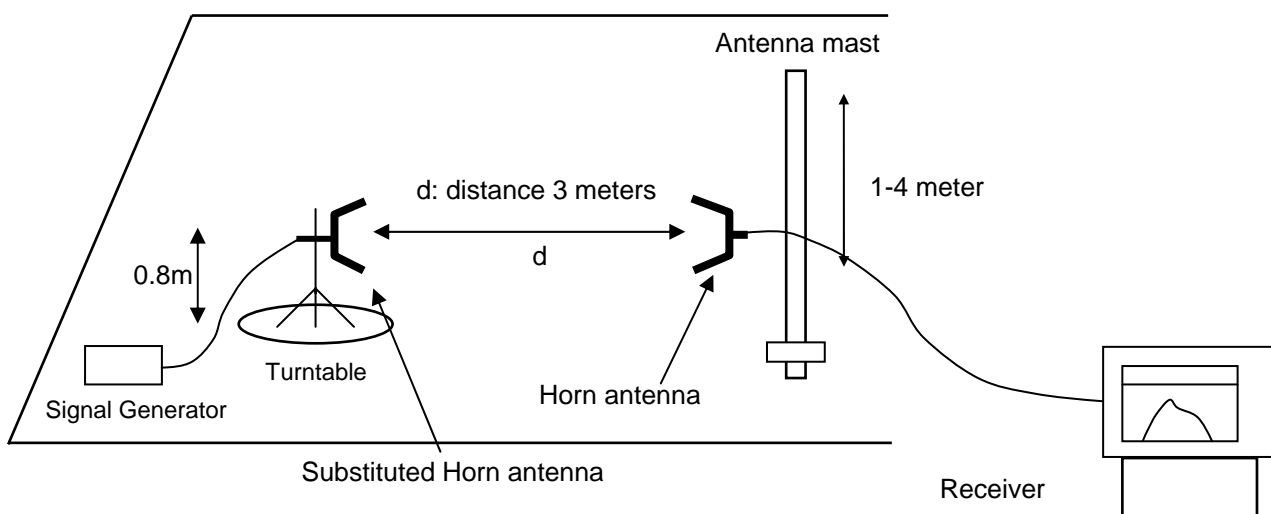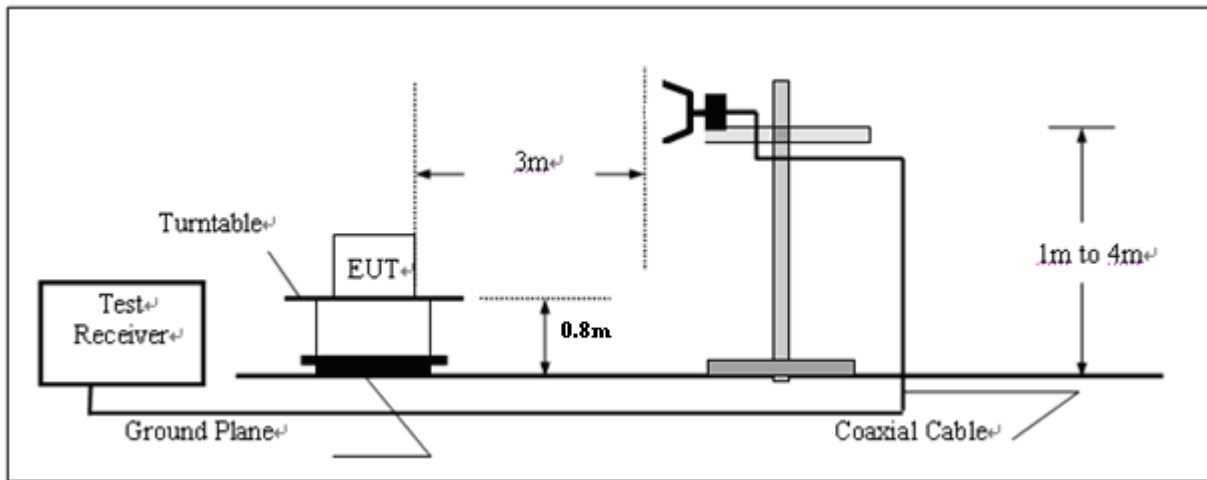**Above 1GHz****TEST PROCEDURE**

- 1 Set the EMI Receiver (for measuring E-Field) and Receiver (for measuring EIRP) as follows:  
Center Frequency: equal to the signal source  
Resolution BW: 100 KHz  
Video BW: VBW > RBW  
Detector Mode: positive  
Average: off  
Span: 3 x the signal bandwidth
- 2 Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor + Amplifier Gain  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB)}$
- 3 The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- 4 Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):  
DIPOLE antenna for frequency from 30-1000 MHz or  
HORN antenna for frequency above 1 GHz}.
- 5 Mount the transmitting antenna at 1.0 meter high from the ground plane.
- 6 Use one of the following antenna as a receiving antenna:  
DIPOLE antenna for frequency from 30-1000 MHz or  
HORN antenna for frequency above 1 GHz}.
- 7 If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- 8 Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- 9 Tune the EMI Receivers to the test frequency.
- 10 Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- 11 The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.



- 12 Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
  - 13 Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
  - 14 Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:  

$$P = P_1 - L_1 = (P_2 + L_2) - L_1 = P_3 + A + L_2 - L_1$$

$$\text{EIRP} = P + G_1 = P_3 + L_2 - L_1 + A + G_1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver} = L_2 - L_1 + G_1$$
- Where:
- P: Actual RF Power fed into the substitution antenna port after corrected.
  - P<sub>1</sub>: Power output from the signal generator
  - P<sub>2</sub>: Power measured at attenuator A input
  - P<sub>3</sub>: Power reading on the Average Power Meter
  - EIRP: EIRP after correction
  - ERP: ERP after correction
- 15 Adjust both transmitting and receiving antenna in a Horizontal polarization, then repeat step (11) to (14).
  - 16 Repeat step (4) to (16) for different test frequency
  - 17 Repeat steps (3) to (12) with the substitution antenna oriented in horizontal polarization.
  - 18 Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

## **TEST RESULTS**

The Transmitter Radiated Spurious Emission was performed to the Rated high power (4Watt) and Rated low power (2Watt) the datum that reported below is the worst case (Rated high power) of the two rated power conditions.

### **Modulation Type: FM**

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 11 (12.5 kHz bandwidth only): On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f d in kHz) of more than 12.5 kHz at least:

Low:  $50 + 10 \log (\text{Pwatts}) = 50 + 10 \log (4.23) = 56.26 \text{ dB}$

High:  $50 + 10 \log (\text{Pwatts}) = 50 + 10 \log (4.80) = 56.81 \text{ dB}$

Note: In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL-50-10log<sub>10</sub> (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 36.02 dBm.

Limit (dBm) = 36.02-50-10log<sub>10</sub> (4.80) = -20 dBm

Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. The measurement frequency range from 30 MHz to 6 GHz.

3. \*\*\* means that the emission level is too low to be measured or at least 20 dB down than the limit.

Modulation		FM		Channel Separation		12.5KHz		
Test Channel		Low Channel		Test Frequency		406.5000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
813.000	57.57	Peak	H	200	222	-34.13	-20	14.13
1219.500	44.22	Peak	H	200	100	-53.26	-20	33.26
2032.500	45.21	Peak	H	120	52	-51.06	-20	31.06
...	...		H			...		
813.000	56.15	Peak	V	100	74	-34.45	-20	14.45
1219.500	45.25	Peak	V	100	105	-49.27	-20	29.27
2032.500	44.45	Peak	V	100	75	-54.14	-20	34.14
...	...		V			...		

Modulation		FM		Channel Separation		12.5KHz		
Test Channel		Low Channel		Test Frequency		418.0000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
836.000	57.25	Peak	H	100	44	-34.38	-20	14.38
1254.000	45.52	Peak	H	150	78	-53.10	-20	33.10
2090.000	47.52	Peak	H	100	85	-51.16	-20	31.16
...	...		H			...		
836.000	59.54	Peak	V	150	53	-32.53	-20	12.53
1254.000	47.25	Peak	V	200	256	-48.28	-20	28.28
2090.000	49.45	Peak	V	100	47	-53.14	-20	33.14
...	...		V			...		

Modulation		FM		Channel Separation		12.5KHz		
Test Channel		Middle Channel		Test Frequency		435.5000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
871.000	58.52	Peak	H	250	350	-36.13	-20	16.13
1306.500	47.52	Peak	H	300	41	-48.10	-20	28.10
2613.000	48.25	Peak	H	150	325	-49.37	-20	29.37
...	...		H			...		
871.000	60.24	Peak	V	150	48	-34.73	-20	14.73
1306.500	45.35	Peak	V	100	75	-48.34	-20	28.34
2613.000	46.56	Peak	V	100	325	-52.76	-20	32.76
...	...		V			...		

Modulation		FM		Channel Separation		12.5KHz		
Test Channel		High Channel		Test Frequency		453.0000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
906.000	56.74	Peak	H	100	110	-36.28	-20	16.28
1359.000	45.36	Peak	H	150	285	-49.11	-20	29.11
2265.000	49.05	Peak	H	300	32	-47.60	-20	27.60
...	...		H			...		
906.000	58.10	Peak	V	150	152	-34.40	-20	14.40
1359.000	45.26	Peak	V	100	47	-52.41	-20	32.41
2265.000	50.44	Peak	V	100	210	-45.21	-20	25.21
...	...		V			...		

Modulation		FM		Channel Separation		12.5KHz		
Test Channel		High Channel		Test Frequency		469.5000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
939.000	57.57	Peak	H	100	141	-36.13	-20	16.13
1408.500	45.55	Peak	H	100	256	-52.39	-20	32.39
2347.500	47.56	Peak	H	100	41	-49.36	-20	29.36
...	...		H			...		
939.000	58.23	Peak	V	200	120	-35.42	-20	15.42
1408.500	45.78	Peak	V	100	25	-52.62	-20	32.62
2347.500	48.56	Peak	V	100	11	-50.39	-20	30.39
...	...		V			...		

#### 4.4. Spurious Emission on Antenna Port

##### TEST APPLICABLE


The same as Section 4.3

##### TEST PROCEDURE

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th. Harmonic for the lower and the highest frequency range. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz. VBW=3MHz from the 1GHz to 10<sup>th</sup> Harmonic.

The audio input was set to 0 to get the unmodulated carrier, the resulting picture is print out for each channel separation.

##### TEST CONFIGURATION

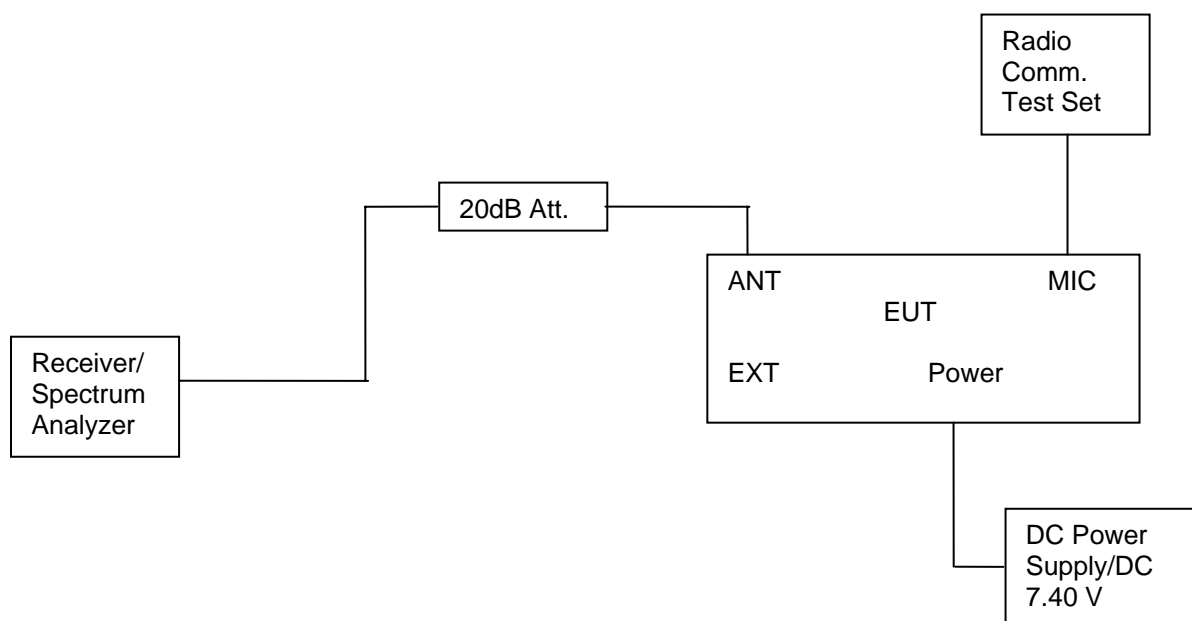

##### TEST RESULTS

###### Modulation Type: FM

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 11 (12.5 kHz bandwidth only): On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f d in kHz) of more than 12.5 kHz at least:

Low:  $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (4.23) = 56.26 \text{ dB}$

High:  $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (4.80) = 56.81 \text{ dB}$

Note: In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL-50-10log<sub>10</sub> (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,  
In this application, the EL is 36.02 dBm.

Limit (dBm) = 36.02-50-10log<sub>10</sub> (4.80) = -20 dBm

Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. The measurement frequency range from 30MHz to 6 GHz.

**For Rated High Power (4Watt)**



Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz	
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)
FM	12.5KHz	Low	406.5000	568.35	-27.12	3225.00	-38.70
		Low	418.0000	582.90	-26.57	2850.00	-38.55
		Middle	435.5000	871.47	-26.46	2987.50	-37.79
		High	453.0000	803.57	-27.10	3112.50	-38.79
		High	469.5000	803.57	-26.47	3050.00	-38.42
Limit		-20dBm for 12.5KHz Channel Separation					
Test Results		Compliance					

**For Rated Low Power (2Watt)**



Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz	
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)
FM	12.5KHz	Low	406.5000	631.40	-26.91	2812.50	-38.80
		Low	418.0000	786.60	-27.31	2987.50	-37.78
		Middle	435.5000	871.47	-27.33	2400.00	-39.29
		High	453.0000	822.97	-27.17	3087.50	-38.91
		High	469.5000	830.25	-27.21	3537.50	-39.15
Limit		-20dBm for 12.5KHz Channel Separation					
Test Results		Compliance					

**Plots of Spurious Emission on Antenna Port Measurement****For Rated High Power (4Watt)**



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Low	406.5000	568.35	-27.12	3225.00	-38.70	-20dBm
Test Results				Compliance				

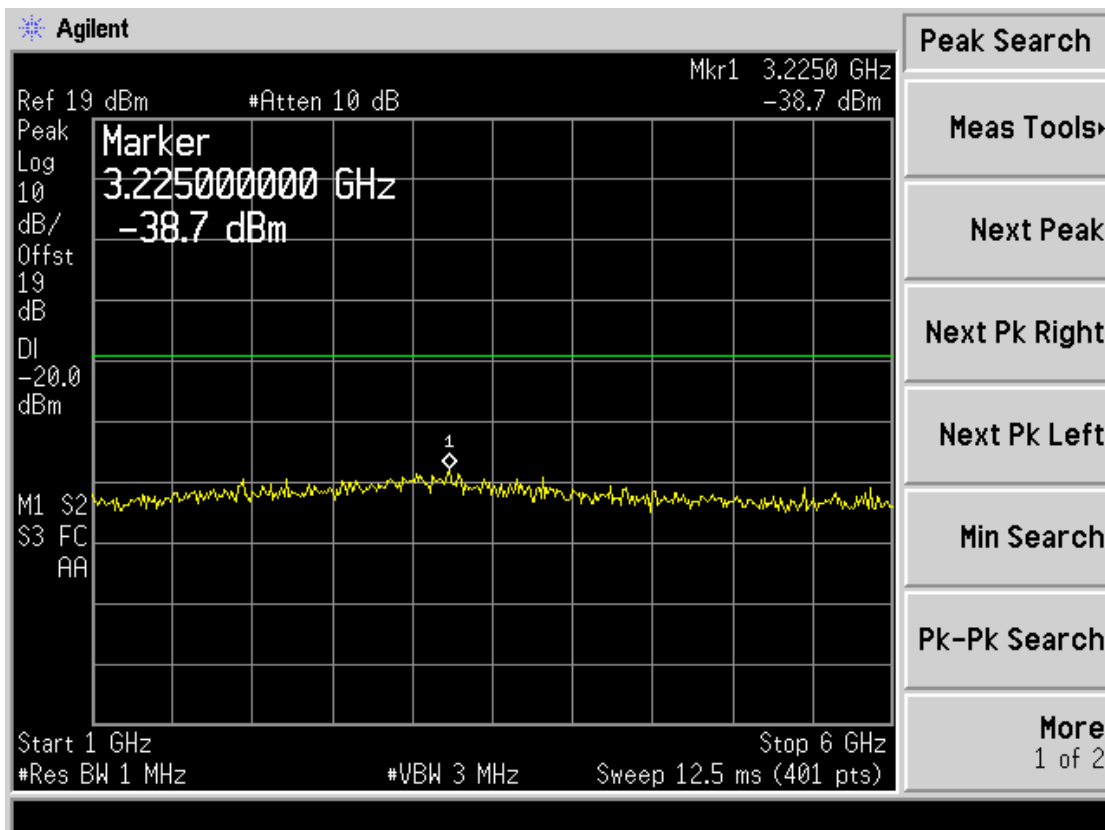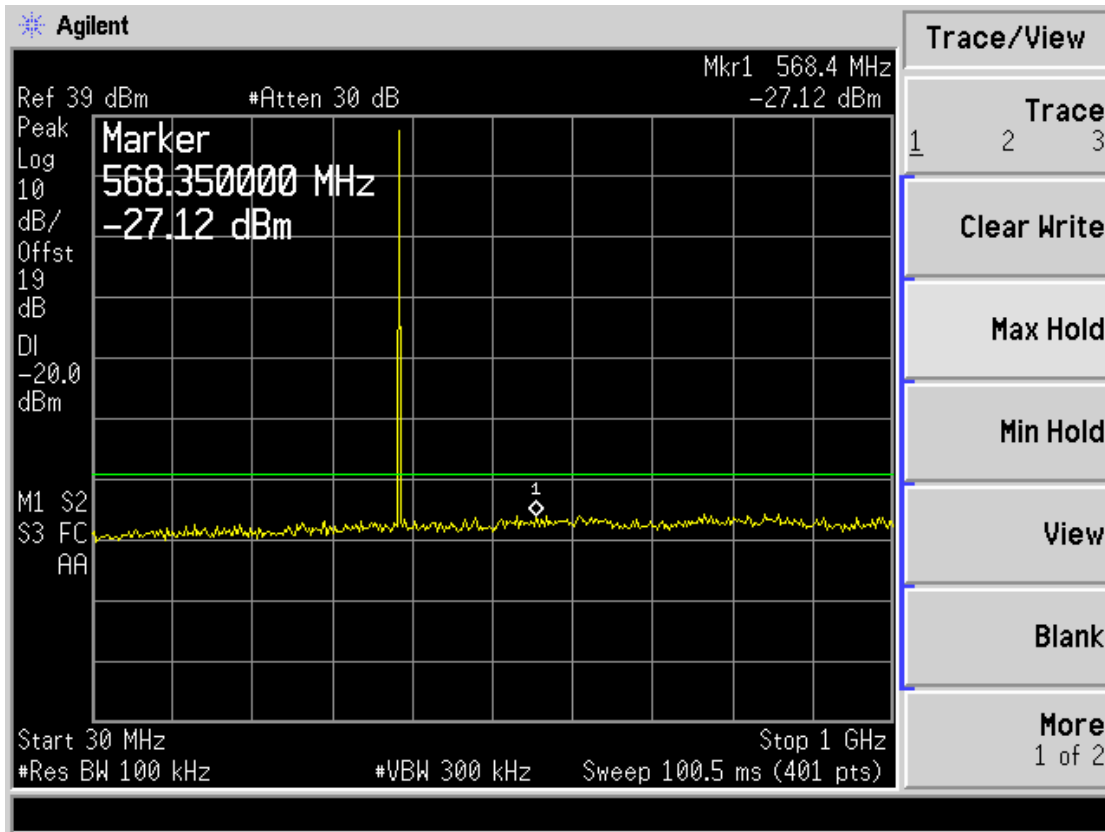

Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Low	418.0000	582.90	-26.57	2850.00	-38.55	-20dBm
Test Results				Compliance				

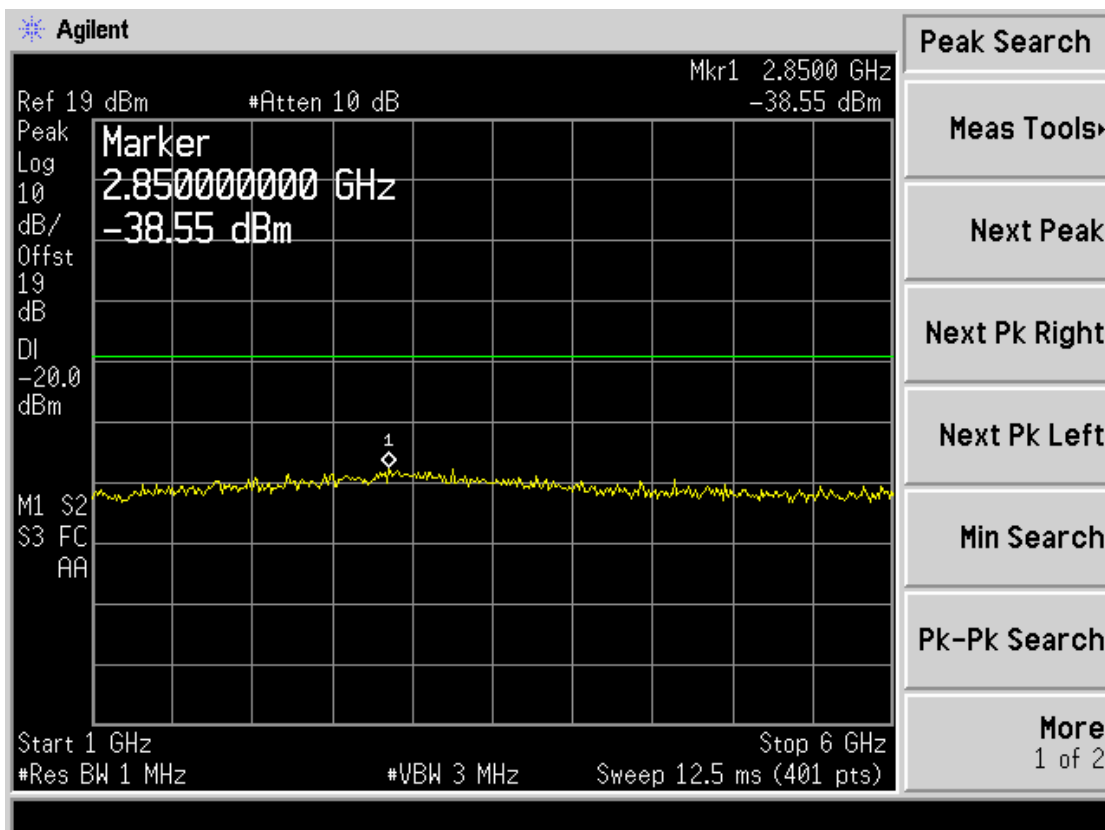
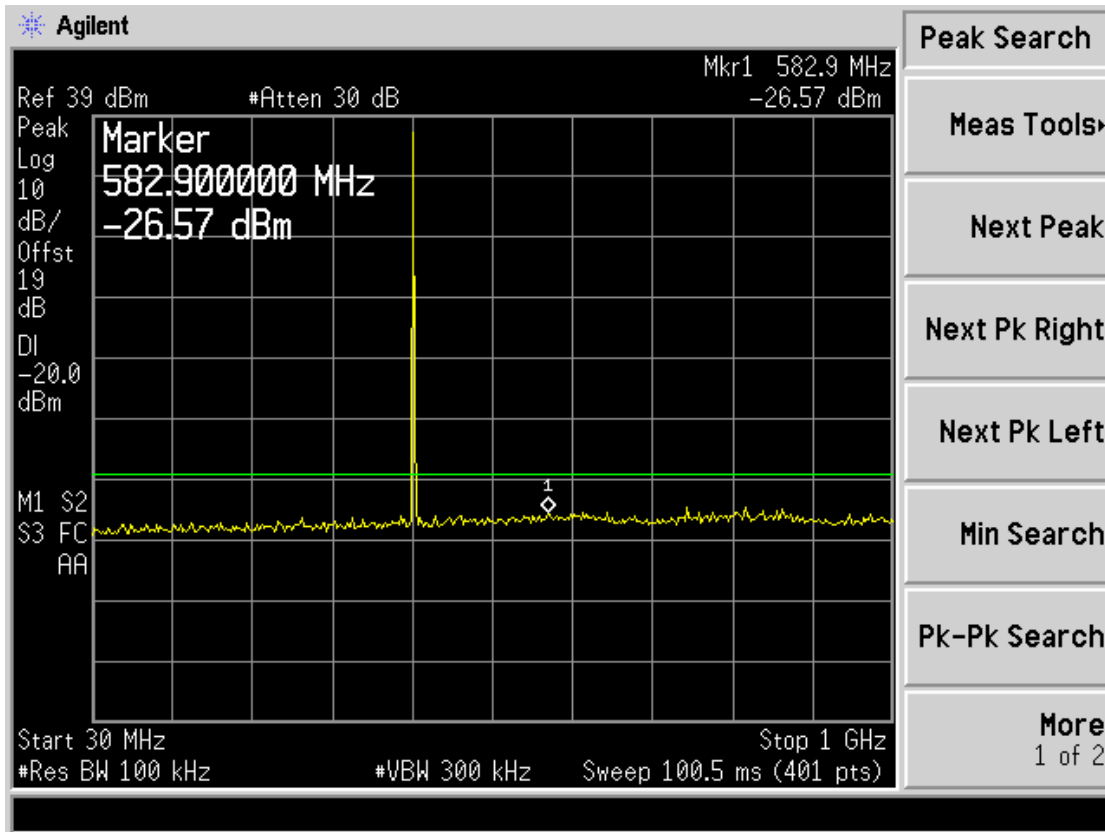


Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Middle	435.5000	871.47	-26.46	2987.50	-37.79	-20dBm
Test Results				Compliance				

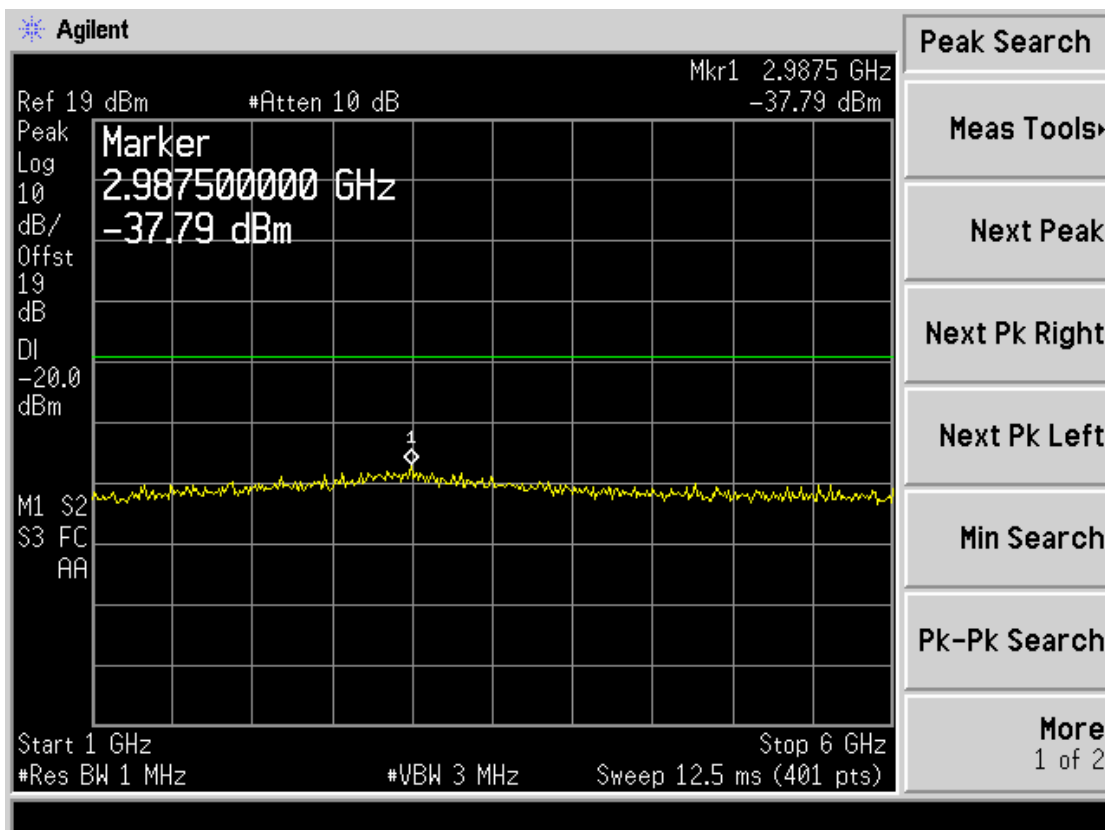
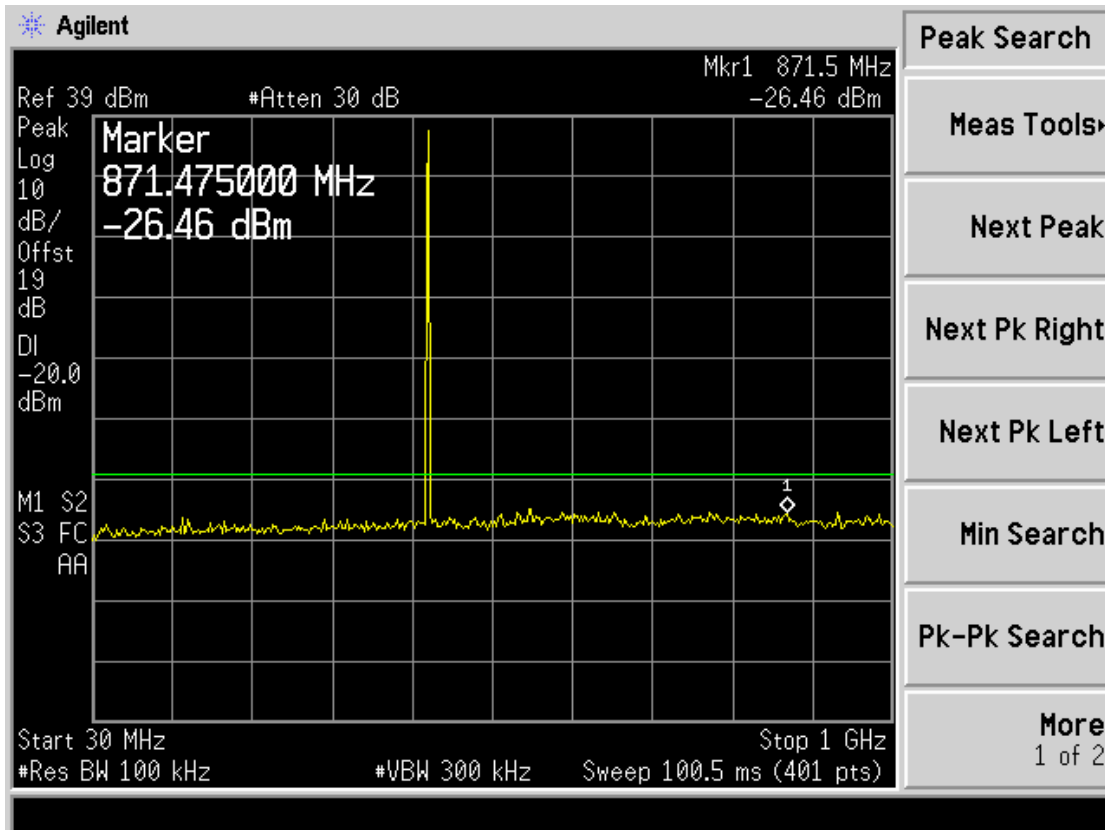




Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	High	453.0000	803.57	-27.10	3112.50	-38.79	-20dBm
Test Results				Compliance				

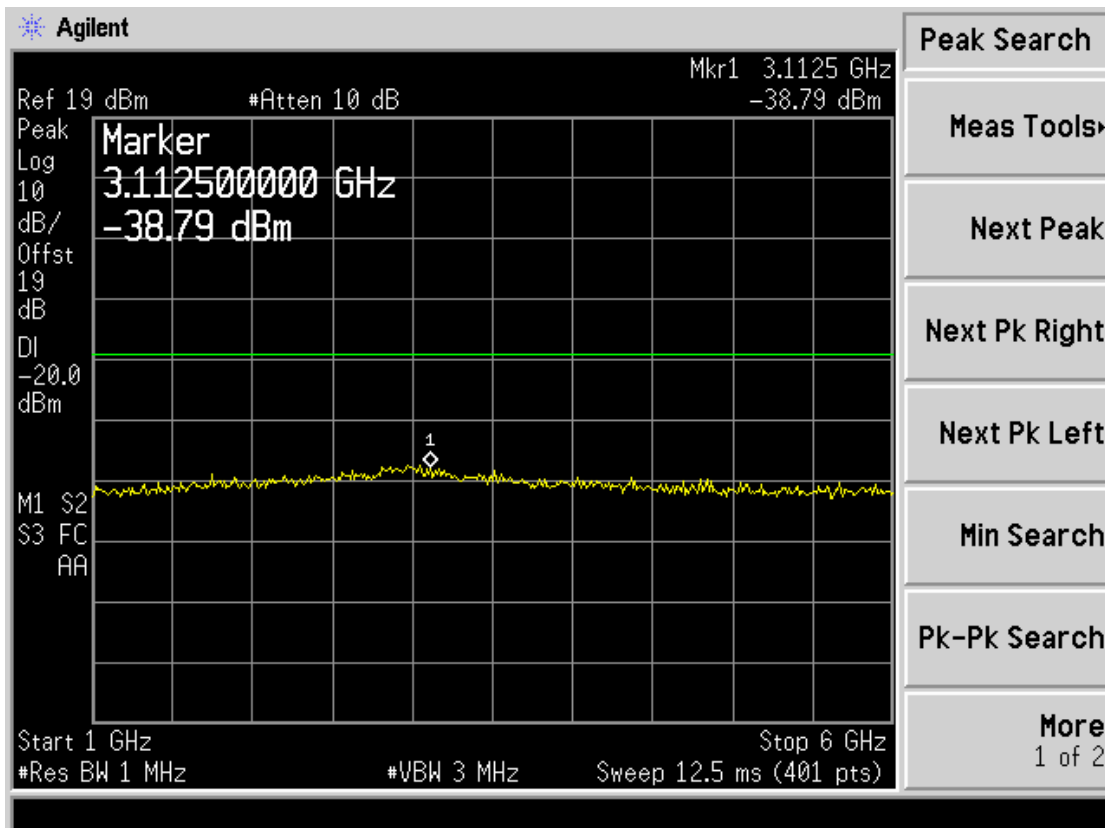
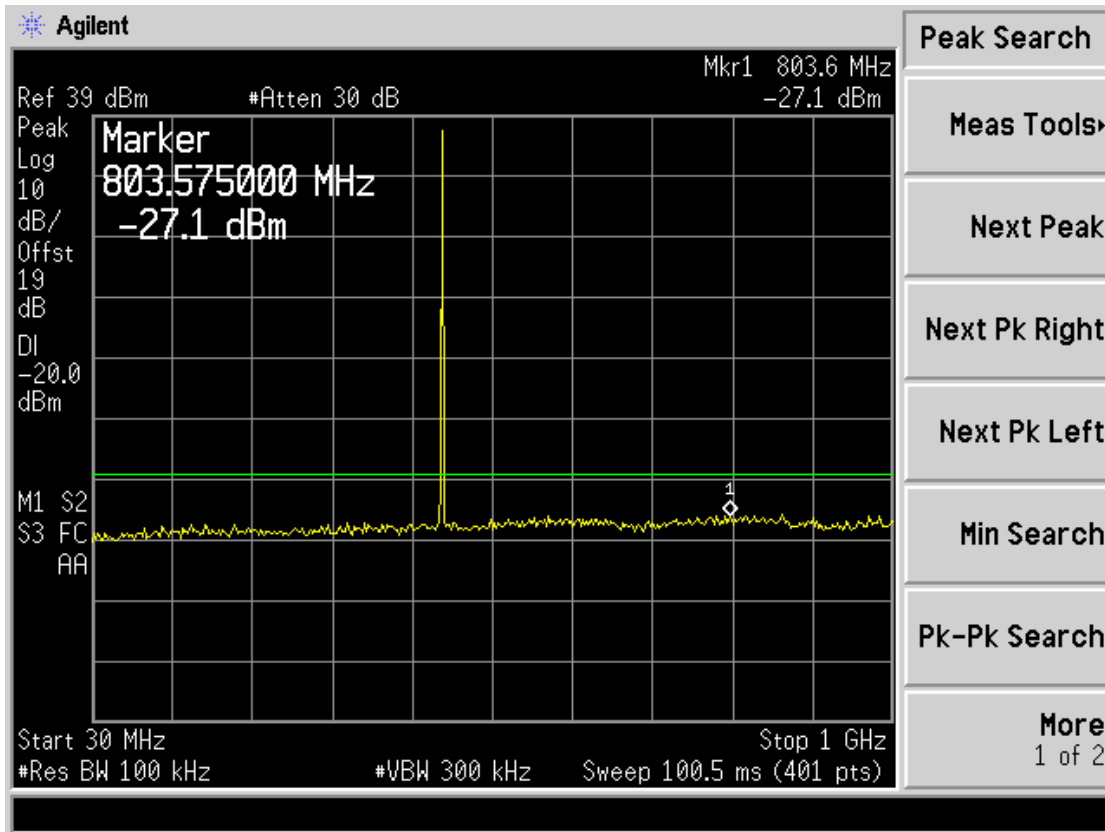


Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	High	469.5000	803.57	-26.47	3050.00	-38.42	-20dBm
Test Results				Compliance				

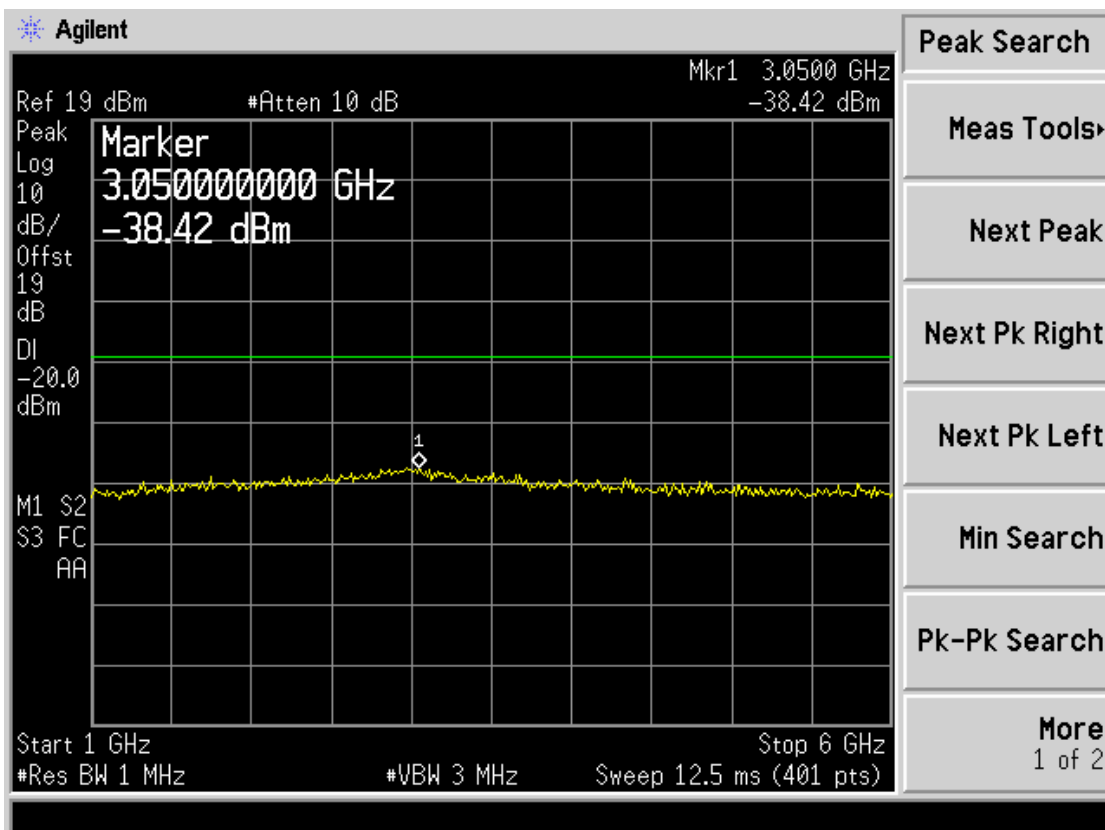
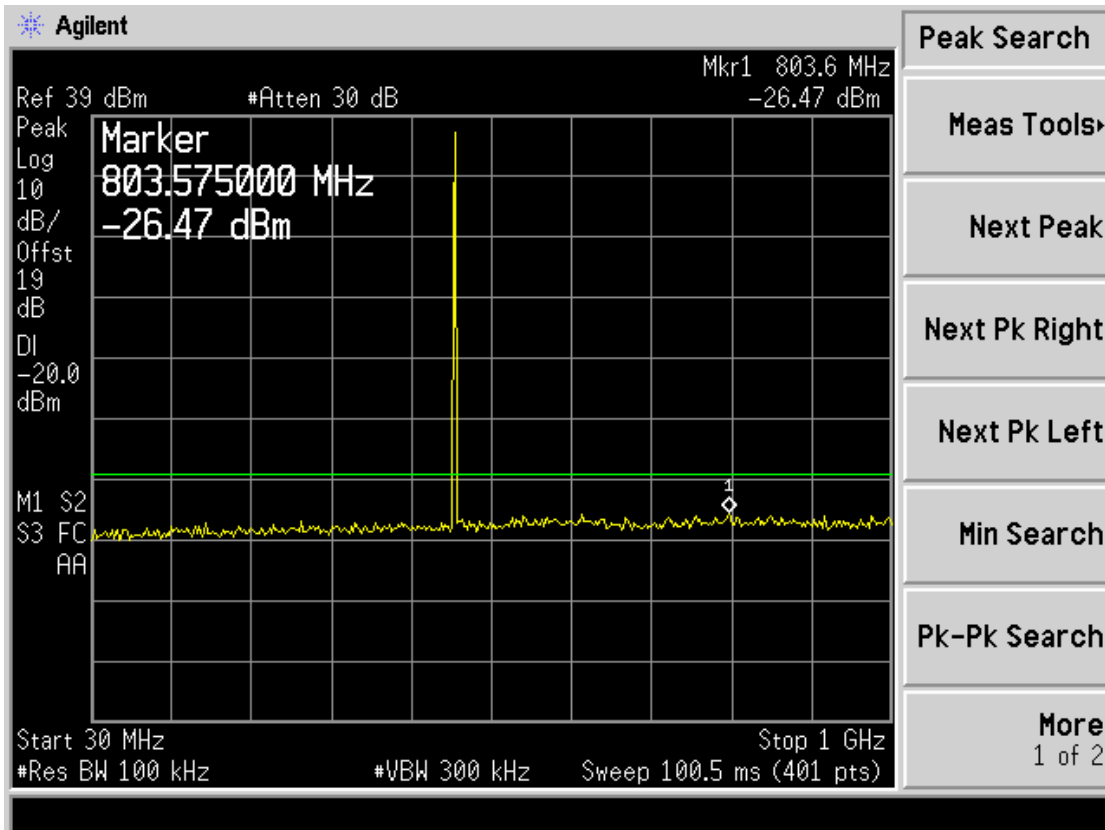


For Rated Low Power (1Watt)



Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Low	406.5000	631.40	-26.91	2812.50	-38.80	-20dBm
Test Results				Compliance				

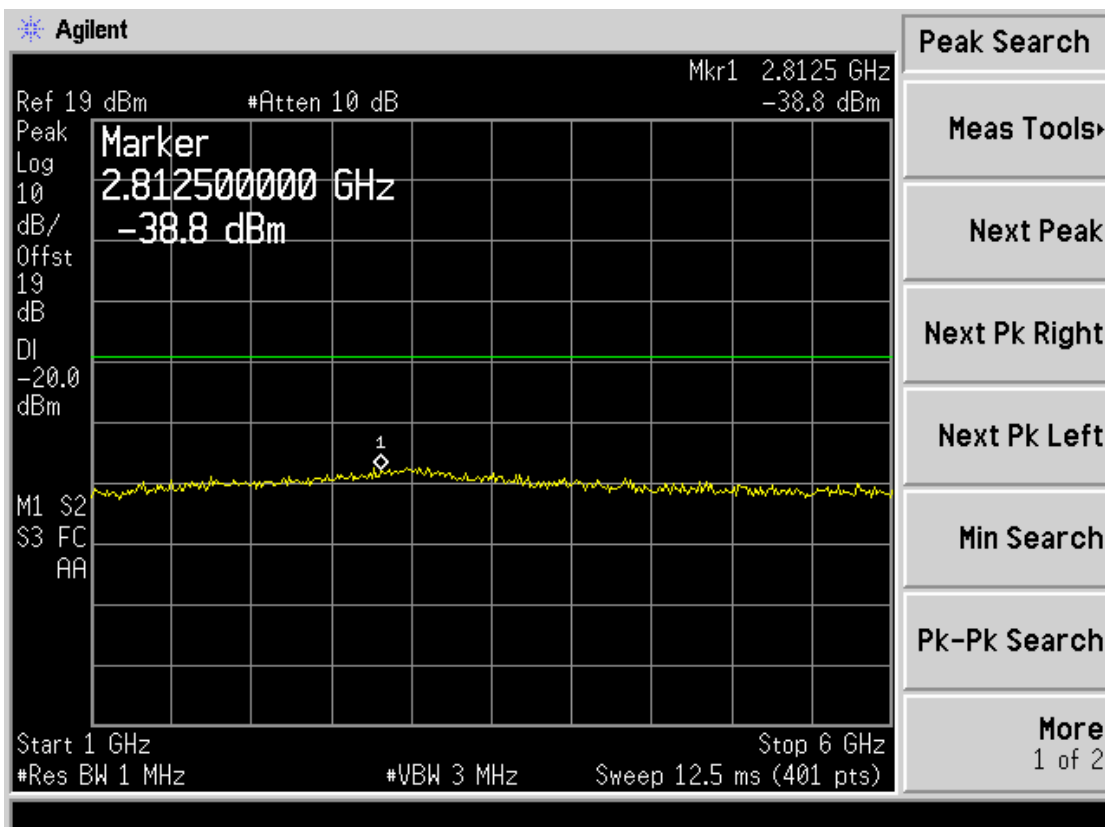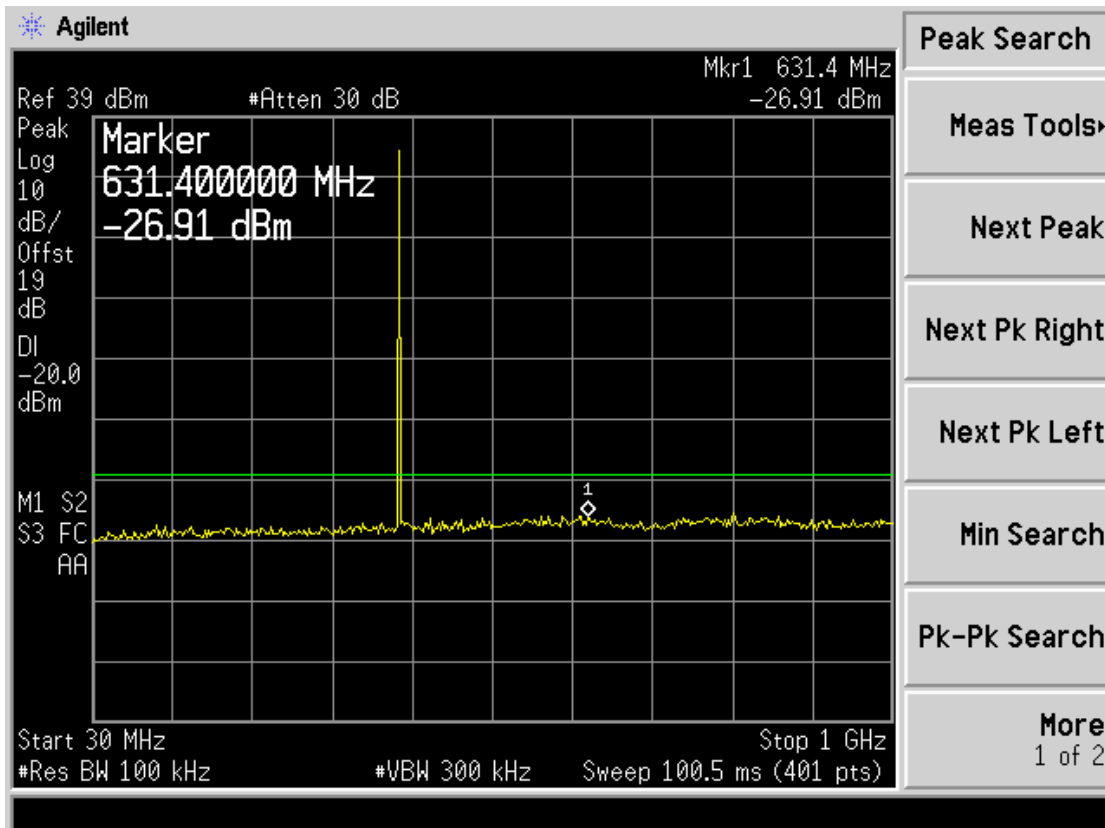



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Low	418.0000	786.60	-27.31	2987.50	-37.78	-20dBm
Test Results				Compliance				

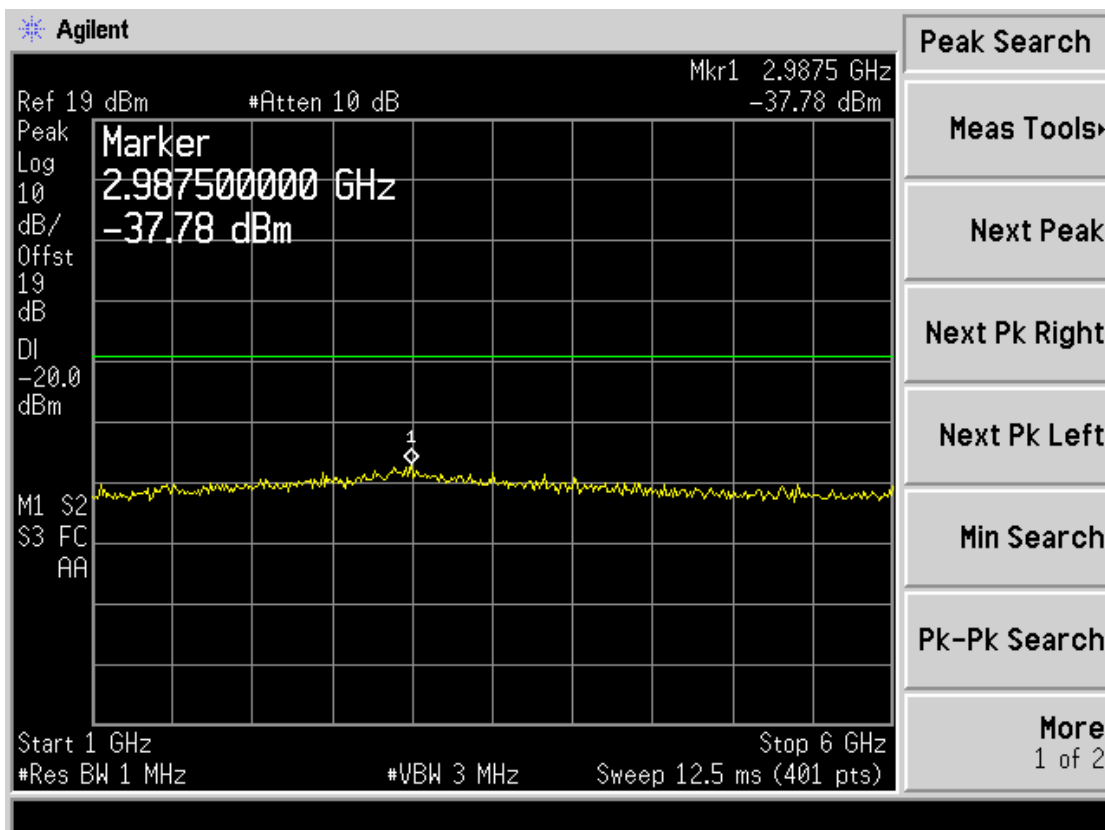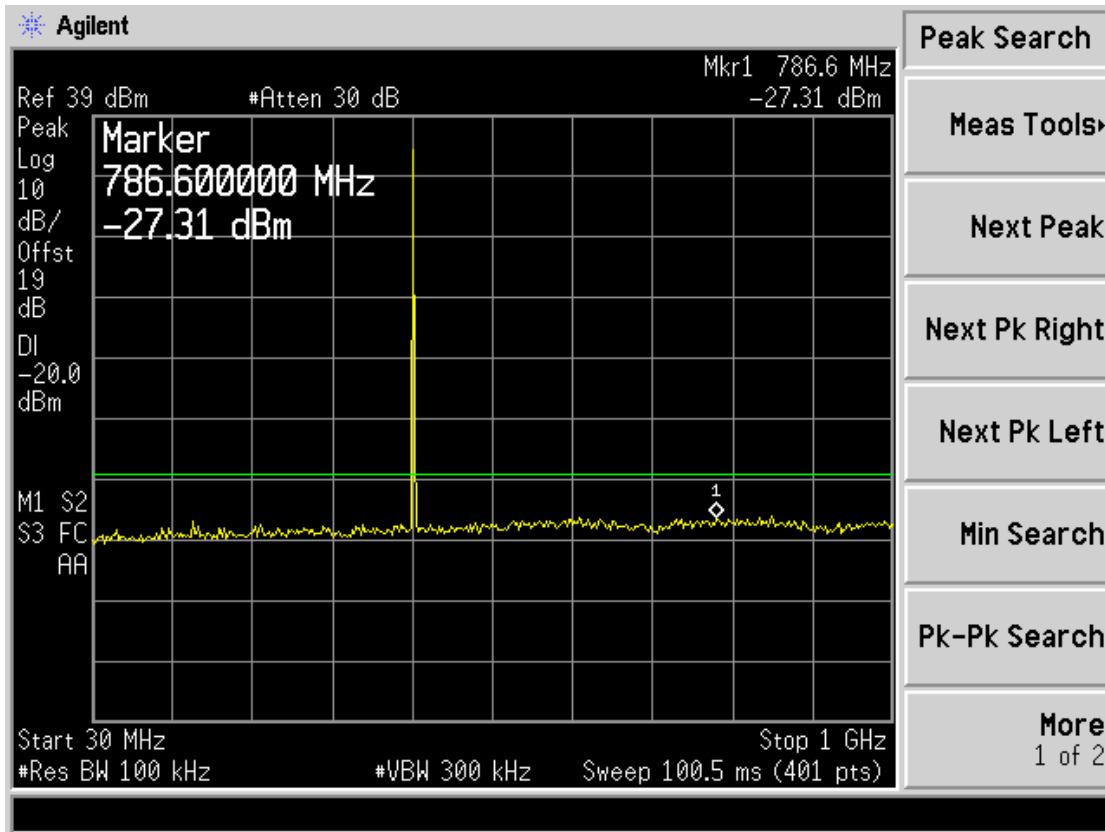



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Middle	435.5000	871.47	-27.33	2400.00	-39.29	-20dBm
Test Results				Compliance				

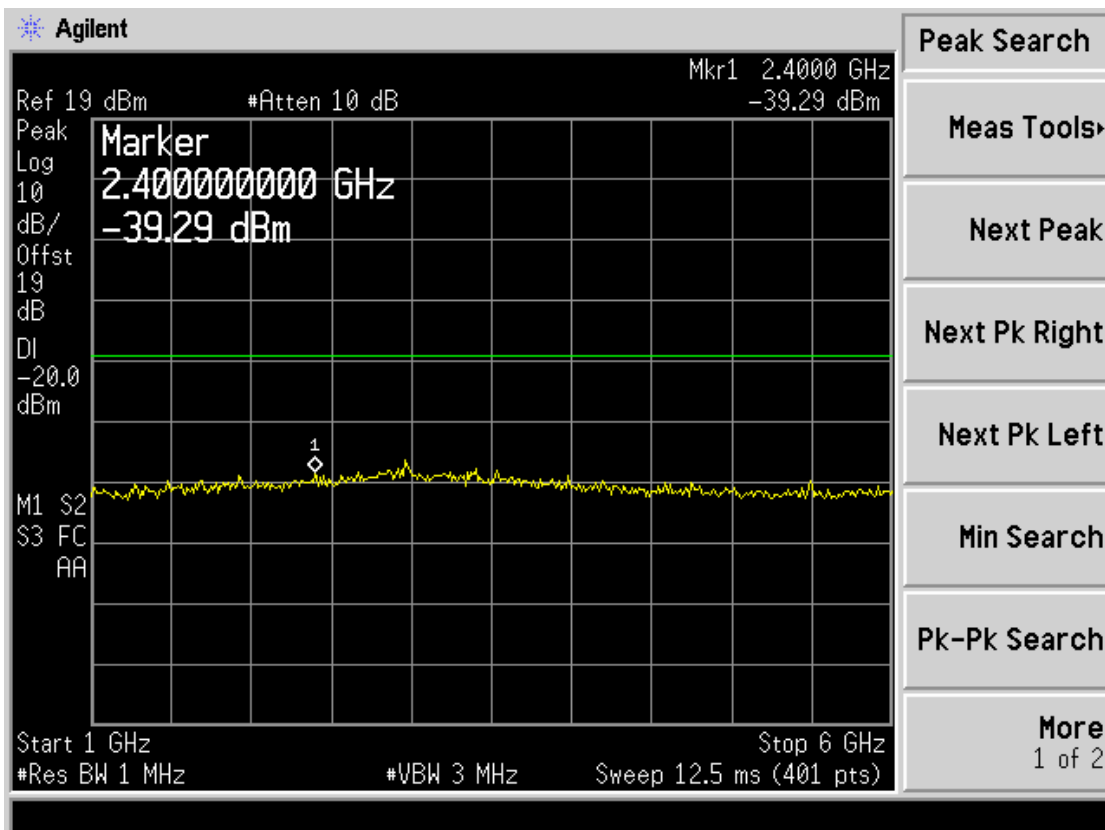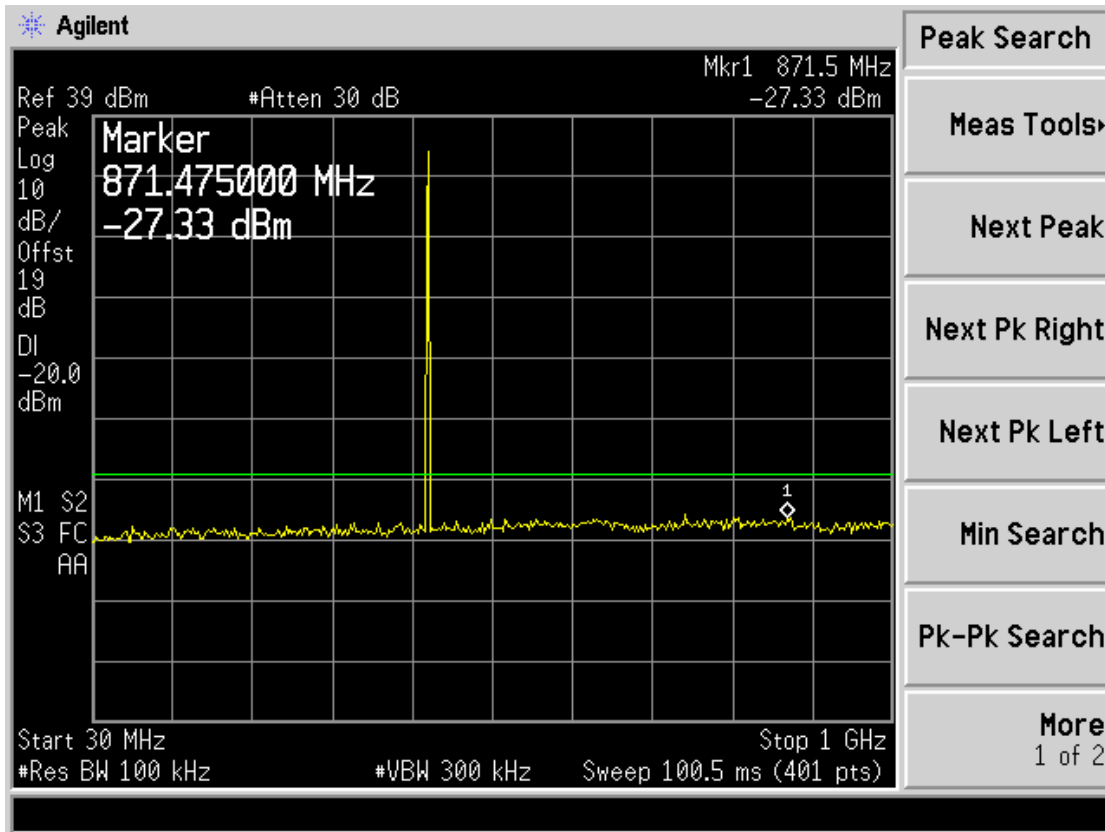

Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	High	453.0000	822.97	-27.17	3087.50	-38.91	-20dBm
Test Results				Compliance				

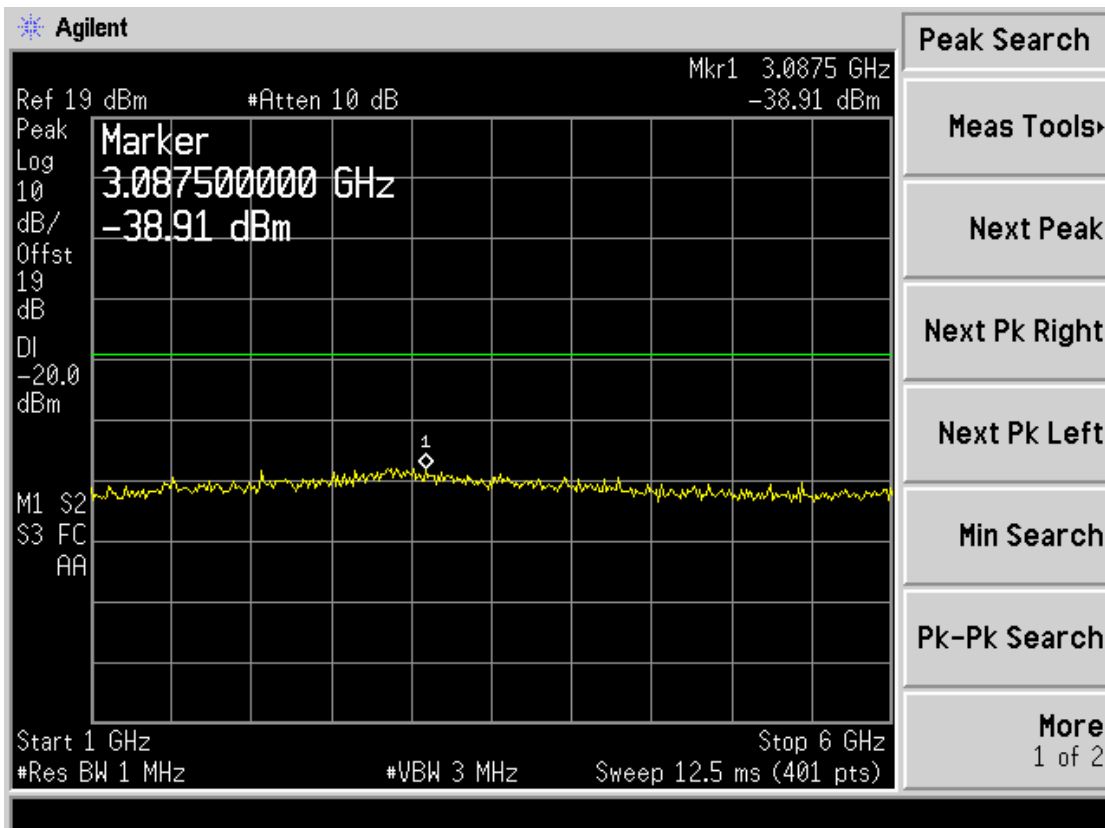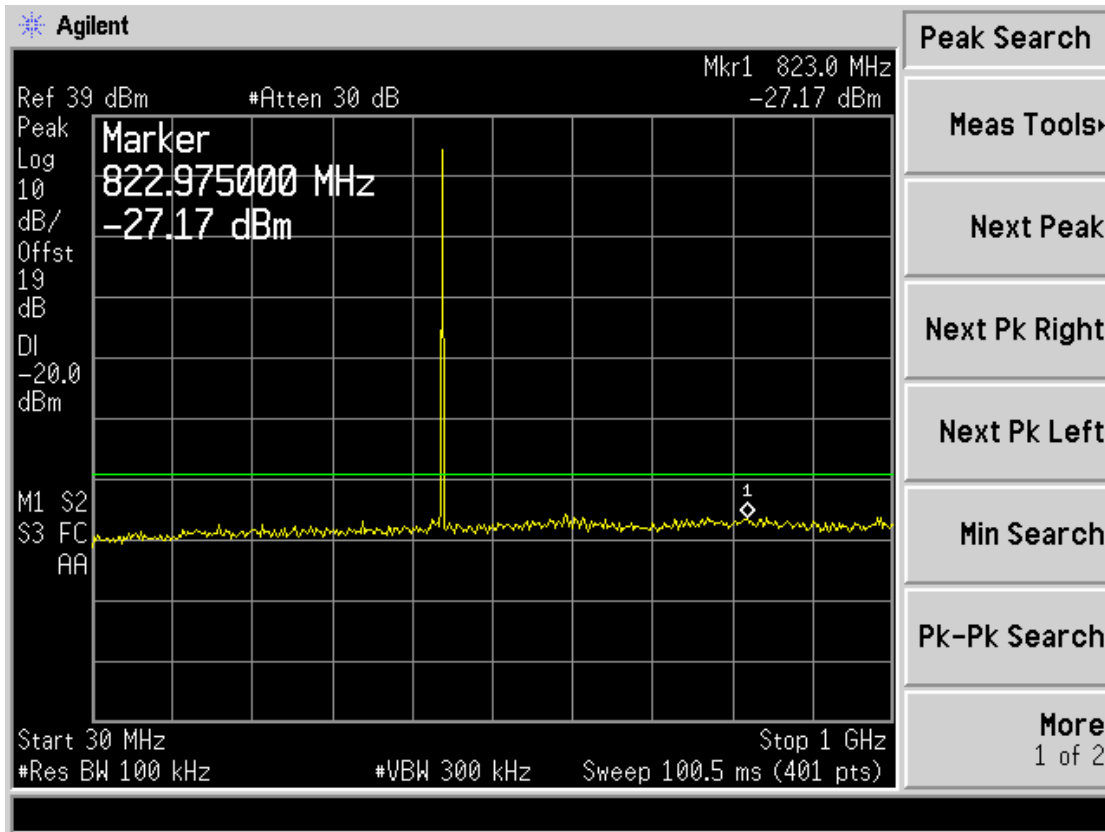

Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	High	469.5000	830.25	-27.21	3537.50	-39.15	-20dBm
Test Results				Compliance				

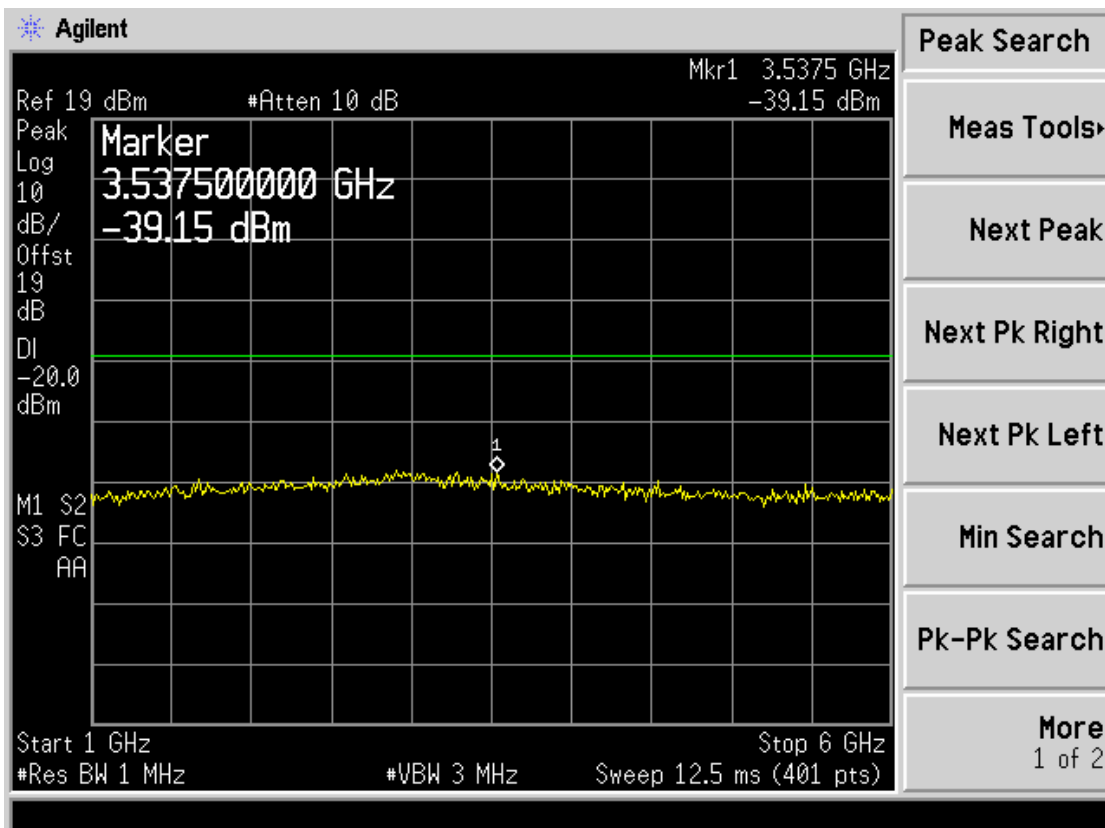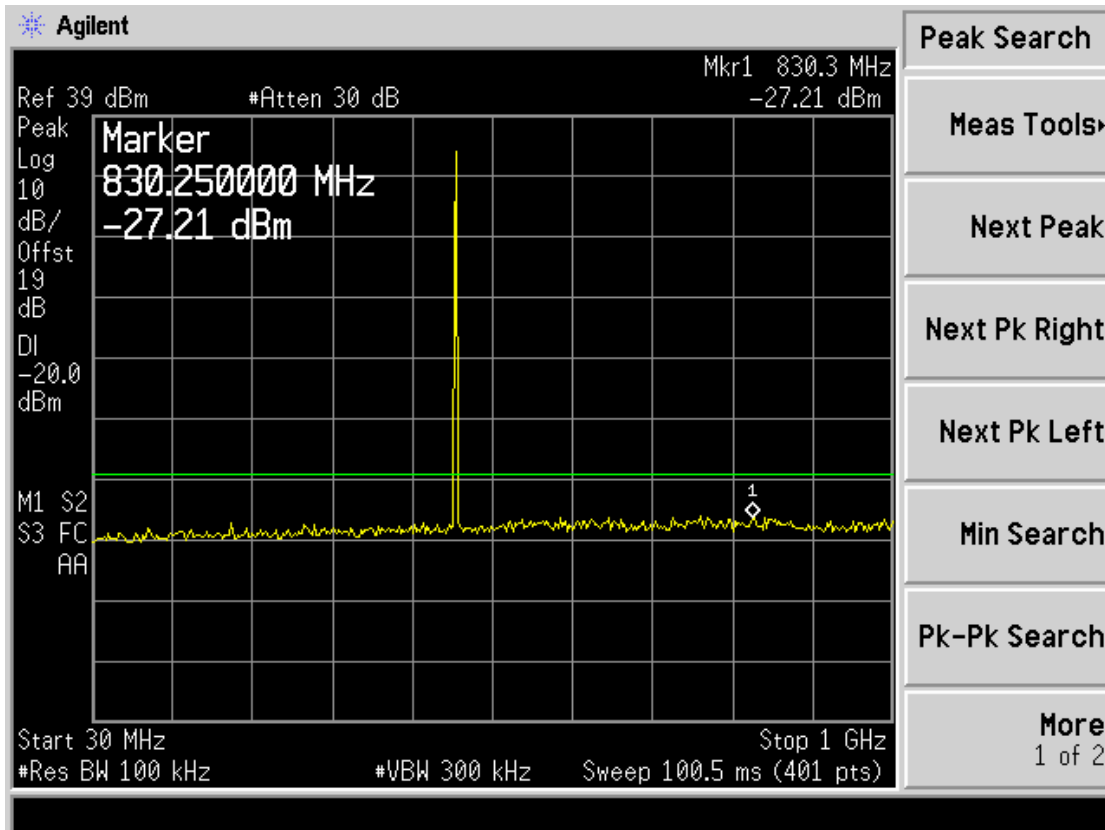

### 4.5. Modulation Characteristics

#### TEST APPLICABLE

According to CFR47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

#### TEST PROCEDURE


##### Modulation Limit

- 1 Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1 KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- 2 Repeat step 1 with input frequency changing to 300, 1004, 1500 and 2500Hz in sequence.

##### Audio Frequency Response

- 1 Configure the EUT as shown in figure 1.
- 2 Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0dB).
- 3 Vary the Audio frequency from 100 Hz to 3 KHz and record the frequency deviation.
- 4 Audio Frequency Response =  $20 \log_{10} (\text{Deviation of test frequency} / \text{Deviation of 1 KHz reference})$ .

#### TEST CONFIGURATION

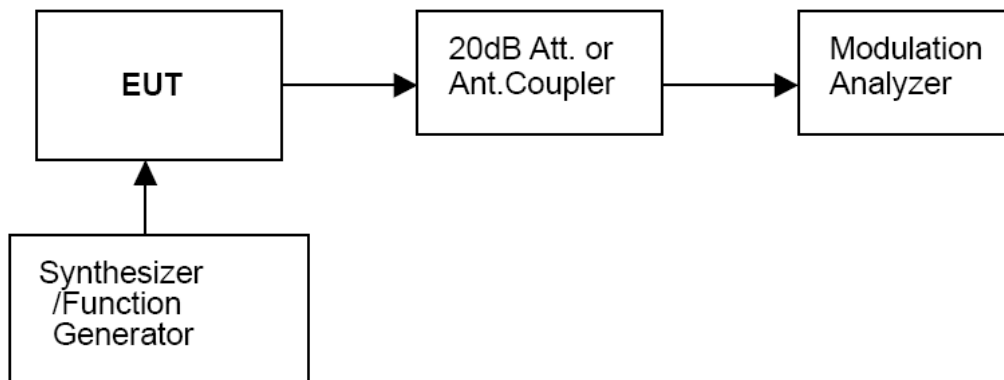


#### TEST RESULTS

##### Modulation Type: FM

##### 12.5 KHz Channel Separations

Modulation Level(dB)	Peak Freq. Deviation At 300 Hz(KHz)	Peak Freq. Deviation At 1004 H(KHz)	Peak Freq. Deviation At 1500 Hz(KHz)	Peak Freq. Deviation At 2500 Hz(KHz)
-20	0.12	0.18	0.26	0.41
-15	0.13	0.39	0.49	0.65
-10	0.18	0.55	0.78	1.19
-5	0.26	0.86	1.24	2.09
0	0.45	1.54	2.18	2.24
+5	0.79	2.25	2.24	2.25
+10	1.23	2.26	2.23	2.20
+15	2.12	2.26	2.22	2.20
+20	2.23	2.25	2.22	2.20



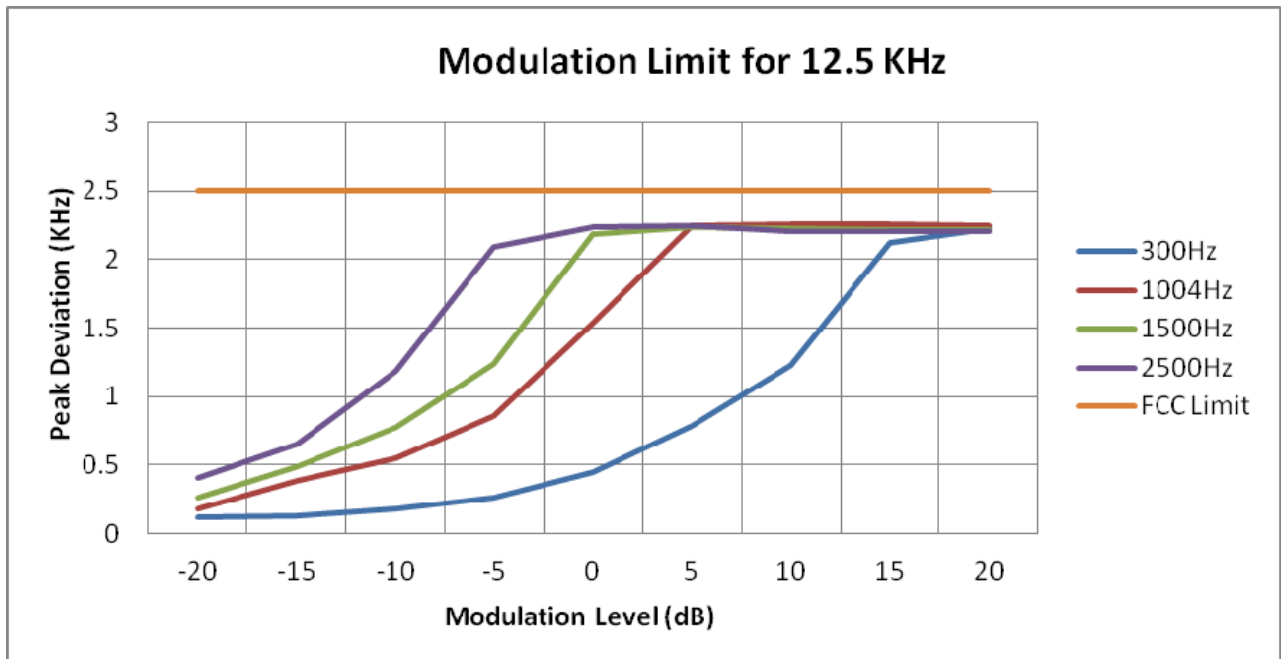

**b). Audio Frequency Response:**

**Rule Part No.: Part 2.1407(a) (b)**

**Method of Measurement:**

The audio frequency response was measured in accordance with TIA/EIA Specification 603 with no exception. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 300-3000Hz shall be submitted and Audio Post Limiter Low Pass Filter Response from 3.0 KHz to 50KHz. However, the audio frequency response should test from 100Hz to 5.0 KHz according to FCC Part 90.

**Modulation Type: FM**

The audio frequency response curve is show below.and


**Test Audio Level (1 KHz and 20% maximum deviation) is 2.60mv for 12.5 KHz channel separation.**

**Note:**

- 1 Not applicable to new standard. However, tests are conducted under FCC's recommendation.
- 2 The Audio Frequency Response is identical for 12.5 KHz channel separation

**12.5 KHz Channel Separation**

Frequency (KHz)	Frequency Deviation (KHz)	1KHz Reference Deviation (KHz)	Audio Frequency Response (dB)
0.1	0.05	0.51	-20.17
0.2	0.05	0.51	-20.17
0.3	0.07	0.51	-17.25
0.4	0.20	0.51	-8.13
0.5	0.22	0.51	-7.30
0.6	0.30	0.51	-4.61
0.7	0.32	0.51	-4.05
0.8	0.35	0.51	-3.27
0.9	0.40	0.51	-2.11
1.0	0.52	0.51	0.17
1.2	0.52	0.51	0.17
1.4	0.61	0.51	1.56
1.6	0.72	0.51	3.00
1.8	0.82	0.51	4.12
2.0	0.90	0.51	4.93
2.2	1.00	0.51	5.85
2.4	1.12	0.51	6.83
2.6	1.22	0.51	7.58
2.7	1.21	0.51	7.50
2.8	1.20	0.51	7.43
3.0	1.26	0.51	7.86
3.5	0.05	0.51	-20.17
4.0	0.04	0.51	-22.11
4.5	0.03	0.51	-24.61
5.0	0.03	0.51	-24.61

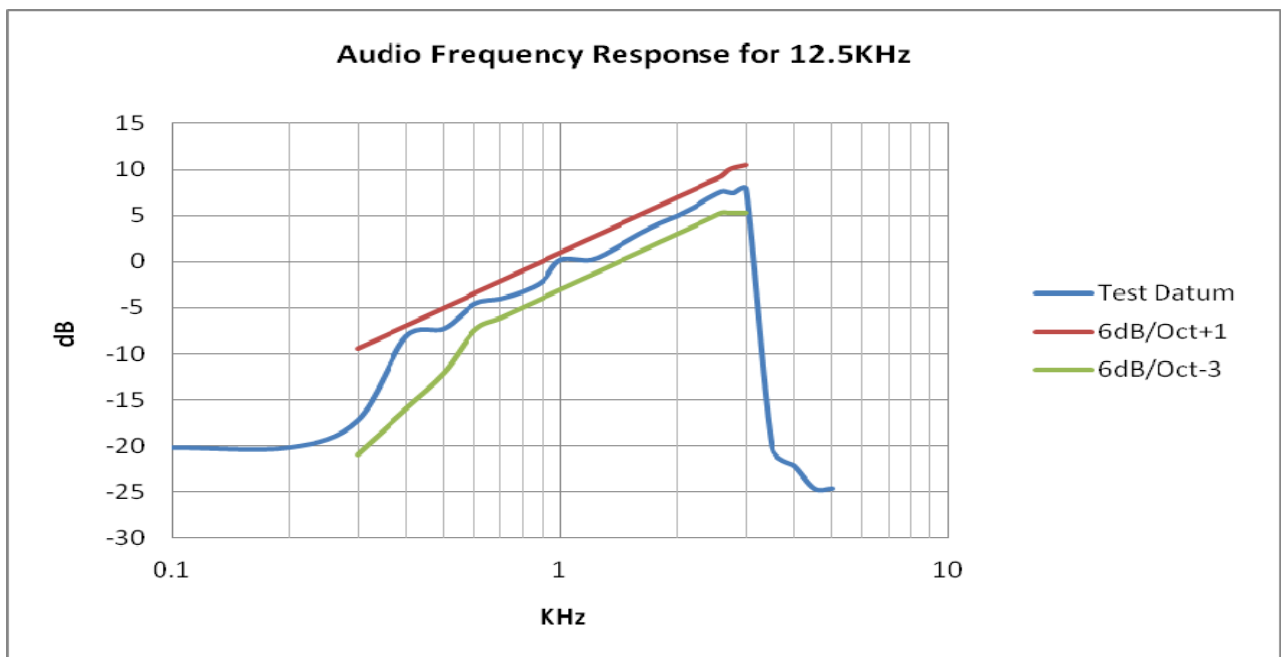

### 4.6. Frequency Stability Test


#### TEST APPLICABLE

- 1 According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +60°C centigrade.
- 2 According to FCC Part 2 Section 2.1055 (a) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- 3 Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and end point votage is 6.67V.
- 4 According to §90.213, the frequency stability limit is 2.5 ppm for 12.5KHz channel separation

#### TEST PROCEDURE

The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer ESI 26. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

#### TEST CONFIGURATION

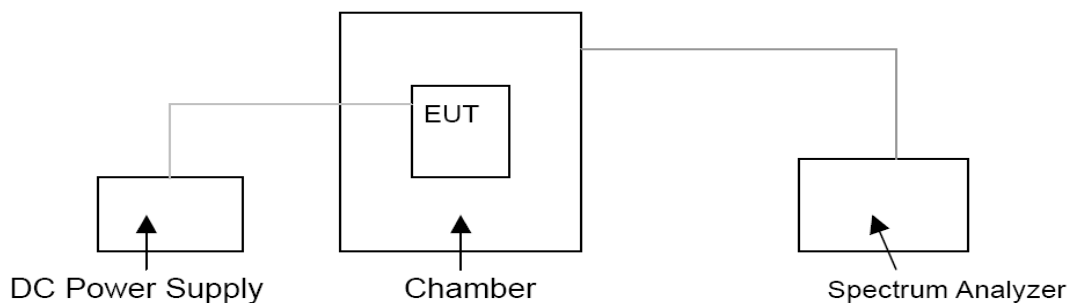

#### TEST LIMITS

According to 90.213, Transmitters used must have minimum frequency stability as specified in the following table.

Frequency Range (MHz)	Channel Bandwidth (KHz)	Frequency Tolerance (ppm)		
		Fixed and Base Stations	Mobile Stations	
			> 2 W	≤ 2 W
150-174 MHz	6.25	1.0	2.0	2.0
	12.5	2.5	5.0	5.0
	25	5.0	5.0	50.0*
421-512 MHz	6.25	0.5	1.0	1.0
	12.5	1.5	2.5	2.5
	25	2.5	5.0	5.0

- Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.

**TEST RESULTS**

Modulation Type	Channel Separation	Test conditions		Frequency error (ppm)				
		Voltage(V)	Temp(°C)	406.5	418	435.5	453	469.5
Analog/FM	12.5KHz	7.40	-30	1.23	1.18	1.33	1.14	1.22
			-20	1.15	1.05	1.02	0.97	0.92
			-10	0.96	1.08	1.05	1.15	0.95
			0	0.92	1.06	1.08	1.08	1.06
			10	0.85	1.02	1.09	1.04	0.92
			20	0.89	1.02	1.02	1.08	0.90
			30	0.85	1.05	1.05	0.98	0.92
			40	0.92	1.13	1.02	1.19	1.01
			50	0.94	1.13	1.08	0.99	1.03
			6.67 (End point)	20	1.02	1.05	1.01	0.92
		6.29 (85% Rated)	20	0.82	0.95	1.02	0.95	0.92
		8.51 (115% Rated)	20	1.14	1.03	1.01	0.92	0.91
		Limit			2.5 ppm			
Conclusion			Complies					

**4.7. Maximum Transmitter Power**

**TEST APPLICABLE**

Per FCC «2.1046 and «90.205: Maximum ERP is dependent upon the station’s antenna HAAT and required service area.

**TEST PROCEDURE**


Measurements shall be made to establish the radio frequency power delivered by the transmitter the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

The EUT connect to the Receiver through 20 dB attenuator.

Measurement with Spectrum Analyzer ESI 26 conducted, external power supply with 7.40 V stabilized supply voltage.

**TEST CONFIGURATION**




The EUT was directly connected to a RF Communication Test set by a 20 dB attenuator

**TEST RESULTS**


Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Transmitter Power at Rated High Power Level(dBm)	Maximum Transmitter Power at Rated Low Power Level(dBm)
Analog/FM	12.5KHz	Low	406.5000	36.55	33.26
		Low	418.0000	36.26	33.21
		Middle	435.5000	36.52	33.03
		High	453.0000	36.69	33.45
		High	469.5000	36.60	33.31
Limit		The limit is dependent upon the station’s antenna HAAT and required service area.			
Test Results		Complicance			

**Plots of Maximum Transmitter Power Measurement**


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	406.5000	4	36.55	Varies	Complicance

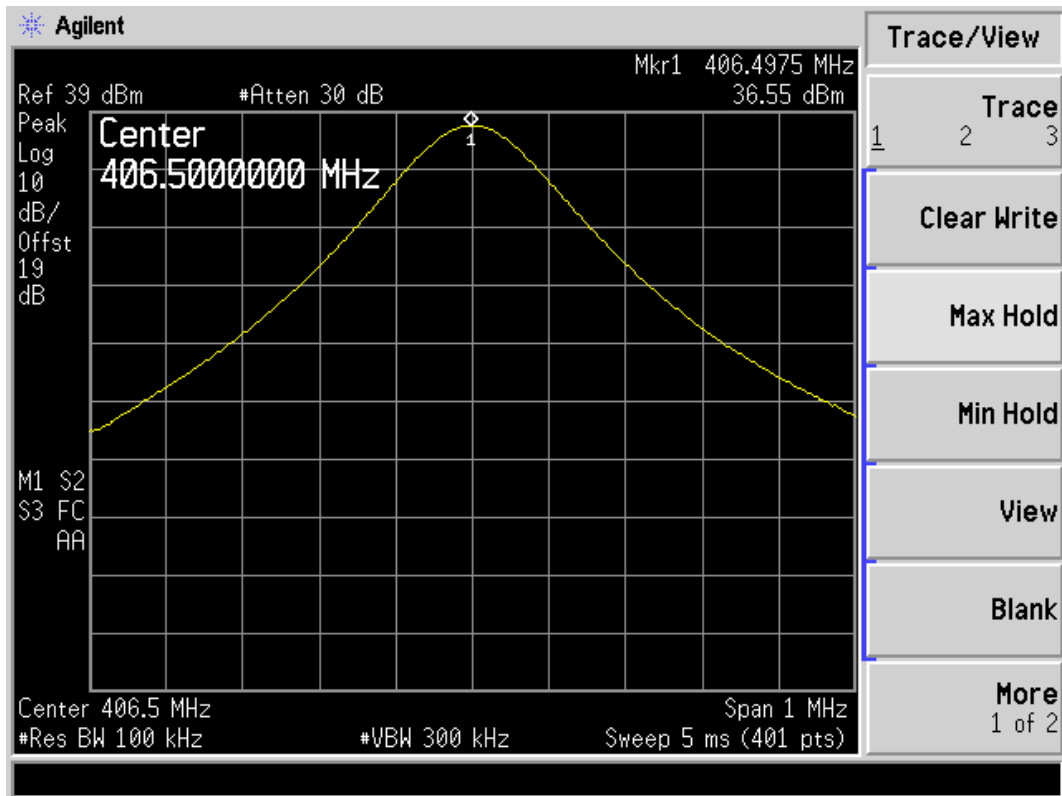


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	418.0000	4	36.26	Varies	Complicance

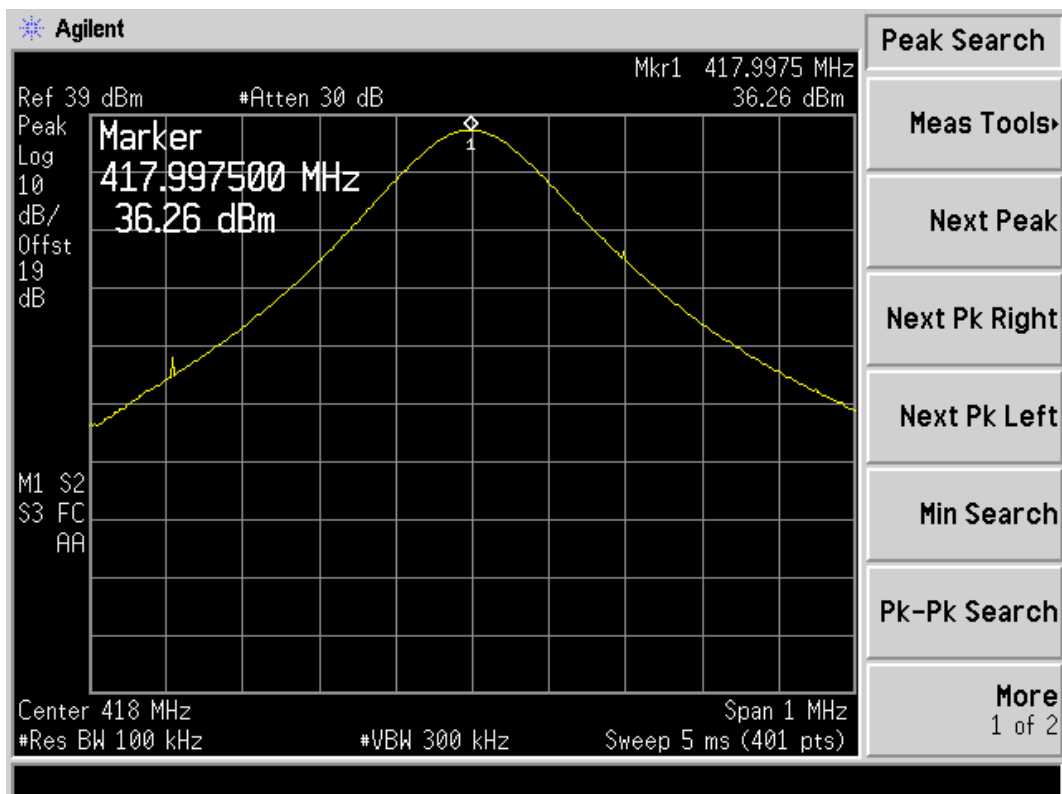


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	435.5000	4	36.52	Varies	Complicance

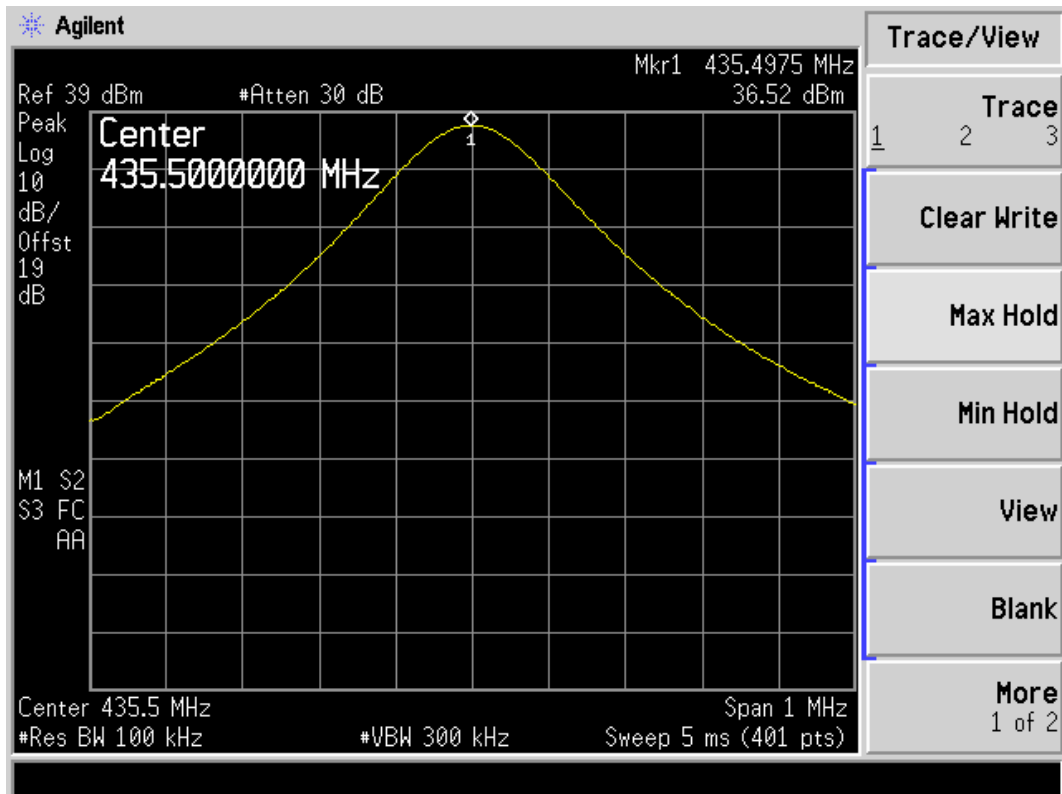


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	453.0000	4	36.69	Varies	Complicance

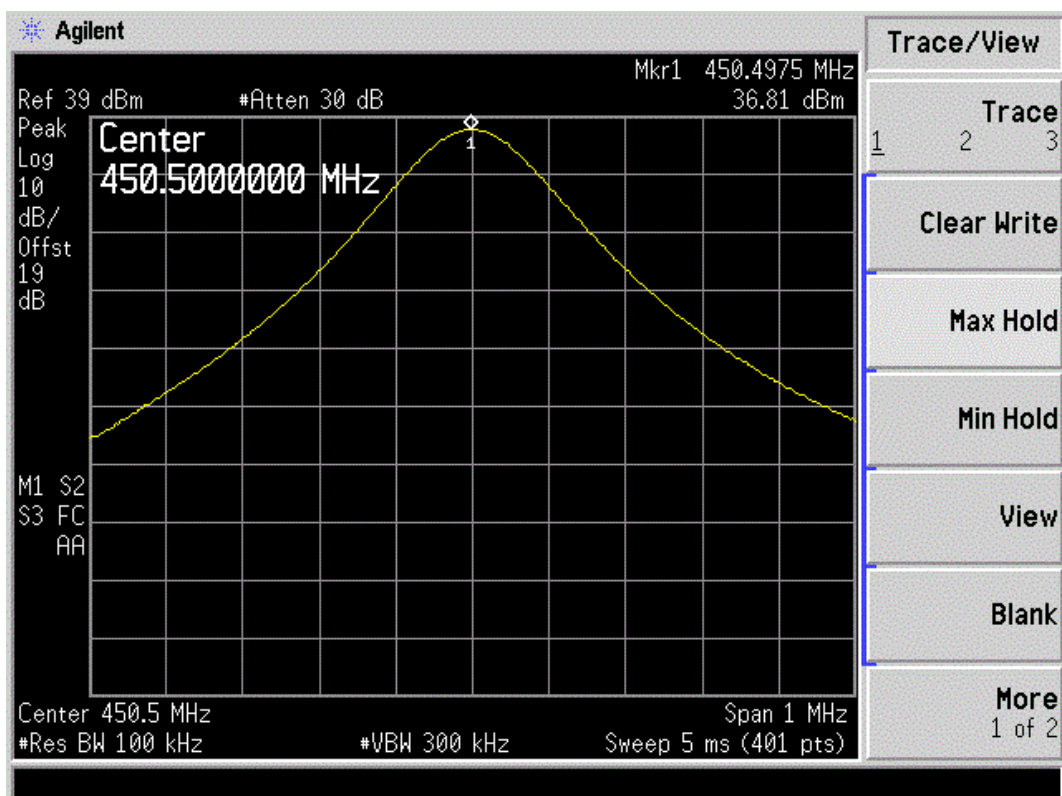

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	469.5000	4	36.60	Varies	Complicance

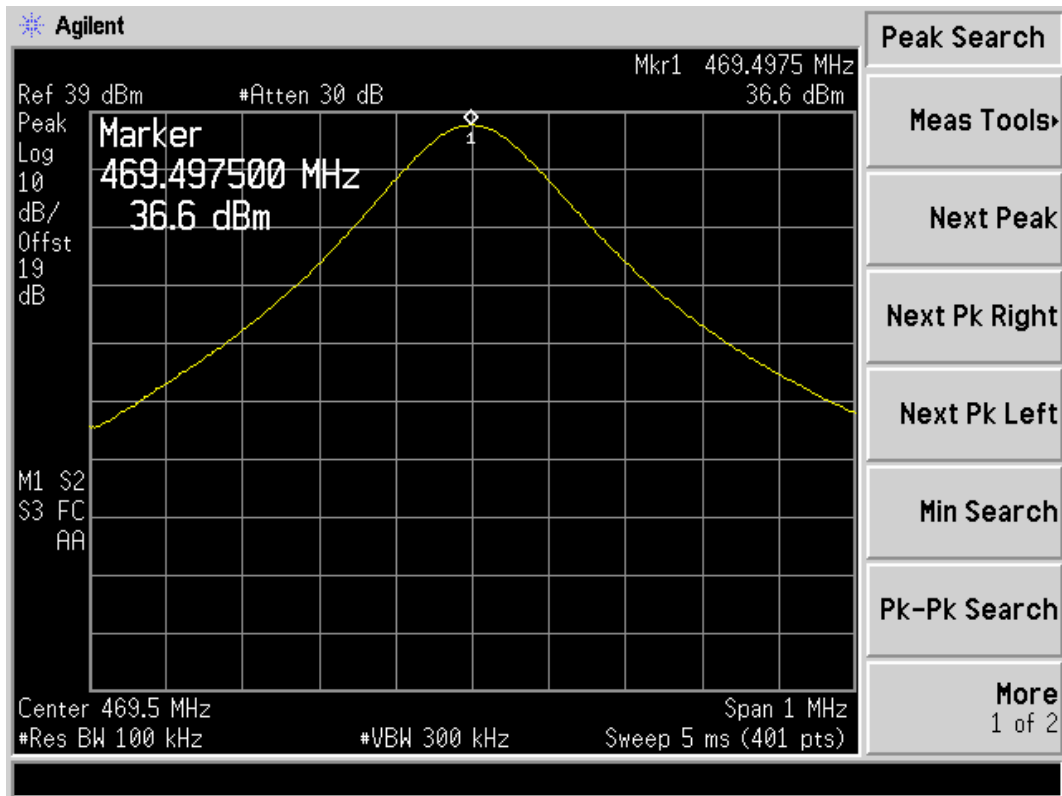


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	406.5000	2	33.26	Varies	Complicance

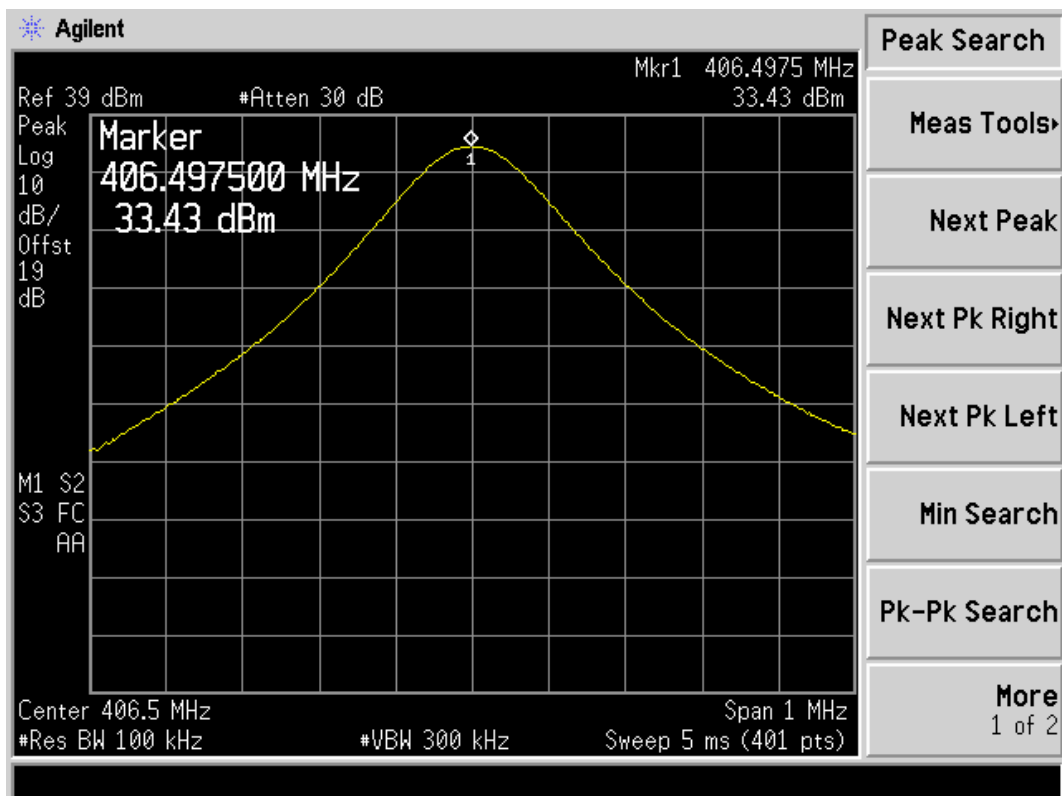





Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	418.0000	2	33.21	Varies	Complicance

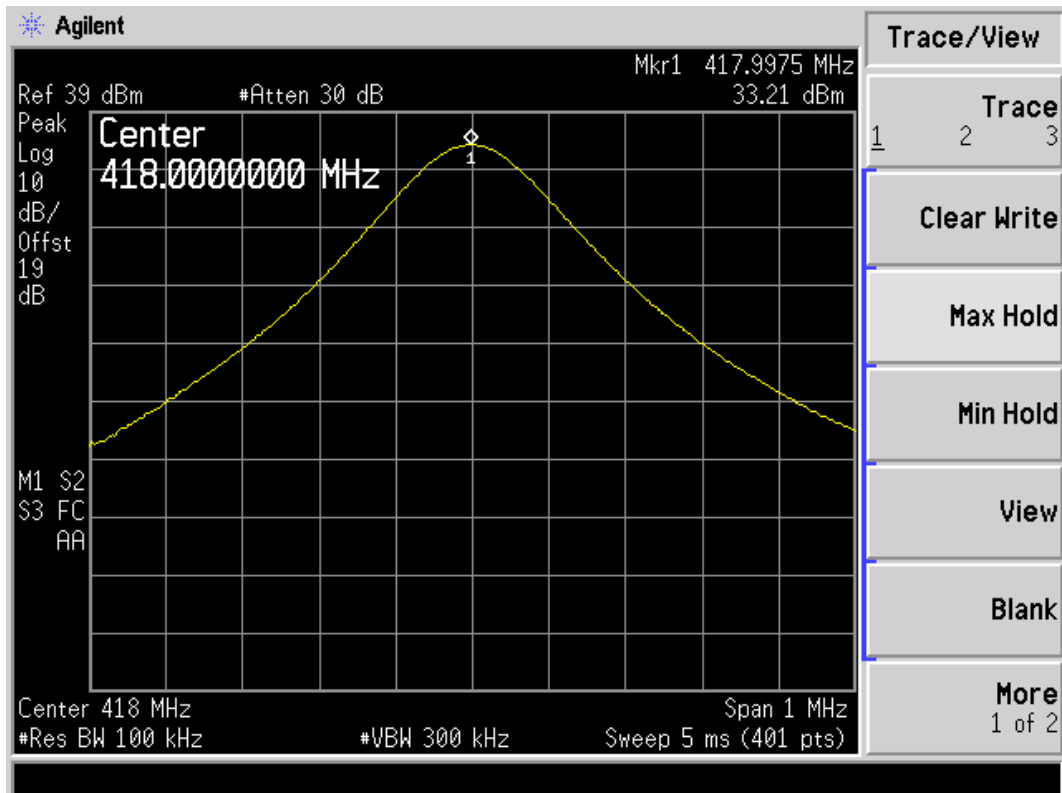


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	435.5000	2	33.03	Varies	Complicance

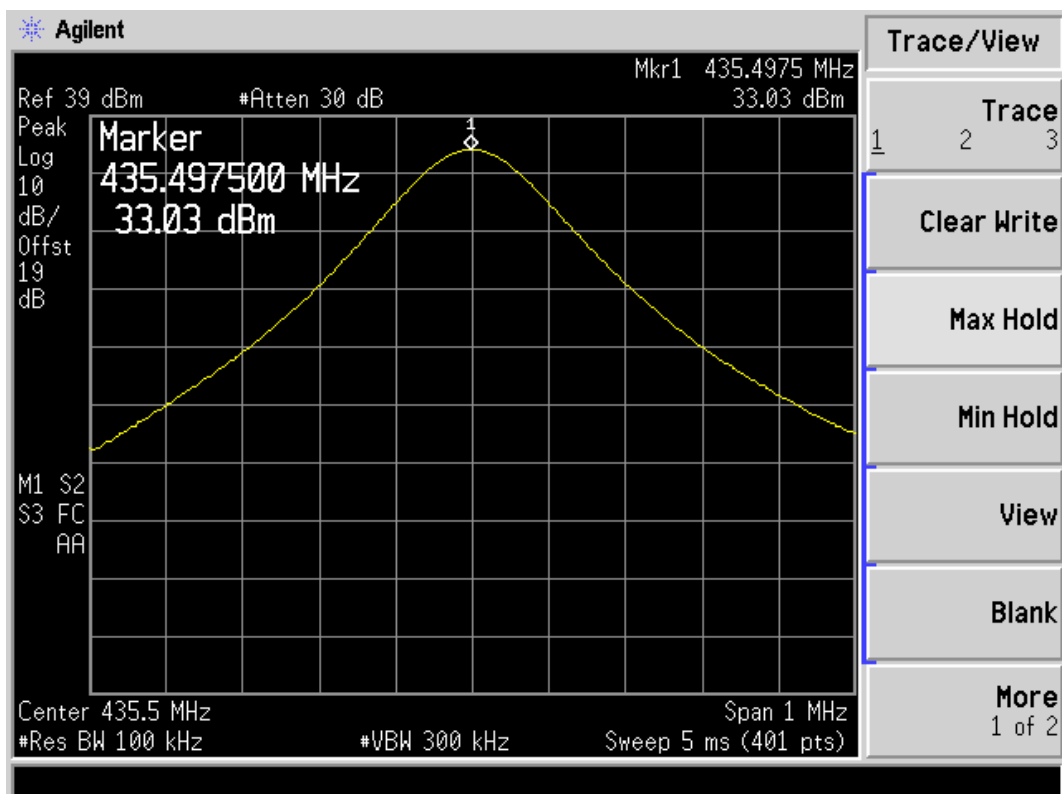

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	453.0000	2	33.45	Varies	Complicance

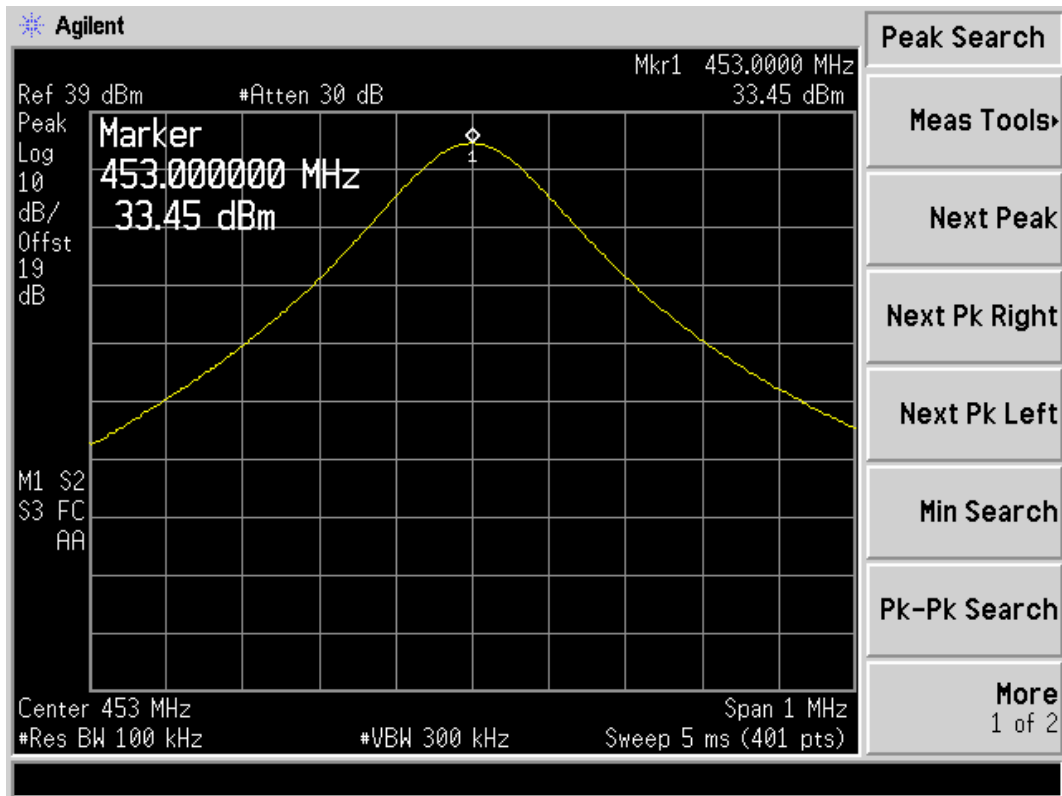

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit (dBm)	Results
FM	12.5 KHz	469.5000	2	33.31	Varies	Complicance

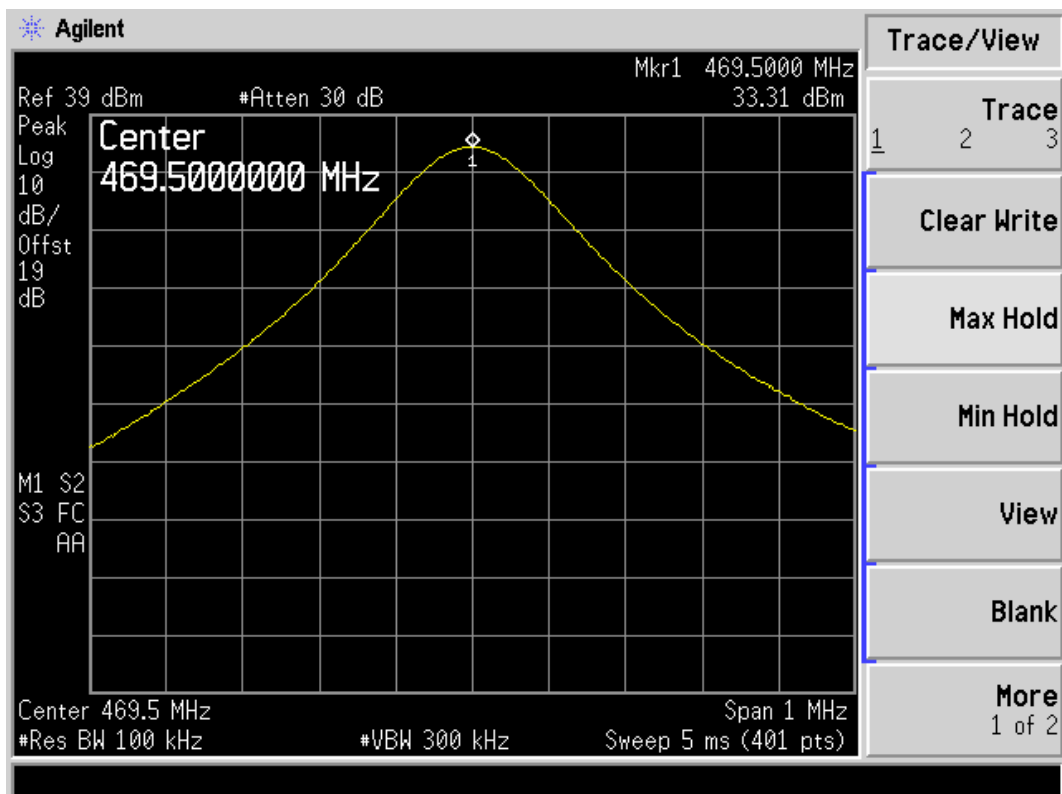

### 4.8. Transmitter Frequency Behavior

#### TEST APPLICABLE

Section 90.214

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:


Time intervals <sup>1, 2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels			
$t_1$ <sup>4</sup> .....	± 25.0 KHz	5.0 ms	10.0 ms
$t_2$ .....	± 12.5 KHz	20.0 ms	25.0 ms
$t_3$ <sup>4</sup> .....	± 25.0 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels			
$t_1$ <sup>4</sup> .....	± 12.5 KHz	5.0 ms	10.0 ms
$t_2$ .....	± 6.25 KHz	20.0 ms	25.0 ms
$t_3$ <sup>4</sup> .....	± 12.5 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels			
$t_1$ <sup>4</sup> .....	±6.25 KHz	5.0 ms	10.0 ms
$t_2$ .....	±3.125 KHz	20.0 ms	25.0 ms
$t_3$ <sup>4</sup> .....	±6.25 KHz	5.0 ms	10.0 ms

- $t_{on}$  is the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing.  
 $t_1$  is the time period immediately following  $t_{on}$ .  
 $t_2$  is the time period immediately following  $t_1$ .  
 $t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .  
 $t_{off}$  is the instant when the 1 KHz test signal starts to rise.
- During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in § 90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

#### TEST PROCEDURE

TIA/EIA-603 2.2.19



#### TEST CONFIGURATION

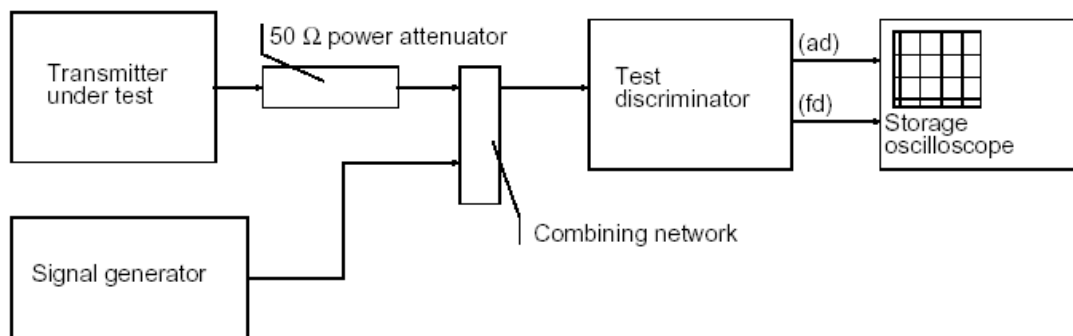

#### TEST RESULTS

Please refer to the following plots.

Modulation Type: FM

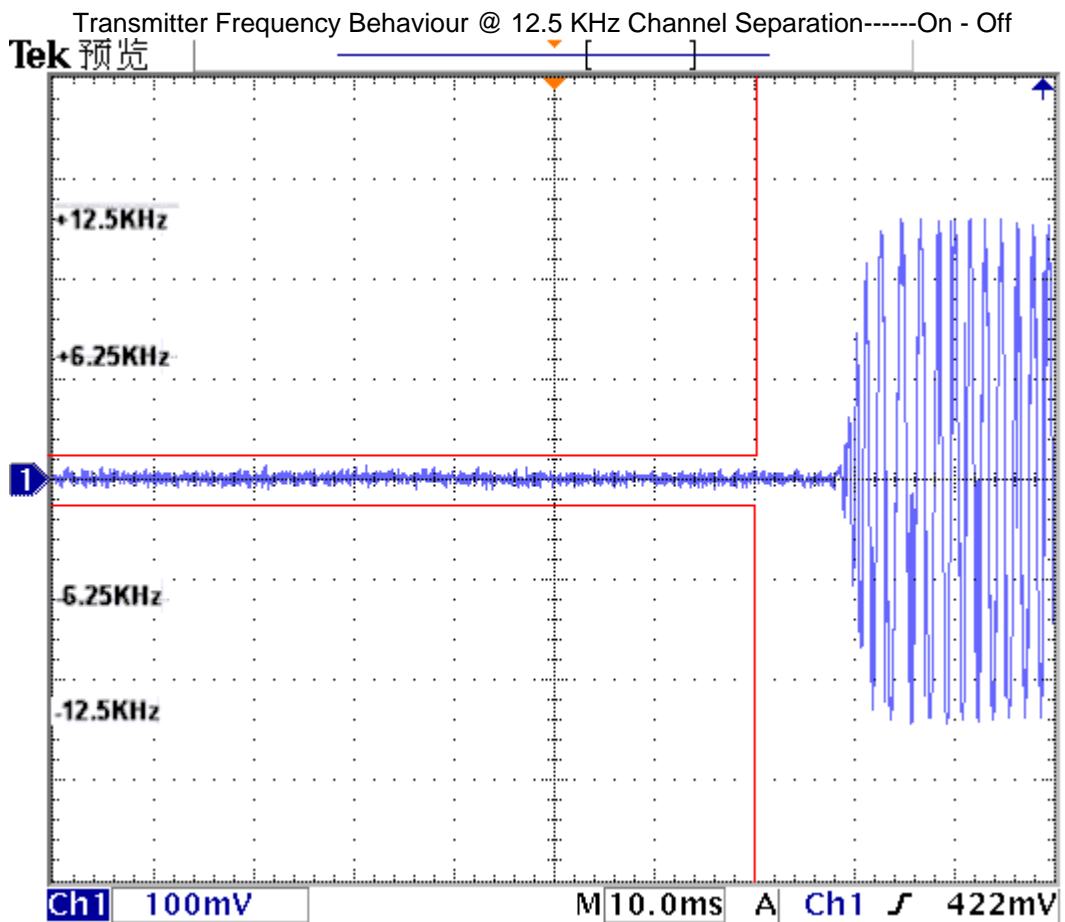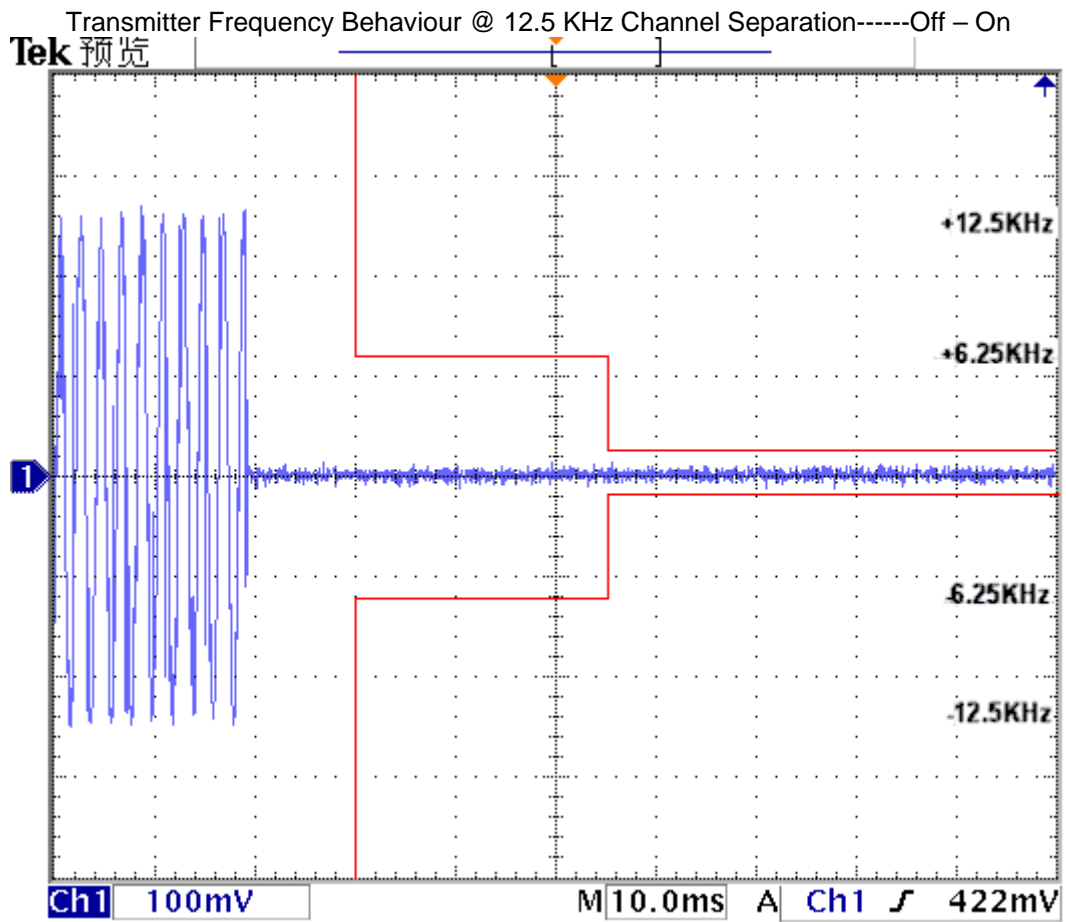

### 4.9. Receiver Radiated Spurious Emission

#### TEST APPLICABLE


The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$


Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

#### TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency below 1000MHz

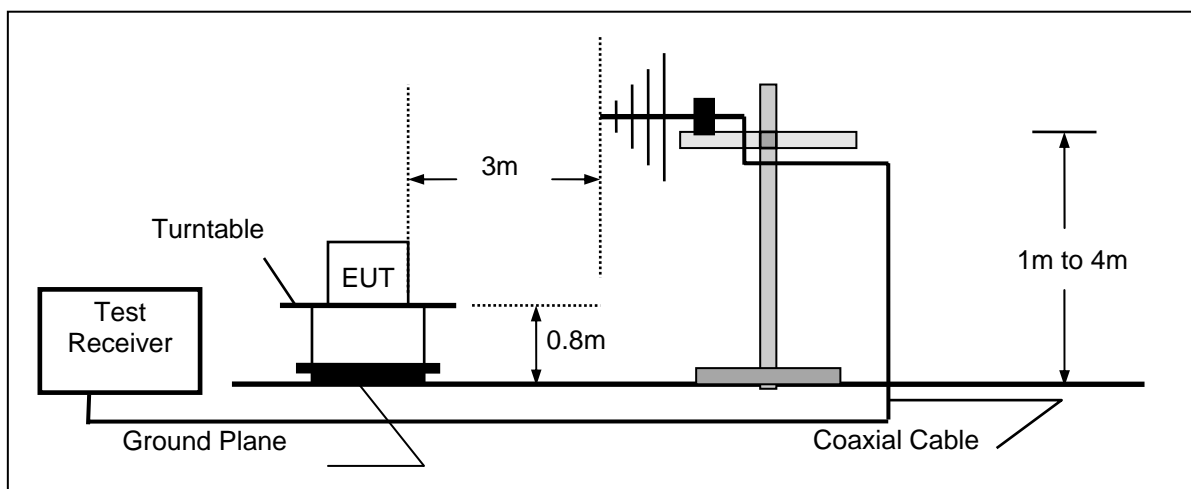

(B) Radiated Emission Test Set-Up, Frequency above 1000MHz

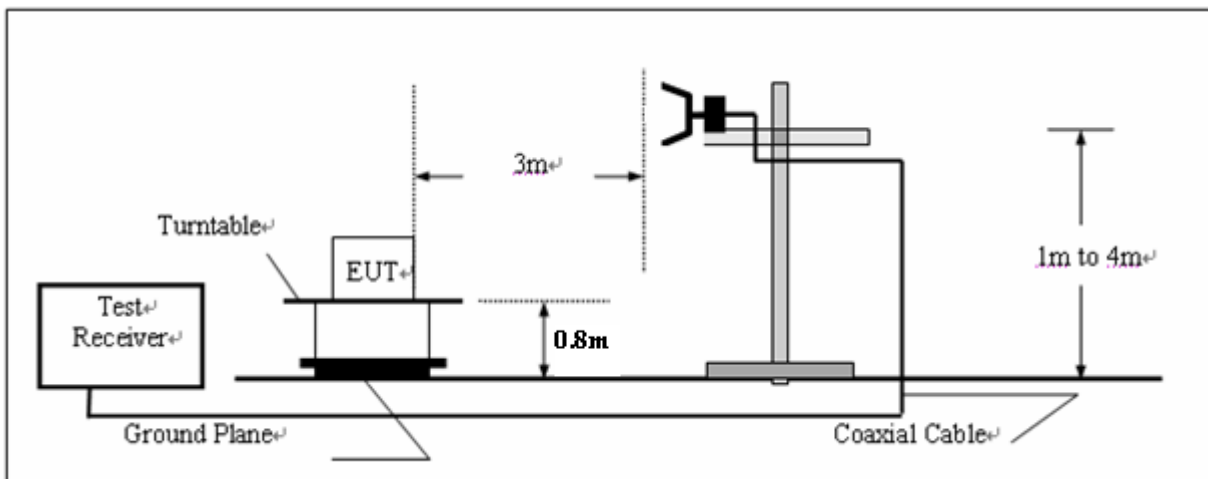

#### TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measurements have been completed.

**RECEIVER RADIATED SPOUIOUS LIMIT**

For unintentional device, according to § 15.109(a) and RSS-Gen, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.


**TEST RESULTS**

The Radiated Measurement are performed to the five channels (the high channel, the middle channel and the low channel), the datum recorded below is the worst case for each channel separation;and the EUT shall be scanned from 30 MHz to the 5th harmonic of the highest oscillator frequency in the digital devices or 1 GHz whichever is higher.

Modulation Type	Channel Separation	Test Frequency (MHz)	Polar.	Maximum Radiated Emissions		FCC Limit (dBuV/m)
				Frequency (MHz)	Datum (dBuV/m)	
FM	12.5 KHz	406.5000	H	928.07	29.40	46.00
			V	37.77	25.50	40.00
Test Results			Compliance			

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength				
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	HL562	201106

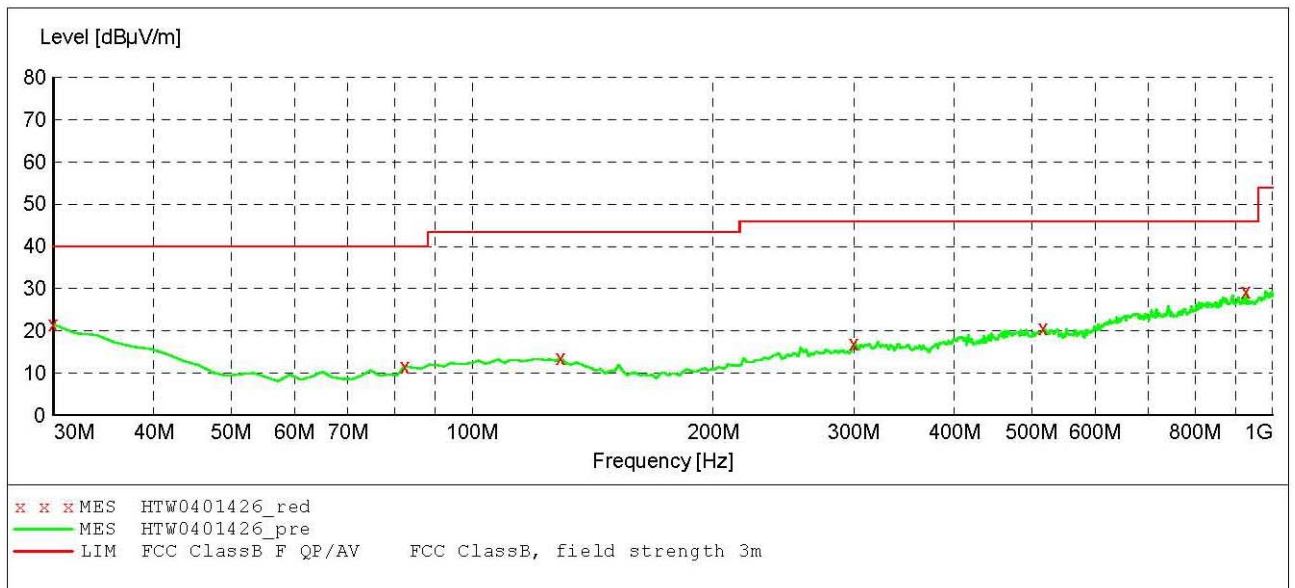


**MEASUREMENT RESULT: "HTW0401426\_red"**

4/1/2012 9:13AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	21.50	-11.3	40.0	18.5	PK	300.0	84.00	HORIZONTAL
82.484970	11.60	-21.6	40.0	28.4	PK	100.0	349.00	HORIZONTAL
129.138277	13.60	-20.3	43.5	29.9	PK	100.0	336.00	HORIZONTAL
300.200401	17.00	-16.9	46.0	29.0	PK	300.0	29.00	HORIZONTAL
517.915832	20.60	-13.0	46.0	25.4	PK	100.0	168.00	HORIZONTAL
928.076152	29.40	-7.1	46.0	16.6	PK	300.0	348.00	HORIZONTAL

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	HL562 201106

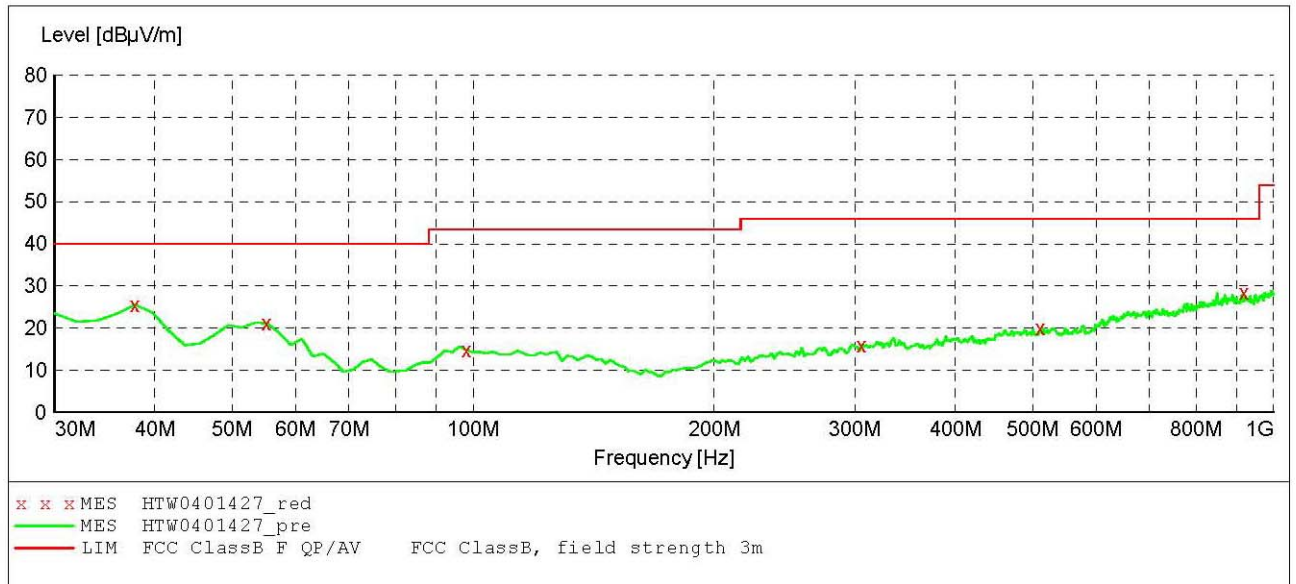

**MEASUREMENT RESULT: "HTW0401427\_red"**

4/1/2012 9:15AM


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.775551	25.50	-15.3	40.0	14.5	PK	100.0	321.00	VERTICAL
55.270541	21.10	-23.9	40.0	18.9	PK	100.0	213.00	VERTICAL
98.036072	14.80	-19.9	43.5	28.7	PK	100.0	321.00	VERTICAL
306.032064	16.00	-16.6	46.0	30.0	PK	100.0	158.00	VERTICAL
512.084168	20.00	-13.1	46.0	26.0	PK	100.0	0.00	VERTICAL
918.356713	28.40	-7.2	46.0	17.6	PK	100.0	359.00	VERTICAL



Modulation Type	Channel Separation	Test Frequency (MHz)	Polar.	Maximum Radiated Emissions		FCC Limit (dBuV/m)
				Frequency (MHz)	Datum (dBuV/m)	
FM	12.5 KHz	406.5000	H	5909.81	49.50	54.00
			V	5388.77	51.00	54.00
Test Results			Compliance			

**SWEEP TABLE: "test (1G-18G) P"**

Short Description: EN 55022 Field Strength  
 Start Stop Detector Meas. IF Transducer  
 Frequency Frequency Time Bandw.  
 1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz HF906 2011

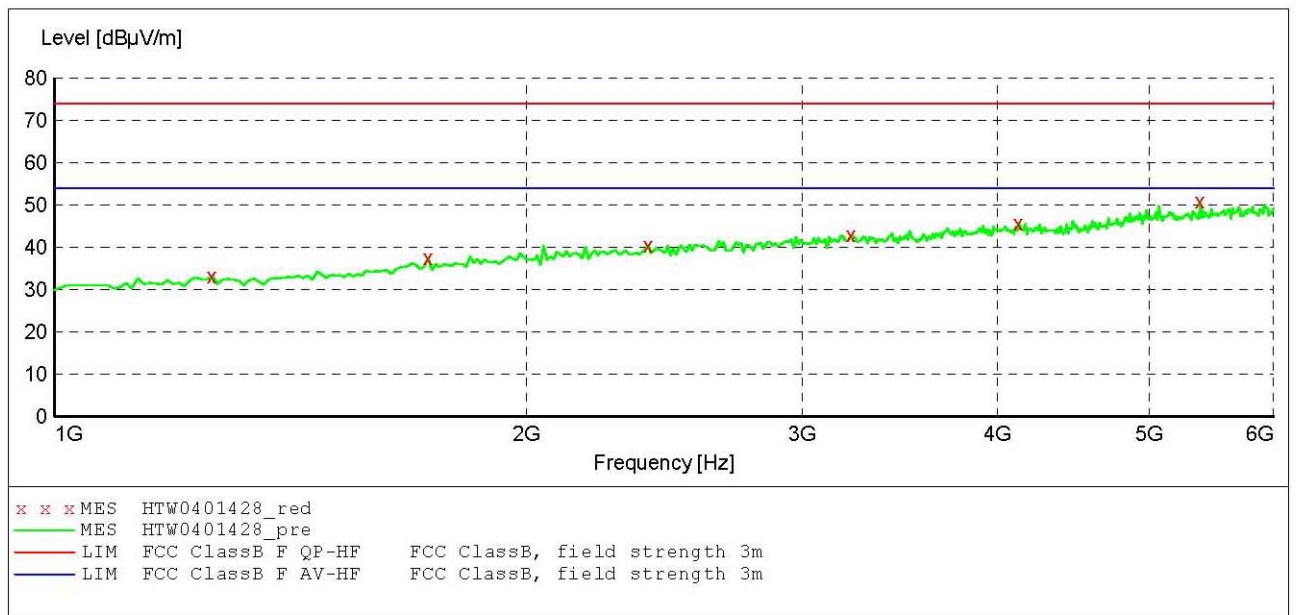


**MEASUREMENT RESULT: "HTW0401428\_red"**

4/1/2012 9:24AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1260.521042	33.30	-25.0	74.0	40.7	PK	100.0	235.00	VERTICAL
1731.462926	37.60	-21.6	74.0	36.4	PK	100.0	312.00	VERTICAL
2392.785571	40.50	-17.5	74.0	33.5	PK	100.0	258.00	VERTICAL
3224.448898	43.00	-14.8	74.0	31.0	PK	100.0	265.00	VERTICAL
4126.252505	45.80	-12.9	74.0	28.2	PK	100.0	103.00	VERTICAL
5388.777555	51.00	-10.1	74.0	23.0	PK	100.0	315.00	VERTICAL

**SWEEP TABLE: "test (1G-18G) P"**

Short Description: EN 55022 Field Strength  
 Start Stop Detector Meas. IF Transducer  
 Frequency Frequency Time Bandw.  
 1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz HF906 2011

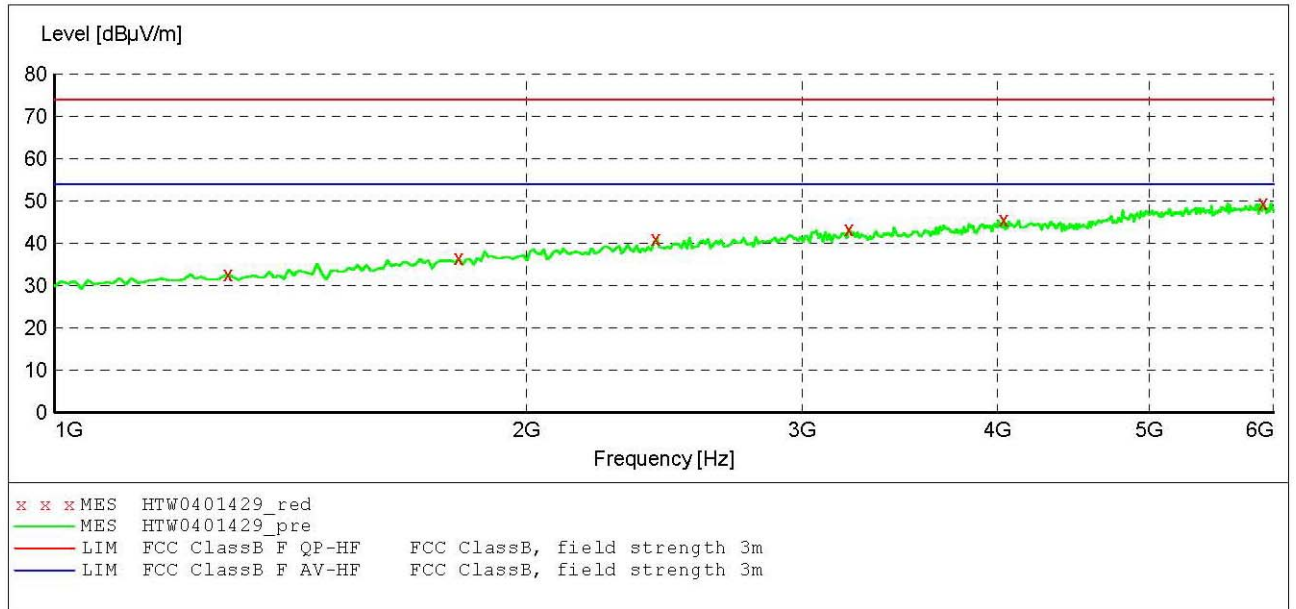

**MEASUREMENT RESULT: "HTW0401429\_red"**

4/1/2012 9:26AM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1290.581162	32.70	-24.8	74.0	41.3	PK	100.0	53.00	HORIZONTAL
1811.623246	36.50	-20.9	74.0	37.5	PK	100.0	0.00	HORIZONTAL
2422.845691	41.20	-17.4	74.0	32.8	PK	100.0	103.00	HORIZONTAL
3214.428858	43.50	-14.8	74.0	30.5	PK	100.0	239.00	HORIZONTAL
4036.072144	45.80	-12.9	74.0	28.2	PK	100.0	111.00	HORIZONTAL
5909.819639	49.50	-9.5	74.0	24.5	PK	100.0	42.00	HORIZONTAL

### 4.10. Receiver Conducted Spurious Emission


#### TEST APPLICABLE

The same as Section 4.3

#### TEST PROCEDURE

The spectrum analyzer was connected to the RF output power of the EUT, the EUT was setup in receiving mode; The RBW of the spectrum analyzer was set to 100 kHz and the VBW set to 300 KHz below the test frequency 1GHz. While the RBW of the spectrum analyzer was set to the 1MHz and VBW set to the 3MHz from 1GHz to the 10<sup>th</sup> harmonic.

#### TEST CONFIGURATION

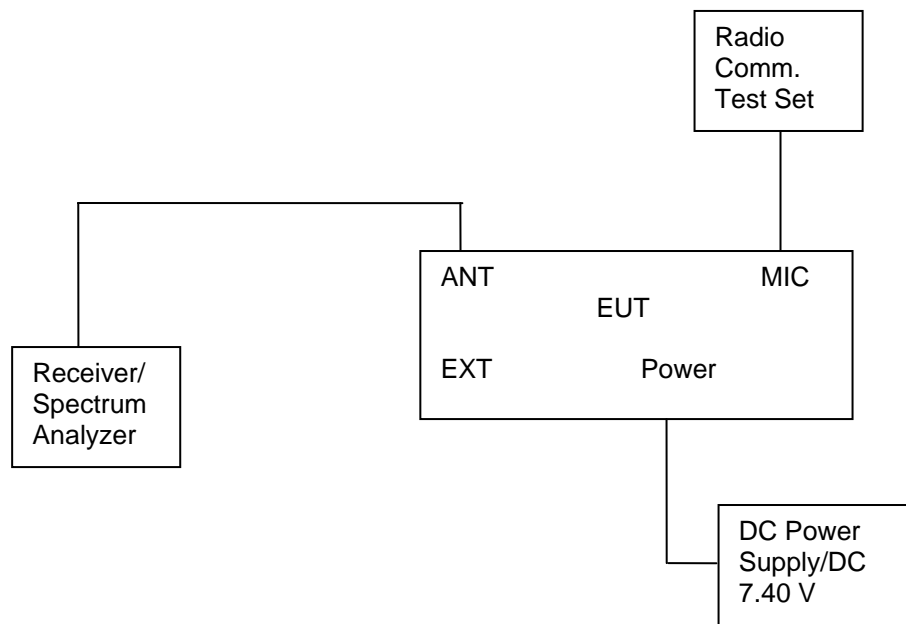



#### LIMIT

The power at the antenna terminal shall not exceed 2.0 nanowatts (-57dBm).



#### TEST RESULTS

The Receiver Conducted Spurious Emissions Measurement is performed to the five channels (the top channel, the middle channel and the bottom channel), the datums recorded below were for the three channels; and the EUT shall be scanned from 30 MHz to the 6 GHz.



Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Low	406.5000	871.47	-75.31	3012.50	-66.33	-57dBm
Test Results				Compliance				

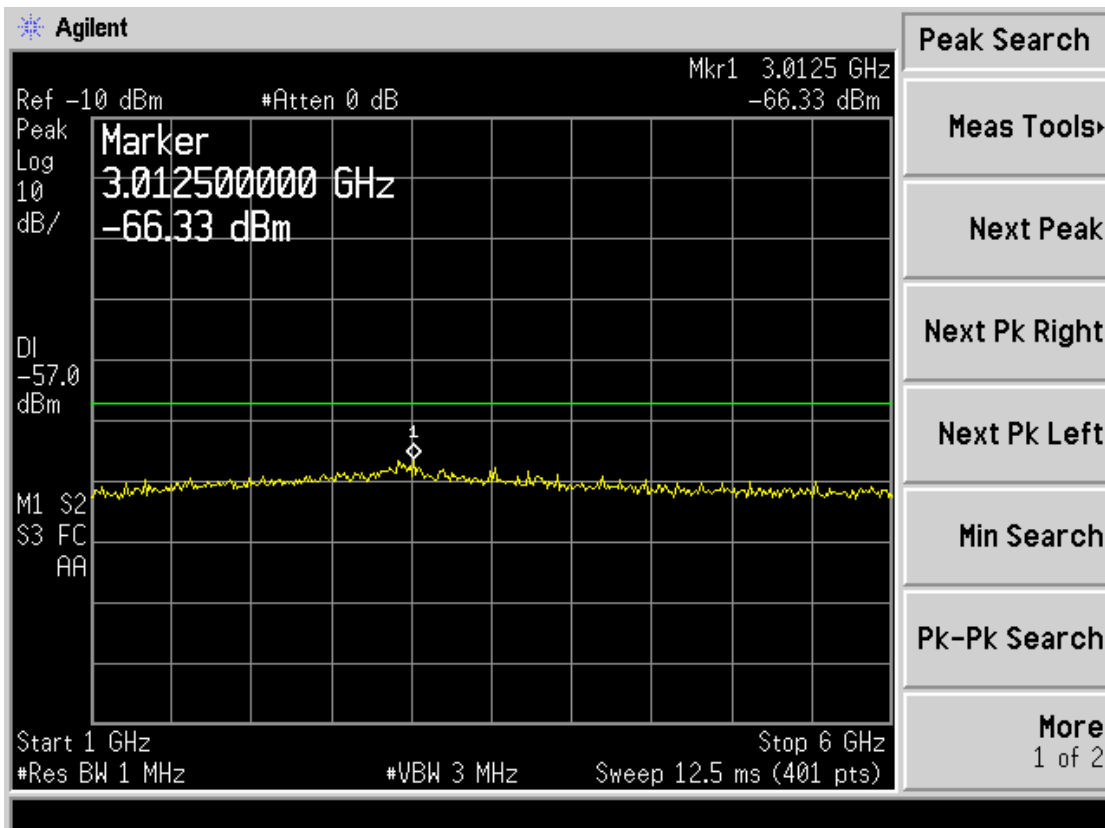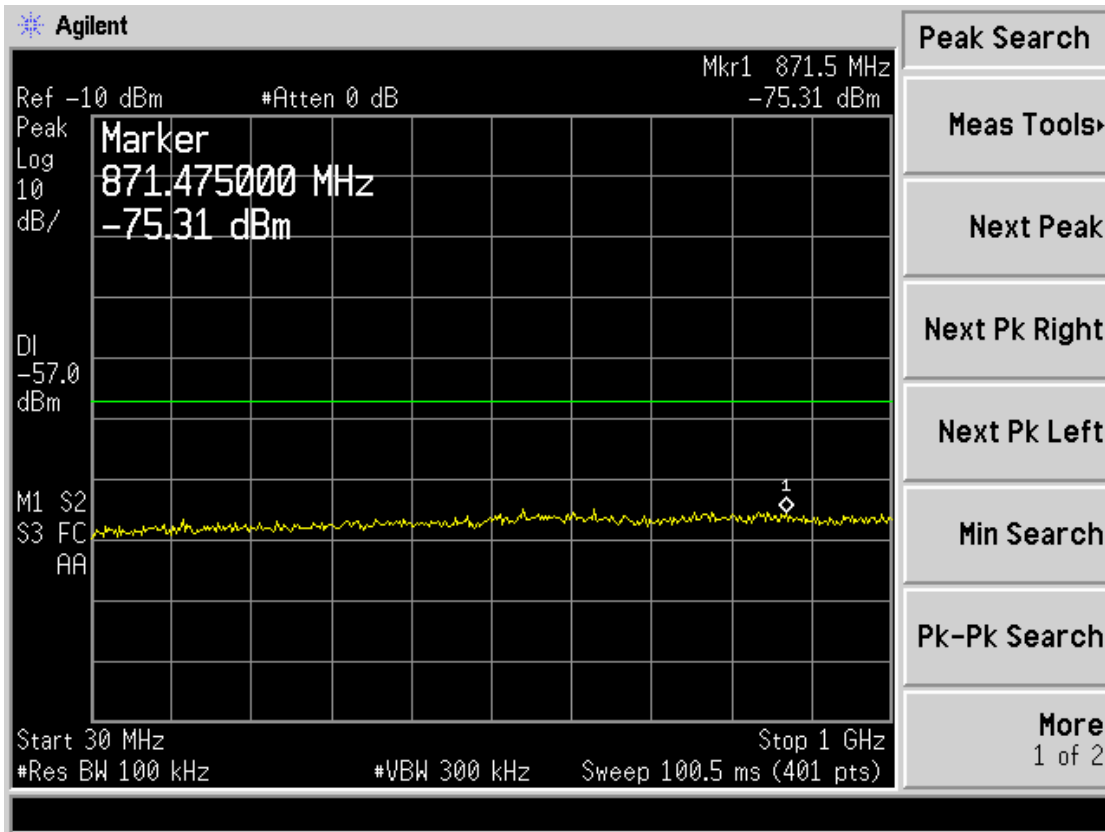



Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Low	418.0000	733.25	-74.78	2900.00	-67.82	-57dBm
Test Results				Compliance				

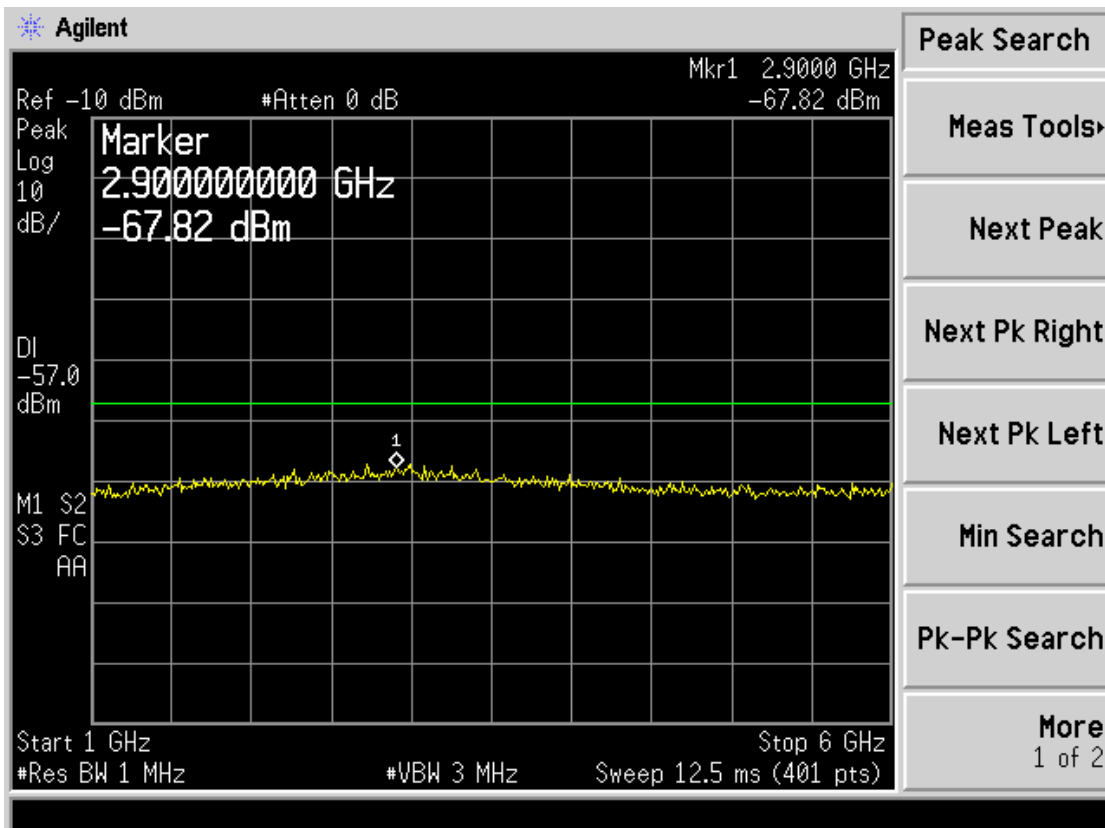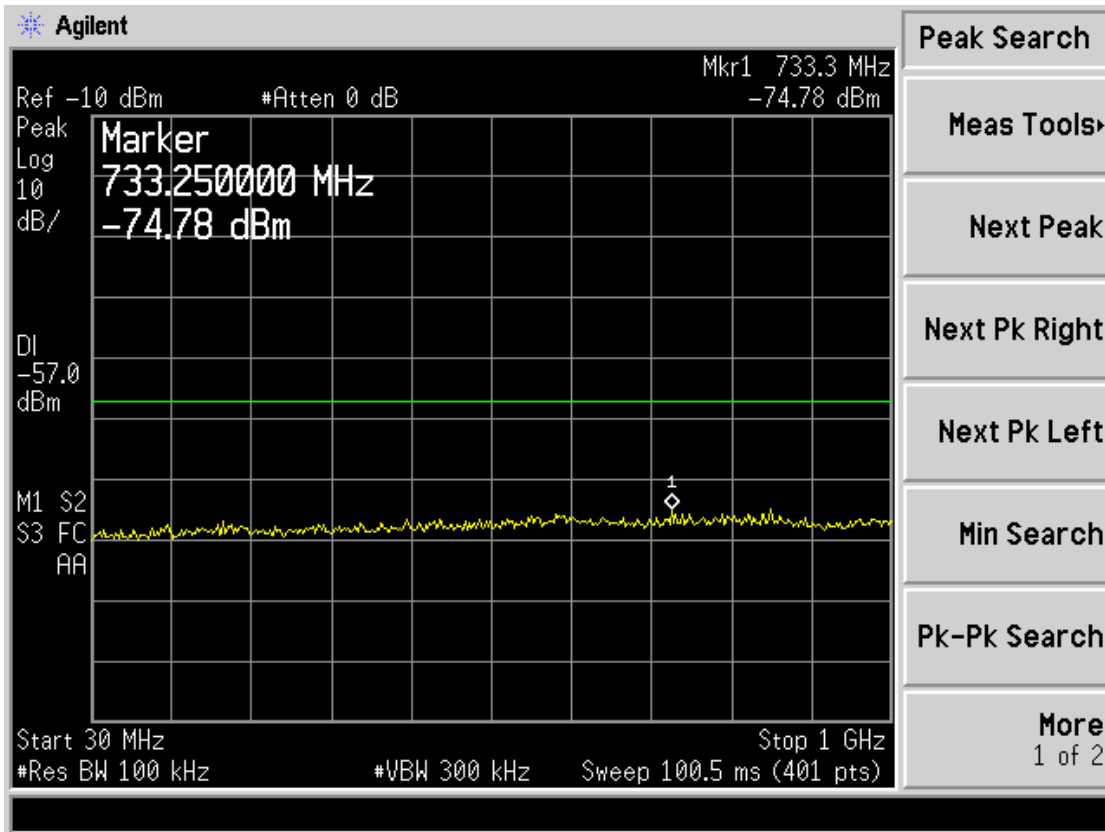



Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Middle	435.5000	764.77	-75.55	2725.00	-67.03	-57dBm
Test Results				Compliance				

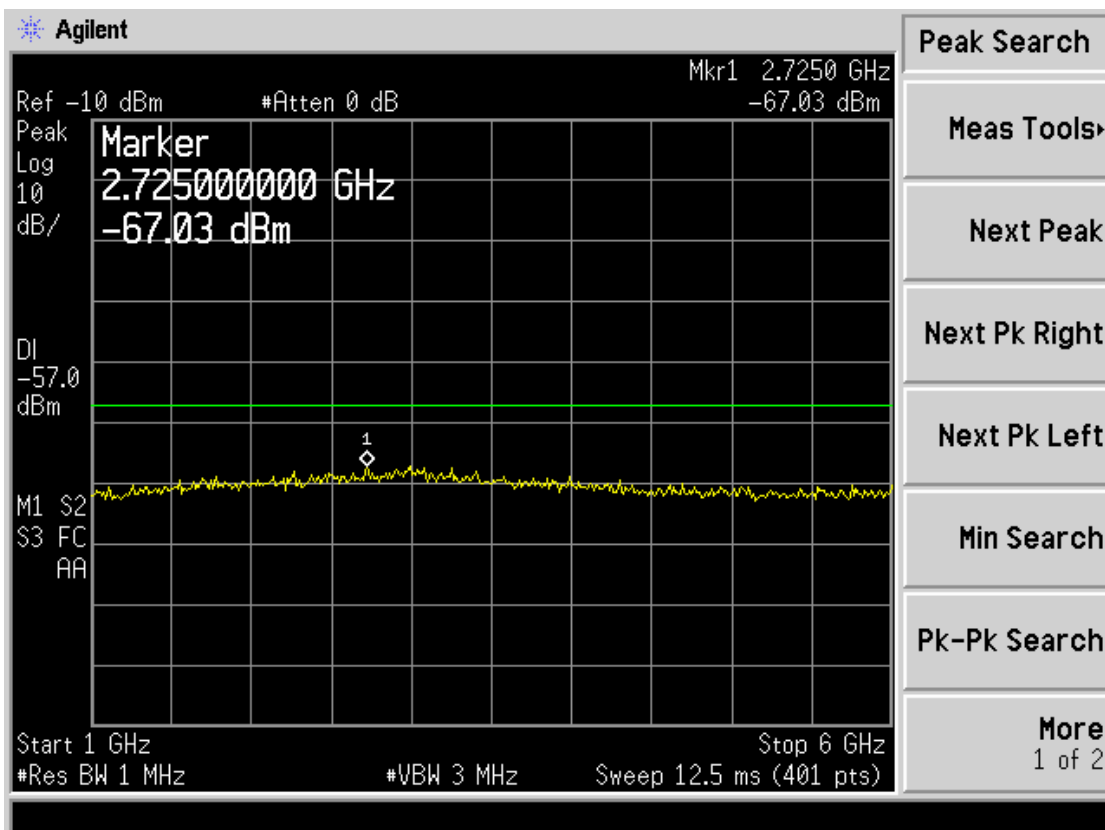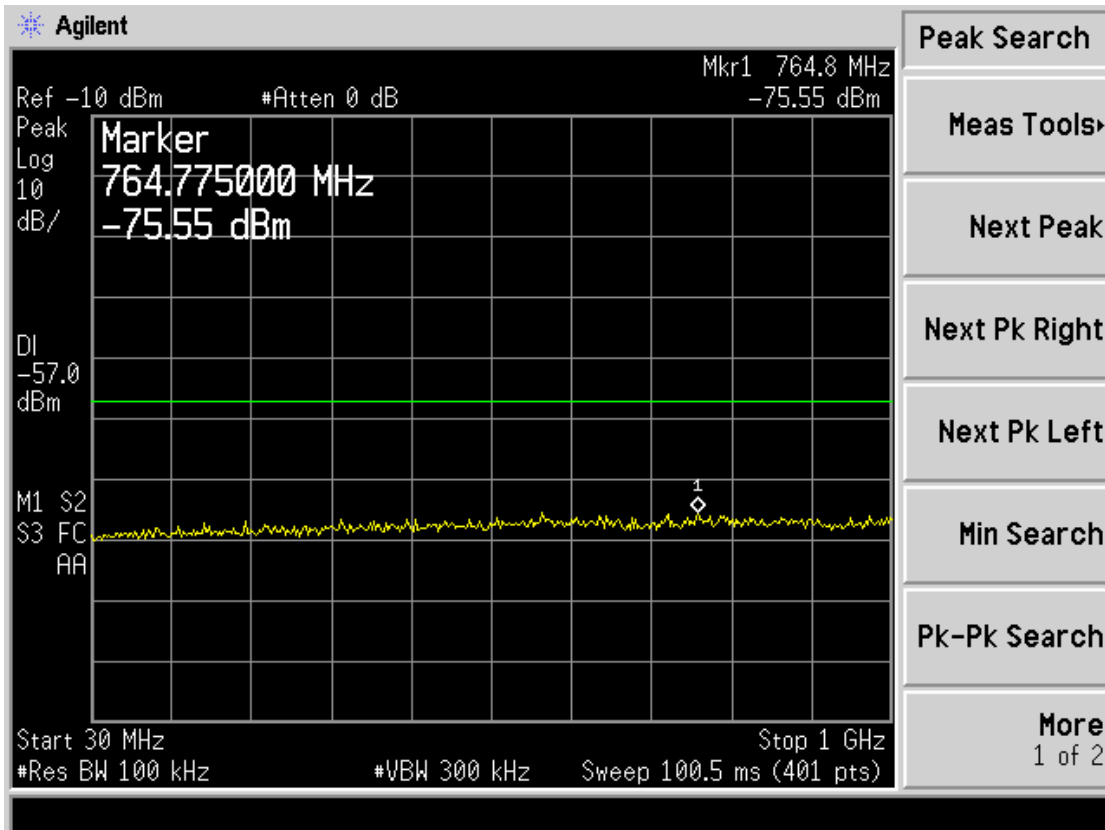

Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	High	453.0000	835.10	-74.63	2950.00	-67.13	-57dBm
Test Results				Compliance				

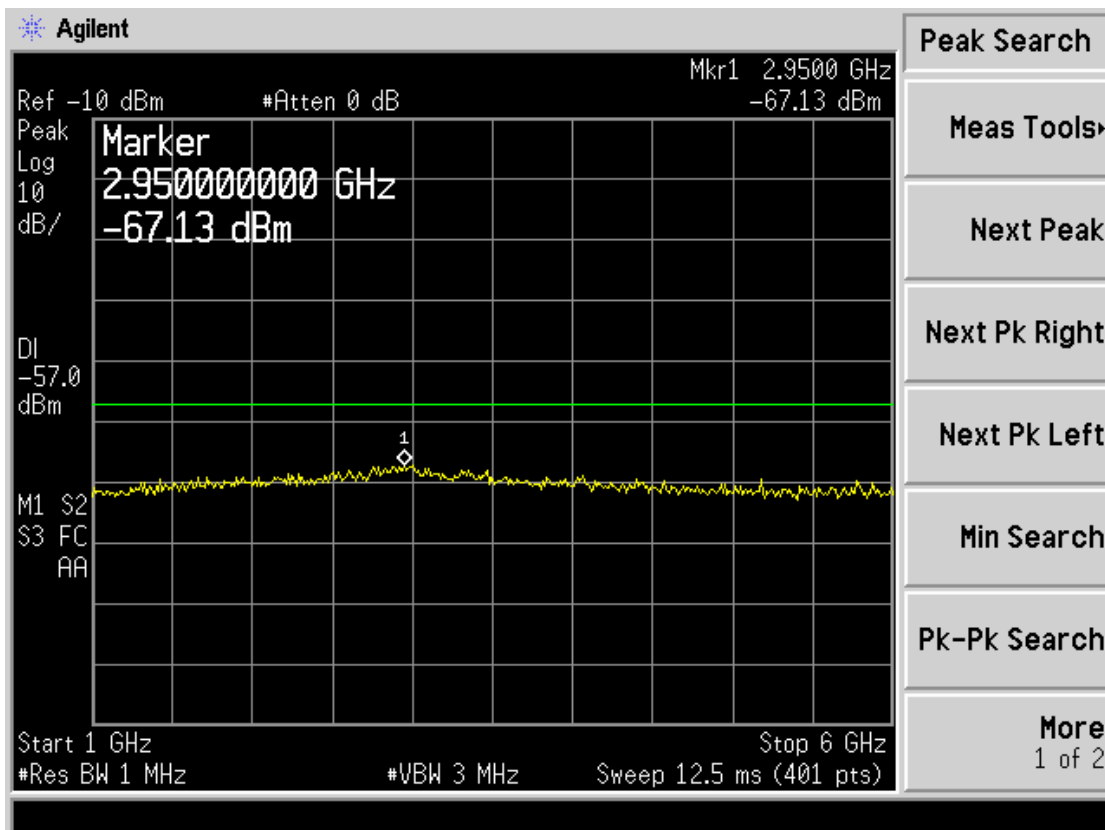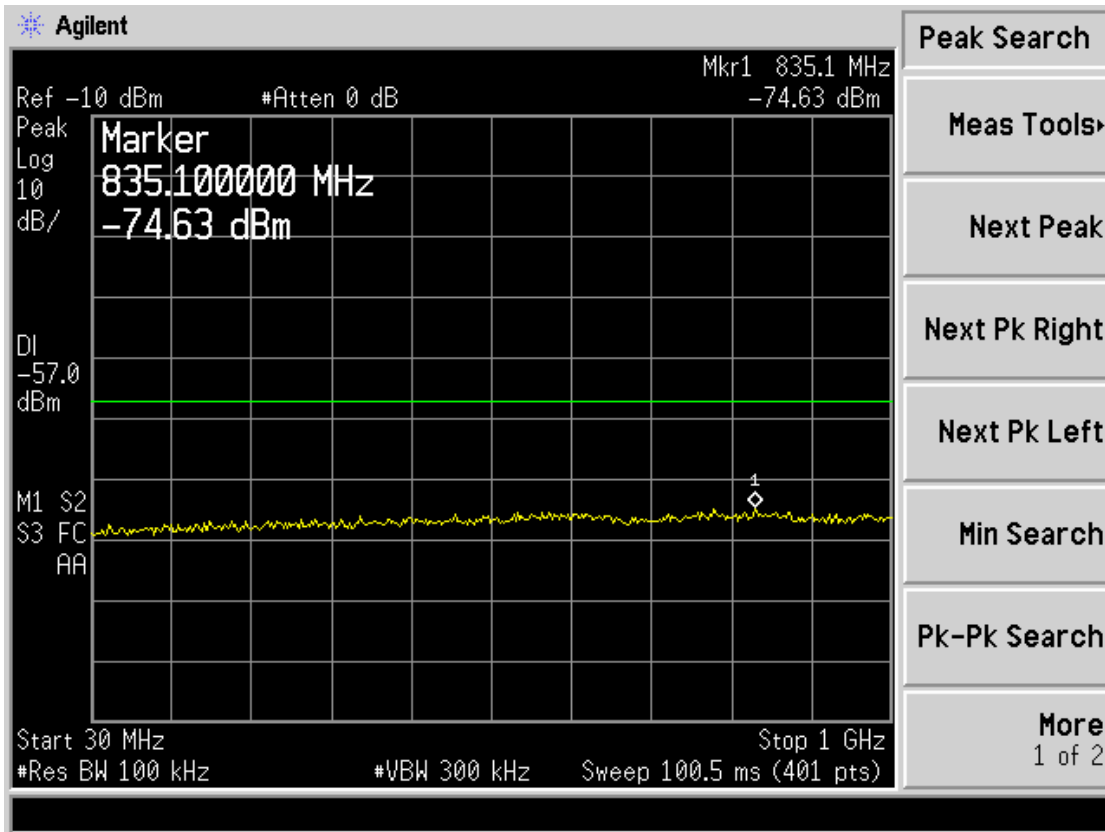




Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	High	469.5000	847.22	-75.20	2705.00	-67.00	-57dBm
Test Results				Compliance				


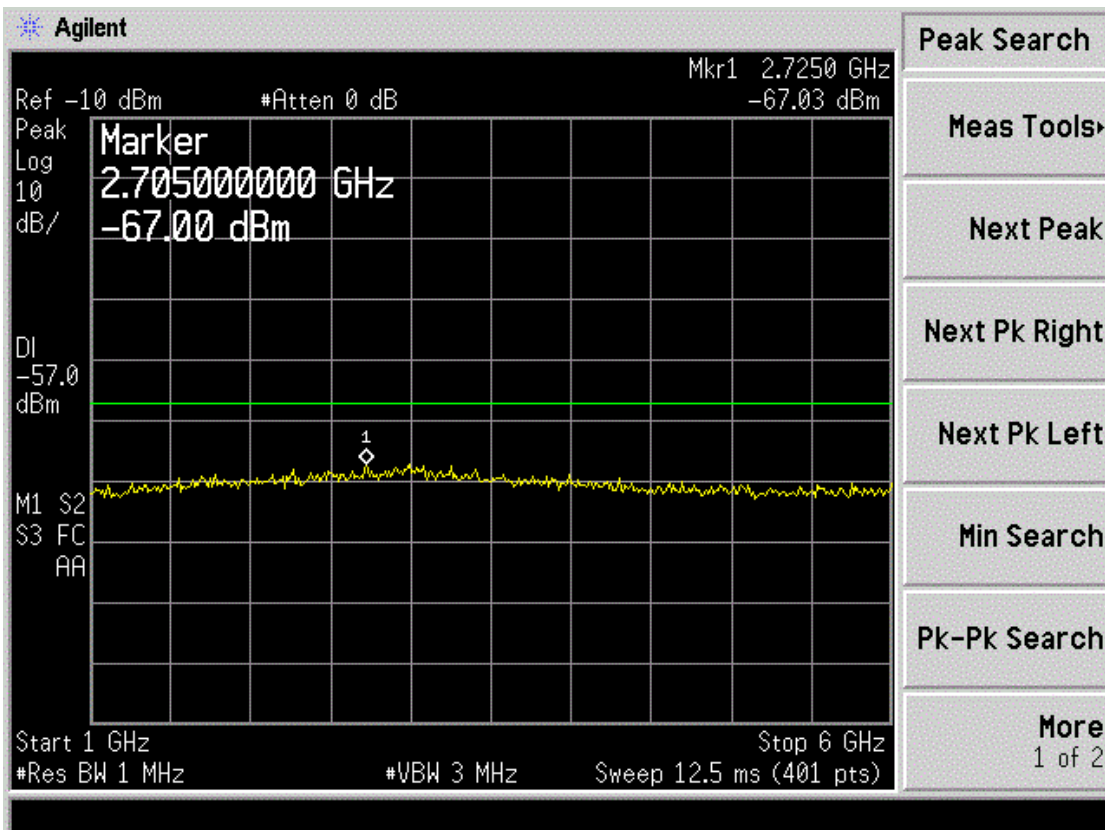
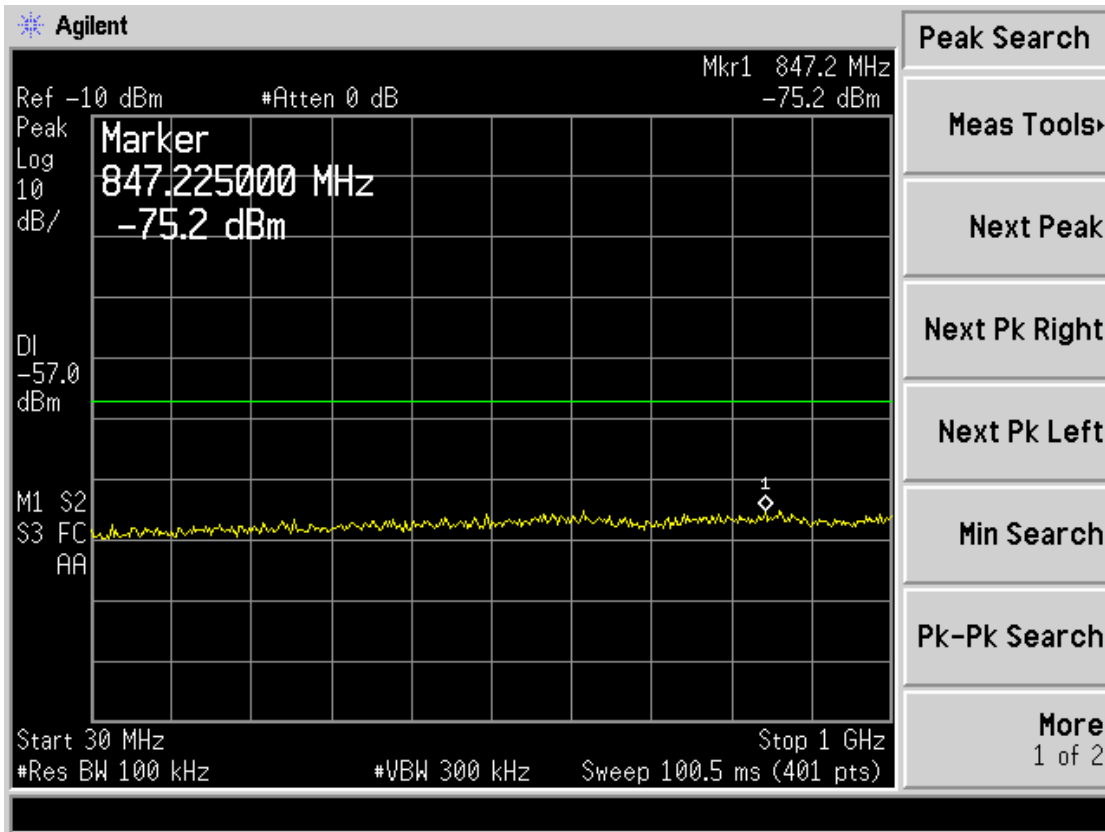





## 5. Test Setup Photos of the EUT

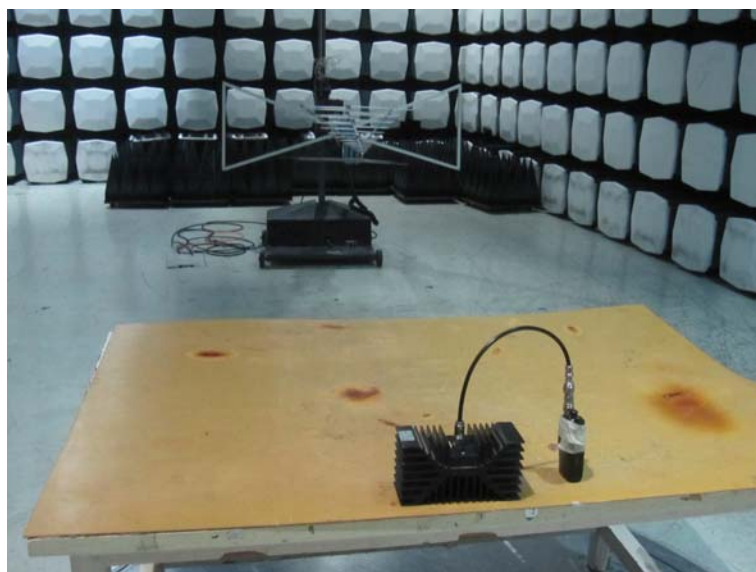

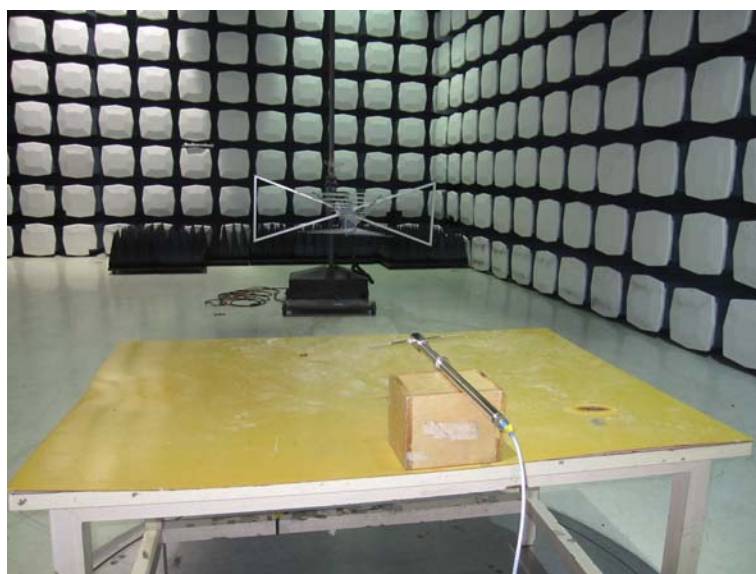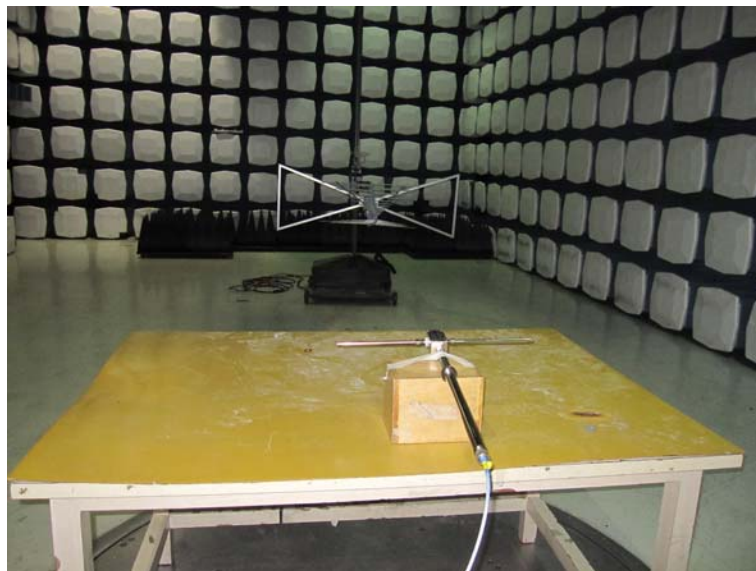

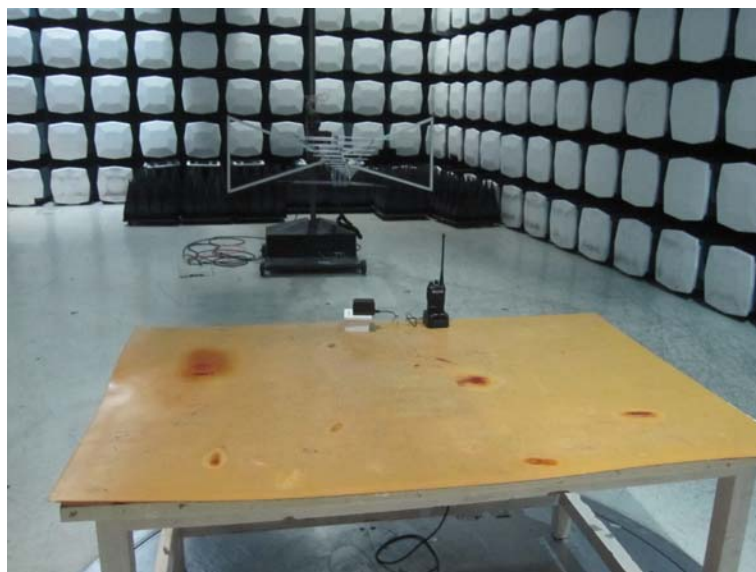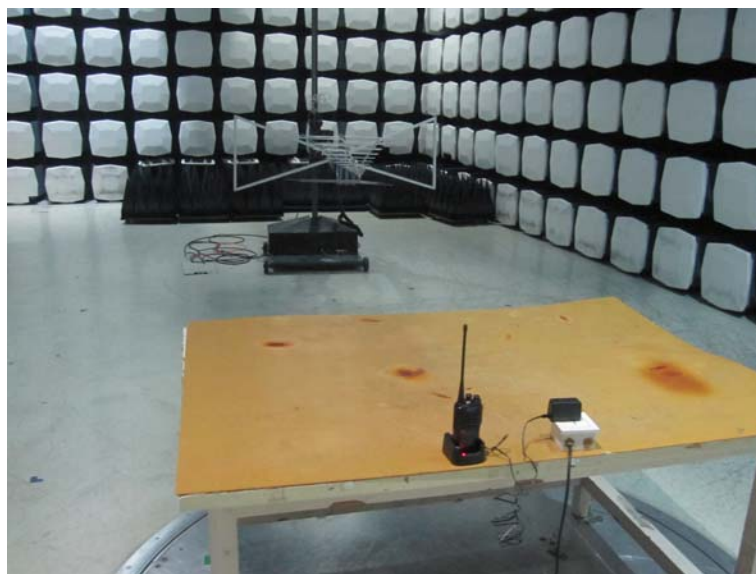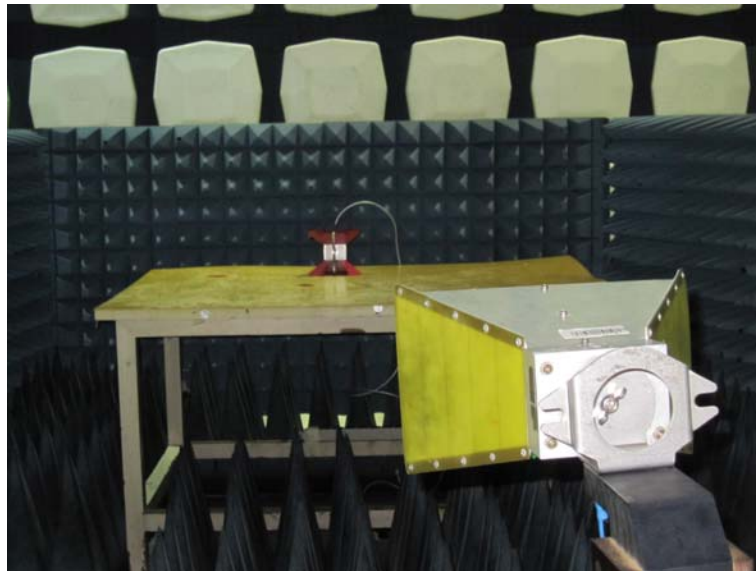



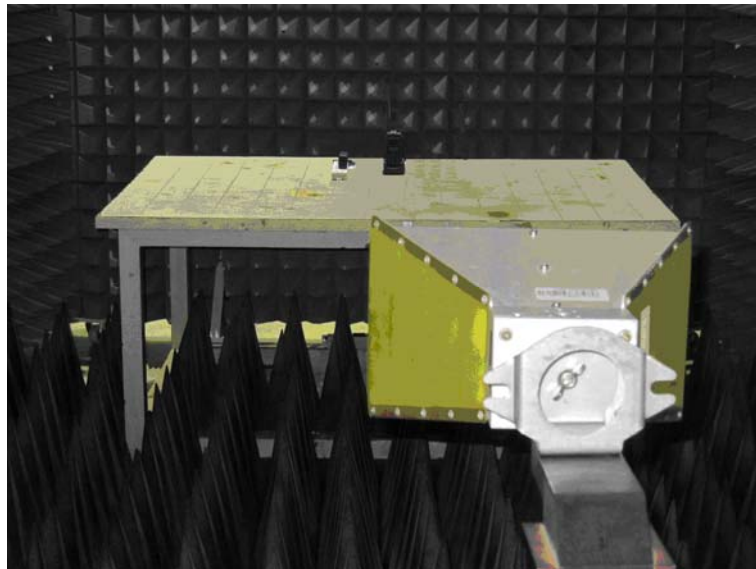

## 6. External and Internal Photos of the EUT

### External photos of the EUT









**Adapter Photos**





Internal Photos





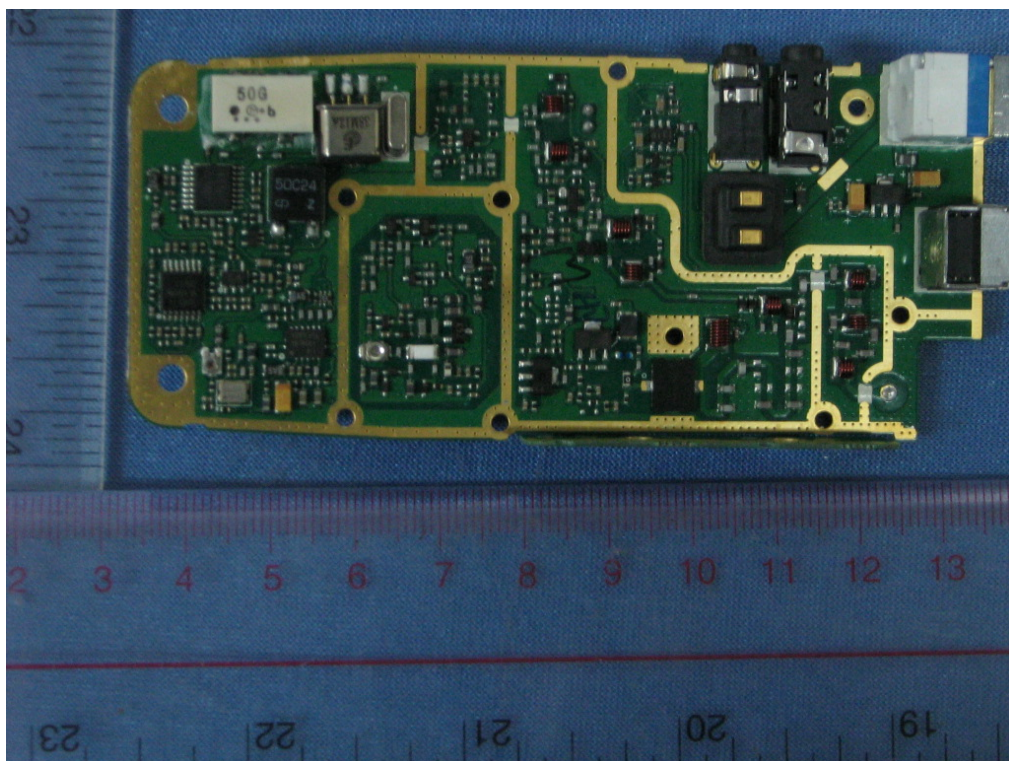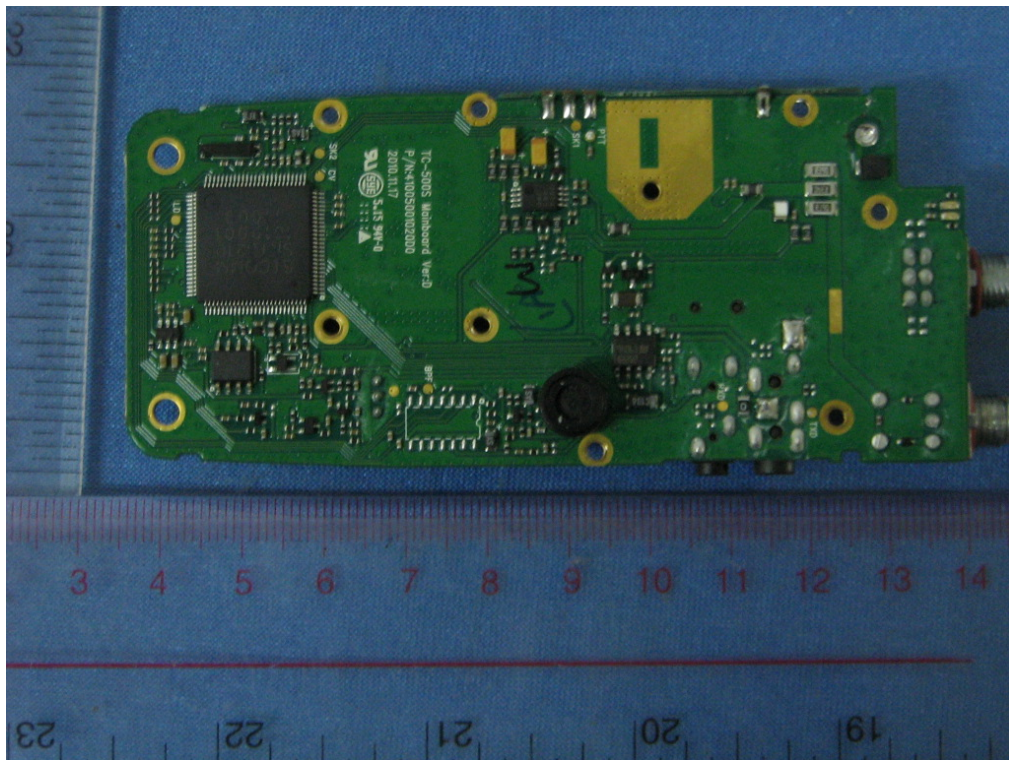



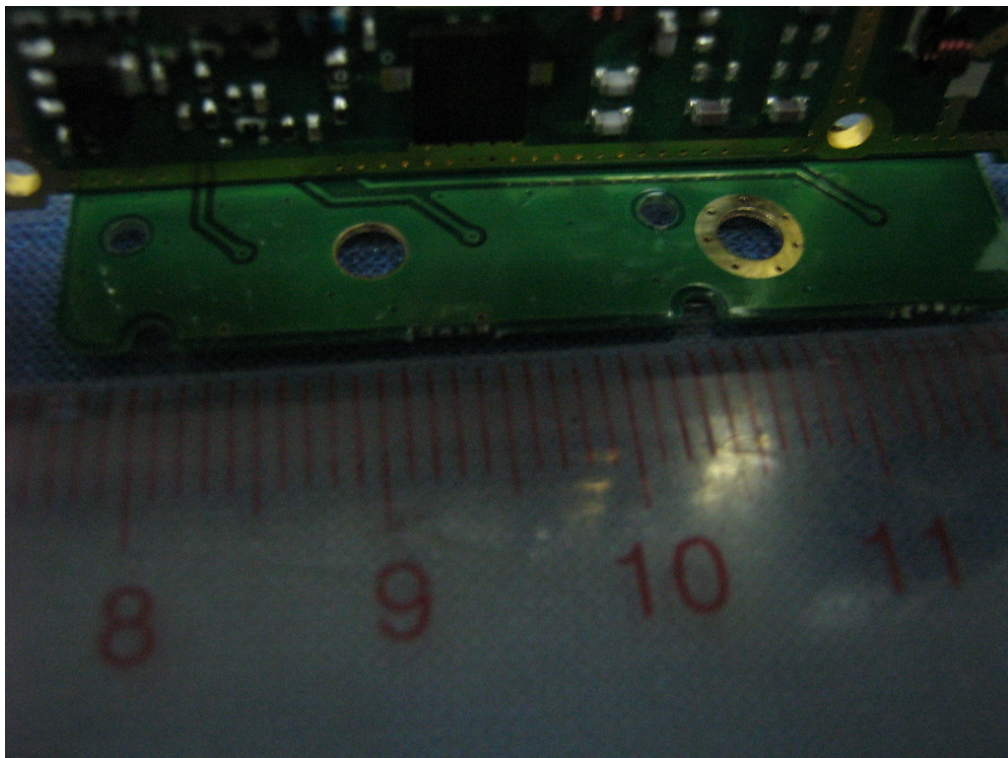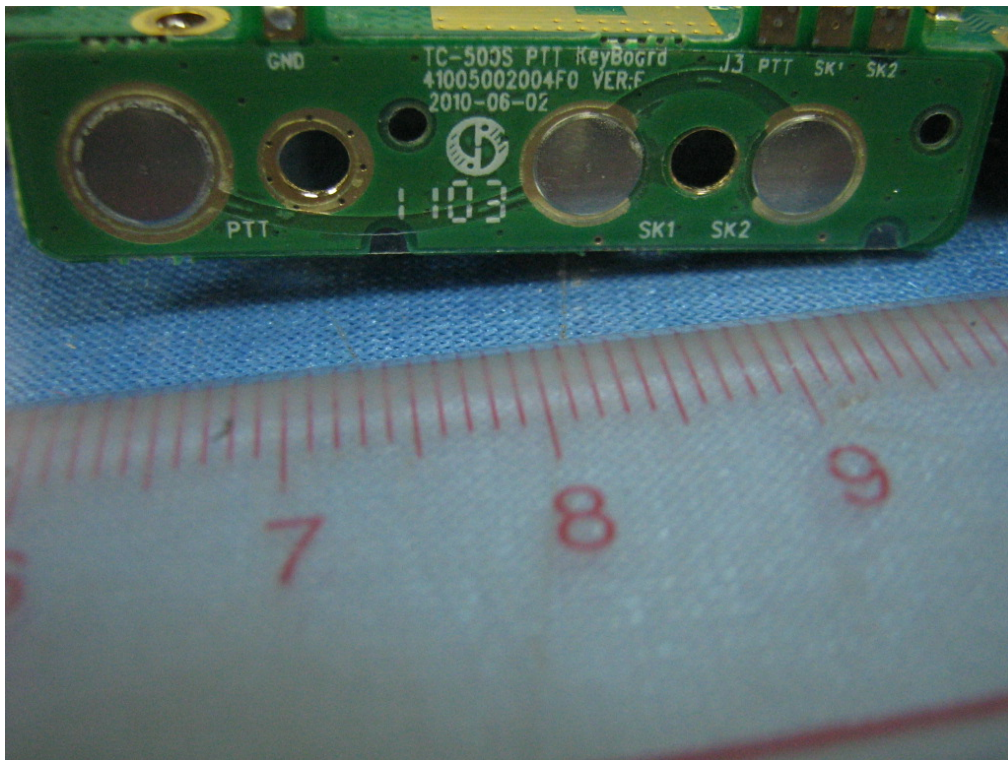

.....End of Report.....