

TEST REPORT

No.: 18-1-0018601T05

According to:
FCC Regulations
 Part 1.1310
 Part 2.1091

ISED-Regulations
 RSS-102, Issue 5

for

Robert Bosch Car Multimedia GmbH

AIVICMFB0

FCC: YBN-AIVICMFB0
 ISED: 9595A-AIVICMFB0
 PMN: AIVICMFB0
 HVIN: AIVICMFB0







Laboratory Accreditation and Listings		
 <p>Deutsche Akkreditierungsstelle D-PL-12047-01-01</p> <p>Accredited EMC-Test Laboratory</p>	 <p>Industry Canada</p> <p>Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3</p>	 <p>Voluntary Controls for Electromagnetic Emissions</p> <p>Reg. No.: R-20013, C-20009, T-20006, G-20013</p>
 <p>AUTHORIZED RF LABORATORY</p>	 <p>Authorized™ Test Lab</p> <p>Lab Code: 2001130-00</p>	 <p>FEDERAL COMMUNICATIONS COMMISSION U.S.A. • NOVEMBER 1982</p> <p>MRA US-EU 0003</p>
accredited according to DIN EN ISO/IEC 17025		
<p>CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com</p>		
Laboratory Accreditation and Listings		

Table of contents

1. SUMMARY OF TEST RESULTS.....	3
1.1. Summary of tests results	3
1.2. Attestation:.....	3
2. ADMINISTRATIVE DATA	4
2.1. Identification of the testing laboratory	4
2.2. Test location	4
2.3. Organizational items	4
2.4. Applicant’s details	4
2.5. Manufacturer’s details	4
3. EQUIPMENT UNDER TEST (EUT).....	5
3.1. Summary of product description.....	5
3.2. EUT Technologies	5
3.3. Antenna Information.....	5
3.4. EUT: Type, S/N etc. and short descriptions used in this test report	6
3.5. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions	6
3.6. EUT set-ups	6
3.7. EUT operating modes	6
4. MEASUREMENTS	7
4.1. Radio Frequency Exposure Evaluation §2.1091	7
4.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment').....	7
4.2. Requirements and limits for RSS Standard	9
4.3. MPE Calculation method.....	9
4.4. Evaluation Method.....	10
4.5. Results for fixed and mobile.....	10
4.6. Conclusion	14
4.7. Measurement uncertainties	15
5. ABBREVIATIONS USED IN THIS REPORT	16
6. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES	16
7. PHOTOGRAPHS OF THE EUT’S	17
8. VERSIONS OF TEST REPORTS (CHANGE HISTORY)	18

Table of annex

	Total pages
Annex 1: Separate document “Test report no.: 1-5993/18-01-04”	71
Annex 2: Separate document “Test report no.: 1-5993/18-01-05”	53
Annex 3: Separate document “Test report no.: 1-5993/18-01-03”	115
Annex 4: Separate document “Test report no.: 1-5993/18-01-02”	252

The listed attachments are an integral part of this report.

1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

In order to verify the compliance with applicable rules, a representative configuration consisting of the main EUT and necessary representative auxiliary equipment was chosen by the applicant.

The MPE assessment report is performed for all wireless technologies usable in the EU and supported from the EUT. Following tests have been performed to show compliance with applicable FCC Part 2.1091 and FCC Part 1.1310 of the FCC CFR 47 Rules and Canadian RSS-102, Issue 5.

1.1. Summary of tests results

RF-Exposure Evaluation (separation distance user to RF-radiating element greater 20cm)								
Test cases	Port	References & Limits				EUT set-up	EUT op. mode	Result
		FCC Standard	Test Limit	RSS Standard	Test Limit			
Radio frequency radiation exposure Requirements	Cabinet	§1.1310 §2.1091 §2.1093	RF-Field Strength Limits: FCC: "general population/ uncontrolled" environment	RSS-102, Issue 5	Chapter 4 Table 4	1	1-4	Pass

Remark: Calculations based on Test Reports mentioned in Annex 1 to 4.

1.2. Attestation:

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.



.....
Dipl.-Ing. Rachid Acharkaoui
Responsible for test section



.....
M.Schäfers
Responsible for test report

2. Administrative Data

2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Rachid Acharkaoui
Deputy:	Dipl.-Ing. Niels Jeß

2.2. Test location

2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

2.3. Organizational items

Responsible for test report:	M. Schäfers
Receipt of EUT:	--
Date(s) of test:	--
Date of report:	2018-03-22

2.4. Applicant's details

Applicant's name:	Robert Bosch Car Multimedia GmbH
Address:	Robert-Bosch-Str. 200 31139 Hildesheim Germany
Contact person:	Mr. Salvatore Miraglia

2.5. Manufacturer's details

Manufacturer's name:	please see applicant's details
Address:	please see applicant's details

3. Equipment under test (EUT)

3.1. Summary of product description

FCC ID:	YBN-AIVICMFB0	
Product name	AIVICMFB0	
Exposure category	<input checked="" type="checkbox"/> General population/uncontrolled environment <input type="checkbox"/> Occupational exposure/controlled environment	
Output power	<input type="checkbox"/> Conducted <input type="checkbox"/> ERP <input checked="" type="checkbox"/> EIRP <input type="checkbox"/> Peak <input checked="" type="checkbox"/> Source-based time-averaging	
Antenna gain	details refer to: "MPE Information Requirements"	
Technology	<input type="checkbox"/> MIMO	<input type="checkbox"/> 2T2R <input type="checkbox"/> 3T3R <input type="checkbox"/> 4T4R
	<input checked="" type="checkbox"/> non-MIMO	<input checked="" type="checkbox"/> 1T1R <input type="checkbox"/> 1T2R <input type="checkbox"/> 2T1R
Evaluation type	<input type="checkbox"/> Standalone <input checked="" type="checkbox"/> Simultaneous transmission	
Evaluation distance	<input checked="" type="checkbox"/> 20 cm	
	<input type="checkbox"/> XXX cm	declares by manufacturer
EUT type	<input type="checkbox"/> Production Unit <input checked="" type="checkbox"/> Pre-Production Unit <input type="checkbox"/> Engineering Unit	
Device type	<input type="checkbox"/> Mobile device <input checked="" type="checkbox"/> Fixed device	
Refer rules	<input checked="" type="checkbox"/> CFR 47 FCC Part 2.1091 <input checked="" type="checkbox"/> CFR 47 FCC Part 1.1310 <input checked="" type="checkbox"/> KDB 447497 D01v06 October 23, 2015 <input checked="" type="checkbox"/> KDB 865664 D01v01r02 October 23, 2015	

3.2. EUT Technologies

Wireless Technologies	Frequency bands	Operation mode
<input checked="" type="checkbox"/> WLAN	<input checked="" type="checkbox"/> 2.4GHz <input checked="" type="checkbox"/> 5GHz	normal operation mode
<input checked="" type="checkbox"/> Bluetooth	<input checked="" type="checkbox"/> 2.4GHz	normal operation mode
<input checked="" type="checkbox"/> Bluetooth LE	<input checked="" type="checkbox"/> 2.4GHz	normal operation mode

3.3. Antenna Information

Wireless Technologies	Frequency bands	Antenna type	Maximum antenna gain
<input checked="" type="checkbox"/> WLAN <input checked="" type="checkbox"/> Bluetooth <input checked="" type="checkbox"/> Bluetooth LE	<input checked="" type="checkbox"/> 2.4GHz <input checked="" type="checkbox"/> 5GHz	<input type="checkbox"/> PIFA <input checked="" type="checkbox"/> PCB	see Annex 1 to 4

3.4. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	AIVICMFB0	Car Multi Media Device	0000048	001	0776

*) EUT short description is used to simplify the identification of the EUT in this test report.

3.5. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	--	--	--	--	--

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

3.6. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
set. 1	EUT A	--

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

3.7. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
op. 1	WLAN 2.4GHz	Only theoretically calculation
op. 2	WLAN 5GHz	Only theoretically calculation
op. 3	Bluetooth	Only theoretically calculation
op. 4	Bluetooth LE	Only theoretically calculation

*) EUT operating mode no. is used to simplify the test report.

4. Measurements

4.1. Radio Frequency Exposure Evaluation §2.1091

4.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
	For Evaluation instruments are not needed. Results are determined by calculation based on applicants delivered Tune-Up procedure.		

4.1.2. Requirements

FCC: §1.1310	<i>The criteria used for the evaluation of human exposure to radio frequency radiation is table 1 according FCC §1.1310 and table chapter 4.2 of RSS-102 standard and it is subject for evaluation of the RF exposure prior to equipment authorization. As the mobile equipment is authorized under Part 22 (Subpart H) and Part 24 of the FCC Rules, it is subject for evaluation of the RF exposure prior to equipment authorization.</i>
FCC § 2.1091	<i>Further information on evaluating compliance with these limits can be found in the FCC's OST/OET Bulletin Number 65, "Evaluating Compliance with FCC-Specified Guidelines for Human Exposure to Radiofrequency Radiation." For purposes of these requirements mobile devices are defined by the FCC as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits given in Table 1 of Appendix A.</i>

4.1.2.1. Valid for FCC

Table 1: LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)				
Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm ²]	Averaging time [minutes]
30 - 300	61.4	0.163	1.0	6
300 - 1500	-	-	f/300	6
1500 - 100,000	-	-	5	6
(B) Limits for General Population / Uncontrolled Exposure				
0.3 - 1.34	614	1.63	*(100)	30
1.34 - 30	824/f	2.19/f	*(180/f ²)	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f/1500	30
1500 - 100.0	-	-	1.0	30

f=frequency in MHz

*Plane-wave equivalent power density

NOTE1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. These limits apply to amateur station licensees and members of their immediate household as discussed in the text.

NOTE2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure. As discussed in the text, these limits apply to neighbours living near amateur radio stations.

4.1.3 General Limits:

FCC: §1.1307	Cellular Radiotelephone Service (subpart H of part 22) Non-building-mounted antennas: height above ground level to lowest point of antenna < 10 m and total power of all channels > 1000 W ERP (1640 W EIRP)
FCC §1.1307	Personal Communications Services (part 24) Broadband PCS (subpart E): non-building-mounted antennas: height above ground level to lowest point of antenna < 10 m and total power of all channels > 2000 W ERP (3280 W EIRP)
FCC §1.1310	LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE) Table 1(B) Limits for General Population/Uncontrolled Exposure 300–1500 MHz: $f/1500$ mW/cm ² 1500–100,000 MHz: 1.0 mW/cm ²
FCC §2.1091	Subject to routine evaluation is required when the device operate at frequencies of 1.5 GHz or below and their effective radiated power (ERP) is 1.5 watts or more, or if they operate at frequencies above 1.5 GHz and their ERP is 3 watts or more.
FCC §24.232	(a) Base stations are limited to 1640 watts peak equivalent isotropically radiated power (e.i.r.p.) with an antenna height up to 300 meters HAAT. b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power, ...
FCC §22.913	(a) Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
FCC §27.50 (C)(10)	(10) Portable stations (hand-held devices) are limited to 3 watts ERP; and
FCC §27.50(d)	(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP.
KDBs	No. 447498 D01 v06

4.2. Requirements and limits for RSS Standard

RSS-102, Issue 5	<p>2.5 Exemption Limits for Routine Evaluation</p> <p>All transmitters are exempt from routine SAR and RF exposure evaluations provided that they comply with the requirements of sections 2.5.1 or 2.5.2. If the equipment under test (EUT) meets the requirements of sections 2.5.1 or 2.5.2, applicants are only required to submit a properly signed declaration of compliance (see Annex C). The information contained in the RF exposure technical brief may be limited to the value(s) of the maximum output power, the information that demonstrates how the maximum output power of the transmitter was derived and the rationale for the separation distances applied (see Table 1), which must be based on the most conservative exposure condition for the applicable module or host platform test procedure requirements.</p>
	<p>2.5.2 Exemption Limits for Routine Evaluation — RF Exposure Evaluation</p> <p>RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:</p> <ul style="list-style-type: none"> • below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance); • at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz; • at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance); • at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz; • at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance). <p>In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.</p>
	<p>2.6 User Manual Requirements</p> <p>The applicant is responsible for providing proper instructions to the user of the radio device, and any usage restrictions, including limits of exposure durations. The user manual shall provide installation and operation instructions, as well as any special usage conditions (e.g. proper accessory required, including the proper orientation of the device in the accessory, maximum antenna gain in the case of detachable antenna), in order to ensure compliance with SAR and/or RF field strength limits. For instance, compliance distance shall be clearly stated in the user manual.</p> <p>The user manual of devices intended for controlled use shall also include information relating to the operating characteristics of the device; the operating instructions to ensure compliance with SAR and/or RF field strength limits; information on the installation and operation of accessories to ensure compliance with SAR and/or RF field strength limits; and contact information where the user can obtain Canadian information on RF exposure and compliance. Other related information may also be included.</p>

4.3. MPE Calculation method

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{EIRP}{4\pi R^2} = \frac{P * G}{4\pi R^2}$$

$$G_{NUMERIC} = \frac{S * 4\pi R^2}{P}$$

Where: S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the centre of radiation of the antenna

4.4. Evaluation Method

4.4.1. Standalone

Valid for WLAN 2.4GHz, Bluetooth and Bluetooth LE:

- The peak power was checked on 3 frequencies (lowest/middle/highest) within the 2.4GHz band (see Annex 1 to 3)
- No duty-cycle correction factor is applicable

Valid for WLAN 5GHz Mode:

- The peak power was checked on 4 frequencies (U-NII-1/2A/2C/3) within the 5GHz band (see Annex 4).
- Duty-cycle correction factor is applicable (see Annex 4)

Please find in the following tables the calculations based on Annex 1 to 4.

4.5. Results for fixed and mobile

4.5.1. Results for FCC Standard

4.5.1.1. MPE results for 2.4GHz

Operation Mode	Frequency on channel (MHz)	Declared maximum conducted output power (dBm)	Max. positive tolerance according manufacturer (dB)	Antenna Gain (dBi)	Declared maximum ERP (Measured+ Tune-up) (dBm)	Duty cycle %	Declared Maximum conducted output power (W)	Equivalent conducted output power (output power x duty cycle) (mW)	MPE Limit accord. Table 1 (mW/cm ²)	MPE-Value (mW/cm ²)	Margin to Limit:	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
W-LAN 2.4GHz	2412,0	16,0	2,0	5,2	23,2	100%	0,2089	208,9	1,0000	0,0416	0,9584	0,041565	0,0415652
	2437,0	16,0	2,0	4,8	22,8		0,1905	190,5	1,0000	0,0379	0,9621	0,037908	
	2462,0	16,0	2,0	3,1	21,1		0,1288	128,8	1,0000	0,0256	0,9744	0,025629	
Bluetooth 2.4GHz	2402,0	0,0	2,0	3,7	5,7	100%	0,0037	3,7	1,0000	0,0007	0,9993	0,000739146	0,0008684
	2441,0	0,0	2,0	4,4	6,4		0,0044	4,4	1,0000	0,0009	0,9991	0,000868421	
	2480,0	0,0	2,0	3,1	5,1		0,0032	3,2	1,0000	0,0006	0,9994	0,000643769	
Bluetooth LE 2.4GHz	2402,0	-3,5	2,0	3,7	2,2	100%	0,0017	1,7	1,0000	0,0003	0,9997	0,000330164	0,0003879
	2441,0	-3,5	2,0	4,4	2,9		0,0019	1,9	1,0000	0,0004	0,9996	0,000387909	
	2480,0	-3,5	2,0	3,1	1,6		0,0014	1,4	1,0000	0,0003	0,9997	0,000287561	

Maximum calculated MPE value:		
Lowest MPE-Limit:	1,0000	[mW/cm ²]
Highest MPE value:	0,0416	[mW/cm ²]
Lowest Margin to limit:	0,9584	[mW/cm ²]

4.5.1.2. MPE results for 5GHz

Operation Mode	Frequency on channel (MHz)	Measured maximum conducted output power (dBm)	Max. positive tolerance according manufacturer's tune-up info (dB)	Declared Antenna Gain (dBi)	ERP (dBm)	Duty cycle (%)	Maximum ERP (W)	Equivalent ERP (ERP x duty cycle) (mW)	MPE-Value (mW/cm ²)	MPE-Value (mW/cm ²)	Margin (mW/cm ²)	Fraction for Co-location calculations	Maximum Fraction Value within Frequency band
WLAN 802.11 a	U-NII-1 (5150 MHz to 5250 MHz)	2,50	2,00	7,40	11,90	43%	0,015	35,94	1,0000	0,00715	0,9929	0,0071	0,0071
	U-NII-2A (5250 MHz to 5350 MHz)	2,50	2,00	6,90	11,40	43%	0,014	5,95	1,0000	0,00118	0,9988	0,0012	
	U-NII-2C (5470 MHz to 5725 MHz)	2,50	2,00	6,30	10,80	43%	0,012	5,18	1,0000	0,00103	0,9990	0,0010	
	U-NII-3 (5725 MHz to 5850 MHz)	2,50	2,00	4,30	8,80	43%	0,008	3,27	1,0000	0,00065	0,9993	0,0007	
WLAN 802.11 n/ac (20MHz BW)	U-NII-1 (5150 MHz to 5250 MHz)	2,30	2,00	7,40	11,70	39%	0,015	5,69	1,0000	0,00113	0,9989	0,0011	0,0011
	U-NII-2A (5250 MHz to 5350 MHz)	2,30	2,00	6,90	11,20	39%	0,013	5,08	1,0000	0,00101	0,9990	0,0010	
	U-NII-2C (5470 MHz to 5725 MHz)	2,30	2,00	6,30	10,60	39%	0,011	4,42	1,0000	0,00088	0,9991	0,0009	
	U-NII-3 (5725 MHz to 5850 MHz)	2,30	2,00	4,30	8,60	39%	0,007	2,79	1,0000	0,00055	0,9994	0,0006	
WLAN 802.11 n/ac (40MHz BW)	U-NII-1 (5150 MHz to 5250 MHz)	2,40	2,00	7,40	11,80	19%	0,015	2,88	1,0000	0,00057	0,9994	0,0006	0,0006
	U-NII-2A (5250 MHz to 5350 MHz)	2,40	2,00	6,90	11,30	19%	0,013	2,56	1,0000	0,00051	0,9995	0,0005	
	U-NII-2C (5470 MHz to 5725 MHz)	2,40	2,00	6,30	10,70	19%	0,012	2,23	1,0000	0,00044	0,9996	0,0004	
	U-NII-3 (5725 MHz to 5850 MHz)	2,40	2,00	4,30	8,70	19%	0,007	1,41	1,0000	0,00028	0,9997	0,0003	
WLAN 802.11ac (80MHz BW)	U-NII-1 (5150 MHz to 5250 MHz)	-1,50	2,50	7,40	8,40	9%	0,007	0,64	1,0000	0,00013	0,9999	0,0001	0,0001
	U-NII-2A (5250 MHz to 5350 MHz)	-1,50	2,50	6,90	7,90	9%	0,006	0,57	1,0000	0,00011	0,9999	0,0001	
	U-NII-2C (5470 MHz to 5725 MHz)	-1,50	2,50	6,30	7,30	9%	0,005	0,49	1,0000	0,00010	0,9999	0,0001	
	U-NII-3 (5725 MHz to 5850 MHz)	-1,50	2,50	4,30	5,30	9%	0,003	0,31	1,0000	0,00006	0,9999	0,0001	

Maximum calculated MPE value:		
5GHz		
Lowest MPE-Limit:	1,0000	[W/m ²]
Highest MPE-value:	0,0071	[W/m ²]
Margin to limit	0,9929	[W/m ²]

4.5.1.3. Co-location assessment (scenario)

Following table shows calculations with W-LAN and Bluetooth technology active in the device.

Special limitations such as interactions between the transmitting RF-antennas due small physical distance between them, are not sufficient modeled by the far field formula for power density. For such cases a non-linear program electromagnetic software or MPE measurements should be performed.

		W-LAN 2.4GHz	WLAN 802.11 a	WLAN 802.11 n/ ac (20MHZ BW)	WLAN 802.11 n/ ac (40MHZ BW)	WLAN 802.11ac (80MHZ BW)
	Ratio of MPE- Value/Limit	0,041565226	0,007149125	0,001132898	0,000572116	0,000126625
Bluetooth 2.4GHz	0,000868421	0,042433647	0,008017545	0,002001319	0,001440536	0,000995045
Bluetooth LE 2.4GHz	0,000387909	0,041953135	0,007537034	0,001520807	0,000960025	0,000514534
Maximum-Value		0,042433647				

4.5.2. Results for RSS Standard
4.5.2.1. MPE results for 2.4GHz

Operation Mode	Frequency on channel (MHz)	Declared measured conducted output power (dBm)	Max. positive tolerance according manufacturer's tune-up info (dB)	Antenna Gain (dBi)	Calculated maximum ERP (declared+ Tune-up+ antenna Gain+ path loss) (dBm)	Duty-Cycle	Maximum ERP (W)	Equivalent ERP (ERP x duty cycle) (W)	MPE Limit accord. Table 4 (W/m ^2)	MPE-Value (W/m ^2)	Margin (W/m ^2)	Fraction for Co-location calculations	Maximum Fraction Value within Frequency band
W-LAN 2.4GHz	2402,0	16,7	2,0	5,2	23,9	100%	0,2455	0,2455	5,3508	0,4883	4,8625	0,09127	0,09127
	2442,0	16,5	2,0	4,8	23,3	100%	0,2138	0,2138	5,4115	0,4253	4,9862	0,07860	
	2480,0	16,5	2,0	3,1	21,6	100%	0,1445	0,1445	5,4689	0,2876	5,1814	0,05258	
Bluetooth 2.4GHz	2402,0	0,0	2,0	3,7	5,7	100%	0,0037	0,0037	5,3508	0,0074	5,3434	0,00138	0,00150
	2442,0	-0,3	2,0	4,4	6,1	100%	0,0041	0,0041	5,4115	0,0081	5,4034	0,00150	
	2480,0	0,1	2,0	3,1	5,2	100%	0,0033	0,0033	5,4689	0,0066	5,4624	0,00120	
Bluetooth LE 2.4GHz	2402,0	-4,5	2,0	3,7	1,2	100%	0,0013	0,0013	5,3508	0,0026	5,3482	0,00049	0,00053
	2442,0	-4,8	2,0	4,4	1,6	100%	0,0014	0,0014	5,4115	0,0029	5,4087	0,00053	
	2480,0	-4,5	2,0	3,1	0,6	100%	0,0011	0,0011	5,4689	0,0023	5,4667	0,00042	

Maximum calculated MPE value:		
2.4GHz Band		
Lowest MPE-Limit:	5,3508	[W/m ^2]
Highest MPE value:	0,4883	[W/m ^2]
Lowest margin to limit	4,8625	[W/m ^2]

4.5.2.2. MPE results for 5GHz

Operation Mode	Frequency on channel (MHz)	Measured maximum conducted output power (dBm)	Max. positive tolerance according manufacturer 's tune-up info (dB)	Declared Antenna Gain (dBi)	ERP (dBm)	Maximum ERP (W)	Equivalent ERP (ERP x duty cycle) (m W)	MPE Limit accord. Table 4 (W/m ^2)	MPE-Value (W/m ^2)	Margin (W/m ^2)	Fraction for Co-location calculations	Maximum Fraction Value within Frequency band
WLAN 802.11 a	5150,0	2,50	2,00	7,40	11,90	0,015	15,49	9,0112	0,0308	8,9804	0,0034	0,0034
	5250,0	2,50	2,00	6,90	9,40	0,009	8,71	9,1305	0,0173	9,1131	0,0019	
	5597,5	2,50	2,00	6,30	8,80	0,008	7,59	9,5393	0,0151	9,5242	0,0016	
	5725,0	2,50	2,00	4,30	6,80	0,005	4,79	9,6872	0,0095	9,6777	0,0010	
WLAN 802.11 n/ ac (20MHz BW)	5150,0	2,30	2,00	7,40	9,70	0,009	9,33	9,0112	0,0186	8,9927	0,0021	0,0021
	5250,0	2,30	2,00	6,90	9,20	0,008	8,32	9,1305	0,0165	9,1139	0,0018	
	5597,5	2,30	2,00	6,30	8,60	0,007	7,24	9,5393	0,0144	9,5248	0,0015	
WLAN 802.11 n/ ac (40MHz BW)	5150,0	2,40	2,00	7,40	9,80	0,010	9,55	9,0112	0,0190	8,9922	0,0021	0,0021
	5250,0	2,40	2,00	6,90	9,30	0,009	8,51	9,1305	0,0169	9,1135	0,0019	
	5597,5	2,40	2,00	6,30	8,70	0,007	7,41	9,5393	0,0147	9,5245	0,0015	
WLAN 802.11ac (80MHz BW)	5200,0	-1,50	2,00	7,40	5,90	0,004	3,89	9,0709	0,0077	9,0632	0,0009	0,0009
	5300,0	-1,50	2,00	6,90	5,40	0,003	3,47	9,1898	0,0069	9,1829	0,0008	
	5470,0	-1,50	2,00	6,30	4,80	0,003	3,02	9,3902	0,0060	9,3842	0,0006	
	5787,5	-1,50	2,00	4,30	2,80	0,002	1,91	9,7594	0,0038	9,7556	0,0004	

Maximum calculated MPE value:		
5GHz		
Lowest MPE-Limit:	9,0112	[W/m ^2]
Highest MPE value:	0,0308	[W/m ^2]
Margin to limit	8,9804	[W/m ^2]

4.5.2.3. Co-location assessment (scenario)

Following table shows calculations with W-LAN and Bluetooth technology active in the device.

Special limitations such as interactions between the transmitting RF-antennas due small physical distance between them, are not sufficient modeled by the far field formula for power density. For such cases a non-linear program electromagnetic software or MPE measurements should be performed.

		W-LAN 2.4GHz	WLAN 802.11 a	WLAN 802.11 n/ ac (20MHZ BW)	WLAN 802.11 n/ ac (40MHZ BW)	WLAN 802.11ac (80MHZ BW)
Ratio of MPE- Value/Limit		0,091266429	0,003419366	0,002060372	0,002108364	0,000853253
Bluetooth 2.4GHz	0,001497646	0,092764075	0,004917012	0,003558018	0,00360601	0,0023509
Bluetooth LE 2.4GHz	0,000531385	0,091797814	0,003950751	0,002591757	0,002639749	0,001384638
Maximum-Value		0,094685795				

4.6. Conclusion

The measurement results comply with the FCC Limit per 47 CFR 2.1091 for the uncontrolled RF Exposure of mobile device.

The measurement results comply with the ISED Limit per RSS-102, Issue 5 for the uncontrolled RF Exposure of mobile device.

4.7. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%					Remarks
Conducted emissions (U _{CISPR})	CISPR 16-2-1	9 kHz - 150 kHz	4.0 dB					-
		150 kHz - 30 MHz	3.6 dB					
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz	4.2 dB					E-Field
		1 GHz - 18 GHz	5.1 dB					
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-					-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB					Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	-
		9 kHz - 12.75 GHz	N/A	0.60	--	--	--	
		12.75 - 26.5GHz	N/A	0.82	--	--	--	
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	--	--	--	N/A - not applicable
		2.8 GHz - 12.75GHz	1.48	N/A	--	--	--	
		12.75 GHz - 18GHz	1.81	N/A	--	--	--	
		18 GHz - 26.5GHz	1.83	N/A	--	--	--	
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)					Frequency error
			1.0 dB					Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)					Frequency error
			See above: 0.70 dB					Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm					-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB					Magnetic field E-field Substitution
		30 MHz - 1 GHz	4.2 dB					
		1 GHz - 20 GHz	3.17 dB					

Table: measurement uncertainties, valid for conducted/radiated measurements

5. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

6. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkkS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	MRA US-EU 0003	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurment.	FCC, Federal Communications Commission Laboratory Division, USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
487 550 348 348	R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurment.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan


OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room

7. Photographs of the EUT's

Photograph 1: EUT A Front side



Photograph 2: EUT A Top side

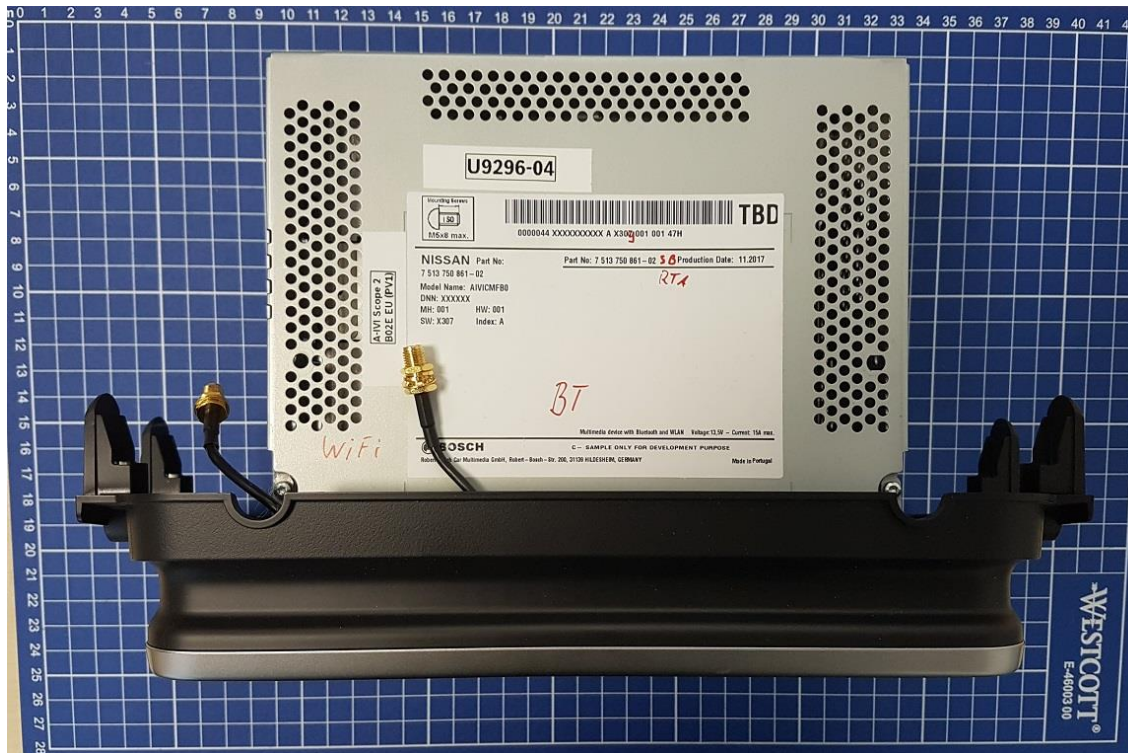

8. Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2018-03-22