

Test report nr. 212111FCC15

Measurements performed in accordance with:

**FCC Rules: code of Federal Regulations (CFR) no. 47
PART 15 – RADIO FREQUENCY DEVICES**

Product: Transceiver

Tested model: *TempoTel 2*

FCC ID YBU2826X09X

Applicant: elero gmbh Antriebstechnik
Linsenhofer Str. 59-63
D-72660 Beuren

Manufacturer: elero gmbh Antriebstechnik
Linsenhofer Str. 59-63
D-72660 Beuren

Trademark: elero


Testing Laboratory Nice S.p.A.
Via Pezza Alta, 13
I-31046 Rustignè di Oderzo (TV)


Registration number: 771316

Date of receipt sample: 10th March 2015

Testing date: 16th March – 07th April 2015
14th September – 15th September 2015

Issue date: *14 January 2016*

Tested by: L. Pastres 

Checked by: E. Campion 

Notice: The result of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself.
This report shall not be reproduced partially or in its entirety without written approval of Nice S.p.A.

Contents

Contents	2
1 General Description of Equipment under Test.....	3
1.1 Applicant	3
1.2 Manufacturer.....	3
1.3 Equipment classification.....	3
1.4 Basic Description of equipment under test.....	4
1.5 Feature of equipment under test	5
2 Test configuration of equipment under test.....	6
2.1 Environmental conditions	6
2.2 Description of support equipment.....	6
2.3 Interface identification and connection diagram of test system	7
3 Operation of equipment under test	8
3.1 Operating test conditions	8
4 Tests identification and result	9
4.1 Methods of measurement	9
4.2 Frequency range investigated	9
5 Tests	10
5.1 Antenna requirements.....	10
5.2 Conduced emission.....	11
5.3 Radiated emission.....	12
5.4 Timing of the transmitter	19
5.5 Transmit behaviour after releasing the TX-button	23
5.6 Radiated output power	25
5.8 Compliance with the limit of FCC	31
5.9 Spurious emission - radiated.....	32
5.10 Occupied bandwidth	34
6 Measurement and Test Equipment instrumentation.....	37
7 Photographic Documentation.....	41
8.1 EUT Identification.....	41
8.2 Test Set-up	44
Annex 1	47
Annex 2.....	48

1

General Description of Equipment under Test**1.1 Applicant**

Name: elero gmbh Antriebstechnik

Address: Linsenhofer Str. 65
D-72660 Beuren

Country: GERMANY

1.2 Manufacturer

Name: elero gmbh Antriebstechnik

Address: Linsenhofer Str. 65
D-72660 Beuren

Country: GERMANY

1.3 Equipment classification

According to definition 15.3 (o) is a intentional Radiator operating within the **Frequency: 915.3MHz and 918.3MHz.**

so it shall fulfil provisions of 47CFR Part 15 Subpart C – international radiators – and Section 15.209.

According to definition 15.3 (z) is a unintentional Radiator:

So it shall fulfil provisions of 47CFR Part 15 Subpart B – Unintentional radiator and section 15.231.

1.4 Basic Description of equipment under test

Parameters	Value
Type of equipment:	Transceiver for screen applications
Model:	<i>TempoTel 2</i>
FCC ID:	YBU2826X09X
Trade Name:	Elero GmbH Antriebstechnik
Data cable:	-
Telecom cable:	-
Power supply type:	3Vdc (2 x 1.5 battery type AA)
AC power input cable:	-
DC power input cable:	-

Model	Description
TEMPOTEL	The transceiver has a unidirectional transmission at 915.3MHz and bidirectional transmissions at 918.3MHz

1.5 Feature of equipment under test

Parameters	Value
Power specification	3Vdc (2 x 1.5V battery type AA)
Operating frequency:	915.3MHz (unidirectional), 918.3MHz (bidirectional)
Maximum RF output power:	72.81dB μ V/m (average), 98.91dB μ V/m (peak) (918.3MHz) 73.06dB μ V/m (average), 99.09dB μ V/m (peak) (915.3MHz)
Occupied Bandwidth (99% BW):	123kHz (918.3MHz) 122kHz (915.3MHz)
Emission Designator (ITU):	123KF1D (918.3MHz) 122KF1D (915.3MHz)
Modulation:	FSK (915.3MHz) GFSK (918.3MHz)
Channel spacing:	-
Antenna:	Integral
Rx Sensitivity:	-
Main SW identification:	-
Main HW board identification:	-
Peripherals included (for system application):	-
Interfaces:	-
Integrated interfaces	-
AC adapter:	-

2


Test configuration of equipment under test**2.1 Environmental conditions**

Test conditions	Measured
Ambient temperature:	20 ÷ 25°C
Relative humidity:	50 ÷ 60%
Atmospheric pressure:	900 ÷ 1010mb

2.2 Description of support equipment

Equipment	Manufacturer	Model
-	-	-

2.3 Interface identification and connection diagram of test system



Enclosure

#	Interface	Description	Maximum length	Ref. Document
1	Enclosure	Plastic	-	-
2	AC mains power input	Not present	-	-
3	DC power port	Battery	-	-
4	Signal / control port	Nor present	-	-
5	Antenna port	Not present	-	-
6	Telecommunication	Not present	-	-

3

Operation of equipment under test**3.1 Operating test conditions**

#	Description
1	Receiving mode
2	Transmission mode

4

Tests identification and result

CFR47 Part 15 Section	Title	Operating condition	Result
15.203 15.247 (b)(4)(i)	Antenna requirements	-	PASS
15.207 (a)	Conducted emission	-	Not applicable
15.209 (a) (f)	Radiated emission	#1, 2	PASS
15.35 (c)	Timing of the transmitter	#2	PASS
15.231 (a)	Transmit behaviour after releasing the TX-button	-	PASS
15.231 (b)	Radiated output power	#2	PASS
15.35 (c)	Typical pulse train of a signal	#2	PASS
15.231 (c)	Compliance with the limit of FCC	#2	PASS
15.231 (a)	Spurious emission - radiated	#2	PASS
15.231 (a)	Occupied bandwidth	#2	PASS

4.1 Methods of measurement

All compliance measurements has been carried out using the procedures described in the standard ANSI C63.4-2014 (excluding sub-par. 4.1.5.2, 5.7.9 and 14), C63.10-2013 and Section 15.31 of CFR47 Part 15 – Subpart A (General).

4.2 Frequency range investigated

- a) Conducted emission tests: from 9kHz to 30MHz.
- b) Radiated emission tests: from 150kHz to tenth harmonic of fundamental.

5 Tests

5.1 Antenna requirements

Specify:

Base standard:	47CFR Part 15 Sections 15.203, 15.204
----------------	---------------------------------------

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirements does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219 or 15.221. Further, this requirements does not apply to intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Antenna Specification:

N° of authorized antenna type:	-
Antenna type:	Integral
Maximum total gain:	0dB
External power amplifiers:	-

Antenna description:

No.	Manufacturer	Model Type
-	-	-

Comments:

the antenna is integral to the product

5.2 Conduced emission

Specify:

Base standard:	47CFR Part 15 Section 15.207
----------------	------------------------------

- 1) The EUT was placed on wooden table size 80cm, raised 80cm in which is located 40cm away from the vertical wall shielded room.
- 2) Each EUT powered input cord was individually connected through a 50Ω/50μH LISN to the input power source.
- 3) Exploratory measurements were made identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was than performed over the frequency range of 0,15MHz to 30MHz.
- 5) The measurements were made with the detector set to PEAK and AVERAGE amplitude within a bandwidth of 10kHz during the measurements.
- 6) The measurements with Quasi-Peak detector are performed only for frequencies for which the Peak values are \geq (Q.P. limit - 6dB)

Test Requirements:

Test Setup:	ANSI C63.4
Limit of mains terminal disturbance voltage:	15.207 (a)
Frequency range:	9kHz—150kHz 150kHz—30MHz
IF Bandwidth:	200Hz 9kHz
EMC class	B

Limits⁽¹⁾:

Frequency [MHz]	Quasi-Peak (dBμV)	Average (dBμV)
0,15—0,5	66—56	56—46
0,5—5	56	46
5—30	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

Test Data:

Port under test	Operating condition	Result

Comments:

5.3 Radiated emission

Specify:

Base standard:	47CFR Part 15 Section 15.209
----------------	------------------------------

- 1) The EUT was placed on turntable which is 0,8m above the ground plane.
- 2) The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level.
- 3) The EUT is positioned 3m away from the receiving antenna which varied from 1 to 4m to find the highest emission.
- 4) The measurements were made with the detector set to PEAK and AVERAGE amplitude within a bandwidth of 100kHz below 1000MHz and 1MHz above 1000MHz.
- 5) The receiving antenna was positioned in both horizontal and vertical polarization.
- 6) The measurements with Quasi-Peak detector, below 1000MHz are performed only for frequencies for which the Peak values are \geq (Q.P. limit – 6dB).

Test Requirements:

Test Setup:	ANSI C63.4
Test facility:	Anechoic chamber
Test distance:	3m
Limits for radiated disturbances:	15.209 (a)
Frequency range:	150kHz to 1GHz
IF bandwidth (below 30MHz):	9kHz
IF bandwidth (below 1000MHz):	120kHz
IF bandwidth (above 1000MHz):	1MHz
EMC class:	B
Uncertainty:	2.3dB

Limits ⁽¹⁾:

Frequency [MHz]	Field Strength (μ V/m)	Measurement distance (m)
0,0009 – 0,490	2400/F(kHz)	300
0,490 – 1,750	24000/F(kHz)	30
1,750 - 30	30	30
30 - 88	100	30
88 -216	150	3
216 - 960	200	3
above 960	500	3

Note: ⁽¹⁾ to convert the measuring distance from 3m to 300m and 30m to 300m a correction factor from 40dB/decade was used


Test Data.:

Port under test	Operating condition	Result
Enclosure	#1, #2	Complies


Comments:

The results represent the worst case of emissions between three polarizations verified (X, Y and Z). The table was rotate of 360° and antenna receiving moved from 1m to 4m to find the maximum emission. **For frequency 915.3MHz the result is same.**


Transmission (30MHz to 1GHz)

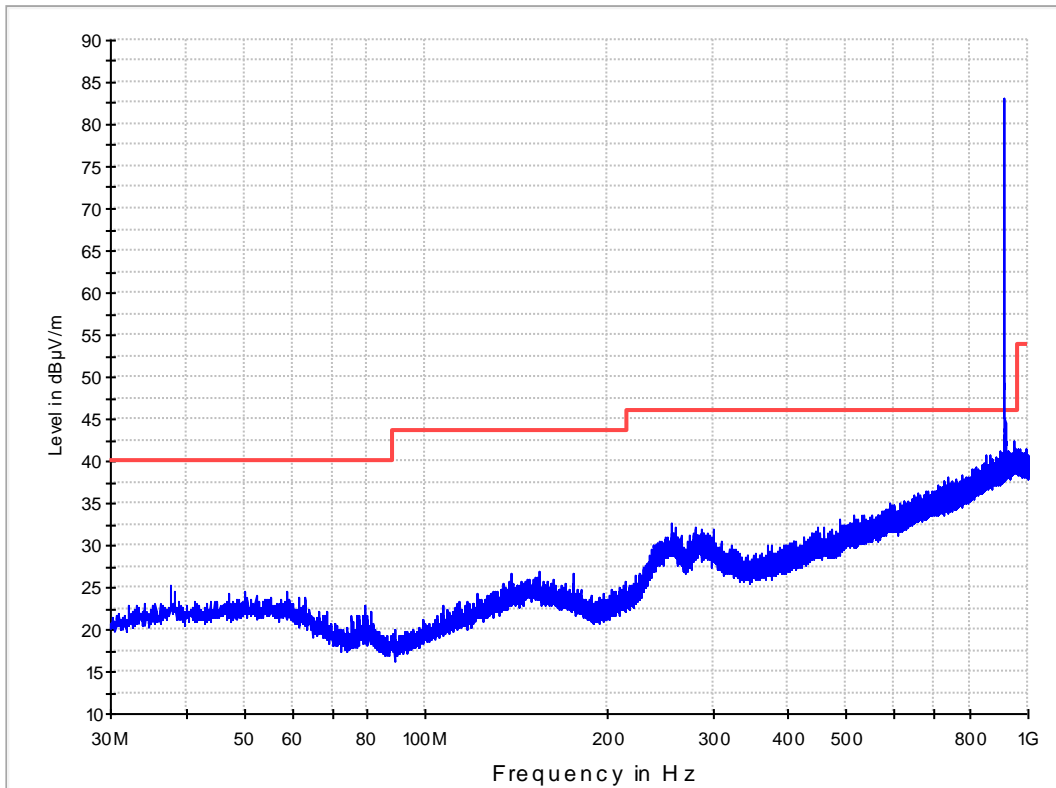

Receiving (30MHz to 1GHz)

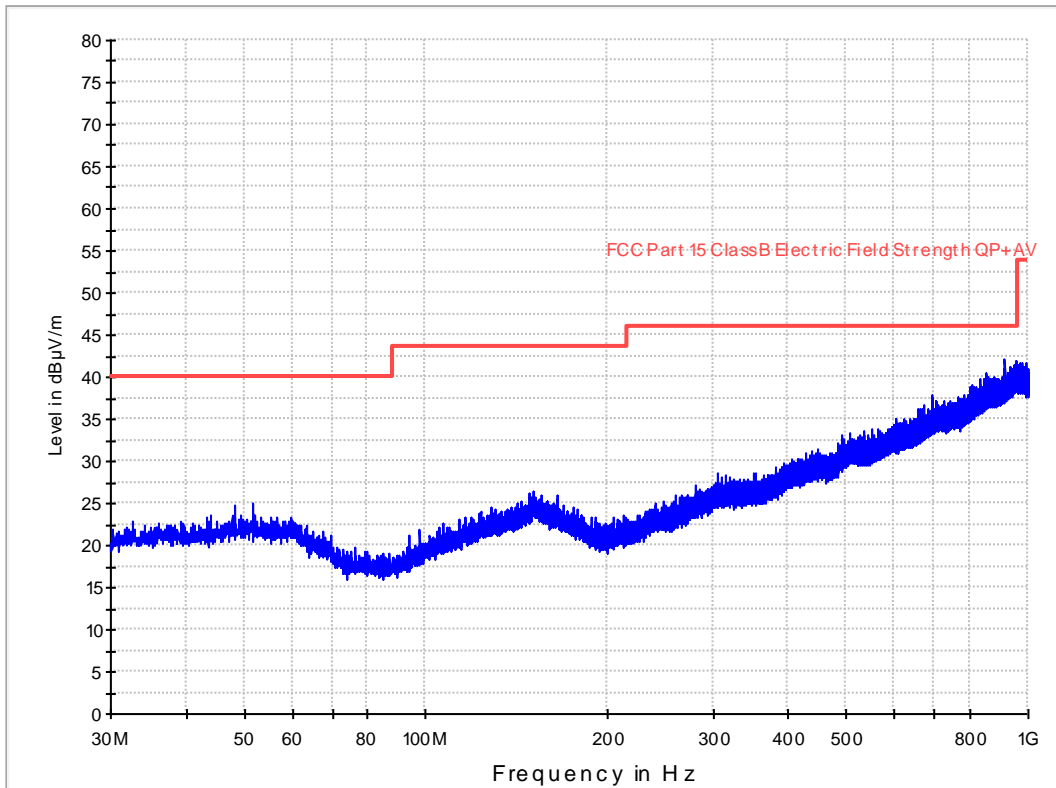


Transmission (1GHz-6GHz)

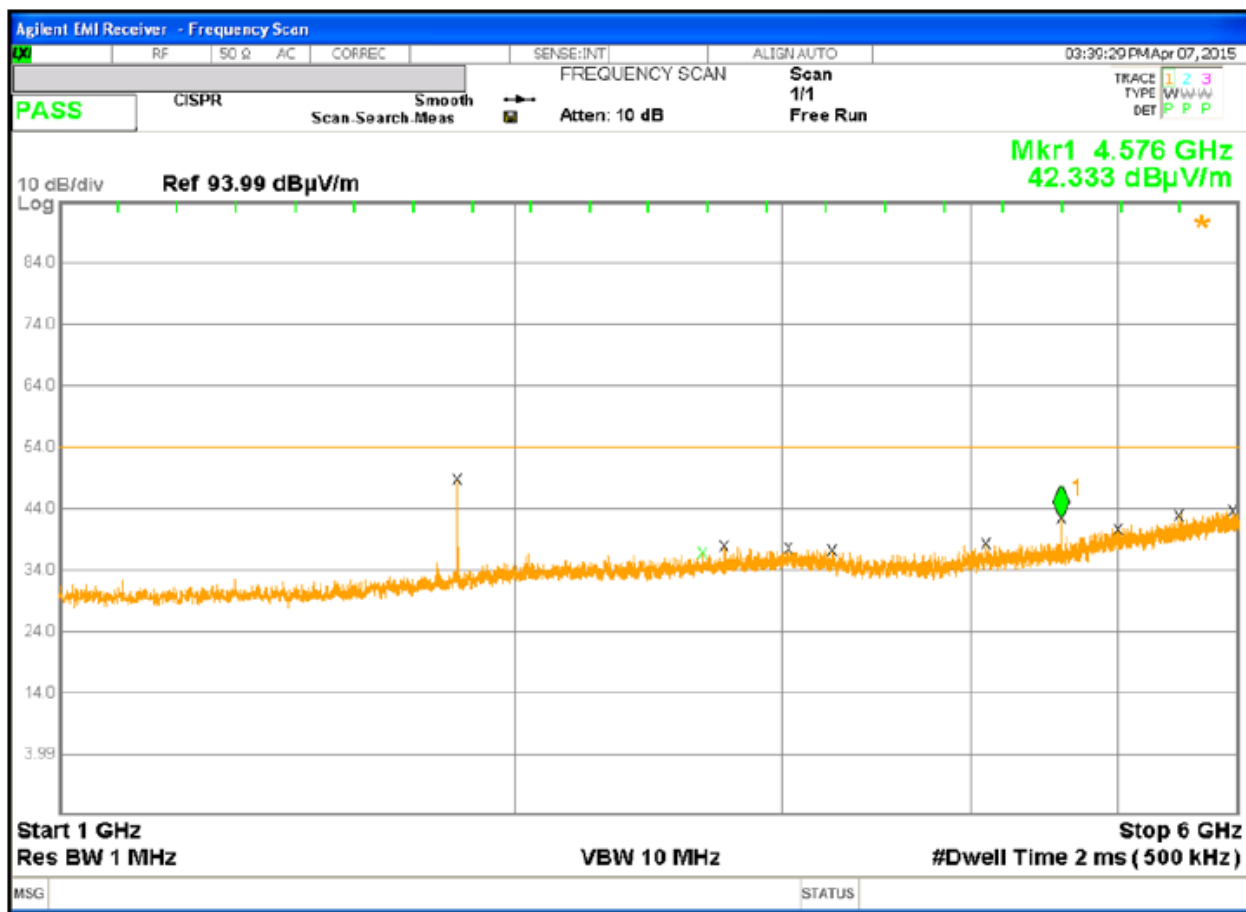

Signal List

Sig	Trc	Freq	PEAK Amptd	QPD Amptd	EAVG Amptd	PEAK vs LL3	QPD vs LL3	EAVG vs LL2	RBW	RBW Type
1	1	1.8305 GHz	49.210 dBuV/m	48.478 dBuV/m	47.745 dBuV/m	-4.769 dB	-5.501 dB	--	1.00 MHz	CISPR
2	1	2.6550 GHz	37.181 dBuV/m	31.276 dBuV/m	23.353 dBuV/m	-16.798 dB	-22.703 dB	--	1.00 MHz	CISPR
3	1	2.7456 GHz	38.903 dBuV/m	35.478 dBuV/m	30.205 dBuV/m	-15.076 dB	-18.501 dB	--	1.00 MHz	CISPR
4	1	3.0235 GHz	37.686 dBuV/m	32.837 dBuV/m	24.940 dBuV/m	-16.294 dB	-21.142 dB	--	1.00 MHz	CISPR
5	1	3.2330 GHz	36.658 dBuV/m	32.025 dBuV/m	24.110 dBuV/m	-17.321 dB	-21.954 dB	--	1.00 MHz	CISPR
6	1	4.0825 GHz	37.718 dBuV/m	32.452 dBuV/m	24.636 dBuV/m	-16.261 dB	-21.527 dB	--	1.00 MHz	CISPR
7	1	4.5765 GHz	42.308 dBuV/m	39.497 dBuV/m	35.834 dBuV/m	-11.672 dB	-14.483 dB	--	1.00 MHz	CISPR
8	1	4.9950 GHz	40.240 dBuV/m	35.262 dBuV/m	27.337 dBuV/m	-13.740 dB	-18.717 dB	--	1.00 MHz	CISPR
9	1	5.4685 GHz	41.298 dBuV/m	36.126 dBuV/m	28.248 dBuV/m	-12.682 dB	-17.854 dB	--	1.00 MHz	CISPR
10	1	5.9335 GHz	43.035 dBuV/m	37.892 dBuV/m	30.021 dBuV/m	-10.944 dB	-16.087 dB	--	1.00 MHz	CISPR

Receiving (1GHz to 6GHz)

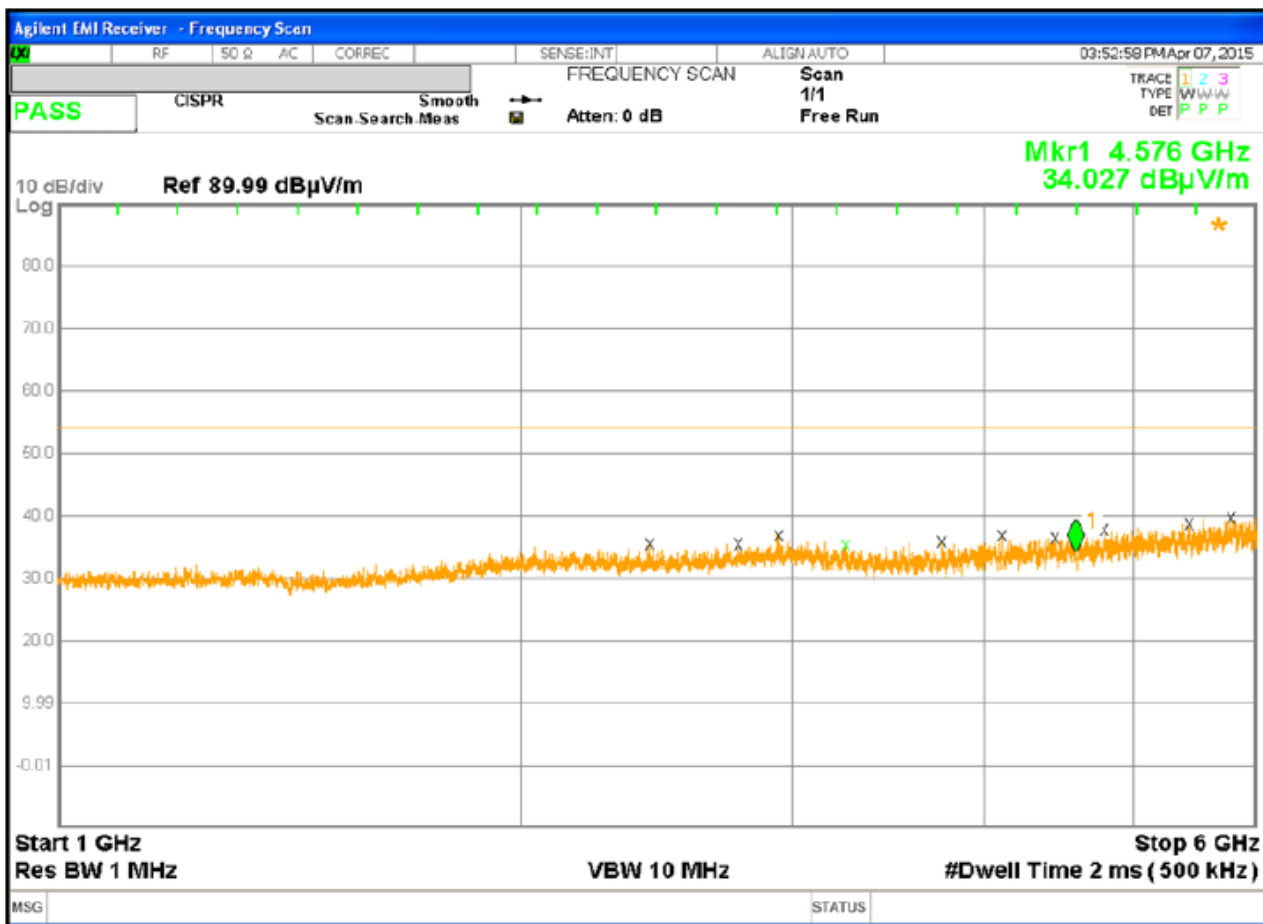

Signal List

Sig	Trc	Freq	PEAK Amptd	QPD Amptd	EAVG Amptd	PEAK vs LL3	QPD vs LL3	EAVG vs LL2	RBW	RBW Type
1	1	2.4200 GHz	36.392 dBuV/m	31.079 dBuV/m	23.215 dBuV/m	-17.587 dB	-22.900 dB	--	1.00 MHz	CISPR
2	1	2.7615 GHz	37.308 dBuV/m	32.089 dBuV/m	24.213 dBuV/m	-16.672 dB	-21.890 dB	--	1.00 MHz	CISPR
3	1	2.9340 GHz	37.306 dBuV/m	32.449 dBuV/m	24.555 dBuV/m	-16.673 dB	-21.531 dB	--	1.00 MHz	CISPR
4	1	3.2420 GHz	37.257 dBuV/m	32.168 dBuV/m	24.272 dBuV/m	-16.723 dB	-21.811 dB	--	1.00 MHz	CISPR
5	1	3.7475 GHz	36.513 dBuV/m	31.721 dBuV/m	23.853 dBuV/m	-17.466 dB	-22.258 dB	--	1.00 MHz	CISPR
6	1	4.1000 GHz	37.652 dBuV/m	32.752 dBuV/m	24.904 dBuV/m	-16.328 dB	-21.227 dB	--	1.00 MHz	CISPR
7	1	4.4360 GHz	38.311 dBuV/m	33.528 dBuV/m	25.682 dBuV/m	-15.669 dB	-20.451 dB	--	1.00 MHz	CISPR
8	1	4.7745 GHz	38.662 dBuV/m	33.780 dBuV/m	25.863 dBuV/m	-15.317 dB	-20.199 dB	--	1.00 MHz	CISPR
9	1	5.4265 GHz	41.185 dBuV/m	36.080 dBuV/m	28.197 dBuV/m	-12.795 dB	-17.900 dB	--	1.00 MHz	CISPR
10	1	5.7740 GHz	41.977 dBuV/m	37.289 dBuV/m	29.389 dBuV/m	-12.002 dB	-16.690 dB	--	1.00 MHz	CISPR

5.4 Timing of the transmitter

Specify:

Base standard:	CFR47 Part 15 Section 15.35 (c)
----------------	---------------------------------

Unless otherwise specified, e.g. Section 15.225 (b), when the radiated emission limits are expressed in term of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0,1 seconds. As an alternative (provided the transmitter operates for longer than 0,1 seconds) or in cases where the pulse exceeds 0,1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0,1 second interval strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subjected to notification or verification.

Test requirements:

Test Setup:	CFR47 Part 15 Section 15.35 (c)
RBW:	1MHz
VBW:	3MHz
Uncertainty:	0.2μs



Test Data:

Frequency:	918.3MHz
Frame period:	100ms
Pause:	-
Pulse train length:	-
ON Time:	4.95ms
OFF Time:	376ms

Comments:

Every 100ms is present a single impulse with duration of 4.95ms.
 The duty-cycle is: $4.95/100 = 0.0495$, therefore the correction is $20 \times \log(0.0495) = -26.1\text{dB}$

FCC test report

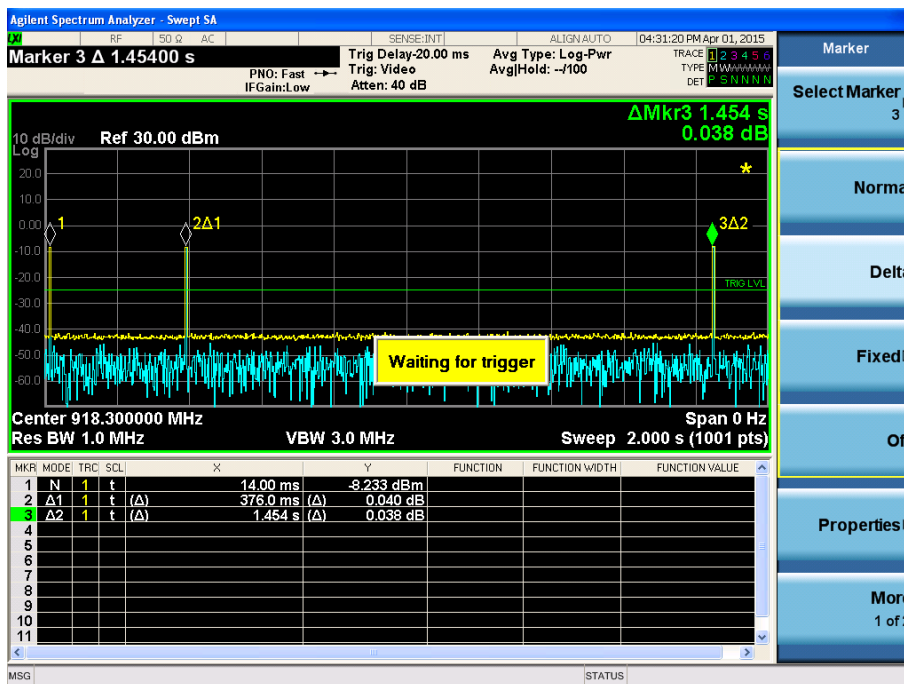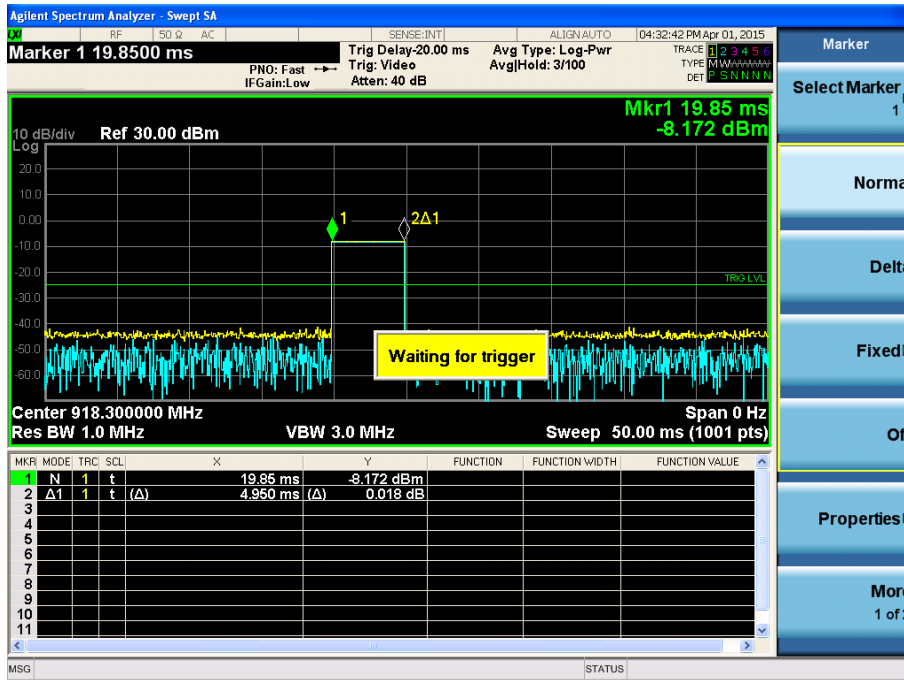

Specify:

Base standard: CFR47 Part 15 Section 15.35 (c)

Unless otherwise specified, e.g. Section 15.225 (b), when the radiated emission limits are expressed in term of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0,1 seconds. As an alternative (provided the transmitter operates for longer than 0,1 seconds) or in cases where the pulse exceeds 0,1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0,1 second interval strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subjected to notification or verification.

Test requirements:


Test Setup:	CFR47 Part 15 Section 15.35 (c)
RBW:	1MHz
VBW:	3MHz
Uncertainty:	0.2μs

Test Data:


Frequency:	915.3MHz
Frame period:	100ms
Pause:	-
Pulse train length:	-
ON Time:	4.990ms
OFF Time:	> 100ms

Comments:

Every 100ms is present a single impulse with duration of 4.99ms.
The duty-cycle is: $4.99 / 100 = 0.0499$, therefore the correction is $20 \times \log(0.0499) = -26.03\text{dB}$

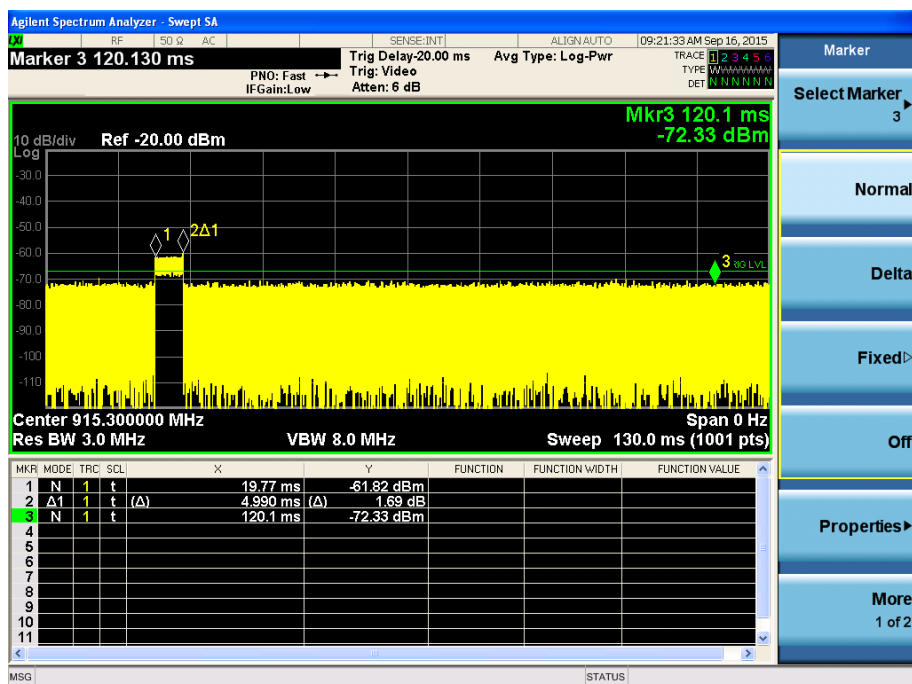

FCC test report

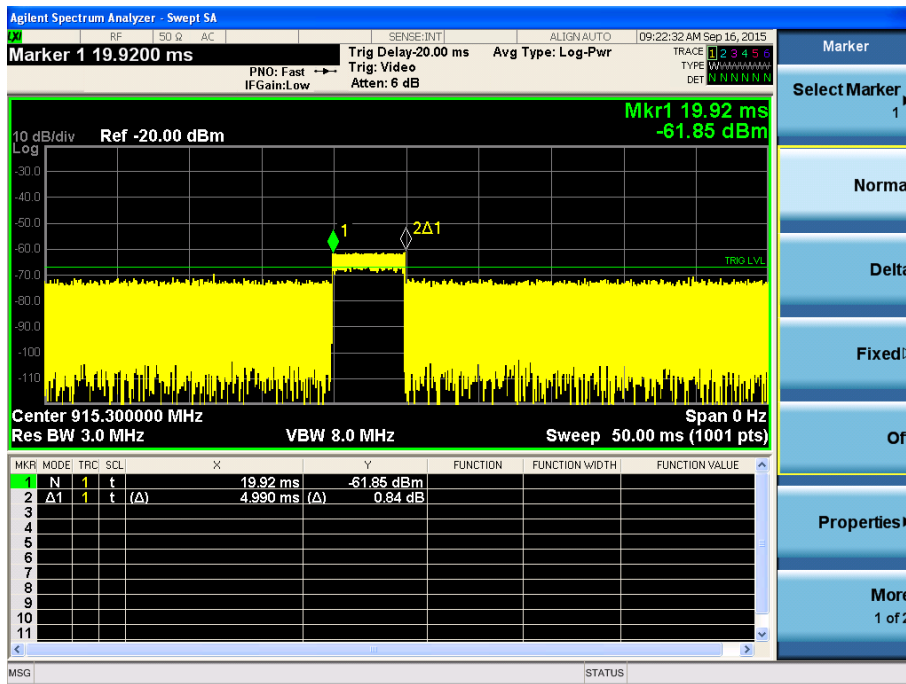

5.5 Transmit behaviour after releasing the TX-button

Specify:

Base standard: 47CFR Part 15 Section 15.231 (a)

Test requirements:

Test Setup: 47CFR Part 15 Section 15.35 (c)

RBW: 1MHz

VBW: 3MHz

Uncertainty: 0.2 μ s

Test data:


T1: 0 μ s

T2: 31.3ms


T2-T1: 31.3ms < 5s

Comments:

-

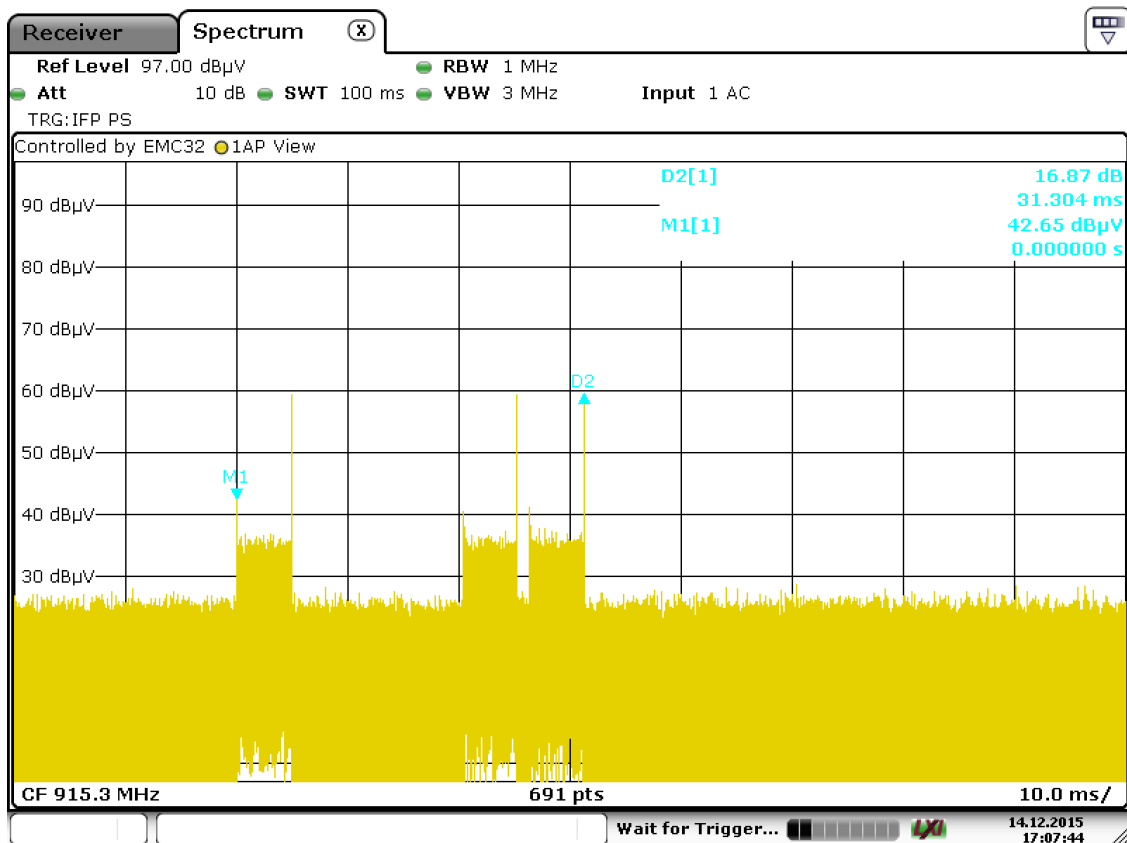

Date: 14.DEC.2015 17:07:45

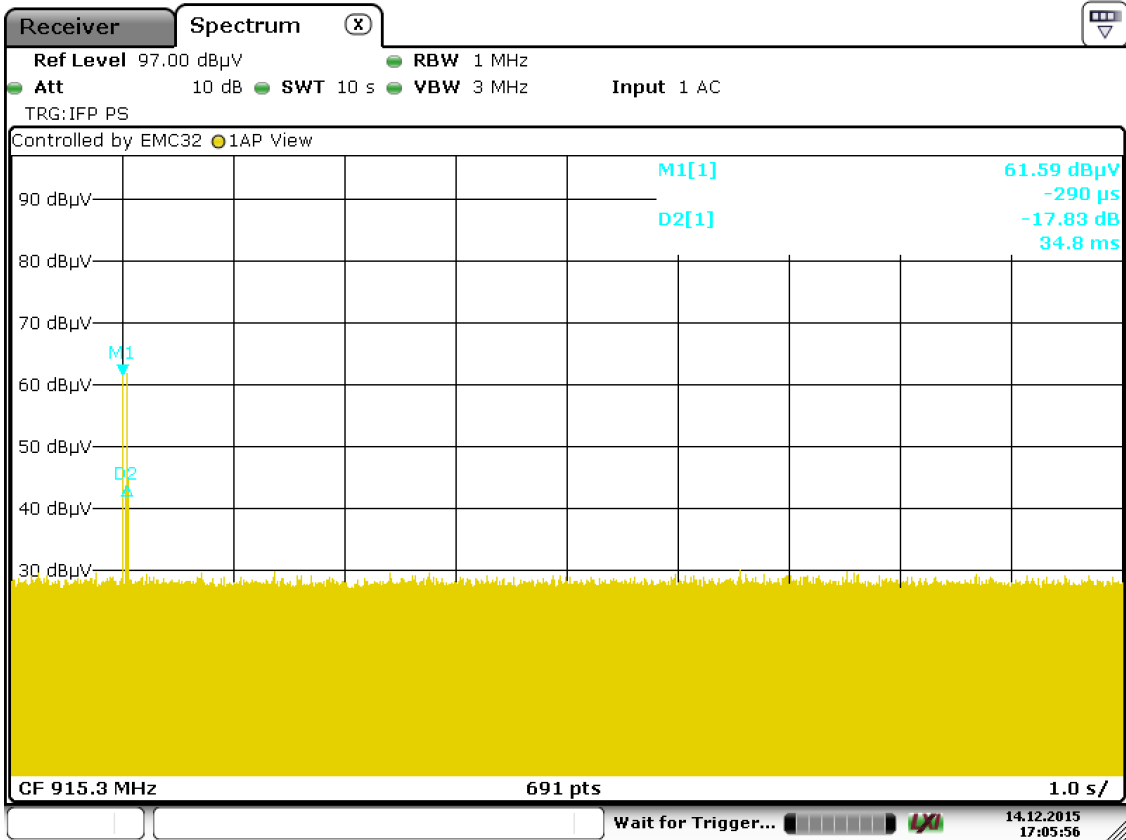

Date: 14.DEC.2015 17:05:56

5.6 Radiated output power

Specify:

Base standard: FCC 15.231 (b)

Test Requirements:

RBW / VBW:
 200Hz ($f < 150\text{kHz}$)
 9kHz ($150\text{kHz} < f < 30\text{MHz}$)
 120kHz ($30\text{MHz} < f < 1000\text{MHz}$)
 1MHz ($f > 1000\text{MHz}$)


Uncertainty: 3.7dB

Test data:


Output radiated power (3m of distance):
 Peak 99.09 dB μ V/m at distance of 3m (915.3MHz)
 Peak 98.91 dB μ V/m at distance of 3m (918.3MHz)

Comments:

The results represent the worst case of emissions between three polarizations verified (X, Y and Z). The table was rotate of 360° and antenna receiving moved from 1m to 4m to find the maximum emission.

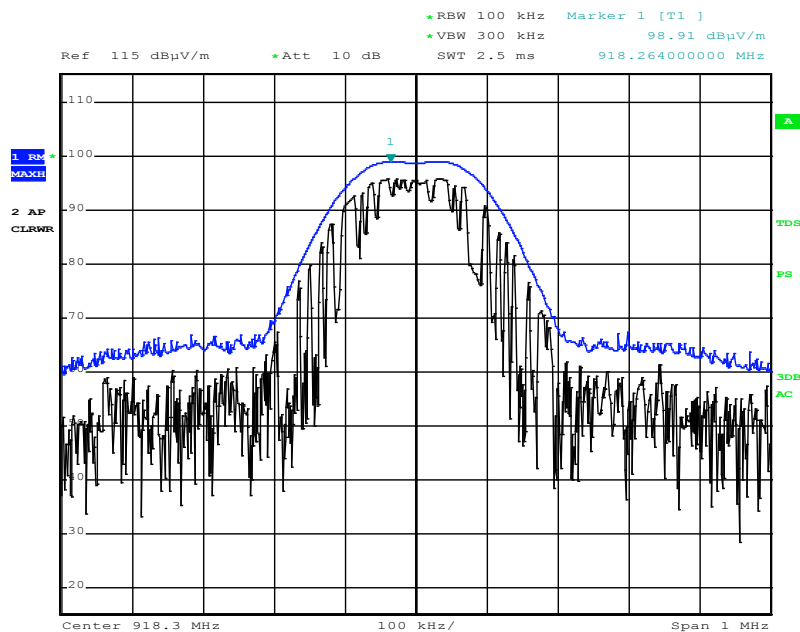

Date: 14.SEP.2015 13:40:08

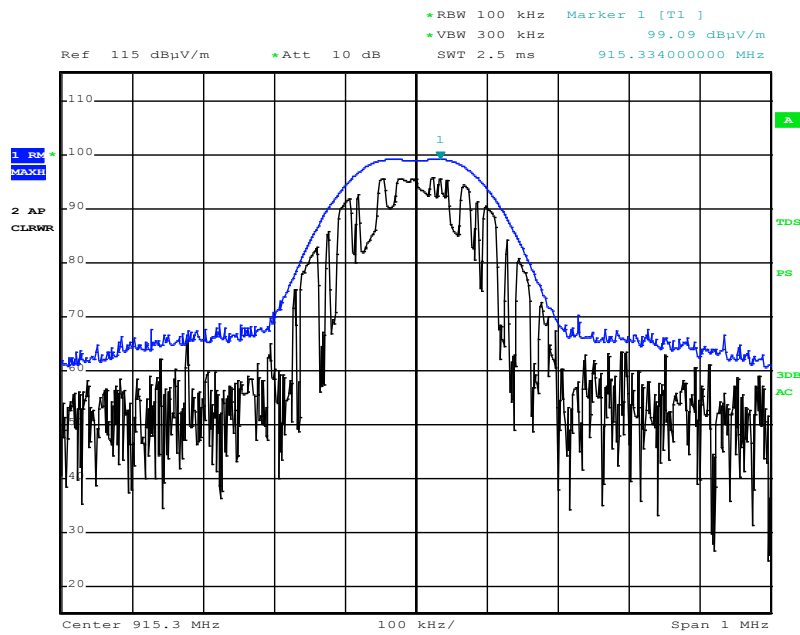

Date: 14.SEP.2015 13:46:58

5.7 Typical pulse train of a signal

Specify:

Base standard: 47CFR Part 15 Section 15.35 (c)

Test Setup:

RBW: 1MHz

VBW: 3MHz

Uncertainty: 0.2 μ s**Test Data:**

Duty-cycle 0.0495

TX on 4.95ms


TX off 100ms

Average correction factor (20*log(duty cycle): 20 log (4.95 / 100ms) = -26.1dB


Comments:

Every 100ms is present a single impulse with duration of 6.67ms.

The duty-cycle is: 6.67/100 = 0.0495, therefore the correction is 20 x log (0.0495) = -26.1dB.

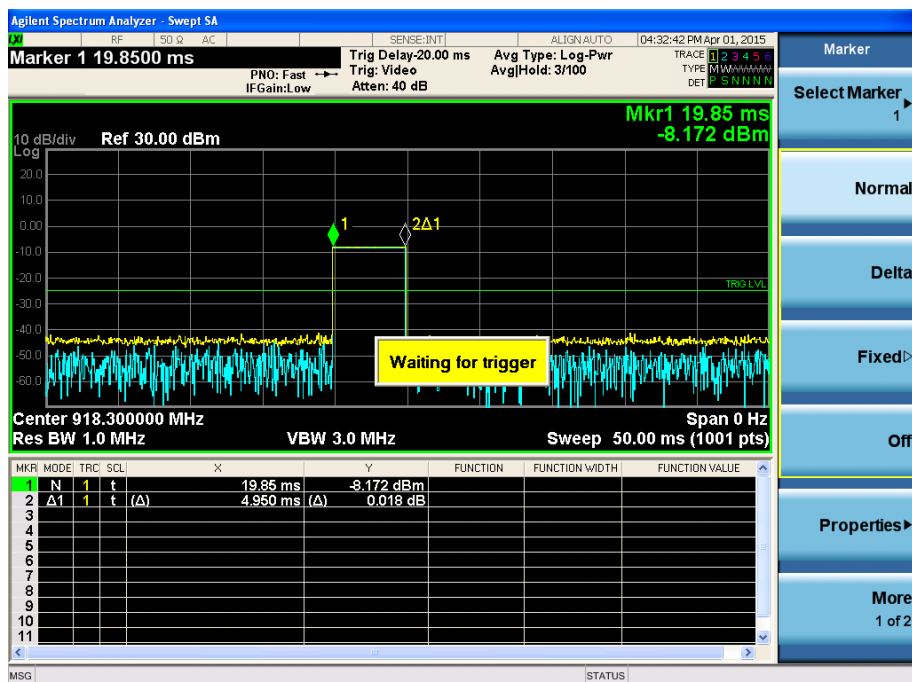

FCC test report

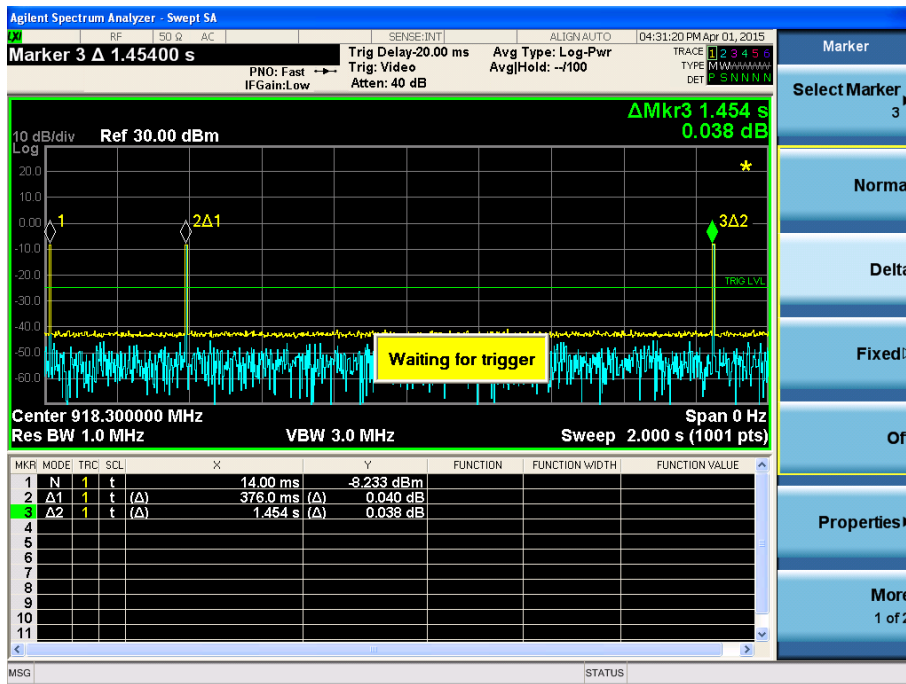

FCC test report

Specify:

Base standard: 47CFR Part 15 Section 15.35 (c)

Test Setup:

RBW: 1MHz

VBW: 3MHz

Uncertainty: 0.2 μ s

Test Data:

Duty-cycle 0.0499

TX on 4.99ms


TX off 100ms


Average correction factor ($20 \cdot \log(\text{duty cycle})$): $20 \log(4.99 / 100\text{ms}) = -26.03\text{dB}$

Comments:

Every 100ms is present a single impulse with duration of 4.99ms.

The duty-cycle is: $4.99/100 = 0.0499$, therefore the correction is $20 \times \log(0.0499) = -26.03\text{dB}$

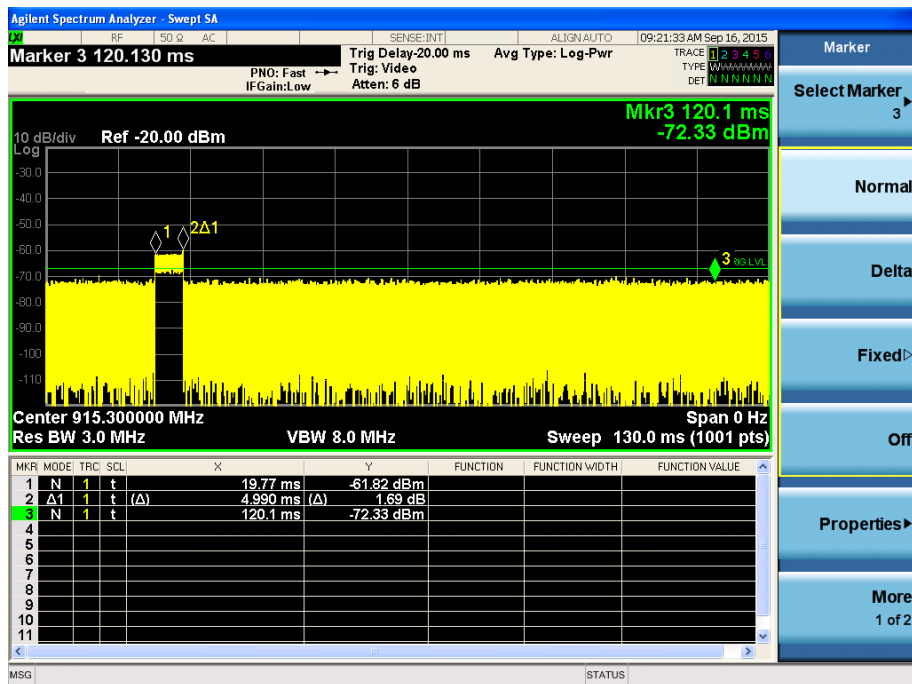

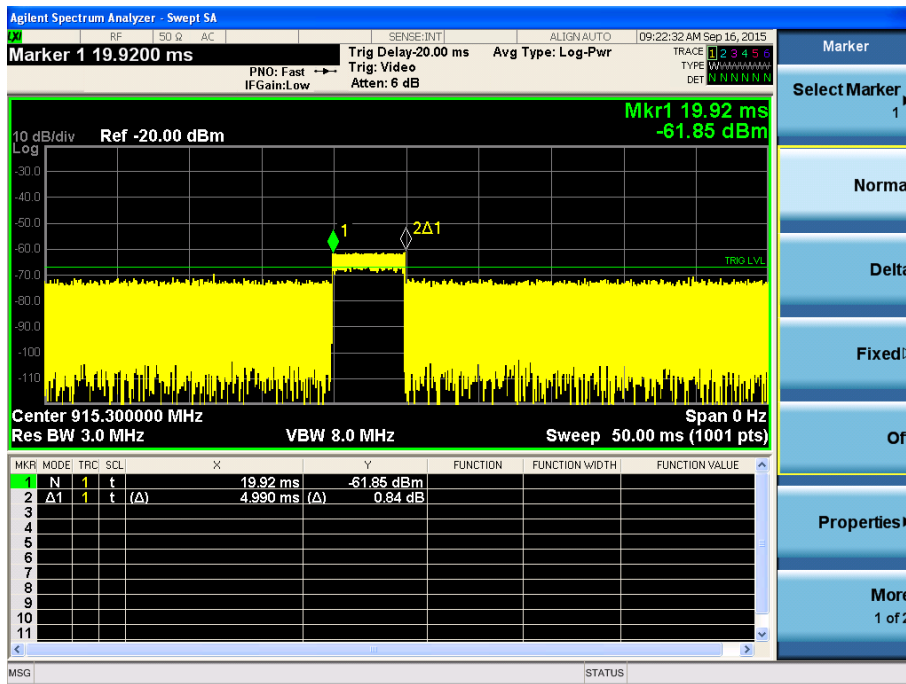

5.8 Compliance with the limit of FCC

Specify:

Base standard:	47CFRF Part 15 Section 15.231 (c)
----------------	-----------------------------------

Test Setup:

RBW / VBW:	200Hz (f < 150kHz) 9kHz (150kHz < f < 30MHz) 120kHz (30MHz < f < 1000MHz) 1MHz (f > 1000MHz)
------------	-------------------------------------------------------------------------------------------------------

Uncertainty:	3.7dB
---------------------	--------------

Limits:

Frequency [MHz]	Field Strength of the fundamental	Field Strength of spurious emissions
902 - 928	81.9dB μ V/m	500 μ V/m / 54dB μ V/m
Note: -		

Test Result:

Frequency:	
Calculated average (3m of distance):	(98.91 – 26.1) dB μ V/m = 72.81dB μ V/m < 81.9dB μ V/m (918.3MHz) (99.09 – 26.03) dB μ V/m = 73.06 dB μ V/m < 81.9dB μ V/m (915.3MHz)

Comments:

The results represent the worst case of emissions between three polarizations verified (X, Y and Z). The table was rotate of 360° and antenna receiving moved from 1m to 4m to find the maximum emission.

5.9 Spurious emission - radiated

Specify:

Base standard: 47CFR Part 15 Section 15.231 (a)

Test Setup:

Uncertainty : 3.9dB

Limits:

Frequency [MHz]	Field Strength of the fundamental	Field Strength of spurious emissions
above 470	50mV/m / 94dB μ V/m	500 μ V/m / 54dB μ V/m

Note: -

Test Result:

Frequency [MHz]	Peak Amplitude of emission (dB μ V/m)	Average Amplitude of emission (dB μ V/m)	Limit maximum allowed emission power	Actual attenuation below frequency of operation (dB)	Results
918.2640	98.91	72.81	81.9dB μ V/m	9.09	operating frequency
1836.677	52.70	26.60	54	27.40	Complies
2754.980	45.03	18.93	54	35.07	Complies
3675.468	36.16	10.06	54	43.49	Complies
4591.616	46.02	19.92	54	34.08	Complies
5509.719	41.75	15.65	54	38.35	Complies
6428.452	45.69	19.59	54	34.41	Complies
7343.680	38.43	12.33	54	41.67	Complies
8265.133	43.68	17.58	54	36.42	Complies
9182.551	49.78	23.60	54	30.40	Complies

Comments:

The results represent the worst case of emissions between three polarizations verified (X, Y and Z). The table was rotate of 360° and antenna receiving moved from 1m to 4m to find the maximum emission.

Specify:

Base standard: 47CFR Part 15 Section 15.249 (c)

Test Setup:

Uncertainty: 3.9dB

Limits:

Frequency [MHz]	Field Strength of the fundamental	Field Strength of spurious emissions
above 470	50mV/m / 94dB μ V/m	500 μ V/m / 54dB μ V/m

Note: -

Test Result:

Frequency [MHz]	Peak Amplitude of emission (dB μ V/m)	Average Amplitude of emission (dB μ V/m)	Limit maximum allowed emission power	Actual attenuation below frequency of operation (dB)	Results
915.3340	99.09	73.06	81.9dB μ V/m	8.84	operating frequency
1830.550	53.45	27.42	54	26.58	Complies
2745.775	37.64	11.61	54	42.39	Complies
3661.160	35.57	9.84	54	44.46	Complies
4576.370	39.84	13.81	54	40.19	Complies
5491.570	40.72	14.69	54	39.31	Complies
6406.710	39.49	13.46	54	40.54	Complies
7322.060	40.89	14.86	54	39.14	Complies
8237.755	36.30	10.27	54	43.73	Complies
9152.605	39.56	13.53	54	40.47	Complies

Comments:

The results represent the worst case of emissions between three polarizations verified (X, Y and Z). The table was rotate of 360° and antenna receiving moved from 1m to 4m to find the maximum emission.

5.10 Occupied bandwidth

Specify:

Base standard: 47CFR Part 15.231 (c)

The bandwidth of the emission shall be no wider than 0,25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0,5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

Test Setup:

RBW: 1kHz

VBW: 3kHz

Uncertainty: 20Hz

Limits:


< 0,5% of the centre frequency, here 4.57MHz

Test Data:

Occupied bandwidth at -20dB: 82kHz < 4.57MHz (918.3MHz)
83kHz < 4.57MHz (915.3MHz)


Comments:

-

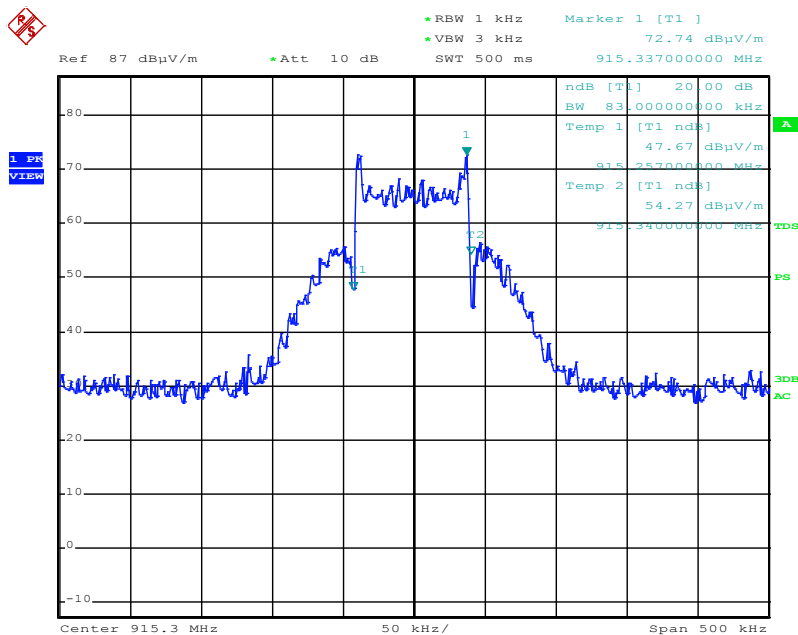


Date: 2.NOV.2015 15:53:00

FCC test report

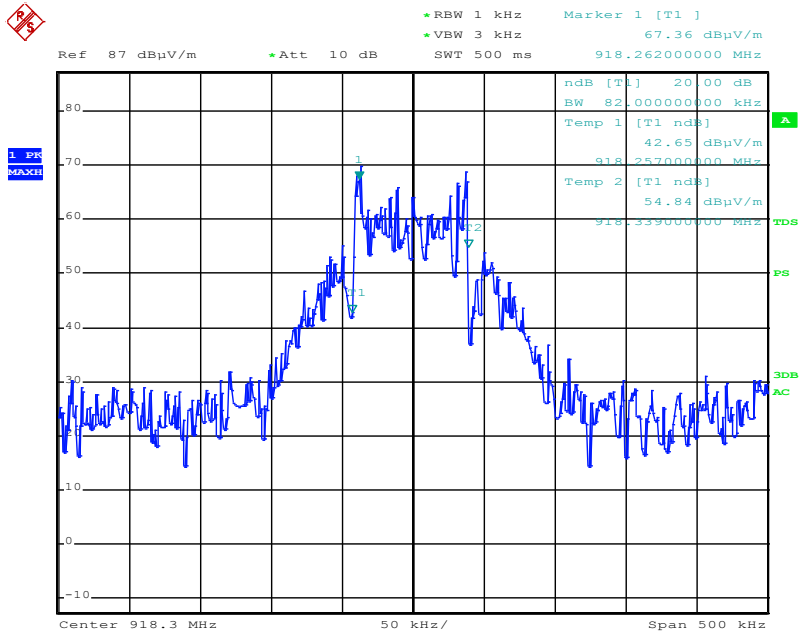

Date: 2.NOV.2015 15:54:47

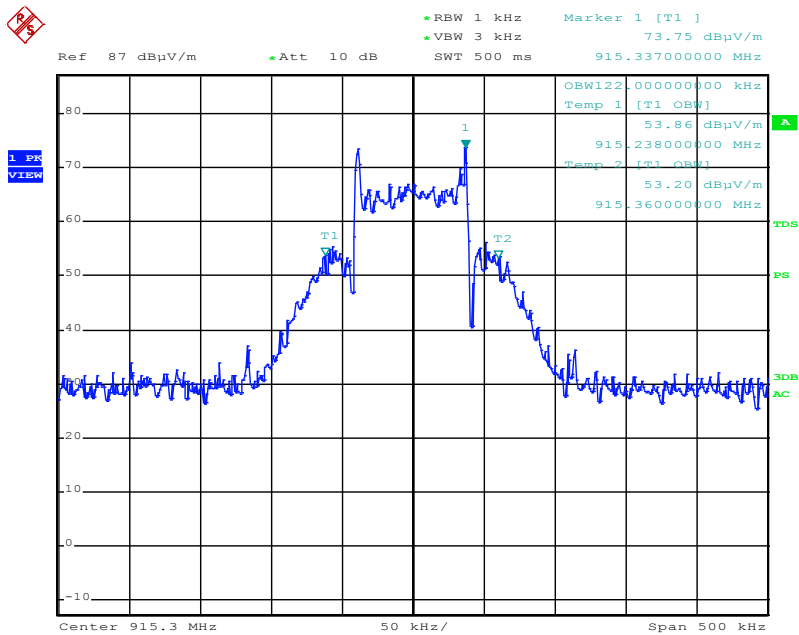


Date: 2.NOV.2015 15:52:00

FCC test report



*RBW 1 kHz Marker 1 [T1]
 *VBW 3 kHz 71.66 dBuV/m
 Ref 87 dBuV/m *Att 10 dB SWT 500 ms 918.262000000 MHz

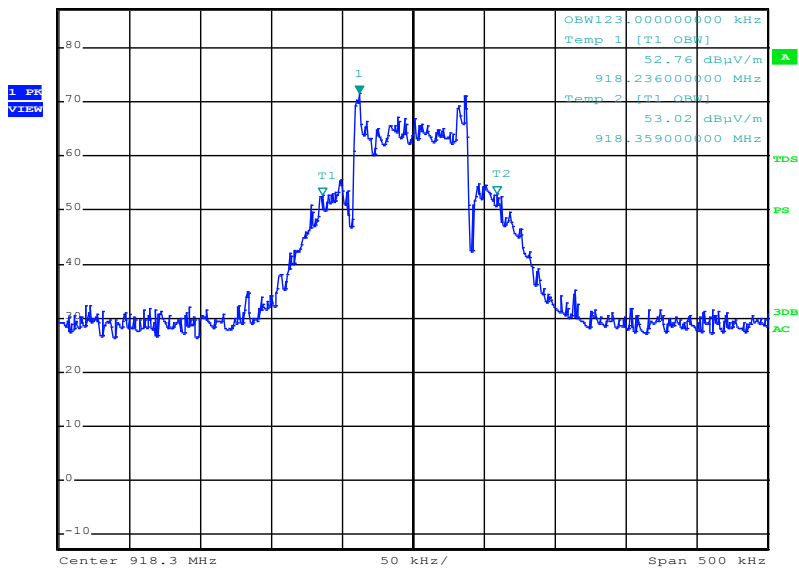

Date: 2.NOV.2015 15:56:13

6

Measurement and Test Equipment instrumentation

Code	nr.	Manufacturer	Model	Serial number	Date of Calibration	Calibration Due
ANA	7	Agilent	N9020A	MY48011101	19/03/2014	18/03/2016
ANT	1	EMCO	3121C DB-4	9312-901		
ANT	3	Schwarzbeck	VULB9160	3180	24/07/2015	23/07/2017
ANT	4	AH System	SAS-571	684	23/07/2015	22/07/2017
ANT	5	AH System	SAS-562B	236	24/07/2015	23/07/2019
ANT	6	AH System	SAS-571	1025	23/07/2015	22/07/2017
ANT	7	Aaronia	BicoLOG 30100	1293	23/07/2015	22/07/2017
ATT	1		PE7021-6			
ATT	2	Tyco Electronics Co.	50WCW			
ATT	5	RADIALL	R414.710.000			
ATT	6	RADIALL	R414.710.000			
ATT	7	RADIALL	R414.720.000			

Code	nr.	Manufacturer	Model	Serial number	Date of Calibration	Calibration Due
CAV	1	Rohde & Schwarz	HFU2-Z5	-	18/09/2013	18/09/2015
CAV	2	Rohde & Schwarz	HFU2-Z4	-	18/09/2013	18/09/2015
CAV	3	TESEO	CAVO A	-	18/09/2013	18/09/2015
CAV	5	TESEO	CAVO C	-	18/09/2013	18/09/2015
CAV	6	TESEO	CAVO D	-	18/09/2013	18/09/2015
CAV	7	TESEO	CAVO E	-	18/09/2013	18/09/2015
CAV	13	TESEO	CAVO G	-	18/09/2013	18/09/2015
CAV	14	TESEO	CAVO H	-	18/09/2013	18/09/2015
CAV	15	TESEO	CAVO I	-	18/09/2013	18/09/2015
CAV	16	Rohde & Schwarz	9111505/200 (CAVO J)	5995-12-161- 6890	18/09/2013	18/09/2015
CAV	17	Nice	CAVO K	-	18/09/2013	18/09/2015


Code	nr.	Manufacturer	Model	Serial number	Date of Calibration	Calibration Due
CAV	18	Nice	CAVO L	-	18/09/2013	18/09/2015
CAV	19	Nice	Cavo M	-	18/09/2013	18/09/2015
CAV	20	Nice	Cavo N	-	18/09/2013	18/09/2015
CAV	21	Nice	Cavo P	-	18/09/2013	18/09/2015
CAV	22	Nice	Cavo R	-	18/09/2013	18/09/2015
CSA	1	TESEO	EN 55022 EN 610004-3	NSA	11/08/2015	10/08/2016
CSA	1	TESEO	EN 55022 EN 610004-3	CISPR 16-1-4	14/04/2009	14/04/2019
CSA	1	TESEO	EN 55022 EN 610004-3	EN 61000-4-3	14/10/2014	14/10/2015
GEN	7	Rohde & Schwarz	SML 03	102178	22/07/2014	21/07/2016
GEN	8	Agilent	N5182A	MY48180288	23/09/2013	22/09/2016
LIS	2	Rohde & Schwarz	ESH2-Z5	100183	23/07/2015	22/07/2017
PAS	1	FCC	F-202	197	11/06/2012	11/06/2016

Code	nr.	Manufacturer	Model	Serial number	Date of Calibration	Calibration Due
POW	1	Rohde & Schwarz	NRVD	101221	12/02/2014	12/02/2016
POW	2	Rohde & Schwarz	NRV-Z5	100314	14/02/2014	14/02/2016
POW	3	Rohde & Schwarz	NRV-Z5	100315	14/02/2014	14/02/2016
PRE	2	Schwarzbeck	BBV 9718	9718-178	30/07/2014	29/07/2016
RIC	1	Rohde & Schwarz	ESCI	100140	18/03/2015	17/03/2016
RIC	2	Rohde & Schwarz	ESR 7	101498	9/11/2015	8/11/2016
SOF	1	Rohde & Schwarz	EMC32	V8.54.0		



7

Photographic Documentation



8.1 EUT Identification

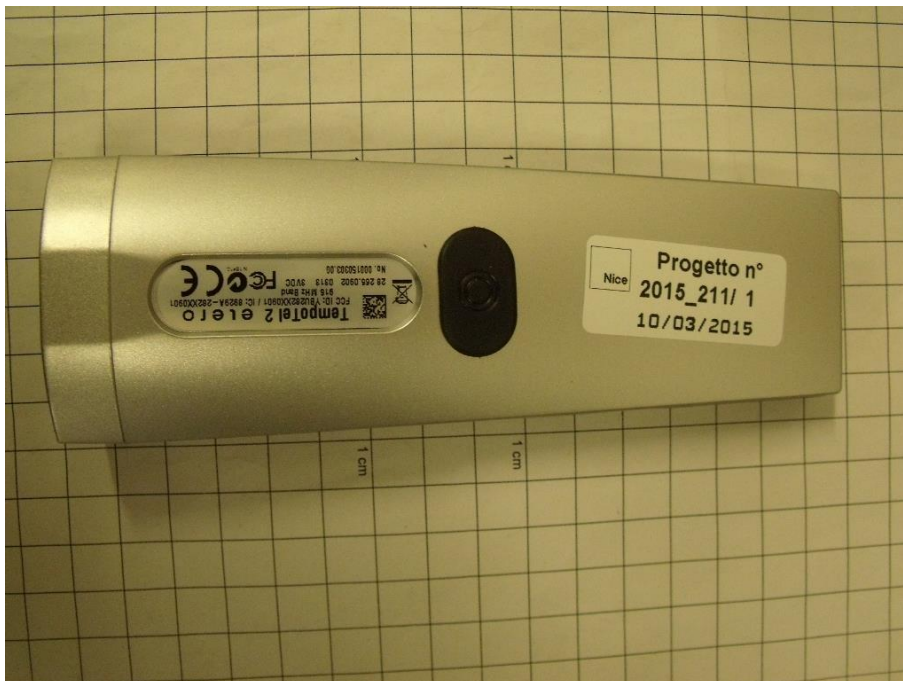

FCC test report

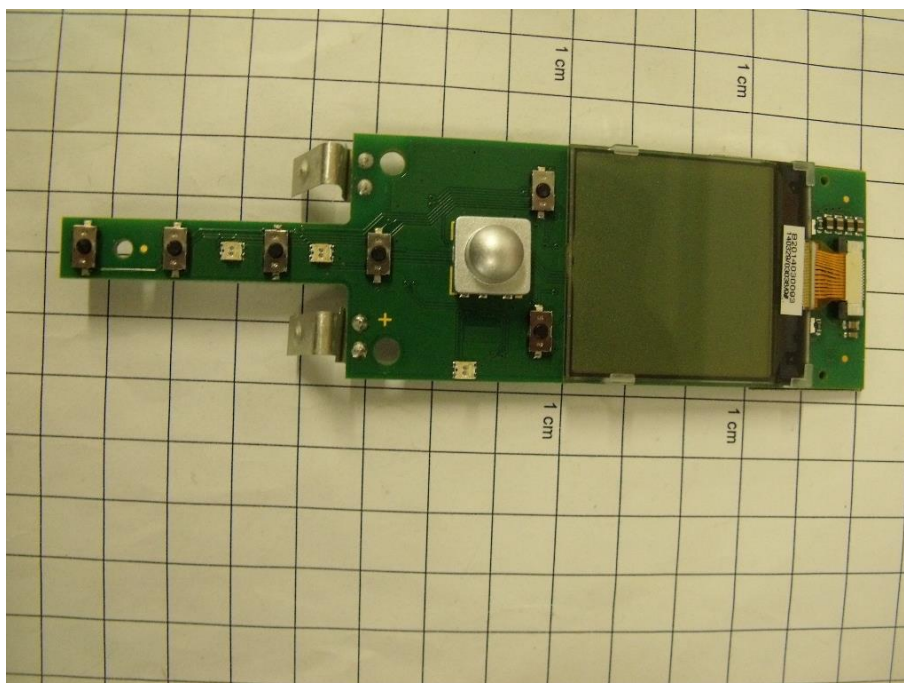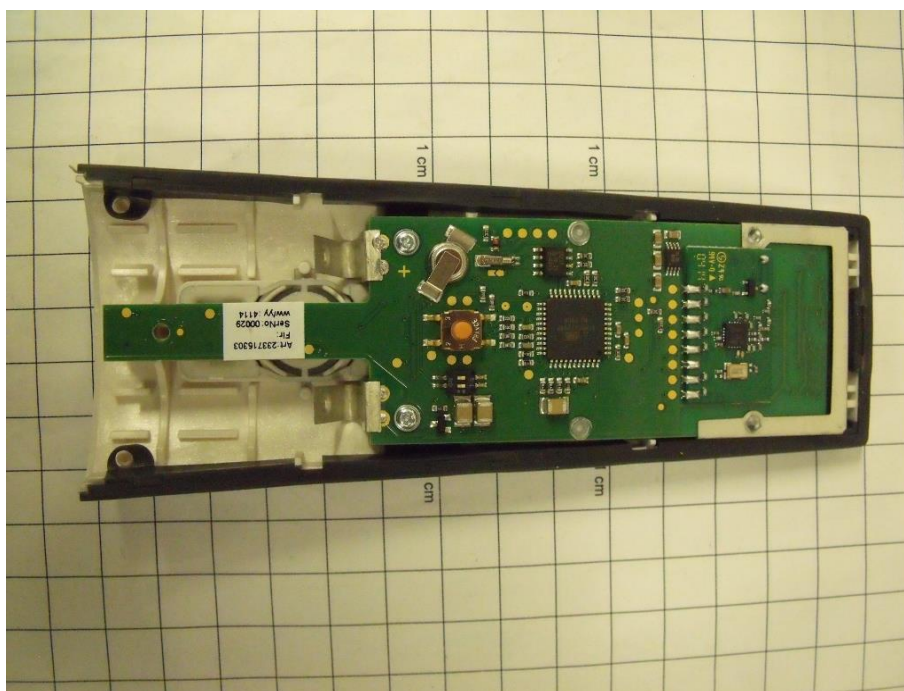

FCC test report

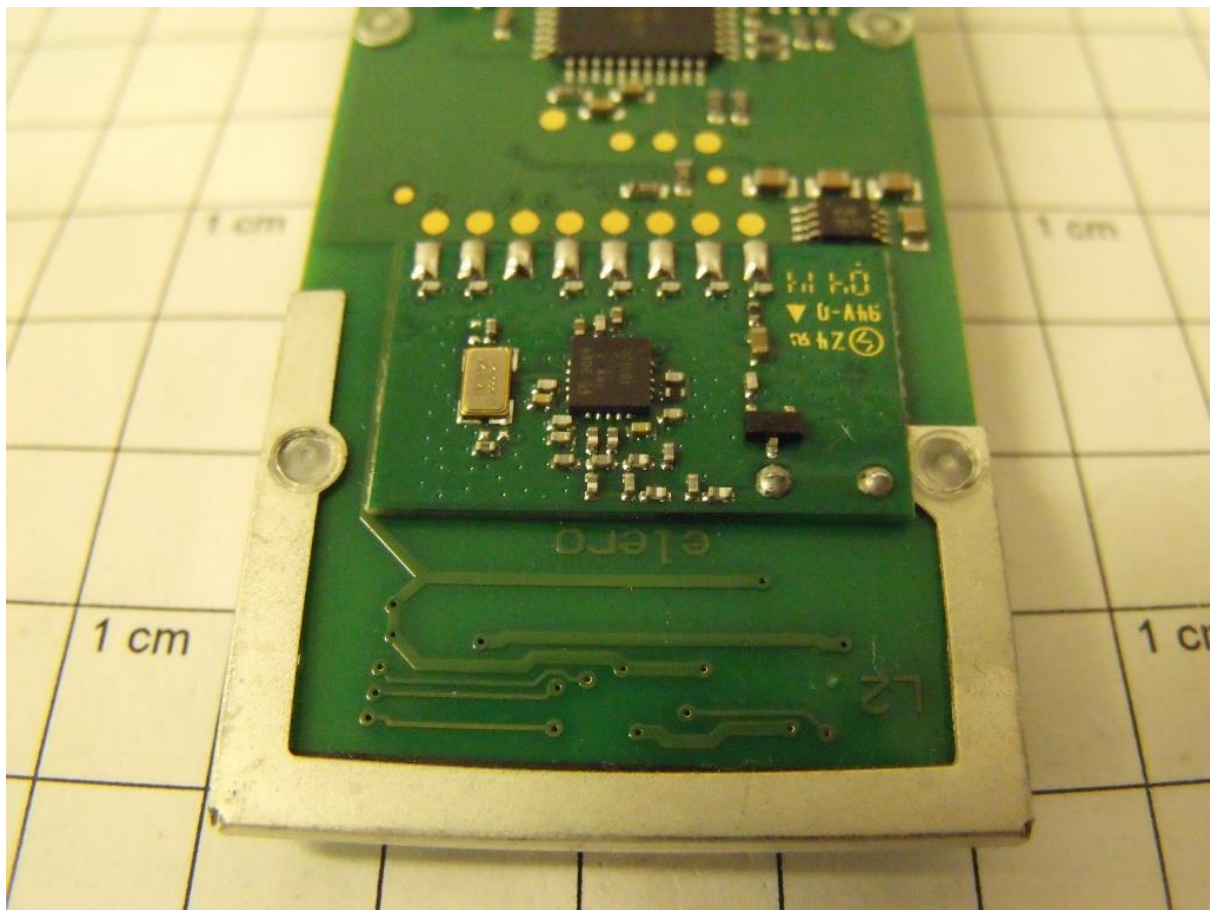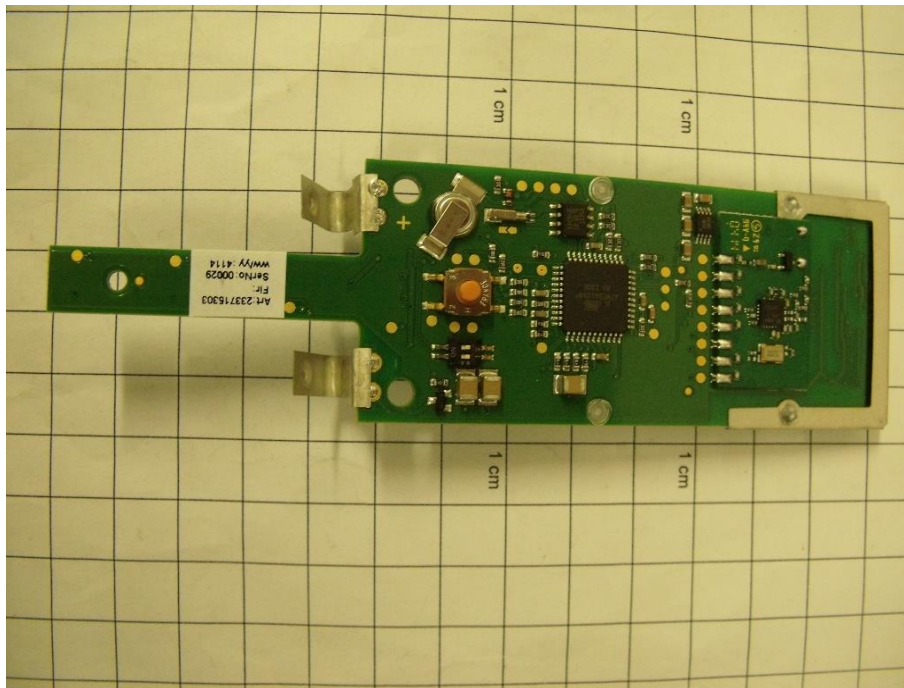


8.2 Test Set-up

Radiated emissions:





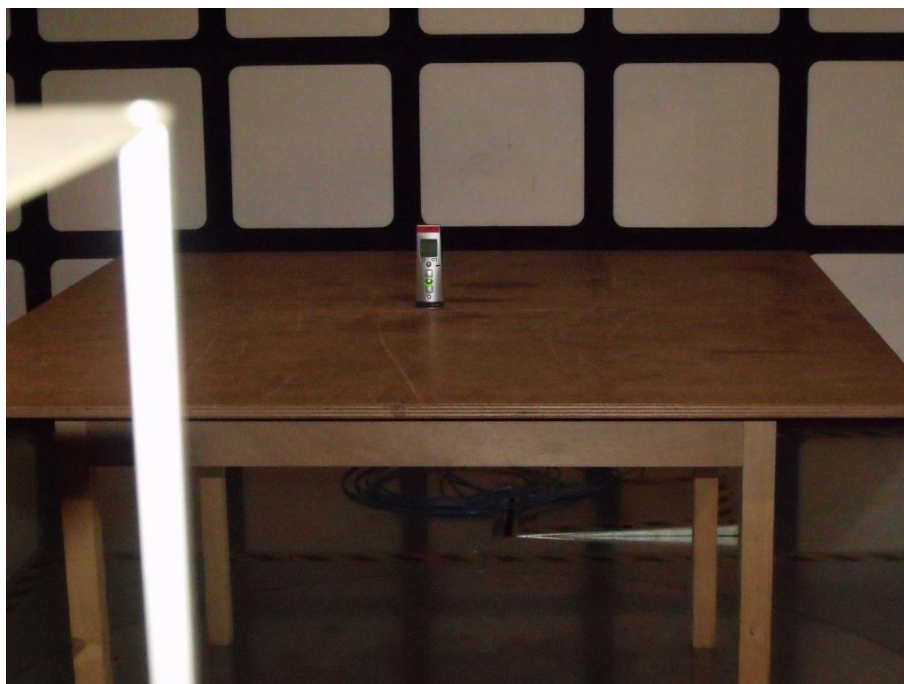

Annex 1

Technical files



RF module system "Proline2" for Combio- XXX MHz, RoTop-XXX MHz

For: transceiver modules TMWA for Combio, RoTop

Brand: Elero GmbH Antriebstechnik
Linsenhofenstrasse 65
D- 72660 Beuren (Germany)

1. Description of the product

The RF modul for using as transceiver in different products (Combio- XXX MHz, RoTop-XXX MHz) based on the transceiver chip CC1101 (TI) with antenna matching networks .
The CC1101 module is controlled by a application MCU via SPI using a protocol stack for RX and TX mode for the RF communication, only in the bidirectional application mode the CC1101 will be used as transmitter and receiver simultaneously. All TX- and RX transmissions for bidirectional communication are packet oriented for short transmission times and use suitable LBT and CCA processes.

1.1 technical specifications

1.1.1 Duty cycle estimation

a) Transmitting specification Proline2 remote controls

Size of data protocol (including PHY)	41 Byte	min.(1 Destination or Group)
	68 Byte	max. (10 Destinations)
transfer rate packet mode	76.800 Bps	
transfer PHY	869,525 MHz/ deviation 32 kHz /RBW 210 kHz or 918,300 MHz/ deviation 32 kHz/ RBW 210 kHz	
Traffictime (time to air)	min. 4,3 ms / data protocol	
	max. 7,1 ms / data protocol	
Normally volume of traffic:	<= 8 x traffic events/d by user about transmitter (= 0,33 traffic events per hour)	

b) Transmission modes

- Broadcast transmission (group > 10 destinations, no routing path)
 - ⇒ transmission of max. 1 * data protocol (4,3 ms)
 - ⇒ < 5 ms / user initiated event
- Unicast for 1 destination
 - ⇒ transmission of max. 2 * data protocol (2 * 4,3ms, cut off > 100 ms between sendings)
 - ⇒ < 9 ms / user initiated event
- Unicast for 10 destination
 - ⇒ transmission of max. 2 * data protocol (2 * 7,1 ms, cut off > 100 ms between sendings)
 - ⇒ < 15 ms / user initiated event

c) Estimation of duty cycle (worst case)

- Broadcast (group)
 - max. traffic time = 5 ms
 - ⇒ max. traffic time * Normally volume of traffic per hour = 5 ms * 0,33 = **0,0016 s / h**
- Unicast for 1 destination
 - max. traffic time = 9 ms
 - ⇒ max. traffic time * Normally volume of traffic per hour = 9 ms * 0,33 = **0,003 s / h**
- Unicast for 10 destinations
 - max. traffic time = 15 ms
 - ⇒ max. traffic time * Normally volume of traffic per hour = 15 ms * 0,33 = **0,005 s / h**

Files	Project	Author	Rev. No.	Rev. Date
technical files_RF system Proline2	Proline2 UL	PRR		11.02.2013

Annex 2

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

May 17, 2013

Registration Number: 771316

NICE S.p.A.
Via Pezza Alta, 13,
,
Oderzo, 31046
Italy

Attention: Enrico Campion, Mr.


Re: Measurement facility located at Via Pezza Alta, 13 - I-31046 Oderzo
Anechoic chamber (3 meter)
Date of Renewal: May 17, 2013

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

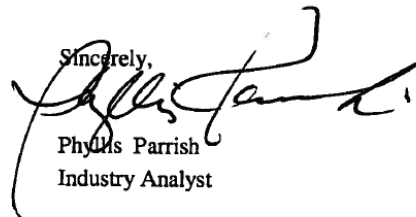

Phyllis Parrish
Industry Analyst