




TEST REPORT

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SRF0175 Page (1) of (73)	
<p>1. Client</p> <ul style="list-style-type: none"> ◦ Name : Pittasoft Co., Ltd. ◦ Address : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea ◦ Date of Receipt : 2021-06-17 <p>2. Use of Report : Certification</p> <p>3. Name of Product / Model : CAR DASHCAM / DR900X Plus</p> <p>4. Manufacturer / Country of Origin : Pittasoft Co.,Ltd. / Korea</p> <p>5. FCC ID : YCK-DR900XP</p> <p>6. Date of Test : 2021-07-21 to 2021-08-11</p> <p>7. Location of Test : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)</p> <p>8. Test method used : FCC Part 15 Subpart E, 15.407</p> <p>9. Test Result : Refer to the test result in the test report</p>		
Affirmation	Tested by Name : Minki Kim (Signature)	Technical Manager Name : Heesu Ahn (Signature)
<p style="text-align: right;">2021-08-30</p>		
<p style="text-align: center;">KCTL Inc.</p>		
<p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p>		

REPORT REVISION HISTORY

Date	Revision	Page No
2021-08-30	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Information about derivative model	5
2.2.	Accessory information	5
2.3.	Frequency/channel operations	5
2.4.	Duty Cycle Factor	6
3.	Antenna requirement	8
4.	Summary of tests	9
5.	Measurement uncertainty	10
6.	Measurement results explanation example	11
7.	Test results	12
7.1.	Maximum conducted output power	12
7.2.	Maximum Power Spectral Density	16
7.3.	6 dB Channel Bandwidth	24
7.4.	Spurious Emission, Band Edge and Restricted bands	31
8.	Measurement equipment	73

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (4) of (73)

KCTL

1. General information

Client : Pittasoft Co.,Ltd.
Address : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : Pittasoft Co.,Ltd.
Address : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
CAB Identifier: KR0040, ISED Number: 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : CAR DASHCAM
Model : DR900X Plus
Derivative model : DR900X-2CH Plus, DR900X-1CH Plus, DR900X-2CH IR Plus,
DR900X-2CH Truck Plus, DR900X-2CH DMS Plus
Modulation technique : Bluetooth(BDR/EDR)_GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth(BLE)_GFSK
WIFI(802.11a/b/g/n/ac)_DSSS, OFDM
Number of channels : Bluetooth(BDR/EDR): 79 ch / Bluetooth(BLE): 40 ch
802.11b/g/n_HT20 : 11 ch
802.11n_HT40 : 7 ch
UNII-3: 5 ch (20 MHz), 2 ch (40 MHz)
Frequency range : 2 402 MHz ~ 2 480 MHz (Bluetooth_BDR/EDR/BLE)
2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20)
2 422 MHz ~ 2 452 MHz (802.11n_HT40)
UNII-3 : 5 745 MHz ~ 5 825 MHz (802.11a/ac_VHT20)
5 755 MHz ~ 5 795 MHz (802.11ac_VHT40)
Power source : DC 12 V, 24 V
Antenna specification : Chip Antenna
Antenna gain : Bluetooth(BDR/EDR/BLE) : 1.88 dBi
802.11b/g/n_HT20/ HT40 : 1.88 dBi
UNII-3 : 3.60 dBi
Software version : 1.000
Hardware version : 2.0
Test device serial No. : N/A
Operation temperature : -20 °C ~ 70 °C

2.1. Information about derivative model

The difference between basic model and derivative models is:
 Simplified derivation based on buyer's model name and there is difference of model.

2.2. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
N/A	-	-	-	-

2.3. Frequency/channel operations

This device contains the following capabilities:
 Bluetooth(BDR/EDR/BLE), WLAN 2.4 GHz(802.11b/g/n_HT20/HT40)
 WLAN 5 GHz(802.11a/ac_VHT20/VHT40)

UNII-3

Ch.	Frequency (MHz)
149	5 745
157	5 785
165	5 825

Table 2.3.1. 802.11a/ac_VHT20 mode

UNII-3

Ch.	Frequency (MHz)
151	5 755
159	5 795

Table 2.3.2. 802.11ac_VHT40 mode

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (6) of (73)




2.4. Duty Cycle Factor [DC 12 V]

Test mode	Period (ms)	T _{on} time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
802.11a	2.363 5	1.359 5	0.575 2	57.52	2.40
802.11ac_VHT20	2.278 5	1.274 5	0.559 3	55.93	2.52
802.11ac_VHT40	1.628 2	0.629 3	0.386 5	38.65	4.13

Notes.

1. Duty cycle (Linear) = T_{on} time / Period
2. DCF(Duty cycle factor) = 10log(1/duty cycle)
3. DCF is not applied as a continuous transmitter when the duty cycle is 98% or more.

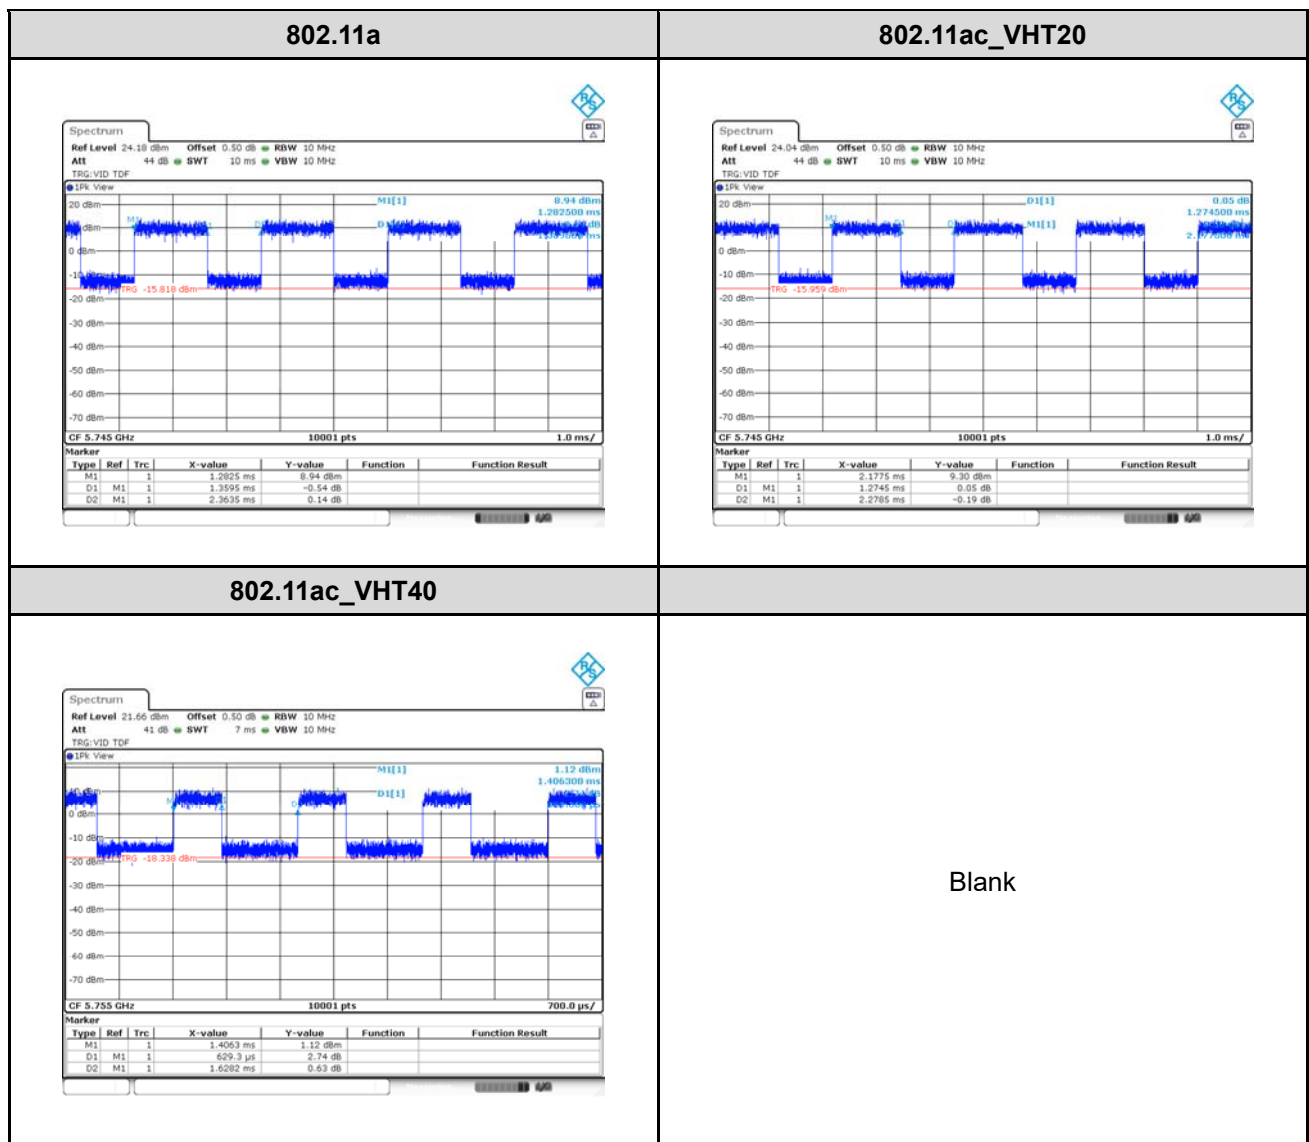

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (7) of (73)



[DC 24 V]

Test mode	Period (ms)	T _{on} time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
802.11a	2.363 5	1.358 5	0.574 8	57.48	2.40
802.11ac_VHT20	2.280 5	1.275 5	0.559 3	55.93	2.52
802.11ac_VHT40	1.631 7	0.632 8	0.387 8	38.78	4.11

Notes.

1. Duty cycle (Linear) = T_{on} time / Period
2. DCF(Duty cycle factor) = 10log(1/duty cycle)
3. DCF is not applied as a continuous transmitter when the duty cycle is 98% or more.



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (8) of (73)

**3. Antenna requirement****Requirement of FCC part section 15.203**

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached Chip Antenna(internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.407

4. Summary of tests

FCC Part section(s)	Parameter	Test condition	Test results
15.407(a)	Maximum conducted output power	Conducted	Pass
15.407(a)	Maximum power spectral density		Pass
15.407(e)	6 dB Channel Bandwidth		Pass
15.207(a)	AC Conducted emissions		N/A ^(Note1)
15.407(d), 15.205(a), 15.209(a)	Spurious emission	Radiated	Pass
	Band-edge, restricted band		Pass

Notes: (N/T: Not Tested, N/A: Not Applicable)

1. This test is not applicable because the EUT only connects DC power line.
2. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
3. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
4. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
5. The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013
 - KDB 789033 D02 v02r01
6. The worst-case data rates were:
 - 802.11a mode: 6Mbps
 - 802.11ac VHT20 mode: MCS0
 - 802.11ac VHT40 mode: MCS0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (10) of (73)

KCTL**5. Measurement uncertainty**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95% level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (\pm)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.6 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz	2.3 dB
	30 MHz ~ 1 000 MHz	2.2 dB
	1 000 MHz ~ 18 000 MHz	5.6 dB
	Above 18 000 GHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	3.7 dB
	150 kHz ~ 30 MHz	3.3 dB

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (11) of (73)



6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	10.03	9 000	12.84
50	10.07	10 000	12.92
100	10.17	11 000	13.01
200	10.29	12 000	13.14
300	10.38	13 000	13.33
400	10.47	14 000	13.42
500	10.54	15 000	13.54
600	10.59	16 000	13.88
700	10.65	17 000	13.56
800	10.71	18 000	13.81
900	10.76	19 000	14.12
1 000	10.79	20 000	14.16
2 000	11.19	21 000	14.26
3 000	11.48	22 000	14.75
4 000	11.72	23 000	14.70
5 000	11.98	24 000	14.40
6 000	11.99	25 000	14.59
7 000	12.14	26 000	14.83
8 000	12.58	26 500	14.72


Note.

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (12) of (73)

KCTL**7. Test results****7.1. Maximum conducted output power****Test setup****Limit**

According to §15.407(a)

Band	EUT category	Limit
UNII-1	Outdoor access point	1 W (30 dBm)
	Indoor access point	
	Fixed point-to-point access point	
	Client device	250 mW (23.98 dBm)
UNII-2A		250 mW or 11 dBm + 10logB*
UNII-2C		250 mW or 11 dBm + 10logB*
UNII-3	√	1 W (30 dBm)

Note.:

1) Conducted output power limit B is the 26 dB emission bandwidth.

Test procedure

ANSI C63.10-2013-Section 12.3.3.2 and 14.2
KDB 789033 D02 v02r01 - Section E.2.d) or e)

Test settings**Used test method is Section E.2.d)****◆ KDB 789033 D02 v02r01****Section E.2.d)****Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):**

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW \geq 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = power averaging (rms), if available. Otherwise use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to "free run."
- (ix) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (xi) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log(1/0,25) = 6 \text{ dB}$ if the duty cycle is 25%.

Section E.2.e)**Method SA-2 Alternative (power averaging(rms) detection with slow sweep with each spectrum bin averaging across on and off times of the EUT transmissions, followed by duty cycle correction):**

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW \geq 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- (vii) Set detector = power averaging (rms)
- (viii) Perform a single sweep.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If

the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

- (x) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is 25%.

Section E.3.a)**Method PM (Measurement using an RF average power meter):**

- (xi) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five
- (xii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II
- (xiii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (xiv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

Section E.3.b)**Method PM-G (Measurement using a gated RF average power meter):**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (15) of (73)

KCTL**Test results****[DC 12 V]**

Test mode	Band	Frequency (MHz)	Measured output power			Limit (dBm)
			Reading (dBm)	DCF (dB)	Result (dBm)	
802.11a	UNII 3	5 745	5.49	2.40	7.89	30.00
		5 785	5.45	2.40	7.85	
		5 825	5.26	2.40	7.66	
802.11ac VHT20		5 745	5.30	2.52	7.82	
		5 785	5.34	2.52	7.86	
		5 825	5.10	2.52	7.62	
802.11ac VHT40		5 755	4.19	4.13	8.32	
		5 795	4.11	4.13	8.24	

[DC 24V]


Test mode	Band	Frequency (MHz)	Measured output power			Limit (dBm)
			Reading (dBm)	DCF (dB)	Result (dBm)	
802.11a	UNII 3	5 745	5.56	2.40	7.96	30.00
		5 785	5.42	2.40	7.82	
		5 825	5.32	2.40	7.72	
802.11ac VHT20		5 745	5.28	2.52	7.80	
		5 785	5.26	2.52	7.78	
		5 825	5.06	2.52	7.58	
802.11ac VHT40		5 755	4.16	4.11	8.27	
		5 795	4.05	4.11	8.16	

Note.

Conducted output power(Average) = reading value of average power + D.C.F

7.2. Maximum Power Spectral Density

Test setup

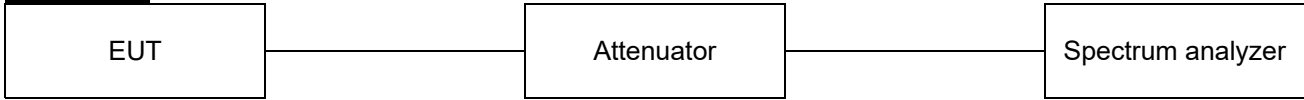

Limit

According to §15.407(a)

Band	EUT category	Limit
UNII-1	Outdoor access point	17 dBm/MHz
	Indoor access point	
	Fixed point-to-point access point	
	Client device	11 dBm/MHz
UNII-2A		11 dBm/MHz
UNII-2C		11 dBm/MHz
UNII-3	√	30 dBm/500 kHz

Notes:

If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain if the antenna exceed 6 dBi

Test procedure

KDB 789033 D02 v02r01 - Section F
 ANSI C63.10-2013

Test settings

Section F

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. Refer to III.A for additional guidance for devices that use channel aggregation.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Search function on the instrument to find the peak of the spectrum and record its value.
3. Adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g) (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz,

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (17) of (73)



the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz} / RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1 \text{ MHz} / RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Notes:

As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since $RBW = 100 \text{ kHz}$ is available on nearly all spectrum analyzers.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (18) of (73)

KCTL**Test results****[DC 12 V]**

Test mode	Band	Frequency (MHz)	Measured PSD (dBm /500 kHz)	DCF (dB)	Maximum PSD (dBm /500 kHz)	Limit (dBm /500 kHz)
802.11a	UNII 3	5 745	-7.85	2.40	-5.45	30.00
		5 785	-8.08	2.40	-5.68	
		5 825	-8.26	2.40	-5.86	
802.11ac VHT20		5 745	-8.06	2.52	-5.54	
		5 785	-8.06	2.52	-5.54	
		5 825	-8.28	2.52	-5.76	
802.11ac VHT40		5 755	-13.26	4.13	-9.13	
		5 795	-13.70	4.13	-9.57	

Note.

- Maximum PSD calculation
- Maximum PSD = Measured PSD + D.C.F


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (19) of (73)




UNII-3 / 802.11a / 5 745 MHz

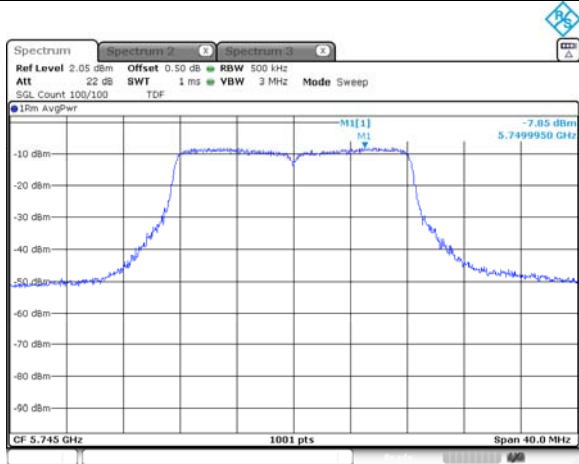


UNII-3 / 802.11ac VHT20 / 5 745 MHz

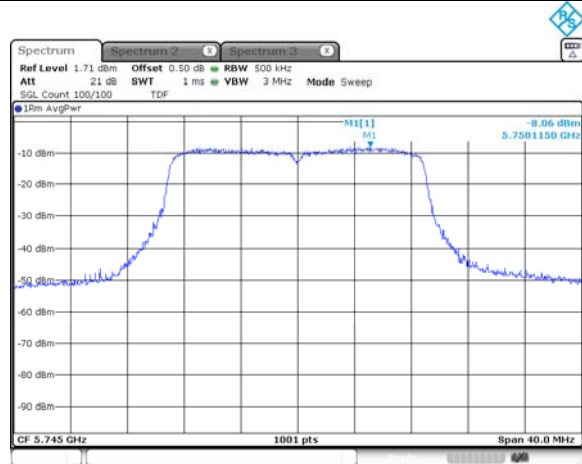


UNII-3 / 802.11a / 5 785 MHz

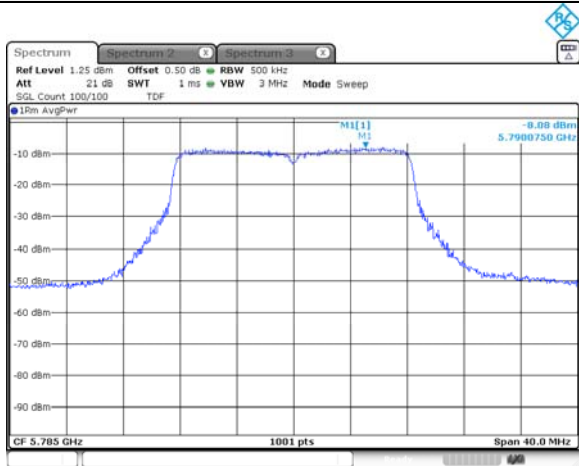


UNII-3 / 802.11ac VHT20 / 5 785 MHz

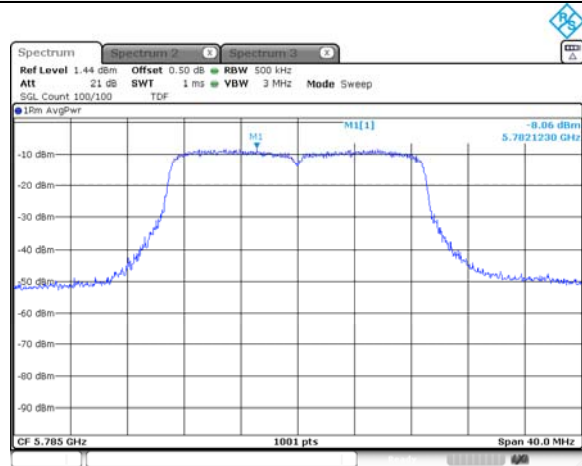

UNII-3 / 802.11a / 5 825 MHz

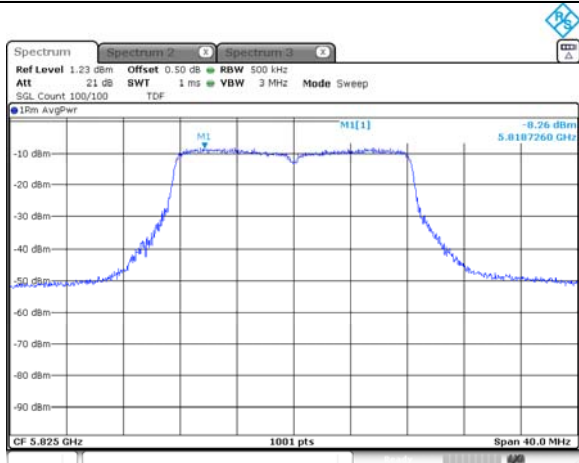

UNII-3 / 802.11ac VHT20 / 5 825 MHz

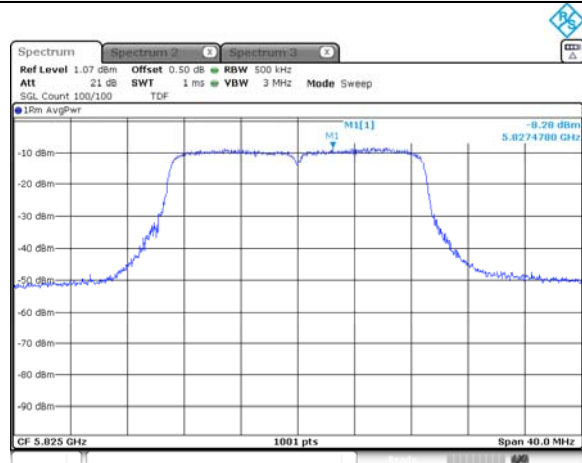


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (20) of (73)



UNII-3 / 802.11ac VHT40 / 5 755 MHz

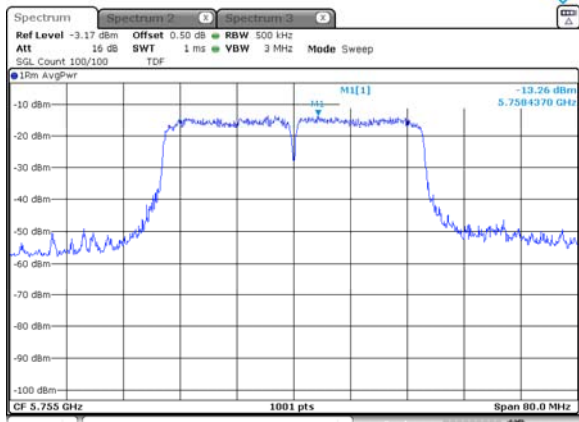

UNII-3 / 802.11ac VHT40 / 5 795 MHz

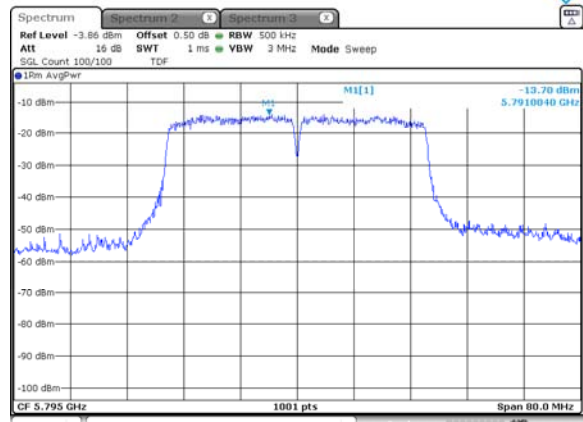

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (21) of (73)

KCTL**[DC 24 V]**

Test mode	Band	Frequency (MHz)	Measured PSD (dBm /500 kHz)	DCF (dB)	Maximum PSD (dBm /500 kHz)	Limit (dBm /500 kHz)
802.11a	UNII 3	5 745	-8.81	2.40	-6.41	30.00
		5 785	-8.43	2.40	-6.03	
		5 825	-9.20	2.40	-6.80	
802.11ac VHT20		5 745	-9.43	2.52	-6.91	
		5 785	-9.80	2.52	-7.28	
		5 825	-9.10	2.52	-6.58	
802.11ac VHT40		5 755	-12.64	4.11	-8.53	
		5 795	-13.46	4.11	-9.35	

Note.

- Maximum PSD calculation
- Maximum PSD = Measured PSD + D.C.F


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (22) of (73)




UNII-3 / 802.11a / 5 745 MHz

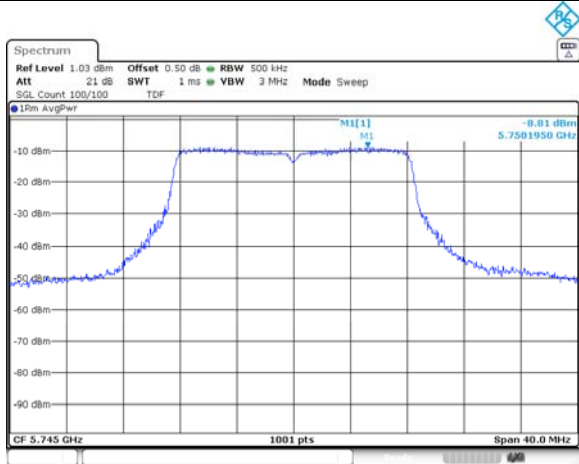


UNII-3 / 802.11ac VHT20 / 5 745 MHz

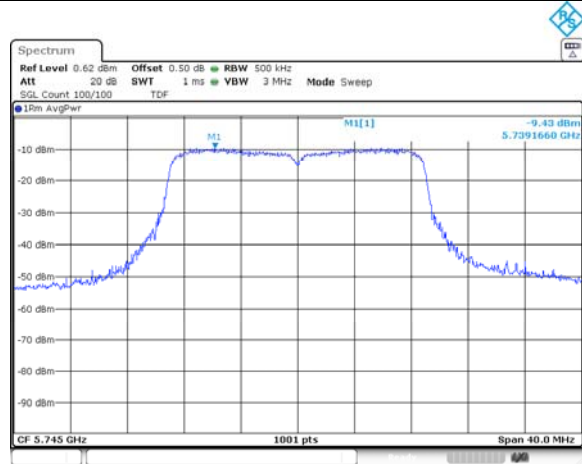


UNII-3 / 802.11a / 5 785 MHz

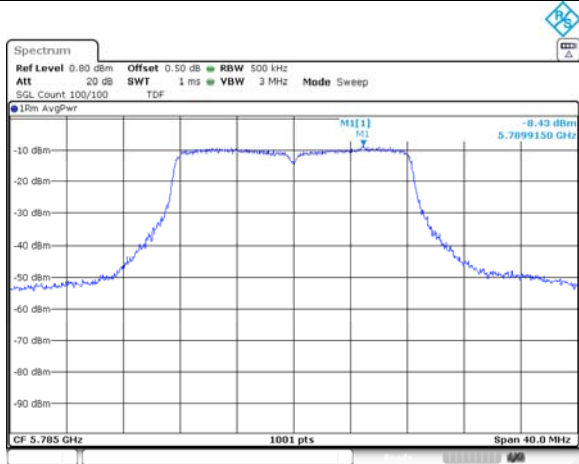


UNII-3 / 802.11ac VHT20 / 5 785 MHz

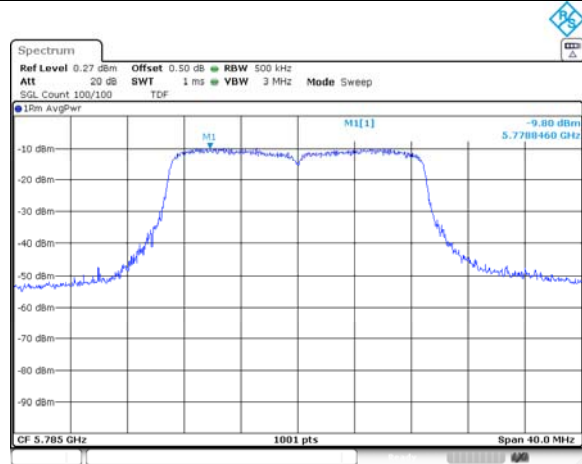

UNII-3 / 802.11a / 5 825 MHz

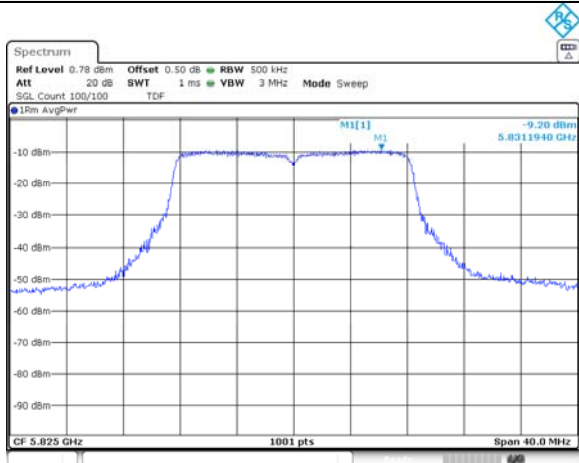

UNII-3 / 802.11ac VHT20 / 5 825 MHz

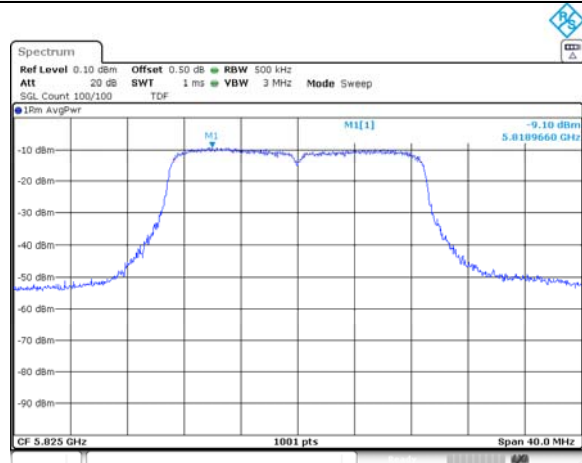


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (23) of (73)



UNII-3 / 802.11ac VHT40 / 5 755 MHz

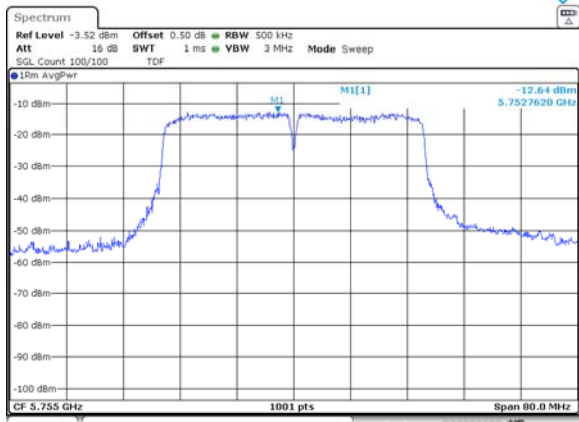

UNII-3 / 802.11ac VHT40 / 5 795 MHz

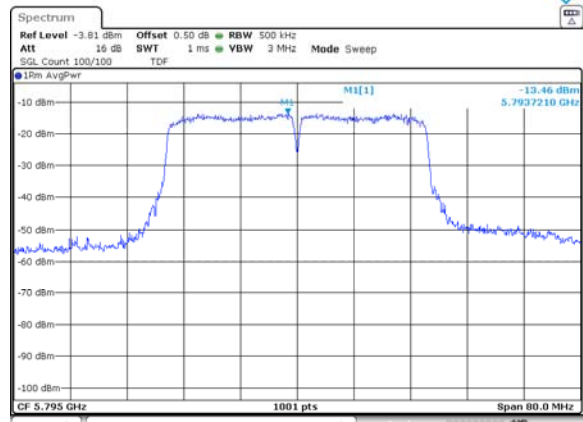

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (24) of (73)

KCTL

7.3. 6 dB Channel Bandwidth

Test setup



Limit

According to §15.407(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth if U-NII devices shall be at least 500kHz.

Test procedure

ANSI C63.10-2013 Section 6.9.2
KDB 789033 D02 v02r01 - Section C.2

Test settings

Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (25) of (73)

**Test results****[DC 12 V]**

Test mode	Band	Frequency (MHz)	6dB bandwidth (MHz)	Limit (MHz)
802.11a	UNII-3	5 745	16.384	0.500
		5 785	16.384	
		5 825	16.384	
802.11ac VHT20		5 745	17.033	
		5 785	15.884	
		5 825	16.583	
802.11ac VHT40		5 755	35.265	
		5 795	35.365	


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (26) of (73)




UNII-3 / 802.11a / 5 745 MHz

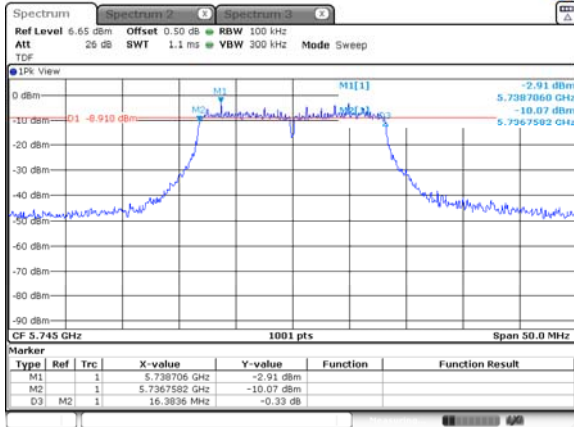


UNII-3 / 802.11ac VHT20 / 5 745 MHz

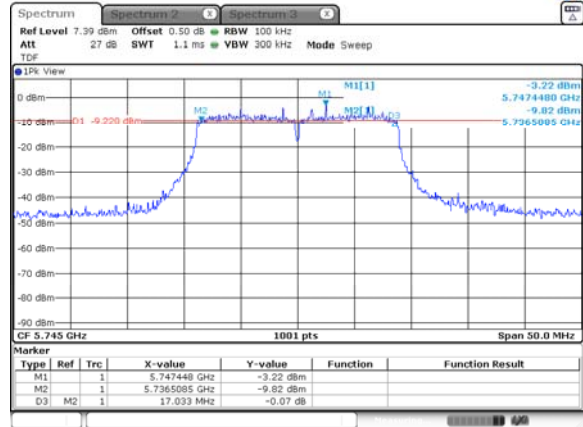


UNII-3 / 802.11a / 5 785 MHz

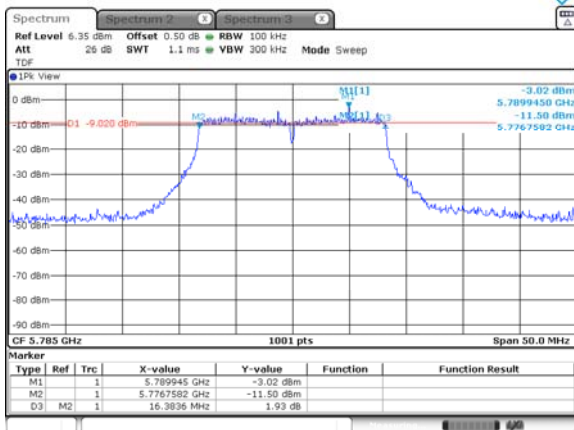


UNII-3 / 802.11ac VHT20 / 5 785 MHz

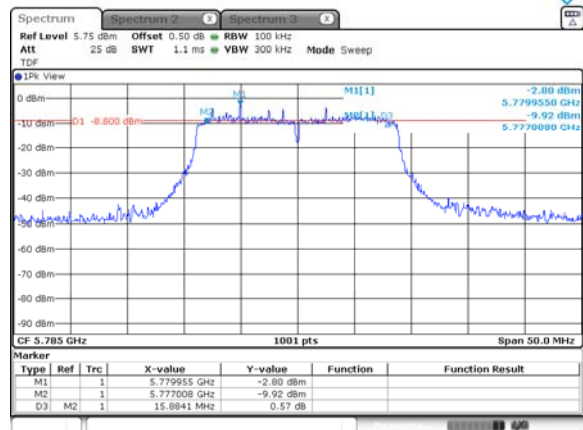

UNII-3 / 802.11a / 5 825 MHz

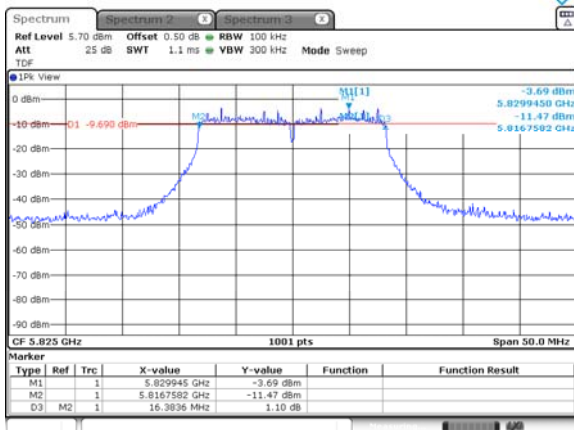

UNII-3 / 802.11ac VHT20 / 5 825 MHz

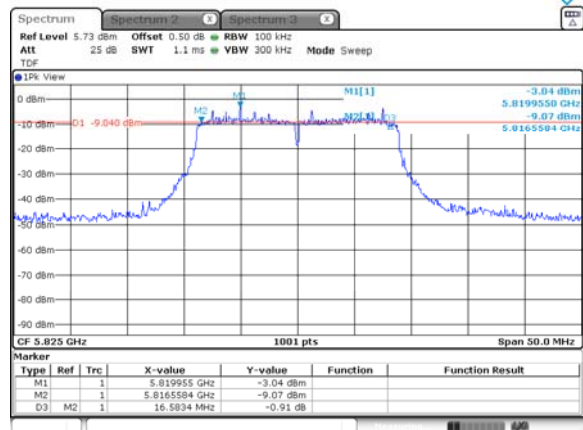


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (27) of (73)



UNII-3 / 802.11ac VHT40 / 5 755 MHz

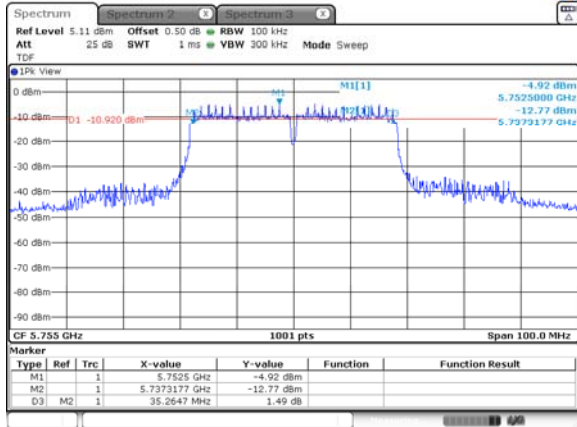

UNII-3 / 802.11ac VHT40 / 5 795 MHz

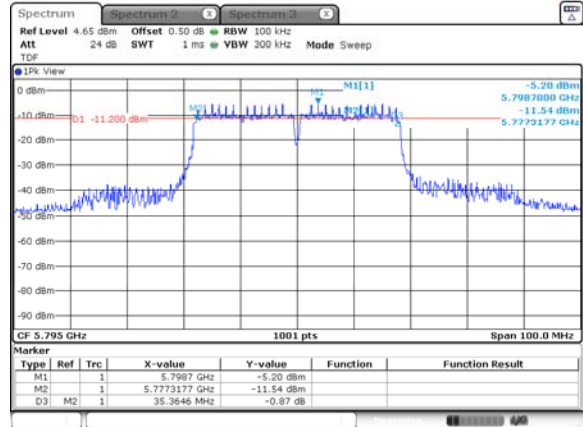

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (28) of (73)

**[DC 24 V]**

Test mode	Band	Frequency (MHz)	6dB bandwidth (MHz)	Limit (MHz)
802.11a	UNII-3	5 745	16.384	0.500
		5 785	16.384	
		5 825	16.384	
802.11ac VHT20		5 745	16.384	
		5 785	16.633	
		5 825	16.633	
802.11ac VHT40		5 755	35.265	
		5 795	35.365	


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (29) of (73)




UNII-3 / 802.11a / 5 745 MHz

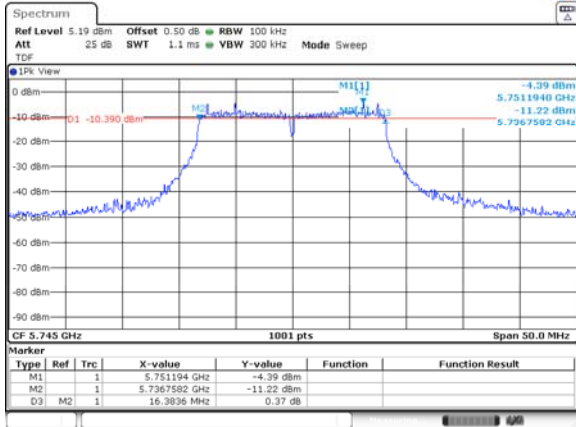


UNII-3 / 802.11ac VHT20 / 5 745 MHz

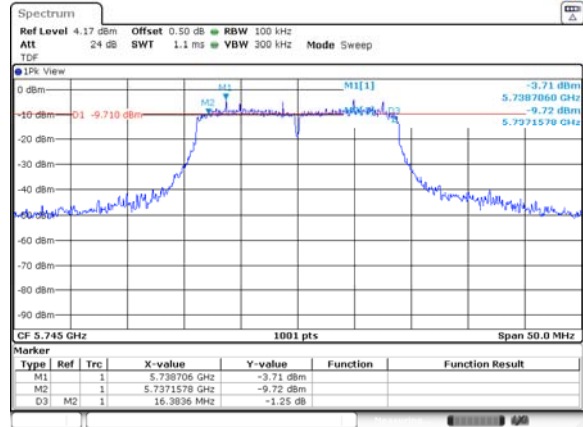


UNII-3 / 802.11a / 5 785 MHz

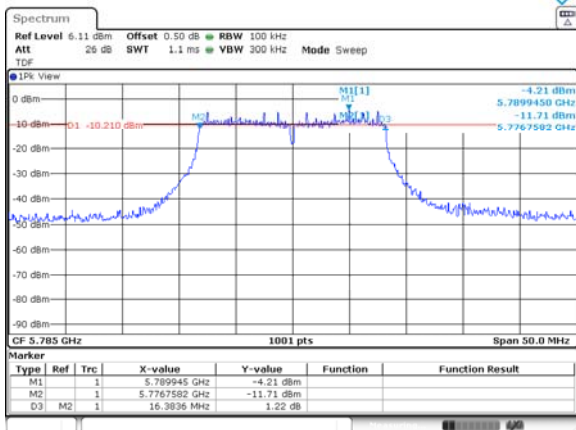


UNII-3 / 802.11ac VHT20 / 5 785 MHz

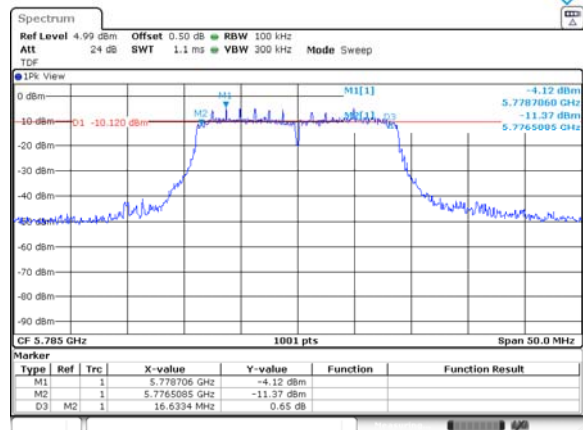

UNII-3 / 802.11a / 5 825 MHz

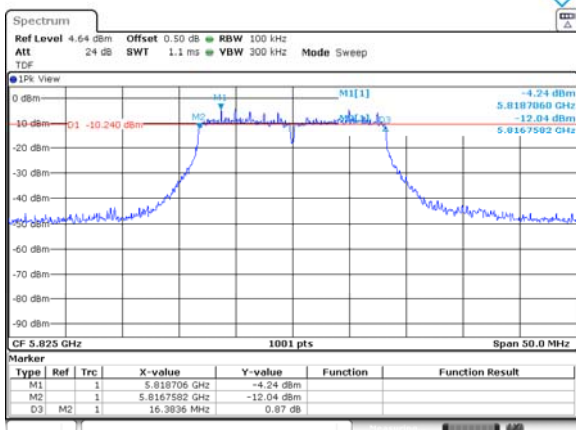

UNII-3 / 802.11ac VHT20 / 5 825 MHz

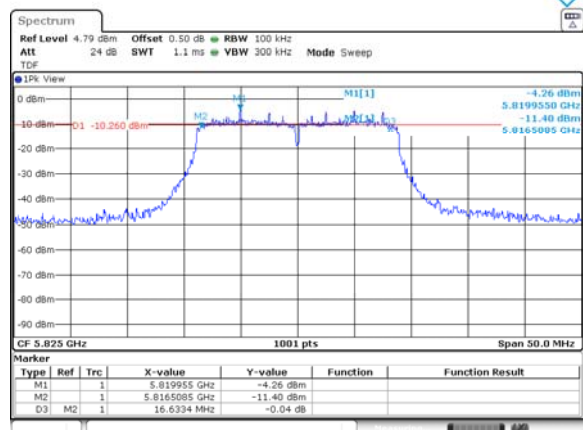


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (30) of (73)



UNII-3 / 802.11ac VHT40 / 5 755 MHz

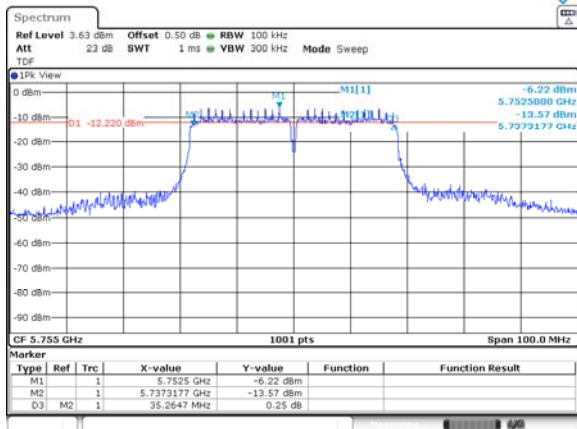


UNII-3 / 802.11ac VHT40 / 5 795 MHz

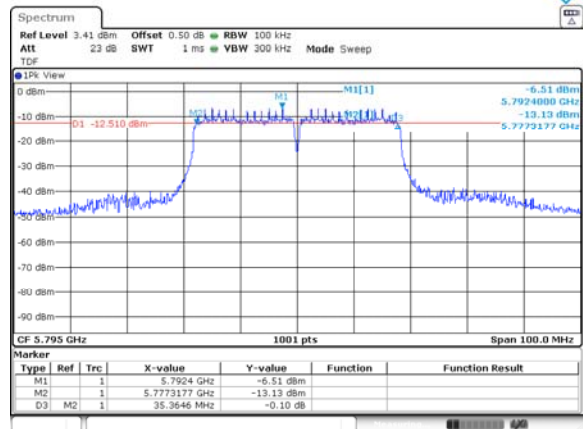


7.4. Spurious Emission, Band Edge and Restricted bands

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

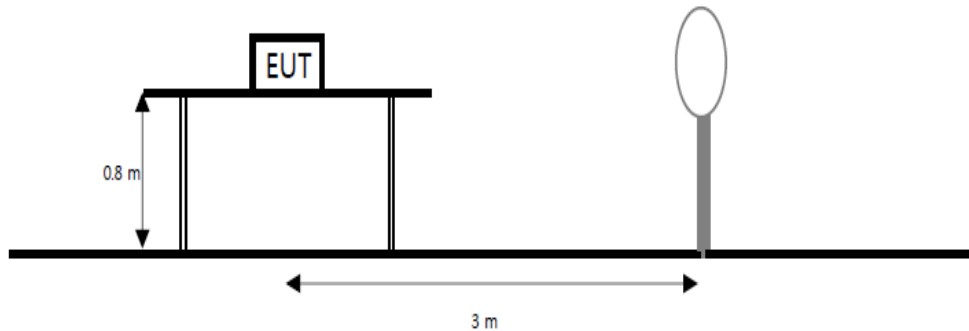

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

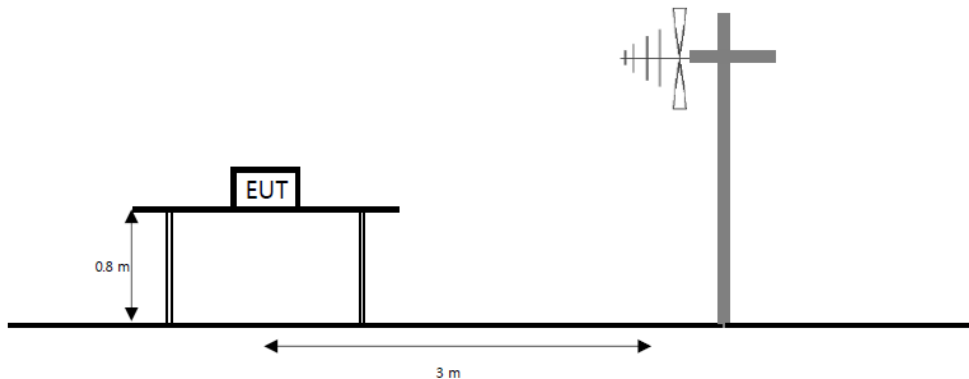

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

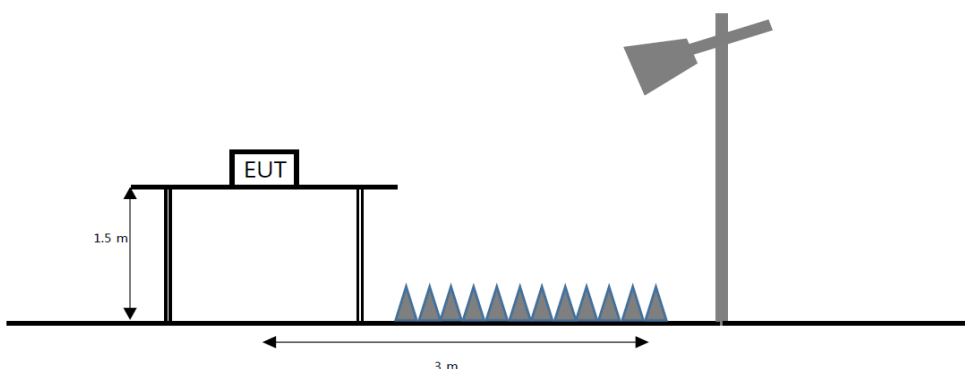

Limit

According to section 15.209(a) except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

According to section 15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (33) of (73)

KCTL

shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test procedure

ANSI C63.10-2013 Section 12.7.7.2, 12.7.5, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW \geq (3 \times RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements**Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW \geq (3 \times RBW).
3. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. $RBW = 1 \text{ MHz}$ (unless otherwise specified).
4. $VBW \geq [3 \times RBW]$.
5. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (RBW / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
6. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1 / D)]$, where D is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz ($\geq 1/T$) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
2. $f < 30 \text{ MHz}$, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30 \text{ MHz}$, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
5. Average test would be performed if the peak result were greater than the average limit.
6. ¹⁾ means restricted band.
7. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.
8. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: "No spurious emissions were detected within 20 dB of the limit."

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (35) of (73)




[DC 12 V]

Test results (Below 30 MHz) – Worst case: 802.11ac VHT40_UNII 3_5 755 MHz

Frequency	Pol.	Reading	Amp. + Cable	Antenna Factor	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Quasi peak data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical

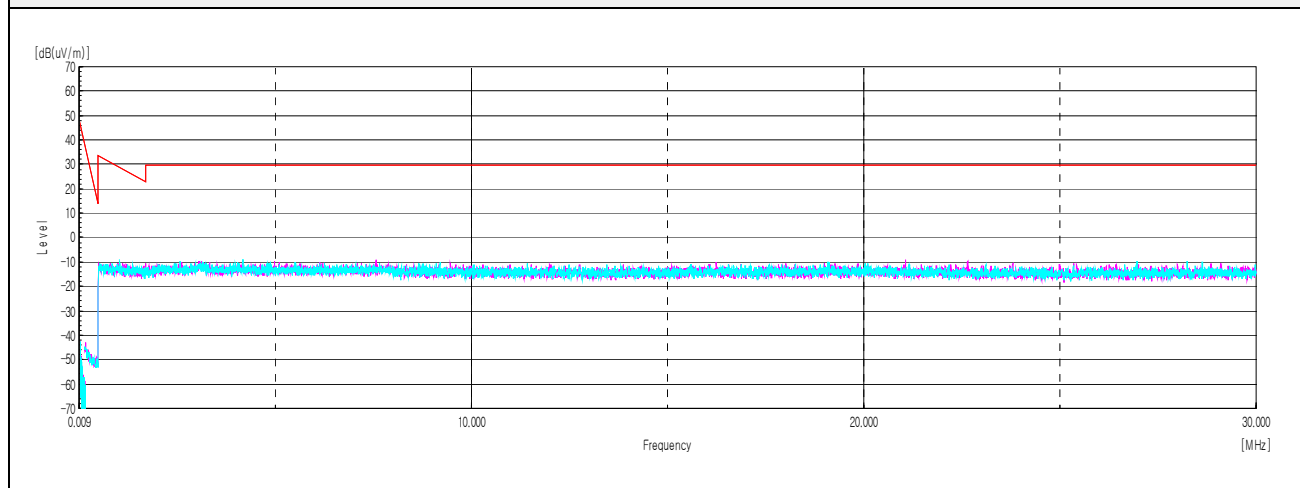

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (36) of (73)



Test results (Below 1 000 MHz) – Worst case: 802.11ac VHT40_UNII 3_5 755 MHz

Frequency	Pol.	Reading	Amp. + Cable	Antenna Factor	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Quasi peak data								
79.96	V	26.10	13.00	-29.14	-	9.96	40.00	30.04
82.26	V	26.20	13.33	-29.13	-	10.40	40.00	29.60
111.12 ¹⁾	V	26.50	17.70	-28.53	-	15.67	43.50	27.83
113.30 ¹⁾	V	26.80	17.73	-28.51	-	16.02	43.50	27.48
140.34	V	25.80	17.20	-28.02	-	14.98	43.50	28.52
199.14	V	26.40	15.20	-27.16	-	14.44	43.50	29.06

Horizontal/Vertical

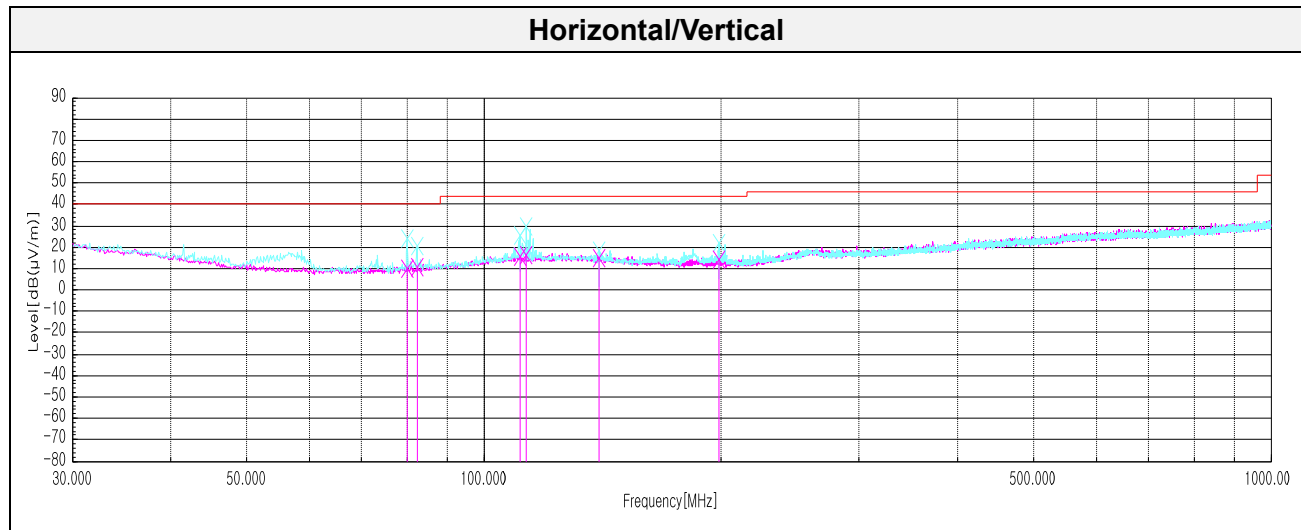

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (37) of (73)




Test results (Above 1 000 MHz)

802.11a UNII-3

5 745 MHz

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
5 723.81	V	48.57	35.02	-25.57	-	58.02	119.49	61.47
7 660.06 ¹⁾	V	63.31	35.40	-50.16	-	48.55	74.00	25.45
11 611.39 ¹⁾	H	57.93	38.39	-49.39	-	46.93	74.00	27.07
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

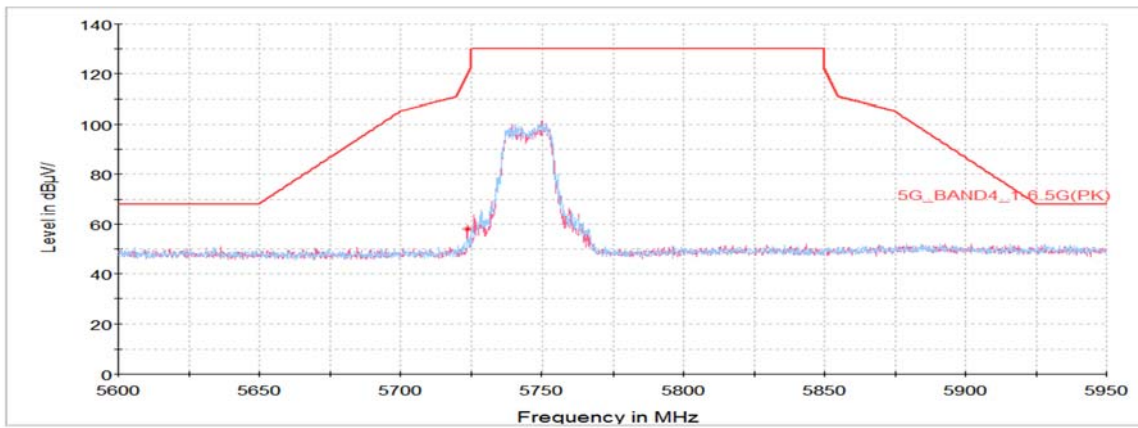


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (38) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

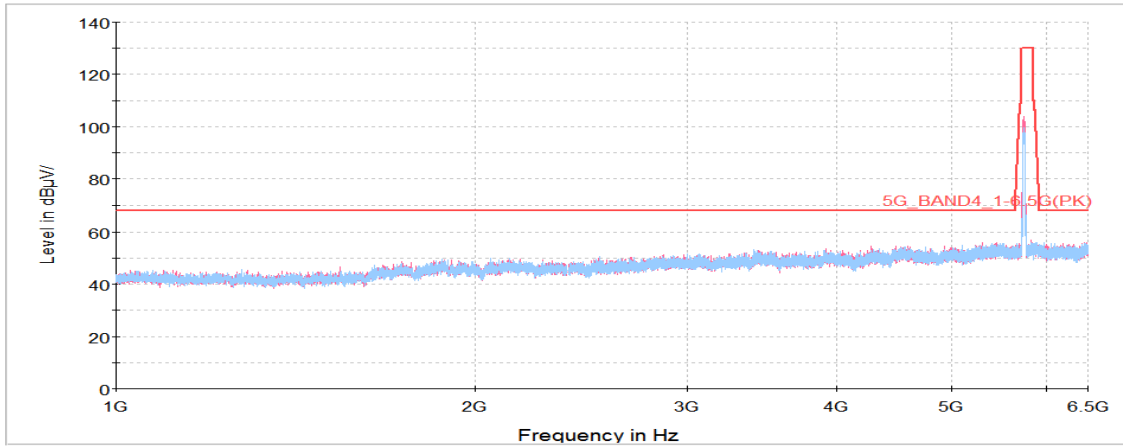

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

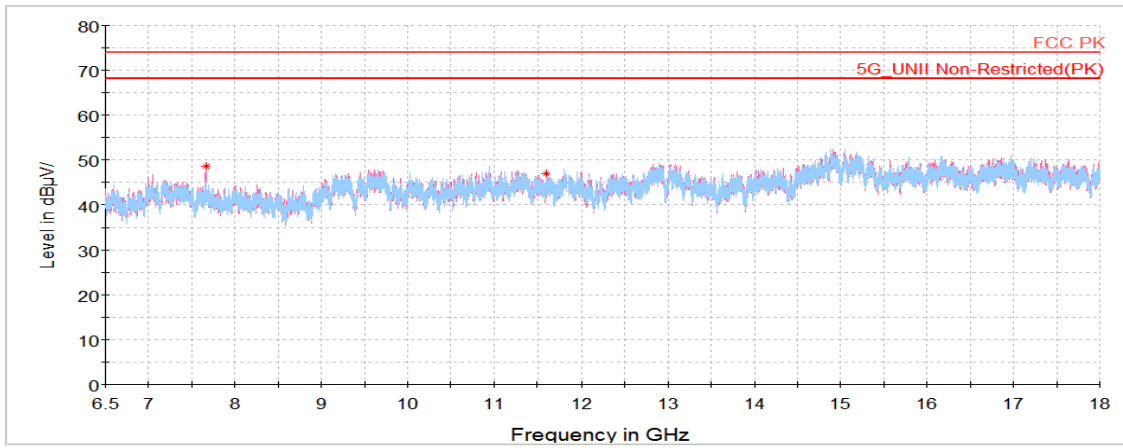

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (39) of (73)


**5 785 MHz**

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
11 484.89 ¹⁾	V	57.90	38.30	-49.30	-	46.90	74.00	27.10
17 167.69	V	56.85	40.60	-46.71	-	50.74	68.20	17.46
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

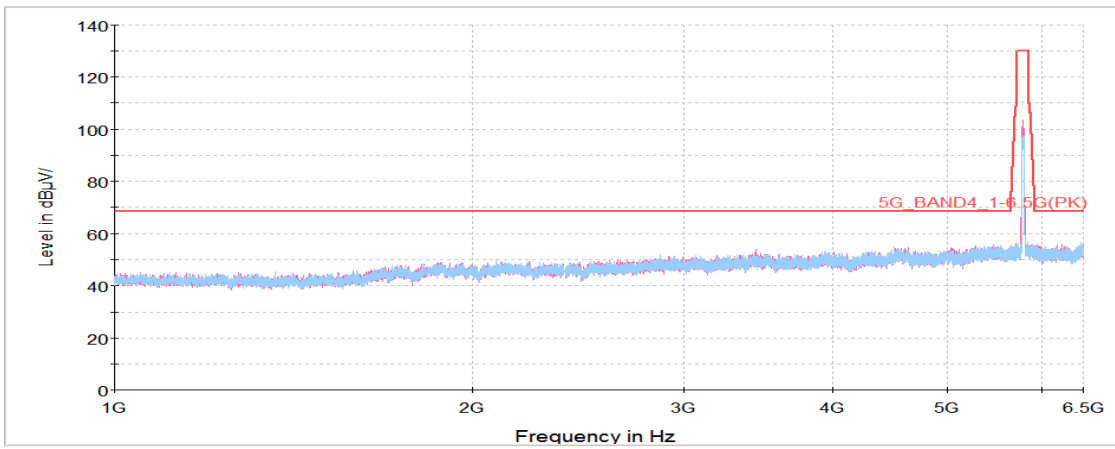

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

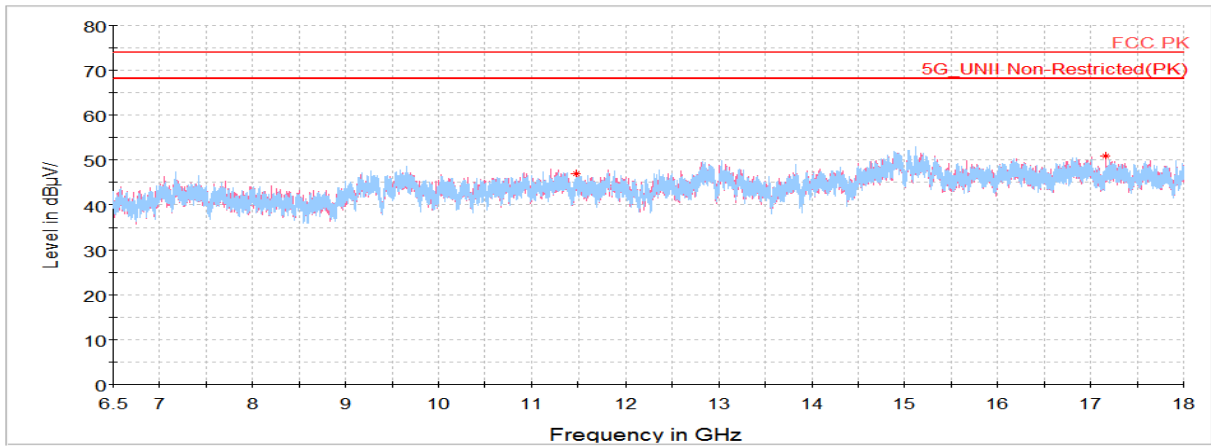

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (41) of (73)



5 825 MHz

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 870.94	V	40.93	35.17	-23.75	-	52.35	106.34	53.98
11 658.47 ¹⁾	V	57.37	38.43	-49.43	-	46.37	74.00	27.63
17 333.00	H	56.28	40.50	-46.75	-	50.03	68.20	18.17
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

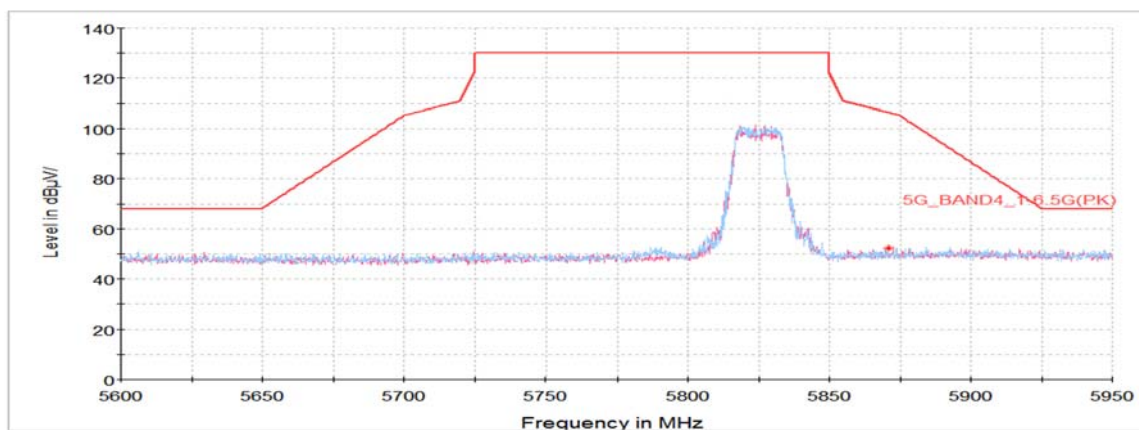


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (42) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

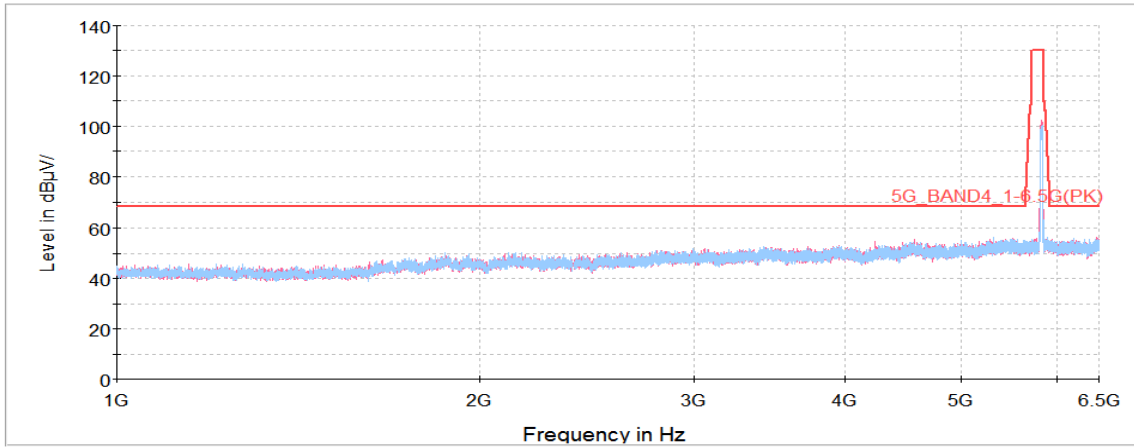

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

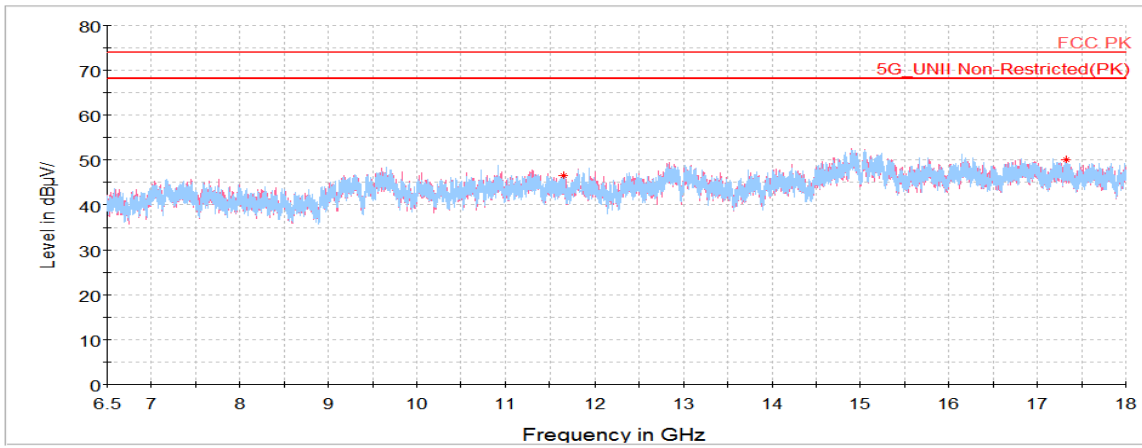

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (43) of (73)




802.11ac VHT20 UNII-3

5 745 MHz

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 722.09	H	53.88	35.02	-25.60	-	63.30	115.57	52.28
11 526.22 ¹⁾	H	58.58	38.32	-49.33	-	47.57	74.00	26.43
17 233.09	V	56.65	40.56	-46.73	-	50.48	68.20	17.72
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

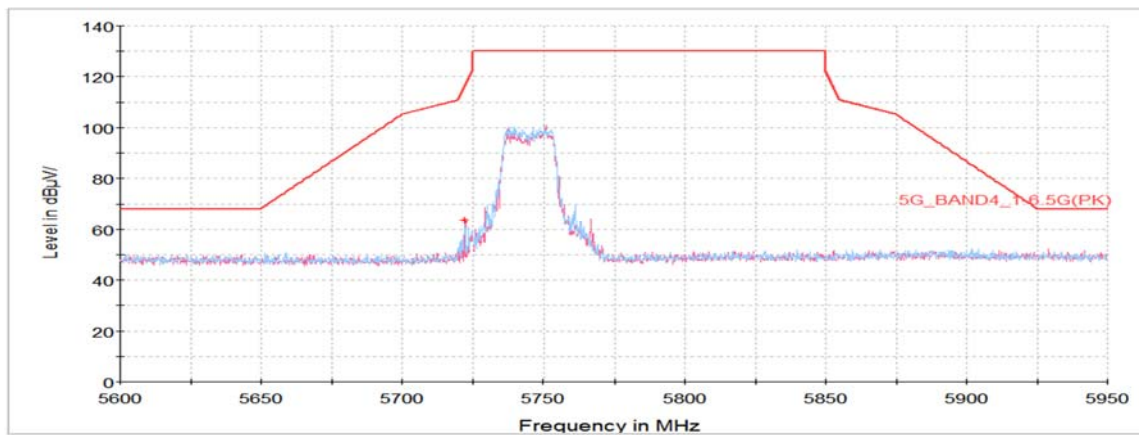


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (44) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

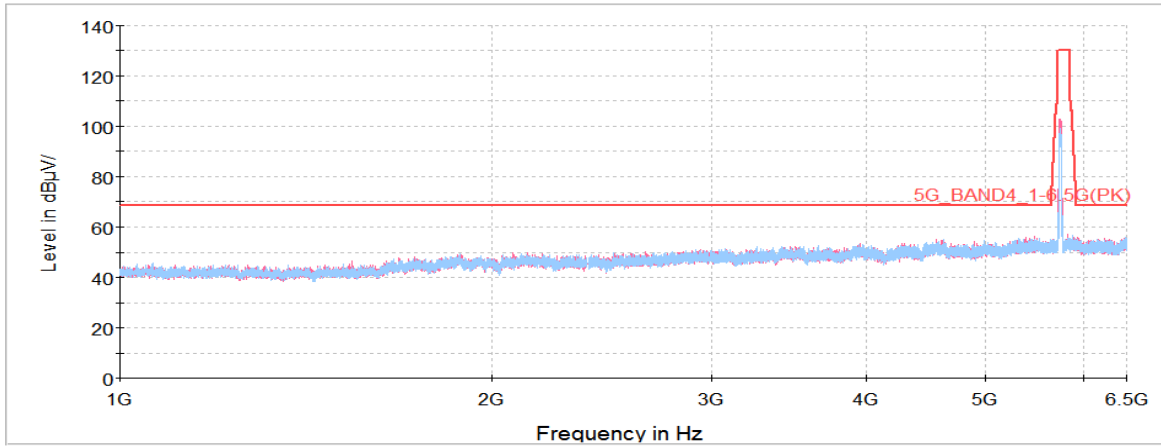

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

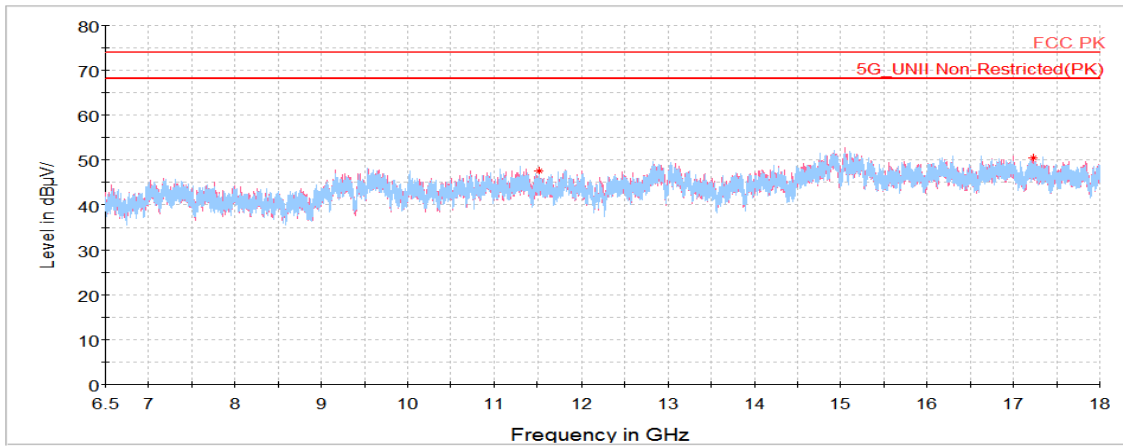

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (45) of (73)


**5 785 MHz**

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
11 578.69 ¹⁾	H	57.49	38.36	-49.37	-	46.48	74.00	27.52
17 258.97	H	56.24	40.54	-46.73	-	50.05	68.20	18.15
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

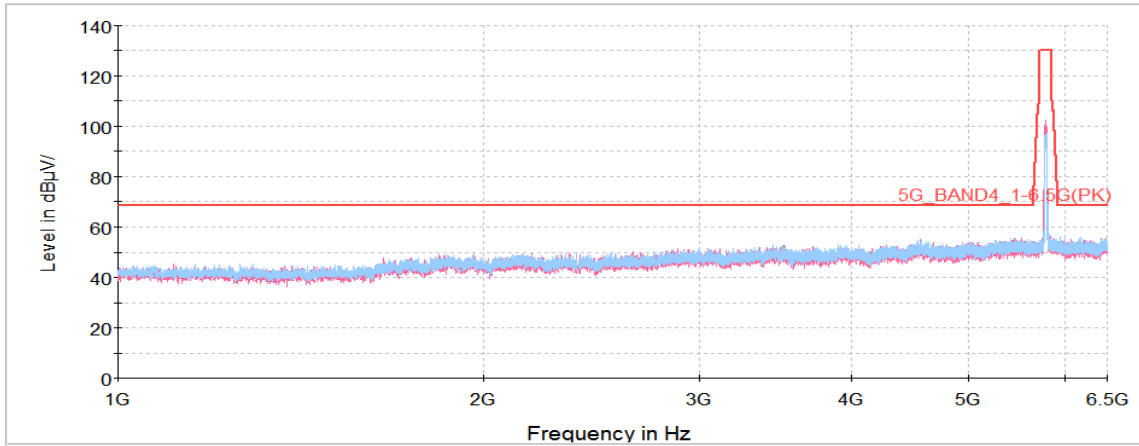

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

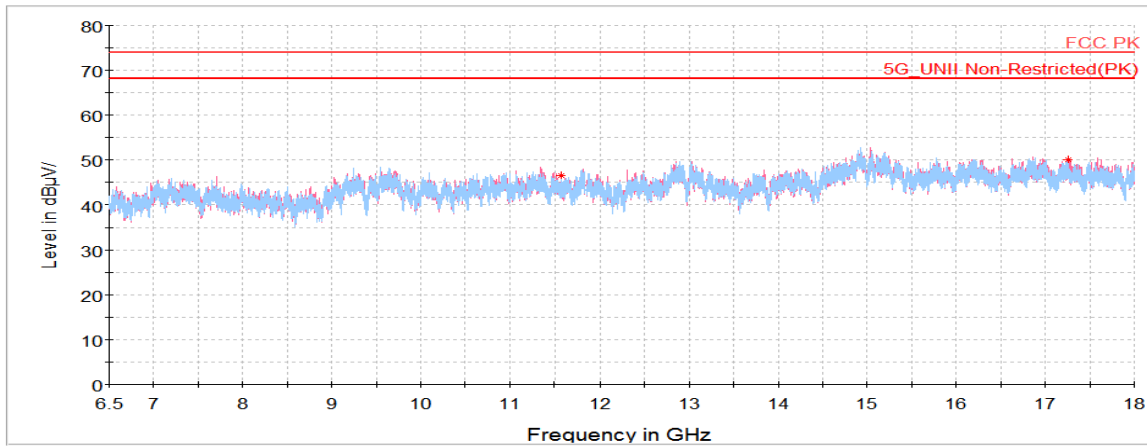

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (47) of (73)



5 825 MHz

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 895.34	H	41.27	35.20	-23.63	-	52.84	90.15	37.30
11 649.84 ¹⁾	V	58.45	38.42	-49.42	-	47.45	74.00	26.55
17 384.03	H	55.92	40.47	-46.77	-	49.62	68.20	18.58
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

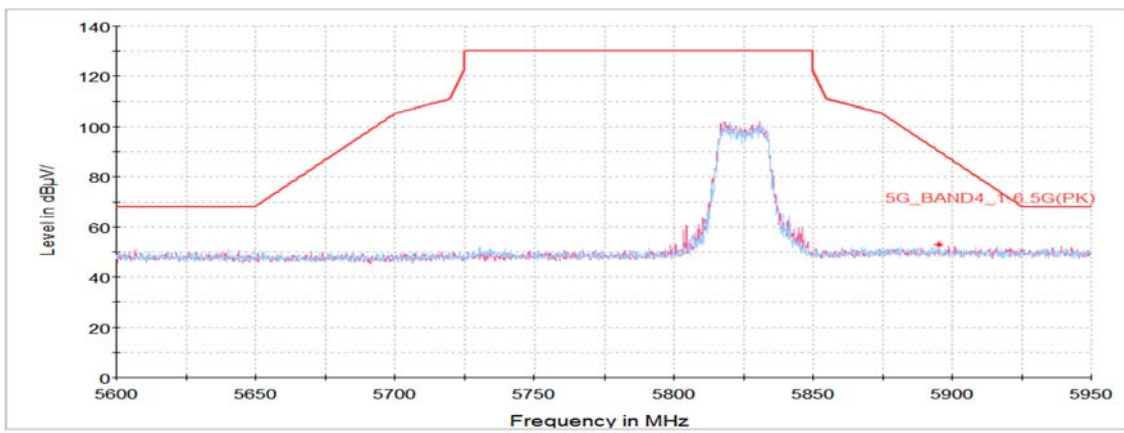


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (48) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

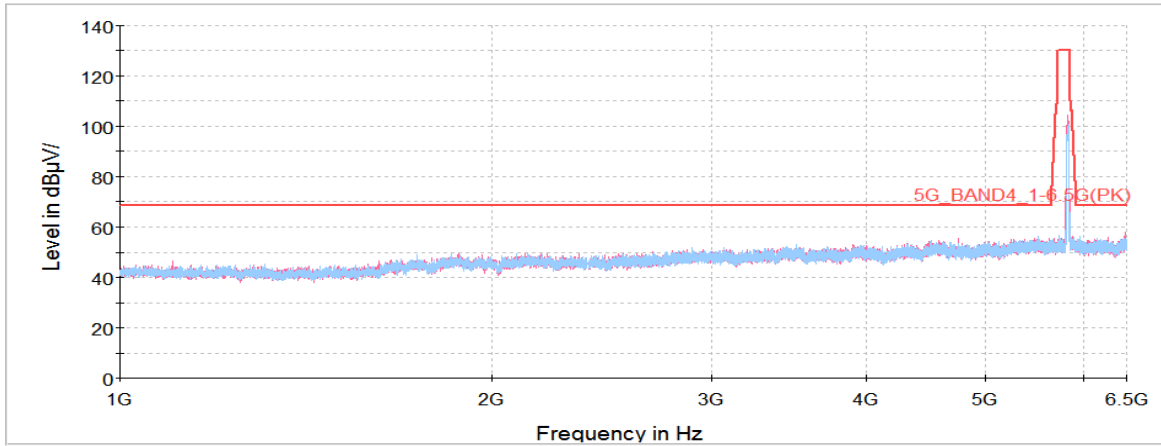

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

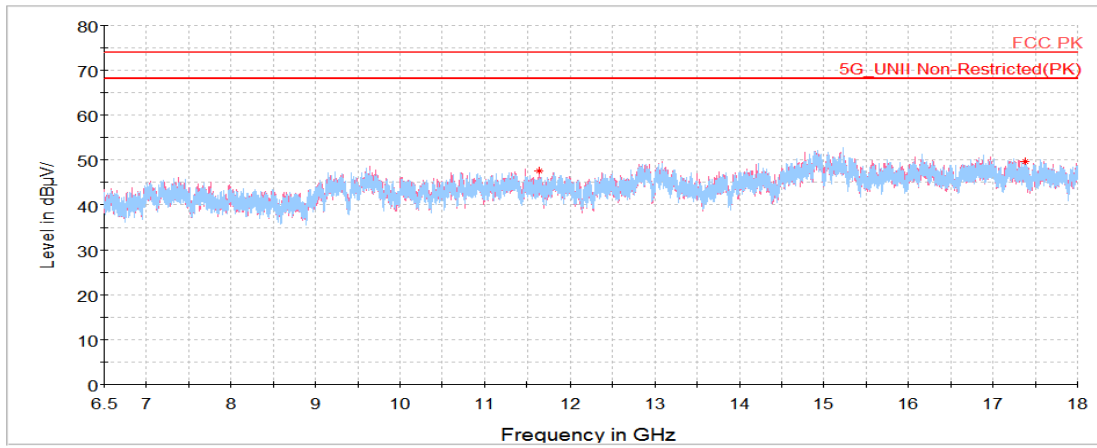


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (49) of (73)

**802.11ac VHT40 UNII-3****5 755 MHz**

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 723.98	H	58.57	35.02	-25.57	-	68.02	119.88	51.87
11 488.84 ¹⁾	H	58.32	38.30	-49.30	-	47.32	74.00	26.68
17 219.80	H	56.81	40.57	-46.72	-	50.66	68.20	17.54
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

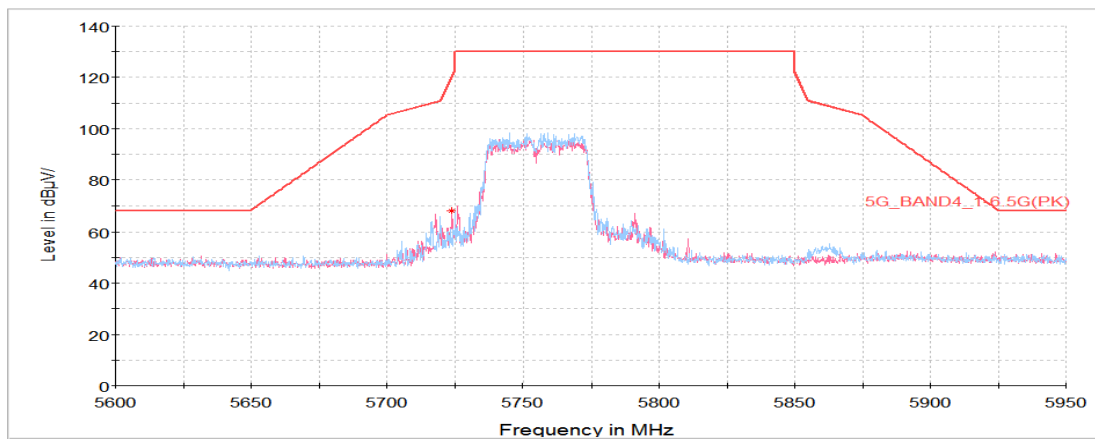Horizontal/Vertical for Band-edge


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (50) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

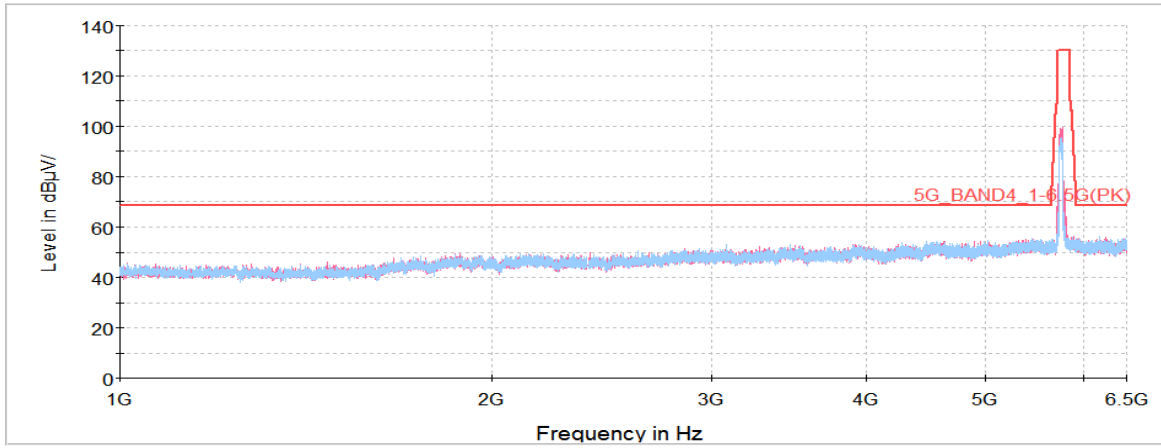

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

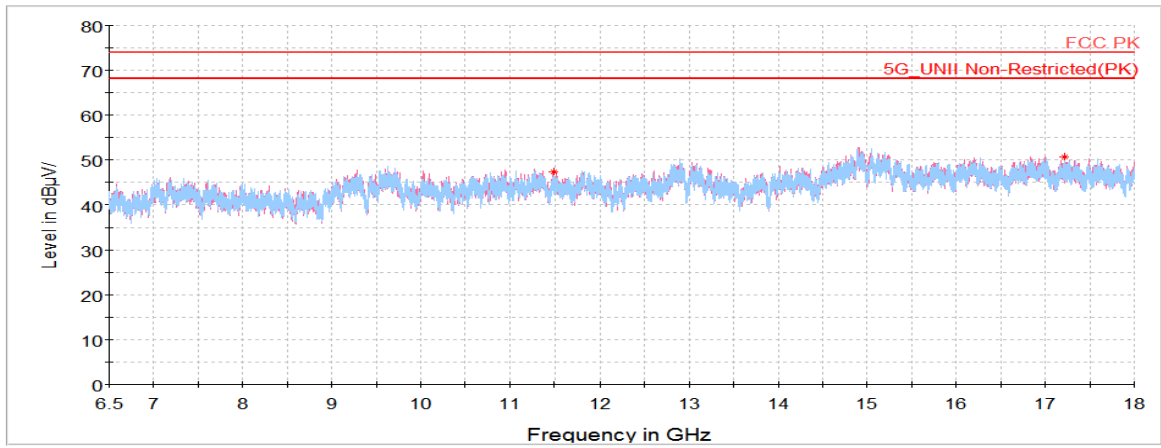

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (51) of (73)




5 795 MHz

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
5 865.78	H	41.28	35.17	-23.77	-	52.68	107.78	55.10
11 542.75 ¹⁾	H	58.05	38.33	-49.34	-	47.04	74.00	26.96
14 958.97	H	53.23	41.13	-41.61	-	52.75	68.20	15.45
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

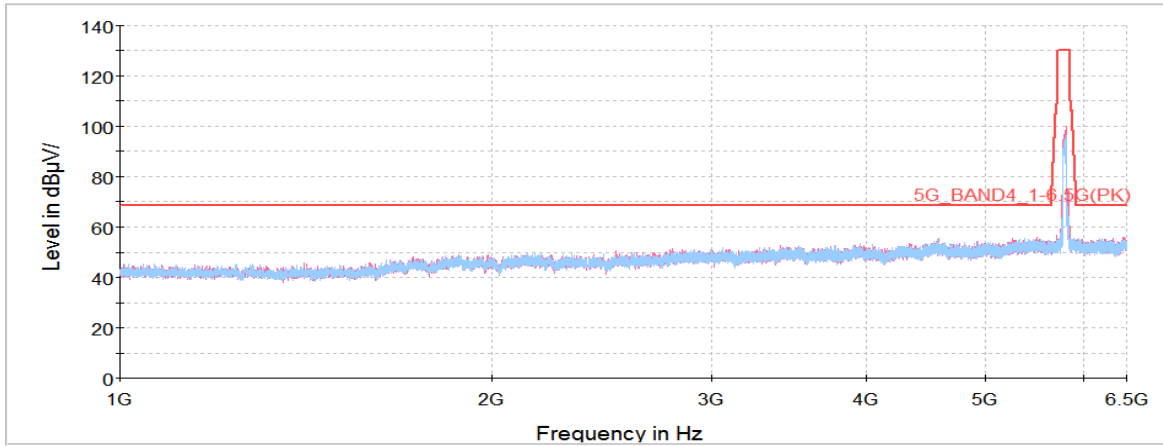

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

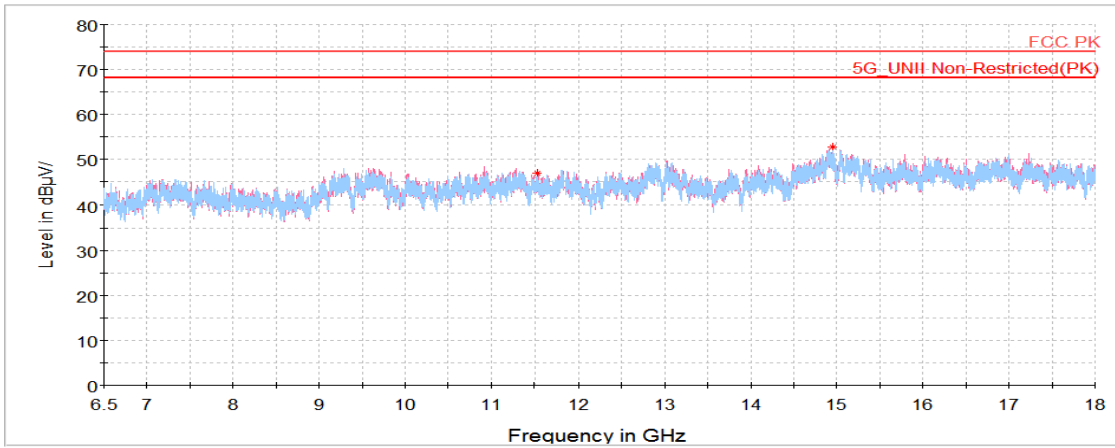

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (53) of (73)



Test results (Above 18 GHz) – Worst Case : 802.11ac VHT40_UNII 3_5 795 MHz

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

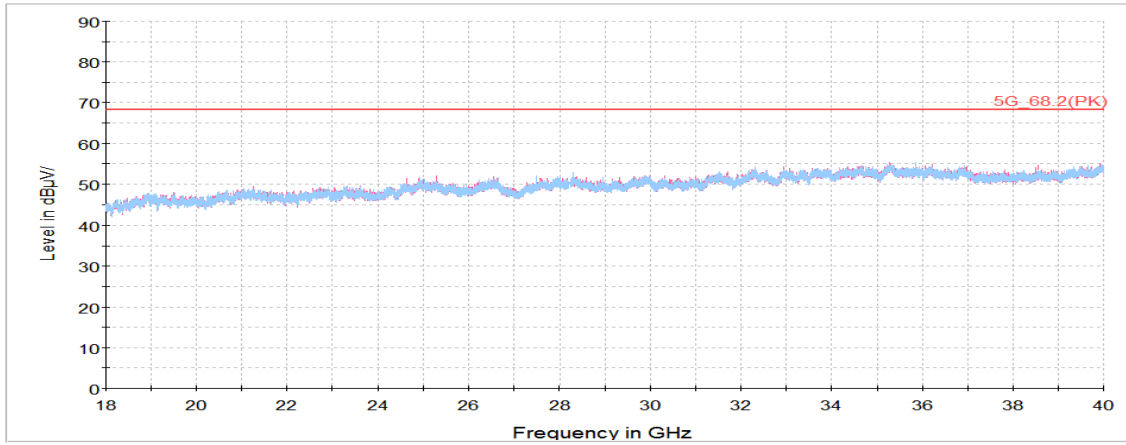

Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (54) of (73)




[DC 24 V]

Test results (Below 30 MHz) – Worst case: 802.11ac VHT40_UNII 3_5 755 MHz

Frequency	Pol.	Reading	Amp. + Cable	Antenna Factor	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Quasi peak data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical

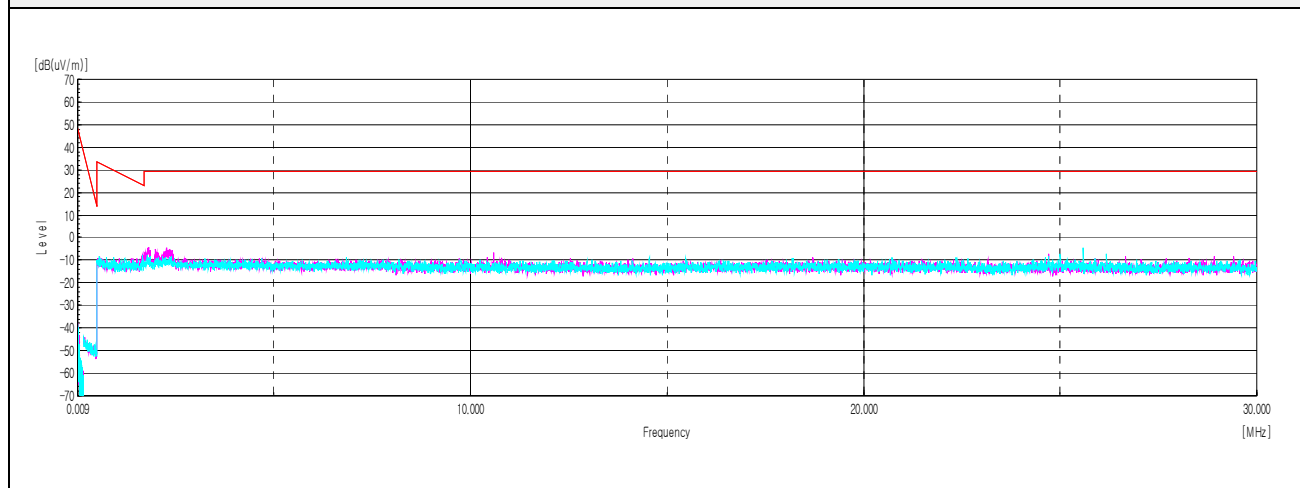

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (55) of (73)



Test results (Below 1 000 MHz) – Worst case: 802.11ac VHT40_UNII 3_5 755 MHz

Frequency	Pol.	Reading	Amp. + Cable	Antenna Factor	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Quasi peak data								
34.49	H	26.50	22.11	-30.36	-	18.25	40.00	21.75
35.34	H	26.80	21.53	-30.31	-	18.02	40.00	21.98
56.55	V	25.70	12.44	-29.70	-	8.44	40.00	31.56
112.45 ¹⁾	V	26.80	17.70	-28.53	-	15.97	43.50	27.53
115.00 ¹⁾	V	26.70	17.80	-28.43	-	16.07	43.50	27.43
115.97 ¹⁾	V	26.10	17.90	-28.47	-	15.53	43.50	27.97

Horizontal/Vertical

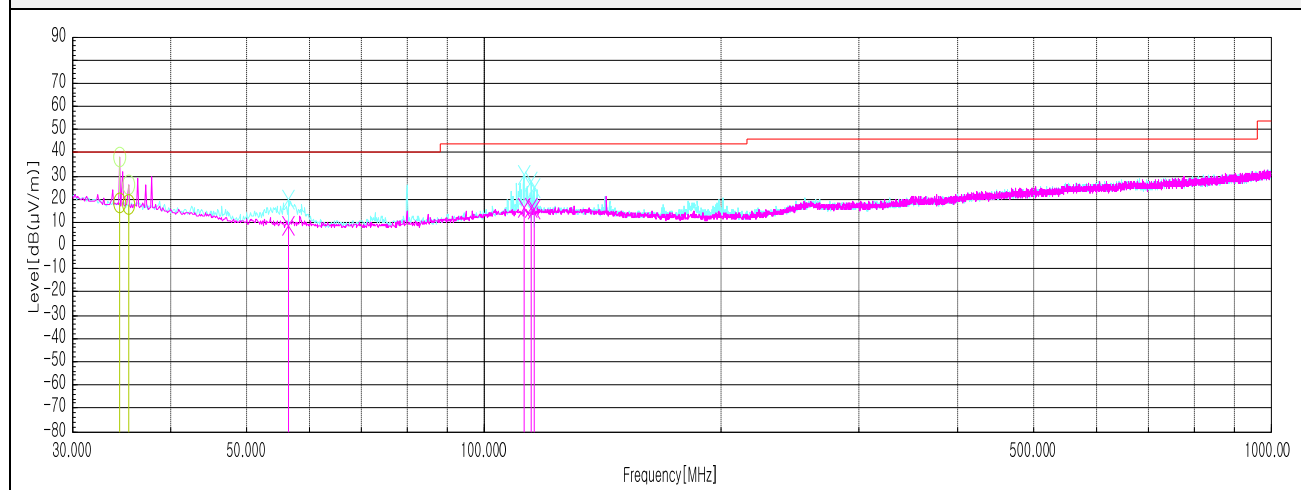

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (56) of (73)




Test results (Above 1 000 MHz)

802.11a UNII-3

5 745 MHz

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
5 724.33	V	51.79	35.02	-25.56	-	61.25	120.67	59.42
11 481.30 ¹⁾	H	59.68	38.30	-49.30	-	48.68	74.00	25.32
17 197.16	V	57.44	40.58	-46.72	-	51.30	68.20	16.90
Quasi peak data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical

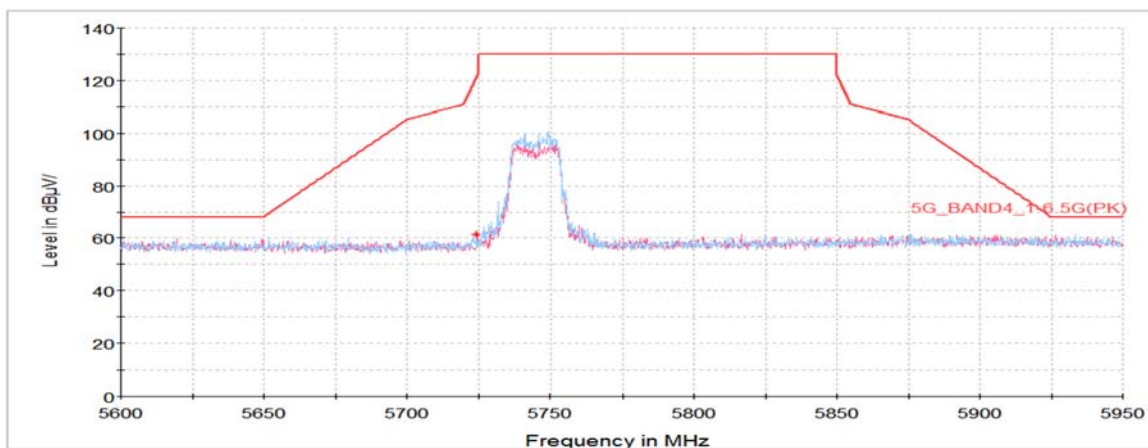


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (57) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

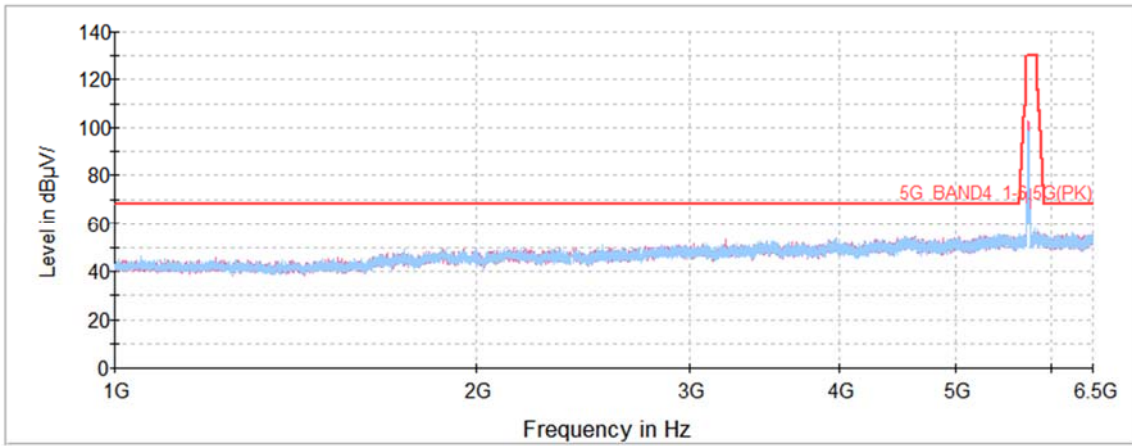

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

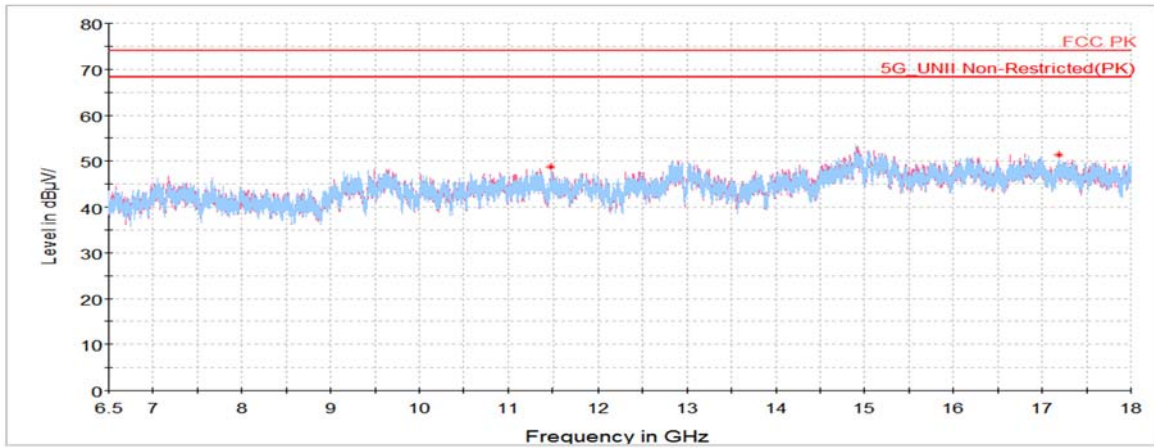

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (58) of (73)

**5 785 MHz**

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
11 540.23 ¹⁾	V	58.85	38.33	-49.34	-	47.84	74.00	26.16
17 245.67	H	57.66	40.55	-46.73	-	51.48	68.20	16.72
Quasi peak data								
No spurious emissions were detected within 20 dB of the limit.								


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (59) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

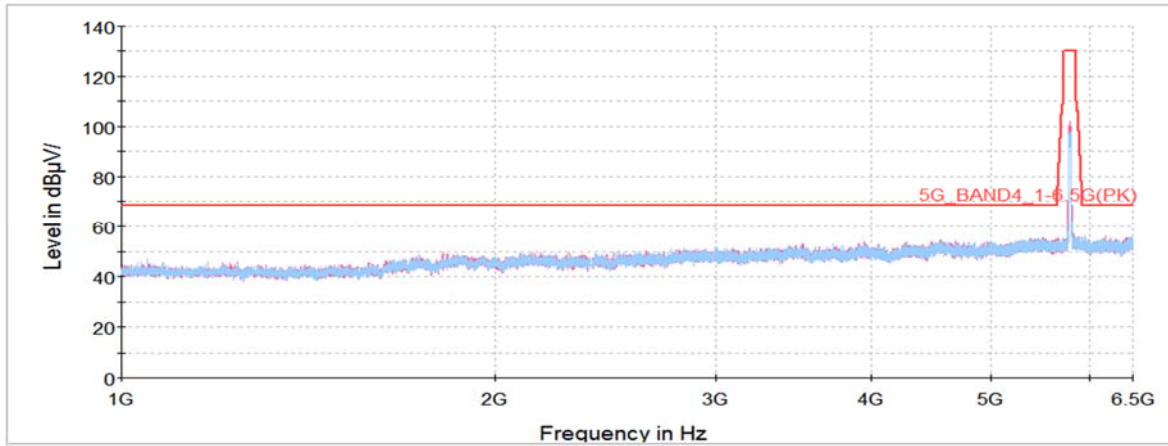

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

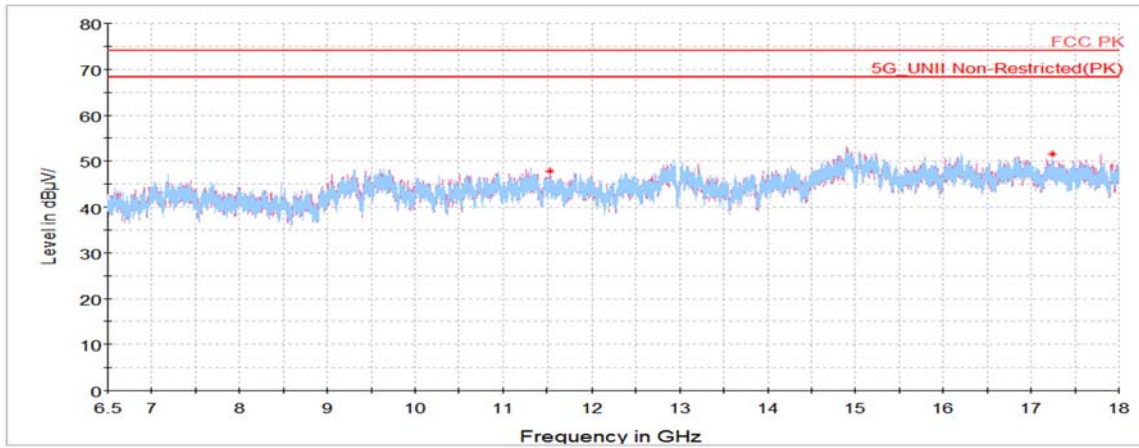

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (60) of (73)



5 825 MHz

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
5 852.38	V	48.46	35.15	-23.84	-	59.77	116.79	57.02
11 663.50 ¹⁾	H	58.46	38.43	-49.44	-	47.45	74.00	26.55
17 481.78	H	56.46	40.41	-46.79	-	50.08	68.20	18.12
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

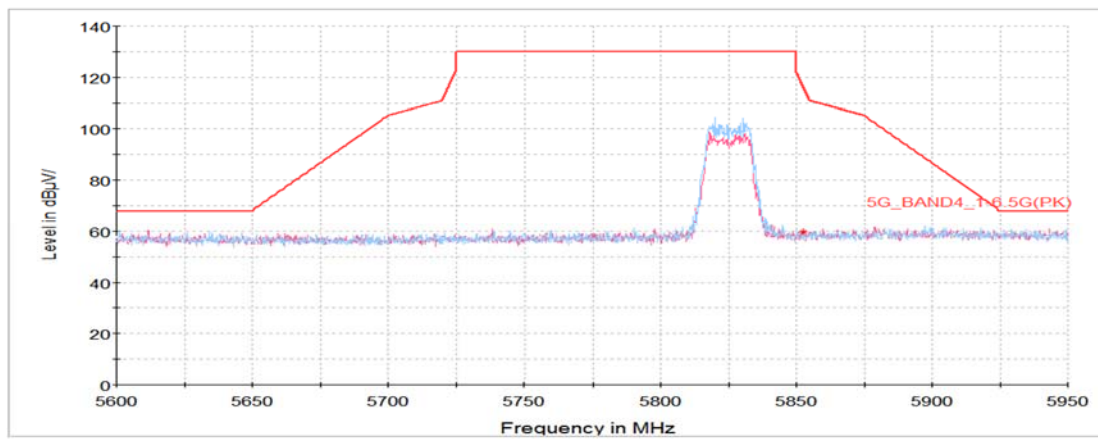


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (61) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

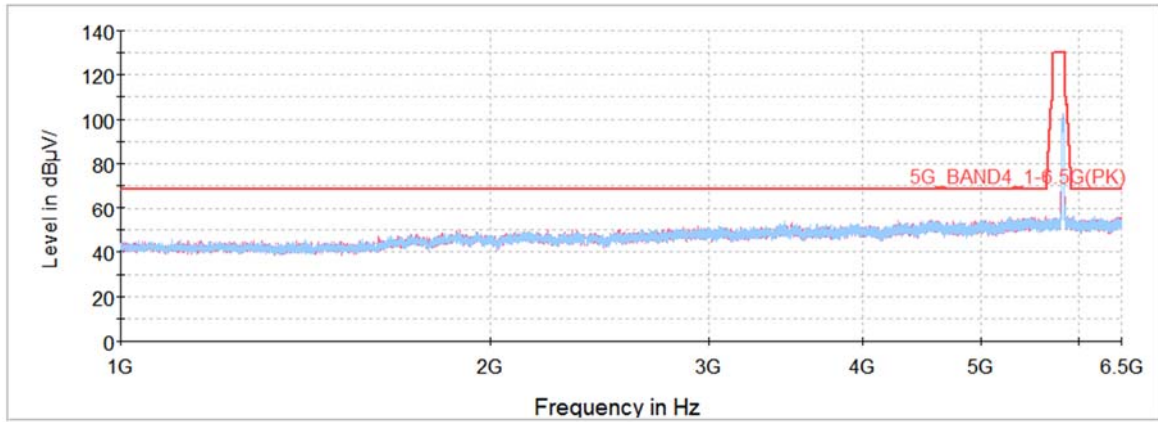

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

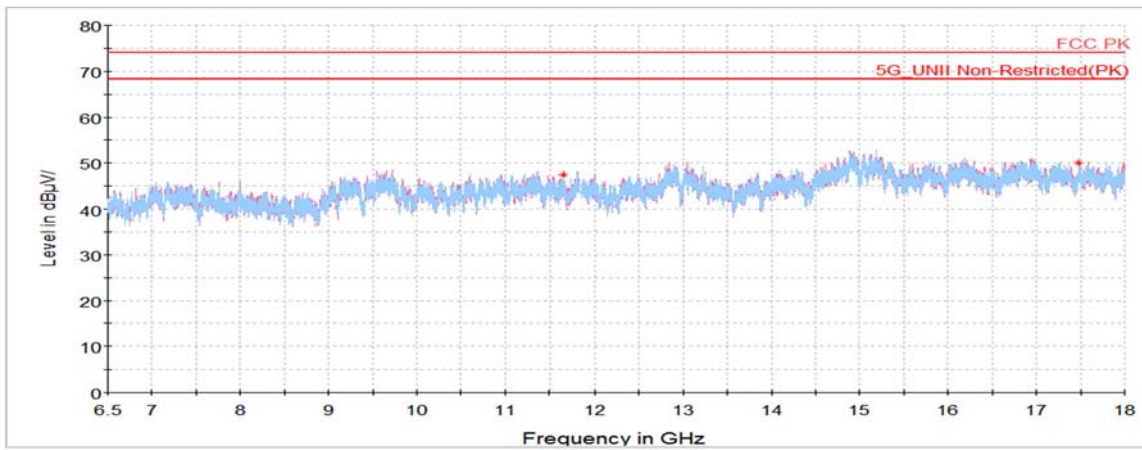

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (62) of (73)




802.11ac VHT20 UNII-3


5 745 MHz

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 723.47	H	56.57	35.02	-25.58	-	66.01	118.71	52.70
11 485.61 ¹⁾	V	58.14	38.30	-49.30	-	47.14	74.00	26.86
17 297.78	V	56.83	40.52	-46.74	-	50.61	68.20	17.59
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

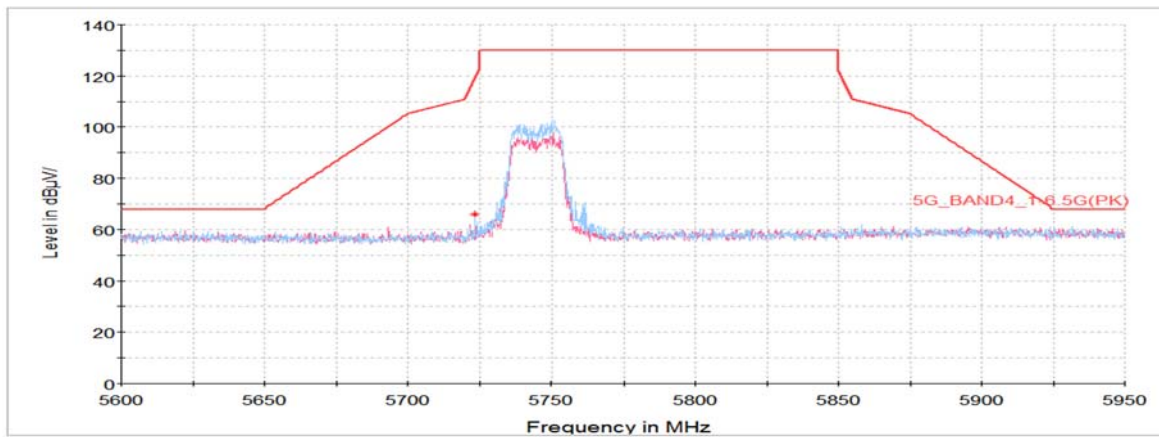

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

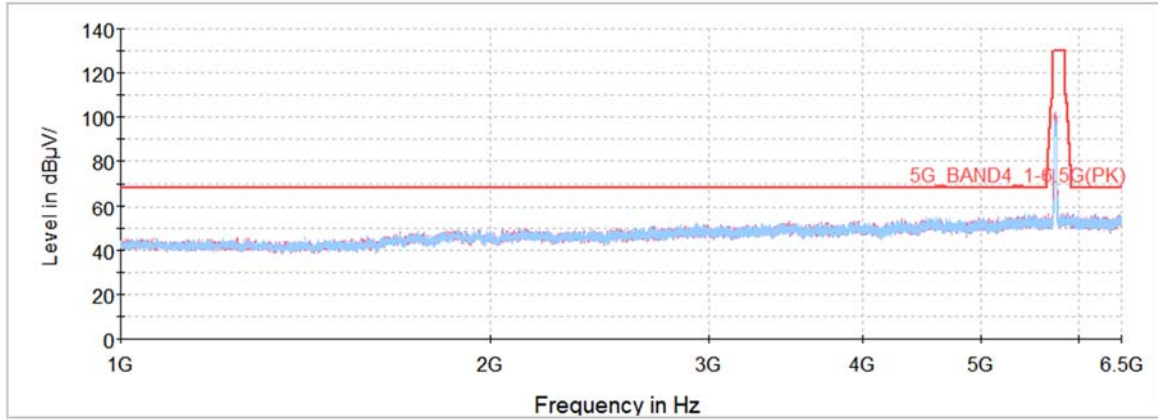

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

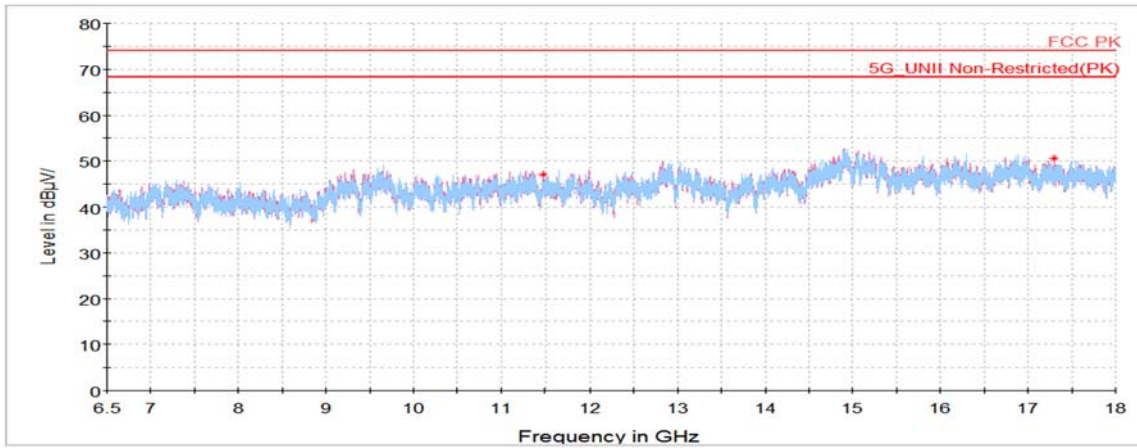

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (64) of (73)

**5 785 MHz**

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
11 530.89 ¹⁾	V	57.85	38.32	-49.33		46.84	74.00	27.16
17 316.83	H	56.86	40.51	-46.75		50.62	68.20	17.58
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (65) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

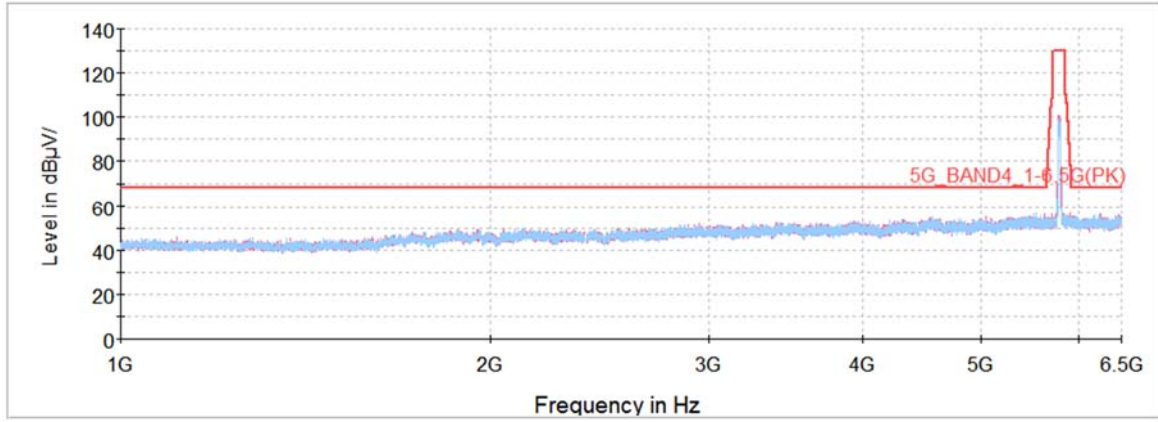

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

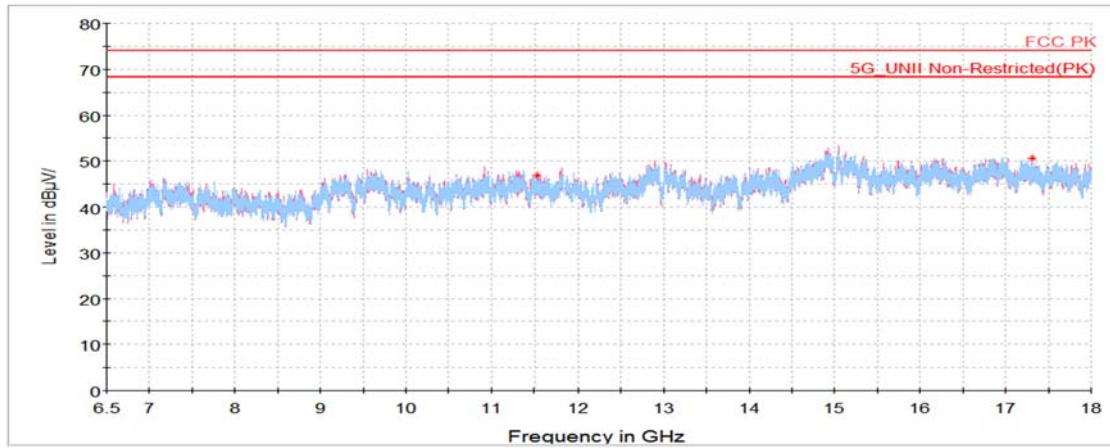

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (66) of (73)




5 825 MHz

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
5 853.23	H	48.98	35.15	-23.84	-	60.29	114.83	54.53
11 818.39 ¹⁾	H	60.19	38.55	-49.56	-	49.18	74.00	24.82
16 962.48	H	57.05	41.37	-46.71	-	51.71	68.20	16.49
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

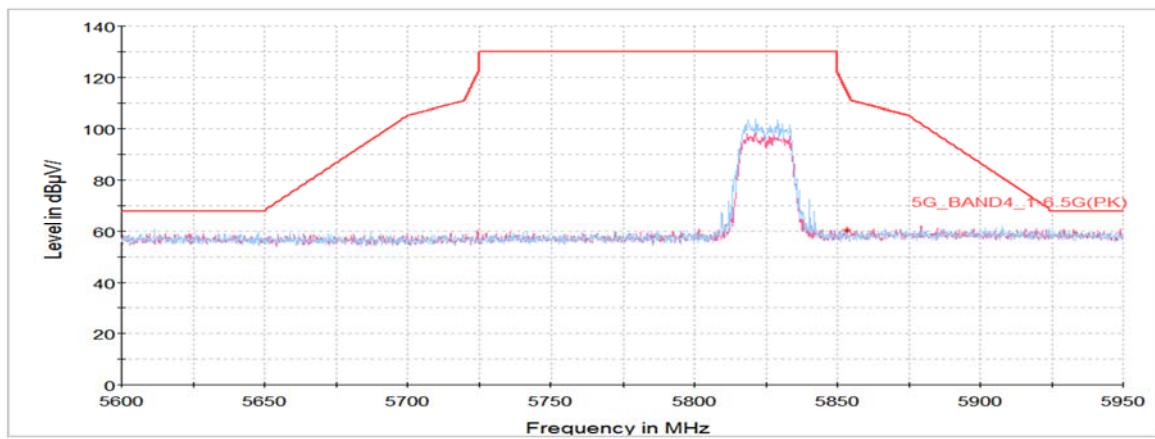

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

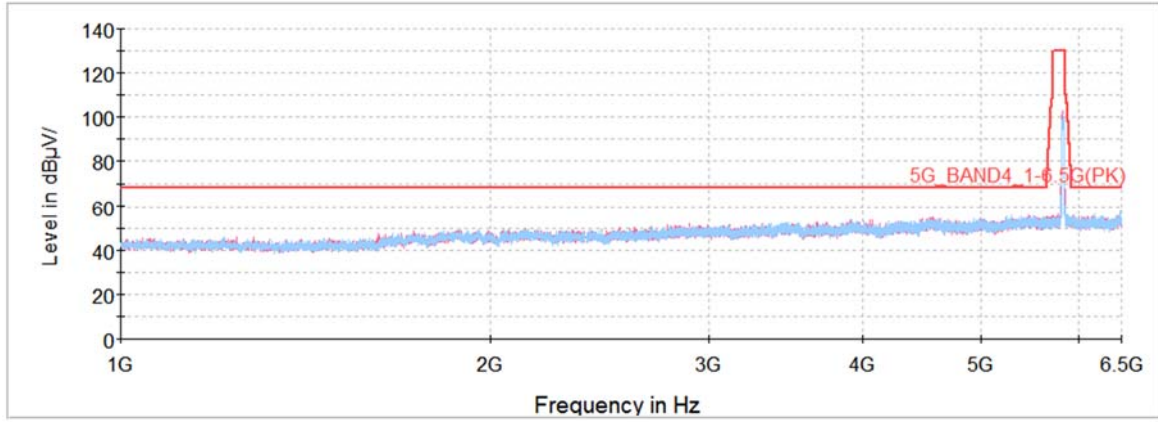

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

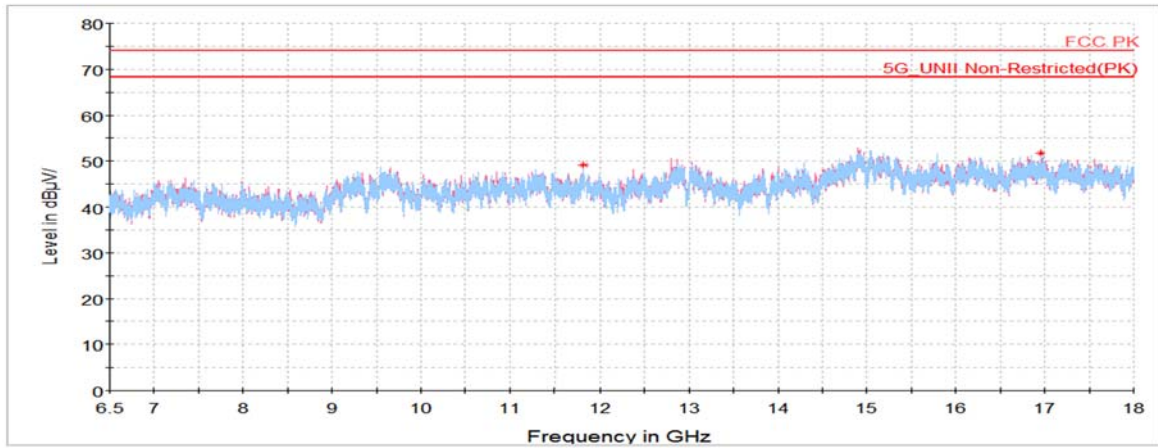

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (68) of (73)




802.11ac VHT40 UNII-3

5 755 MHz

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 726.05	H	61.78	35.03	-25.53	-	71.28	130.00	58.72
11 529.81 ¹⁾	V	57.76	38.32	-49.33	-	46.75	74.00	27.25
17 169.48	V	56.22	40.60	-46.71	-	50.11	68.20	18.09
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

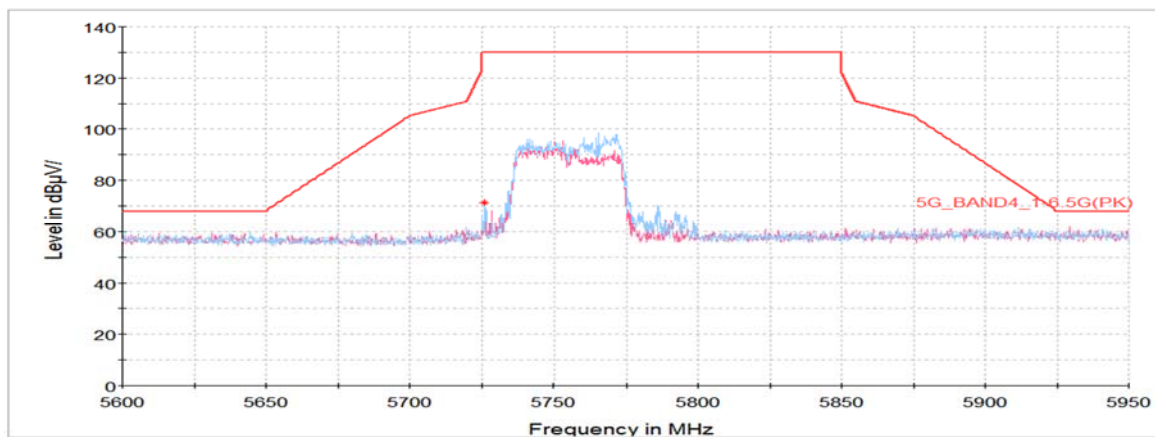


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (69) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

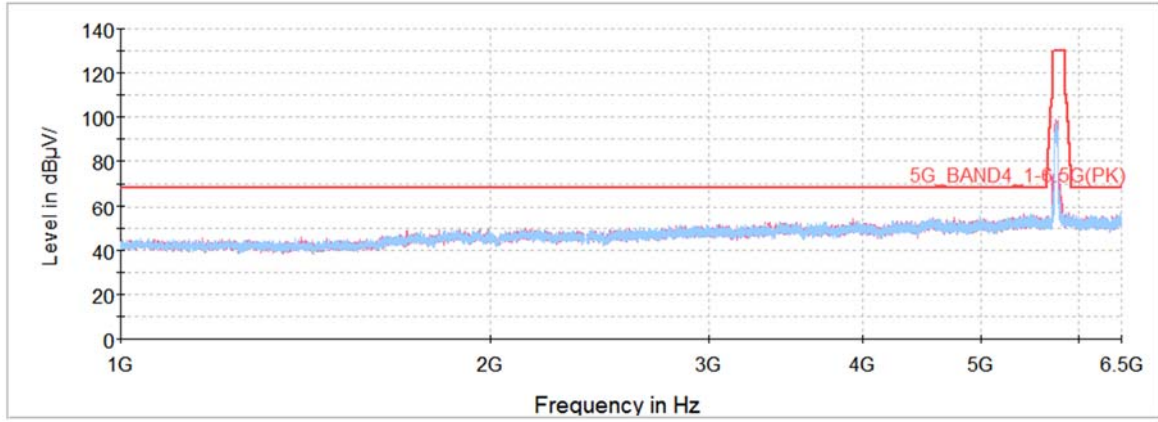

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

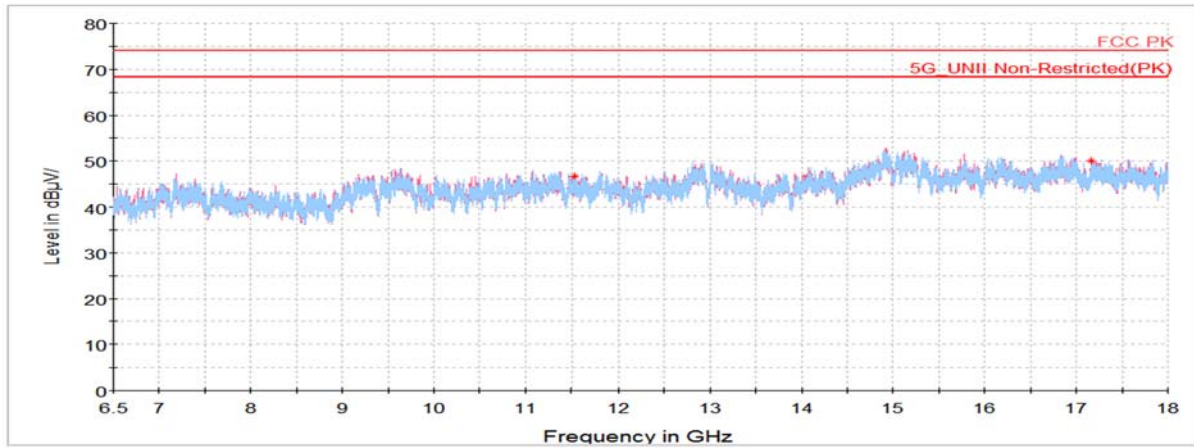

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (70) of (73)



5 795 MHz

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 854.78	H	49.32	35.15	-23.83	-	60.64	111.30	50.66
11 530.17 ¹⁾	H	58.74	38.32	-49.33	-	47.73	74.00	26.27
17 278.38	V	56.82	40.53	-46.74	-	50.61	68.20	17.59
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

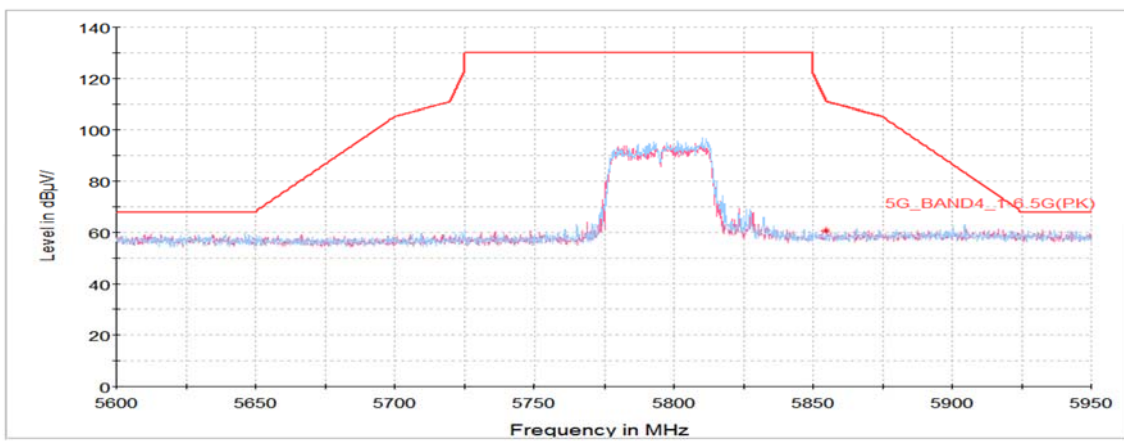


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0175
Page (71) of (73)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

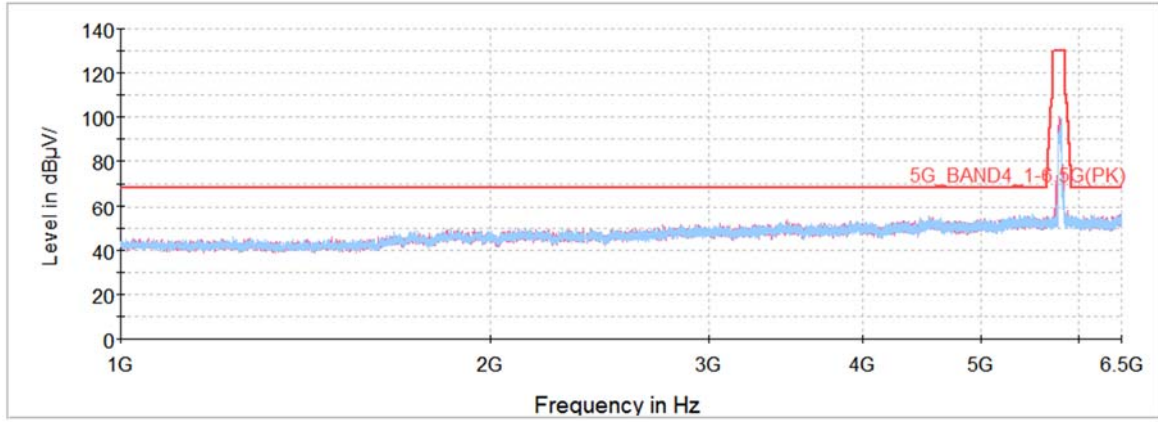

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

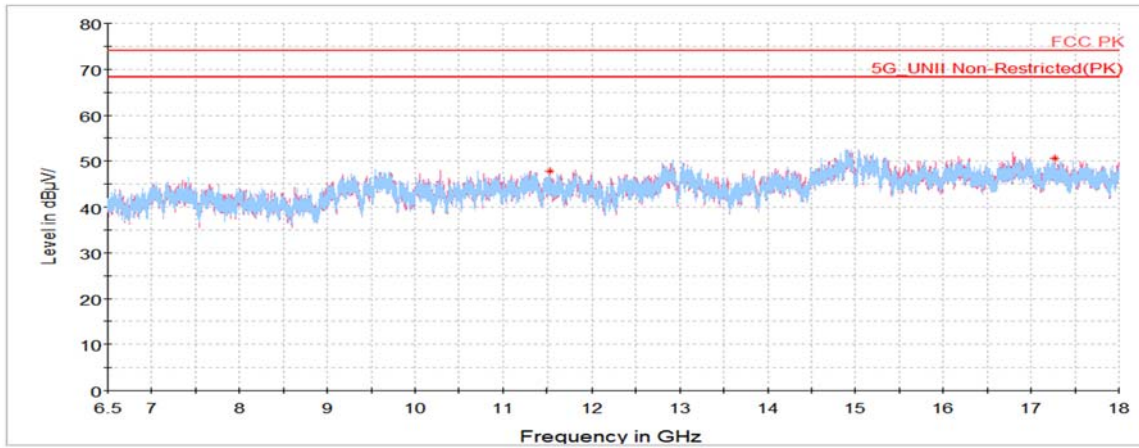

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (72) of (73)



Test results (Above 18 GHz) – Worst Case : 802.11ac VHT20_UNII 3_5 825 MHz

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

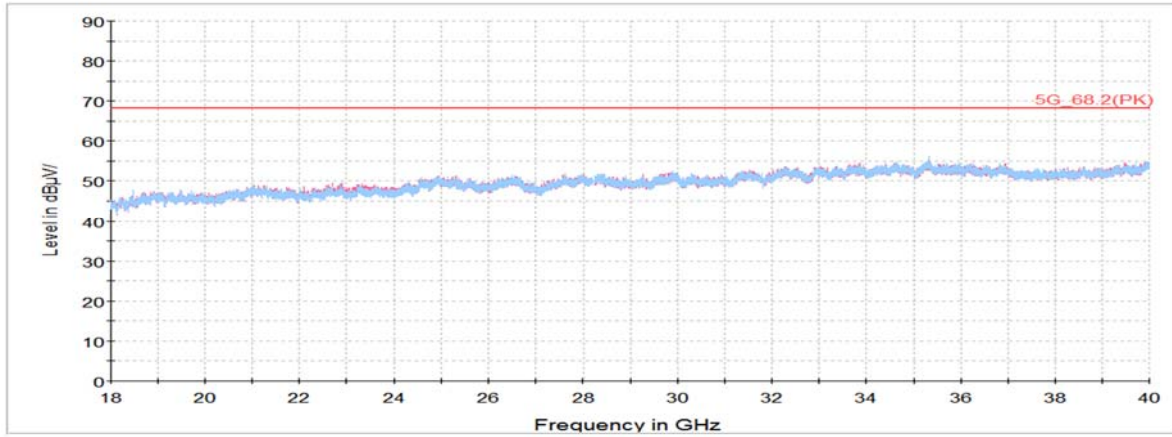

Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0175
Page (73) of (73)

KCTL**8. Measurement equipment**

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Vector Signal Generator	R&S	SMBV100A	257566	22.07.09
Signal Generator	R&S	SMB100A	176206	22.01.20
Spectrum Analyzer	R&S	FSV30	100808	22.07.27
DC Power Supply	AGILENT	E3632A	MY40007371	22.05.10
Attenuator	API Inmet	40AH2W-10	10	22.07.29
Attenuator	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31211	22.05.11
Power Sensor	R&S	NRP-Z81	1137.9009.02- 106223-bB	22.05.11
Spectrum Analyzer	R&S	FSV40	100989	21.12.23
EMI TEST RECEIVER	R&S	ESC17	100732	22.03.05
ATTENUATOR	KEYSIGHT	8491B-6dB	MY39271060	21.12.24
Bilog Antenna	TESEQ	CBL 6112D	55545	22.04.24
Amplifier	SONOMA INSTRUMENT	310N	284608	22.08.19
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	22.04.23
Horn antenna	ETS.lindgren	3117	155787	21.10.28
Horn antenna	ETS.lindgren	3116	00086635	22.05.17
Attenuator	API Inmet	40AH2W-10	12	22.05.11
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	22.07.27
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2003683	21.08.28*
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	22.01.21
LOOP Antenna	R&S	HFH2-Z2	100355	22.08.21
Highpass Filter	WT	WT-A1698-HS	WT160411001	22.05.10
Cable Assembly	RadiAll	2301761768000PJ	1724.659	-
Cable Assembly	gigalane	RG-400	-	-
Cable Assembly	HUER+SUHNER	SUCOFLEX 104	MY4342/4	-
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-

* Tests related to this equipment were carried out prior to the calibration due date.

End of test report