



FCC RF Test Report

APPLICANT : Lenovo Mobile Communication Technology Ltd.
EQUIPMENT : Lenovo Mobile Phone
BRAND NAME : Lenovo
MODEL NAME : Lenovo A7010a48
FCC ID : YCNA7010A48
STANDARD : 47 CFR Part 2, 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Nov. 23, 2015 and completely tested on Dec. 05, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....3
SUMMARY OF TEST RESULT4
1 GENERAL DESCRIPTION5
1.1 Applicant.....5
1.2 Manufacturer.....5
1.3 Product Feature of Equipment Under Test.....5
1.4 Product Specification subjective to this standard5
1.5 Modification of EUT6
1.6 Component List.....6
1.7 Maximum EIRP Power, Frequency Tolerance, and Emission Designator6
1.8 Testing Location7
1.9 Applicable Standards.....7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST8
2.1 Test Mode.....8
2.2 Connection Diagram of Test System.....9
2.3 Support Unit used in test configuration and system9
2.4 Measurement Results Explanation Example.....9
2.5 Frequency List of Low/Middle/High Channels10
3 CONDUCTED TEST ITEMS11
3.1 Measuring Instruments11
3.2 Test Setup11
3.3 Test Result of Conducted Test11
3.4 Conducted Output Power12
3.5 Peak-to-Average Ratio13
3.6 Occupied Bandwidth.....14
3.7 Conducted Band Edge15
3.8 Conducted Spurious Emission17
3.9 Frequency Stability18
4 RADIATED TEST ITEMS19
4.1 Measuring Instruments19
4.2 Test Setup19
4.3 Test Result of Radiated Test19
4.4 Effective Isotropic Radiated Power.....20
4.5 Radiated Spurious Emission22
5 LIST OF MEASURING EQUIPMENT23
6 UNCERTAINTY OF EVALUATION24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG5N2306B	Rev. 01	Initial issue of report	Dec. 11, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	$< 55 + 10 \log_{10}(P[\text{Watts}])$	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7)	EIRP < 2Watt	PASS	-
4.5	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	$< 55 + 10 \log_{10}(P[\text{Watts}])$	PASS	Under limit 3.01 dB at 10104.000 MHz



1 General Description

1.1 Applicant

Lenovo Mobile Communication Technology Ltd.

No. 999, Qishan North 2nd Road, Information & Optoelectronics Park, Torch Hi-tech Industry Development Zone, Xiamen, P. R. China

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Lenovo Mobile Phone
Brand Name	Lenovo
Model Name	Lenovo A7010a48
FCC ID	YCNA7010A48
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+/DC-HSDPA/LTE/NFC/ WLAN2.4GHz 802.11b/g/n HT20/HT40/ WLAN5GHz 802.11a/n HT20/HT40/ WLAN5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0+EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 867802020004173/867802020004181 Radiation: 867802020035011/867802020035029 EIRP: 867802020035011/867802020035029
HW Version	H205
SW Version	A7010a48_ENG_S100_1508010
EUT Stage	Identical Prototype

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz
Rx Frequency	LTE Band 7 : 2622.5MHz ~ 2687.5 MHz
Bandwidth	LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 7 : 23.28 dBm
Type of Modulation	QPSK / 16QAM



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Component List

Note: There are two types of EUT, the details refer the following table. According to the difference, we evaluate is not affect RF performance, so only choose sample 1 to perform RF test.

Component	Sample 1	Sample 2
Front camera	QTECH F5693AQ	O-film L5693F20
Back Camera	O-film L3M2A00	SUNNY F13S05P
LCD Panel	Tianma TL055VDXP47-00	BOE BS055FHM-A00-6904
Battery	Lenovo(SCUD) BL256	Lenovo(Veken) BL256
Memory	Samsung KM4Z0013M-B809	Hynix H9TQ26ABJTMCUR-KUM

1.7 Maximum EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 7	QPSK			16QAM		
	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	4M52G7D	-	0.3926	4M51W7D	-	0.4064
10	9M11G7D	0.0050	0.3945	9M11W7D	-	0.3170
15	13M5G7D	-	0.3864	13M4W7D	-	0.3170
20	18M4G7D	-	0.3715	18M5W7D	-	0.3083



1.8 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH02-KS	418269

Note: The test site complies with ANSI C63.4 2009 requirement.

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 27(M)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	7	-	-	√	√	√	√	√	√	√	√	√	√	√	√
Peak-to-Average Ratio	7	-	-				√	√	√	√		√	√	√	√
26dB and 99% Bandwidth	7	-	-	√	√	√	√	√	√			√	√	√	√
Conducted Band Edge	7	-	-	√	√	√	√	√	√	√		√			√
Conducted Spurious Emission	7	-	-	√	√	√	√	√	√	√			√	√	√
Frequency Stability	7	-	-		√			√				√		√	
E.I.R.P.	7	-	-	√	√	√	√	√	√	√			√	√	√
Radiated Spurious Emission	7	-	-	√	√	√	√	√		√				√	
Note	<ol style="list-style-type: none"> The mark "√" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 														

2.2 Connection Diagram of Test System

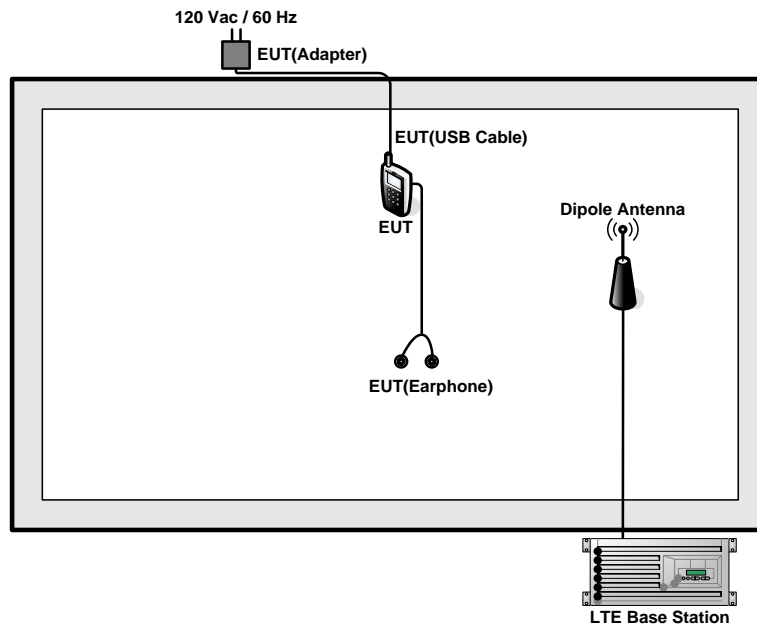

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTRON	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss

$Offset = RF\ cable\ loss.$

Following shows an offset computation example with cable loss 5.2 dB.

Example :

$Offset(dB) = RF\ cable\ loss(dB).$

$= 5.2\ (dB)$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

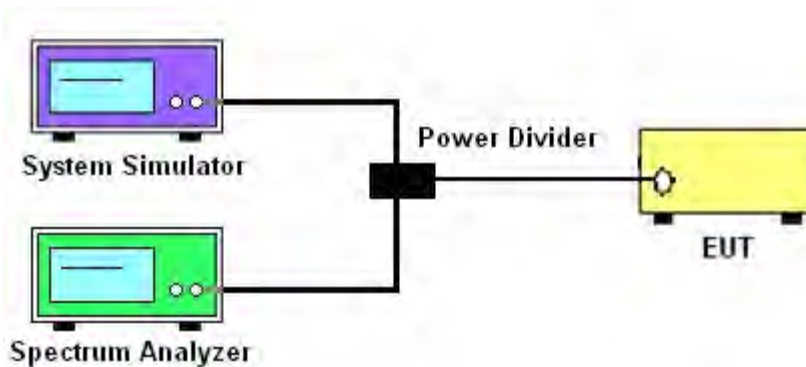

3.2.3 Frequency Stability

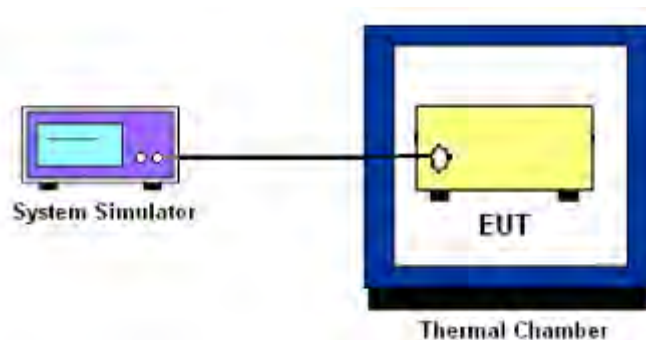

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4) for FCC Band 7:

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

9. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.

The limit line is derived from $40 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [40 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[40 + 10\log(P)]$ (dB)
= -10dBm

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [55 + 10\log(P)]$ (dB)
= $[55 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
= -25dBm



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

10. For Band 7

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [55+ 10log(P)] (dB)
= [30+ 10log(P)] (dBm) - [55+ 10log(P)] (dB)
= -25dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

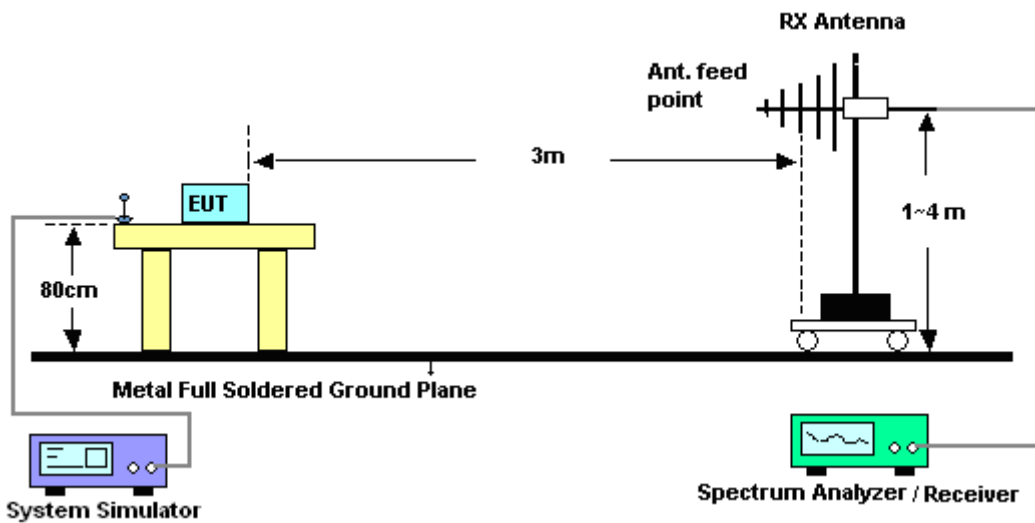

4.2.2 For radiated test above 1GHz

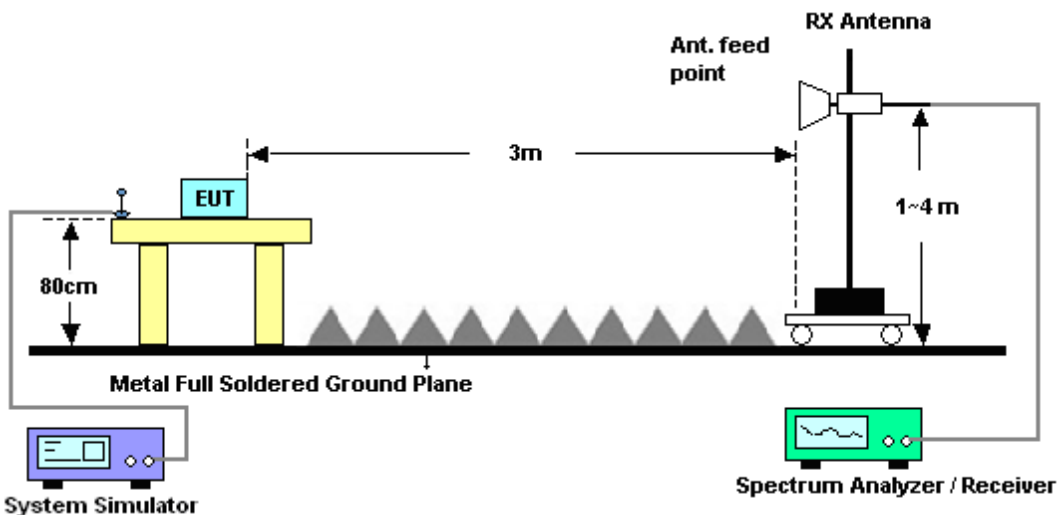

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Effective Isotropic Radiated Power

4.4.1 Description of the EIRP Measurement

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 7.

4.4.2 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	LTE Average					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100



4.5 Radiated Spurious Emission

4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

12. $EIRP$ (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
13. ERP (dBm) = $EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	9kHz~30GHz	May 04, 2015	Nov. 28, 2015~ Dec. 01, 2015	May 03, 2016	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 24, 2015	Nov. 28, 2015~ Dec. 01, 2015	Oct. 23, 2016	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Sep. 10, 2015	Dec. 05, 2015	Sep. 09, 2016	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz;Ma x 30dBm	Sep. 10, 2015	Dec. 05, 2015	Sep. 09, 2016	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz-2GHz	Sep. 12, 2015	Dec. 05, 2015	Sep. 11, 2016	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 07, 2015	Dec. 05, 2015	Nov. 06, 2016	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz ~40GHz	Mar. 03, 2015	Dec. 05, 2015	Mar. 02, 2016	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz ~1000MHz / 32 dB	May 04, 2015	Dec. 05, 2015	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 24, 2015	Dec. 05, 2015	Oct. 23, 2016	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Dec. 05, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Dec. 05, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Dec. 05, 2015	NCR	Radiation (03CH02-KS)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.83	22.97	22.98
20	1	49		22.72	23.20	22.92
20	1	99		22.84	23.24	23.05
20	50	0		21.86	22.14	22.05
20	50	24		21.84	22.21	22.03
20	50	50		21.89	22.27	22.09
20	100	0		21.86	22.18	22.05
20	1	0	16-QAM	22.05	22.21	22.27
20	1	49		21.94	22.32	22.13
20	1	99		22.09	22.40	22.22
20	50	0		20.82	21.12	21.03
20	50	24		20.79	21.17	21.01
20	50	50		20.84	21.22	21.02
20	100	0		20.35	21.14	21.00
15	1	0	QPSK	22.79	23.12	22.98
15	1	37		22.70	23.26	22.93
15	1	74		22.79	23.28	22.96
15	36	0		21.87	22.16	22.05
15	36	20		21.81	22.24	22.02
15	36	39		21.84	22.28	22.07
15	75	0		21.85	22.22	22.03
15	1	0	16-QAM	22.03	22.26	22.17
15	1	37		21.95	22.34	22.09
15	1	74		22.05	22.39	22.16
15	36	0		20.84	21.13	20.99
15	36	20		20.77	21.19	21.01
15	36	39		20.80	21.23	21.04
15	75	0		20.81	21.17	21.02



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.76	23.12	22.92
10	1	25		22.66	23.20	22.90
10	1	49		22.68	23.23	22.91
10	25	0		21.81	22.15	21.97
10	25	12		21.79	22.18	22.00
10	25	25		21.77	22.24	22.01
10	50	0		21.83	22.20	22.00
10	1	0	16-QAM	21.97	22.25	22.16
10	1	25		21.89	22.30	22.15
10	1	49		21.93	22.34	22.13
10	25	0		20.77	21.10	20.98
10	25	12		20.75	21.14	20.96
10	25	25		20.73	21.18	21.00
10	50	0		20.79	21.15	21.00
5	1	0	QPSK	22.74	23.14	22.89
5	1	12		22.71	23.23	22.92
5	1	24		22.63	23.16	22.84
5	12	0		21.86	22.19	22.04
5	12	7		21.82	22.20	22.03
5	12	13		21.82	22.22	22.04
5	25	0		21.81	22.18	21.99
5	1	0	16-QAM	21.93	22.26	22.13
5	1	12		21.92	22.32	22.14
5	1	24		21.83	22.25	22.05
5	12	0		20.83	21.15	21.00
5	12	7		20.78	21.16	20.99
5	12	13		20.79	21.18	21.00
5	25	0		20.76	21.13	20.95




Peak-to-Average Ratio

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	RB Size	Result
Lowest CH	4.38	5.13	5.30	5.94	PASS
Middle CH	4.61	5.07	6.32	5.97	
Highest CH	4.64	4.96	5.57	5.74	



LTE Band 7 / 20MHz / QPSK

Lowest Channel / 1RB

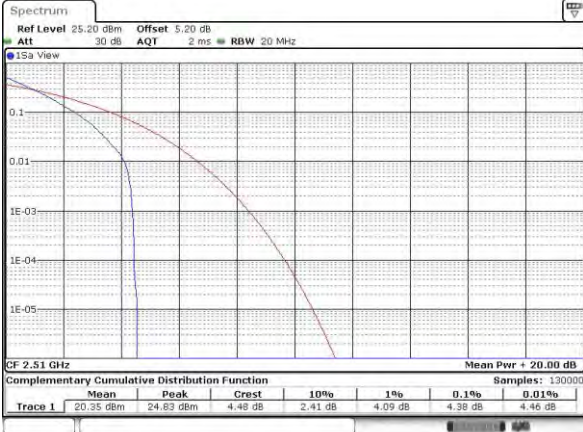


Date: 28 NOV 2015 18:50:25

Lowest Channel / Full RB




Date: 28 NOV 2015 18:50:35

Middle Channel / 1RB

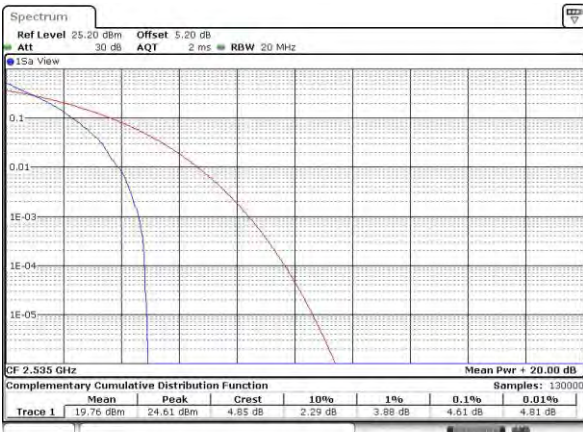


Date: 28 NOV 2015 18:51:23

Middle Channel / Full RB

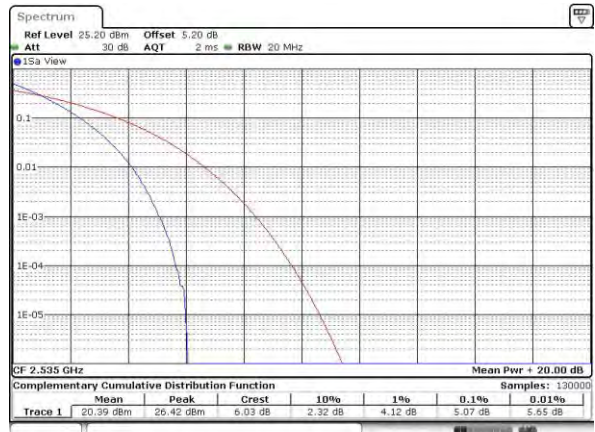


Date: 28 NOV 2015 18:51:11

Highest Channel / 1RB

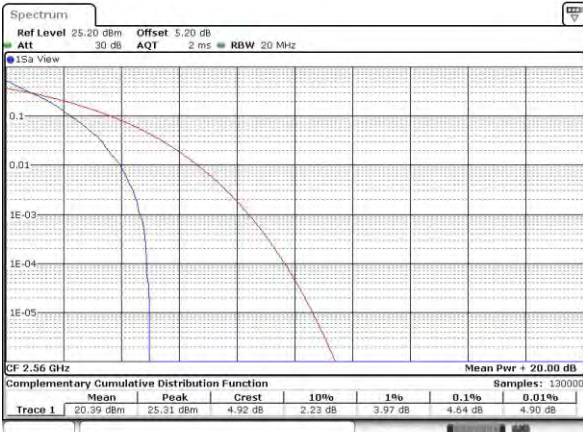

Date: 28 NOV 2015 18:51:58

Highest Channel / Full RB

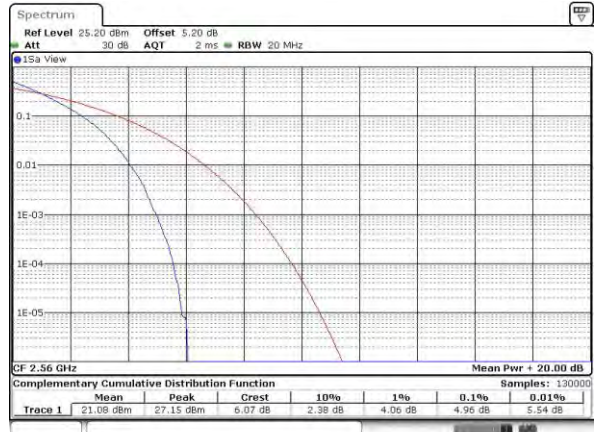

Date: 28 NOV 2015 18:52:10




LTE Band 7 / 20MHz / 16QAM

Lowest Channel / 1RB




Date: 28 NOV 2015 18:50:14

Lowest Channel / Full RB

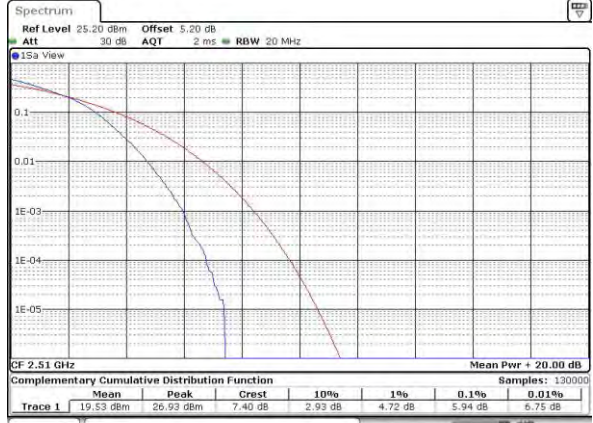

Date: 28 NOV 2015 18:50:47

Middle Channel / 1RB

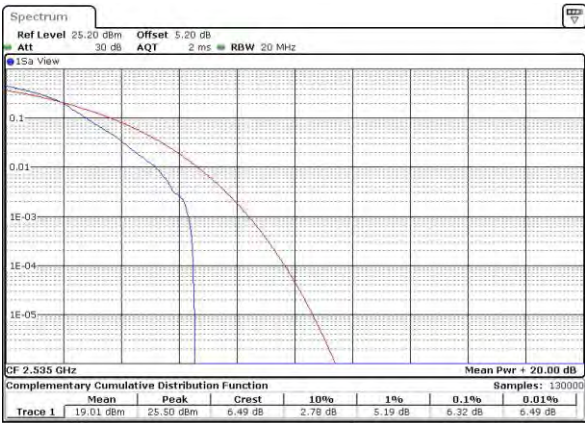


Date: 28 NOV 2015 18:51:34

Middle Channel / Full RB




Date: 28 NOV 2015 18:50:59

Highest Channel / 1RB

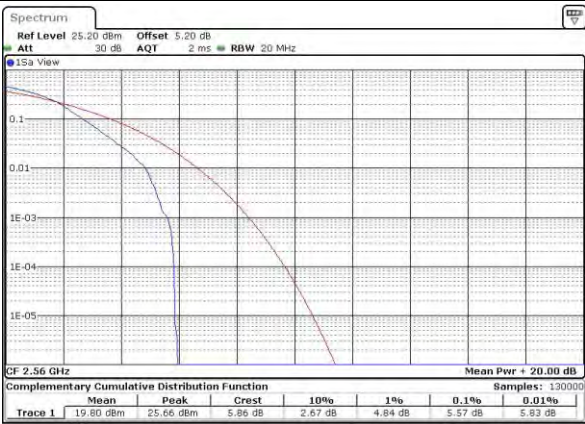

Date: 28 NOV 2015 18:51:46

Highest Channel / Full RB

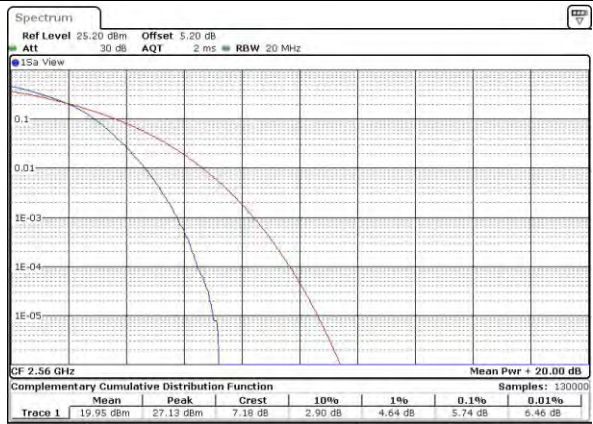

Date: 28 NOV 2015 18:52:21




26dB Bandwidth

Mode	LTE Band 7 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.95	4.96	9.89	9.73	14.24	14.72	20.38	20.34
Middle CH	-	-	-	-	5.00	5.00	9.63	9.67	14.54	14.45	20.30	20.34
Highest CH	-	-	-	-	4.97	5.00	9.87	9.97	14.27	14.48	20.38	20.30




LTE Band 7

Lowest Channel / 5MHz / QPSK

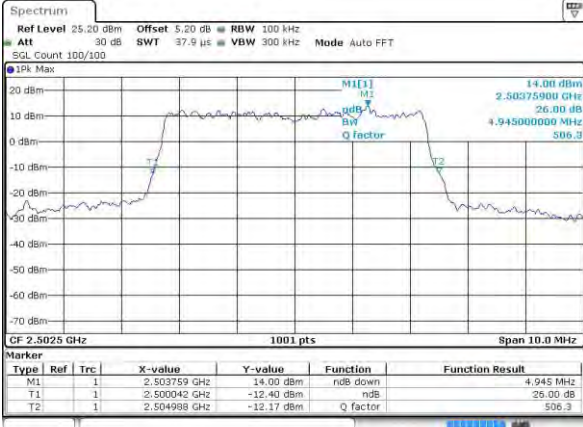


Date: 28 NOV 2015 17:22:18

Lowest Channel / 5MHz / 16QAM

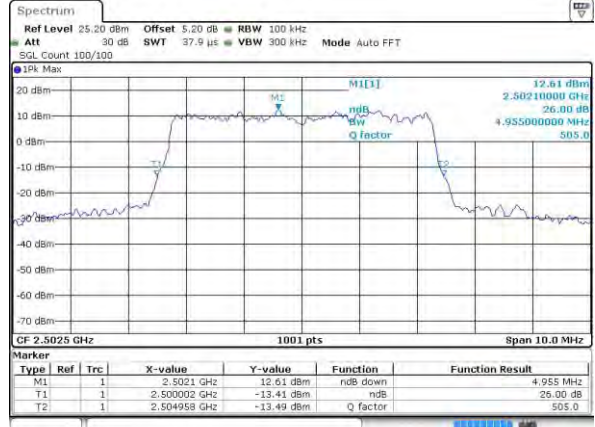


Date: 28 NOV 2015 17:22:07

Middle Channel / 5MHz / QPSK

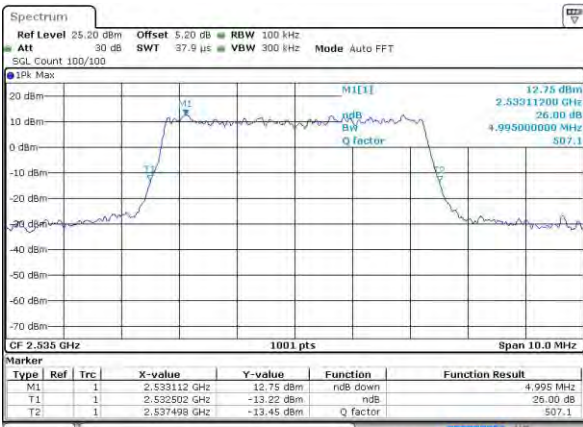


Date: 28 NOV 2015 17:22:29

Middle Channel / 5MHz / 16QAM

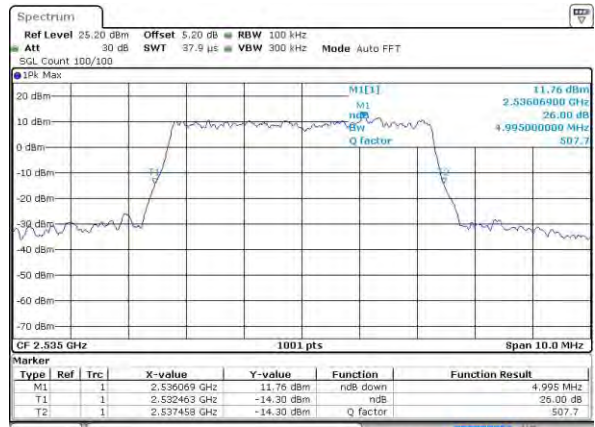


Date: 28 NOV 2015 17:22:39

Highest Channel / 5MHz / QPSK

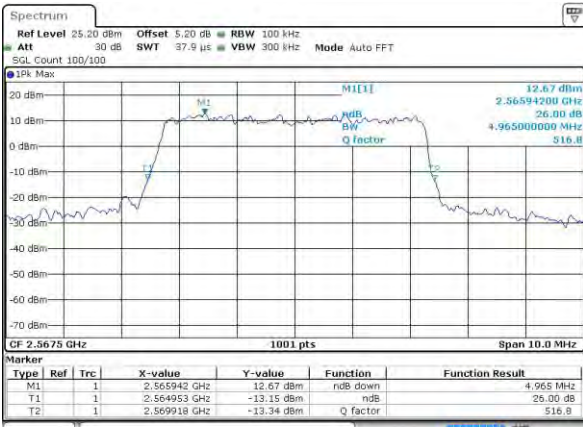

Date: 28 NOV 2015 17:23:00

Highest Channel / 5MHz / 16QAM

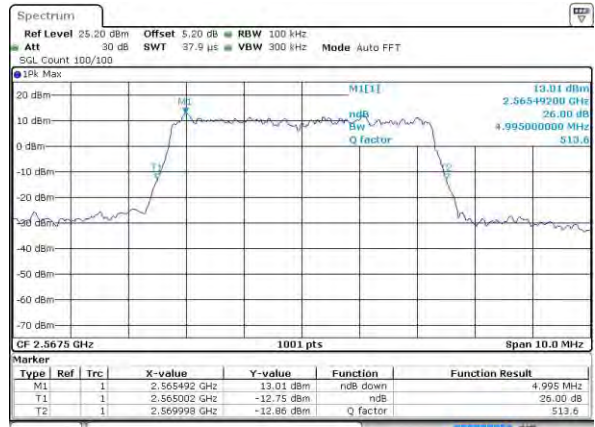


Date: 28 NOV 2015 17:22:50




LTE Band 7

Lowest Channel / 10MHz / QPSK

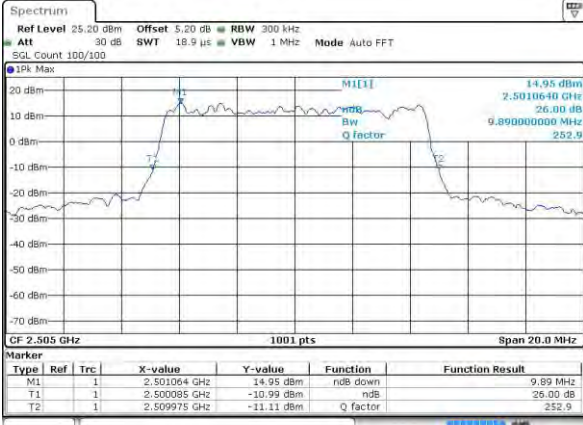


Date: 28 NOV 2015 17:39:23

Lowest Channel / 10MHz / 16QAM

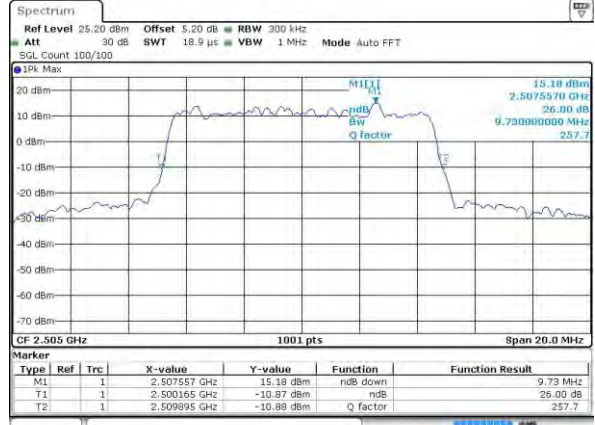


Date: 28 NOV 2015 17:39:34

Middle Channel / 10MHz / QPSK

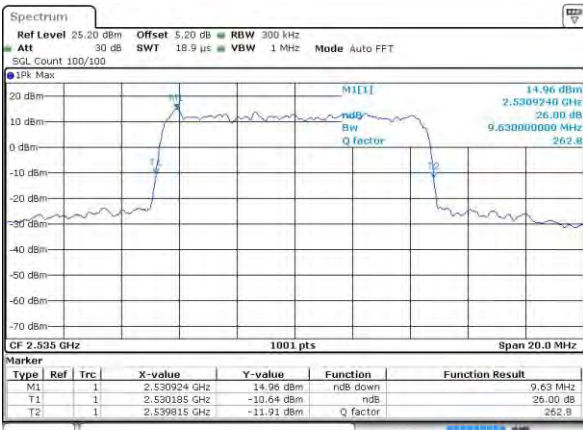


Date: 28 NOV 2015 17:39:13

Middle Channel / 10MHz / 16QAM

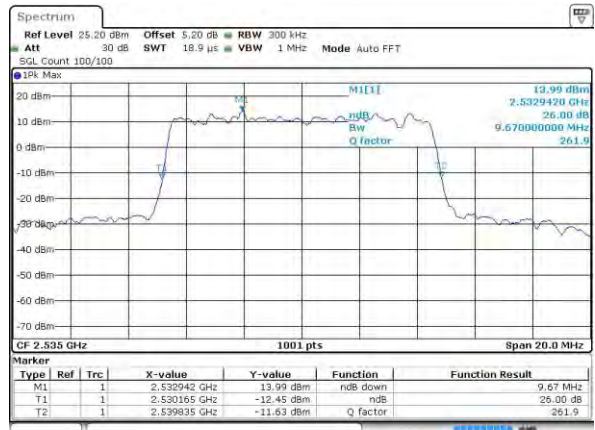


Date: 28 NOV 2015 17:39:02

Highest Channel / 10MHz / QPSK

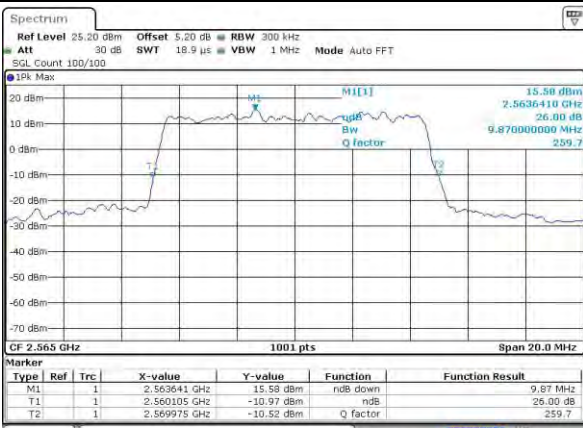

Date: 28 NOV 2015 17:38:41

Highest Channel / 10MHz / 16QAM

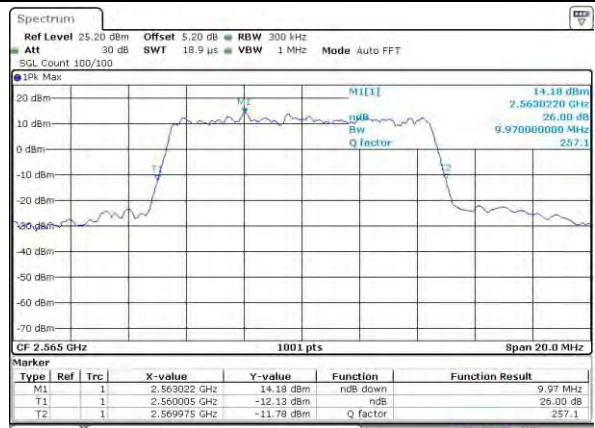


Date: 28 NOV 2015 17:38:52




LTE Band 7

Lowest Channel / 15MHz / QPSK

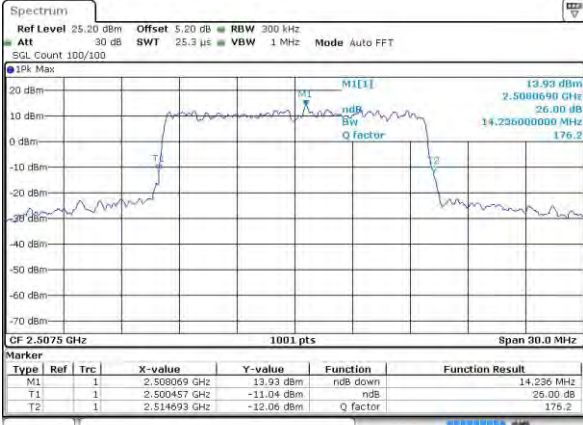


Date: 28 NOV 2015 17:55:58

Lowest Channel / 15MHz / 16QAM

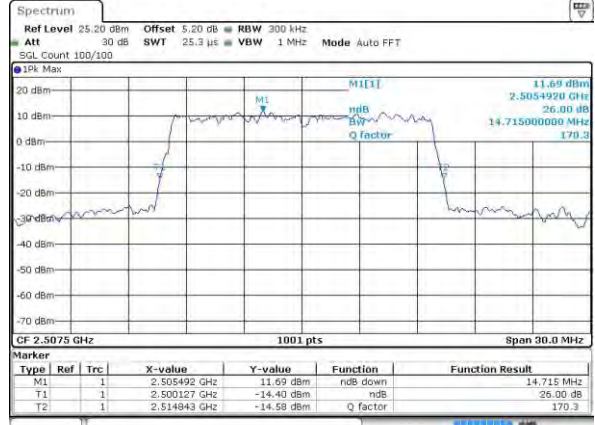


Date: 28 NOV 2015 17:56:09

Middle Channel / 15MHz / QPSK

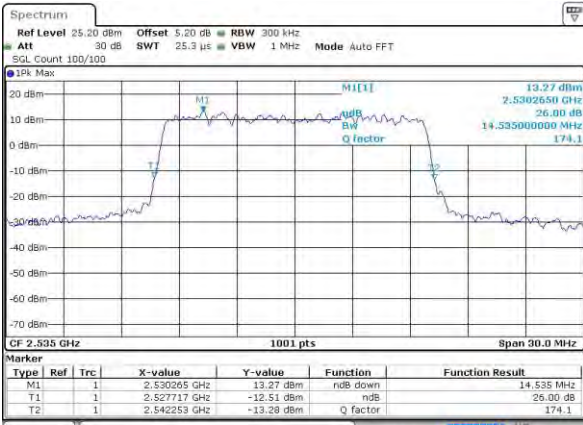


Date: 28 NOV 2015 17:55:48

Middle Channel / 15MHz / 16QAM

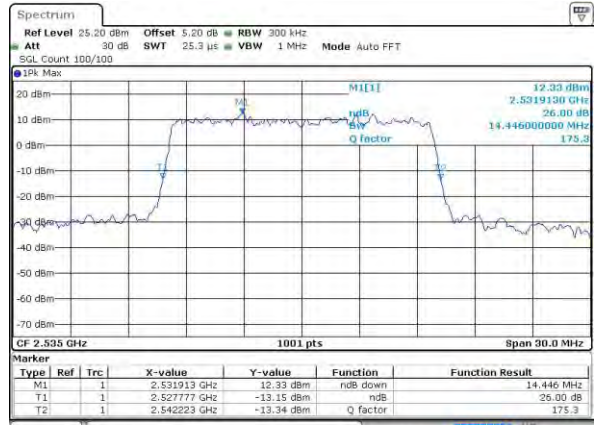


Date: 28 NOV 2015 17:55:37

Highest Channel / 15MHz / QPSK

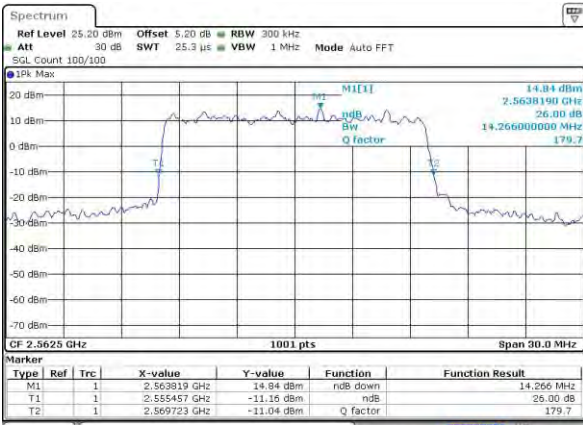

Date: 28 NOV 2015 17:55:16

Highest Channel / 15MHz / 16QAM

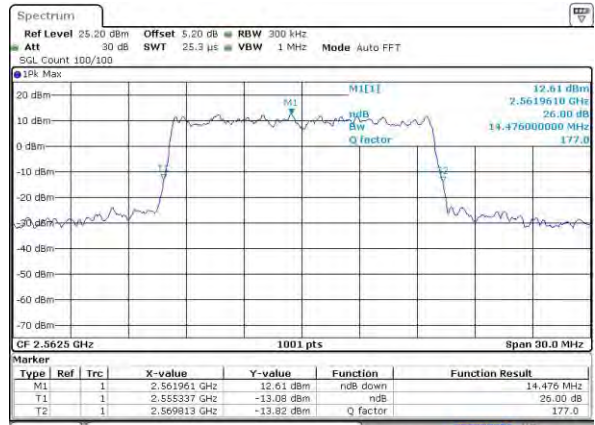

Date: 28 NOV 2015 17:55:27




LTE Band 7

Lowest Channel / 20MHz / QPSK




Date: 28 NOV 2015 18:12:42

Lowest Channel / 20MHz / 16QAM

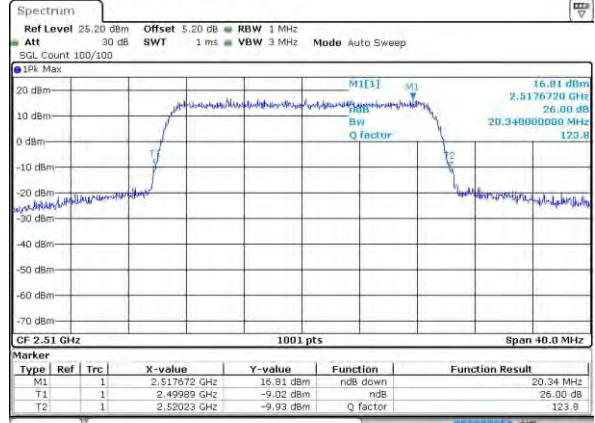


Date: 28 NOV 2015 18:12:32

Middle Channel / 20MHz / QPSK

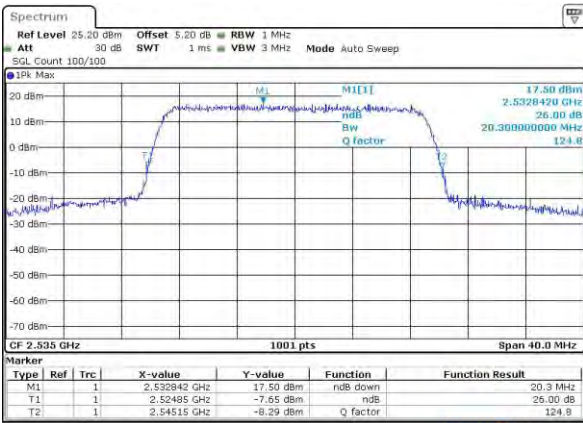


Date: 28 NOV 2015 18:12:11

Middle Channel / 20MHz / 16QAM

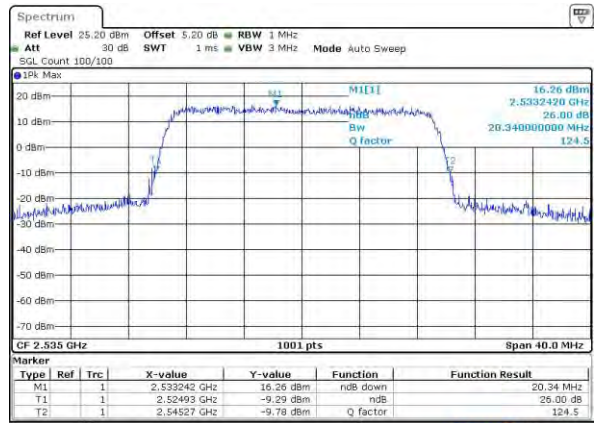


Date: 28 NOV 2015 18:12:21

Highest Channel / 20MHz / QPSK

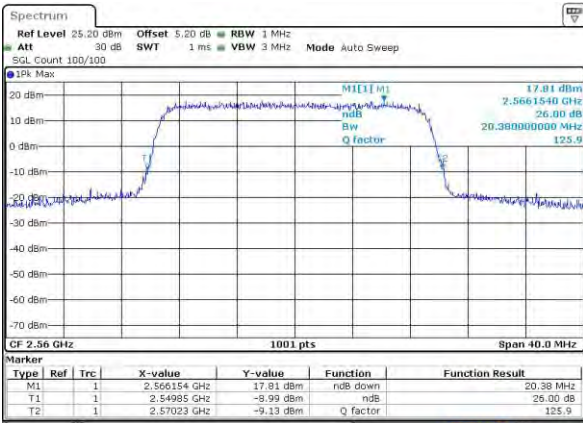

Date: 28 NOV 2015 18:12:00

Highest Channel / 20MHz / 16QAM

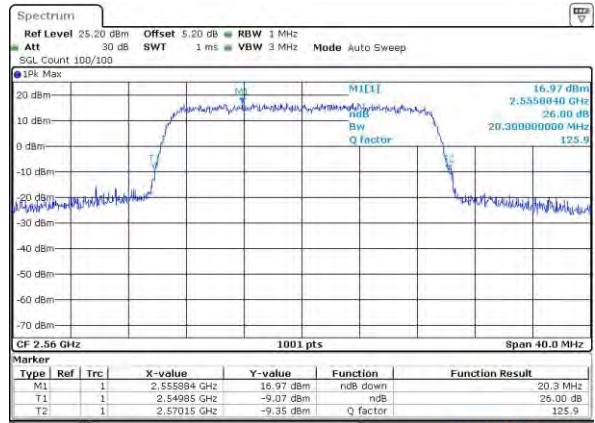

Date: 28 NOV 2015 18:11:50




Occupied Bandwidth

Mode	LTE Band 7 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.51	4.50	9.03	9.03	13.46	13.43	18.42	18.46
Middle CH	-	-	-	-	4.51	4.51	8.93	9.11	13.52	13.43	18.42	18.38
Highest CH	-	-	-	-	4.52	4.51	9.11	9.07	13.40	13.40	18.34	18.38




LTE Band 7

Lowest Channel / 5MHz / QPSK

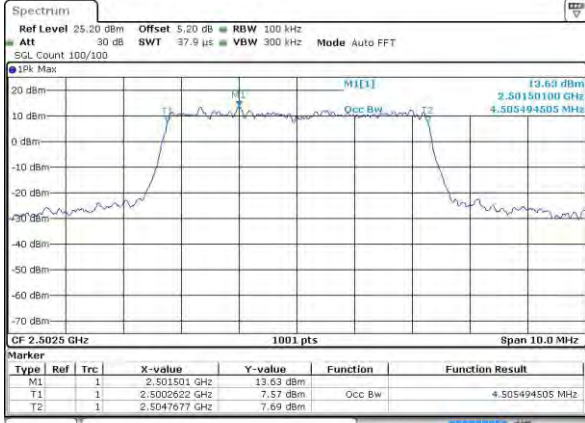


Date: 28 NOV 2015 17:21:04

Lowest Channel / 5MHz / 16QAM

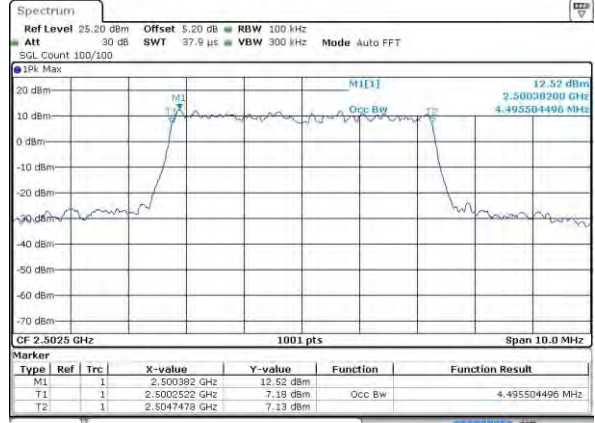


Date: 28 NOV 2015 17:21:15

Middle Channel / 5MHz / QPSK

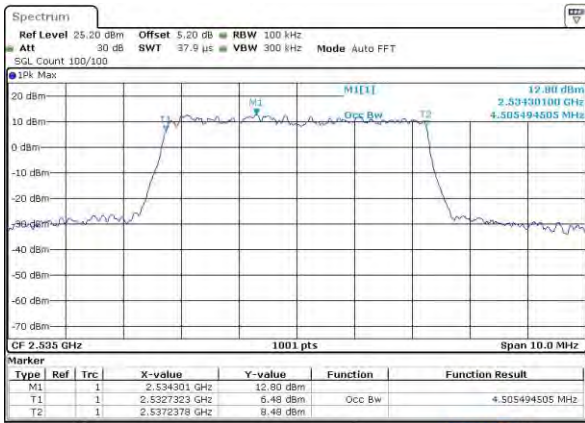


Date: 28 NOV 2015 17:21:36

Middle Channel / 5MHz / 16QAM

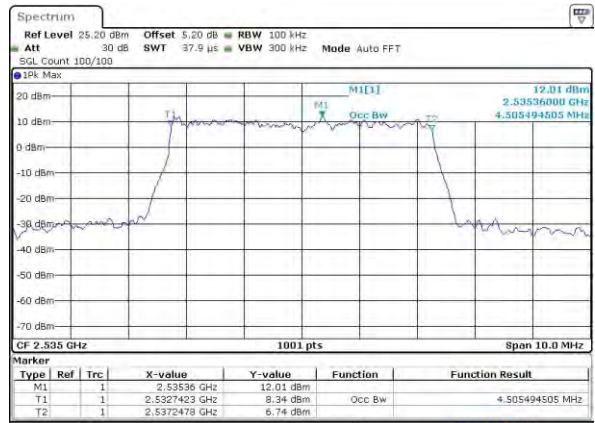


Date: 28 NOV 2015 17:21:25

Highest Channel / 5MHz / QPSK

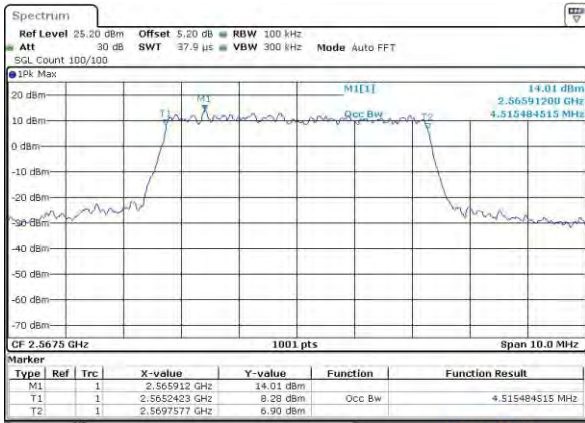

Date: 28 NOV 2015 17:21:46

Highest Channel / 5MHz / 16QAM

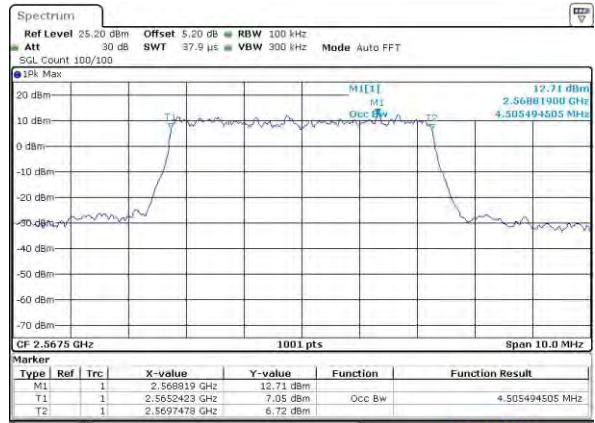


Date: 28 NOV 2015 17:21:57




LTE Band 7

Lowest Channel / 10MHz / QPSK

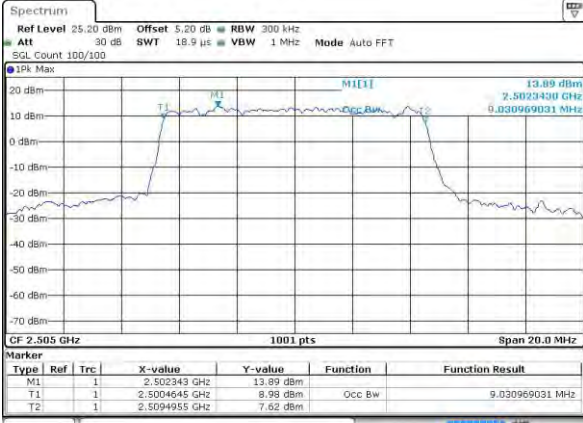


Date: 28 NOV 2015 17:37:48

Lowest Channel / 10MHz / 16QAM

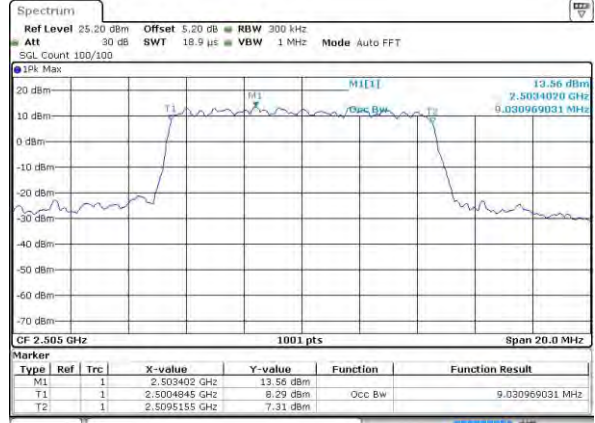


Date: 28 NOV 2015 17:37:38

Middle Channel / 10MHz / QPSK

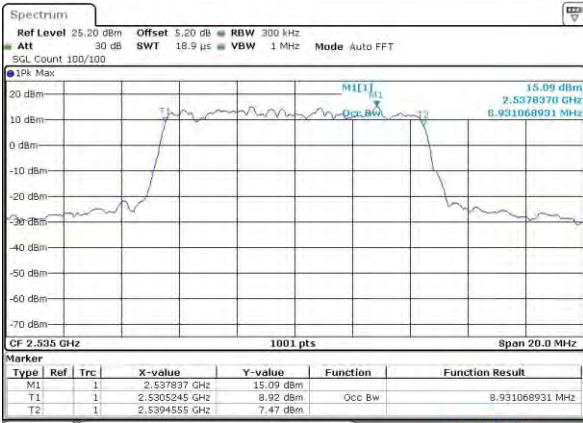


Date: 28 NOV 2015 17:37:58

Middle Channel / 10MHz / 16QAM

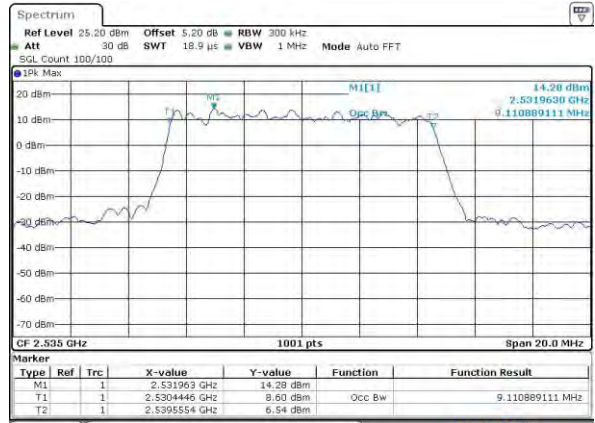


Date: 28 NOV 2015 17:38:10

Highest Channel / 10MHz / QPSK

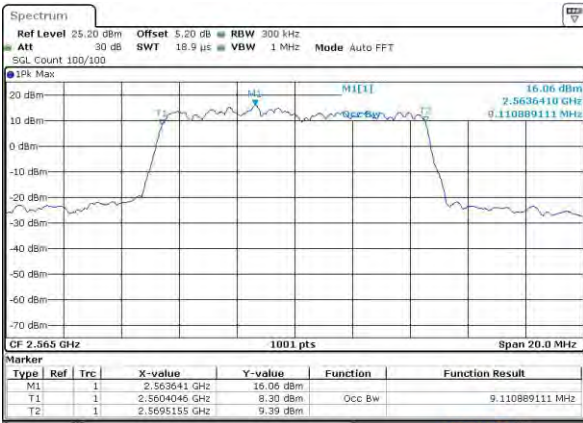

Date: 28 NOV 2015 17:38:31

Highest Channel / 10MHz / 16QAM

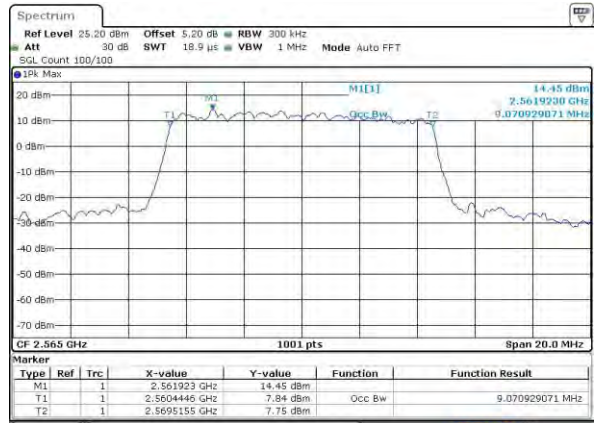


Date: 28 NOV 2015 17:38:20




LTE Band 7

Lowest Channel / 15MHz / QPSK

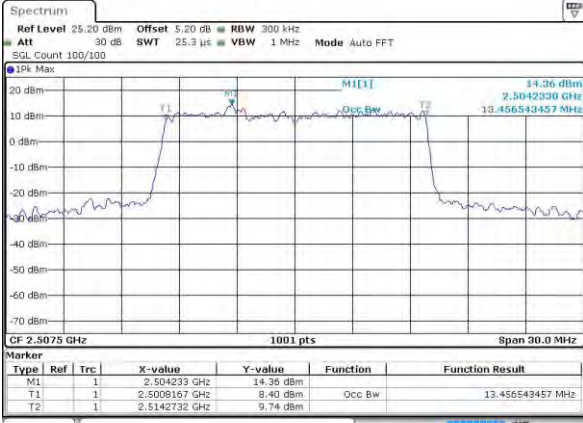


Date: 28 NOV 2015 17:54:24

Lowest Channel / 15MHz / 16QAM

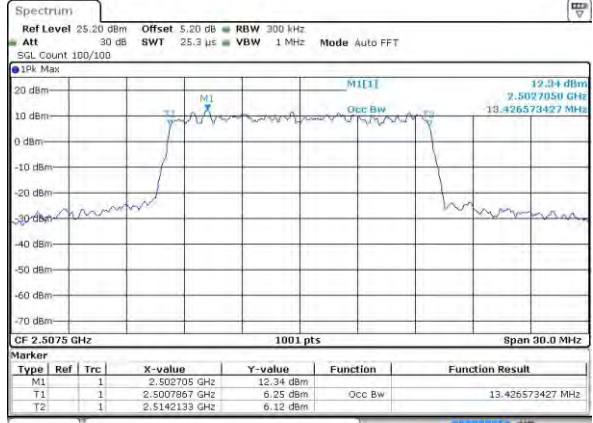


Date: 28 NOV 2015 17:54:13

Middle Channel / 15MHz / QPSK

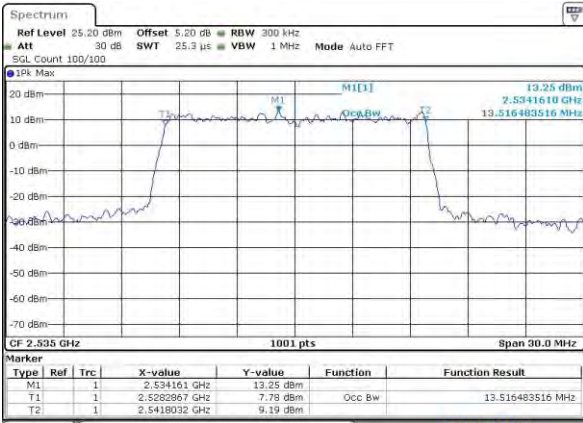


Date: 28 NOV 2015 17:54:34

Middle Channel / 15MHz / 16QAM

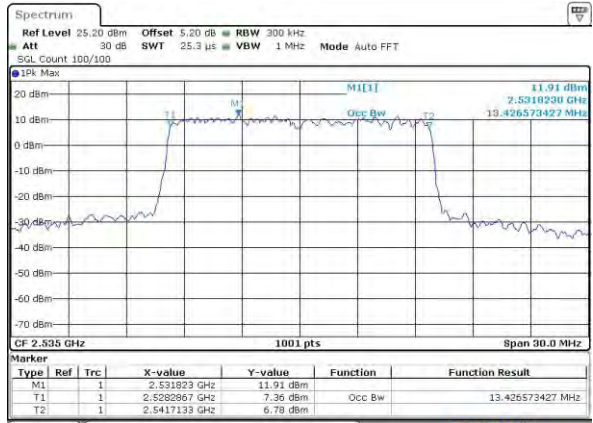


Date: 28 NOV 2015 17:54:45

Highest Channel / 15MHz / QPSK

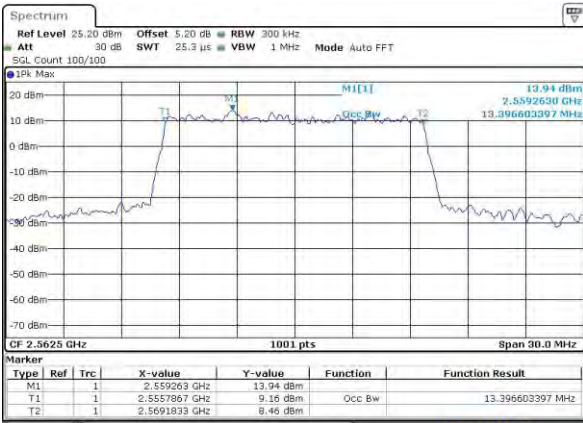

Date: 28 NOV 2015 17:55:06

Highest Channel / 15MHz / 16QAM

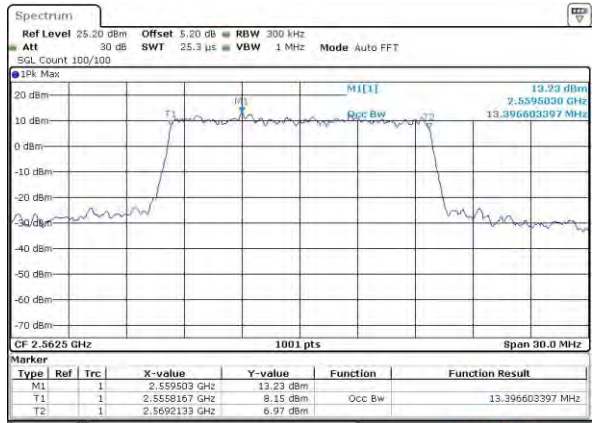


Date: 28 NOV 2015 17:54:55




LTE Band 7

Lowest Channel / 20MHz / QPSK

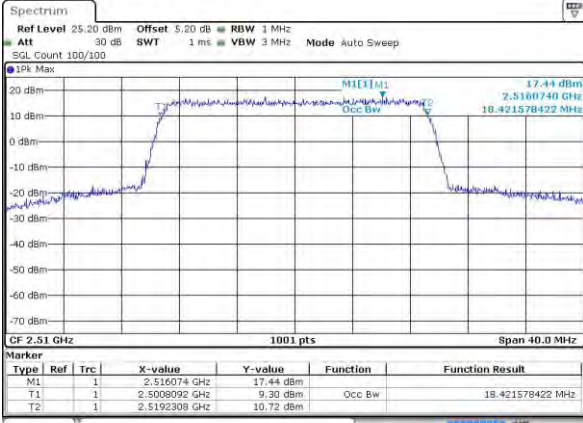


Date: 28 NOV 2015 18:10:46

Lowest Channel / 20MHz / 16QAM

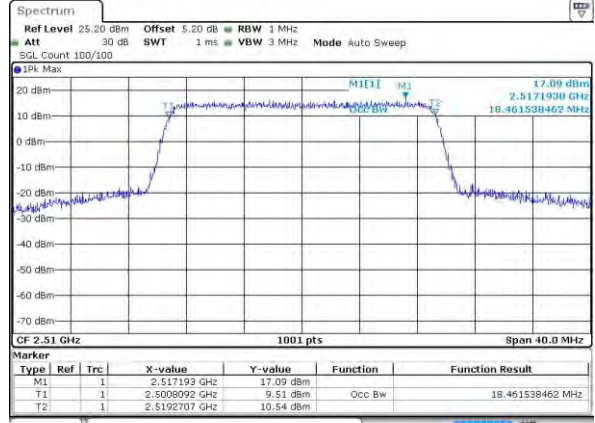


Date: 28 NOV 2015 18:10:57

Middle Channel / 20MHz / QPSK

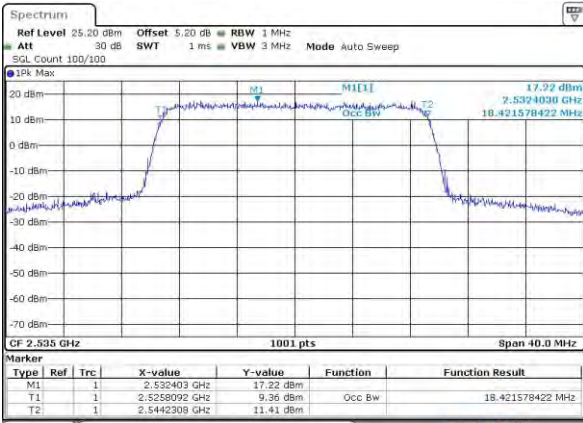


Date: 28 NOV 2015 18:11:18

Middle Channel / 20MHz / 16QAM

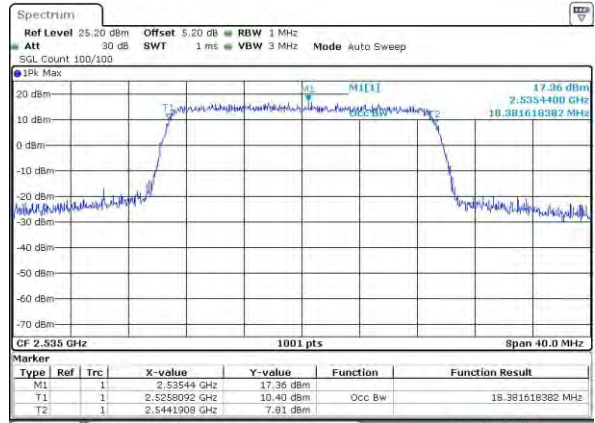


Date: 28 NOV 2015 18:11:07

Highest Channel / 20MHz / QPSK

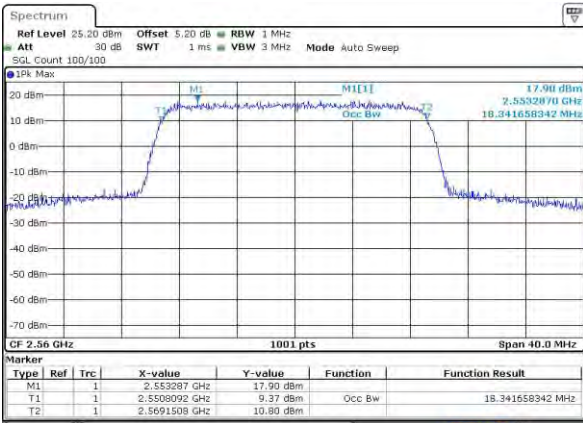

Date: 28 NOV 2015 18:11:29

Highest Channel / 20MHz / 16QAM

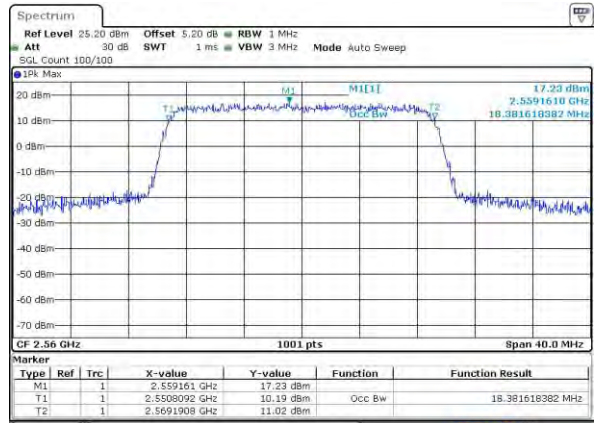

Date: 28 NOV 2015 18:11:39



Conducted Band Edge


LTE Band 7 / 5MHz / QPSK

Lowest Band Edge / 1 RB




Date: 1 DEC.2015 17:32:50

Highest Band Edge / 1 RB

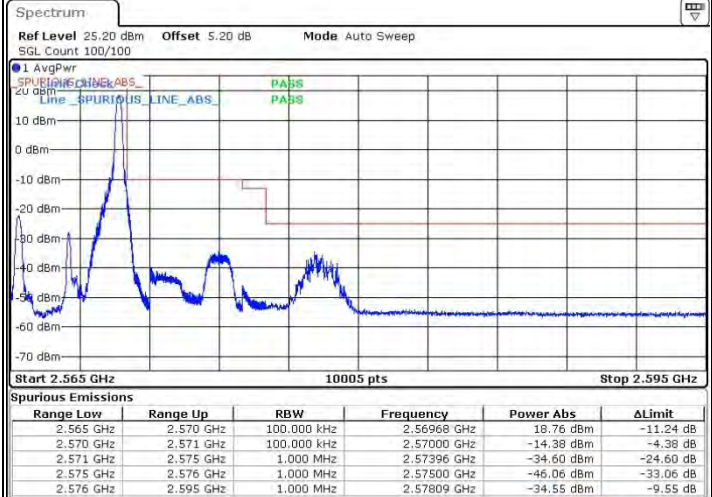

Date: 1 DEC.2015 17:35:56

Lowest Band Edge / Full RB

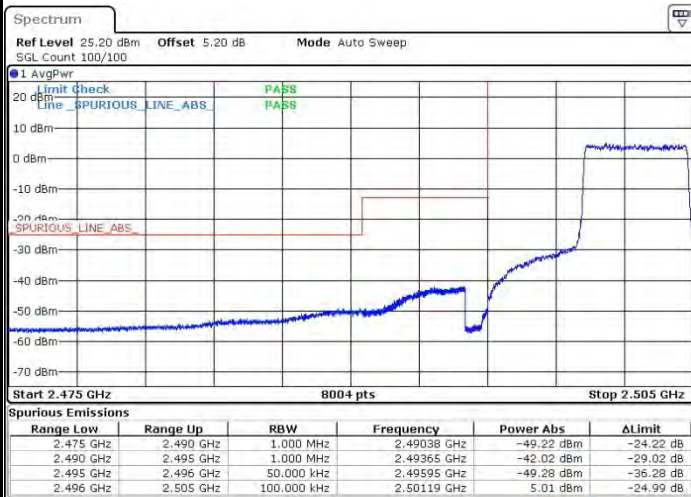

Date: 1 DEC.2015 17:35:01

Highest Band Edge / Full RB




Date: 1 DEC.2015 17:37:24




LTE Band 7 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

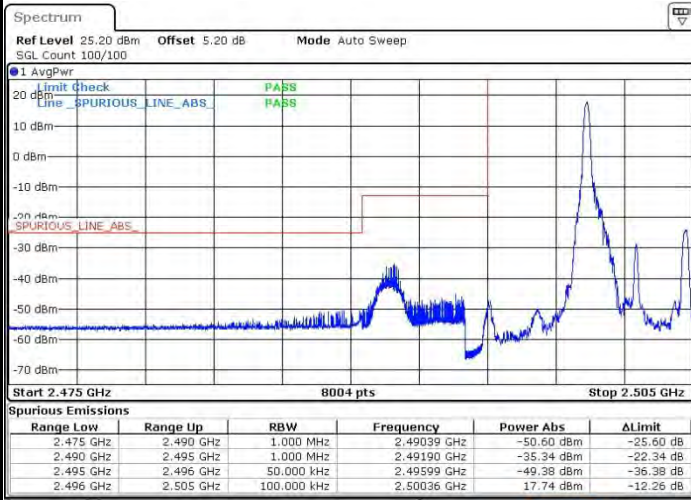

Date: 1 DEC.2015 17:33:38

Highest Band Edge / 1 RB

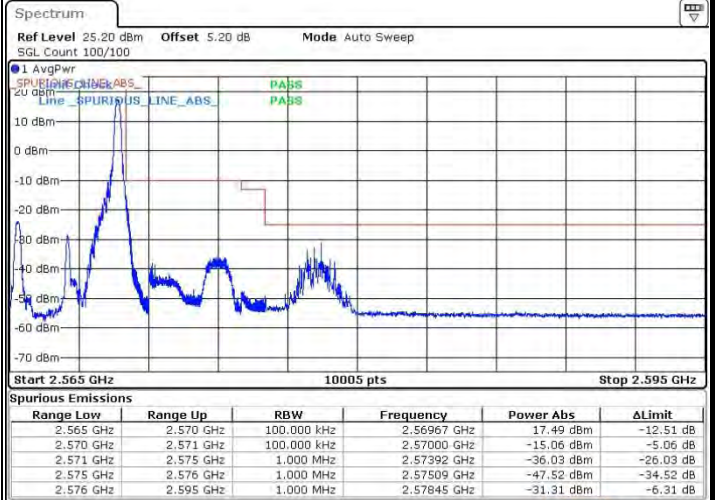

Date: 1 DEC.2015 17:36:42

Lowest Band Edge / Full RB



Date: 1 DEC.2015 17:34:30

Highest Band Edge / Full RB



Date: 1 DEC.2015 17:37:05




LTE Band 7 / 10MHz / QPSK

Lowest Band Edge / 1 RB




Date: 1 DEC.2015 17:37:57

Highest Band Edge / 1 RB

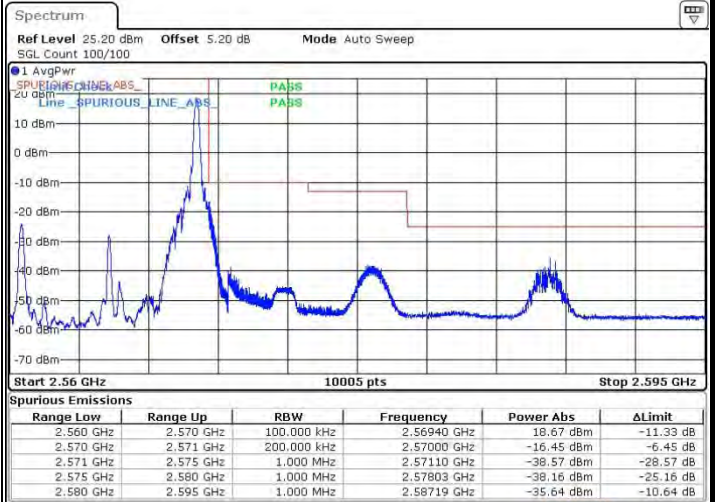

Date: 1 DEC.2015 17:39:34

Lowest Band Edge / Full RB

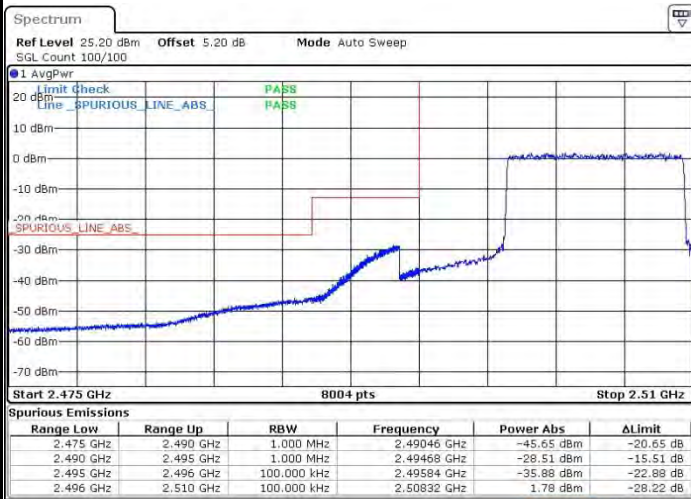

Date: 1 DEC.2015 17:39:06

Highest Band Edge / Full RB




Date: 1 DEC.2015 17:40:43



LTE Band 7 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

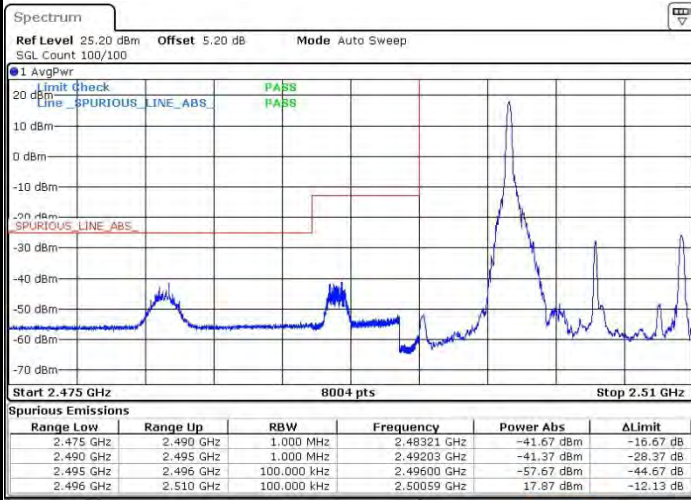


Date: 1 DEC.2015 17:38:16

Highest Band Edge / 1 RB



Date: 1 DEC.2015 17:39:56

Lowest Band Edge / Full RB

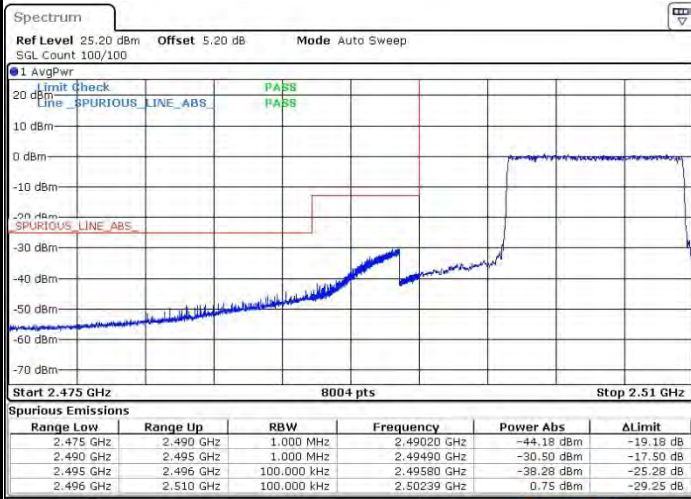

Date: 1 DEC.2015 17:38:44

Highest Band Edge / Full RB




Date: 1 DEC.2015 17:40:20



LTE Band 7 / 15MHz / QPSK

Lowest Band Edge / 1 RB

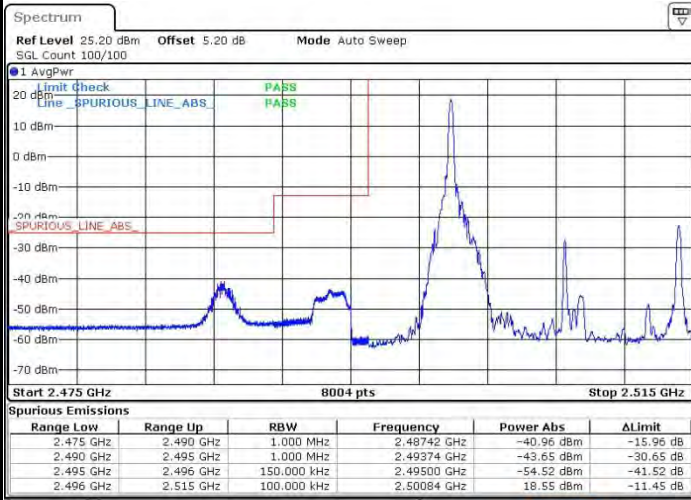

Date: 1 DEC.2015 17:41:11

Highest Band Edge / 1 RB




Date: 1 DEC.2015 17:42:33

Lowest Band Edge / Full RB



Date: 1 DEC.2015 17:42:15

Highest Band Edge / Full RB

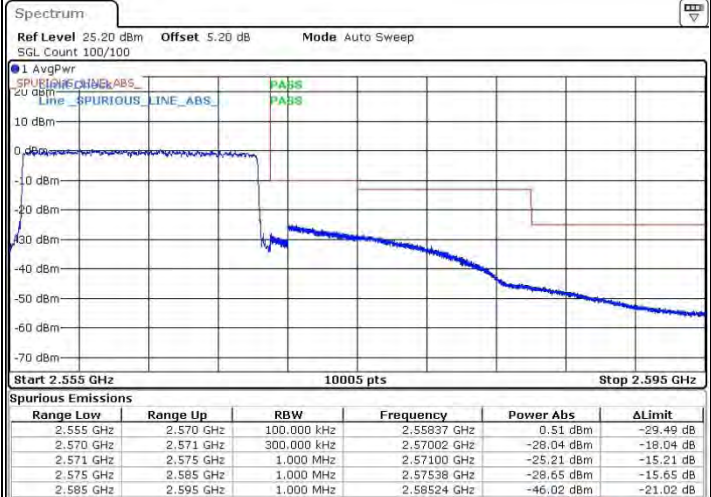


Date: 1 DEC.2015 17:43:39




LTE Band 7 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

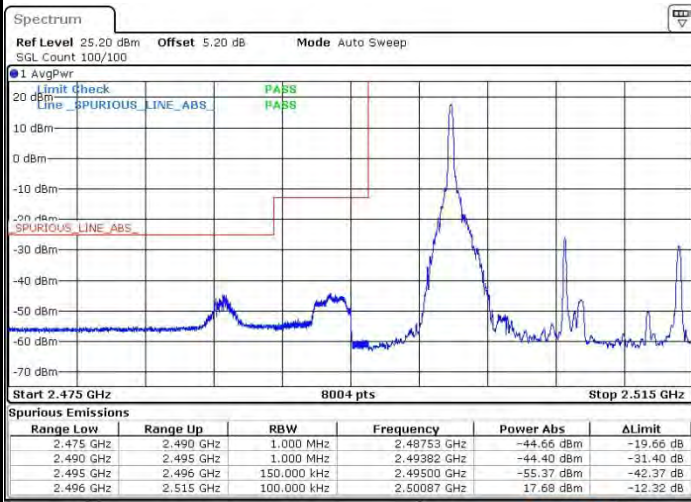


Date: 1 DEC.2015 17:41:29

Highest Band Edge / 1 RB

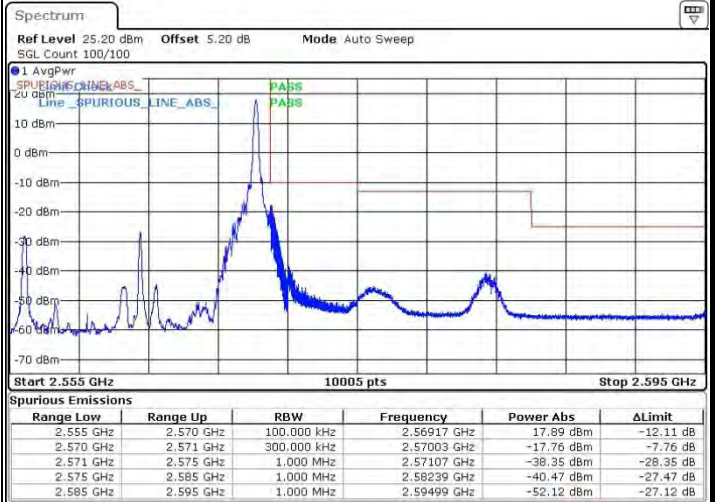


Date: 1 DEC.2015 17:42:54

Lowest Band Edge / Full RB

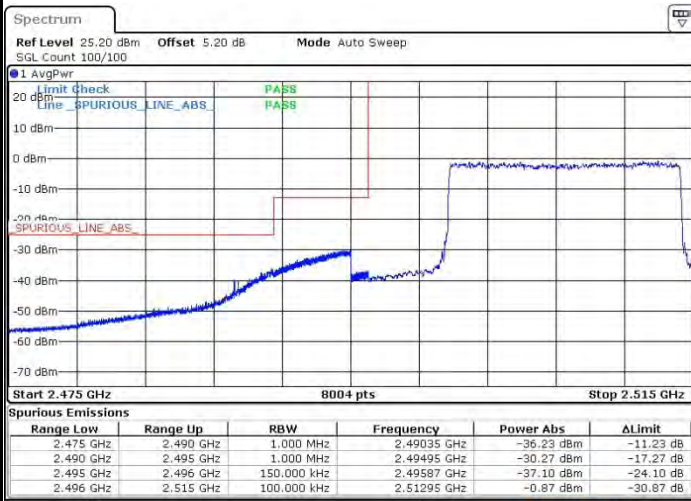

Date: 1 DEC.2015 17:41:58

Highest Band Edge / Full RB

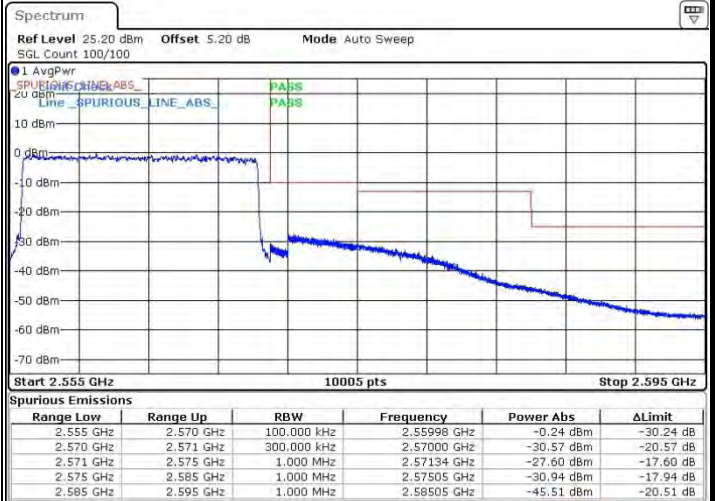


Date: 1 DEC.2015 17:43:24




LTE Band 7 / 20MHz / QPSK

Lowest Band Edge / 1 RB

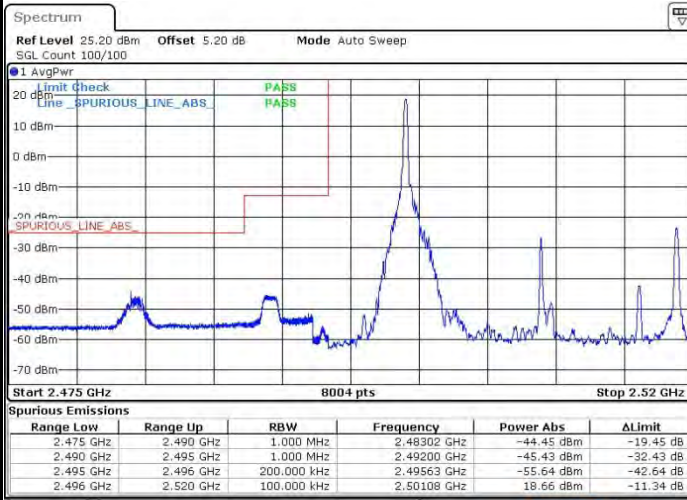


Date: 1 DEC.2015 17:44:08

Highest Band Edge / 1 RB

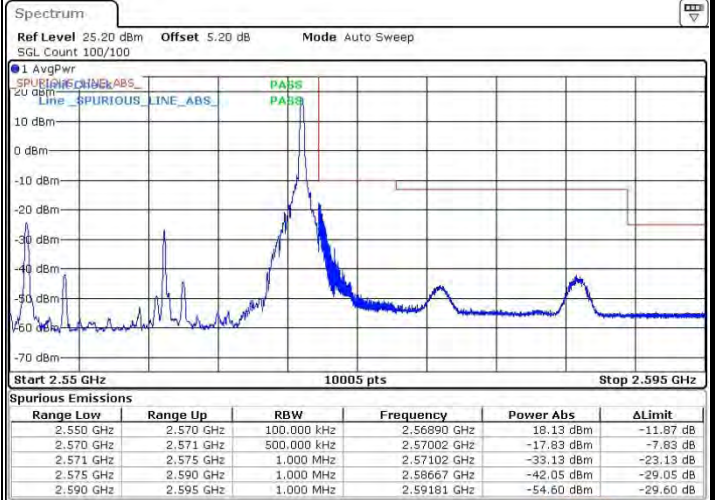


Date: 1 DEC.2015 17:45:24

Lowest Band Edge / Full RB

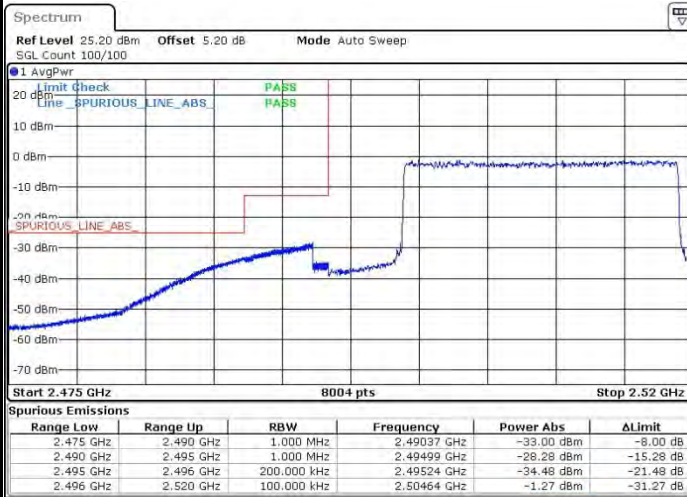

Date: 1 DEC.2015 17:45:04

Highest Band Edge / Full RB

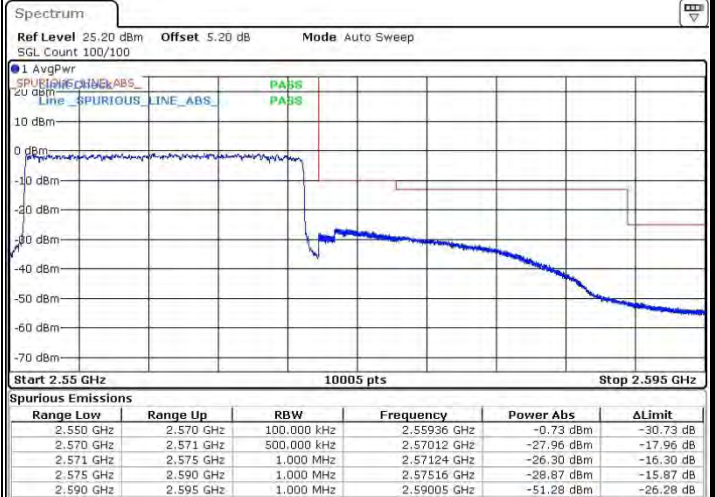


Date: 1 DEC.2015 17:46:43




LTE Band 7 / 20MHz / 16QAM

Lowest Band Edge / 1 RB

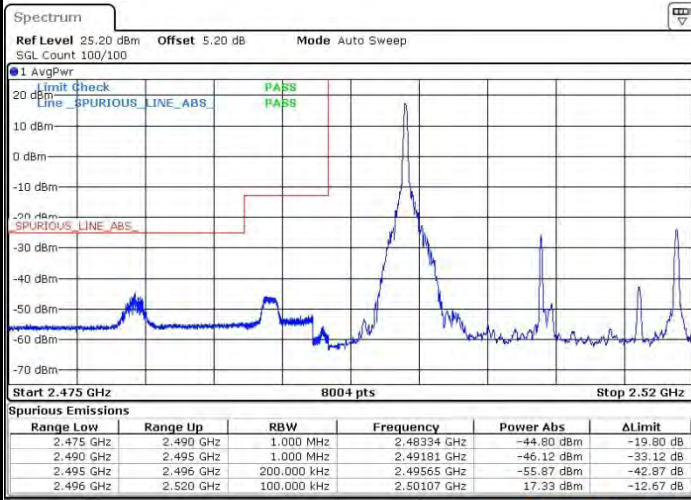


Date: 1 DEC.2015 17:44:26

Highest Band Edge / 1RB

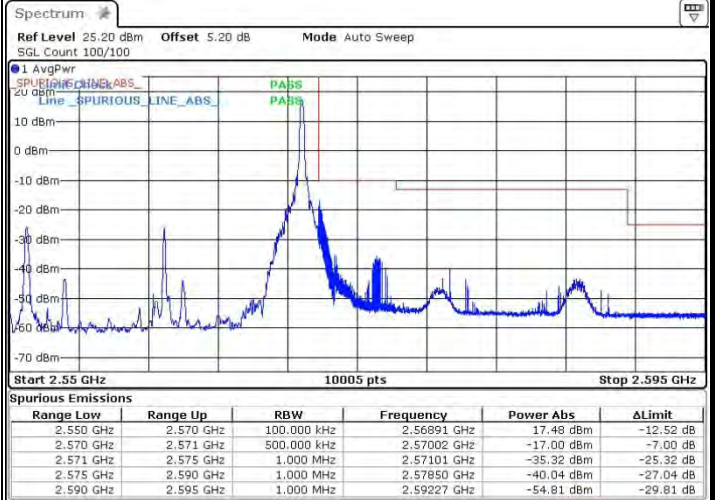


Date: 1 DEC.2015 17:46:04

Lowest Band Edge / Full RB

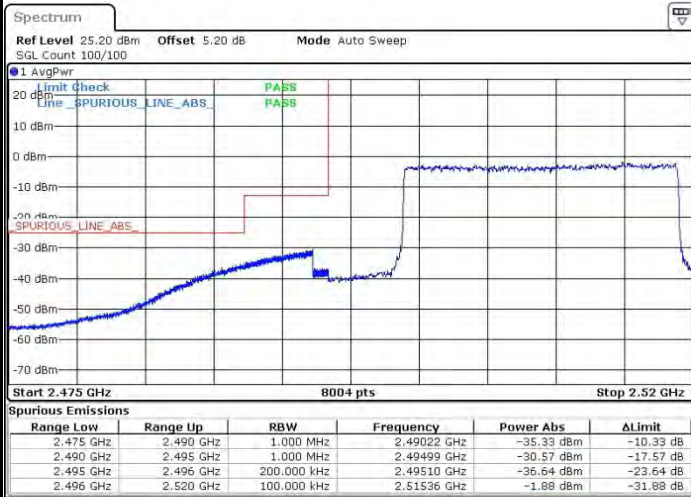

Date: 1 DEC.2015 17:44:49


Highest Band Edge / Full RB

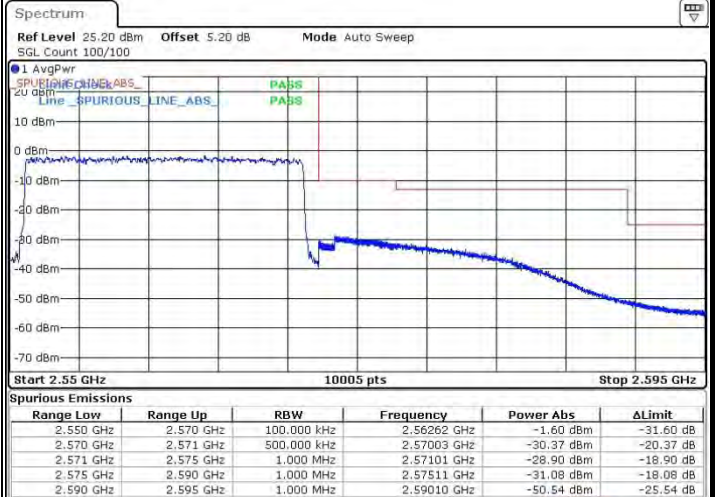

Date: 1 DEC.2015 17:46:26




Conducted Spurious Emission

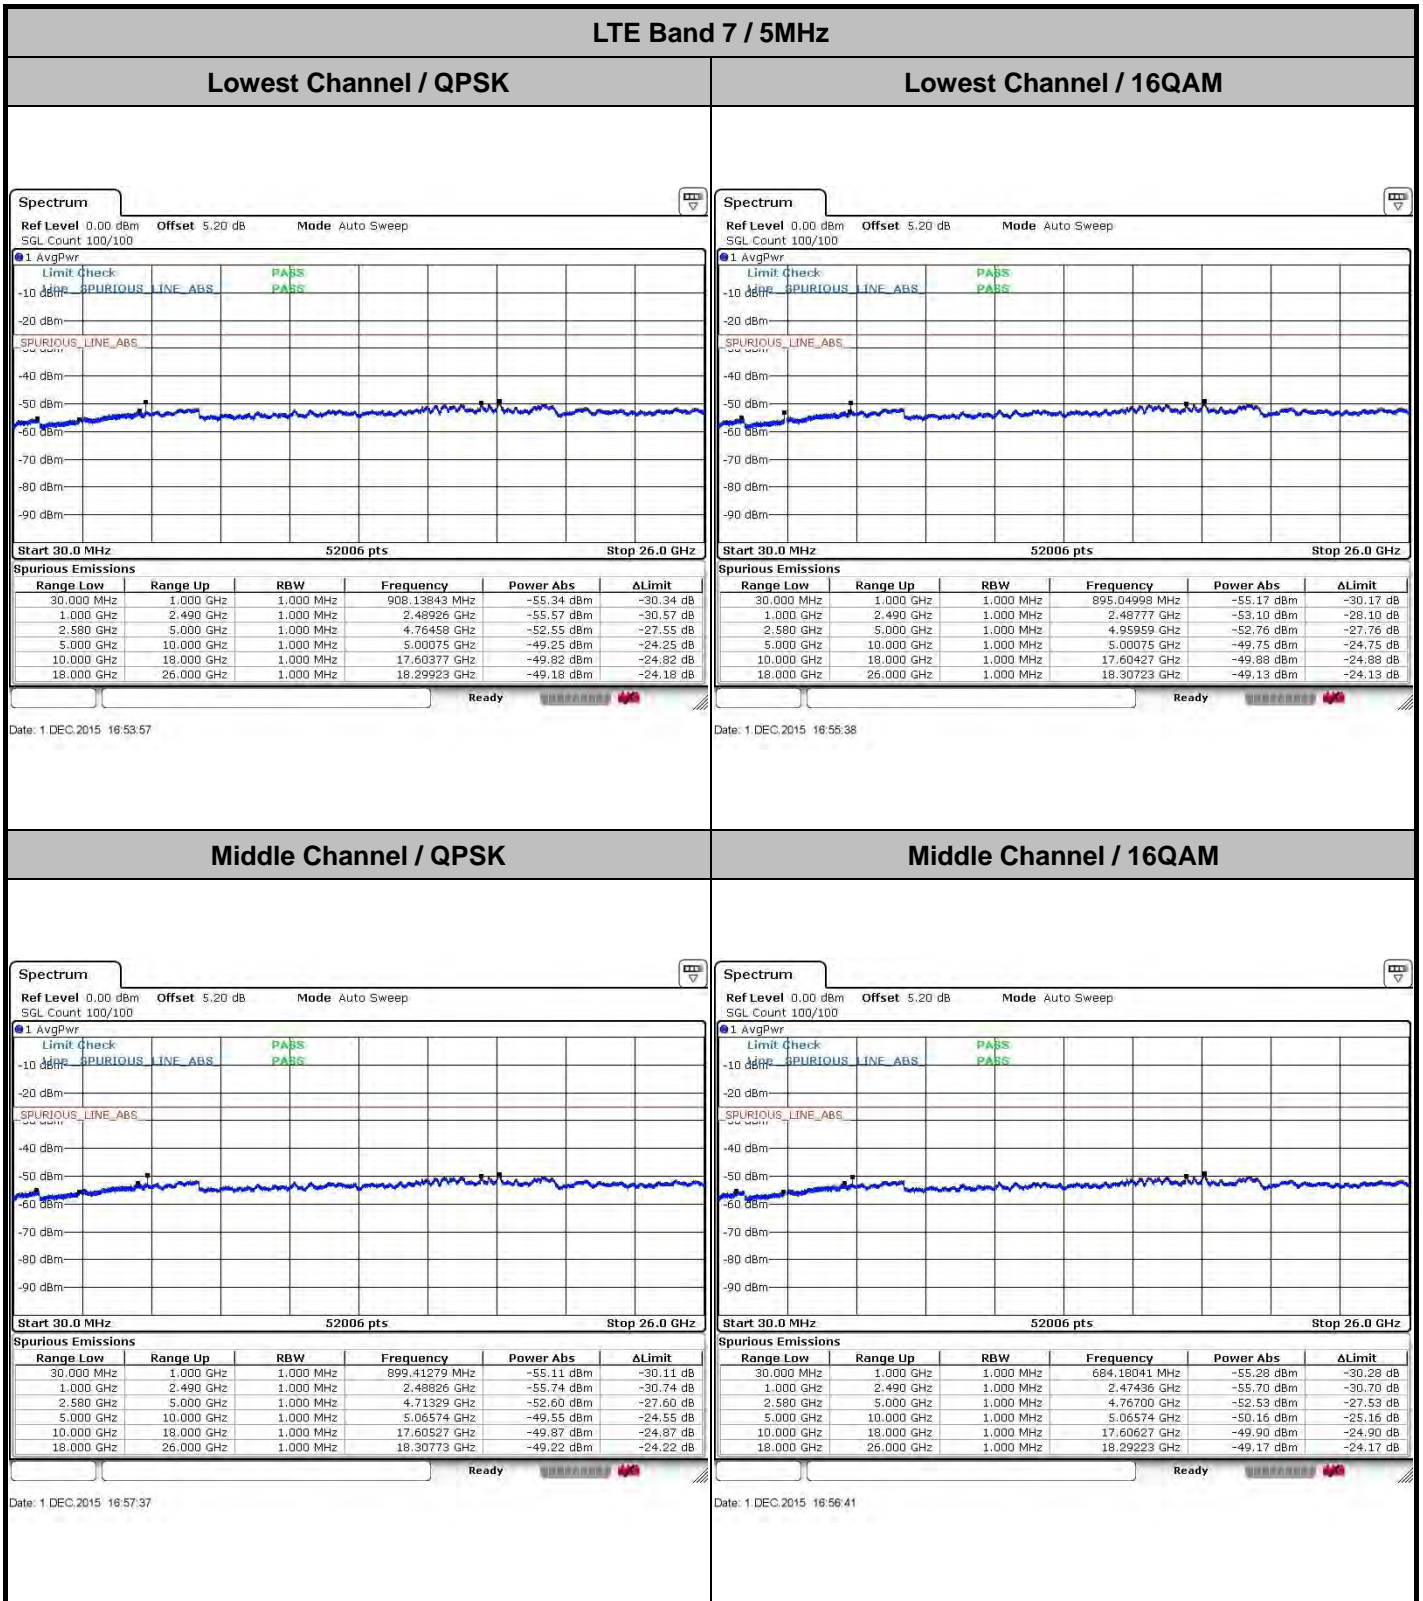




LTE Band 7 / 5MHz

Highest Channel / QPSK

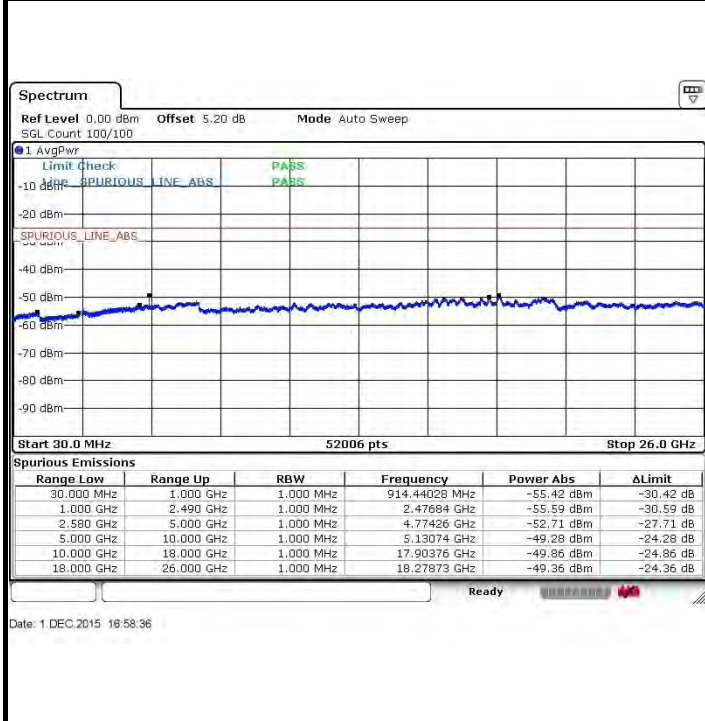


Highest Channel / 16QAM

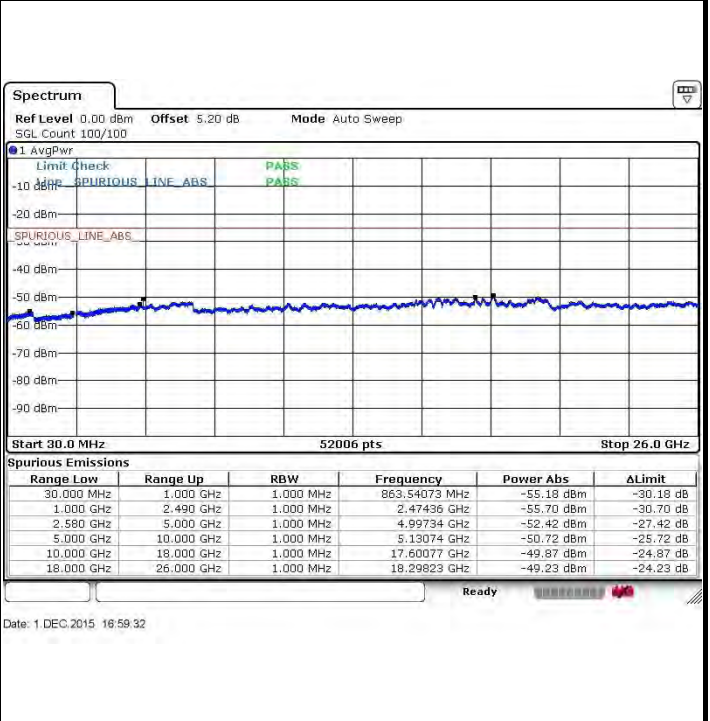


LTE Band 7 / 10MHz

Lowest Channel / QPSK

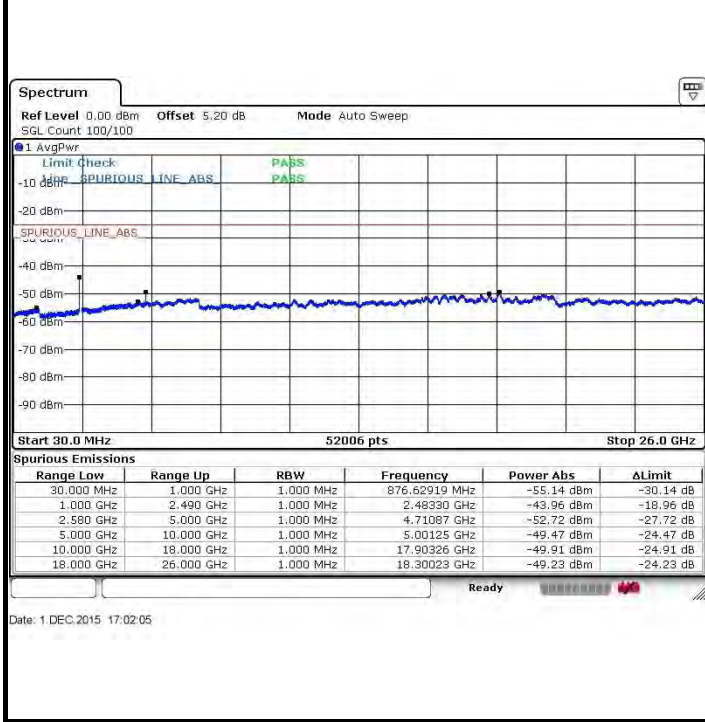

Lowest Channel / 16QAM


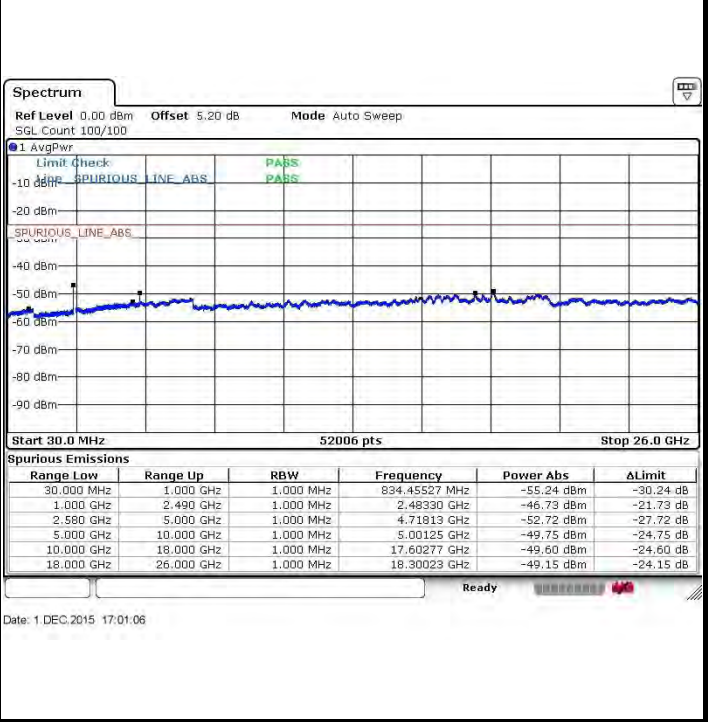




LTE Band 7 / 10MHz

Middle Channel / QPSK

Middle Channel / 16QAM

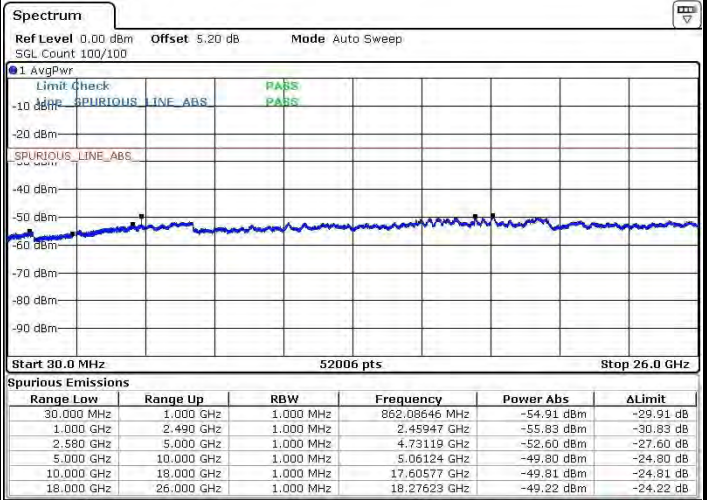
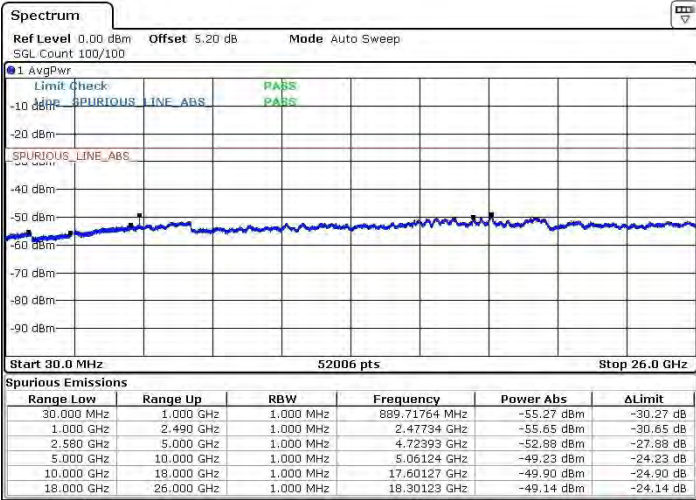


Date: 1 DEC.2015 17:02:59

Date: 1 DEC.2015 17:03:57

Highest Channel / QPSK

Highest Channel / 16QAM

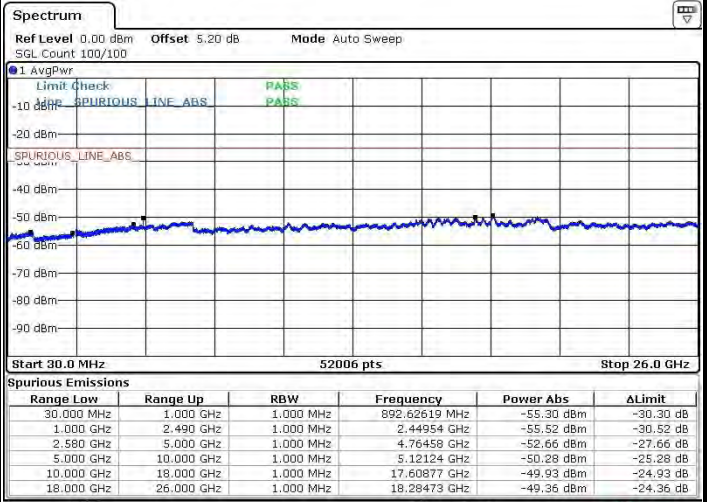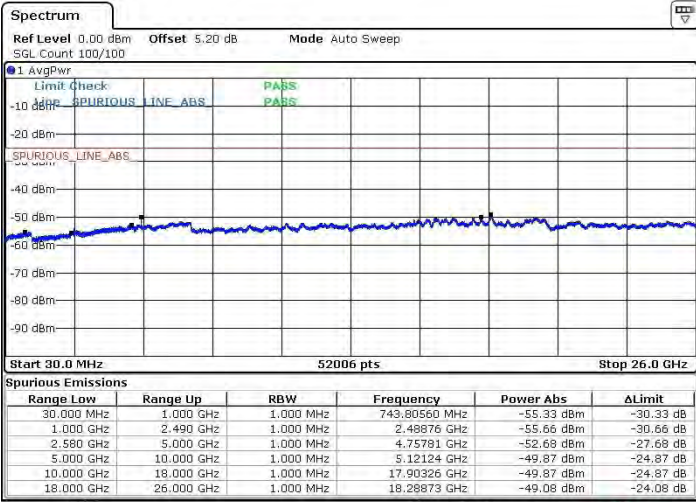

Date: 1 DEC.2015 17:05:51



Date: 1 DEC.2015 17:04:55



LTE Band 7 / 15MHz

Lowest Channel / QPSK

Lowest Channel / 16QAM

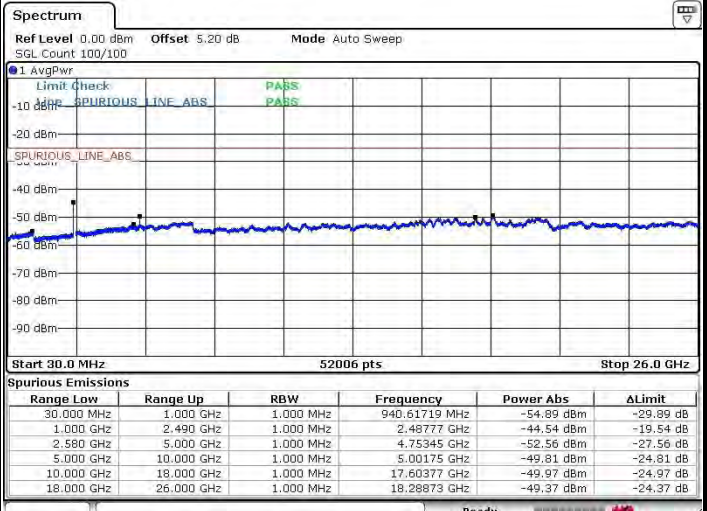
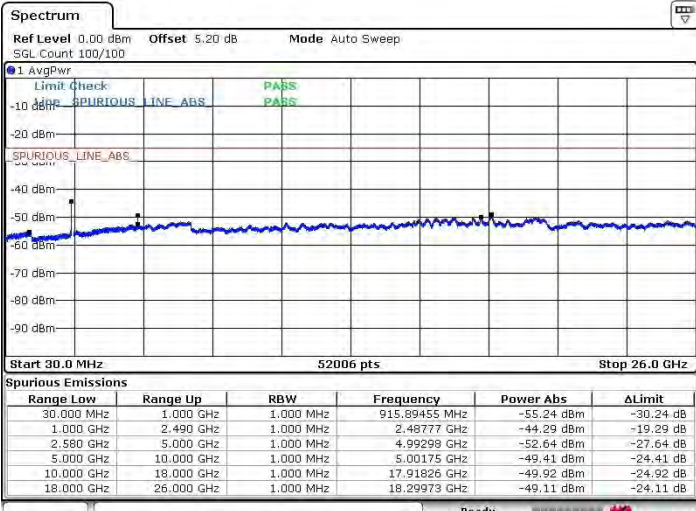


Date: 1 DEC.2015 17:07:13

Date: 1 DEC.2015 17:10:23

Middle Channel / QPSK

Middle Channel / 16QAM

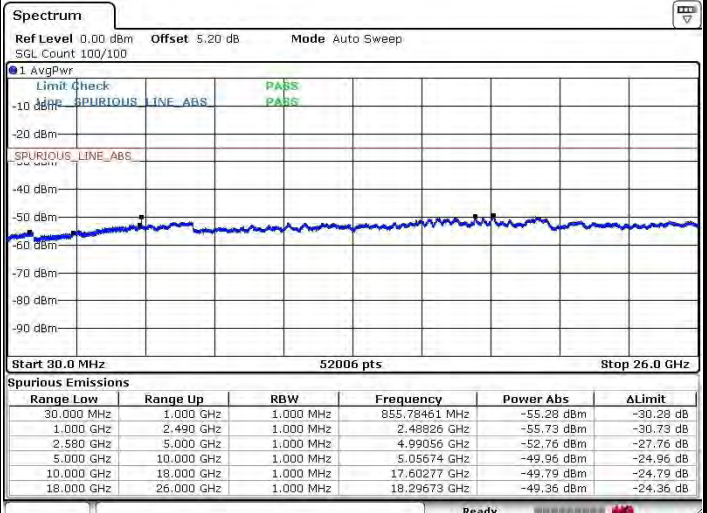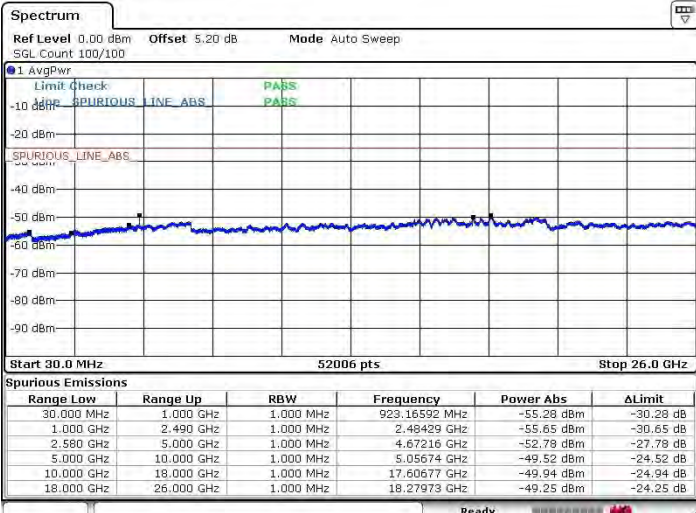


Date: 1 DEC.2015 17:12:39

Date: 1 DEC.2015 17:11:38




LTE Band7 / 15MHz

Highest Channel / QPSK

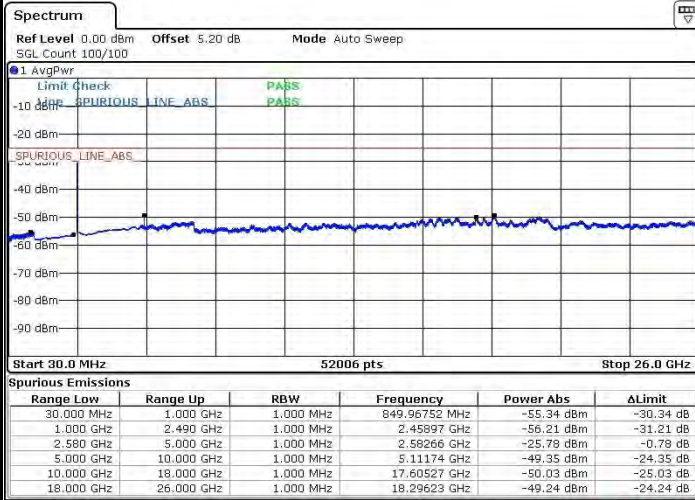

Date: 1 DEC.2015 17:14:55


Highest Channel / 16QAM

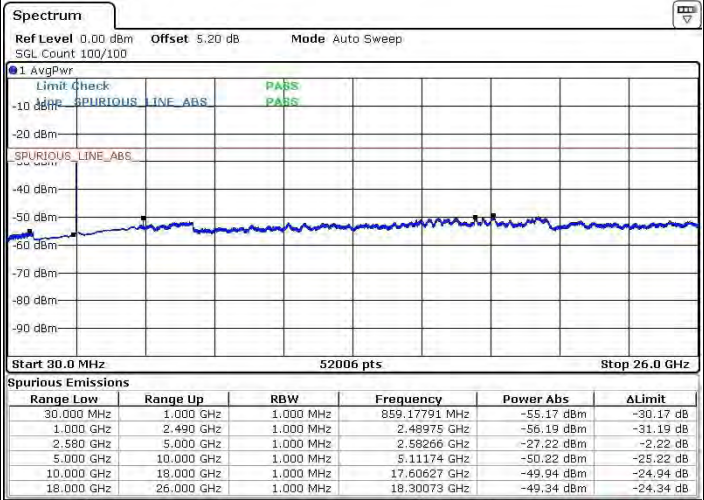

Date: 1 DEC.2015 17:16:33


LTE Band 7 / 20MHz

Lowest Channel / QPSK

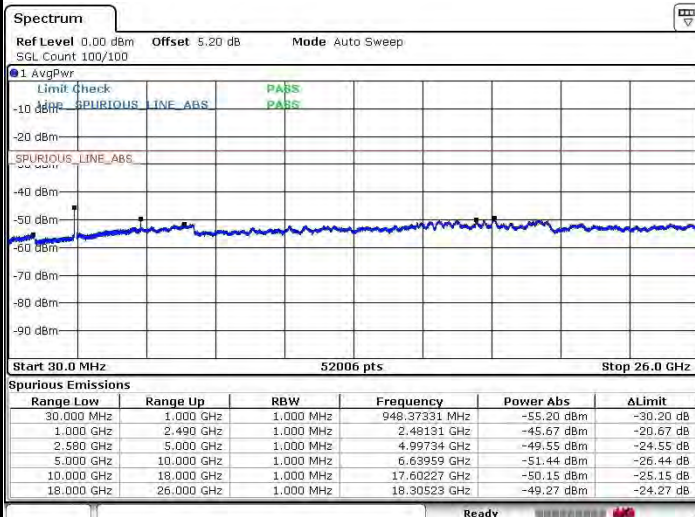

Date: 1 DEC.2015 17:20:09

Lowest Channel / 16QAM

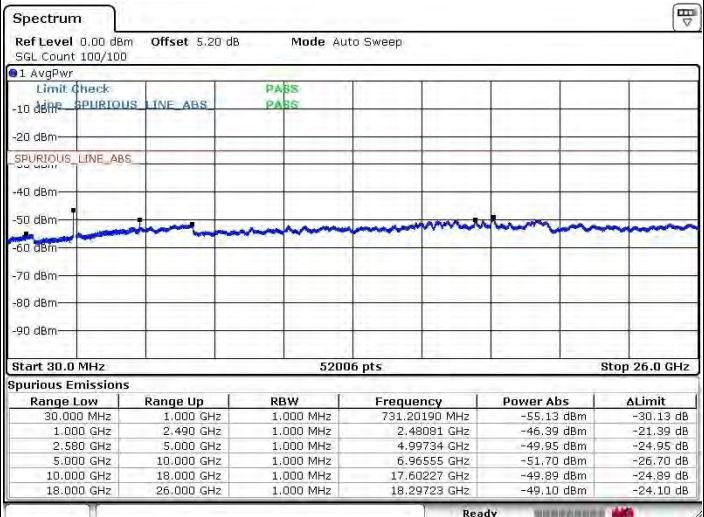



Date: 1 DEC.2015 17:21:17



LTE Band 7 / 20MHz

Middle Channel / QPSK

Middle Channel / 16QAM

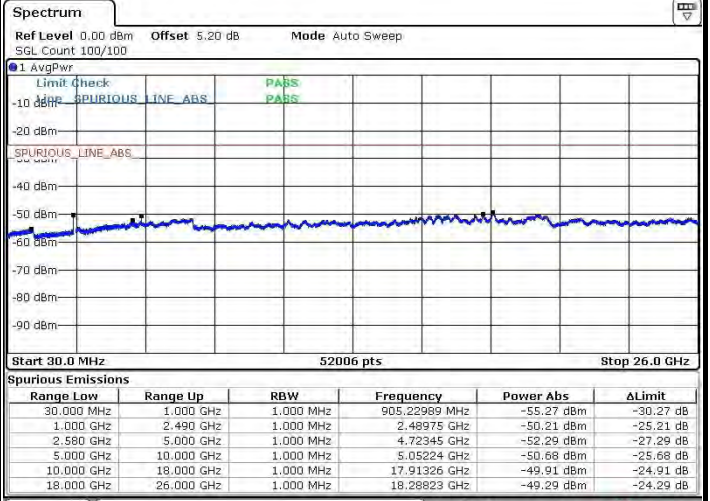
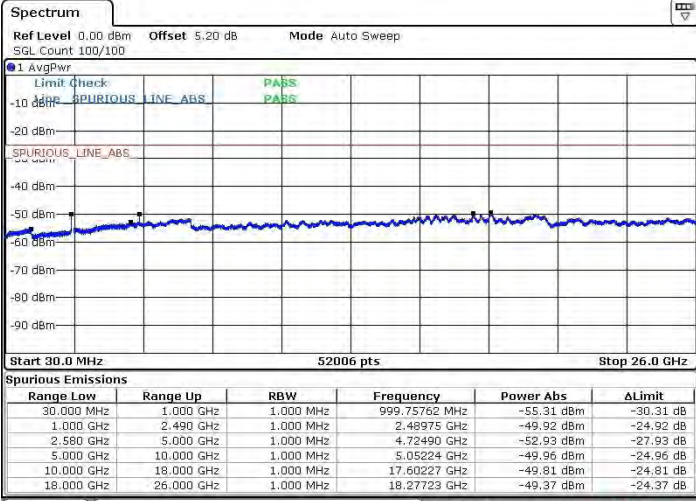


Date: 1 DEC.2015 17:18:45

Date: 1 DEC.2015 17:17:43

Highest Channel / QPSK

Highest Channel / 16QAM

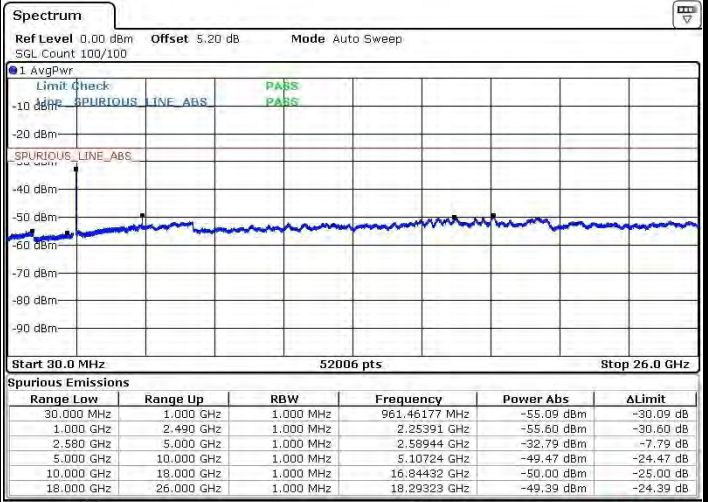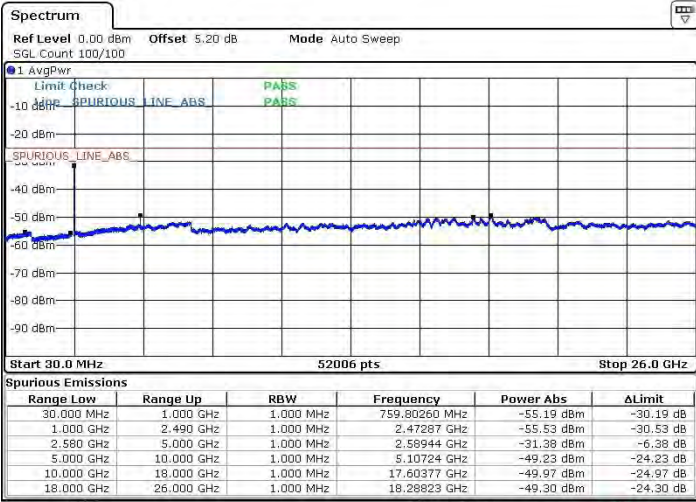

Date: 1 DEC.2015 17:23:08

Date: 1 DEC.2015 17:22:17



Frequency Stability

Test Conditions		LTE Band 7 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0013	PASS
40	Normal Voltage	0.0050	
30	Normal Voltage	0.0007	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0002	
0	Normal Voltage	0.0000	
-10	Normal Voltage	0.0030	
-20	Normal Voltage	0.0004	
-30	Normal Voltage	0.0026	
20	Maximum Voltage	0.0002	
20	Normal Voltage	0.0012	
20	Battery End Point	0.0002	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.65V. ; Maximum Voltage =4.35V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

EIRP

LTE Band 7 / 5MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	25.94	0.3926	25.79	0.3793
Middle		1	12	25.12	0.3251	24.93	0.3112
Highest		1	12	24.04	0.2535	24.02	0.2523
Lowest	16QAM	1	0	25.00	0.4064	24.82	0.3034
Middle		1	12	24.20	0.2630	24.00	0.2512
Highest		1	12	23.13	0.2056	23.08	0.2032
Limit	EIRP < 2W			Result		PASS	

LTE Band 7 / 10MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	25.96	0.3945	25.81	0.3811
Middle		1	49	25.00	0.3162	24.73	0.2972
Highest		1	0	24.42	0.2767	24.22	0.2642
Lowest	16QAM	1	0	25.01	0.3170	24.85	0.3055
Middle		1	49	24.14	0.2594	23.86	0.2432
Highest		1	0	23.54	0.2259	23.33	0.2153
Limit	EIRP < 2W			Result		PASS	



LTE Band 7 / 15MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	25.87	0.3864	25.71	0.3724
Middle		1	74	24.94	0.3119	24.71	0.2958
Highest		1	0	24.52	0.2831	24.37	0.2735
Lowest	16QAM	1	74	25.01	0.3170	24.86	0.3062
Middle		1	74	24.08	0.2559	23.84	0.2421
Highest		1	0	23.68	0.2333	23.54	0.2259
Limit	EIRP < 2W			Result		PASS	

LTE Band 7 / 20MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	99	25.70	0.3715	25.48	0.3532
Middle		1	99	24.92	0.3105	24.62	0.2897
Highest		1	99	23.91	0.2460	23.87	0.2438
Lowest	16QAM	1	99	24.89	0.3083	24.66	0.2924
Middle		1	99	24.08	0.2559	23.79	0.2393
Highest		1	0	23.86	0.2432	23.68	0.2333
Limit	EIRP < 2W			Result		PASS	



Radiated Spurious Emission

Table with 10 columns: Channel, Frequency (MHz), EIRP (dBm), Limit (dBm), Over Limit (dB), SPA Reading (dBm), S.G. Power (dBm), TX Cable loss (dB), TX Antenna Gain (dBi), Polarization (H/V). Rows include Middle channel frequencies from 5066 to 15198 MHz.

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Table with 10 columns: Channel, Frequency (MHz), EIRP (dBm), Limit (dBm), Over Limit (dB), SPA Reading (dBm), S.G. Power (dBm), TX Cable loss (dB), TX Antenna Gain (dBi), Polarization (H/V). Rows include Middle channel frequencies from 5060 to 15183 MHz.

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 7 / 15MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5057	-47.93	-25	-22.93	-61.91	-53.71	3.49	9.27	H
	7586.1	-43.91	-25	-18.91	-60.45	-51.70	4.28	12.07	H
	10112	-30.56	-25	-5.56	-55.82	-37.86	5.1	12.40	H
	12642	-34.57	-25	-9.57	-60.47	-41.85	5.66	12.94	H
	15171	-45.64	-25	-20.64	-73.86	-52.96	5.99	13.31	H
	5057	-48.25	-25	-23.25	-62.41	-54.03	3.49	9.27	V
	7586.1	-46.58	-25	-21.58	-63.6	-54.37	4.28	12.07	V
	10112	-34.64	-25	-9.64	-58.45	-41.94	5.1	12.40	V
	12642	-39.38	-25	-14.38	-62.91	-46.66	5.66	12.94	V
15171	-48.71	-25	-23.71	-77.93	-56.03	5.99	13.31	V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5054	-46.73	-25	-21.73	-60.71	-52.51	3.49	9.27	H
	7580	-43.24	-25	-18.24	-59.78	-51.03	4.28	12.07	H
	10104	-28.01	-25	-3.01	-54.25	-35.31	5.1	12.40	H
	12630	-34.76	-25	-9.76	-60.66	-42.04	5.66	12.94	H
	15156	-47.00	-25	-22.00	-75.22	-54.32	5.99	13.31	H
	5051	-47.72	-25	-22.72	-61.88	-53.50	3.49	9.27	V
	7578.54	-46.03	-25	-21.03	-63.05	-53.82	4.28	12.07	V
	10104	-42.66	-25	-17.66	-63.76	-49.96	5.1	12.40	V
	12630	-42.26	-25	-17.26	-65.79	-49.54	5.66	12.94	V
	15156	-49.78	-25	-24.78	-79	-57.10	5.99	13.31	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.