

FCC RF Test Report

APPLICANT : Lenovo Mobile Communication Technology Ltd.
EQUIPMENT : Lenovo Mobile Phone
BRAND NAME : lenovo
MODEL NAME : Lenovo A850
MID : 85000031
FCC ID : YCNA850
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jul. 29, 2013 and completely tested on Aug. 02, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 6

 1.6 Testing Site 7

 1.7 Applied Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System 11

 2.5 Support Unit used in test configuration and system 12

 2.6 Description of RF Function Operation Test Setup 12

 2.7 Measurement Results Explanation Example 13

3 TEST RESULT 14

 3.1 6dB Bandwidth Measurement 14

 3.2 Output Power Measurement 17

 3.3 Power Spectral Density Measurement 20

 3.4 Conducted Band Edges and Spurious Emission Measurement 23

 3.5 Radiated Band Edges and Spurious Emission Measurement 36

 3.6 AC Conducted Emission Measurement 62

 3.7 Antenna Requirements 66

4 LIST OF MEASURING EQUIPMENT 67

5 UNCERTAINTY OF EVALUATION 68

APPENDIX A. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.29 dB at 2389.02 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.92 dB at 0.480 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Lenovo Mobile Communication Technology Ltd.

No.999, Qishan North 2nd Road, Information & Optoelectronics Park, Torch Hi-tech Industry Development Zone, Xiamen, P.R.China

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Lenovo Mobile Phone
Brand Name	lenovo
Model Name	Lenovo A850
MID	85000031
FCC ID	YCNA850
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/WLAN 11bgn / Bluetooth 2.0/2.1/3.0/4.0
HW Version	A850.ROW.V10
SW Version	Lenovo A850_ROW_S100_130723
EUT Stage	pre-production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum Output Power to Antenna	802.11b : 18.95 dBm (0.0785 W) 802.11g : 23.15 dBm (0.2065 W) 802.11n HT20 : 23.11 dBm (0.2046 W) 802.11n HT40 : 22.54 dBm (0.1795 W)
Antenna Type	802.11b/g/n : PIFA Antenna type with gain 1 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.			
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-SZ	CO01-SZ	03CH01-SZ	831040/4086F-1

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and the highest data rates of peak power were chosen for full test shown in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	18.33	18.31	18.24	18.29
CH 06	2437 MHz	18.48	18.47	18.39	18.42
CH 11	2462 MHz	18.95	18.93	18.87	18.76

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	22.27	22.25	22.21	22.18	22.16	22.12	22.09	22.06
CH 06	2437 MHz	22.92	22.90	22.88	22.89	22.85	22.86	22.82	22.81
CH 11	2462 MHz	23.15	23.14	23.11	23.12	23.10	23.06	23.09	23.08

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	21.36	21.32	21.28	21.22	21.15	21.08	20.89	20.72
CH 06	2437 MHz	22.84	22.80	22.81	22.75	22.76	22.72	22.67	22.69
CH 11	2462 MHz	23.11	23.08	23.07	23.05	23.02	23.01	23.02	22.96

Channel	Frequency	2.4GHz 802.11n HT40 RF Power (dBm)							
		OFDM Data Rate							
		13.5 Mbps	27 Mbps	40.5 Mbps	54 Mbps	81 Mbps	108 Mbps	121.5 Mbps	135 Mbps
CH 03	2422 MHz	19.73	19.51	19.38	19.24	18.95	18.62	18.33	17.92
CH 06	2437 MHz	22.54	21.99	21.86	21.76	21.64	21.76	21.62	21.64
CH 09	2452 MHz	22.51	21.83	21.63	21.76	21.74	21.47	21.12	21.66



2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


<2.4GHz>

Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB and 99% BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

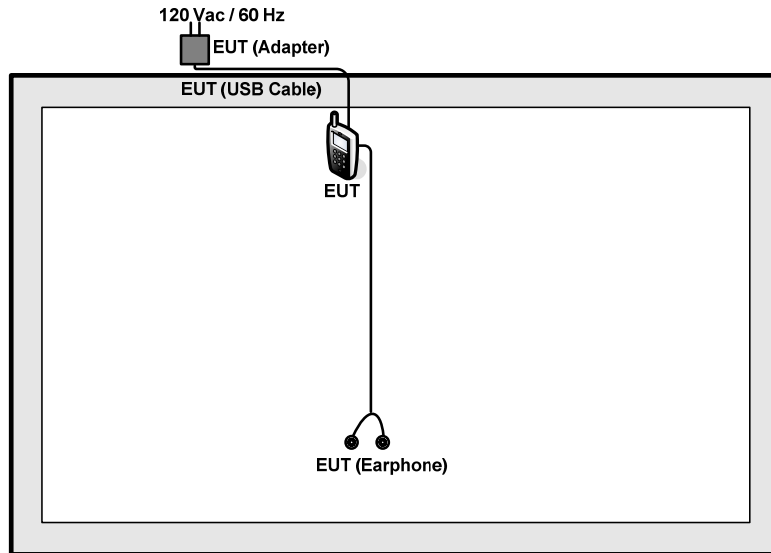

<AC Conducted Emission Mode>

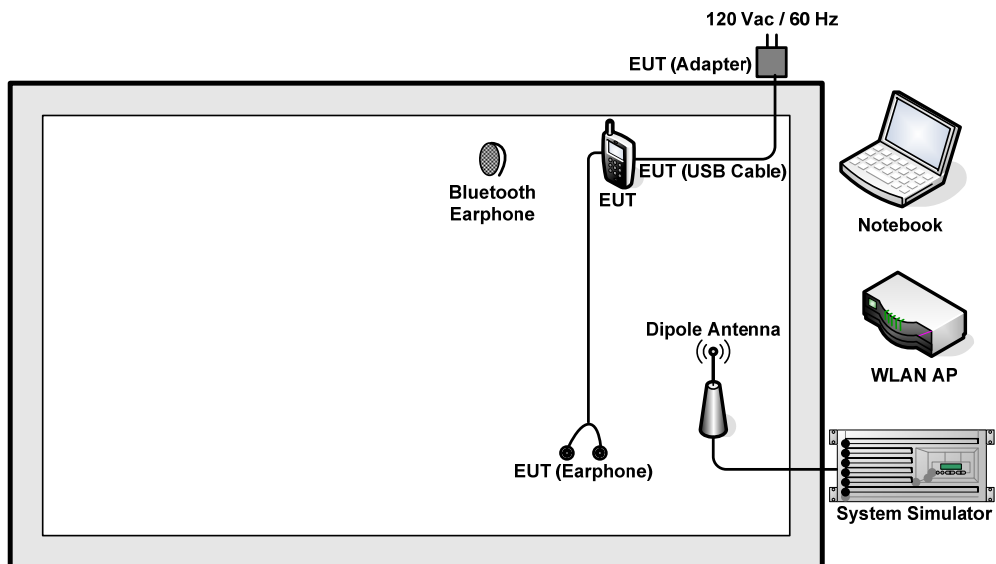

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Lenovo	LBH301	FCC DoC	N/A	N/A

2.6 Description of RF Function Operation Test Setup

For WLAN RF test items, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 7.5 + 10 = 17.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

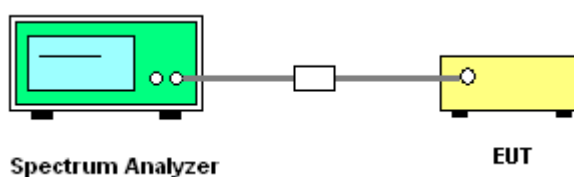




3.1.5 Test Result of 6dB Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	9.52	0.5	Pass
11b	1Mbps	1	6	2437	9.08	0.5	Pass
11b	1Mbps	1	11	2462	9.52	0.5	Pass
11g	6Mbps	1	1	2412	15.12	0.5	Pass
11g	6Mbps	1	6	2437	15.16	0.5	Pass
11g	6Mbps	1	11	2462	15.28	0.5	Pass
HT20	MCS0	1	1	2412	17.60	0.5	Pass
HT20	MCS0	1	6	2437	17.60	0.5	Pass
HT20	MCS0	1	11	2462	17.60	0.5	Pass
HT40	MCS0	1	3	2412	36.00	0.5	Pass
HT40	MCS0	1	6	2437	36.08	0.5	Pass
HT40	MCS0	1	9	2462	36.24	0.5	Pass



Worst Case 6dB Bandwidth

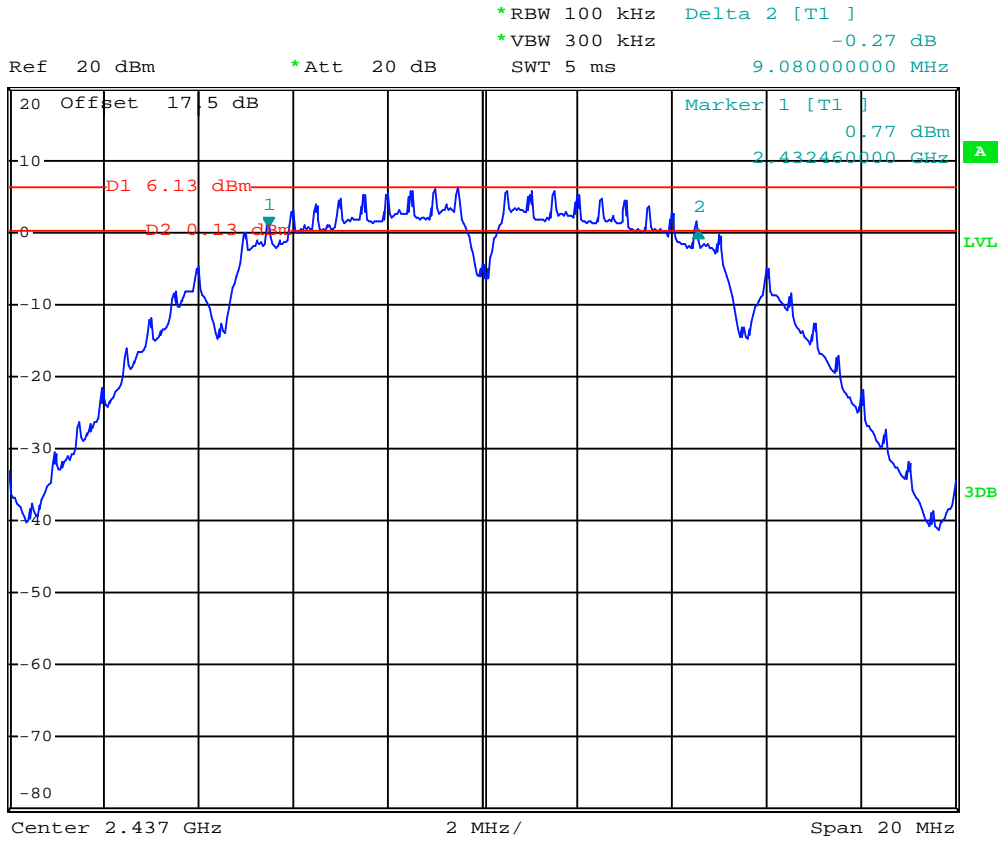

Date: 31.JUL.2013 15:15:24

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

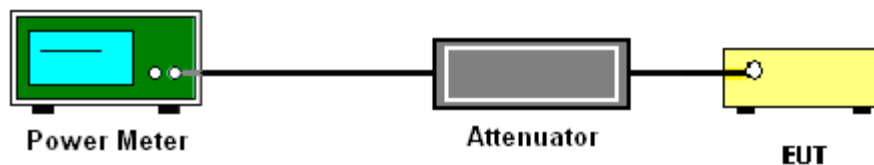



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	18.33	30	1.00	Pass
11b	1Mbps	1	6	2437	18.48	30	1.00	Pass
11b	1Mbps	1	11	2462	18.95	30	1.00	Pass
11g	6Mbps	1	1	2412	22.27	30	1.00	Pass
11g	6Mbps	1	6	2437	22.92	30	1.00	Pass
11g	6Mbps	1	11	2462	23.15	30	1.00	Pass
HT20	MCS0	1	1	2412	21.36	30	1.00	Pass
HT20	MCS0	1	6	2437	22.84	30	1.00	Pass
HT20	MCS0	1	11	2462	23.11	30	1.00	Pass
HT40	MCS0	1	3	2412	19.73	30	1.00	Pass
HT40	MCS0	1	6	2437	22.54	30	1.00	Pass
HT40	MCS0	1	9	2462	22.51	30	1.00	Pass

Note: Measured power (dBm) has offset with cable loss.



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.08	15.40	30	1.00	Pass
11b	1Mbps	1	6	2437	0.08	15.60	30	1.00	Pass
11b	1Mbps	1	11	2462	0.08	16.04	30	1.00	Pass
11g	6Mbps	1	1	2412	0.50	11.99	30	1.00	Pass
11g	6Mbps	1	6	2437	0.50	13.83	30	1.00	Pass
11g	6Mbps	1	11	2462	0.50	14.31	30	1.00	Pass
HT20	MCS0	1	1	2412	0.54	10.58	30	1.00	Pass
HT20	MCS0	1	6	2437	0.54	13.16	30	1.00	Pass
HT20	MCS0	1	11	2462	0.54	13.71	30	1.00	Pass
HT40	MCS0	1	3	2412	1.01	8.32	30	1.00	Pass
HT40	MCS0	1	6	2437	1.01	11.47	30	1.00	Pass
HT40	MCS0	1	9	2462	1.01	11.15	30	1.00	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

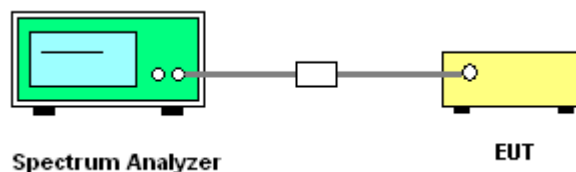



3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-7.51	8	1.00	Pass
11b	1Mbps	1	6	2437	-7.59	8	1.00	Pass
11b	1Mbps	1	11	2462	-7.97	8	1.00	Pass
11g	6Mbps	1	1	2412	-11.08	8	1.00	Pass
11g	6Mbps	1	6	2437	-12.65	8	1.00	Pass
11g	6Mbps	1	11	2462	-11.04	8	1.00	Pass
HT20	MCS0	1	1	2412	-12.42	8	1.00	Pass
HT20	MCS0	1	6	2437	-13.57	8	1.00	Pass
HT20	MCS0	1	11	2462	-12.56	8	1.00	Pass
HT40	MCS0	1	3	2412	-20.18	8	1.00	Pass
HT40	MCS0	1	6	2437	-21.11	8	1.00	Pass
HT40	MCS0	1	9	2462	-20.27	8	1.00	Pass

Note: Measured power density (dBm) has offset with cable loss.




Worst Case Power Density (dBm/3kHz)



Ref 20 dBm *Att 20 dB *RBW 3 kHz Marker 1 [T1] *VBW 10 kHz -7.51 dBm SWT 1.6 s 2.415013080 GHz

1 PK
MAXH

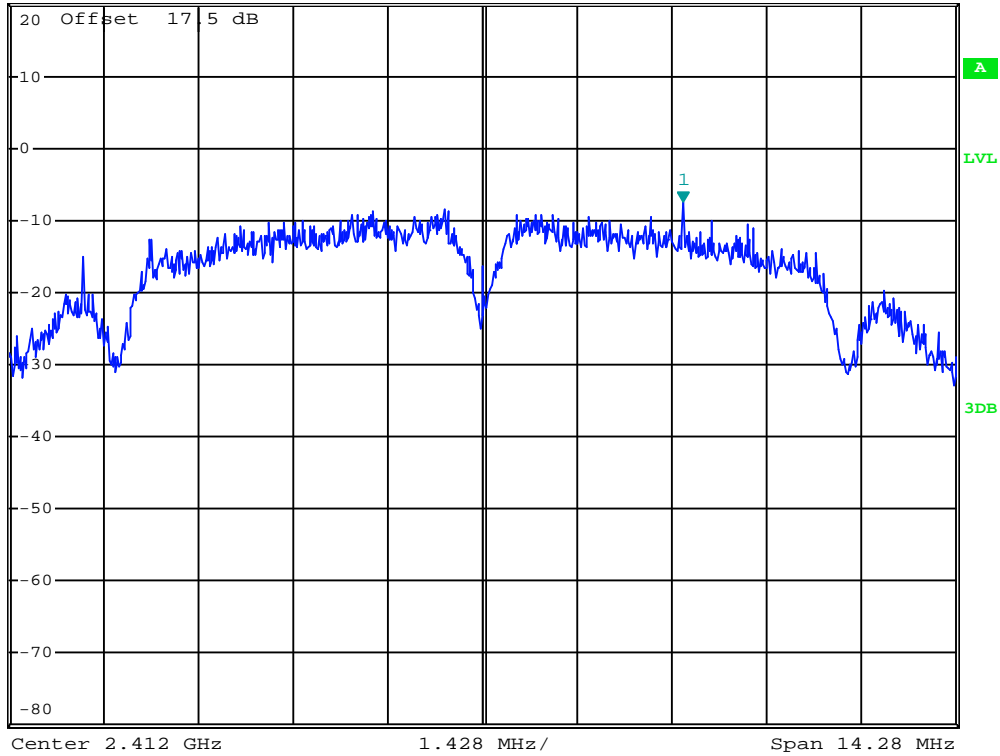

Date: 31.JUL.2013 15:12:24

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval.
5. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
6. Measure and record the results in the test report.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

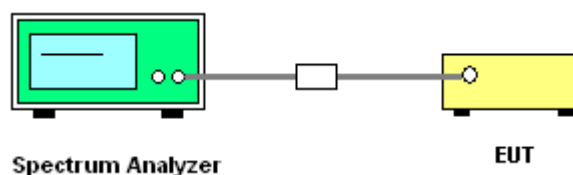




2.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Chen

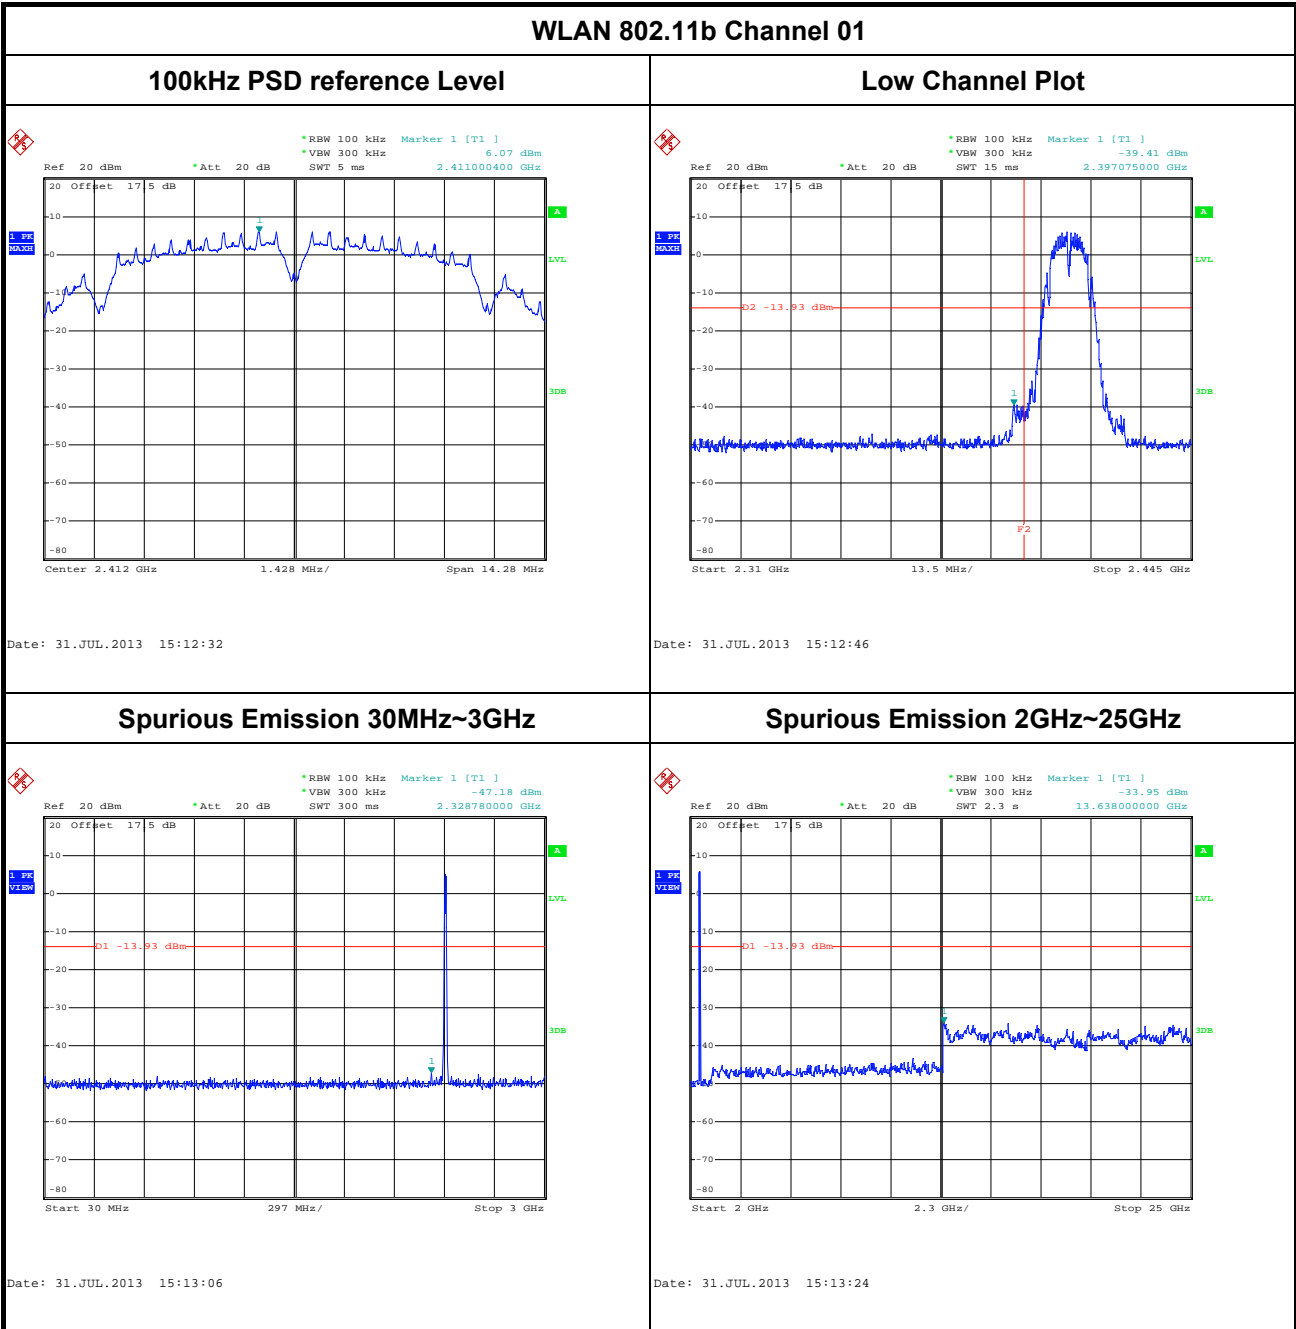




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Chen

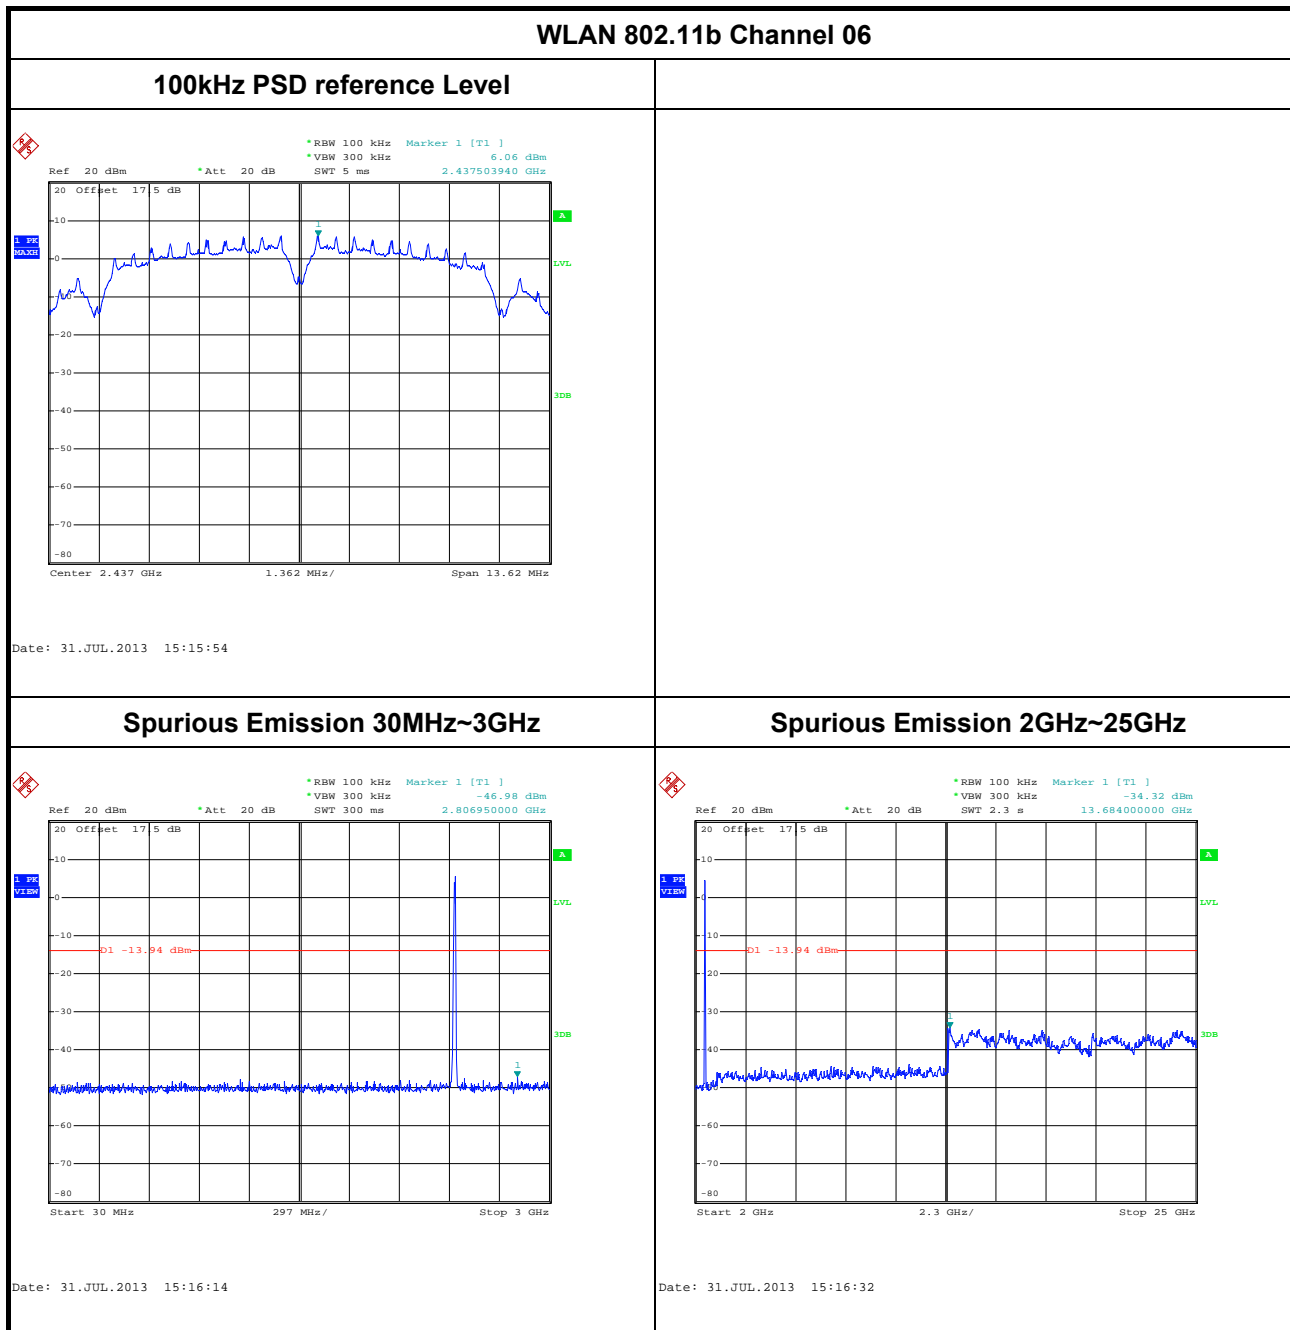




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Chen

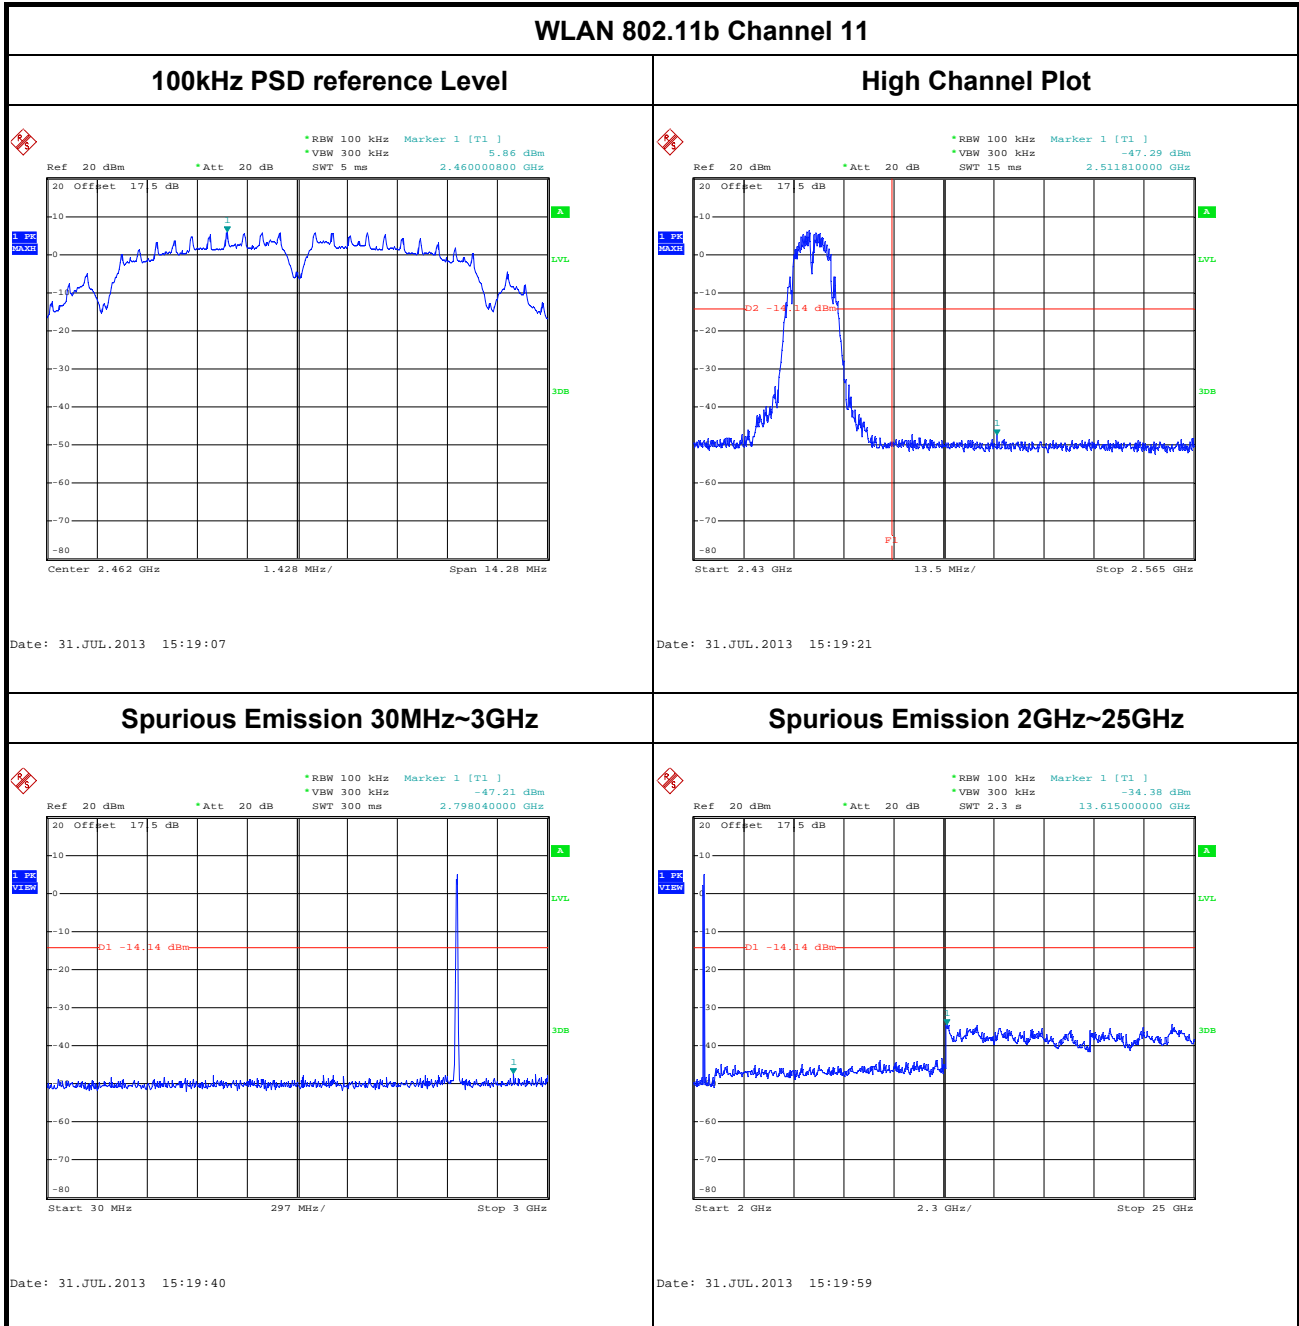




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Chen

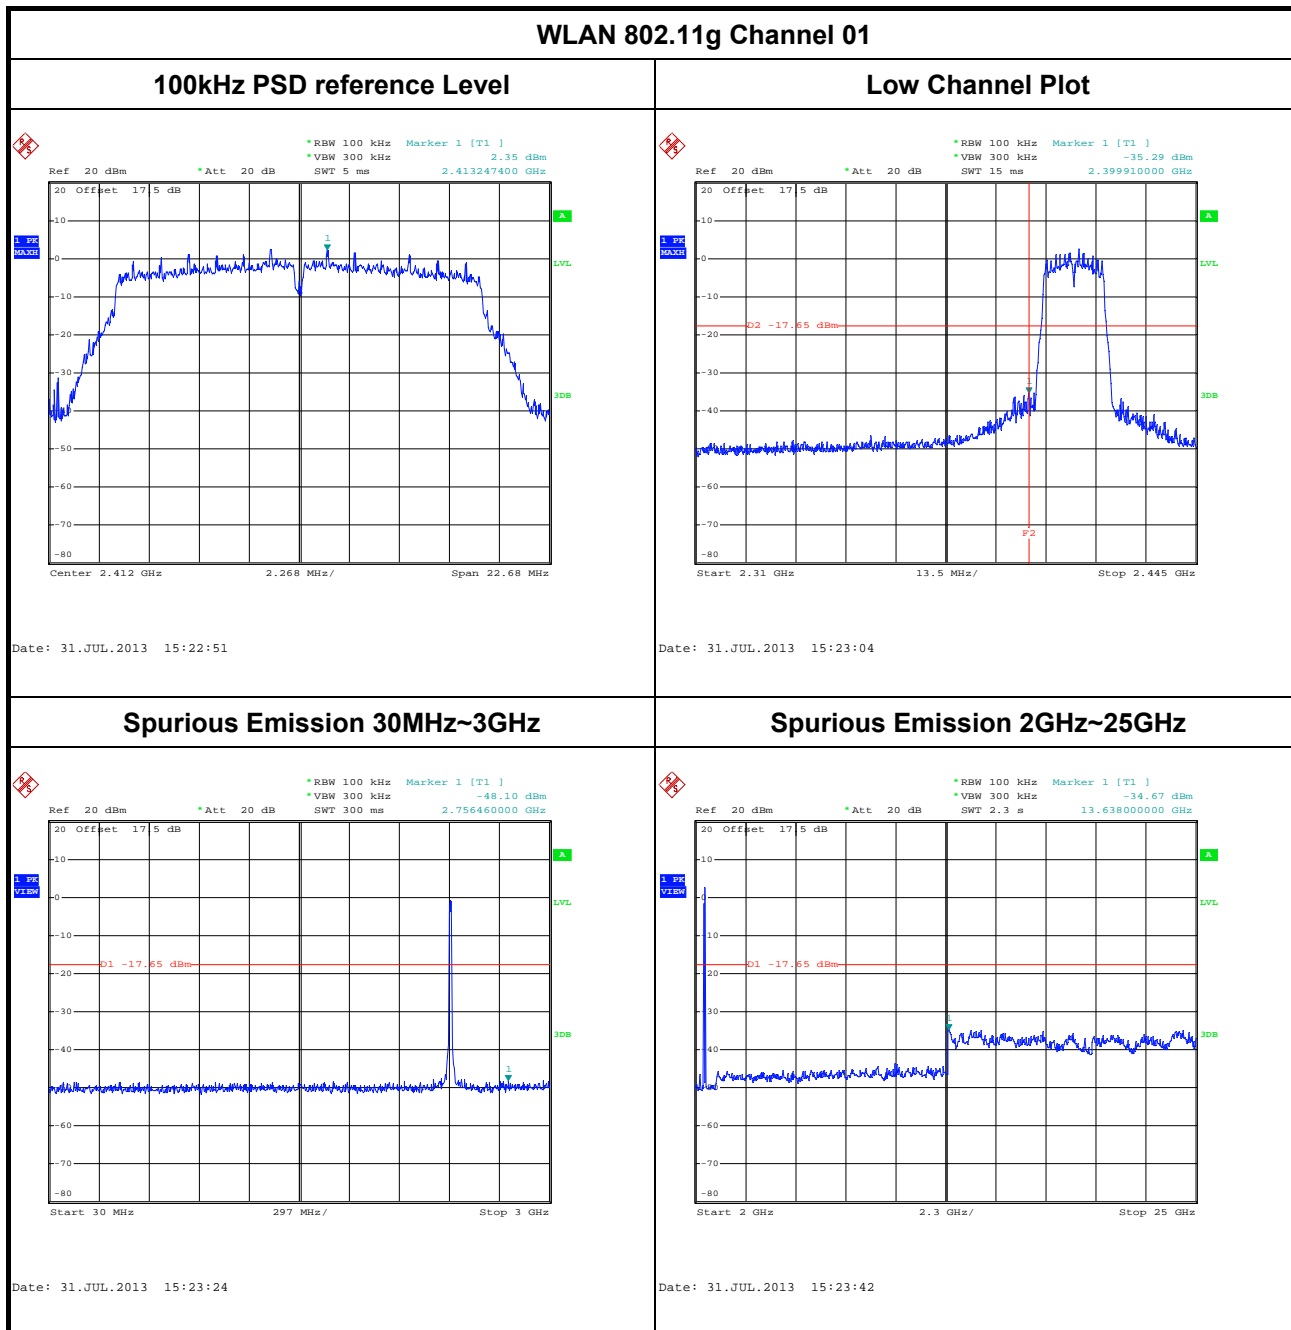




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Chen

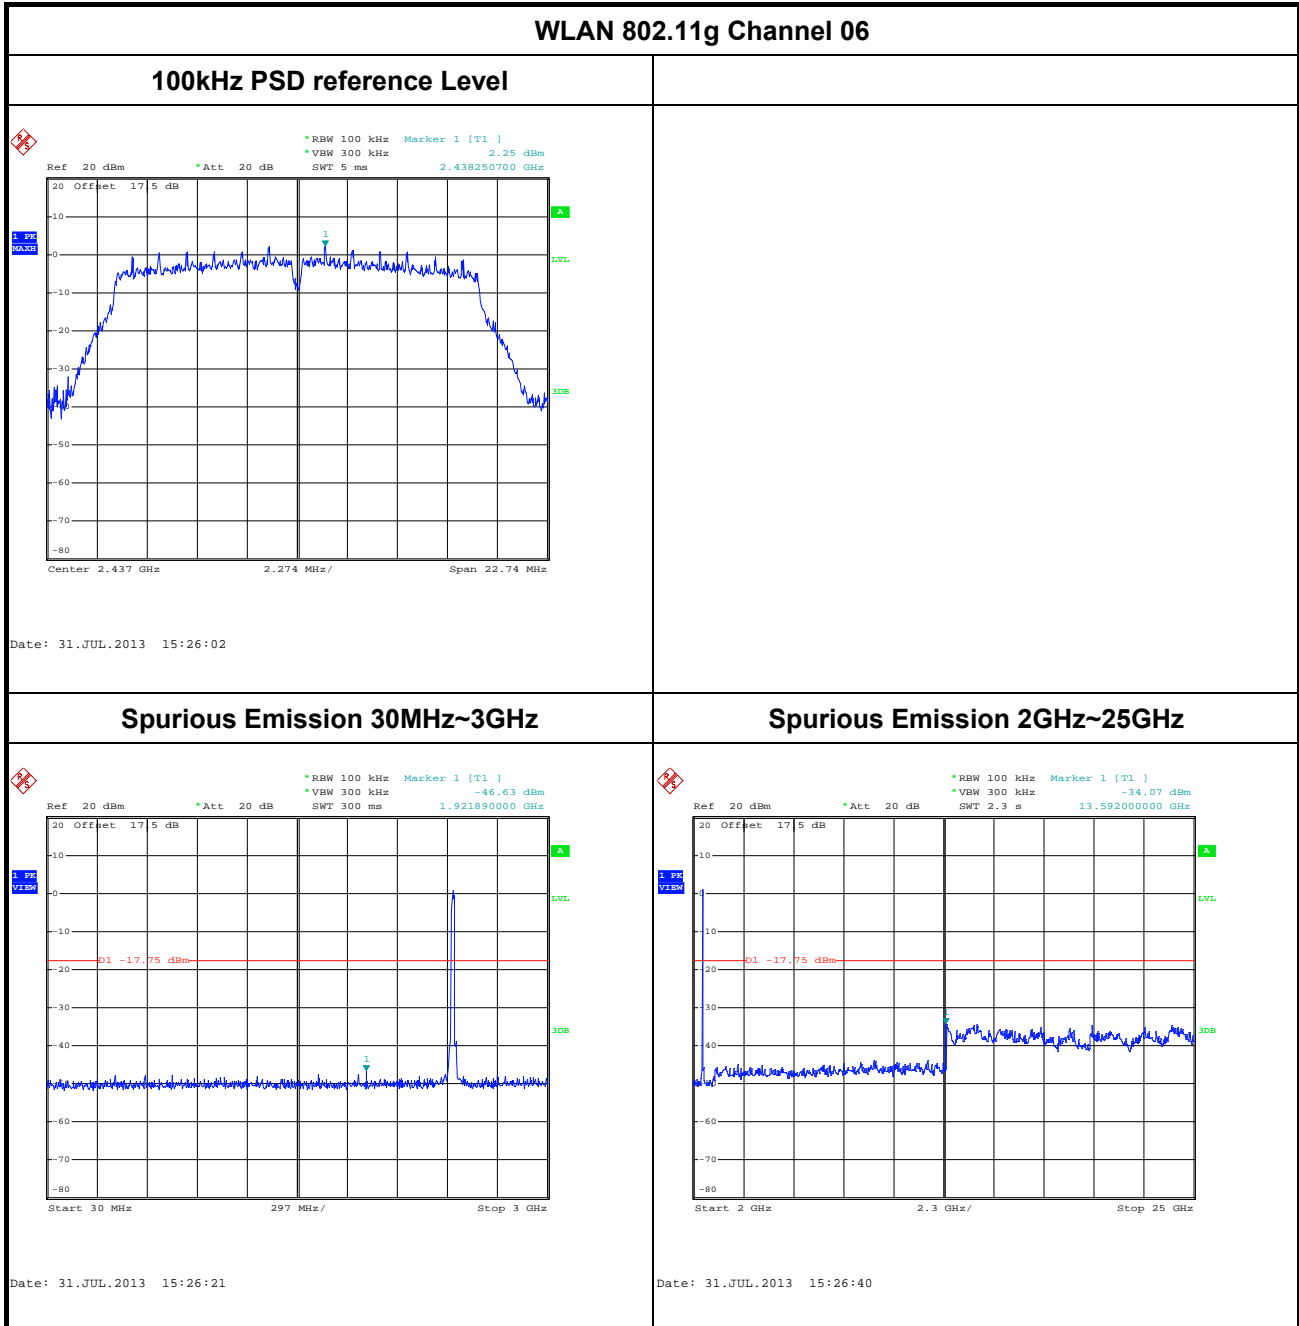




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Chen

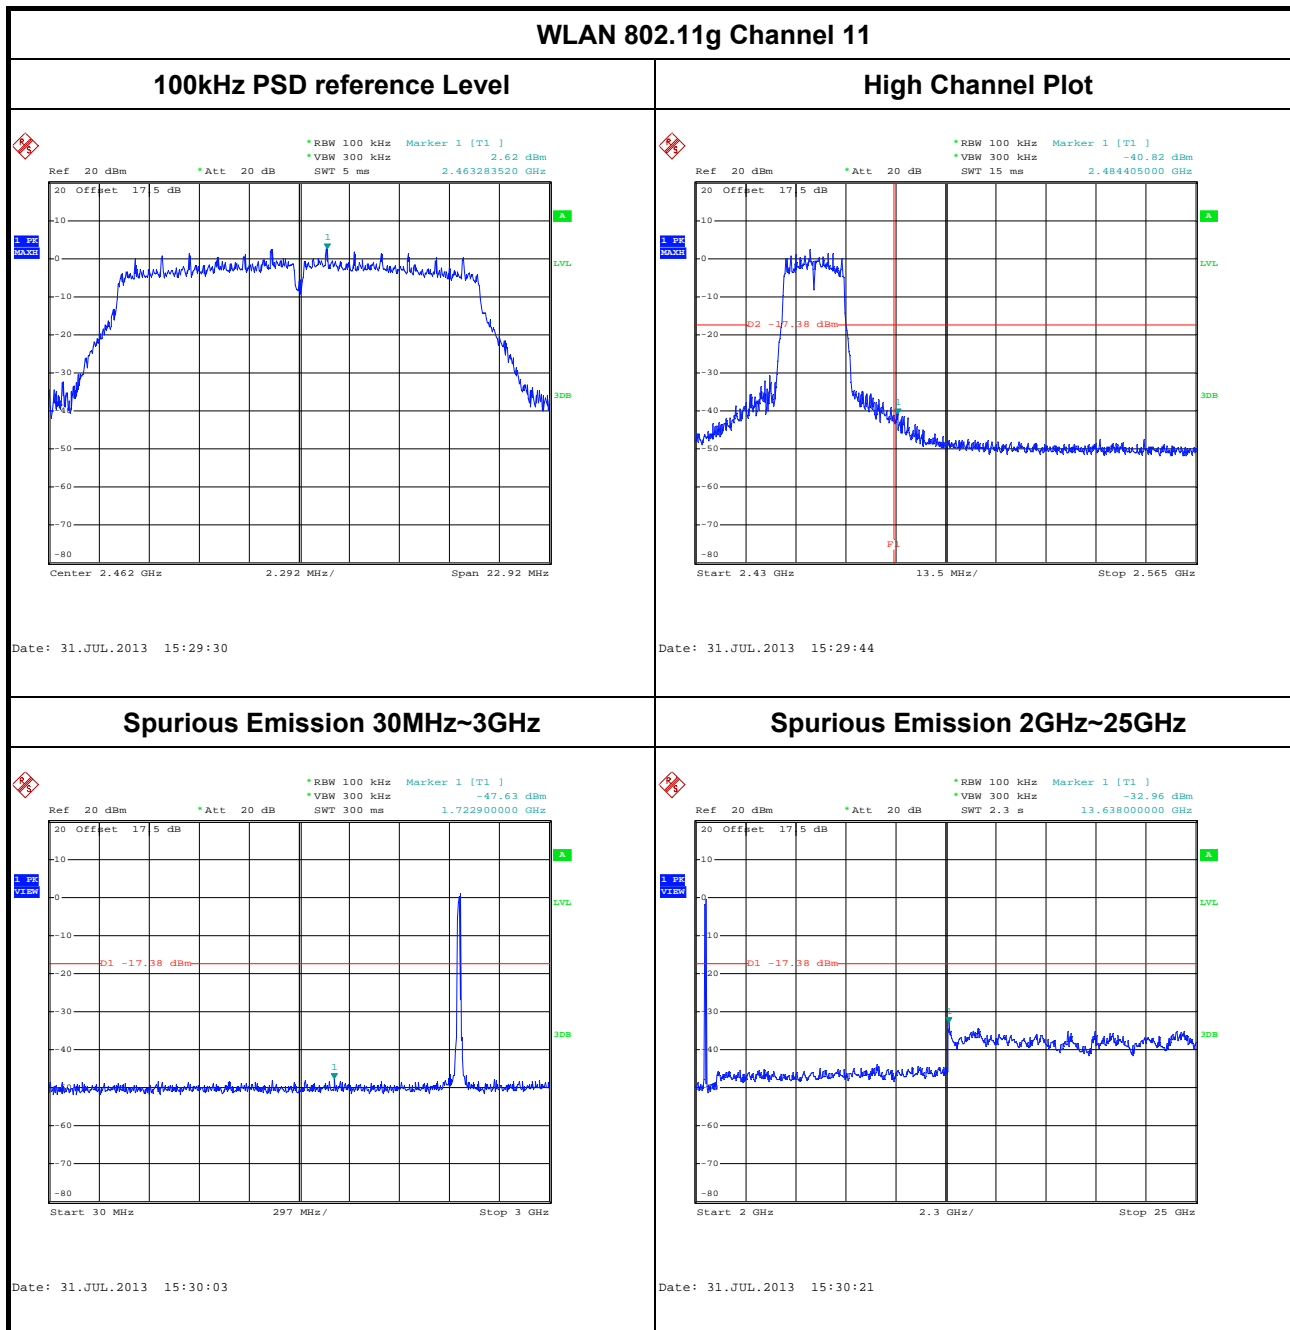




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Chen

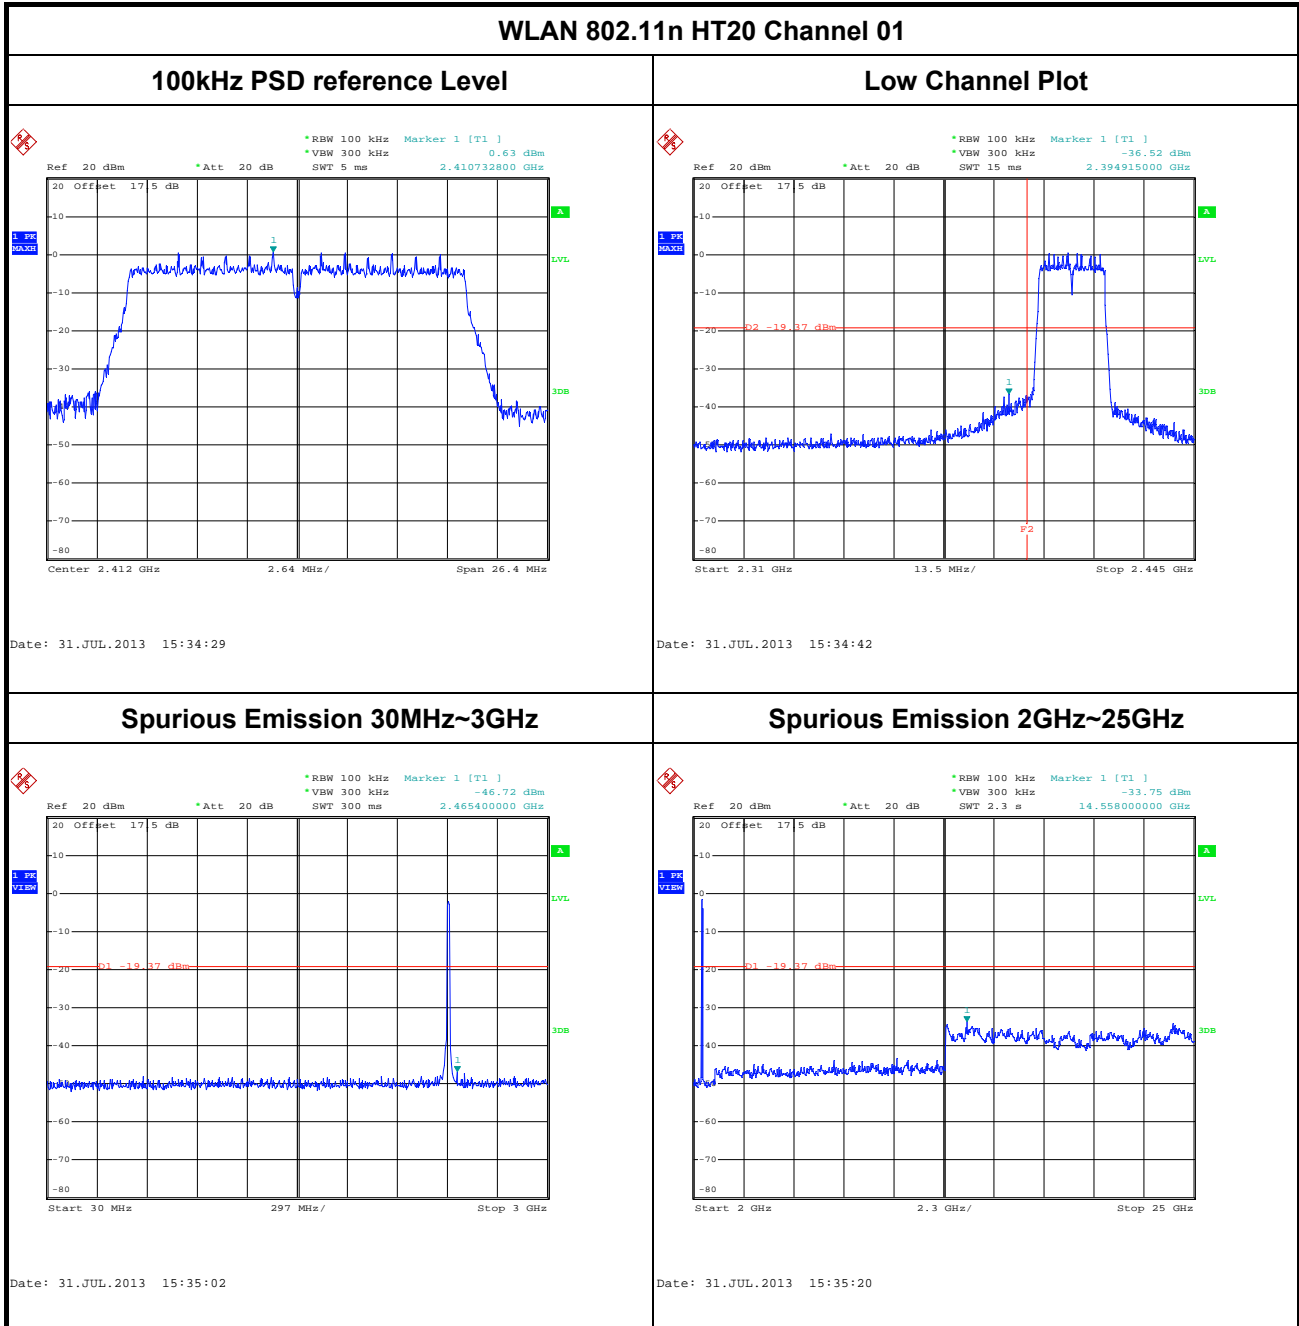




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Chen

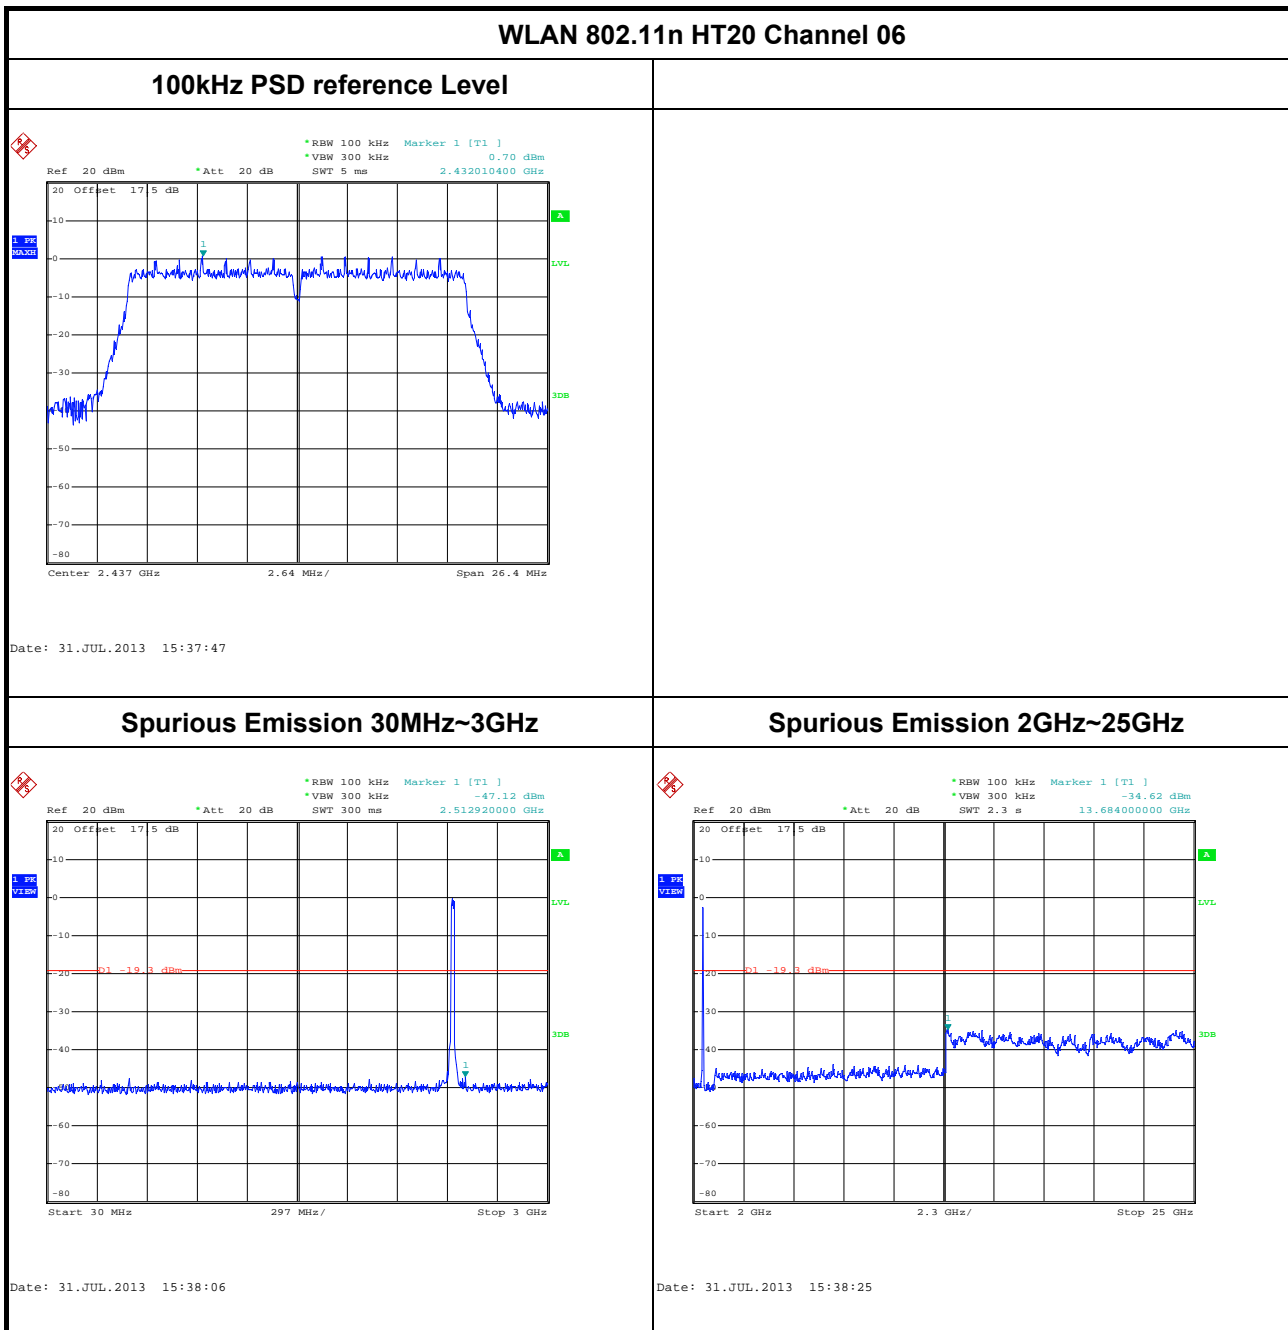




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Chen

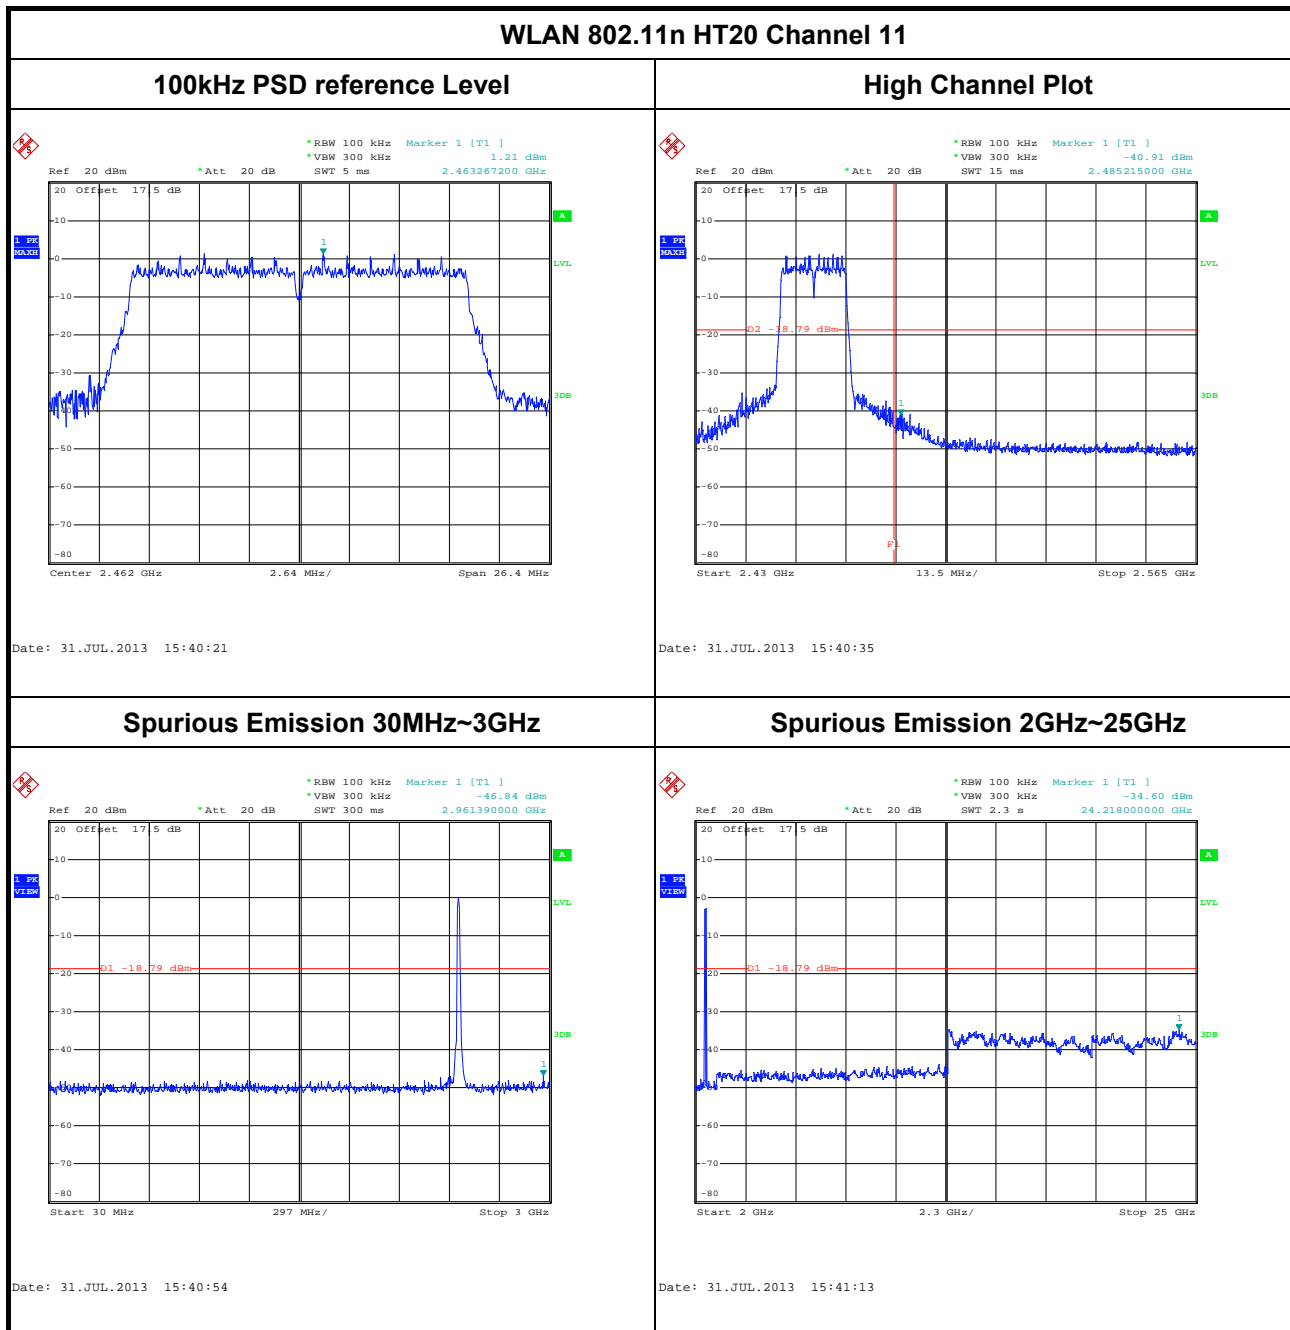




Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	03	Test Engineer :	Fly Chen

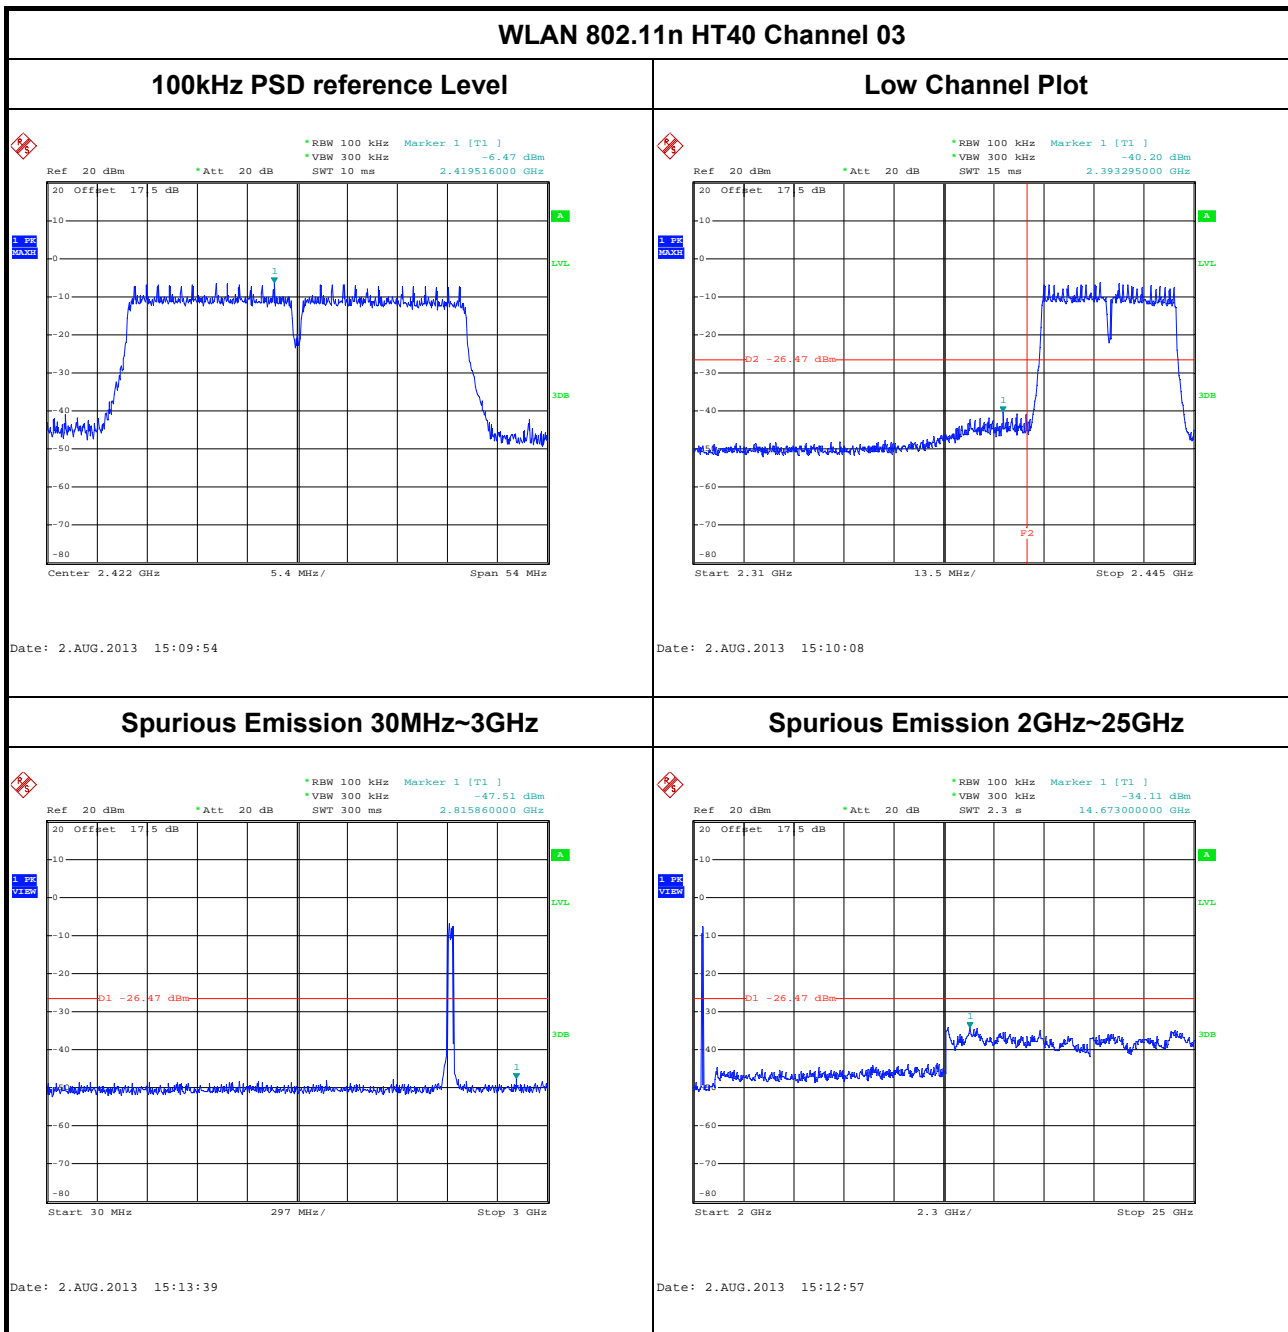




Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Chen

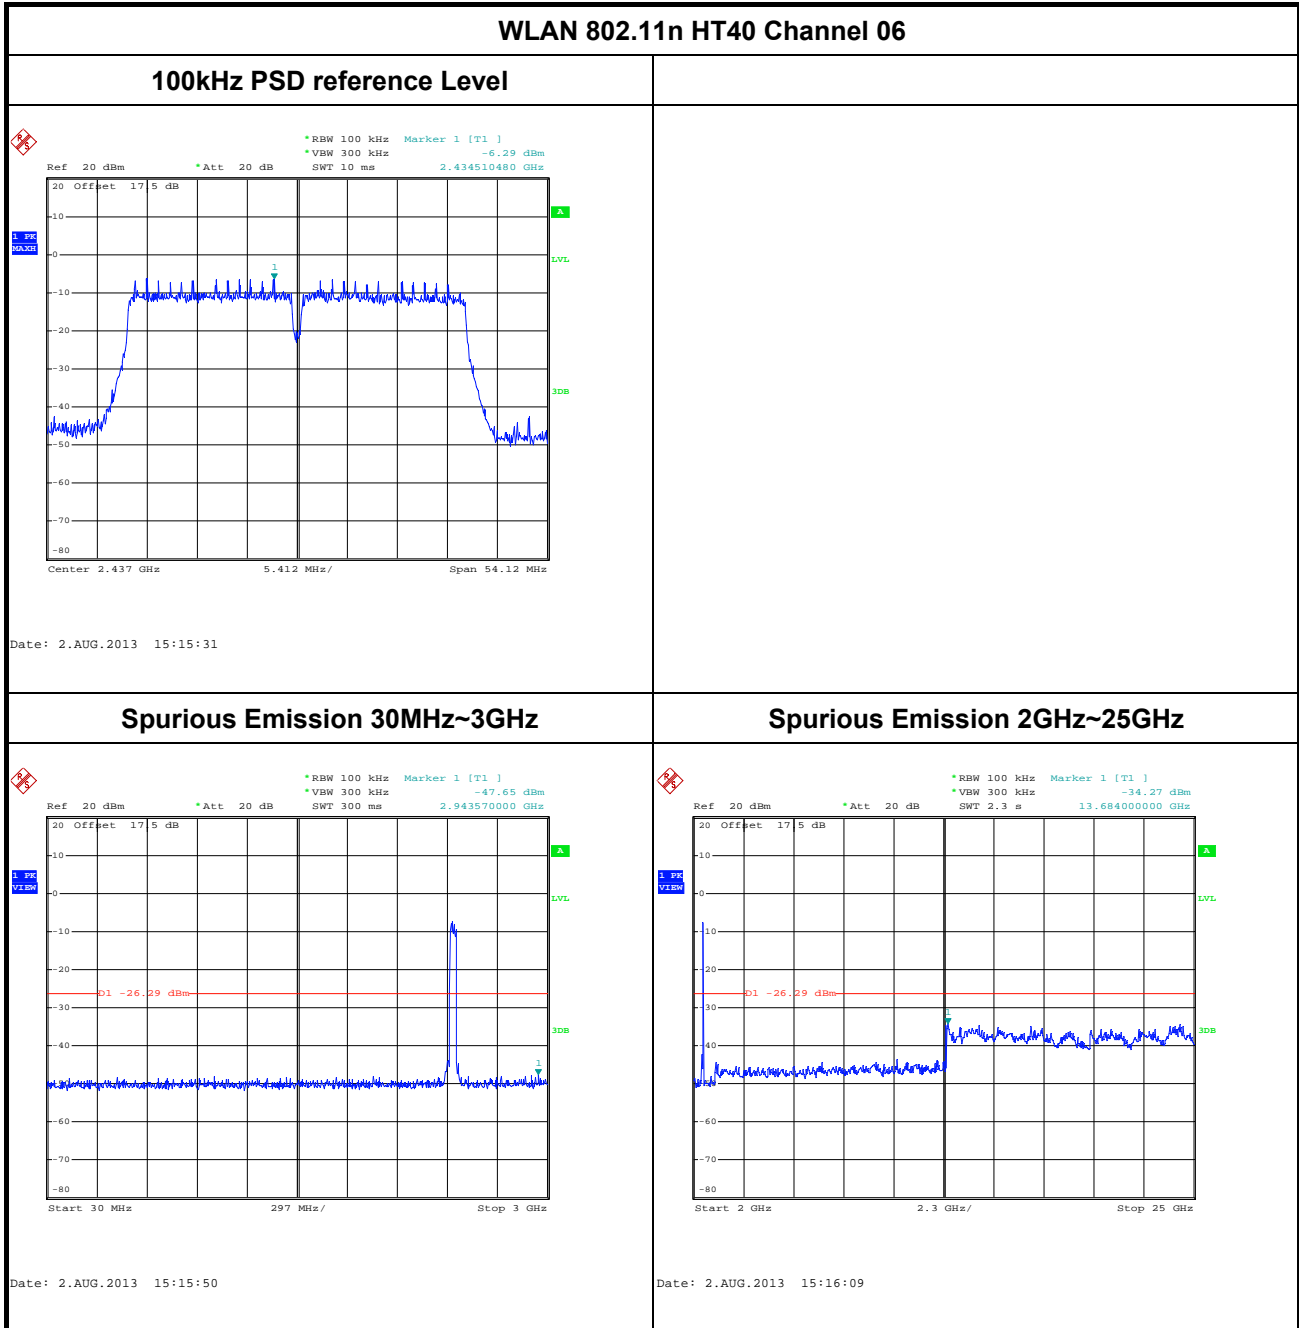



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	09	Test Engineer :	Fly Chen

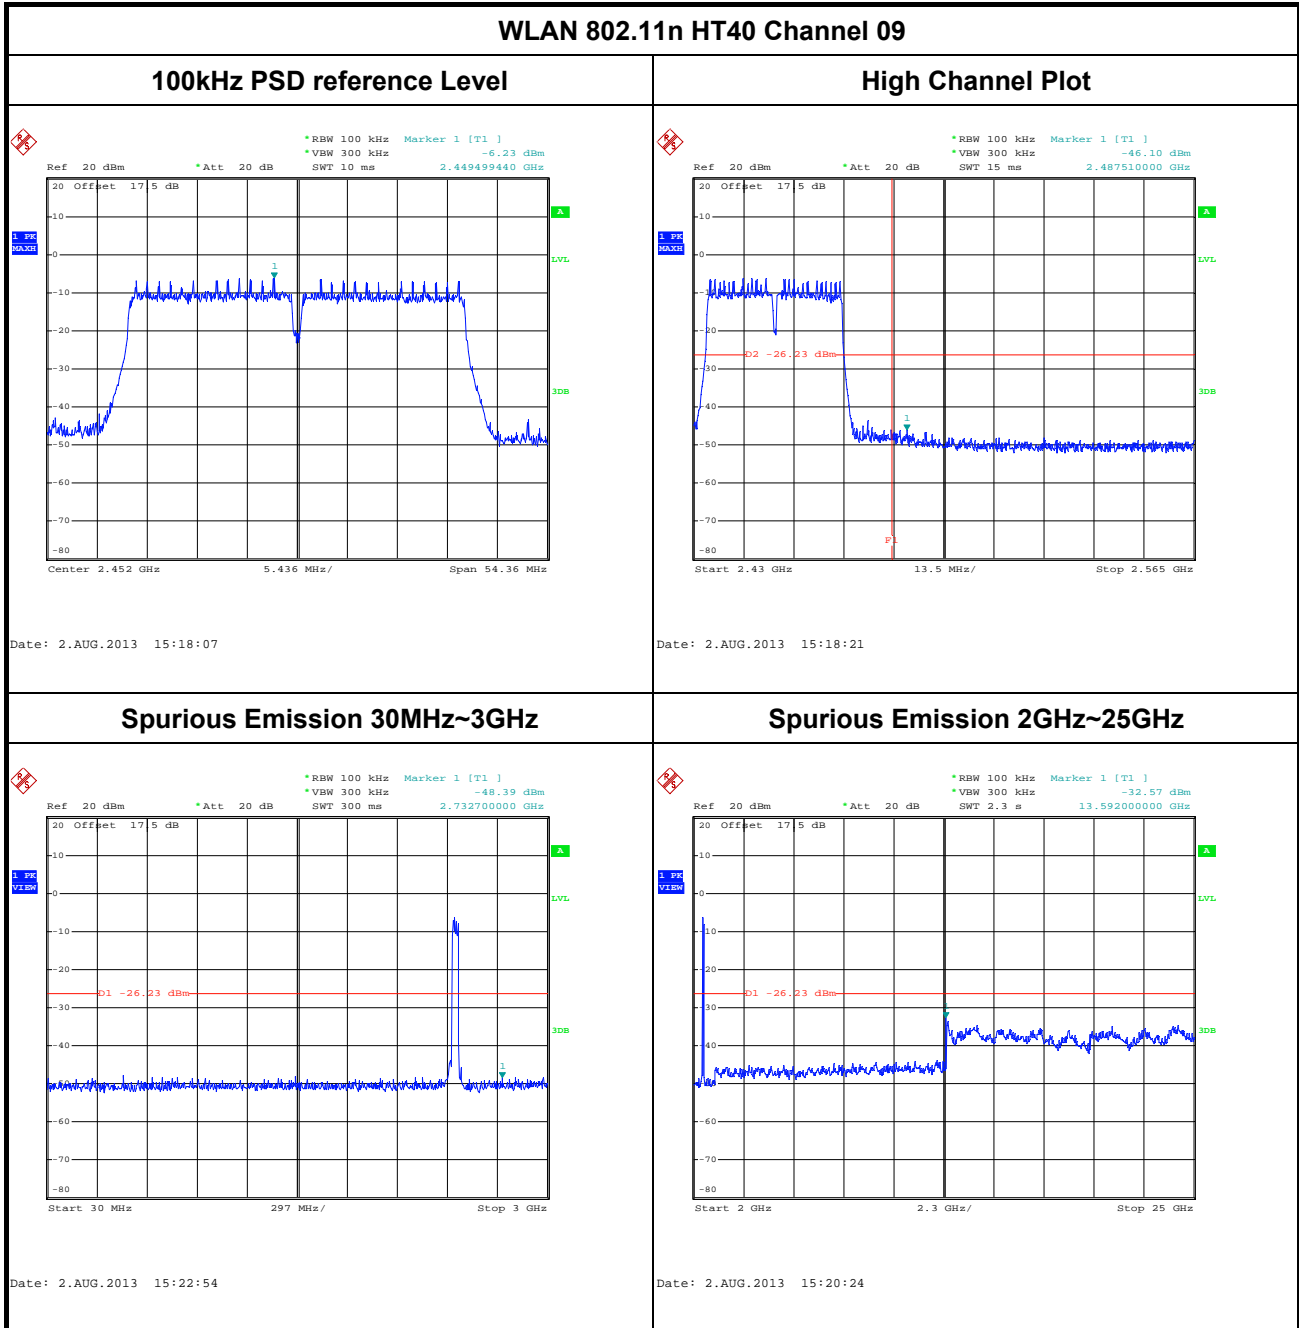

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
 For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.04	1.398	0.715	1kHz
2.4GHz 802.11n HT20	88.37	1.307	0.765	1kHz
2.4GHz 802.11n HT40	79.25	0.653	1.531	3kHz

Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.



802.11b Duty Cycle

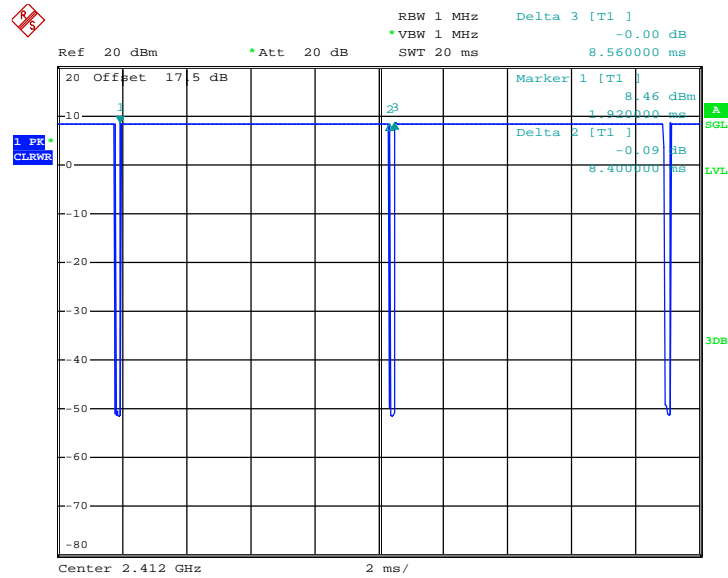


Date: 30.JUL.2013 22:11:14

Note:

The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.



802.11g Duty Cycle

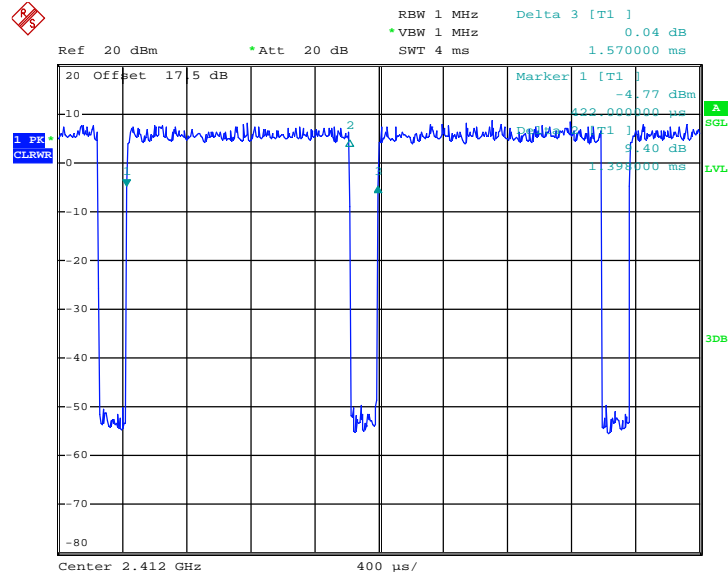


Note:

The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.



2.4GHz 802.11n HT20 Duty Cycle

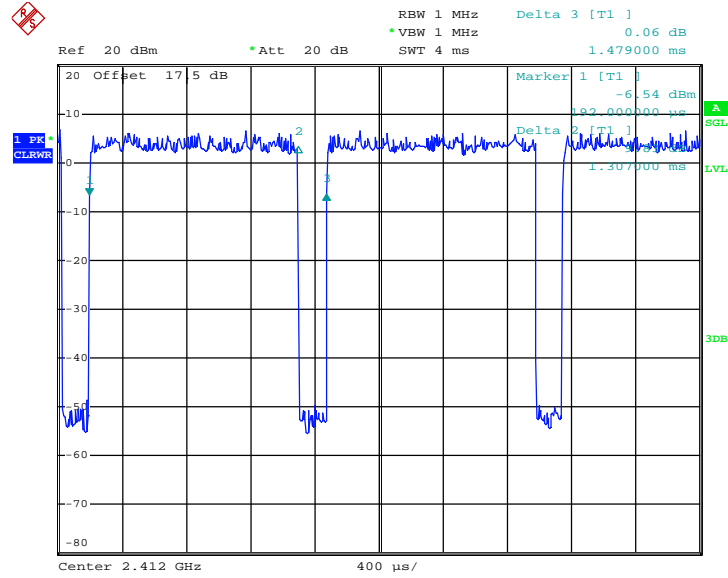


Note:

The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.



2.4GHz 802.11n HT40 Duty Cycle

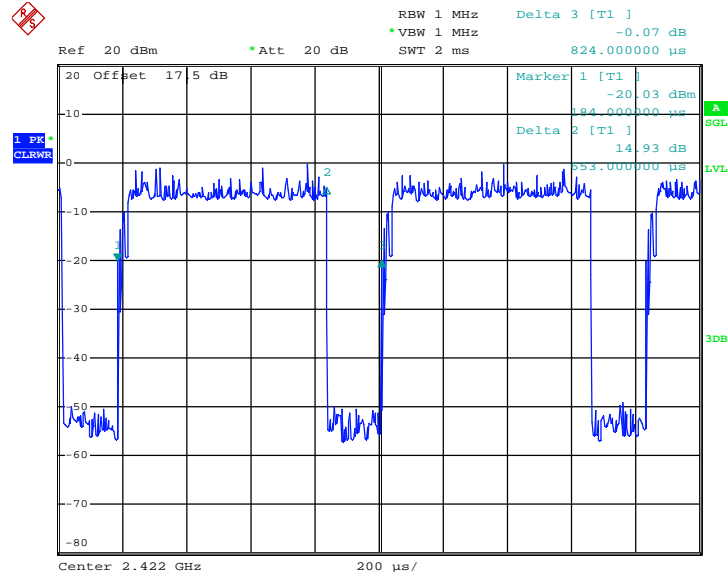


Note:


The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.5.4 Test Setup


For radiated emissions below 30MHz

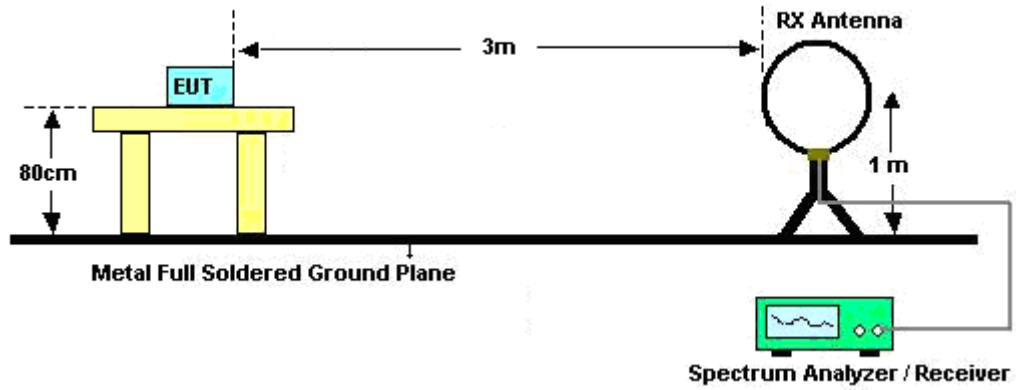

For radiated emissions from 30MHz to 1GHz

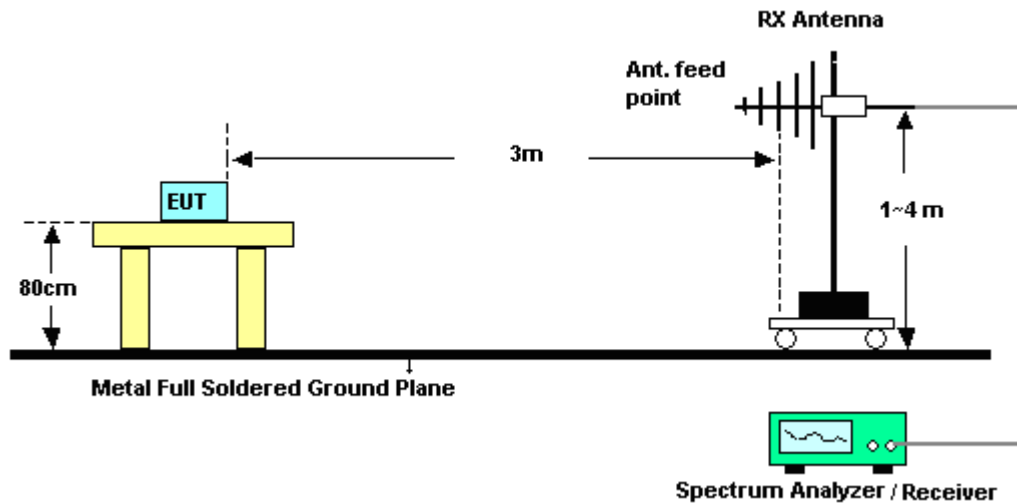

For radiated emissions above 1GHz

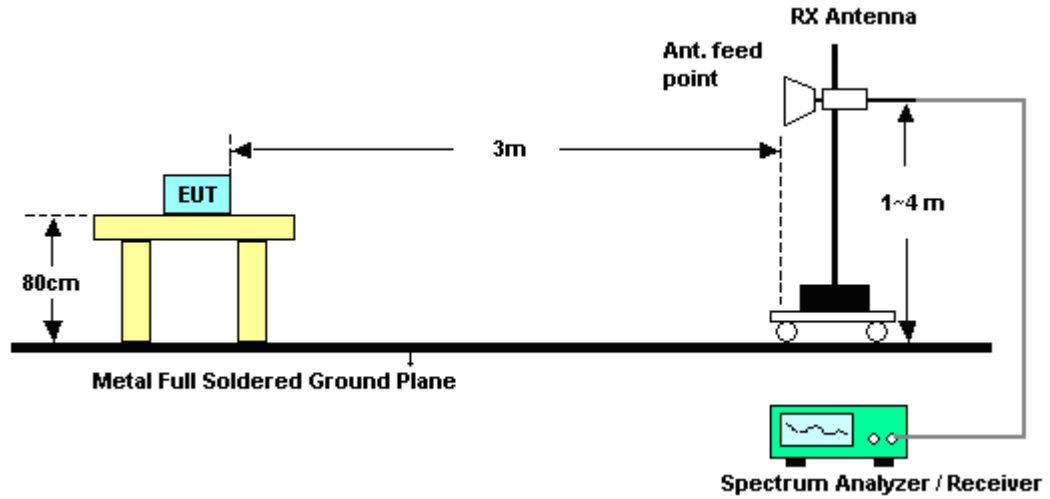

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	49~52%
Test Channel :	01	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2358.78	54.76	-19.24	74	46.89	32.1	5.56	29.79	100	66	Peak
2389.02	44.33	-9.67	54	36.39	32.14	5.59	29.79	100	66	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2376.78	51.48	-22.52	74	43.56	32.12	5.59	29.79	186	99	Peak
2389.02	40.93	-13.07	54	32.99	32.14	5.59	29.79	186	99	Average

Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	49~52%
Test Channel :	11	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.76	52.83	-21.17	74	44.61	32.27	5.71	29.76	123	51	Peak
2484.7	42.87	-11.13	54	34.65	32.27	5.71	29.76	123	51	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2497.24	51.68	-22.32	74	43.4	32.29	5.74	29.75	106	115	Peak
2484.73	40.52	-13.48	54	32.3	32.27	5.71	29.76	106	115	Average



Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	49~52%
Test Channel :	01	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.03	64.66	-9.34	74	56.72	32.14	5.59	29.79	108	223	Peak
2388.48	50.22	-3.78	54	42.28	32.14	5.59	29.79	108	223	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.29	68.34	-5.66	74	60.4	32.14	5.59	29.79	100	235	Peak
2389.02	50.71	-3.29	54	42.77	32.14	5.59	29.79	100	235	Average

Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	49~52%
Test Channel :	11	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.64	70.43	-3.57	74	62.21	32.27	5.71	29.76	168	282	Peak
2483.86	49.55	-4.45	54	41.33	32.27	5.71	29.76	168	282	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.65	70.59	-3.41	74	62.37	32.27	5.71	29.76	151	266	Peak
2483.77	50.52	-3.48	54	42.3	32.27	5.71	29.76	151	266	Average



Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	49~52%
Test Channel :	01	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.66	62.66	-11.34	74	54.72	32.14	5.59	29.79	180	62	Peak
2389.92	49.38	-4.62	54	41.4	32.14	5.62	29.78	180	62	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.29	61.27	-12.73	74	53.33	32.14	5.59	29.79	100	90	Peak
2389.83	47.77	-6.23	54	39.79	32.14	5.62	29.78	100	90	Average

Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	49~52%
Test Channel :	11	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.1	65.54	-8.46	74	57.32	32.27	5.71	29.76	178	60	Peak
2483.5	46.55	-7.45	54	38.33	32.27	5.71	29.76	178	60	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.86	66.09	-7.91	74	57.87	32.27	5.71	29.76	127	119	Peak
2483.59	44.76	-9.24	54	36.54	32.27	5.71	29.76	127	119	Average



Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	49~52%
Test Channel :	03	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.39	63.59	-10.41	74	55.65	32.14	5.59	29.79	100	93	Peak
2388.3	50.3	-3.7	54	42.36	32.14	5.59	29.79	100	93	Average
2485.18	48.98	-25.02	74	40.76	32.27	5.71	29.76	100	93	Peak
2483.68	38.41	-15.59	54	30.19	32.27	5.71	29.76	100	93	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.21	63.49	-10.51	74	55.55	32.14	5.59	29.79	153	88	Peak
2388.48	50.46	-3.54	54	42.52	32.14	5.59	29.79	153	88	Average
2492.02	48.56	-25.44	74	40.28	32.29	5.74	29.75	153	88	Peak
2485.72	37.84	-16.16	54	29.62	32.27	5.71	29.76	153	88	Average



Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	49~52%
Test Channel :	09	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	53.3	-20.7	74	45.32	32.14	5.62	29.78	100	64	Peak
2388.3	41.72	-12.28	54	33.78	32.14	5.59	29.79	100	64	Average
2485.99	59.97	-14.03	74	51.75	32.27	5.71	29.76	100	64	Peak
2483.71	44.33	-9.67	54	36.11	32.27	5.71	29.76	100	64	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.29	52.86	-21.14	74	44.92	32.14	5.59	29.79	130	95	Peak
2388.3	41.05	-12.95	54	33.11	32.14	5.59	29.79	130	95	Average
2485.87	59.47	-14.53	74	51.25	32.27	5.71	29.76	130	95	Peak
2485.69	43.44	-10.56	54	35.22	32.27	5.71	29.76	130	95	Average

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	<ol style="list-style-type: none"> 2412 MHz is fundamental signal which can be ignored. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 107.53dBμV/m - 20dB = 87.53dBμV/m. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	107.53	-	-	99.52	32.17	5.62	29.78	100	66	Peak
2412	105.25	-	-	97.24	32.17	5.62	29.78	100	66	Average
4824	37.02	-36.98	74	52.24	33.68	8.36	57.26	105	198	Peak
7236	46.32	-41.21	87.53	58.3	35.29	9.97	57.24	140	120	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	<ol style="list-style-type: none"> 2412 MHz is fundamental signal which can be ignored. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	106.19	-	-	98.18	32.17	5.62	29.78	186	99	Peak
2412	103.91	-	-	95.9	32.17	5.62	29.78	186	99	Average
4824	36.24	-37.76	74	51.46	33.68	8.36	57.26	120	150	Peak
7236	41.13	-45.06	86.19	53.11	35.29	9.97	57.24	189	185	Peak



Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.32	-	-	100.22	32.22	5.65	29.77	122	65	Peak
2437	105.98	-	-	97.88	32.22	5.65	29.77	122	65	Average
4874	35.92	-38.08	74	50.88	33.8	8.41	57.17	145	265	Peak
7311	48.03	-25.97	74	59.89	35.31	9.99	57.16	158	124	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	106.17	-	-	98.07	32.22	5.65	29.77	107	115	Peak
2437	104.02	-	-	95.92	32.22	5.65	29.77	107	115	Average
4874	36.63	-37.37	74	51.59	33.8	8.41	57.17	120	150	Peak
7311	47.35	-26.65	74	59.21	35.31	9.99	57.16	174	321	Peak



Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.08	-	-	98.92	32.24	5.68	29.76	123	51	Peak
2462	104.78	-	-	96.62	32.24	5.68	29.76	123	51	Average
4924	36.39	-37.61	74	51.09	33.92	8.46	57.08	146	347	Peak
7386	50.54	-23.46	74	62.22	35.35	10.02	57.05	145	274	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	105.27	-	-	97.11	32.24	5.68	29.76	106	115	Peak
2462	103.05	-	-	94.89	32.24	5.68	29.76	106	115	Average
4924	36.65	-37.35	74	51.35	33.92	8.46	57.08	146	347	Peak
7386	45.54	-28.46	74	57.22	35.35	10.02	57.05	132	254	Peak



Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
104.79	15.4	-28.1	43.5	32.96	11.8	1.29	30.65	-	-	Peak
198.48	19.51	-23.99	43.5	39.05	9.1	1.7	30.34	-	-	Peak
231.69	22.22	-23.78	46	39.65	11	1.8	30.23	-	-	Peak
403.6	21.65	-24.35	46	32.34	16.66	2.3	29.65	-	-	Peak
631.8	24.36	-21.64	46	31.61	19.1	2.81	29.16	-	-	Peak
931.4	27.3	-18.7	46	30.8	21.86	3.4	28.76	100	0	Peak
2412	106.66	-	-	98.65	32.17	5.62	29.78	108	223	Peak
2412	99.01	-	-	91	32.17	5.62	29.78	108	223	Average
4824	37.9	-36.1	74	53.12	33.68	8.36	57.26	100	360	Peak
7236	51.41	-35.25	86.66	63.39	35.29	9.97	57.24	100	65	Peak



Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
105.33	15.39	-28.11	43.5	32.94	11.8	1.3	30.65	-	-	Peak
193.89	15.22	-28.28	43.5	34.47	9.43	1.67	30.35	-	-	Peak
234.66	17.55	-28.45	46	34.56	11.4	1.81	30.22	-	-	Peak
412	21.26	-24.74	46	31.7	16.86	2.33	29.63	-	-	Peak
727.7	25.94	-20.06	46	31.63	20.32	3.02	29.03	-	-	Peak
929.3	26.58	-19.42	46	30.17	21.78	3.39	28.76	100	0	Peak
2412	106.01	-	-	98	32.17	5.62	29.78	100	235	Peak
2412	98.51	-	-	90.5	32.17	5.62	29.78	100	235	Average
4824	38.66	-35.34	74	53.88	33.68	8.36	57.26	100	300	Peak
7236	50.81	-35.2	86.01	62.79	35.29	9.97	57.24	119	320	Peak



Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	<ol style="list-style-type: none"> 2437 MHz is fundamental signal which can be ignored. 9748 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.02	-	-	99.92	32.22	5.65	29.77	109	225	Peak
2437	100.7	-	-	92.6	32.22	5.65	29.77	109	225	Average
4874	38.17	-35.83	74	53.13	33.8	8.41	57.17	100	360	Peak
7311	54.26	-19.74	74	66.12	35.31	9.99	57.16	100	320	Peak
7311	38.68	-15.32	54	50.54	35.31	9.99	57.16	100	320	Average
9748	40.54	-47.48	88.02	47.96	36.9	12.23	56.55	100	360	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	<ol style="list-style-type: none"> 2437 MHz is fundamental signal which can be ignored. 9748 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	107.57	-	-	99.47	32.22	5.65	29.77	100	270	Peak
2437	99.88	-	-	91.78	32.22	5.65	29.77	100	270	Average
4874	37.48	-36.52	74	52.44	33.8	8.41	57.17	100	360	Peak
7311	52.7	-21.3	74	64.56	35.31	9.99	57.16	100	68	Peak
7311	36.74	-17.26	54	48.6	35.31	9.99	57.16	100	68	Average
9748	41.62	-45.95	87.57	49.04	36.9	12.23	56.55	100	360	Peak



Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	<ol style="list-style-type: none"> 2462 MHz is fundamental signal which can be ignored. 9849 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	108.18	-	-	100.02	32.24	5.68	29.76	168	282	Peak
2462	99.98	-	-	91.82	32.24	5.68	29.76	168	282	Average
4924	38.92	-35.08	74	25.89	33.92	8.46	29.35	100	360	Peak
7386	56.47	-17.53	74	68.15	35.35	10.02	57.05	100	319	Peak
7386	41.99	-12.01	54	53.67	35.35	10.02	57.05	100	319	Average
9849	42.5	-45.68	88.18	19.57	36.98	12.41	26.46	200	360	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	<ol style="list-style-type: none"> 2462 MHz is fundamental signal which can be ignored. 9849 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.32	-	-	99.16	32.24	5.68	29.76	151	266	Peak
2462	99.16	-	-	91	32.24	5.68	29.76	151	266	Average
4924	37.54	-36.46	74	24.51	33.92	8.46	29.35	100	360	Peak
7386	55.07	-18.93	74	66.75	35.35	10.02	57.05	100	66	Peak
7386	41.57	-12.43	54	53.25	35.35	10.02	57.05	100	66	Average
9849	41.73	-45.59	87.32	18.8	36.98	12.41	26.46	100	360	Peak



Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	106.36	-	-	98.35	32.17	5.62	29.78	180	62	Peak
2412	96.85	-	-	88.84	32.17	5.62	29.78	180	62	Average
4824	38.41	-35.59	74	53.63	33.68	8.36	57.26	120	150	Peak
7236	39.58	-46.78	86.36	51.56	35.29	9.97	57.24	189	185	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	103.1	-	-	95.09	32.17	5.62	29.78	100	90	Peak
2412	94.34	-	-	86.33	32.17	5.62	29.78	100	90	Average
4824	38.24	-35.76	74	53.46	33.68	8.36	57.26	150	147	Peak
7236	39.18	-43.92	83.1	51.16	35.29	9.97	57.24	120	250	Peak



Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	106.36	-	-	98.26	32.22	5.65	29.77	100	62	Peak
2437	97.36	-	-	89.26	32.22	5.65	29.77	100	62	Average
4874	37.87	-36.13	74	52.83	33.8	8.41	57.17	150	240	Peak
7311	44.94	-29.06	74	56.8	35.31	9.99	57.16	174	201	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	104.52	-	-	96.42	32.22	5.65	29.77	129	119	Peak
2437	95.71	-	-	87.61	32.22	5.65	29.77	129	119	Average
4874	37.84	-36.16	74	52.8	33.8	8.41	57.17	101	201	Peak
7311	43.75	-30.25	74	55.61	35.31	9.99	57.16	150	240	Peak



Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	105.72	-	-	97.56	32.24	5.68	29.76	178	60	Peak
2462	96.78	-	-	88.62	32.24	5.68	29.76	178	60	Average
4924	37.37	-36.63	74	52.07	33.92	8.46	57.08	146	347	Peak
7386	48.47	-25.53	74	60.15	35.35	10.02	57.05	145	274	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	104.42	-	-	96.26	32.24	5.68	29.76	127	119	Peak
2462	95.7	-	-	87.54	32.24	5.68	29.76	127	119	Average
4924	38.46	-35.54	74	53.16	33.92	8.46	57.08	146	347	Peak
7386	42.99	-31.01	74	54.67	35.35	10.02	57.05	100	360	Peak



Test Mode :	2.4GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	03	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	100.03	-	-	91.96	32.19	5.65	29.77	100	93	Peak
2422	91.94	-	-	83.87	32.19	5.65	29.77	100	93	Average
4844	37.92	-36.08	74	53.05	33.72	8.38	57.23	126	248	Peak
7266	40.42	-33.58	74	52.34	35.3	9.98	57.2	164	305	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	03	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	98.23	-	-	90.16	32.19	5.65	29.77	153	88	Peak
2422	90.18	-	-	82.11	32.19	5.65	29.77	153	88	Average
4844	37.62	-36.38	74	52.75	33.72	8.38	57.23	145	120	Peak
7266	39.06	-34.94	74	50.98	35.3	9.98	57.2	117	231	Peak



Test Mode :	2.4GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	100.68	-	-	92.58	32.22	5.65	29.77	147	57	Peak
2437	92.36	-	-	84.26	32.22	5.65	29.77	147	57	Average
4874	37.9	-36.1	74	52.86	33.8	8.41	57.17	132	224	Peak
7311	39.66	-34.34	74	51.52	35.31	9.99	57.16	119	347	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	99	-	-	90.9	32.22	5.65	29.77	116	101	Peak
2437	90.79	-	-	82.69	32.22	5.65	29.77	116	101	Average
4874	36.76	-37.24	74	51.72	33.8	8.41	57.17	114	247	Peak
7311	39.89	-34.11	74	51.75	35.31	9.99	57.16	150	170	Peak



Test Mode :	2.4GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	09	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	100.68	-	-	92.54	32.22	5.68	29.76	100	64	Peak
2452	92.35	-	-	84.21	32.22	5.68	29.76	100	64	Average
4904	37.46	-36.54	74	52.25	33.88	8.44	57.11	125	214	Peak
7356	40.64	-33.36	74	52.4	35.33	10.01	57.1	127	315	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	09	Relative Humidity :	49~52%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	98.94	-	-	90.8	32.22	5.68	29.76	130	95	Peak
2452	90.29	-	-	82.15	32.22	5.68	29.76	130	95	Average
4904	37.09	-36.91	74	51.88	33.88	8.44	57.11	154	198	Peak
7356	39.55	-34.45	74	51.31	35.33	10.01	57.1	187	245	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

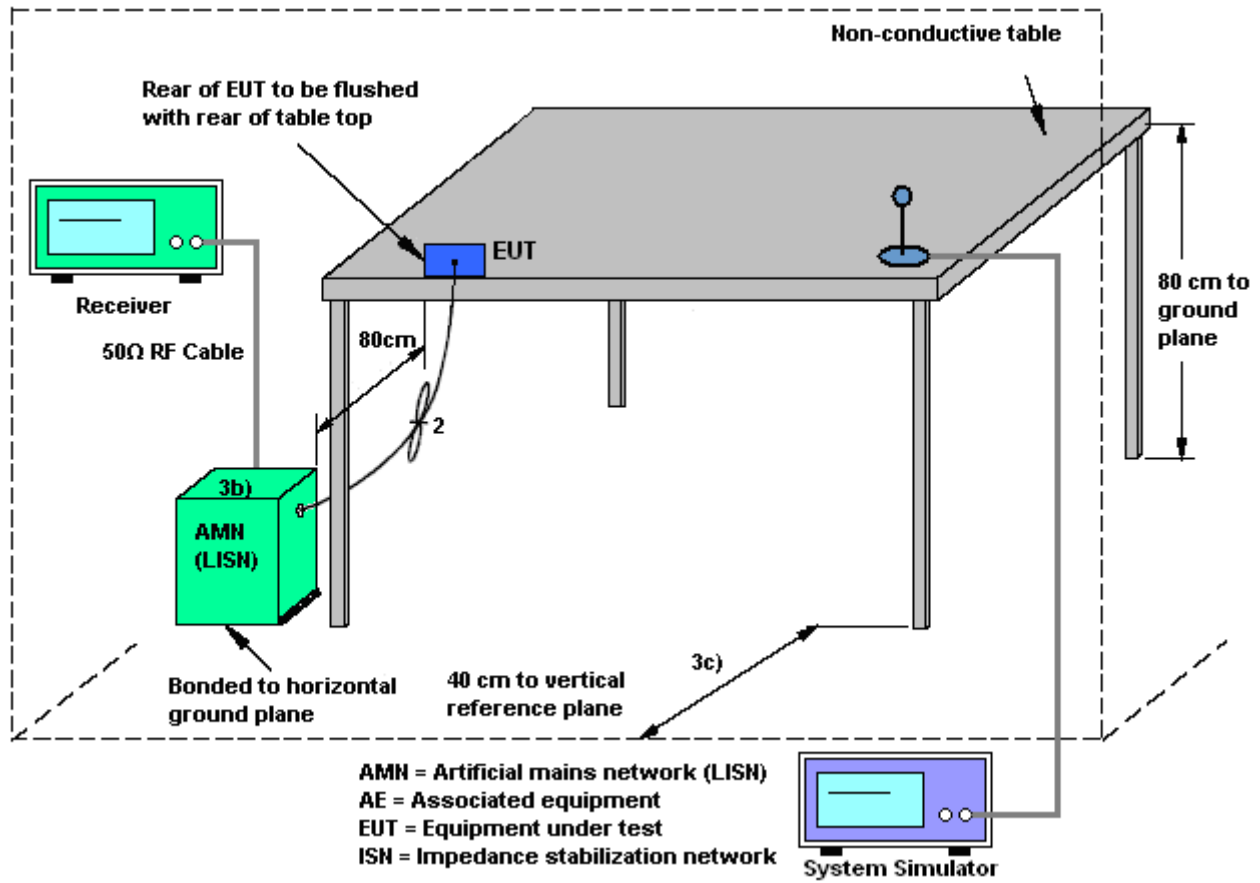

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Henry Chen	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

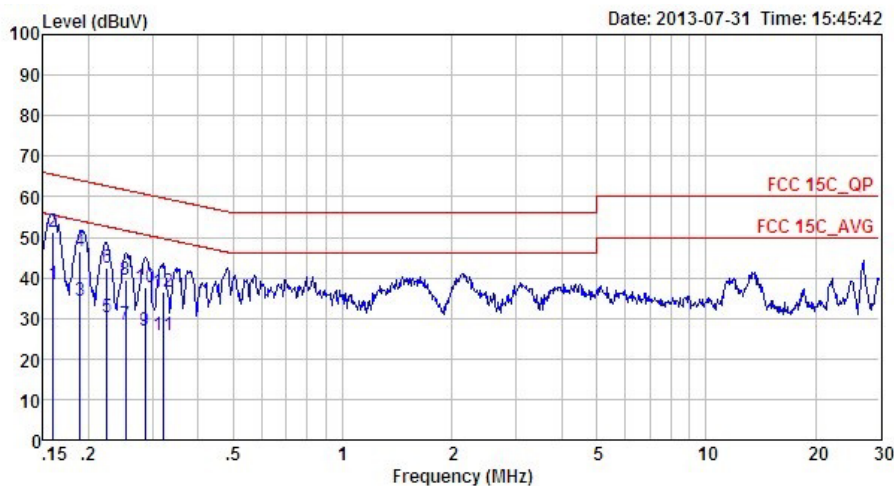


Site : CO01-SZ
Condition: FCC 15C_QP LISN_L_2000601 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	38.48	-16.99	55.47	28.40	0.03	10.05	Average
2 *	0.16	51.38	-14.09	65.47	41.30	0.03	10.05	QP
3	0.19	34.38	-19.68	54.06	24.30	0.03	10.05	Average
4	0.19	46.48	-17.58	64.06	36.40	0.03	10.05	QP
5	0.22	30.28	-22.38	52.66	20.20	0.02	10.06	Average
6	0.22	42.58	-20.08	62.66	32.50	0.02	10.06	QP
7	0.25	28.38	-23.26	51.64	18.30	0.02	10.06	Average
8	0.25	39.58	-22.06	61.64	29.50	0.02	10.06	QP
9	0.29	26.79	-23.84	50.63	16.71	0.02	10.06	Average
10	0.29	37.79	-22.84	60.63	27.71	0.02	10.06	QP
11	0.32	25.89	-23.82	49.71	15.80	0.02	10.07	Average
12	0.32	36.59	-23.12	59.71	26.50	0.02	10.07	QP



Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Henry Chen	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

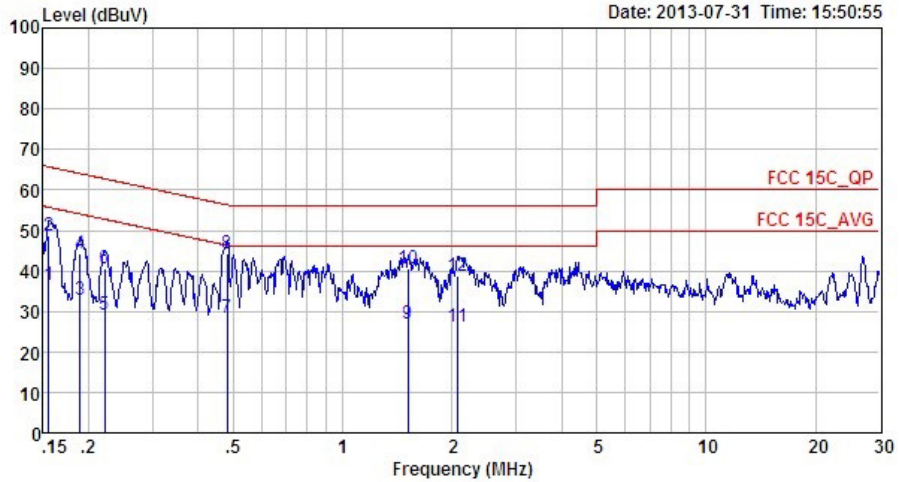

Site : CO01-SZ
Condition: FCC 15C_QP LISN_N_2000601 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	36.57	-19.12	55.69	26.50	0.02	10.05	Average
2	0.16	48.67	-17.02	65.69	38.60	0.02	10.05	QP
3	0.19	32.87	-21.19	54.06	22.80	0.02	10.05	Average
4	0.19	44.37	-19.69	64.06	34.30	0.02	10.05	QP
5	0.22	29.07	-23.67	52.74	18.99	0.02	10.06	Average
6	0.22	40.57	-22.17	62.74	30.49	0.02	10.06	QP
7	0.48	28.50	-17.82	46.32	18.40	0.02	10.08	Average
8 *	0.48	44.40	-11.92	56.32	34.30	0.02	10.08	QP
9	1.51	26.95	-19.05	46.00	16.79	0.03	10.13	Average
10	1.51	40.65	-15.35	56.00	30.49	0.03	10.13	QP
11	2.08	26.19	-19.81	46.00	16.00	0.03	10.16	Average
12	2.08	38.69	-17.31	56.00	28.50	0.03	10.16	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 28, 2013	Jul. 31,2013~ Aug. 02, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	N/A	Mar. 28, 2013	Jul. 31,2013~ Aug. 02, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 28, 2013	Jul. 31,2013~ Aug. 02, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
ESCI TEST Receiver	R&S	ESCI	100724	9kHz -3GHz	Mar. 28, 2013	Jul. 30,2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP30	101362	9kHz~30GHz	Oct. 11, 2012	Jul. 30,2013	Oct. 10, 2013	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 12, 2012	Jul. 30,2013	Oct. 11, 2013	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz ~2GHz	Nov. 03, 2012	Jul. 30,2013	Nov. 02, 2013	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz-3000MHz GAIN 30db	Mar. 28, 2013	Jul. 30,2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 28, 2013	Jul. 30,2013	Mar. 27, 2014	Radiation (03CH01-SZ)
SHF-EHF-Horn	Schwarzbeck	BBHA9170	BBHA9170249	14GHz~40GHz	Nov. 23, 2012	Jul. 30,2013	Nov. 22, 2013	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz-30MHz	Oct. 22, 2012	Jul. 30,2013	Oct. 21, 2013	Radiation (03CH01-SZ)
Turn Table	EM Electronic	EM 1000	N/A	0 ~ 360 degree	N/A	Jul. 30,2013	N/A	Radiation (03CH01-SZ)
Antenna Mast	EM Electronic	EM 1000	N/A	1 m - 4 m	N/A	Jul. 30,2013	N/A	Radiation (03CH01-SZ)
AC LISN	ETS-LINDGREN	3816/2SH	00103912	0.1MHz~108MHz	Feb. 28, 2013	Jul. 31,2013	Feb. 27, 2014	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	ETS-LINDGREN	3816/2SH	00103892	0.1MHz~108MHz	Feb. 28, 2013	Jul. 31,2013	Feb. 27, 2014	Conduction (CO01-SZ)
ESCIO TEST Receiver	R&S	1142.8007.03	100724	9kHz-3GHz	Mar. 08, 2013	Jul. 31,2013	Mar. 07, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891 N/A	N/A	Oct. 12, 2012	Jul. 31,2013	Oct. 11, 2013	Conduction (CO01-SZ)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------