

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	5
Remark	5
Test Set-up and Operation Mode	6
Principle of Configuration Selection	6
Test Operation and Test Software.....	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
Test Methodology	7
Radiated Emission	7
Field Strength Calculation.....	7
Test Setup Diagram	8
List of Test and Measurement Instruments	10
Measurement Uncertainty	11
Results FCC Part 15 – Subpart C / RSS-247 Issue 2	12
FCC 15.203 – Antenna Requirement 1.....	Pass..... 12
FCC 15.204 – Antenna Requirement 2.....	N/A..... 12
RSS-Gen 6.3 – External Control.....	Pass..... 12
RSS-Gen 8.3 – Antenna Requirement	Pass..... 12
FCC 15.207 / RSS-Gen 8.8 – Conducted Emission on AC Mains.....	Pass..... 13
FCC 15.247 (a)(2) / RSS-247 5.2 – 6dB Bandwidth Measurement.....	Pass..... 14
RSS-Gen 6.6 – Occupied Bandwidth.....	Pass..... 14
FCC 15.247(b)(3) / RSS-247 5.4 – Maximum Peak Conducted Output Power.....	Pass..... 15
FCC 15.247(e) / RSS-247 5.2 – Power Spectral Density.....	Pass..... 15

FCC 15.247(d) / RSS-247 5.5 – Spurious Conducted Emissions Pass..... 16

FCC 15.205 / RSS-Gen 8.9 – Radiated Emissions in Restricted Frequency Bands.... Pass..... 17

Appendix 1 – Test protocols 19 pages

Appendix 2 – Test setup 3 pages

Appendix 3 – EUT External Photos 5 pages

Appendix 4 – EUT Internal Photos 4 pages

Appendix 5 – RF exposure information..... 2 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2410 - 2472 MHz
Type of modulation	GFSK
Number of channels	32
Channel separation	2 MHz
Type of antenna	PCB Antenna
Antenna gain (dBi)	0 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	Yes
Nominal voltage	V _{nom} : 120VAC
Independent Operation Modes	Transmitting

Product function and intended use

The equipment under test (EUT) is a race track integrated with Bluetooth Low Energy connectivity. It is powered by AC/DC adaptor, which include in the package. With the dedicated smartphone apps available on AppStore or Google Play, user can enjoy different racing mode.

FCC ID: YFA200201661662 / IC: 12260A-20061662

Models	Product description
20061662	GO Plus Connecting Track with Bluetooth Connectivity

Submitted documents

Circuit Diagram
 Block Diagram
 Technical Description
 User manual
 Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- For radiated emission test, a test mode enabled sample provided by client was used. The method of changing the operation channel was also provided by client.

The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

- For conducted emission testing, a normal functioning sample with AC/DC adaptor mentioned in next section provided by client was used.

Special Accessories and Auxiliary Equipment

- AC-DC adaptor model: STAD-CAMAY-005G (Provided by Appliant)

Countermeasures to achieve EMC Compliance

- none

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

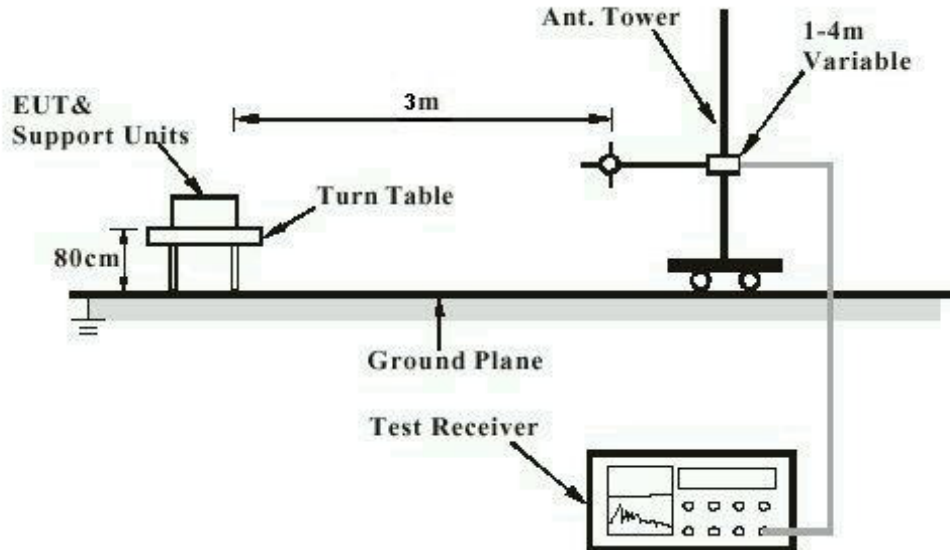

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


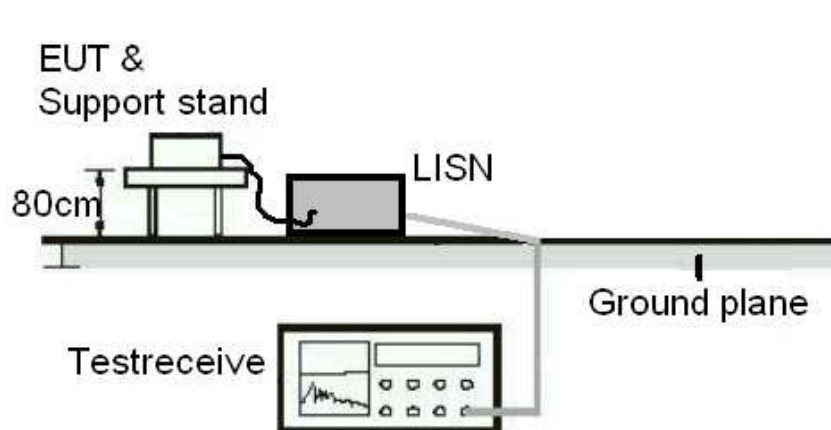


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)



List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC/ IC Registration number: 90656/ 4780A-1)

Radiated Emission

Equipment	Manufacturer	Type	S/N	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	Nil	25 Apr 2016	25 Apr 2017
Test Receiver	R & S	ESU26	100050	15 Jun 2016	15 Jun 2017
Bi-conical Antenna	R & S	HK116	100241	01 Sep 2015	01 Sep 2017
Log Periodic Antenna	R & S	HL223	841516/017	01 Sep 2015	01 Sep 2017
Coaxial cable	Harbour	LL335	N/A	10 Jun 2016	10 Jun 2018
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	3950M00241	18 Jul 2016	18 Jul 2018
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	9829213	28 Oct 2015	28 Oct 2017
Horn Antenna	EMCO	3115	9002-3347	26 Aug 2015	26 Aug 2017
Active Loop Antenna	EMCO	6502	9107-2651	27 Oct 2016	27 Oct 2017

AC Mains Conducted Emission

Equipment	Manufacturer	Type	S/N	Cal. Date	Due Date
Test Receiver	R&S	ESU26	100050	15 Jun 2016	15 Jun 2017
RF Voltage Probe	Schwarzbeck	TK9416	None	11 Feb 2017	11 Feb 2018
LISN	R&S	ESH3-Z5	849876/027	15 Jun 2016	15 Jun 2017
Double Shield Cable	Radiall	RG142	Nil	14 Sep 2015	14 Sep 2017
Pulse Limiter	R&S	ESH3-Z2	Nil	03 Jun 2016	03 Jun 2018

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	S/N	Cal. Date	Due Date
Spectrum Analyzer	R&S	FSV40	101542	22 Jan 2017	22 Jan 2018

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is ± 2.42 dB.

The estimated combined standard uncertainty for radiated emissions measurements is ± 4.81 dB (9kHz to 30MHz) and ± 4.62 dB (30MHz to 200MHz) and ± 5.67 dB (200MHz to 1000MHz) and is ± 5.07 dB (1GHz to 8.2GHz) and ± 4.58 dB (8.2GHz to 12.4GHz) and ± 4.78 dB (12.4GHz to 18GHz)

The estimated combined standard uncertainty for antenna conducted emission is ± 2.1 dB

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-247 Issue 2

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results	: a) Antenna type b) Manufacturer and model no c) Peak Gain	Integral PCB antenna N/A 0 dBi
Verdict	: Pass	

FCC 15.204 – Antenna Requirement 2		N/A
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results	: Only one integral antenna can be used.	
Verdict	: N/A	

RSS-Gen 6.3 – External Control		Pass
IC Requirement	: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.	
Results	: The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict	: Pass	

RSS-Gen 8.3 – Antenna Requirement		Pass
IC Requirement	: When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.	
Results	: a) Antenna type b) Manufacturer c) model no d) Gain with reference to an isotropic radiator	Fixed Integral wire antenna N/A N/A 0 dBi
Verdict	: Pass	

FCC 15.207 / RSS-Gen 8.8 – Conducted Emission on AC Mains						Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : AC Mains input port of power supply Detector : Quasi-peak and Average RBW : 9 kHz Supply voltage : 120Vac 60Hz Temperature : 23°C Humidity : 50%						
Requirement : 15.207(a)						
Results : Pass						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.410	48.31	39.54	66 - 56	56 - 46	Pass
	0.434	50.10	42.29	66 - 56	56 - 46	Pass
> 0.5 - 5	1.402	42.86	33.63	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.386	44.58	35.73	66 - 56	56 - 46	Pass
> 0.5 - 5	No peak found	---	---	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
Results : Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1.						

FCC 15.247 (a)(2) / RSS-247 5.2 – 6dB Bandwidth Measurement			Pass
FCC Requirement: Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 120 Vac Temperature : 23°C Humidity : 50%			
Results : For test protocols please refer to Appendix 1			
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (kHz)
2410	2409.491	2410.440	949.3
2440	2439.479	2440.446	966.7
2472	2471.467	2472.457	989.9

RSS-Gen 6.6 – Occupied Bandwidth			Pass
IC Requirement : N/A			
Test Specification : RSS-Gen Mode of operation : Tx mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 120 Vac Temperature : 23°C Humidity : 50%			
Results : Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.			
Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)
2410	2409.030	2410.890	1.860
2440	2439.030	2440.890	1.860
2472	2470.994	2472.955	1.961

FCC 15.247(b)(3) / RSS-247 5.4 – Maximum Peak Conducted Output Power			Pass
FCC Requirement: For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 120 Vac Temperature : 23°C Humidity : 50%			
Results : For test protocols please refer to Appendix 1			
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
2410	-3.41	1 / 30.0	Pass
2440	-4.10	1 / 30.0	Pass
2472	-5.08	1 / 30.0	Pass

FCC 15.247(e) / RSS-247 5.2 – Power Spectral Density			Pass
FCC Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 120 Vac Temperature : 23°C Humidity : 50%			
Results : For test protocols please refer to Appendix 1.			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2410	-3.51	8.0	Pass
2440	-4.22	8.0	Pass
2472	-5.19	8.0	Pass

FCC 15.247(d) / RSS-247 5.5 – Spurious Conducted Emissions		Pass			
<p>FCC Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.</p>					
<p>Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 120 Vac Temperature : 23 °C Humidity : 50 %</p>					
<p>Results : Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Only the worst cases is shown below. For test protocols refer to Appendix 1</p>					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2410	2486.300	-41.78	-3.51	-38.27	Pass
	4816.000	-52.38	-3.51	-48.87	Pass
2440	2486.300	-41.39	-4.22	-37.17	Pass
2472	2486.062	-41.04	-5.19	-35.85	Pass
	4946.000	-52.86	-5.19	-47.67	Pass

FCC 15.205 / RSS-Gen 8.9 – Radiated Emissions in Restricted Frequency Bands		Pass
FCC Requirement: In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).		
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Enclosure Detector : Peak Supply voltage : 120 Vac Temperature : 23°C Humidity : 50%		
Results : Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.		
Mode: 2410MHz TX		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2331.923	50.75	74.0 / PK
2360.385	33.37	54.0 / AV
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Mode: 2410MHz TX		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2332.179	62.85	74.0 / PK
2377.949	33.83	54.0 / AV
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Mode: 2440MHz TX		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Mode: 2440MHz TX		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Mode: 2472MHz TX		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2499.736	49.97	74.0 / PK

2499.921	33.21	54.0 / AV
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Mode: 2472MHz TX Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2499.868	54.16	74.0 / PK
2488.048	33.34	54.0 / AV
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV