

FCC Part 15C&RSS-247 TEST REPORT

FCC ID: YGM-E300A

IC:21567-E300A

Product : Alexa Ceiling Amplifier

Model Name : E300A

Brand :



Report No. : NCT23034169-1

Prepared for

Armour Home Electronics Limited

Woodside 2, Dunmow Road, Bishop's Stortford, Hertfordshire, CM23 5RG UNITED KINGDOM

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Armour Home Electronics Limited

Address : Woodside 2, Dunmow Road, Bishop's Stortford, Hertfordshire, CM23 5RG UNITED KINGDOM

Manufacture's name : Armour Home Electronics Limited

Address : Woodside 2, Dunmow Road, Bishop's Stortford, Hertfordshire, CM23 5RG UNITED KINGDOM

Product name : Alexa Ceiling Amplifier

Model name : E300A

Standards : FCC CFR47 Part 15 Section 15.247
RSS-247 Issue 3, February 2017
RSS-GEN Issue 5 April 2018 Amendment 2(February 2021)

Test procedure : ANSI C63.10:2013

Date of test : Sep. 02 ~ Oct. 18, 2023

Date of Issue : Oct. 18, 2023

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

Hugh Zhang
Hugh Zhang / Engineer

Technical Manager:

Henry Wang
Henry Wang / Manager

The logo is a circular seal for NCT Testing Technology Co., Ltd. It features a central emblem with a stylized 'N' and 'T' inside a circle, surrounded by a laurel wreath. The text 'NCT Testing Technology Co., Ltd.' is written around the perimeter, and '2008' is at the bottom.

Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST SITE	8
3.4 TEST SETUP CONFIGURATION	8
3.5 TEST MODE	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST	10
4.2 MEASUREMENT UNCERTAINTY	12
4.3 DESCRIPTION OF SUPPORT UNITS	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION	14
5.7 CONDUCTED EMISSION TEST RESULT	14
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION	17
6.2 TEST SETUP	18
6.3 SPECTRUM ANALYZER SETUP	19
6.4 TEST PROCEDURE	20
6.5 SUMMARY OF TEST RESULTS	21
7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	30
7.1 TEST PROCEDURE	30

7.2 TEST RESULT	31
8 6DB&99% BANDWIDTH MEASUREMENT	39
8.1 TEST PROCEDURE	39
8.2 TEST RESULT	39
9 MAXIMUM PEAK OUTPUT POWER	45
9.1 TEST PROCEDURE	45
9.2 TEST RESULT	45
10 POWER SPECTRAL DENSITY	49
10.1 TEST PROCEDURE	49
10.2 TEST RESULT	49
11 ANTENNA APPLICATION	52
11.1 ANTENNA REQUIREMENT	52
11.2 RESULT	52
12 TEST SETUP AND EUT PHOTOS	53

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	FCC part 15.207 RSS-Gen § 8.8 RSS-247 § 3.1	PASS
Radiated Spurious Emissions	FCC part 15.205/15.209 RSS-Gen § 8.9&8.10	PASS
Conducted Spurious Emission	FCC part 15.205/15.209 RSS-247 § 5.5	PASS
Band edge	FCC part 15.247(d) RSS-247 § 5.5	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2) RSS-GEN § 6.7 RSS-247 § 5.2	PASS
Maximum Peak Output Power	FCC part 15.247 (b)(3) RSS-247 § 5.4	PASS
Power Spectral Density	FCC part 15.247 (e) RSS-247 § 5.2	PASS
Antenna Requirement	FCC part 15.203/15.247 (c) RSS-GEN § 6.8	PASS

Remark:

“N/A” denotes test is not applicable in this Test Report.

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Alexa Ceiling Amplifier
Model Name	:	E300A
Sample ID	:	N/A
Sample(s) Status:	:	Engineer sample
Series Model	:	N/A
Model Different.:	:	N/A
Specification	:	802.11b/g/n HT20/40
Operation Frequency	:	802.11 b/g/n (HT20)/n (HT40): 2412~2462 MHz
Number of Channel	:	11 channels for 802.11b/g/n20; 7 channels for 802.11n40;
Type of Modulation	:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/n: Orthogonal Frequency Division Multiplexing (OFDM)
Antenna installation	:	PCB Antenna
Antenna Gain	:	3.5 dBi
Power supply	:	DC 22V From adapter input AC 120V/60Hz
Hardware Version	:	24
Software Version	:	2628.0001.0
SWITCHING POWER ADAPTER:	:	Manufacturer: Dongguan YiDai Power Technology Co., LTD Model:TD-ZN2200150-6B Input: 100-240V~ 50/60Hz 1.5A Max Output: DC 22.0V/1.5A, 33W

Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant. 2.4G Wifi & BT antenna and 5G Wifi antenna cannot transmit at the same time. 2.4G WLAN and BT share the same antenna port and cannot transmit simultaneously.

3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0; were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20)/n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20)/n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
3	2422	9	2452		

3.3 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018


The Conformity Assessment Body Identifier is CN0150


Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.


Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

3.4 Test Setup Configuration





Conducted Spurious



3.5 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	DutApi-w8887-BrdigeEth
Power level setup	< 0 dBm

4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2023/6/21	2024/6/20
LISN	ENV 216	102796	Rohde & Schwarz	2023/6/21	2024/6/20
LISN	VN1-13S	004023	CRANAGE	2023/6/21	2024/6/20
Cable	RG223-1500MM	NA	RG	2023/6/21	2024/6/20

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2023/6/21	2024/6/20
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2023/6/21	2024/6/20
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNARZBECK	2023/6/21	2024/6/20
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNARZBECK	2023/6/21	2024/6/20
Spectrum Analyze (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2023/6/21	2024/6/20
Preamplifier (15GHz-40GHz)	BBV 9718D	0024	SCHNARZBECK	2023/6/21	2024/6/20
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18

Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNARZBECK	2023/6/21	2024/6/20
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHNARZBECK	2023/6/21	2024/6/20
Power Sensor	TR1029-2	00473	SCHNARZBECK	2023/6/21	2024/6/20
RF Swith	TR1029-1	02622	SCHNARZBECK	2023/6/21	2024/6/20
Cable	DA800- 4000MM	NA	DA	2023/6/21	2024/6/20
Cable	DA800- 11000MM	NA	DA	2023/6/21	2024/6/20

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Alexa Ceiling Amplifier		E300A	N/A	EUT
E-2	Notebook	Lenovo	LN-A0403A3C	36001672	AE

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207, RSS-Gen§8.8, RSS-247§ 3.1
Test Method : ANSI C63.10: 2013
Test Result : PASS
Frequency Range : 150kHz to 30MHz
Class/Severity : Class B


5.1 E.U.T. Operation

Operating Environment :

Temperature : 24.5 °C
Humidity : 51.3 % RH
Atmospheric Pressure : 101.11kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

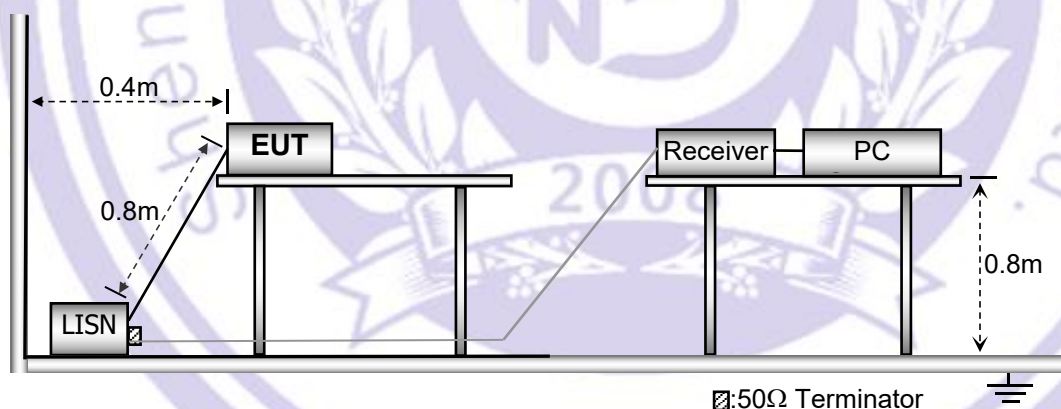

5.3 Test SET-UP (Block Diagram of Configuration)



5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Pass.

Please refer to the following pages.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	DC 22V From adapter input AC 120V/60Hz		

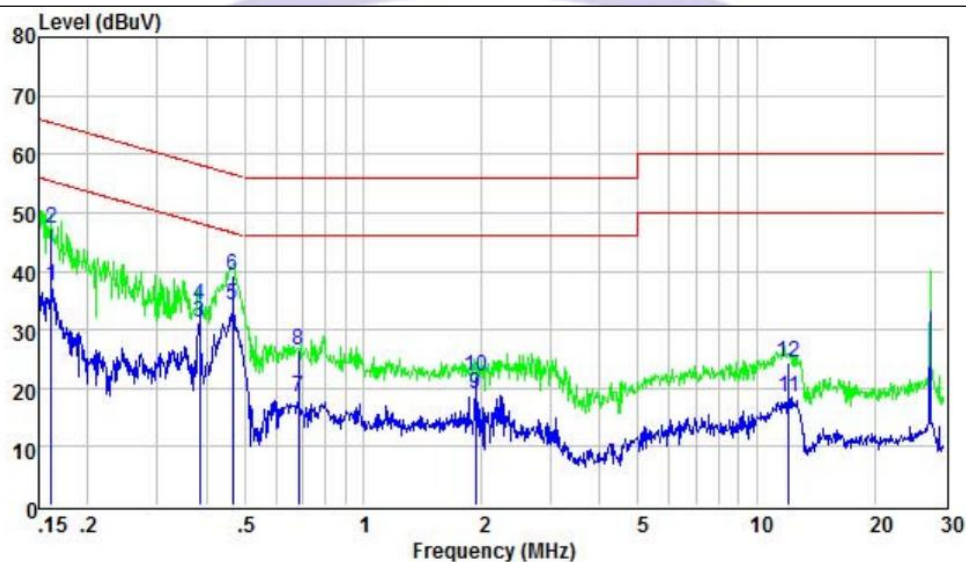


	Freq	Level	LISN	Cable	Limit	Over	
	MHz	dBuV	Factor	Loss	Line	Limit	Remark
			dB	dB	dBuV	dB	
1	0.16	37.48	9.63	0.05	55.38	-17.90	Average
2	0.16	47.31	9.63	0.05	65.38	-18.07	QP
3	0.39	31.31	9.66	0.05	48.17	-16.86	Average
4	0.39	34.31	9.66	0.05	58.17	-23.86	QP
5	0.47	34.27	9.68	0.05	46.58	-12.31	Average
6	0.47	39.32	9.68	0.05	56.58	-17.26	QP
7	0.69	18.35	9.64	0.05	46.00	-27.65	Average
8	0.69	26.35	9.64	0.05	56.00	-29.65	QP
9	1.93	19.04	9.59	0.06	46.00	-26.96	Average
10	1.93	22.04	9.59	0.06	56.00	-33.96	QP
11	12.06	18.39	9.61	0.10	50.00	-31.61	Average
12	12.06	24.39	9.61	0.10	60.00	-35.61	QP

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

3.Measurement Level = Reading level + Correct Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	DC 22V From adapter input AC 120V/60Hz		

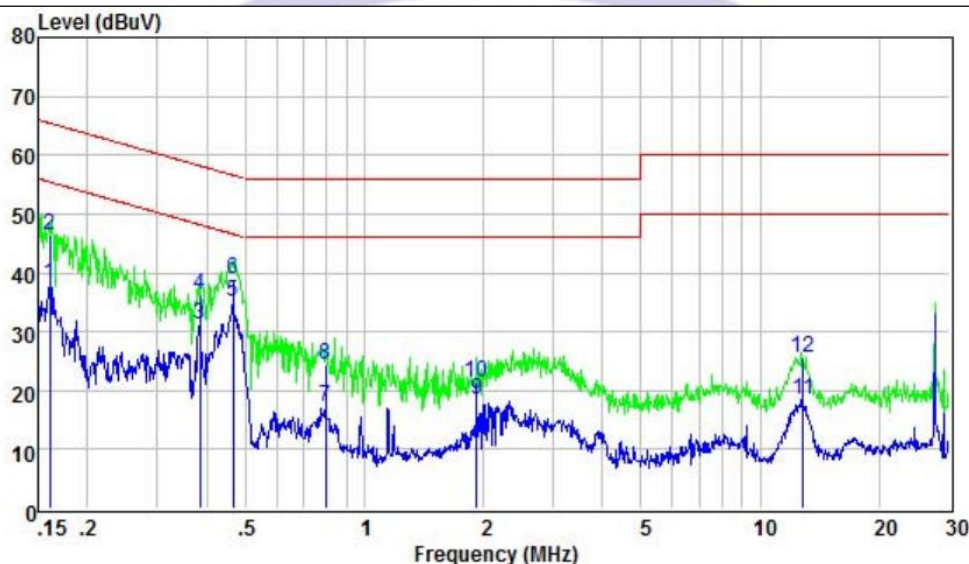

	Freq	Level	LISN	Cable	Limit	Over	
	MHz	dBuV	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dB	
1	0.16	37.96	9.59	0.05	55.43	-17.47	Average
2	0.16	46.51	9.59	0.05	65.43	-18.92	QP
3	0.39	31.30	9.61	0.05	48.17	-16.87	Average
4	0.39	36.21	9.61	0.05	58.17	-21.96	QP
5	0.47	35.21	9.63	0.05	46.58	-11.37	Average
6	0.47	39.05	9.63	0.05	56.58	-17.53	QP
7	0.80	17.32	9.63	0.05	46.00	-28.68	Average
8	0.80	24.32	9.63	0.05	56.00	-31.68	QP
9	1.92	18.39	9.57	0.06	46.00	-27.61	Average
10	1.92	21.39	9.57	0.06	56.00	-34.61	QP
11	12.85	18.46	9.74	0.10	50.00	-31.54	Average
12	12.85	25.46	9.74	0.10	60.00	-34.54	QP

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

3.Mesurement Level = Reading level + Correct Factor

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
RSS-Gen §8.9, RSS-Gen §8.10
Test Method : ANSI C63.10:2013
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 24.5°C
Humidity: : 52 % RH
Atmospheric Pressure: : 101.11kPa
Test Voltage : DC 22V From adapter input AC 120V/60Hz

6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

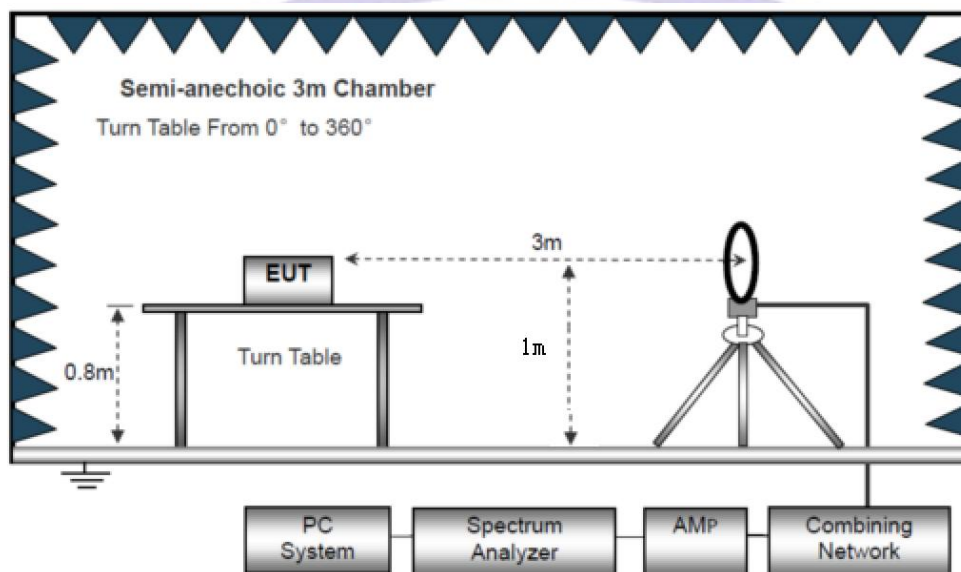

The test setup for emission measurement from 30 MHz to 1 GHz.



The test setup for emission measurement above 1 GHz

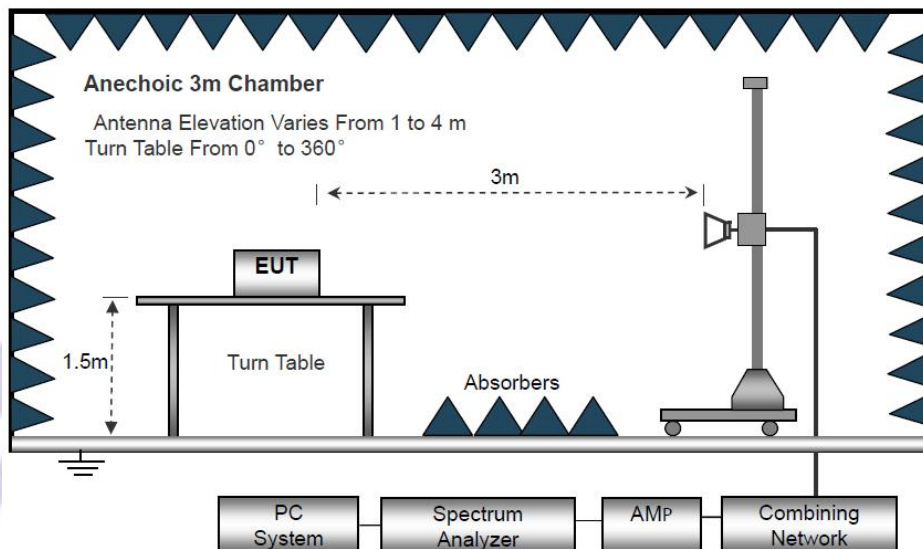

6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz

6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following test plots:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 22V From adapter input AC 120V/60Hz		

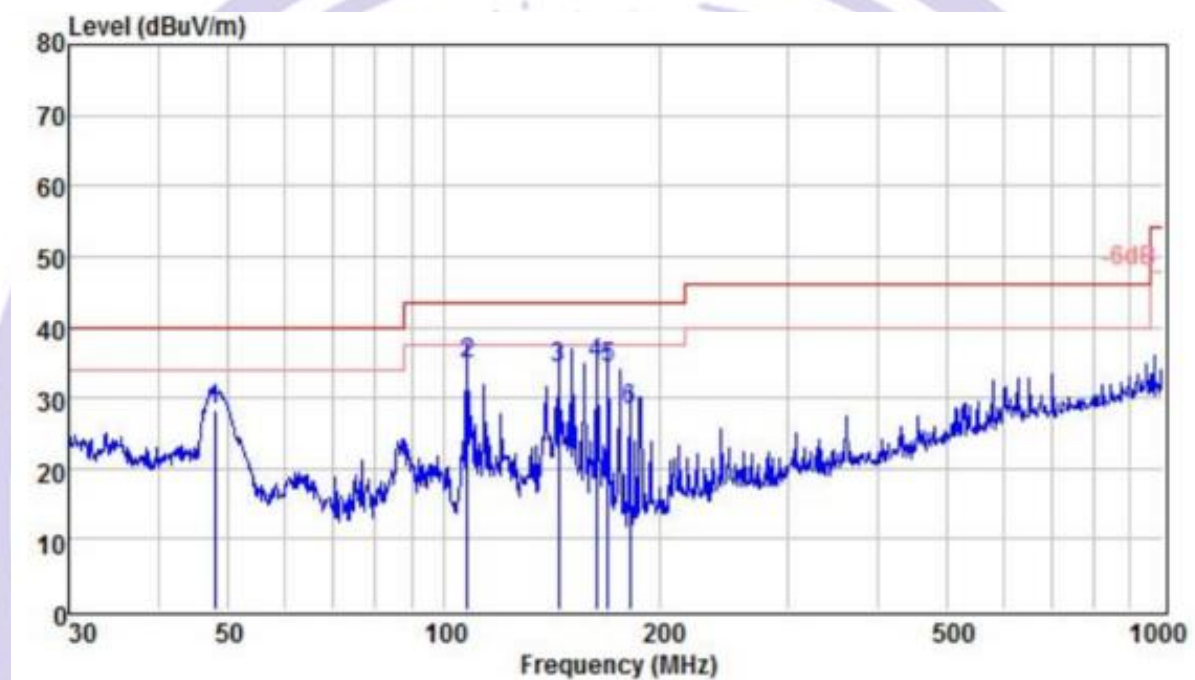

	Freq	Read	Antenna	Cable		Limit	Over	
	MHz	Level	Factor	Loss	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	47.99	18.35	9.62	0.27	28.24	40.00	-11.76	QP
2	107.51	24.77	9.37	0.77	34.91	43.50	-8.59	QP
3	144.33	24.73	8.66	0.82	34.21	43.50	-9.29	QP
4	162.61	24.59	9.43	0.84	34.86	43.50	-8.64	QP
5	169.01	23.31	10.01	0.84	34.16	43.50	-9.34	QP
6	181.28	16.99	10.36	0.85	28.20	43.50	-15.30	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 22V From adapter input AC 120V/60Hz		

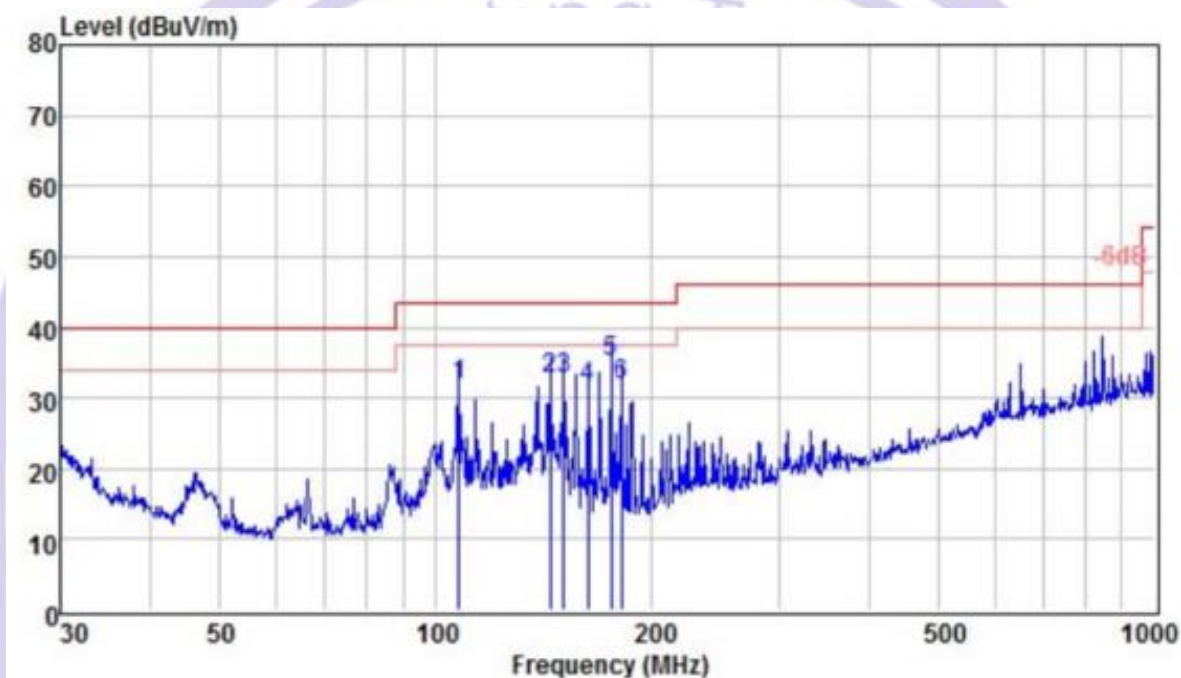

	Read	Antenna	Cable		Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	107.51	21.79	9.30	0.77	31.86	43.50	-11.64 QP
2	144.33	23.06	8.70	0.82	32.58	43.50	-10.92 QP
3	150.54	22.84	9.00	0.82	32.66	43.50	-10.84 QP
4	162.61	20.98	9.65	0.84	31.47	43.50	-12.03 QP
5	175.04	23.95	10.25	0.85	35.05	43.50	-8.45 QP
6	181.28	20.65	10.40	0.85	31.90	43.50	-11.60 QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor

Test Frequency: From 1GHz to 18GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	45.87	34.11	5.04	32.44	49.24	74.00	-24.76	PK
V	4824.00	36.15	34.11	5.04	32.44	39.52	54.00	-14.48	AV
V	7236.00	43.5	32.57	6.30	35.89	53.12	74.00	-20.88	PK
V	7236.00	27.45	32.57	6.30	35.89	37.07	54.00	-16.93	AV
V	9648.00	36.65	32.96	7.56	38.40	49.65	74.00	-24.35	PK
V	9648.00	25.87	32.96	7.56	38.40	38.87	54.00	-15.13	AV
V	12060.00	33.5	32.06	8.92	39.01	49.37	74.00	-24.63	PK
V	12060.00	22.42	32.06	8.92	39.01	38.29	54.00	-15.71	AV
H	4824.00	48.22	34.11	5.04	32.44	51.59	74.00	-22.41	PK
H	4824.00	35.87	34.11	5.04	32.44	39.24	54.00	-14.76	AV
H	7236.00	39.56	32.57	6.30	35.89	49.18	74.00	-24.82	PK
H	7236.00	28.67	32.57	6.30	35.89	38.29	54.00	-15.71	AV
H	9648.00	39.92	32.96	7.56	38.40	52.92	74.00	-21.08	PK
H	9648.00	25.09	32.96	7.56	38.40	38.09	54.00	-15.91	AV
H	12060.00	38.38	32.06	8.92	39.01	54.25	74.00	-19.75	PK
H	12060.00	28.59	32.06	8.92	39.01	44.46	54.00	-9.54	AV

Radiated Band Emission Measurement:

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	50.09	34.08	5.08	32.57	53.66	74.00	-20.34	PK
V	4874.00	36.34	34.08	5.08	32.57	39.91	54.00	-14.09	AV
V	7311.00	44.09	32.62	6.34	35.95	53.76	74.00	-20.24	PK
V	7311.00	30.56	32.62	6.34	35.95	40.23	54.00	-13.77	AV
V	9748.00	43.63	32.93	7.58	38.40	56.68	74.00	-17.32	PK
V	9748.00	33.68	32.93	7.58	38.40	46.73	54.00	-7.27	AV
V	12185.00	40.24	31.97	8.89	39.04	56.20	74.00	-17.80	PK
V	12185.00	28.96	31.97	8.89	39.04	44.92	54.00	-9.08	AV
H	4874.00	45.81	34.08	5.08	32.57	49.38	74.00	-24.62	PK
H	4874.00	30.84	34.08	5.08	32.57	34.41	54.00	-19.59	AV
H	7311.00	39.22	32.62	6.34	35.95	48.89	74.00	-25.11	PK
H	7311.00	33.63	32.62	6.34	35.95	43.30	54.00	-10.70	AV
H	9748.00	42.66	32.93	7.58	38.40	55.71	74.00	-18.29	PK
H	9748.00	27.39	32.93	7.58	38.40	40.44	54.00	-13.56	AV
H	12185.00	35.33	31.97	8.89	39.04	51.29	74.00	-22.71	PK
H	12185.00	27.5	31.97	8.89	39.04	43.46	54.00	-10.54	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	45.74	34.05	5.14	32.79	49.62	74.00	-24.38	PK
V	4924.00	31.93	34.05	5.14	32.79	35.81	54.00	-18.19	AV
V	7386.00	38.98	32.67	6.36	35.99	48.66	74.00	-25.34	PK
V	7386.00	27.23	32.67	6.36	35.99	36.91	54.00	-17.09	AV
V	9848.00	40.43	32.89	7.59	38.37	53.50	74.00	-20.50	PK
V	9848.00	26.85	32.89	7.59	38.37	39.92	54.00	-14.08	AV
V	12310.00	34.71	31.88	8.82	39.06	50.71	74.00	-23.29	PK
V	12310.00	26.55	31.88	8.82	39.06	42.55	54.00	-11.45	AV
H	4924.00	43.79	34.05	5.14	32.79	47.67	74.00	-26.33	PK
H	4924.00	37.06	34.05	5.14	32.79	40.94	54.00	-13.06	AV
H	7386.00	45.13	32.67	6.36	35.99	54.81	74.00	-19.19	PK
H	7386.00	27.01	32.67	6.36	35.99	36.69	54.00	-17.31	AV
H	9848.00	40.53	32.89	7.59	38.37	53.60	74.00	-20.40	PK
H	9848.00	25.27	32.89	7.59	38.37	38.34	54.00	-15.66	AV
H	12310.00	38.66	31.88	8.82	39.06	54.66	74.00	-19.34	PK
H	12310.00	25.98	31.88	8.82	39.06	41.98	54.00	-12.02	AV

Note:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. We test all the mode and recorded the worst mode (802.11b) in the report.

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	58.46	35.17	3.48	27.49	54.26	74.00	PK	PASS
	H	2390.00	49.54	35.17	3.48	27.49	45.34	54.00	AV	PASS
	H	2400.00	60.05	35.16	3.49	27.52	55.90	74.00	PK	PASS
	H	2400.00	50.15	35.16	3.49	27.52	46.00	54.00	AV	PASS
	V	2390.00	57.82	35.17	3.48	27.49	53.62	74.00	PK	PASS
	V	2390.00	50.1	35.17	3.48	27.49	45.90	54.00	AV	PASS
	V	2400.00	60.03	35.16	3.49	27.52	55.88	74.00	PK	PASS
	V	2400.00	49.85	35.16	3.49	27.52	45.70	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	57.96	35.11	3.56	27.75	54.16	74.00	PK	PASS
	H	2483.50	49.14	35.11	3.56	27.75	45.34	54.00	AV	PASS
	H	2500.00	59.32	35.10	3.57	27.80	55.59	74.00	PK	PASS
	H	2500.00	49.37	35.10	3.57	27.80	45.64	54.00	AV	PASS
	V	2483.50	58.5	35.11	3.56	27.75	54.70	74.00	PK	PASS
	V	2483.50	50.08	35.11	3.56	27.75	46.28	54.00	AV	PASS
	V	2500.00	58.51	35.10	3.57	27.80	54.78	74.00	PK	PASS
	V	2500.00	49.53	35.10	3.57	27.80	45.80	54.00	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	55.49	30.22	4.85	23.98	54.10	74.00	PK	PASS
	H	2390.00	47.79	30.22	4.85	23.98	46.40	54.00	AV	PASS
	H	2400.00	57.19	30.22	4.85	23.98	55.80	74.00	PK	PASS
	H	2400.00	44.62	30.22	4.85	23.98	43.23	54.00	AV	PASS
	V	2390.00	56.65	30.22	4.85	23.98	55.26	74.00	PK	PASS

	V	2390.00	47.13	30.22	4.85	23.98	45.74	54.00	AV	PASS
	V	2400.00	55.51	30.22	4.85	23.98	54.12	74.00	PK	PASS
	V	2400.00	45.92	30.22	4.85	23.98	44.53	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	56.94	35.11	3.56	27.75	53.14	74.00	PK	PASS
	H	2483.50	48.32	35.11	3.56	27.75	44.52	54.00	AV	PASS
	H	2500.00	58.72	35.10	3.57	27.80	54.99	74.00	PK	PASS
	H	2500.00	49.21	35.10	3.57	27.80	45.48	54.00	AV	PASS
	V	2483.50	57.53	35.11	3.56	27.75	53.73	74.00	PK	PASS
	V	2483.50	50.09	35.11	3.56	27.75	46.29	54.00	AV	PASS
	V	2500.00	58.26	35.10	3.57	27.80	54.53	74.00	PK	PASS
	V	2500.00	49.39	35.10	3.57	27.80	45.66	54.00	AV	PASS
	Low Channel 2412MHz									
	H	2390.00	57.88	35.17	3.48	27.49	53.68	74.00	PK	PASS
	H	2390.00	49.98	35.17	3.48	27.49	45.78	54.00	AV	PASS
802.11 n20	H	2400.00	60.43	35.16	3.49	27.52	56.28	74.00	PK	PASS
	H	2400.00	49.38	35.16	3.49	27.52	45.23	54.00	AV	PASS
	V	2390.00	57.25	35.17	3.48	27.49	53.05	74.00	PK	PASS
	V	2390.00	50.2	35.17	3.48	27.49	46.00	54.00	AV	PASS
	V	2400.00	59.79	35.16	3.49	27.52	55.64	74.00	PK	PASS
	V	2400.00	49.92	35.16	3.49	27.52	45.77	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	57.67	35.11	3.56	27.75	53.87	74.00	PK	PASS
	H	2483.50	49.06	35.11	3.56	27.75	45.26	54.00	AV	PASS
	H	2500.00	59.5	35.10	3.57	27.80	55.77	74.00	PK	PASS
	H	2500.00	49.58	35.10	3.57	27.80	45.85	54.00	AV	PASS

	V	2483.50	58.51	35.11	3.56	27.75	54.71	74.00	PK	PASS
	V	2483.50	49.57	35.11	3.56	27.75	45.77	54.00	AV	PASS
	V	2500.00	58.41	35.10	3.57	27.80	54.68	74.00	PK	PASS
	V	2500.00	50.32	35.10	3.57	27.80	46.59	54.00	AV	PASS
802.11 n40	Low Channel 2422MHz									
	H	2390.00	57.28	35.17	3.48	27.49	53.08	74.00	PK	PASS
	H	2390.00	49.86	35.17	3.48	27.49	45.66	54.00	AV	PASS
	H	2400.00	58.5	35.16	3.49	27.52	54.35	74.00	PK	PASS
	H	2400.00	49.43	35.16	3.49	27.52	45.28	54.00	AV	PASS
	V	2390.00	57.08	35.17	3.48	27.49	52.88	74.00	PK	PASS
	V	2390.00	49.15	35.17	3.48	27.49	44.95	54.00	AV	PASS
	V	2400.00	58.56	35.16	3.49	27.52	54.41	74.00	PK	PASS
	V	2400.00	48.68	35.16	3.49	27.52	44.53	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	56.87	35.11	3.56	27.75	53.07	74.00	PK	PASS
	H	2483.50	48.67	35.11	3.56	27.75	44.87	54.00	AV	PASS
	H	2500.00	58.99	35.10	3.57	27.80	55.26	74.00	PK	PASS
	H	2500.00	49.02	35.10	3.57	27.80	45.29	54.00	AV	PASS
	V	2483.50	57.71	35.11	3.56	27.75	53.91	74.00	PK	PASS
	V	2483.50	49.99	35.11	3.56	27.75	46.19	54.00	AV	PASS
	V	2500.00	58.13	35.10	3.57	27.80	54.40	74.00	PK	PASS
	V	2500.00	49.32	35.10	3.57	27.80	45.59	52.36	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

7 Conduct Band Edge And Spurious Emissions Measurement


Test Requirement	:	FCC CFR47 Part 15 Section 15.247, RSS-247 § 5.5
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). RSS-247 § 5.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Result


Mode	Channel	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11b	1	0	2400.00	-43.473	-18.95	-24.523	PASS
			2398.14	-41.263	-18.95	-22.313	PASS
			24611.1	-45.207	-18.95	-26.257	PASS
	6		24579.9	-45.184	-18.26	-26.924	PASS
	11		2483.50	-46.157	-17.61	-29	PASS
			24537.4	-44.918	-17.61	-27.308	PASS
IEEE 802.11g	1		2400.00	-39.105	-19.36	-19.745	PASS
			2396.97	-36.171	-19.36	-16.811	PASS
			24531.8	-44.191	-19.36	-24.831	PASS
	6		24546.2	-43.456	-18.81	-24.646	PASS
	11		2483.50	-42.191	-18.49	-24	PASS
			24595.5	-44.279	-18.49	-25.789	PASS
IEEE 802.11n_20	1		2400.00	-35.951	-18.76	-17.191	PASS
			2398.92	-35.915	-18.76	-17.155	PASS
			24508.7	-44.956	-18.76	-26.195	PASS
	6		24569.9	-44.944	-18.94	-26.004	PASS
	11		2483.50	-42.440	-18.3	-24	PASS
			24593.0	-45.855	-18.3	-27.555	PASS
IEEE 802.11n_40	3		2400.00	-39.997	-22.2	-17.797	PASS
			2388.26	-36.041	-22.2	-13.841	PASS
			24611.1	-45.096	-22.2	-22.896	PASS
	6		24592.4	-45.671	-20.97	-24.701	PASS
	9		2483.50	-28.229	-20.84	-27	PASS
			23652.2	-45.421	-20.84	-24.581	PASS

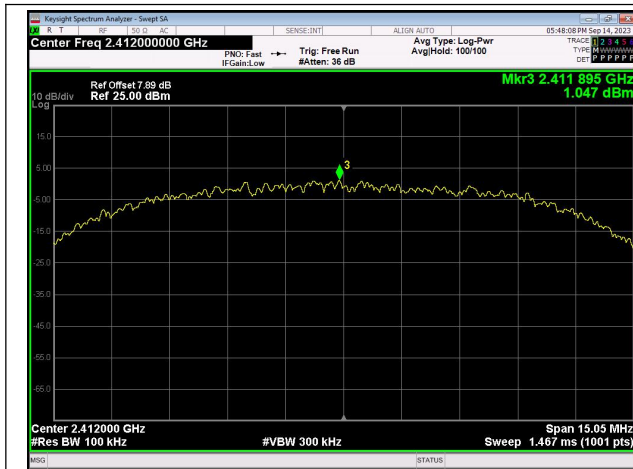

In-Band Reference Level
IEEE 802.11b_Channel 1_20MHz_Antenna 0

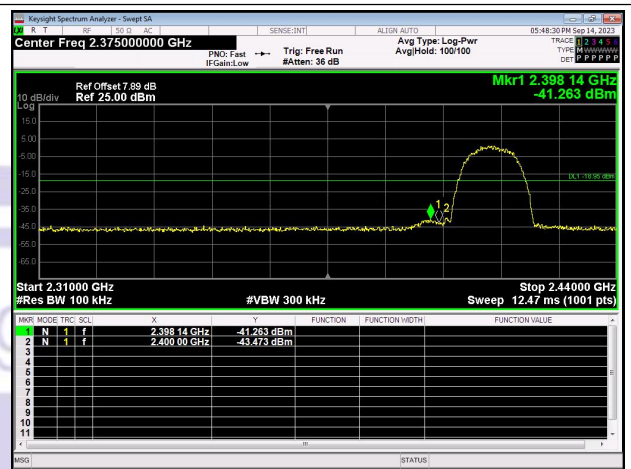



Out Of Band Emission
IEEE 802.11b_Channel 1_20MHz_Antenna 0

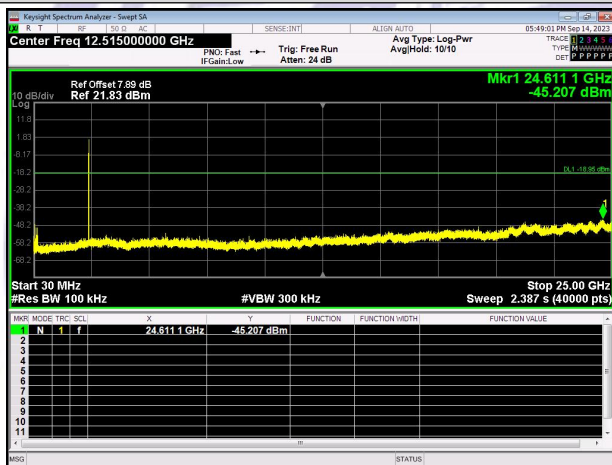



Spurious Emission
IEEE 802.11b_Channel 1_20MHz_Antenna 0




In-Band Reference Level
IEEE 802.11b_Channel 6_20MHz_Antenna 0

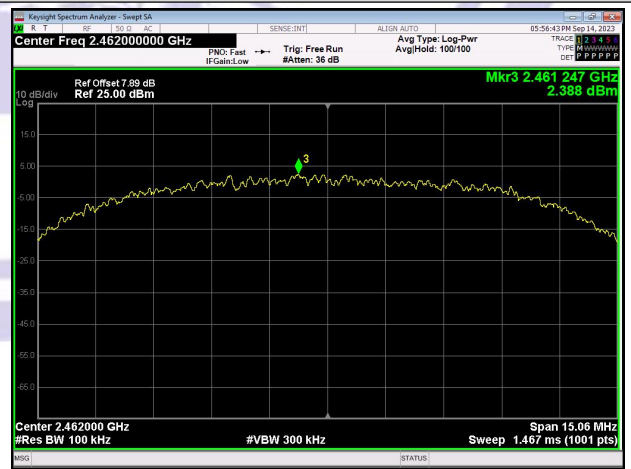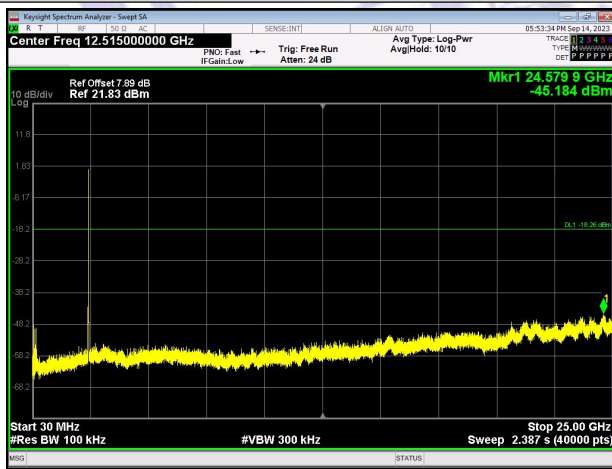

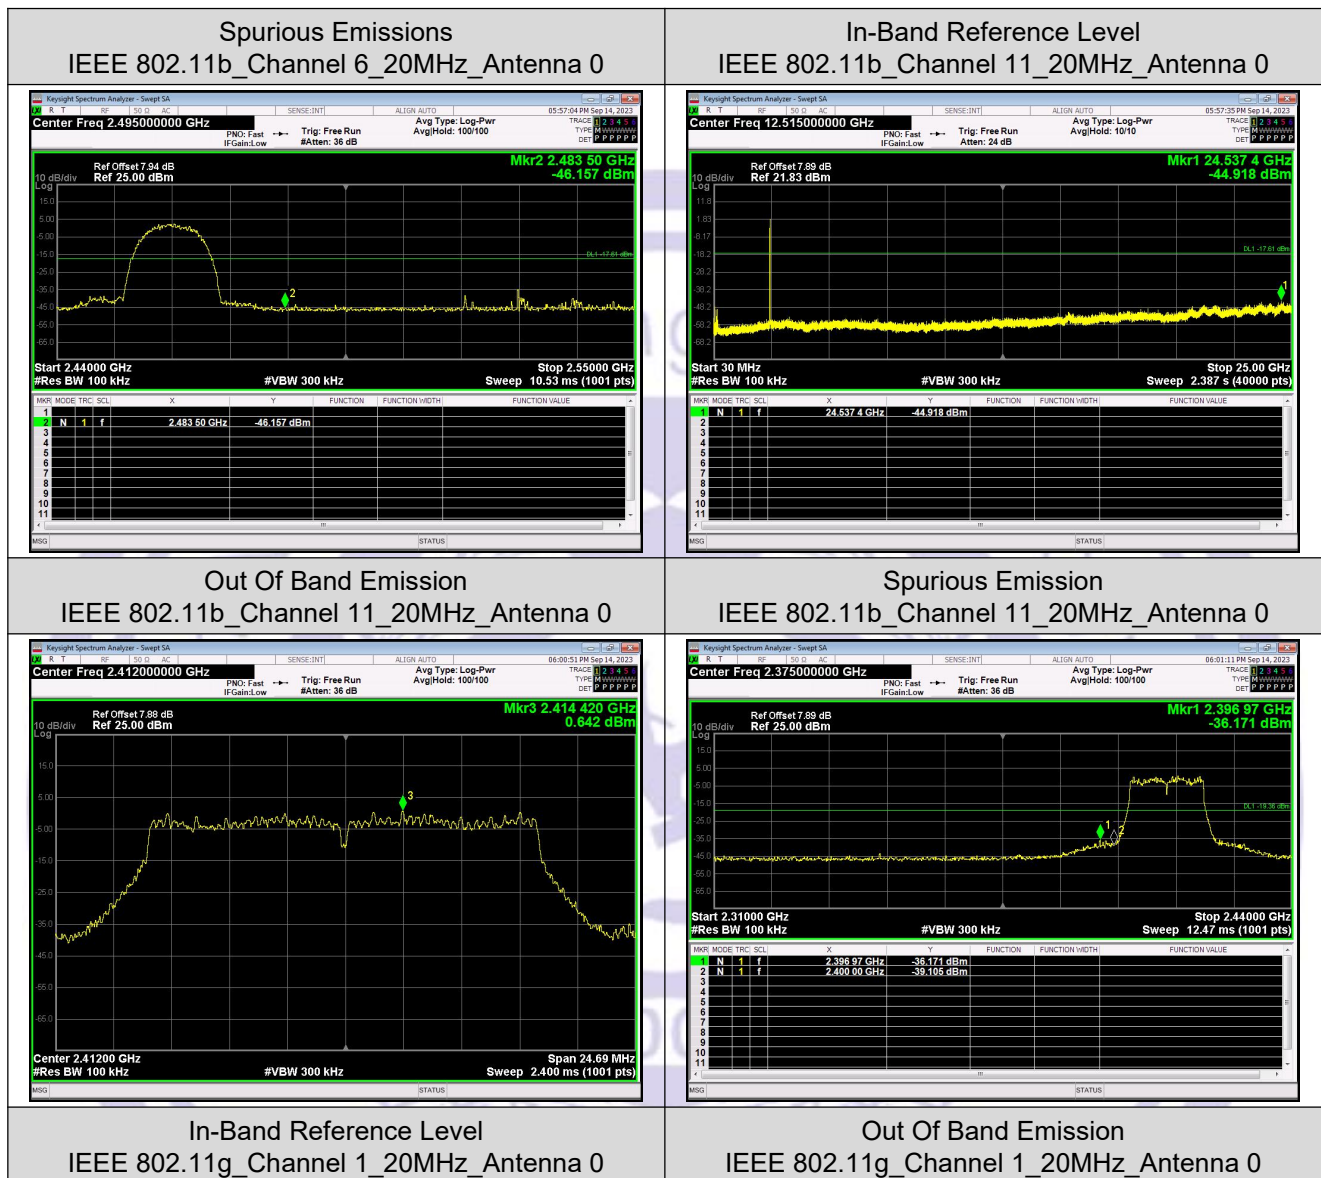


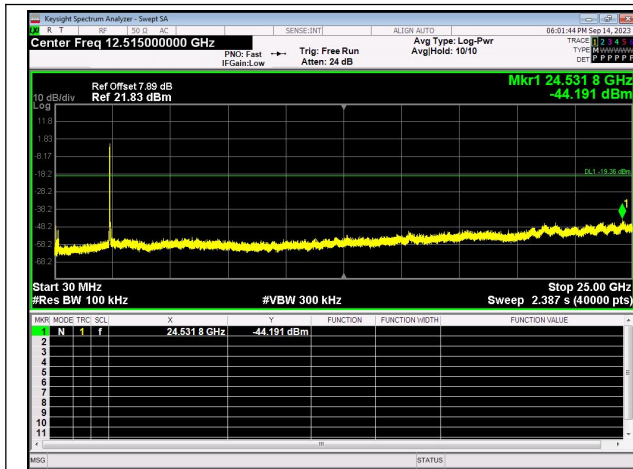


Spurious Emission
IEEE 802.11g_Channel 1_20MHz_Antenna 0

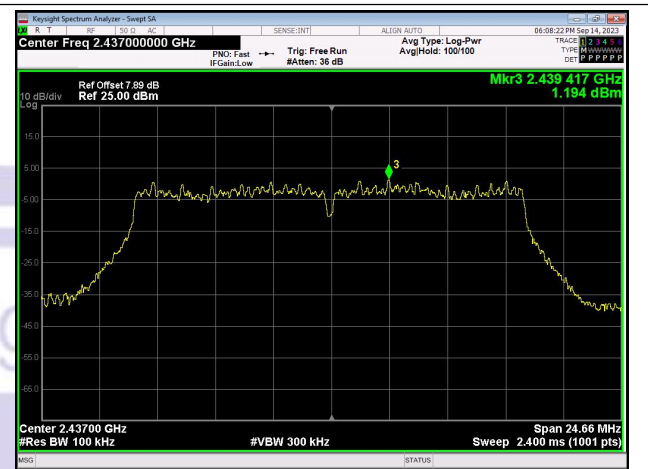


In-Band Reference Level
IEEE 802.11g_Channel 6_20MHz_Antenna 0

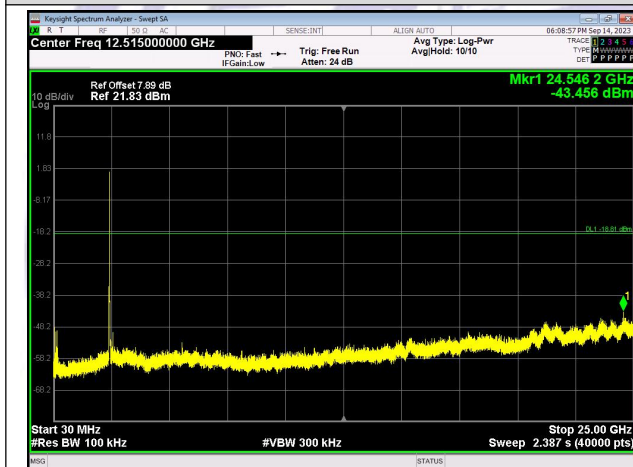


Spurious Emissions
IEEE 802.11g_Channel 6_20MHz_Antenna 0

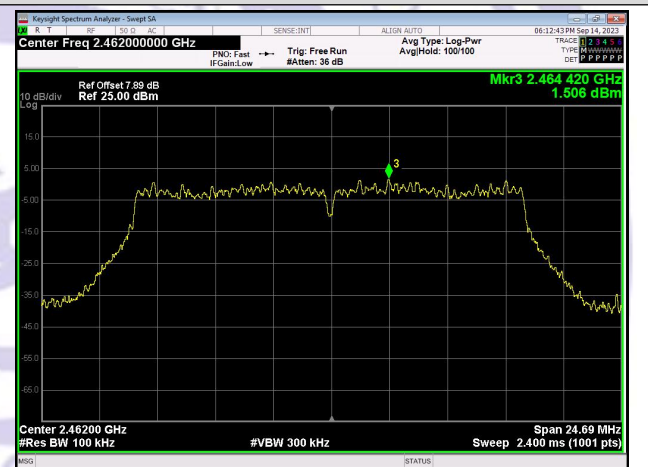


In-Band Reference Level
IEEE 802.11g_Channel 11_20MHz_Antenna 0

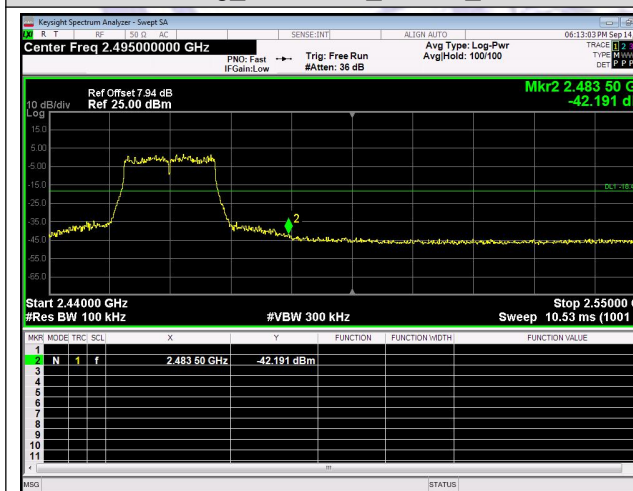


Out Of Band Emission IEEE 802.11g_Channel 11_20MHz_Antenna 0

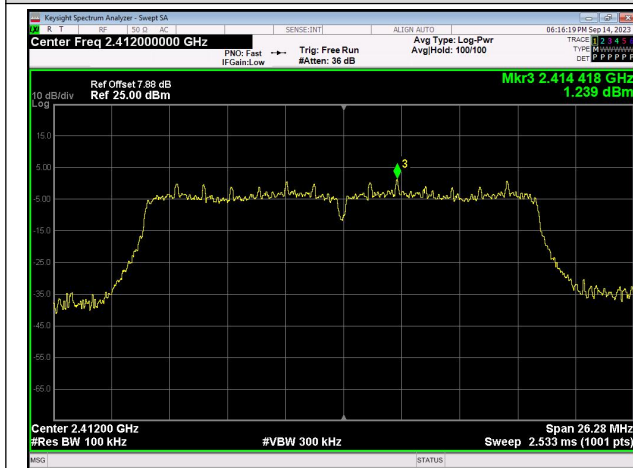

Spurious Emission IEEE 802.11g_Channel 11_20MHz_Antenna 0

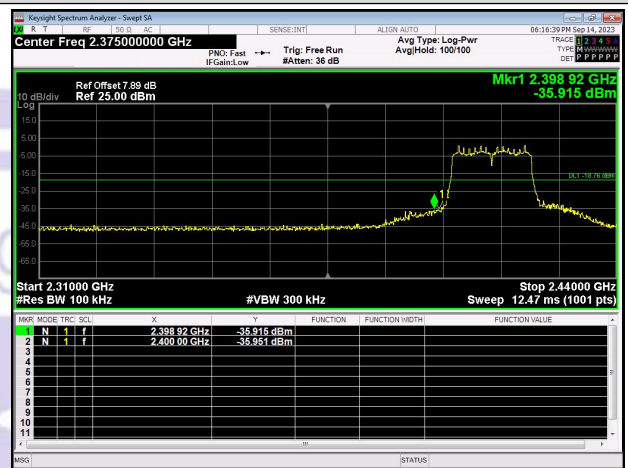

In-Band Reference Level IEEE 802.11n_Channel 1_20MHz_Antenna 0

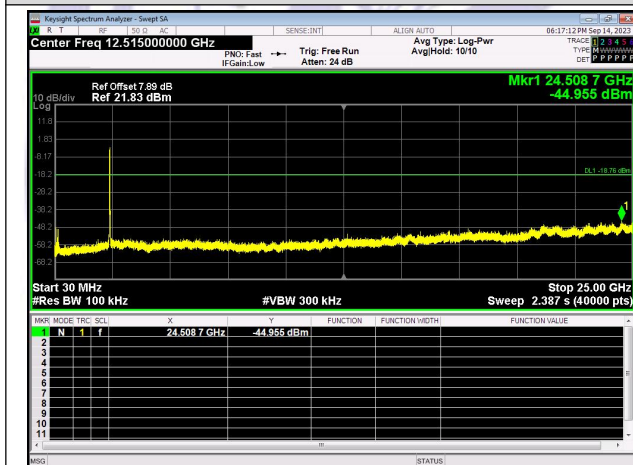

Out Of Band Emission IEEE 802.11n_Channel 1_20MHz_Antenna 0



Spurious Emission IEEE 802.11n_Channel 1_20MHz_Antenna 0

In-Band Reference Level IEEE 802.11n_Channel 6_20MHz_Antenna 0