



Inter**Lab**[®]

FCC Measurement/Technical Report on

Vehicle remote keyless entry transmitter
PL 7 ID Device

Report Reference: MDE_HUF_0901_FCCa

Test Laboratory:

7 layers AG
Borsigstrasse 11
40880 Ratingen
Germany
email: info@7Layers.de



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Markus Becker
Vorstand • Board:
Dr. H.-J. Meckelburg
Wilfried Klassmann

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385

InterLab[®] is a registered trademark of 7 layers AG



Table of Contents

0 Summary	3
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
1 Administrative Data	5
1.1 Testing Laboratory	5
1.2 Project Data	5
1.3 Applicant Data	5
1.4 Manufacturer Data	5
2 Test object Data	6
2.1 General EUT Description	6
2.2 EUT Main components	7
2.3 Ancillary Equipment	7
2.4 Auxiliary Equipment	7
2.5 EUT Setups	8
2.6 Operating Modes	8
2.7 Product labeling	8
3 Test Results	9
3.1 Duty cycle measurement (based on dwell time measurement)	9
3.2 Spurious radiated emissions	11
3.3 Peak power output	17
3.4 Occupied bandwidth	18
4 Test Equipment	19
5 Photo Report	25
6 Setup Drawings	26
7 Annex measurement plots	27
7.1 Duty cycle measurement (based on dwell time measurement)	27
7.2 Occupied bandwidth	31
7.3 Check which channel produces the highest power	35



0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Periodic operation in the band above 70 MHz)

Applicable FCC Rules

Edition of FCC Rules: 10-1-09

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.231 Periodic operation in the band 40.66-40.70 MHz, above 70 MHz

Note:
none

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.

0.2 Measurement Summary

FCC Part 15, Subpart C		§ 15.207	
Conducted emissions (AC power line)			
The measurement was performed according to ANSI C63.4			2003
OP-Mode	Setup	Port	Final Result
-	-	AC Port (power line)	N/A
FCC Part 15, Subpart C		§ 15.231	
Duty cycle measurement (based on dwell time measurement)			
The measurement was performed according to FCC § 15.31			10-1-09 Edition
OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_03	Enclosure	passed
FCC Part 15, Subpart C		§ 15.231	
Spurious Radiated Emissions			
The measurement was performed according to ANSI C63.4			2003
OP-Mode	Setup	Port	Final Result
op-mode 2	Setup_01	Enclosure	passed
op-mode 2	Setup_02	Enclosure	passed
FCC Part 15, Subpart C		§ 15.231	
Peak power output			
The measurement was performed according to ANSI C63.4			2003
OP-Mode	Setup	Port	Final Result
op-mode 2	Setup_01	Enclosure	passed
op-mode 2	Setup_02	Enclosure	passed
FCC Part 15, Subpart C		§ 15.231	
Occupied Bandwidth			
The measurement was performed according to FCC § 15.31			10-1-09 Edition
OP-Mode	Setup	Port	Final Result
op-mode 3	Setup_01	Enclosure	passed

N/A not applicable (the EUT is powered by DC / integral battery only)



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

Responsible for
Accreditation Scope:

M. Drake

Responsible
for Test Report:

A. P. P.



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:
- Deutscher Akkreditierungs Rat DAR- Registration no. DGA-PL-192/99-02

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Andreas Petz

Report Template Version: 2010-04-19

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Andreas Petz
Date of Test(s): 2010-07-05 to 2010-08-16
Date of Report: 2010-09-03

1.3 Applicant Data

Company Name: Huf Hülsbeck & Fürst GmbH & Co. KG
Address: Steeger Str. 17
42551 Velbert
Germany
Contact Person: Mr. Thomas Herzog

1.4 Manufacturer Data

Company Name: please see applicant data
Address:
Contact Person:

2 Test object Data

2.1 General EUT Description

Equipment under Test	Vehicle remote keyless entry transmitter
Type Designation:	PL7 ID device
Kind of Device:	315 MHz transceiver
(optional)	
Voltage Type:	DC / (Lithium battery)
Voltage level:	3.0 V
Repeated Operation:	Manually / Periodically according to FCC §15.231(a)
The EUT is part of a security or safety system:	No

General product description:

The EUT is a wireless handheld Vehicle remote keyless entry transmitter (transceiver, non-periodic operation in the band above 70 MHz). The operating frequency is 315 MHz.

Specific product description for the EUT:

The EUT is a vehicle remote keyless entry transmitter / transceiver which uses FSK modulation. The transmitter is activated manually by a switch and is deactivated automatically within 5 seconds after release of the switch.

The EUT is tested in two different variants of the housing: one has a style element in "chrome" and for the other at this place the standard plastic of the housing is used. Please refer to the photos.
Within this report the variants are shortly indicated by "chrome" and "non-chrome".

The EUT provides the following ports:

Ports
Enclosure

The main components of the EUT are listed and described in Chapter 2.2.



2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: UG000a02)	Vehicle remote keyless entry transmitter	PL7 ID device "chrome"	– (none)	02	04.01	2010-07-31
Remark: EUT A is equipped with an integral antenna.						
EUT B (Code: UG010a02)	Vehicle remote keyless entry transmitter	PL7 ID device "non-chrome"	– (none)	02	04.01	2010-07-31
Remark: EUT B is equipped with an integral antenna.						
EUT C (Code: UG010b01)	Vehicle remote keyless entry transmitter	PL7 ID device "non-chrome"	– (none)	02	04.01	2010-07-20
Remark: EUT C is equipped with an integral antenna.						

NOTE: The short description is used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.	FCC ID
–	–	–	–	–	–	–

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
–	–	–	–	–	–	–



2.5 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
Setup_01	EUT A	setup for measurements in test mode
Setup_02	EUT B	setup for measurements in test mode
Setup_03	EUT C	setup for measurements in application mode ("dwell time")

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	periodic operation	Transmitter is sending a pulsed and modulated signal (as used in the application).
op-mode 2	continuous operation cw	Transmitter is sending a CW signal continuously. Special op mode for test purpose only.
op-mode 3	continuous operation mod.	Transmitter is sending a modulated signal continuously. Special op mode for test purpose only.

2.7 Product labeling

2.7.1 FCC ID label

Please refer to the documentation of the applicant.

2.7.2 Location of the label on the EUT

Please refer to the documentation of the applicant.

3 Test Results

3.1 Duty cycle measurement (based on dwell time measurement)

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.35, §15.231

3.1.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the dwell time measurements. For analyzer settings please see measurement plots in annex.

3.1.2 Test Limits

Depending on the function of the EUT different paragraphs of FCC §15.231 apply:

Either

(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Or

(a)(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

And

(a)(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

Otherwise

(e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation [...]. In addition, [...] the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

This test is also performed to determine the pulse train of the transmitter and calculate the correction factor for pulse modulated transmitters according to FCC §15.35. This factor is used as a correction factor for the field strength measurements, both for Spurious radiated emissions and Peak power output.



3.1.3 Test Protocol

Temperature: 25 °C
 Air Pressure: 1002 hPa
 Humidity: 45 %

Op. Mode	Setup	Port
op-mode 1	Setup_03	Enclosure

a) Determine the total duration of a transmission within 100 ms:

Duty cycle = (L1*N1) + (L2*N2) + ... + (Ln*Ln)) / 100 ms or T, whichever is less
 Correction factor = 20 * LOG (Duty cycle) [dB]

Step 1	Holdover time	Less than 5s
Step 2	Cycle to determine the on/off ratio within 100 ms and Sweep of a sequence to determine the on time within 100 ms (L1-LN).	200.4 ms L1 = 92.2 ms N1 = 8
Step 3	Determine the period of periodic re-transmission	TR = 484.7 ms

Calculation of Duty Cycle / Correction Factor:
 If T > 100 ms => T: = 100 ms; L1 = 92.2 ms; N = 1 (within 100 ms);
 Duty cycle = (1*92.2) / 100 = 0.92
 Correction factor = 20*LOG(0.92) = -0.7 dB

b) Determine the period of periodic re-transmission, if any, or cease (deactivation) time:
 Period of re-transmission TR = 484.7 ms
 Deactivation after TC = 1.69 s, Limit: ≤ 5 s

=> The transmitter operates according to FCC §15.231 (a)(1).

3.1.4 Test result: Duty cycle / correction factor

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed

3.2 Spurious radiated emissions

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.31, ANSI C 63.4, 2003

3.2.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 10 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s

- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $\pm 22.5^\circ$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to $+ 22.5^\circ$ around the determined value
- Height variation range: -0.25 m to $+0.25$ m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

Important EMI receiver settings:

- Detector: Peak
- IF Bandwidth = 1 MHz
- Scantime = 1 ms

3.2.2 Test Requirements / Limits

1) A radiated emission test is relating to the fundamental frequency.

a) Either for "non-periodic" operation of the EUT as defined in §15.231(a) the limits for the average field strength apply according to FCC Part 15, Subpart C, §15.231(b):

For fundamental frequency (MHz)	Limit Fundamental (dBµV/m)	Limit Spurious (dBµV/m)
40.66 – 40.70	67.0	47.0
70 – 130	67.0	47.0
130 – 174	67.0 – 71.5	47.0 – 51.5 *)
174 – 260	71.5	51.5
260 – 470	71.5 – 81.9	51.5 – 61.9 *)
above 470	81.9	61.9

b) Or for "periodic" operation of the EUT the limits for the average field strength apply according to FCC Part 15, Subpart C, §15.231(e):

For fundamental frequency (MHz)	Limit Fundamental (dBµV/m)	Limit Spurious (dBµV/m)
40.66 – 40.70	60.0	40.0
70 – 130	54.0	34.0
130 – 174	54.0 – 63.5	34.0 – 43.5 *)
174 – 260	63.5	43.5
260 – 470	63.5 – 74.0	43.5 – 54.0 *)
above 470	74.0	54.0

*) linear interpolation



2) A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1 GHz) and Average (> 1GHz) field strength is listed in § 15.209(a):

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Calculate Limit(dBµV/m @10m)	Limit (dBµV/m) @10m
0.009 – 0.49	2400/F (kHz)	300	(48.5 – 13.8) + 30 dB	78.5 – 46.8
0.49 – 1.705	24000/F (kHz)	30	(48.9 – 23.0) + 10 dB	58.9 – 33.0
1.705 – 30	30	30	29.5 + 10 dB	39.5

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$

§15.35(c):

[...] when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted [...].

§15.231(b)(3)

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator.

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

Interpretation of the test laboratory:

The last subordinate clause of §15.231(b)(3) is overruled by §15.205/209, therefore within the restricted bands the limits defined at §15.205/209 and outside the restricted bands the limits defined at §15.231(b) resp. §15.231(e) are applied.

3.2.3 Test Protocol

The EUT is transmitting alternating on 2 channels (314.6 and 315.0 MHz). It is checked that the maximum output power is generated on channel 1 and the tests “output power / radiated spurious emissions” in test mode are performed for this channel.

3.2.3.1 Measurement up to 30 MHz

Because of the kind of EUT, especially the size, which is small related to the wavelength (1/100 lambda), no relevant emissions are expected in the frequency range 9 kHz to 30 MHz (theoretically not possible). Nevertheless a check using a near field probe was performed. No relevant emissions have been observed. Consequently no final measurement was performed.

3.2.3.2 Measurement 30 MHz – 1 GHz (setup_01), 300 – 700 MHz (setup_02)

Temperature: 27 °C
 Air Pressure: 1002 hPa
 Humidity: 41 %

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Margin to limit dB	Margin to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-		-			-			

Remark: No (further) spurious emissions in the range 20 dB below the limit found. The test was performed in the frequency range from 30 MHz to 1 GHz. For this test an EUT sending a CW signal was used. The values listed above include the correction factor of the test system and the duty cycle determined by the test “Duty cycle measurement (based on dwell time measurement)”.

Op. Mode	Setup	Port
op-mode 2	Setup_02	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Margin to limit dB	Margin to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-		-			-			

Remark: No (further) spurious emissions in the range 20 dB below the limit found. The test was performed in the frequency range from 300 MHz to 700 MHz. For this test an EUT sending a CW signal was used. The values listed above include the correction factor of the test system and the duty cycle determined by the test “Duty cycle measurement (based on dwell time measurement)”.

3.2.3.3 Measurement above 1 GHz

Temperature: 26 °C
 Air Pressure: 1006 hPa
 Humidity: 39 %

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Margin to limit dB	Margin to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-		-			-			

Remark: No (further) spurious emissions in the range 20 dB below the limit found. The test was performed in the frequency range from 1 GHz to 4 GHz. For this test an EUT sending a CW signal was used. The values listed above include the correction factor of the test system and the duty cycle determined by the test "Duty cycle measurement (based on dwell time measurement)".

3.2.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 2	passed



3.3 Peak power output

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.31, §15.231, ANSI C 63.4, 2003

3.3.1 Test Description

Please refer to sub-clause 3.2.1.

3.3.2 Test Limits

Please refer to sub-clause 3.2.2.

The limit is calculated for 314.6 MHz as 75.6 dBµV/m at a distance of 3 m.

3.3.3 Test Protocol

The EUT is transmitting alternating on 2 channels (314.6 and 315.0 MHz). It is checked that the maximum output power is generated on channel 1 and the tests “output power / radiated spurious emissions” in test mode are performed for this channel.

Temperature: 27 °C
 Air Pressure: 1002 hPa
 Humidity: 41 %

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

Output power dBµV/m	Frequency MHz	Remarks
73.3	314.6	Maximum radiated field strength at fundamental frequency

Remark: For this test an EUT sending a CW signal was used.
 The values listed above include the correction factor of the test system and the duty cycle determined by the test “Duty cycle measurement (based on dwell time measurement)”.

Op. Mode	Setup	Port
op-mode 2	Setup_02	Enclosure

Output power dBµV/m	Frequency MHz	Remarks
72.4	314.6	Maximum radiated field strength at fundamental frequency

Remark: For this test an EUT sending a CW signal was used.
 The values listed above include the correction factor of the test system and the duty cycle determined by the test “Duty cycle measurement (based on dwell time measurement)”.

3.3.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 2	passed



3.4 Occupied bandwidth

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.231

3.4.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

For analyzer settings please see measurement plots in annex.

3.4.2 Test Limits

FCC Part 15, Subpart C, §15.231(c)

The maximum 20 dB bandwidth of a transmitter operating at a frequency range:

70 to 900 MHz is 0.25% of the centre frequency

above 900 MHz is 0.5% of the centre frequency

3.4.3 Test Protocol

Temperature: 25 °C
 Air Pressure: 1002 hPa
 Humidity: 45 %

Op. Mode	Setup	Port
op-mode 3	Setup_01	Enclosure

20 dB bandwidth kHz	Limit kHz	Remarks
channel 1: 117.84	786.5	The limit is calculated as 314.6 MHz * 0.25 % = 786.5 kHz.
channel 2: 115.43	787.5	The limit is calculated as 315.0 MHz * 0.25 % = 787.5 kHz.

Remark: Please see annex for the measurement plots.

For information: The 99% Bandwidth is 99.0 kHz (channel 1) and 97.8 kHz (channel 2).

3.4.4 Test result: Occupied bandwidth

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed



4 Test Equipment

Test Equipment Details List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 1		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6		
	IC renewal	2009/01/21	2011/01/20
	FCC renewal	2009/01/07	2011/01/06

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer	Last Execution	Next Exec.
Air compressor	none	-	Atlas Copco		
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³ <i>Calibration Details</i>	none	Frankonia		
	FCC listing 96716 3m Part15/18			2009/01/07	2011/01/06
	ANSI C64.3 NSA			2009/01/21	2011/01/20
Controller Innco 2000	CO 2000	CO2000/328/12470 406/L	Innco innovative constructions GmbH		
EMC camera	CE-CAM/1	-	CE-SYS		
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi		
Filter ISDN	B84312-C110-E1		Siemens&Matsushita		
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita		

Lab ID: Lab 1
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer	
Antenna mast	AS 620 P		HD GmbH	
Biconical dipole	VUBA 9117	9117108	Schwarzbeck	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2008/10/27	2013/10/26
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq	
	Path Calibration		2010/05/10	2010/11/09
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq	
	Path Calibration		2010/05/10	2010/11/09
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq	
	Path Calibration		2010/05/10	2010/11/09
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch	
	Path Calibration		2010/05/10	2010/11/09
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax	
	Path Calibration		2010/05/10	2010/11/09
Double -ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2009/04/16	2012/04/15
Double -ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2009/04/28	2012/04/27
Dreheinheit	DE 325		HD GmbH	
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic	
	Path Calibration		2010/05/10	2010/11/09
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic	
	Path Calibration		2010/05/10	2010/11/09
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic	
	Path Calibration		2010/05/10	2010/11/09
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2009/05/27	2012/05/26
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	DKD calibration		2008/10/07	2011/10/06
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH	
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH	



Test Equipment Auxiliary Test Equipment

Lab ID: Lab 1, Lab 2
Manufacturer: see single devices
Description: Single Devices for various Test Equipment
Type: various
Serial Number: none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 01 (Multimeter)	Voltcraft M-3860M	IJ096055	Conrad Electronics
Digital Multimeter 03 (Multimeter)	Fluke 177 Standard calibration	86670383	Fluke Europe B.V. 2009/10/07 2011/10/06
Digital Oscilloscope [SA2] (Aux)	TDS 784C	B021311	Tektronix GmbH
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyser	FSP3 <i>Calibration Details</i>	836722/011	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/06 2011/10/05
Vector Signal Generator	SMIQ B3	832492/061	

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/08/14 2011/08/13
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/10/07 2010/10/06
Digital Radio Test Set	6103E	2359	Racal Instruments, Ltd.
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/02/16 2012/02/15
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		2007/07/16
	Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware: µP1 8v50 02.05.06 ---		
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/12/01 2011/11/30
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware: µP1 8v40 01.12.05 ---		
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/10/28 2011/10/27



Test Equipment Emission measurement devices

Lab ID: Lab 1
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Personal Computer	Dell	30304832059	Dell	
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG	
<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
Standard Calibration			2007/12/05	2010/12/04
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG	
Standard Calibration			2009/12/03	2011/12/02

Test Equipment Radio Lab Test Equipment

Lab ID: Lab 2
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Rosenberger Micro-Coax
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Sensor	NRV-Z1 Standard Calibration	836219/005	Rohde & Schwarz GmbH & Co. KG 2009/10/20 2011/10/19
Powermeter	NRVS Standard calibration	836333/064	Rohde & Schwarz GmbH & Co. KG 2009/10/15 2011/10/14
RF Step Attenuator RSP	RSP <i>Calibration Details</i> Standard Calibration	833695/001	Rohde & Schwarz GmbH & Co.KG <i>Last Execution</i> <i>Next Exec.</i> 2008/06/18 2011/06/17
Rubidium Frequency Standard	Datum, Model: MFL Standard calibration	2689/001	Datum-Beverly 2010/06/23 2011/06/22
Signal Generator	SMY02 <i>Calibration Details</i> standard calibration	829309/018	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i> 2008/10/07 2011/10/06
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
Spectrum Analyser	FSIQ26 <i>Calibration Details</i> calibration	840061/005	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i> 2008/10/02 2010/10/01
Temperature Chamber Vötsch 05	VT 4002 Specific calibration	58566080550010	Vötsch 2010/03/16 2011/03/15
Vector Signal Generator	SMIQ 03B <i>Calibration Details</i> Standard/DKD Calibration	837747/020	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i> 2008/10/09 2011/10/08




5 Photo Report

Detailed photos of the OUT are declared as confidential.

The photos are included in a separate report.

6 Setup Drawings

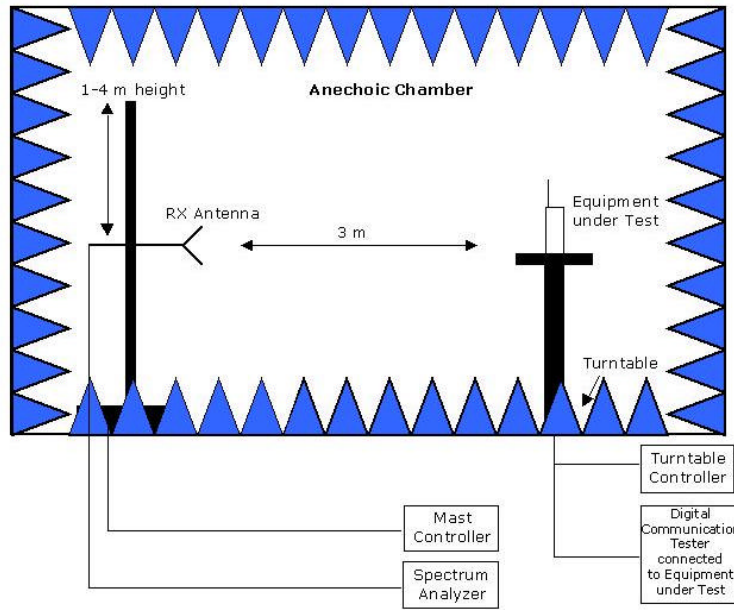

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.


7 Annex measurement plots

7.1 Duty cycle measurement (based on dwell time measurement)

Op. Mode


Op-mode 1

The duty cycle is checked for each of the three buttons and found to be identical. Shown are results for the button "padlock".

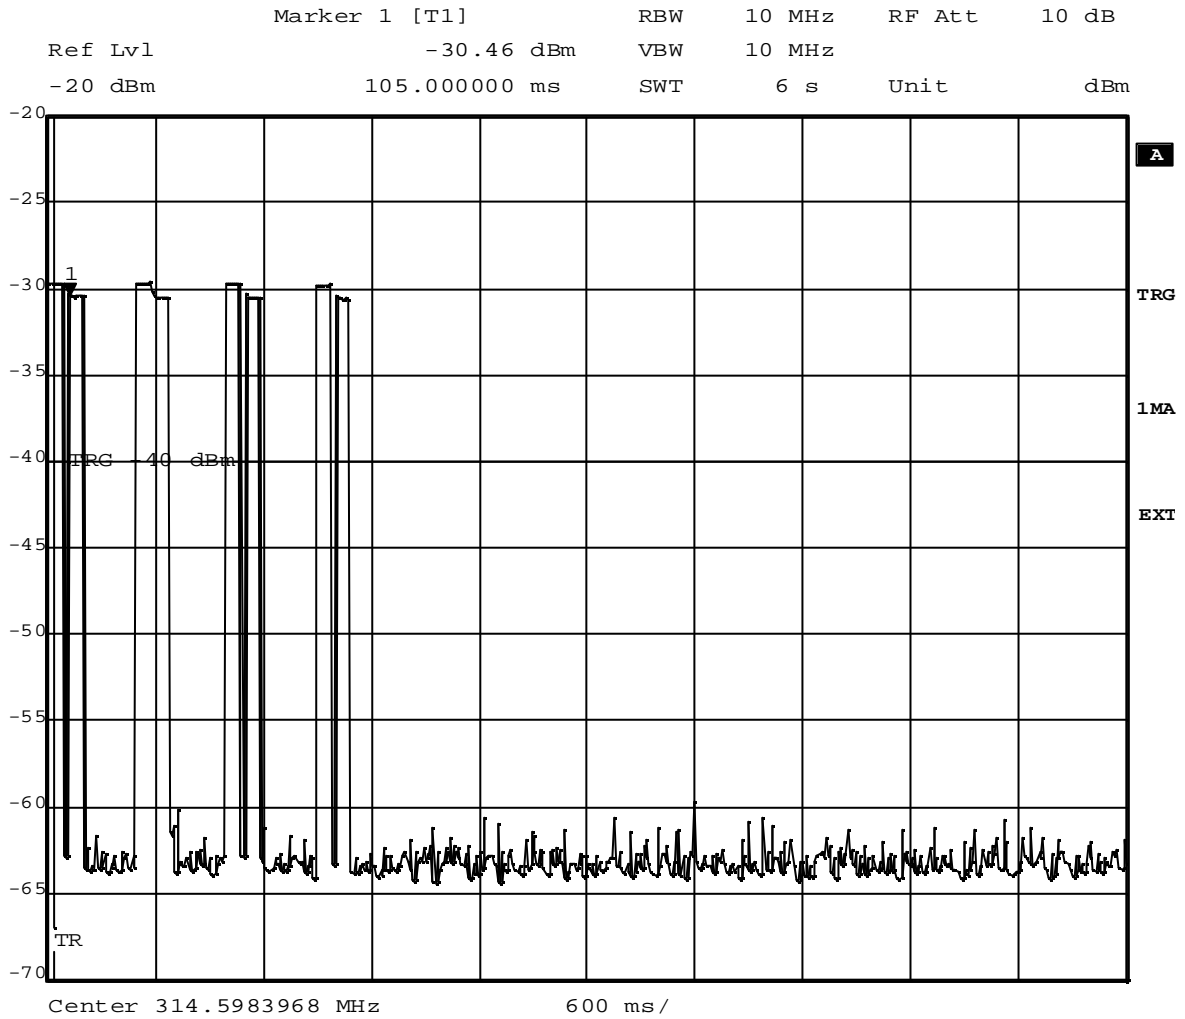


Date: 16.AUG.2010 16:02:53

Step 1a: Holdover time, $T_C > 5$ s

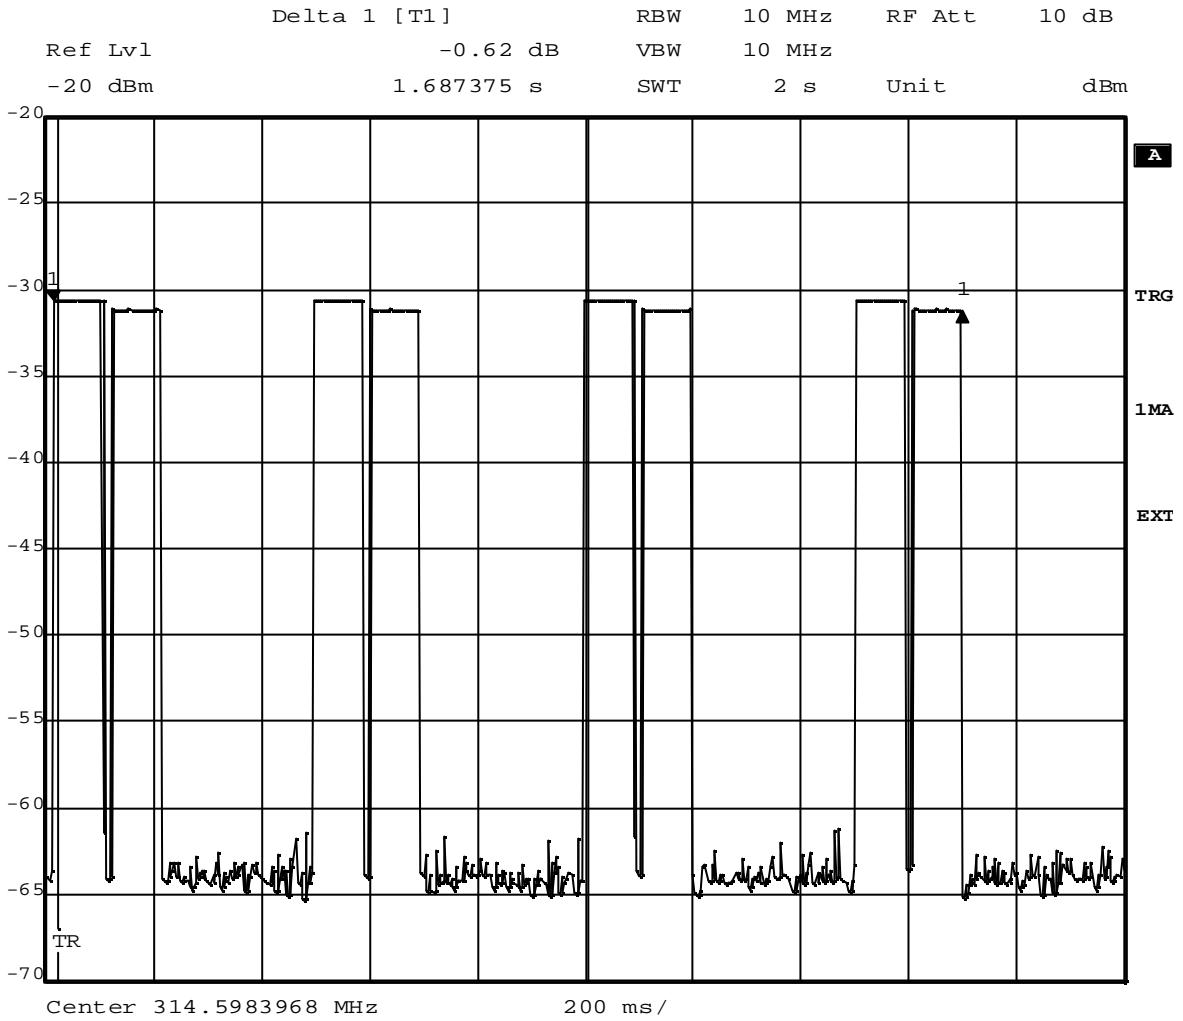


Date: 16.AUG.2010 16:08:18

Step 1b: Holdover time, determined as $T_C = 1.69$ s

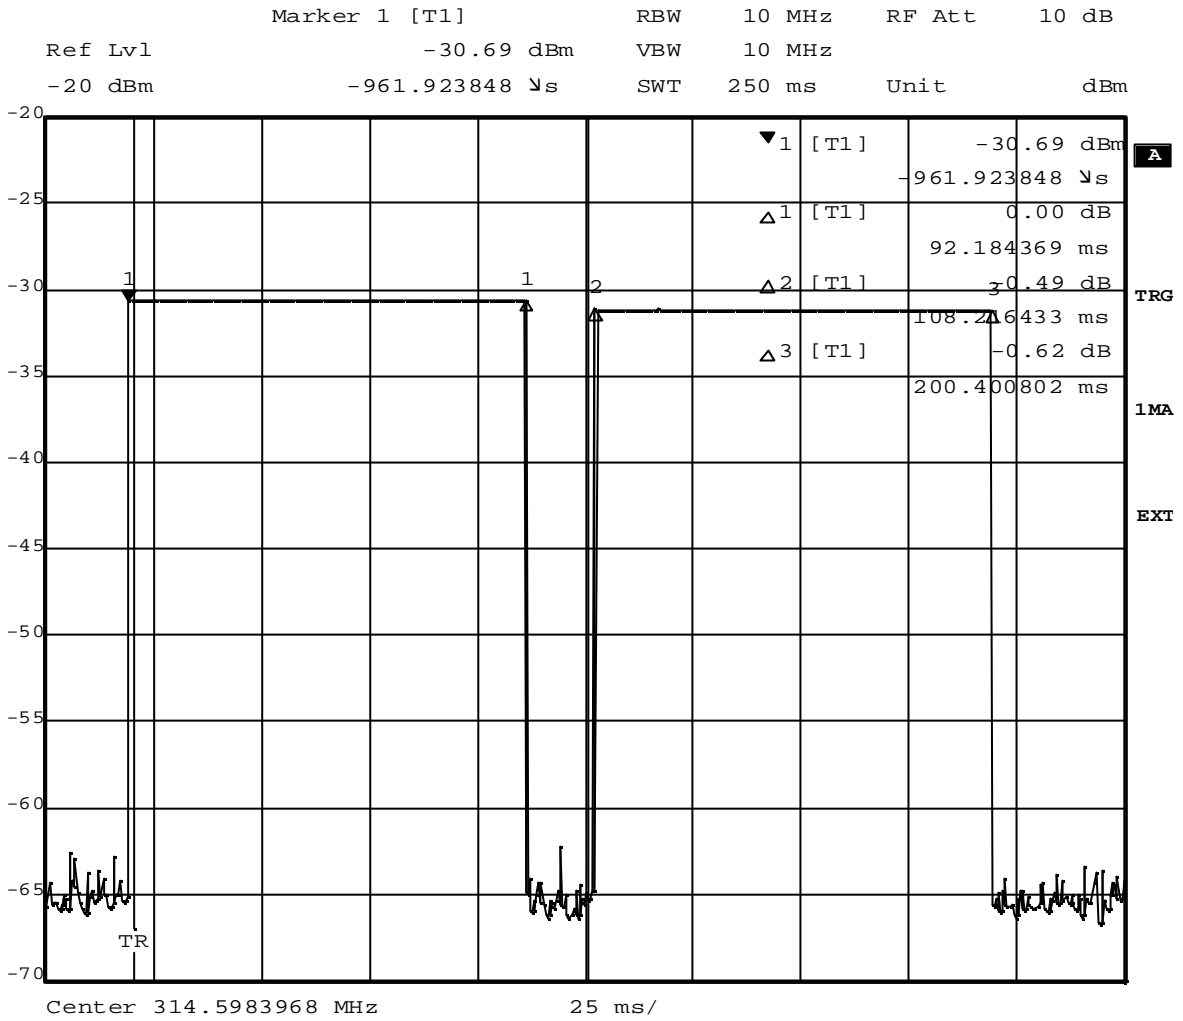

Date: 16.AUG.2010 16:11:09

Step 2: 250 ms sweep, cycle to determine the on/off ratio within 100 ms

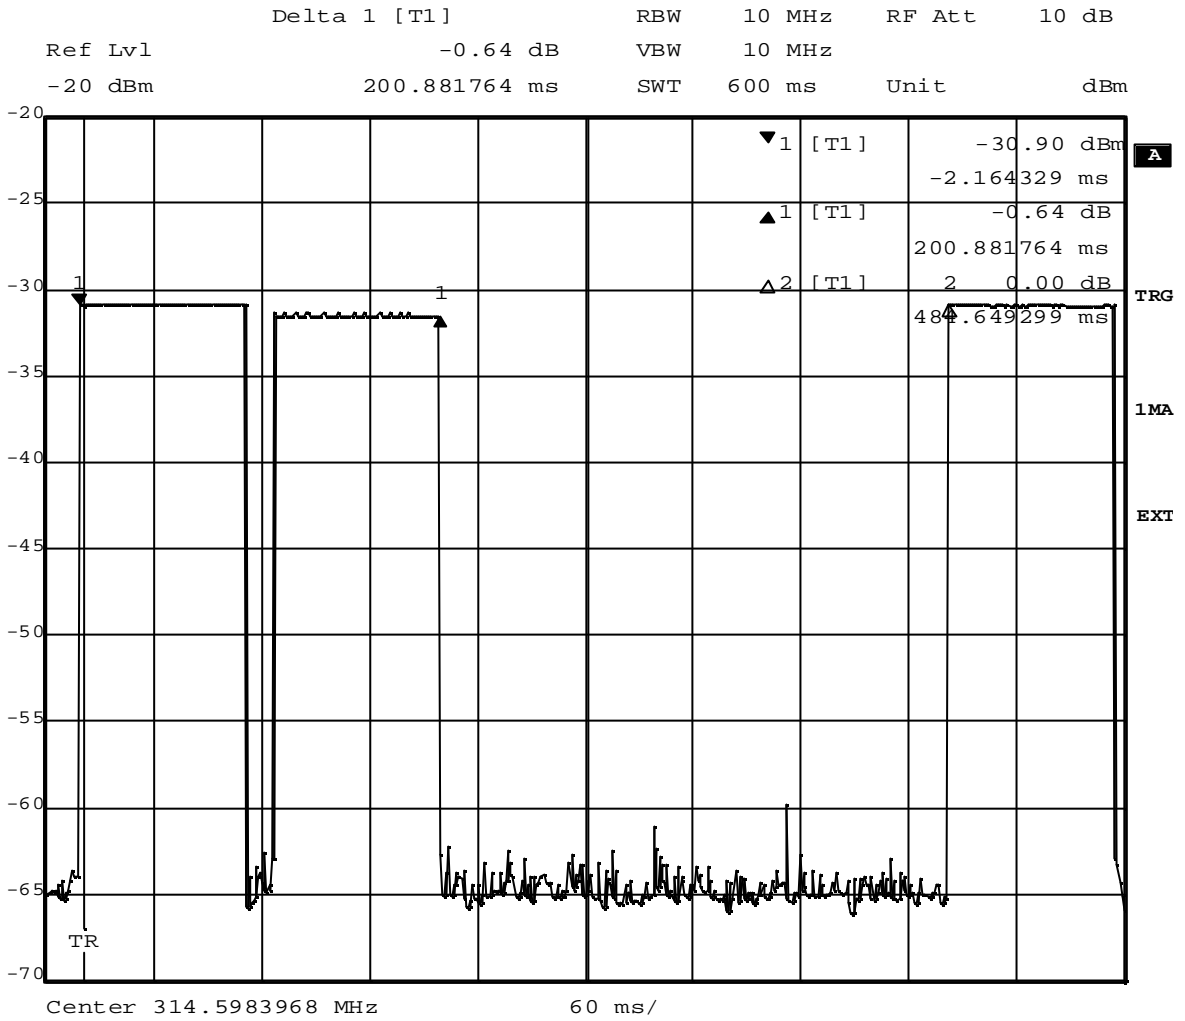

Date: 16.AUG.2010 16:13:54


Step 3: Determine the period of periodic re-transmission



7.2 Occupied bandwidth

7.2.1 Occupied bandwidth

Op. Mode 20 dB bandwidth channel 1
 op-mode 3

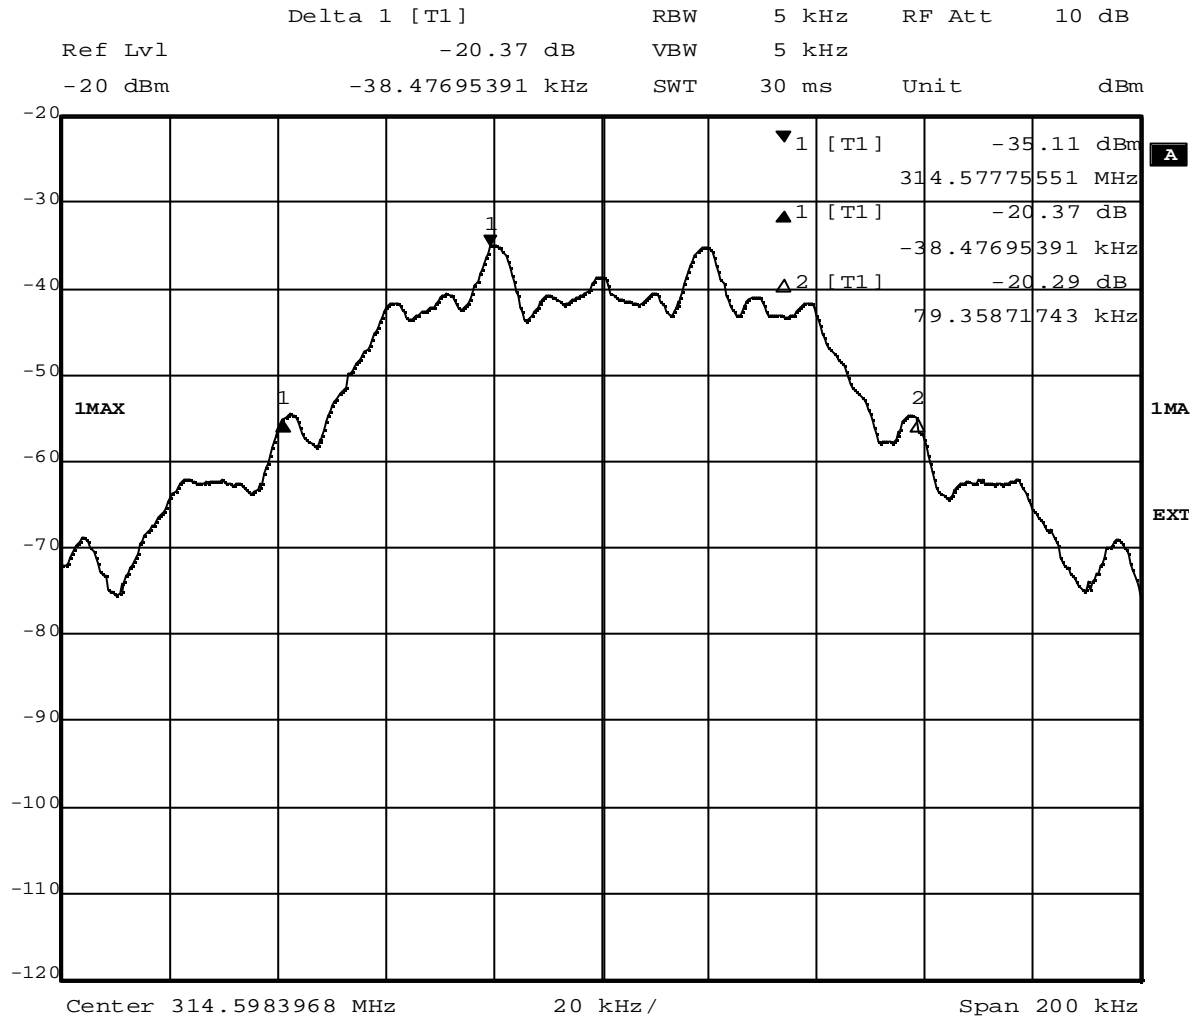


Date: 16.AUG.2010 16:53:49



Op. Mode 20 dB bandwidth channel 2

op-mode 3

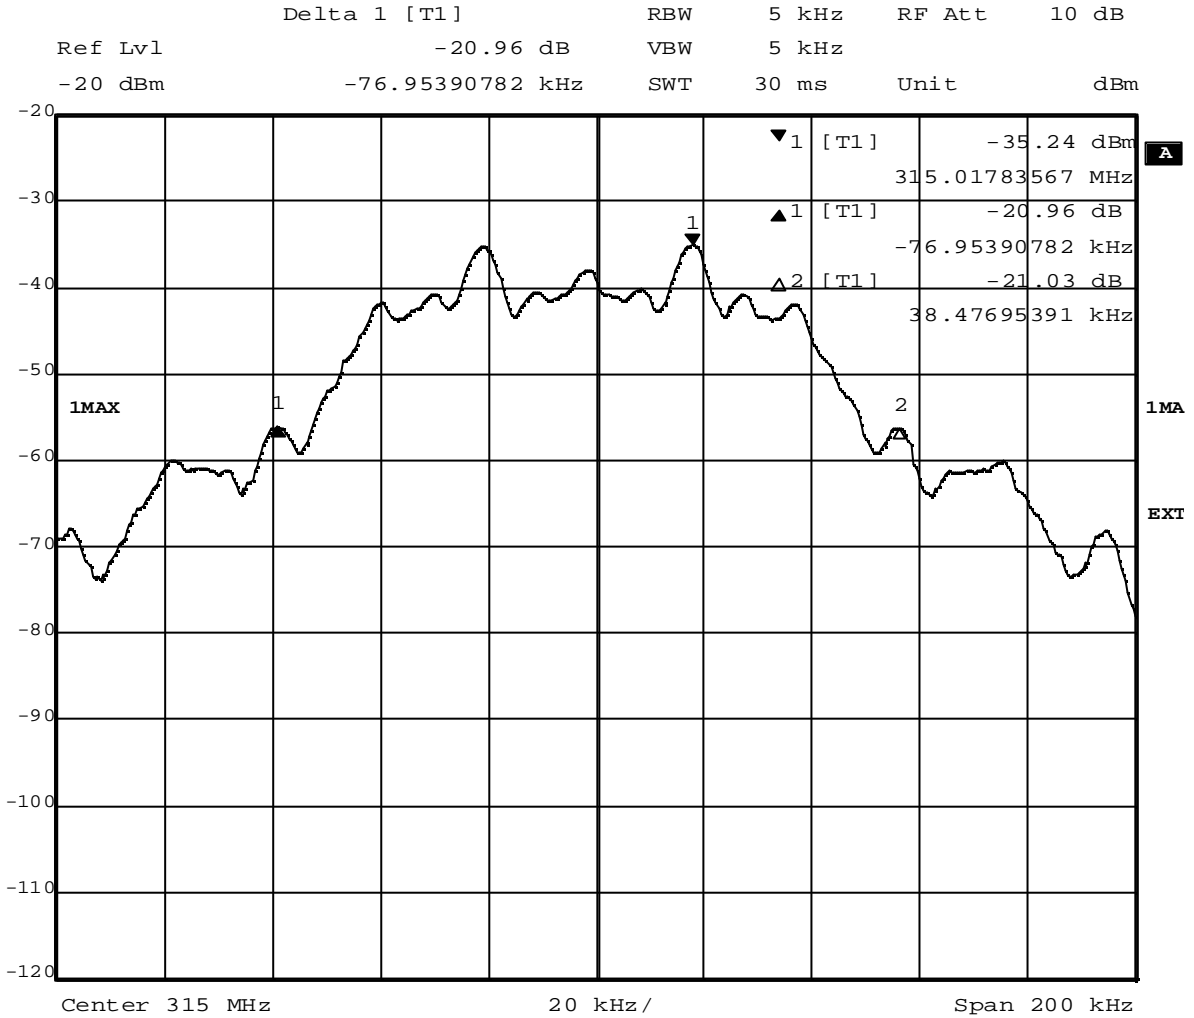


Date: 16.AUG.2010 16:56:39



Op. Mode 99% bandwidth channel 1

op-mode 3

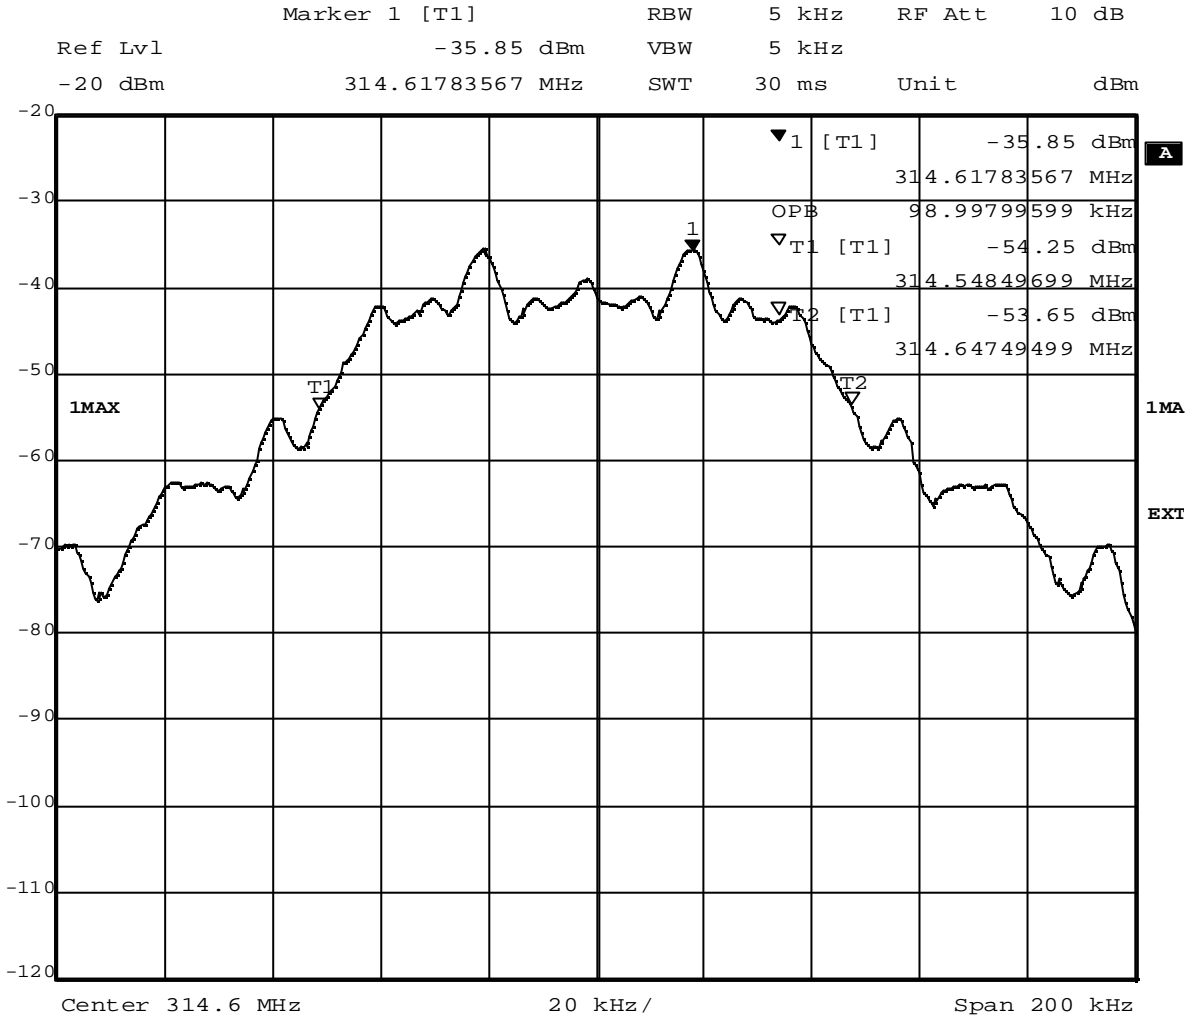


Date: 16.AUG.2010 17:00:30



Op. Mode 99% bandwidth channel 1

op-mode 3

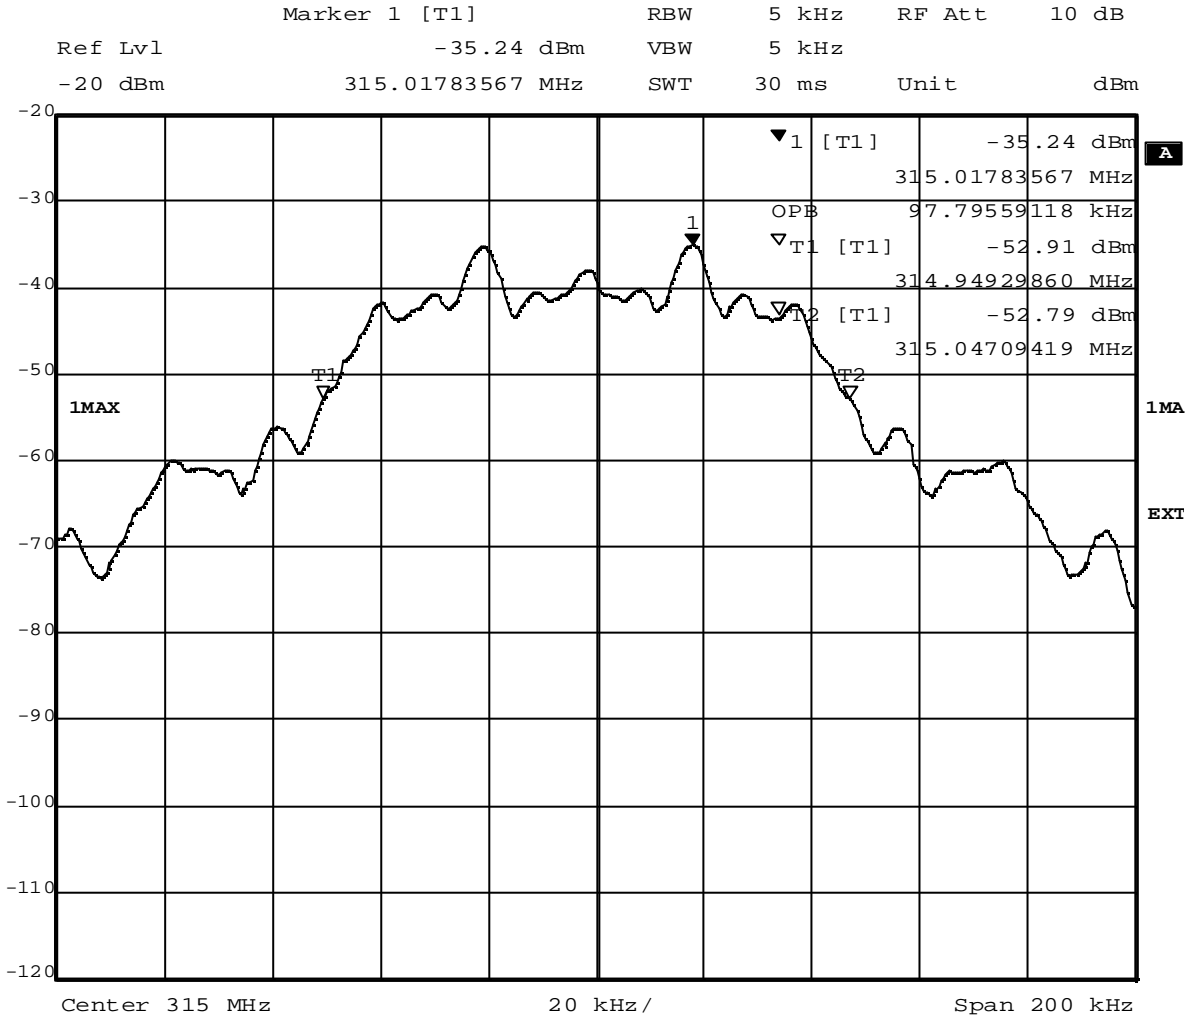


Date: 16.AUG.2010 16:58:49

7.3 Check which channel produces the highest power

Op. Mode rel. output power channel 1 + 2

op-mode 2

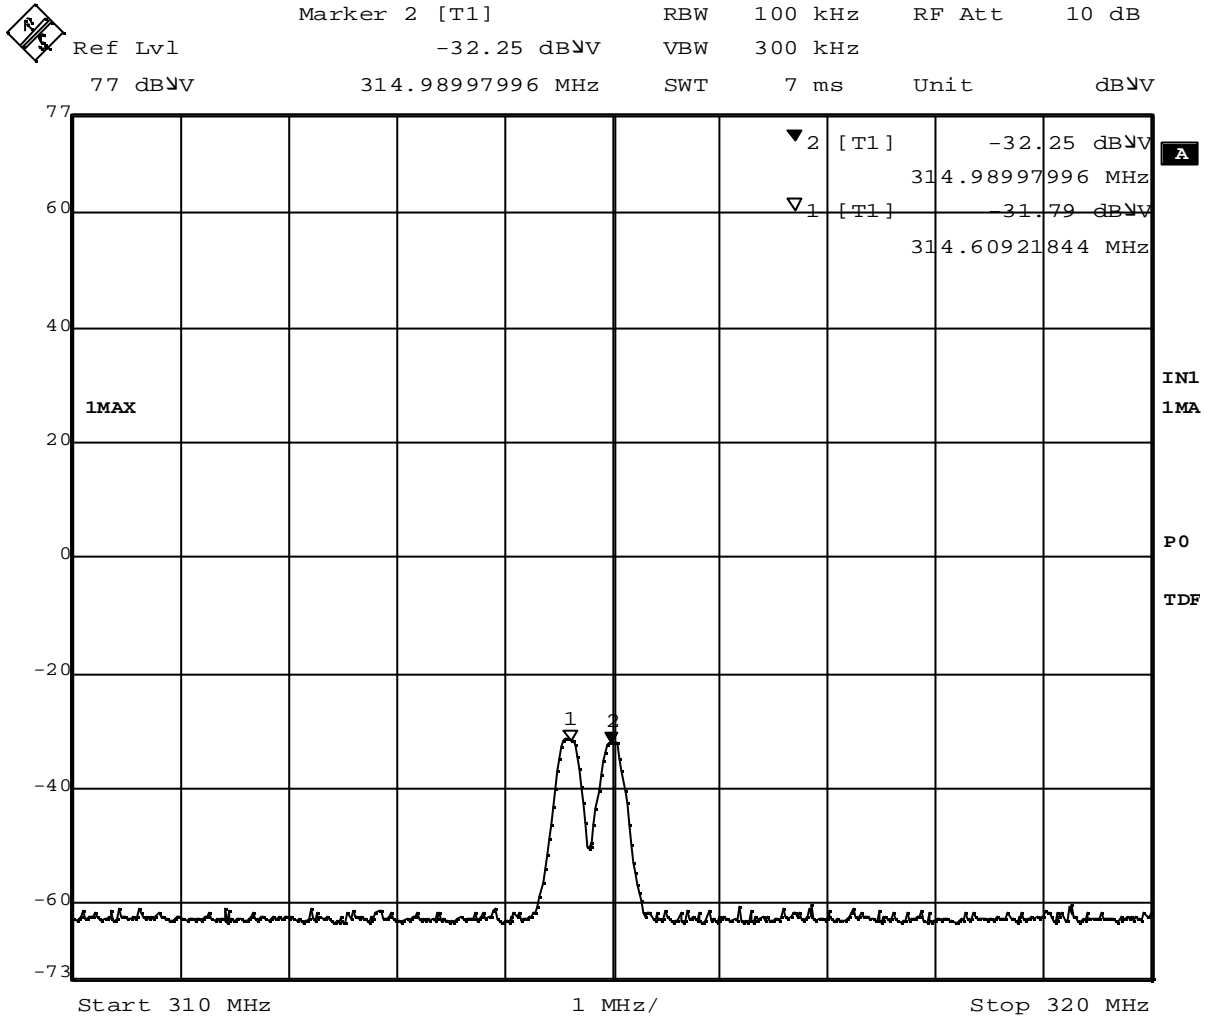

Date: 5.JUL.2010 17:51:12