



FCC PART 15B TEST REPORT

No. 23T04Z80629-025

for

BLU Products,Inc.

Smart phone

Model name: B160V

FCC ID: YHLBLUB160V

with

Hardware Version: V1.0

Software Version: BLU_B160V_V14.0.01.01.01.03_FSec

Issued Date: 2024-01-10

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
23T04Z80629-025	Rev.0	1 st edition	2024-01-10

Note: the latest revision of the test report supersedes all previous version.



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS	11

1. Test Laboratory

1.1. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2023-12-26

Testing End Date: 2023-12-28


1.4. Signature



Wang Xue
(Prepared this test report)



Zhang Ying
(Reviewed this test report)



Zhang Xia
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: BLU Products, Inc.
Address: 8600 NW 36th Street, Suite #300 | Miami, FL 33166
Contact: Zeng wei
Email: zwei@ctasiasz.com
Tel: 305.715.7171
Fax: 305.436.8819

2.2. Manufacturer Information

Company Name: BLU Products, Inc.
Address: 8600 NW 36th Street, Suite #300 | Miami, FL 33166
Contact: Zeng wei
Email: zwei@ctasiasz.com
Tel: 305.715.7171
Fax: 305.436.8819

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart phone
Model Name	B160V
FCC ID:	YHLBLUB160V

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	356197680003658	V1.0	BLU_B160V_V14.0.01.01.01.03_FSec
EUT2	356197680004110	V1.0	BLU_B160V_V14.0.01.01.01.03_FSec

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacture
AE1	Battery1	C846345400P	Huizhou Highpower Technology Co., Ltd.
AE2	Charger1	US-GQ-2000	Dong Guan City GangQi Electronic Co.,Ltd
AE3	USB Cable1	T365-011B-1	Shenzhen Yihuaxing Electronics CO.,Ltd.

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1 + AE1 +AE2+AE3	Charger1+MP3+F Camera +GSM 850 idle
Set.2	EUT1 + AE1 +AE2+AE3	Charger1+R Camera + WCDMA B5 idle
Set.2	EUT1 + AE1 + AE3	USB + LTE B5
Set.4	EUT1 + AE1+ Cable + EUT2	OTG

Note:

Equipment Under Test (EUT) is a model of Smart phone.

It supports

GSM Band 850/1900

UMTS Band FDD Band II(W1900) /FDD Band IV(W1700)/FDD V(W850)

LTE Band FDD Bands 2/4/5/12/13/66

It has MP3, Camera, USB memory, Bluetooth 5.0, GPS and 2.4G, 5G and 5.8G WLAN functions. The EUT supports 802.11b/g/n for 2.4GHz WLAN at 20MHz bandwidth. And it supports 802.11a/n/ac for 5GHz and 5.8GHz WLAN, as for 802.11n, it supports 20MHz and 40MHz bandwidth; for 802.11ac, it supports 20MHz, 40MHz and 80MHz bandwidth.

The device contains receivers which tune and operate between 30MHz-960MHz in the following mode: GSM 850, WCDMA850, LTE Band 5/12/13. All licensed band receivers that tune in the range of 30MHz-960MHz are investigated. Only the worst-case emissions are reported.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2019
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M Ω
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 M Ω
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(huayuan North Road)

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103023	R&S	2024-07-08	13 months
2	LISN	ENV216	101200	R&S	2024-07-04	13 months
3	Test Receiver	ESCI 7	100344	R&S	2024-03-20	13 months
4	EMI Antenna	VULB 9163	01222	SCHWARZBECK	2024-02-28	13 months
5	EMI Antenna	3115	6914	ETS-Lindgren	2024-06-07	13 months
6	Universal Communication Tester	CMW500	150344	R&S	2025-02-03	25 months

Test software information		
Test Item	Software	Version
Radiated Emission	EMC32	V11.50.00
Conducted Emission	EMC32	V8.53.0

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB/OTG mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode, OTG mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode, and is connected to the other device for charging in OTG mode and is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

The model of the PC is M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note : I/O information : Printer – USB, Mouse – PS/2, Keyboard – USB.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.84 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17986.400	45.00	-29.06	46.66	27.40	54.00	9.00	V
17988.100	44.50	-29.06	46.66	26.90	54.00	9.50	H
17994.560	44.50	-29.06	46.66	26.90	54.00	9.50	H
17960.900	44.50	-29.06	46.66	26.90	54.00	9.50	H
17993.200	44.50	-29.06	46.66	26.90	54.00	9.50	H
18000.000	44.40	-29.24	47.00	26.64	54.00	9.60	V

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17940.840	55.70	-28.94	46.66	37.98	74.00	18.30	H
17917.720	54.80	-29.33	46.66	37.47	74.00	19.20	H
17988.440	54.80	-29.06	46.66	37.20	74.00	19.20	H
17924.180	54.70	-29.40	46.66	37.44	74.00	19.30	V
17973.140	54.70	-29.06	46.66	37.10	74.00	19.30	V
17992.520	54.50	-29.06	46.66	36.90	74.00	19.50	V

Measurement results for Set.2:
Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17990.820	44.30	-29.06	46.66	26.70	54.00	9.70	V
17995.920	44.30	-29.06	46.66	26.70	54.00	9.70	H
17999.660	44.30	-29.06	46.66	26.70	54.00	9.70	H
17954.100	44.20	-28.94	46.66	26.48	54.00	9.80	H
17973.480	44.20	-29.06	46.66	26.60	54.00	9.80	V
17988.780	44.10	-29.06	46.66	26.50	54.00	9.90	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17840.540	55.10	-29.34	45.95	38.48	74.00	18.90	V
17987.420	54.90	-29.06	46.66	37.30	74.00	19.10	H
17994.900	54.80	-29.06	46.66	37.20	74.00	19.20	V
17933.020	54.70	-29.40	46.66	37.44	74.00	19.30	V
17988.440	54.60	-29.06	46.66	37.00	74.00	19.40	V
17944.580	54.60	-28.94	46.66	36.88	74.00	19.40	H

Measurement results for Set.3:
USB Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17995.920	45.10	-29.06	46.66	27.50	54.00	8.90	V
17983.000	44.90	-29.06	46.66	27.30	54.00	9.10	H
17991.160	44.80	-29.06	46.66	27.20	54.00	9.20	V
17997.620	44.80	-29.06	46.66	27.20	54.00	9.20	H
17992.520	44.70	-29.06	46.66	27.10	54.00	9.30	V
17991.840	44.70	-29.06	46.66	27.10	54.00	9.30	H

USB Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17993.880	55.70	-29.06	46.66	38.10	74.00	18.30	V
17992.180	55.50	-29.06	46.66	37.90	74.00	18.50	V
17827.960	55.30	-29.68	45.95	39.02	74.00	18.70	V
17902.420	54.90	-29.33	45.95	38.27	74.00	19.10	V
17777.640	54.80	-29.63	45.95	38.47	74.00	19.20	V
17996.260	54.70	-29.06	46.66	37.10	74.00	19.30	H

Measurement results for Set.4:
OTG Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17993.540	44.90	-29.06	46.66	27.30	54.00	9.10	V
17990.480	44.50	-29.06	46.66	26.90	54.00	9.50	H
17990.820	44.40	-29.06	46.66	26.80	54.00	9.60	V
17949.340	44.40	-28.94	46.66	26.68	54.00	9.60	H
17985.380	44.30	-29.06	46.66	26.70	54.00	9.70	H
17995.240	44.30	-29.06	46.66	26.70	54.00	9.70	H

OTG Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17982.660	54.90	-29.06	46.66	37.30	74.00	19.10	H
17957.500	54.70	-28.94	46.66	36.98	74.00	19.30	V
17908.540	54.70	-29.33	45.95	38.07	74.00	19.30	V
17948.660	54.60	-28.94	46.66	36.88	74.00	19.40	V
17997.280	54.60	-29.06	46.66	37.00	74.00	19.40	H
17990.480	54.50	-29.06	46.66	36.90	74.00	19.50	V

Measurement results for Set.1:

Full Spectrum

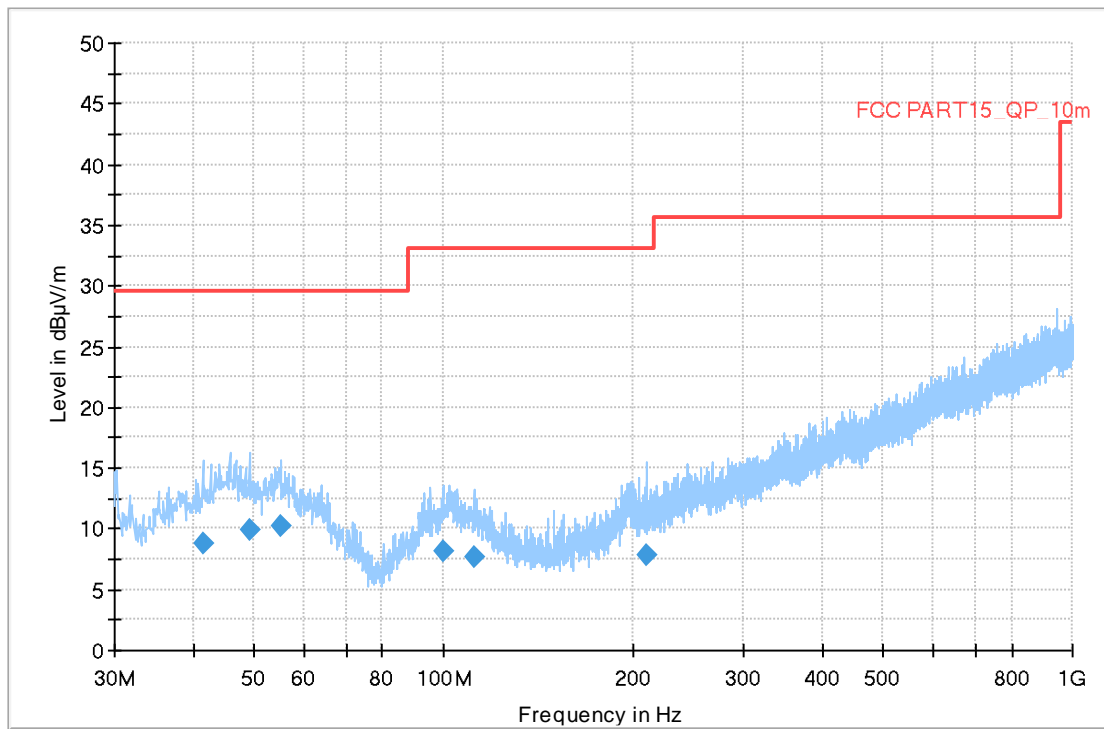


Fig A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
41.446000	8.84	29.54	20.70	120.000	325.0	V	135.0
49.109000	9.93	29.54	19.61	120.000	222.0	V	264.0
55.123000	10.27	29.54	19.27	120.000	181.0	V	283.0
100.034000	8.21	33.06	24.85	120.000	125.0	H	106.0
111.674000	7.67	33.06	25.39	120.000	222.0	H	225.0
210.614000	7.83	33.06	25.23	120.000	125.0	V	137.0

Full Spectrum

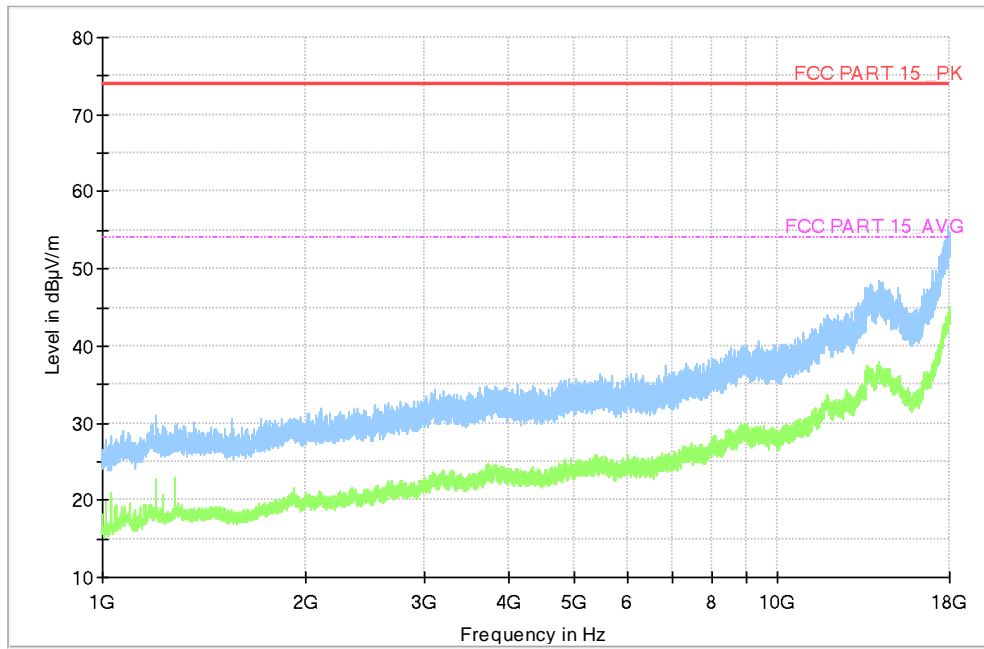


Fig A.2 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.2:

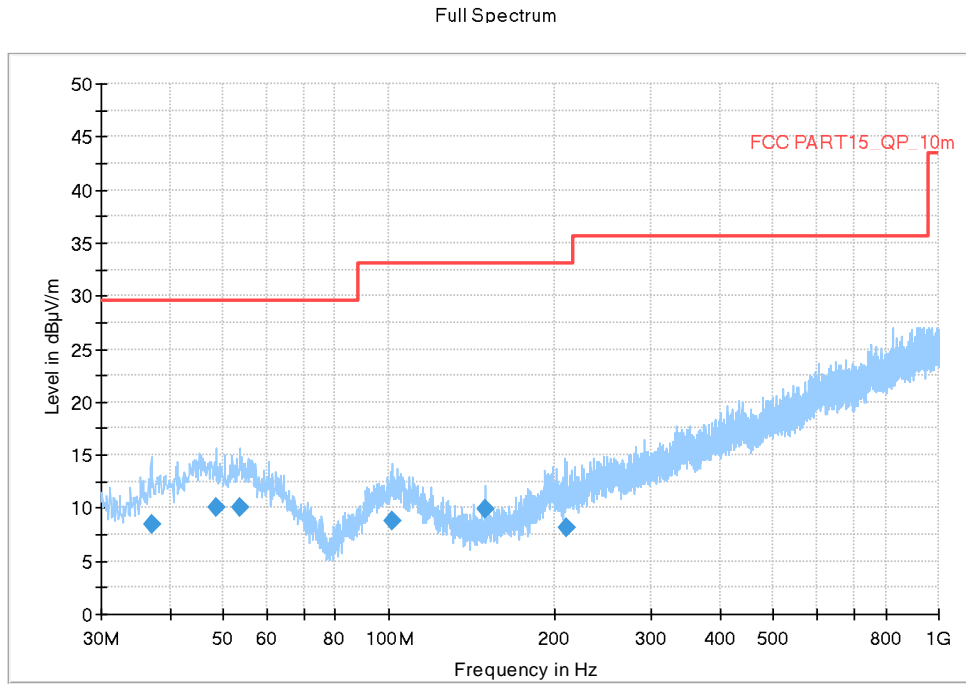


Fig A.3 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
36.984000	8.44	29.54	21.10	120.000	283.0	V	136.0
48.527000	10.06	29.54	19.48	120.000	125.0	V	-45.0
53.668000	10.12	29.54	19.42	120.000	311.0	H	46.0
101.683000	8.75	33.06	24.31	120.000	110.0	V	45.0
149.989000	9.94	33.06	23.12	120.000	200.0	V	26.0
210.420000	8.11	33.06	24.95	120.000	125.0	V	137.0

Full Spectrum

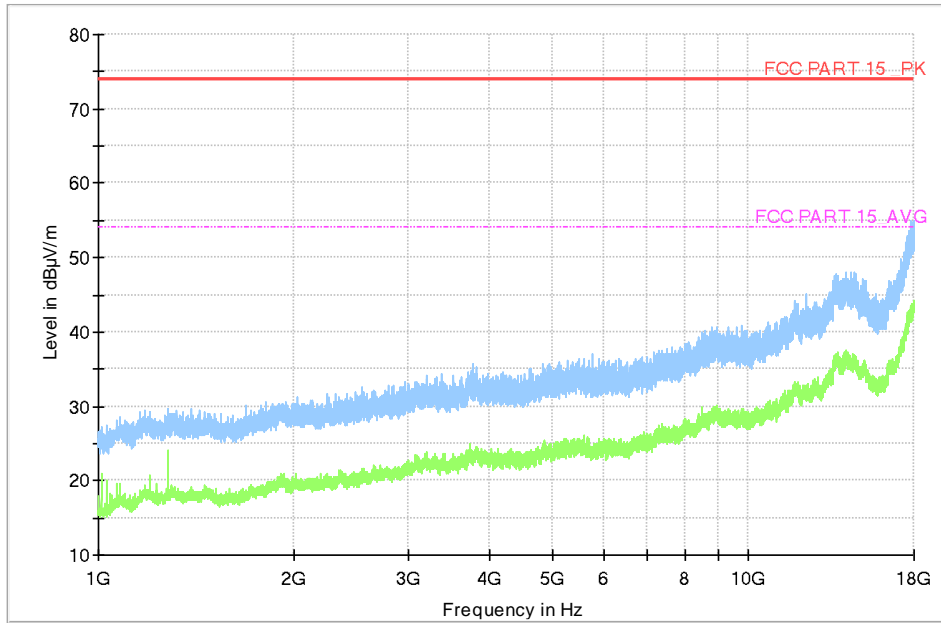
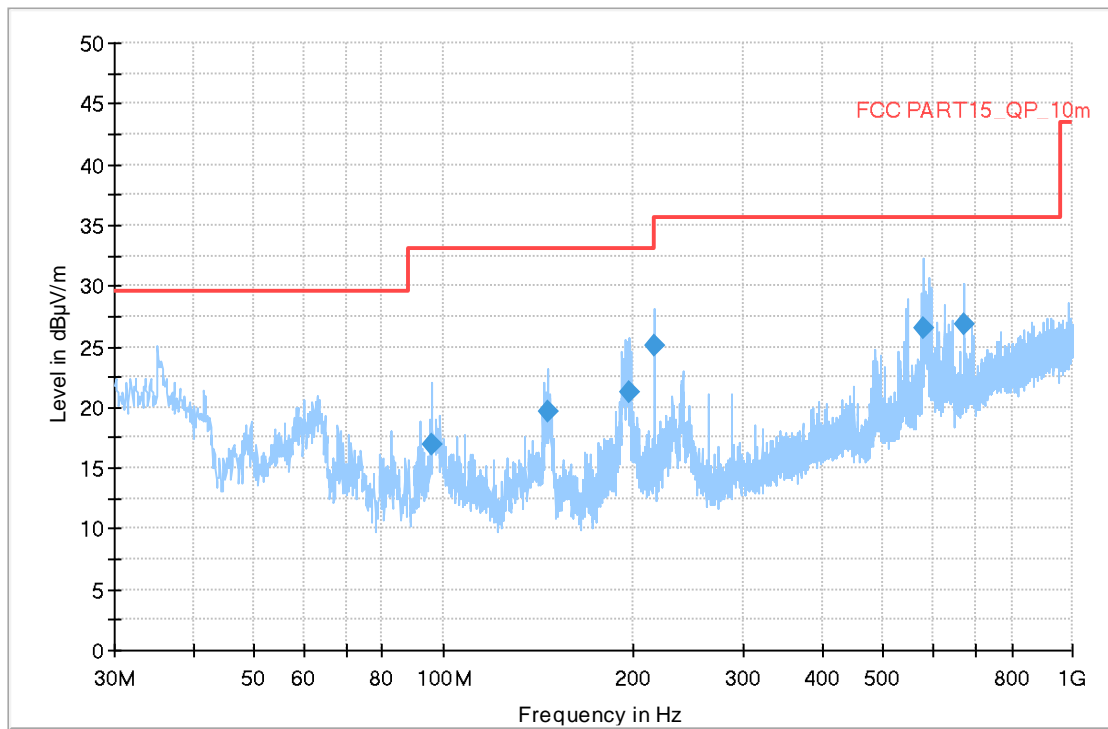


Fig A.4 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.3:

Full Spectrum


Fig A.5 Radiated Emission from 30MHz to 1GHz
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
96.057000	16.85	33.06	16.21	120.000	100.0	V	225.0
146.303000	19.62	33.06	13.44	120.000	100.0	V	-6.0
196.937000	21.21	33.06	11.85	120.000	100.0	V	175.0
215.949000	25.05	33.06	8.01	120.000	100.0	V	155.0
578.729000	26.57	35.56	8.99	120.000	225.0	V	-6.0
672.043000	26.79	35.56	8.77	120.000	100.0	H	174.0

Full Spectrum

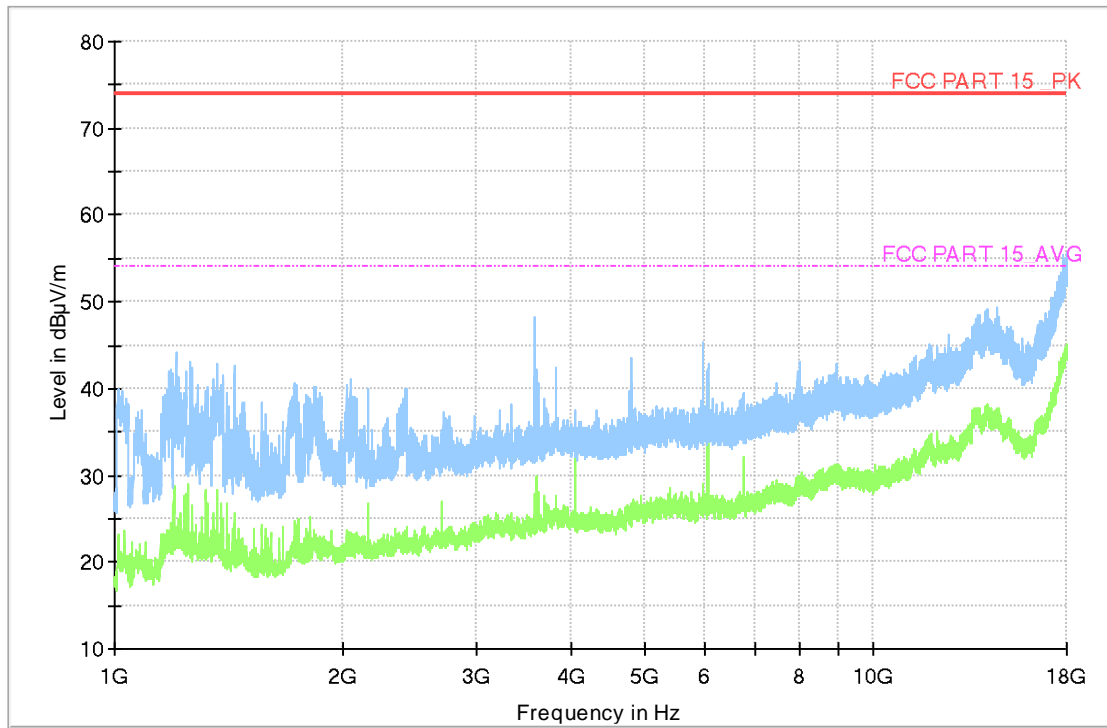


Fig A.6 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.4:

Full Spectrum

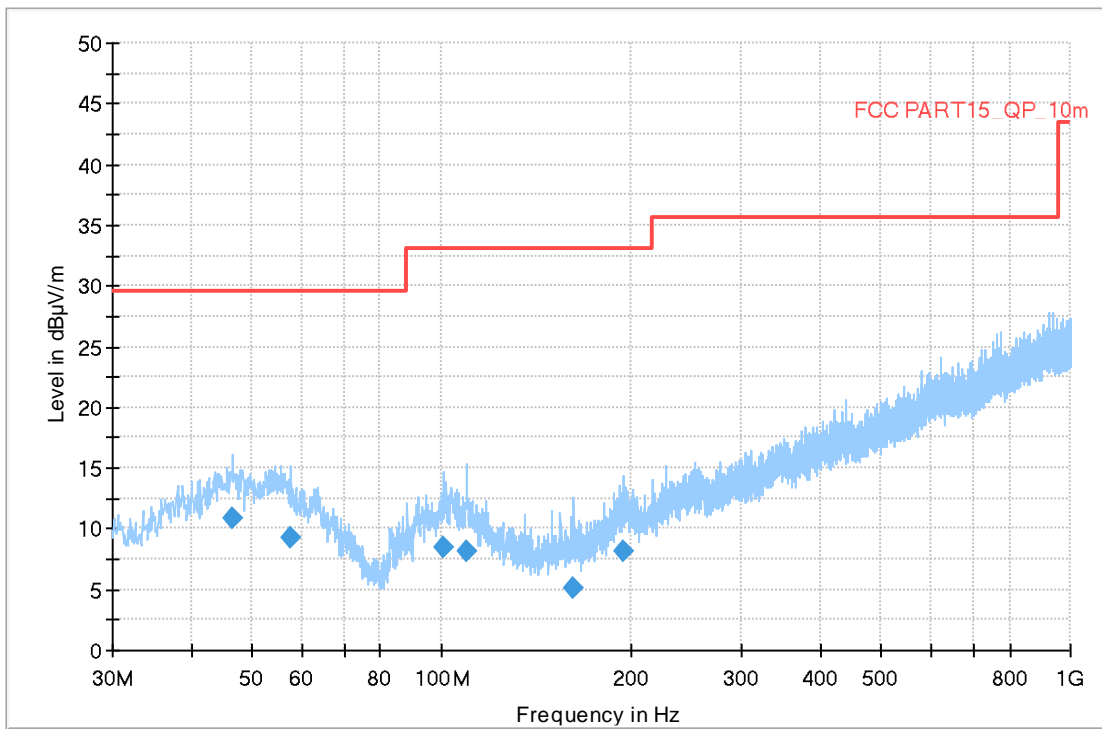


Fig A.7 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
46.587000	10.82	29.54	18.72	120.000	108.0	V	135.0
57.548000	9.25	29.54	20.29	120.000	183.0	V	225.0
100.810000	8.54	33.06	24.52	120.000	225.0	V	45.0
109.928000	8.11	33.06	24.95	120.000	175.0	V	108.0
162.502000	5.16	33.06	27.90	120.000	225.0	H	211.0
194.221000	8.10	33.06	24.96	120.000	225.0	H	315.0

Full Spectrum

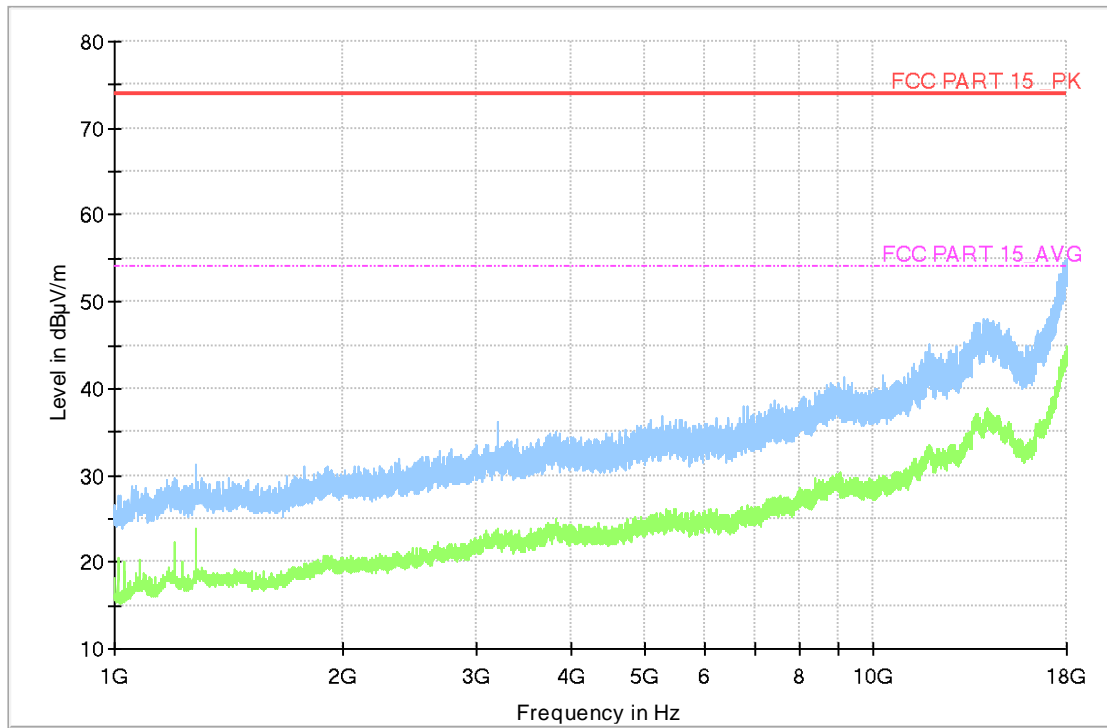


Fig A.8 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note : I/O information : Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.08$ dB, $k=2$.

Charging Mode, Set.1:

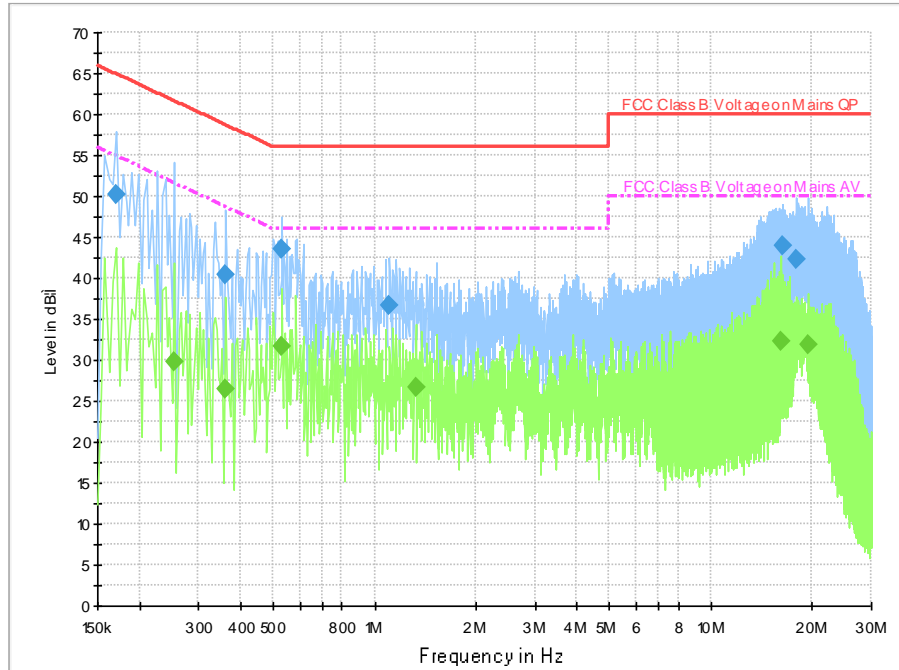


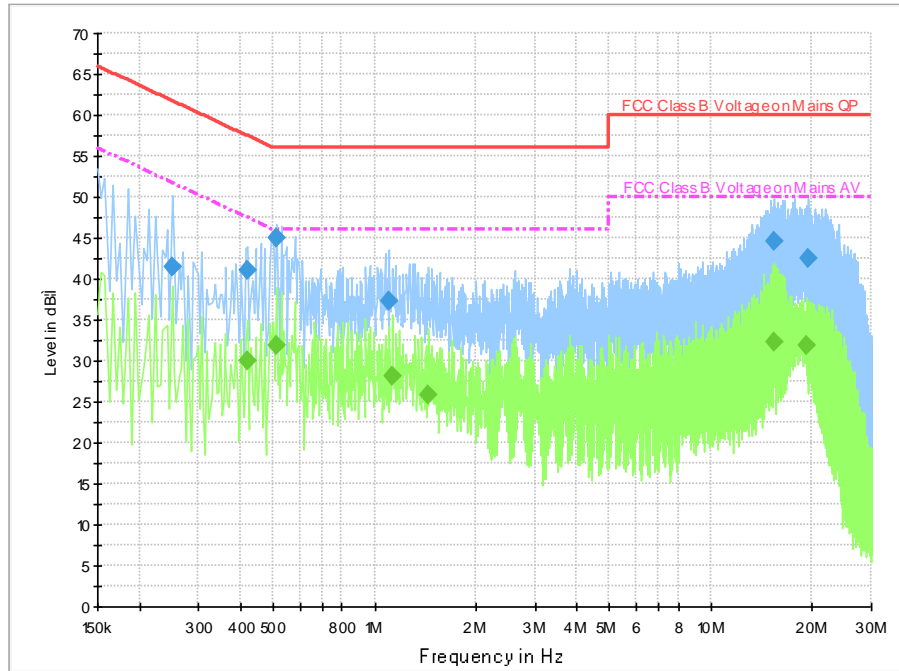
Fig A.9 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.170000	50.1	2000.0	9.000	On	L1	19.7	14.8	65.0	
0.362000	40.3	2000.0	9.000	On	L1	19.7	18.4	58.7	
0.530000	43.6	2000.0	9.000	On	L1	19.7	12.4	56.0	
1.106000	36.7	2000.0	9.000	On	L1	19.6	19.3	56.0	
16.310000	43.9	2000.0	9.000	On	L1	19.7	16.1	60.0	
18.046000	42.3	2000.0	9.000	On	L1	19.7	17.7	60.0	

Final Result 2

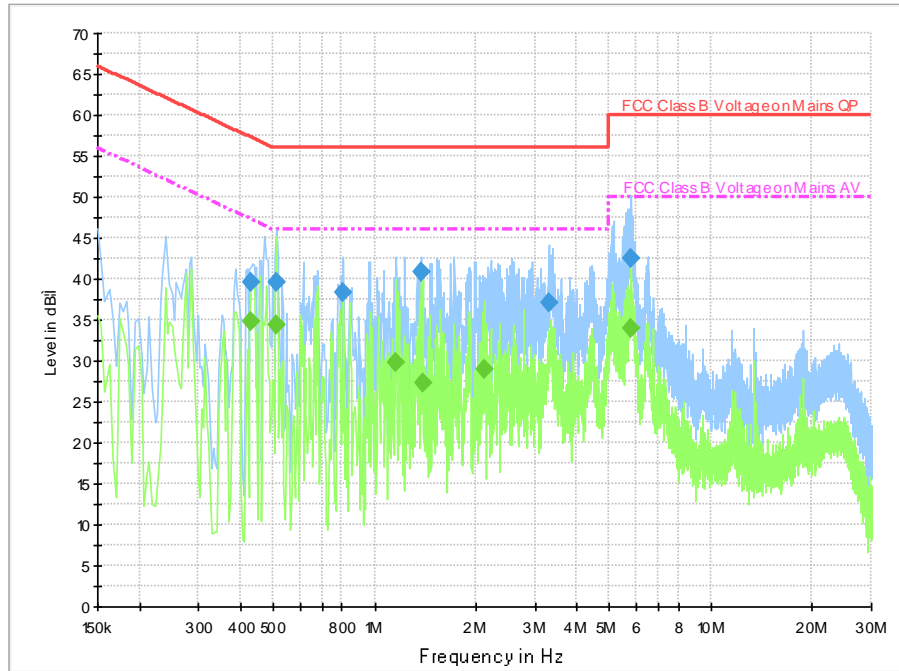
Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.254000	29.8	2000.0	9.000	On	L1	19.7	21.8	51.6	
0.362000	26.5	2000.0	9.000	On	L1	19.7	22.2	48.7	
0.530000	31.6	2000.0	9.000	On	L1	19.7	14.4	46.0	
1.326000	26.7	2000.0	9.000	On	L1	19.6	19.3	46.0	
16.114000	32.3	2000.0	9.000	On	L1	19.7	17.7	50.0	
19.486000	32.0	2000.0	9.000	On	L1	19.7	18.0	50.0	

Charging Mode, Set.2:

Fig A.10 Conducted Emission from 150kHz to 30MHz
Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.250000	41.4	2000.0	9.000	On	L1	19.7	20.3	61.8	
0.418000	41.1	2000.0	9.000	On	L1	19.7	16.4	57.5	
0.510000	45.0	2000.0	9.000	On	L1	19.7	11.0	56.0	
1.102000	37.4	2000.0	9.000	On	L1	19.6	18.6	56.0	
15.358000	44.6	2000.0	9.000	On	L1	19.7	15.4	60.0	
19.546000	42.6	2000.0	9.000	On	L1	19.8	17.4	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.418000	30.0	2000.0	9.000	On	L1	19.7	17.4	47.5	
0.510000	31.8	2000.0	9.000	On	L1	19.7	14.2	46.0	
1.130000	28.2	2000.0	9.000	On	L1	19.6	17.8	46.0	
1.450000	25.9	2000.0	9.000	On	L1	19.7	20.1	46.0	
15.406000	32.4	2000.0	9.000	On	L1	19.7	17.6	50.0	
19.246000	32.0	2000.0	9.000	On	L1	19.7	18.0	50.0	

USB Mode, Set.3:

Fig A.11 Conducted Emission from 150kHz to 30MHz
Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.430000	39.5	2000.0	9.000	On	N	19.7	17.8	57.3	
0.510000	39.6	2000.0	9.000	On	L1	19.7	16.4	56.0	
0.806000	38.4	2000.0	9.000	On	L1	19.7	17.6	56.0	
1.370000	40.8	2000.0	9.000	On	L1	19.6	15.2	56.0	
3.290000	37.0	2000.0	9.000	On	N	19.6	19.0	56.0	
5.770000	42.4	2000.0	9.000	On	L1	19.6	17.6	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.430000	34.9	2000.0	9.000	On	N	19.7	12.4	47.3	
0.510000	34.4	2000.0	9.000	On	L1	19.7	11.6	46.0	
1.162000	29.9	2000.0	9.000	On	L1	19.7	16.1	46.0	
1.386000	27.3	2000.0	9.000	On	N	19.6	18.7	46.0	
2.126000	29.0	2000.0	9.000	On	L1	19.6	17.0	46.0	
5.770000	33.9	2000.0	9.000	On	L1	19.6	16.1	50.0	

END OF REPORT