

# RF TEST REPORT



Report No.: 17070456-FCC-R1-V1

Supersede Report No.: N/A

Applicant	BLU Products, Inc.	
Product Name	Mobile Phone	
Model No.	BLU C5	
Serial No.	N/A	
Test Standard	FCC Part 22(H):2016 ;FCC Part 24(E):2016; FCC Part 27:2016; ANSI/TIA-603-D: 2010	
Test Date	July 27 to August 13, 2017	
Issue Date	August 21, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070456-FCC-R1-V1
Page	3 of 104

This page has been left blank intentionally.

# CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION .....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	7
5. TEST SUMMARY .....	10
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	11
6.1 RF EXPOSURE (SAR) .....	11
6.2 RF OUTPUT POWER.....	12
6.3 PEAK-AVERAGE RATIO.....	25
6.4 OCCUPIED BANDWIDTH .....	30
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....	45
6.6 SPURIOUS RADIATED EMISSIONS.....	61
6.7 BAND EDGE .....	68
6.8 FREQUENCY STABILITY.....	82
ANNEX A. TEST INSTRUMENT .....	87
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	89
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	100
ANNEX C.II. EUT OPERATING CONKITIONS .....	102
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	103
ANNEX E. DECLARATION OF SIMILARITY .....	104

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070456-FCC-R1	NONE	Original	August 14, 2017
17070456-FCC-R1-V1	V1	P8 Changed the GPRS/EGPRS Multi-slot class data	August 21, 2017

## 2. Customer information

Applicant Name	BLU Products, Inc.
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products, Inc.
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

## 3. Test site information

### Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

### Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	EZ_EMG(ver.lcp-03A1)

Test Report	17070456-FCC-R1-V1
Page	6 of 104

---

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

## 4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	BLU C5
Serial Model:	N/A
Date EUT received:	July 26, 2017
Test Date(s):	July 27 to August 13, 2017
Equipment Category :	PCE
Antenna Gain:	GSM850: -2.0dBi PCS1900: -1.2dBi UMTS-FDD Band V: -2.0dBi UMTS-FDD Band IV: -1.5dBi UMTS-FDD Band II: -2.0dBi WIFI: 0.5dBi Bluetooth/BLE:0.5dBi GPS: 0.5dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz

WIFI: 802.11b/g/n(20M): 2412-2462 MHz  
 WIFI: 802.11n(40M): 2422-2452 MHz  
 Bluetooth& BLE: 2402-2480 MHz  
 GPS: 1575.42 MHz

GSM Voce:GSM850: 32.15 dBm  
 PCS1900: 28.82 dBm

GPRS:GSM850: 32.17 dBm  
 PCS1900: 28.81 dBm

EGPRS(MCS1):GSM850: 32.07 dBm  
 PCS1900: 28.88 dBm

EGPRS(MCS5):GSM850: 26.27 dBm  
 PCS1900: 24.99 dBm

Maximum Conducted  
 AV Power to Antenna:

RMC:UMTS-FDD Band V: 22.23 dBm  
 UMTS-FDD Band II: 22.13 dBm  
 UMTS-FDD Band IV: 22.26 dBm  
 HSDPA:UMTS-FDD Band V: 21.24 dBm  
 UMTS-FDD Band II: 21.25 dBm  
 UMTS-FDD Band IV: 21.29 dBm  
 HSUPA:UMTS-FDD Band V: 21.19 dBm  
 UMTS-FDD Band II: 21.24 dBm  
 UMTS-FDD Band IV: 21.22 dBm

GSM Voce:GSM850: 28.00 dBm / ERP  
 PCS1900: 27.62 dBm / EIRP  
 GPRS:GSM850: 28.02 dBm / ERP  
 PCS1900: 27.61 dBm / EIRP  
 EGPRS(MCS5):GSM850: 22.12 dBm / ERP  
 PCS1900: 23.79 dBm / EIRP

ERP/EIRP:

RMC:UMTS-FDD Band V: 18.08 dBm / ERP  
 UMTS-FDD Band II: 20.13 dBm / EIRP  
 UMTS-FDD Band IV: 20.76 dBm / EIRP  
 HSDPA:UMTS-FDD Band V: 17.09 dBm / ERP  
 UMTS-FDD Band II: 19.25 dBm / EIRP  
 UMTS-FDD Band IV: 19.79 dBm / EIRP  
 HSUPA:UMTS-FDD Band V: 17.04 dBm / ERP  
 UMTS-FDD Band II: 19.24 dBm / EIRP



UMTS-FDD Band IV: 19.72 dBm / EIRP

Number of Channels: GSM 850: 124CH  
 PCS1900: 299CH  
 UMTS-FDD Band V: 102CH  
 UMTS-FDD Band IV: 202CH  
 UMTS-FDD Band II: 277CH  
 WIFI :802.11b/g/n(20M): 11CH  
 WIFI :802.11n(40M): 7CH  
 Bluetooth: 79CH  
 BLE: 40CH  
 GPS:1CH

Port: USB Port, Earphone Port

Adapter:  
 Model: US-WW-1001  
 Input: AC100-240V~50/60Hz,0.2A  
 Output: DC 5.0V,1000mA

Input Power: Battery:  
 Model: C775840200L  
 Spec: 3.8V, 2000mAh, 7.60Wh

Trade Name : BLU

GPRS/EGPRS Multi-slot class 8/10/11/12

FCC ID: YHLBLUC5

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10) ; § 27.50(d.4)	RF Output Power	Compliance
§ 24.232 (d) ; § 27.50(d)	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238; § 27.53(a.5)	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a); § 27.53(h)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a); § 27.53(h)	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a); § 27.53(h)	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; § 27.5(h); § 27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

## 6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

### 6.1 RF Exposure (SAR)

Test Result: Pass

The EUT is a portable device, thus requires SAR evaluation;


Please refer to RF Exposure Evaluation Report: 17070456-FCC-H.

## 6.2 RF Output Power

Temperature	23 °C
Relative Humidity	54%
Atmospheric Pressure	1014mbar
Test date :	August 11, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	<input checked="" type="checkbox"/>
§24.232 (c)	b)	EIRP:33dBm	<input checked="" type="checkbox"/>
§27.50 (c)	c)	EIRP: 30dBm	<input checked="" type="checkbox"/>

Test Setup	 <p style="text-align: center;">Base Station                      EUT</p>
------------	---

Test Procedure	<p>For Conducted Power:</p> <ul style="list-style-type: none"> <li>- The transmitter output port was connected to base station.</li> <li>- Set EUT at maximum power through base station.</li> <li>- Select lowest, middle, and highest channels for each band and different test mode.</li> </ul> <p>For ERP/EIRP:</p> <p>According with KDB 971168 v02r02</p> <ul style="list-style-type: none"> <li>- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.</li> <li>- The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.</li> <li>- The frequency range up to tenth harmonic of the fundamental</li> </ul>
----------------	---

	<p>frequency was investigated.</p> <ul style="list-style-type: none"> <li>- Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.</li> <li>- Spurious emissions in dB = <math>10 \log (\text{TX power in Watts}/0.001)</math> – the absolute level</li> <li>- Spurious attenuation limit in dB = <math>43 + 10 \text{ Log}_{10} (\text{power out in Watts})</math>.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

## Conducted Power

### GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	32.12	32.14	<b>32.15</b>	32±1	<b>28.82</b>	28.72	28.48	28±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	32.14	32.16	<b>32.17</b>	32±1	<b>28.81</b>	28.67	28.4	28±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	31.3	31.33	31.38	31±1	28.22	27.85	27.62	28±1
GPRS Multi-Slot Class 12 (3 uplink) GMSK	29.45	29.46	29.38	29±1	26.25	26.01	25.86	26±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	28.15	28.18	28.2	28±1	25.14	24.72	24.54	25±1
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	32.06	<b>32.07</b>	32.06	32±1	<b>28.88</b>	28.76	28.51	28±1
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	31.21	31.25	31.21	31±1	28.09	28.01	27.84	28±1
EGPRS Multi-Slot Class 12 (3 uplink) GMSK MCS1	29.34	29.35	29.34	29±1	26.39	26.15	25.99	26±1
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	28.15	28.18	28.12	28±1	25	24.86	24.7	25±1
EGPRS Multi-Slot Class 8 (1 uplink) 8PSK MCS5	26.2	<b>26.27</b>	26.14	27±1	<b>24.99</b>	24.86	24.75	25±1

EGPRS Multi-Slot Class 10 (2 uplink) 8PSK MCS5	25.36	24.91	25.02	25±1	23.61	23.24	23.05	23±1
EGPRS Multi-Slot Class 12 (3 uplink) 8PSK MCS5	22.91	22.59	22.64	22±1	21.6	21.53	21.44	21±1
EGPRS Multi-Slot Class 12 (4 uplink) 8PSK MCS5	21.59	21.63	21.54	21±1	19.9	19.75	19.53	20±1

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

EGPRS, MCS5 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

## UMTS Mode:

### UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	<b>22.23</b>	22±1
	4175	835	22.22	22±1
	4233	846.6	22.10	22±1
HSDPA Subtest1	4132	826.4	<b>21.24</b>	21±1
	4175	835	21.06	21±1
	4233	846.6	20.98	21±1
HSDPA Subtest2	4132	826.4	21.23	21±1
	4175	835	21.1	21±1
	4233	846.6	21.17	21±1
HSDPA Subtest3	4132	826.4	20.97	21±1
	4175	835	21.11	21±1
	4233	846.6	21.03	21±1
HSDPA Subtest4	4132	826.4	20.79	21±1
	4175	835	21.23	21±1
	4233	846.6	21.16	21±1
HSUPA Subtest1	4132	826.4	21.15	21±1
	4175	835	<b>21.19</b>	21±1
	4233	846.6	20.95	21±1
HSUPA Subtest2	4132	826.4	21.05	21±1
	4175	835	21.14	21±1
	4233	846.6	20.99	21±1
HSUPA Subtest3	4132	826.4	21.13	21±1
	4175	835	20.97	21±1
	4233	846.6	21.11	21±1
HSUPA Subtest4	4132	826.4	21.15	21±1
	4175	835	20.99	21±1
	4233	846.6	21.14	21±1
HSUPA Subtest5	4132	826.4	21.17	21±1
	4175	835	21.11	21±1
	4233	846.6	20.94	21±1



## UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	<b>22.13</b>	22±1
	9400	1880	22.02	22±1
	9538	1907.6	21.96	22±1
HSDPA Subtest1	9262	1852.4	21.13	21±1
	9400	1880	21.06	21±1
	9538	1907.6	21.05	21±1
HSDPA Subtest2	9262	1852.4	<b>21.25</b>	21±1
	9400	1880	20.98	21±1
	9538	1907.6	20.86	21±1
HSDPA Subtest3	9262	1852.4	21.11	21±1
	9400	1880	21.16	21±1
	9538	1907.6	21.04	21±1
HSDPA Subtest4	9262	1852.4	20.97	21±1
	9400	1880	20.99	21±1
	9538	1907.6	21	21±1
HSUPA Subtest1	9262	1852.4	20.96	21±1
	9400	1880	21.2	21±1
	9538	1907.6	21.18	21±1
HSUPA Subtest2	9262	1852.4	20.89	21±1
	9400	1880	21.17	21±1
	9538	1907.6	21.15	21±1
HSUPA Subtest3	9262	1852.4	20.99	21±1
	9400	1880	21.03	21±1
	9538	1907.6	21.18	21±1
HSUPA Subtest4	9262	1852.4	20.95	21±1
	9400	1880	20.97	21±1
	9538	1907.6	21.23	21±1
HSUPA Subtest5	9262	1852.4	<b>21.24</b>	21±1
	9400	1880	20.96	21±1
	9538	1907.6	21.08	21±1

### UMTS-FDD Band IV

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	1313	1712.6	22.22	22±1
	1413	1732.6	<b>22.26</b>	22±1
	1512	1752.4	21.62	22±1
HSDPA Subtest1	1313	1712.6	21.23	21±1
	1413	1732.6	<b>21.29</b>	21±1
	1512	1752.4	20.64	21±1
HSDPA Subtest2	1313	1712.6	21.2	21±1
	1413	1732.6	21.24	21±1
	1512	1752.4	20.75	21±1
HSDPA Subtest3	1313	1712.6	21.15	21±1
	1413	1732.6	21.25	21±1
	1512	1752.4	20.69	21±1
HSDPA Subtest4	1313	1712.6	21.09	21±1
	1413	1732.6	21.14	21±1
	1512	1752.4	20.74	21±1
HSUPA Subtest1	1313	1712.6	21.13	21±1
	1413	1732.6	21.2	21±1
	1512	1752.4	20.84	21±1
HSUPA Subtest2	1313	1712.6	21.09	21±1
	1413	1732.6	21.16	21±1
	1512	1752.4	20.54	21±1
HSUPA Subtest3	1313	1712.6	<b>21.22</b>	21±1
	1413	1732.6	21.14	21±1
	1512	1752.4	20.84	21±1
HSUPA Subtest4	1313	1712.6	21.03	21±1
	1413	1732.6	21.11	21±1
	1512	1752.4	20.69	21±1
HSUPA Subtest5	1313	1712.6	21.05	21±1
	1413	1732.6	21.16	21±1
	1512	1752.4	20.74	21±1

## ERP & EIRP

### GSM Voice

#### ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	21.7	V	6.8	0.53	27.97	38.45
824.2	20.92	H	6.8	0.53	27.19	38.45
836.6	21.72	V	6.8	0.53	27.99	38.45
836.6	20.36	H	6.8	0.53	26.63	38.45
848.8	21.63	V	6.9	0.53	<b>28</b>	38.45
848.8	20.53	H	6.9	0.53	26.9	38.45

#### EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	20.59	V	7.88	0.85	<b>27.62</b>	33
1850.2	19.09	H	7.88	0.85	26.12	33
1880	20.49	V	7.88	0.85	27.52	33
1880	19.64	H	7.88	0.85	26.67	33
1909.8	20.27	V	7.86	0.85	27.28	33
1909.8	19.49	H	7.86	0.85	26.5	33

**GPRS:**

**ERP for Cellular Band (Part 22H)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	21.72	V	6.8	0.53	27.99	38.45
824.2	20.01	H	6.8	0.53	26.28	38.45
836.6	21.74	V	6.8	0.53	28.01	38.45
836.6	20.57	H	6.8	0.53	26.84	38.45
848.8	21.65	V	6.9	0.53	<b>28.02</b>	38.45
848.8	19.97	H	6.9	0.53	26.34	38.45

**EIRP for PCS Band (Part 24E)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	20.58	V	7.88	0.85	<b>27.61</b>	33
1850.2	19.32	H	7.88	0.85	26.35	33
1880	20.44	V	7.88	0.85	27.47	33
1880	19.02	H	7.88	0.85	26.05	33
1909.8	20.19	V	7.86	0.85	27.2	33
1909.8	18.92	H	7.86	0.85	25.93	33

**EGPRS (MCS5):**

**ERP for Cellular Band (Part 22H)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	15.78	V	6.8	0.53	22.05	38.45
824.2	14.56	H	6.8	0.53	20.83	38.45
836.6	15.85	V	6.8	0.53	<b>22.12</b>	38.45
836.6	14.75	H	6.8	0.53	21.02	38.45
848.8	15.62	V	6.9	0.53	21.99	38.45
848.8	14.16	H	6.9	0.53	20.53	38.45

**EIRP for PCS Band (Part 24E)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	16.76	V	7.88	0.85	<b>23.79</b>	33
1850.2	15.16	H	7.88	0.85	22.19	33
1880	16.63	V	7.88	0.85	23.66	33
1880	14.84	H	7.88	0.85	21.87	33
1909.8	16.54	V	7.86	0.85	23.55	33
1909.8	15.55	H	7.86	0.85	22.56	33

## RMC

### ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	11.81	V	6.8	0.53	<b>18.08</b>	38.45
826.4	9.94	H	6.8	0.53	16.21	38.45
835	11.8	V	6.8	0.53	18.07	38.45
835	10.54	H	6.8	0.53	16.81	38.45
846.6	11.58	V	6.9	0.53	17.95	38.45
846.6	9.87	H	6.9	0.53	16.24	38.45

### EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	13.1	V	7.88	0.85	<b>20.13</b>	33
1852.4	12.3	H	7.88	0.85	19.33	33
1880	12.99	V	7.88	0.85	20.02	33
1880	11.46	H	7.88	0.85	18.49	33
1907.6	12.95	V	7.86	0.85	19.96	33
1907.6	11.09	H	7.86	0.85	18.1	33

### EIRP for UMTS-FDD Band IV (Part 27H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	13.46	V	7.95	0.69	20.72	30
1712.4	12.42	H	7.95	0.69	19.68	30
1740	13.52	V	7.93	0.69	<b>20.76</b>	30
1740	11.56	H	7.93	0.69	18.8	30
1752.6	12.89	V	7.92	0.69	20.12	30
1752.6	11.07	H	7.92	0.69	18.3	30

## HSDPA

### ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	10.82	V	6.8	0.53	<b>17.09</b>	38.45
826.4	9.14	H	6.8	0.53	15.41	38.45
835	10.81	V	6.8	0.53	17.08	38.45
835	9.24	H	6.8	0.53	15.51	38.45
846.6	10.65	V	6.9	0.53	17.02	38.45
846.6	8.85	H	6.9	0.53	15.22	38.45

### EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	12.22	V	7.88	0.85	<b>19.25</b>	33
1852.4	10.96	H	7.88	0.85	17.99	33
1880	12.13	V	7.88	0.85	19.16	33
1880	11.37	H	7.88	0.85	18.4	33
1907.6	12.04	V	7.86	0.85	19.05	33
1907.6	11.16	H	7.86	0.85	18.17	33

### EIRP for UMTS-FDD Band IV (Part 27H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	12.47	V	7.95	0.69	19.73	30
1712.4	11.66	H	7.95	0.69	18.92	30
1740	12.55	V	7.93	0.69	<b>19.79</b>	30
1740	11.31	H	7.93	0.69	18.55	30
1752.6	12.02	V	7.92	0.69	19.25	30
1752.6	10.68	H	7.92	0.69	17.91	30

## HSUPA

### ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	10.75	V	6.8	0.53	17.02	38.45
826.4	9.68	H	6.8	0.53	15.95	38.45
835	10.77	V	6.8	0.53	<b>17.04</b>	38.45
835	9.89	H	6.8	0.53	16.16	38.45
846.6	10.62	V	6.9	0.53	16.99	38.45
846.6	9.27	H	6.9	0.53	15.64	38.45

### EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	12.21	V	7.88	0.85	<b>19.24</b>	33
1852.4	10.23	H	7.88	0.85	17.26	33
1880	12.17	V	7.88	0.85	19.2	33
1880	10.68	H	7.88	0.85	17.71	33
1907.6	12.17	V	7.86	0.85	19.18	33
1907.6	11.35	H	7.86	0.85	18.36	33

### EIRP for UMTS-FDD Band IV (Part 27H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	12.46	V	7.95	0.69	<b>19.72</b>	30
1712.4	10.94	H	7.95	0.69	18.2	30
1740	12.46	V	7.93	0.69	19.7	30
1740	10.89	H	7.93	0.69	18.13	30
1752.6	12.43	V	7.92	0.69	19.66	30
1752.6	10.83	H	7.92	0.69	18.06	30




### 6.3 Peak-Average Ratio

Temperature	23°C
Relative Humidity	54%
Atmospheric Pressure	1014mbar
Test date :	August 11, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d) § 27.50(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	<input checked="" type="checkbox"/>

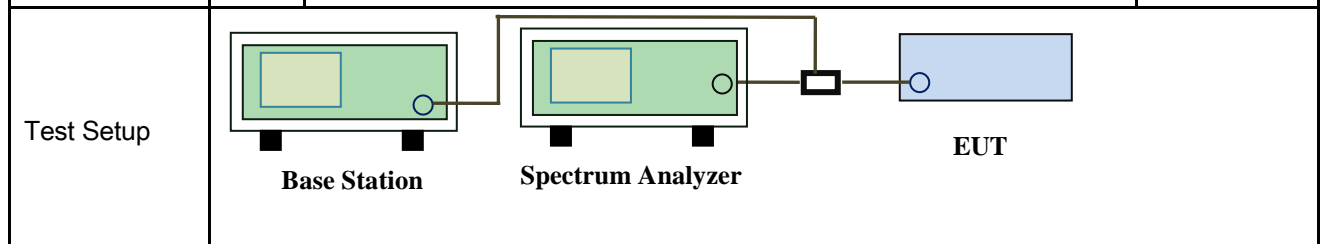

Test Procedure	<p>According with KDB 971168 v02r02</p> <p><b>5.7.2 Alternate procedure for PAPR</b></p> <p><b>5.1.2 Peak power measurements with a peak power meter</b></p> <p>The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.</p> <p><b>5.2.3 Average power measurement with average power meter</b></p> <p>As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions</p> <p>If the EUT can be configured to transmit continuously (i.e., the burst duty cycle <math>\geq 98\%</math>) and at all times the EUT is transmitting at its maximum output</p>
----------------	---

	<p>power level, then a conventional wide-band RF power meter can be used.</p> <p>If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle &lt; 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than <math>\pm 2</math> percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to <math>10\log(1/\text{duty cycle})</math></p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**Test Data**     Yes                       N/A  
**Test Plot**     Yes (See below)             N/A

**GSM : GSM 1900 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	29.97	28.82	1.15
1880	30.12	28.72	1.4
1909.8	30.26	28.48	1.78

**GPRS 1900 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.02	28.81	1.21
1880	29.84	28.67	1.17
1909.8	29.67	28.4	1.27

**EGPRS (MCS5) 1900 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	26.12	24.99	1.13
1880	25.94	24.86	1.08
1909.8	25.86	24.75	1.11

**RMC : UMTS-FDD Band II PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.85	22.13	1.72
1880	23.74	22.02	1.72
1907.6	23.56	21.96	1.6

**UMTS-FDD Band IV PK-AV POWER (PART 27H)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	24.16	22.22	1.94
1732.6	24.31	22.26	2.05
1752.4	23.16	21.62	1.54

**HSUPA : UMTS-FDD Band II PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.15	21.13	2.02
1880	22.68	21.06	1.62
1907.6	22.48	21.05	1.43

**UMTS-FDD Band IV PK-AV POWER (PART 27H)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	22.68	21.23	1.45
1732.6	23.45	21.29	2.16
1752.4	22.87	20.64	2.23

**HSDPA : UMTS-FDD Band II PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.14	20.96	2.18
1880	22.78	21.2	1.58
1907.6	22.54	21.18	1.36


**UMTS-FDD Band IV PK-AV POWER (PART 27H)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	23.05	21.13	1.92
1732.6	22.58	21.2	1.38
1752.4	22.79	20.84	1.95

## 6.4 Occupied Bandwidth

Temperature	25 °C
Relative Humidity	56%
Atmospheric Pressure	1018mbar
Test date :	July 09, 2017
Tested By :	Loren Luo

### Requirement(s):

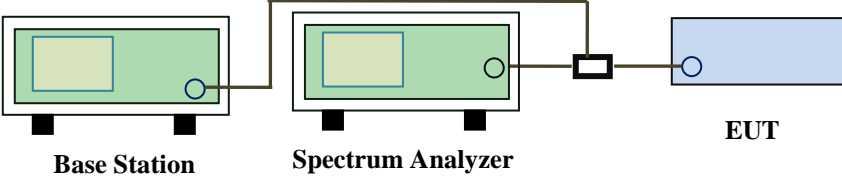Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905	a)	99% Occupied Bandwidth(kHz)	<input checked="" type="checkbox"/>
§24.238 §27.53(a)	b)	26 dB Bandwidth(kHz)	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Base Station      Spectrum Analyzer      EUT</p>		
Test Procedure	<ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A

Test Plot     Yes (See below)       N/A

**GSM Voice:**

**Cellular Band (Part 22H) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	244.43	320.2
190	836.6	246.55	320.9
251	848.8	242.58	311.4

**PCS Band (Part 24E) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	247.37	311.7
661	1880.0	245.29	311.9
810	1909.8	245.40	316.8

**GPRS:**

**Cellular Band (Part 22H) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	246.59	322.9
190	836.6	246.40	317.2
251	848.8	246.69	316.5

**PCS Band (Part 24E) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	247.44	316.1
661	1880.0	244.81	311.3
810	1909.8	244.47	314.6

**EGPRS (MCS5):**

**Cellular Band (Part 22H) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	242.16	311.3
190	836.6	248.25	314.2
251	848.8	246.50	310.9

**PCS Band (Part 24E) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	244.84	321.1
661	1880.0	246.05	316.7
810	1909.8	243.65	311.9



**RMC:**

**UMTS-FDD Band V (Part 22H)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.1423	4.671
4175	835.0	4.1435	4.677
4233	846.6	4.1633	4.693

**UMTS-FDD Band II (Part 24E)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1671	4.688
9400	1880.0	4.1778	4.709
9538	1907.6	4.1777	4.710

**UMTS-FDD Band IV (Part 27)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1620	4.686
1413	1733	4.1596	4.674
1512	1752	4.1612	4.676

**HSDPA:**

**UMTS-FDD Band V (Part 22H)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.1523	4.659
4175	835.0	4.1411	4.657
4233	846.6	4.1543	4.685

**UMTS-FDD Band II (Part 24E)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1639	4.706
9400	1880.0	4.1816	4.708
9538	1907.6	4.1630	4.691

**UMTS-FDD Band IV (Part 27)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1594	4.677
1413	1733	4.1605	4.673
1512	1752	4.1512	4.666

**HSUPA:**

**UMTS-FDD Band V (Part 22H)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.1455	4.684
4175	835.0	4.1516	4.676
4233	846.6	4.1552	4.681

**UMTS-FDD Band II (Part 24E)**


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1622	4.669
9400	1880.0	4.1805	4.689
9538	1907.6	4.1786	4.721

**UMTS-FDD Band IV (Part 27)**


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1646	4.663
1413	1733	4.1634	4.670
1512	1752	4.1542	4.681

## Test Plots


### GMS Voice:

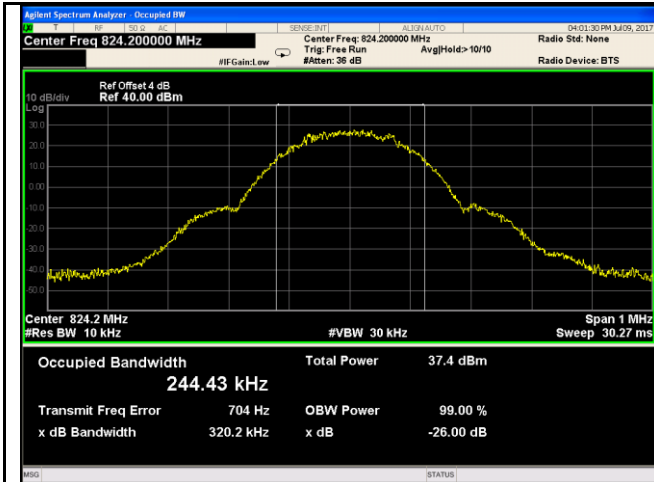


GSM 850 BW - Low CH 824.2MHz

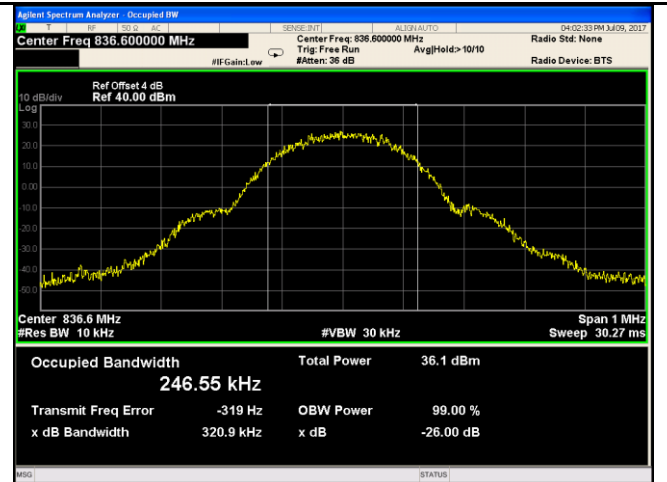


GSM 850 BW - Mid CH 836.6MHz

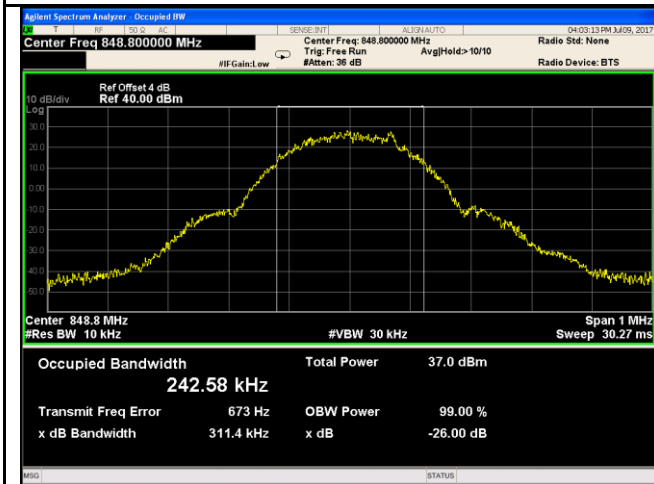


GSM 850 BW - High CH 848.8MHz

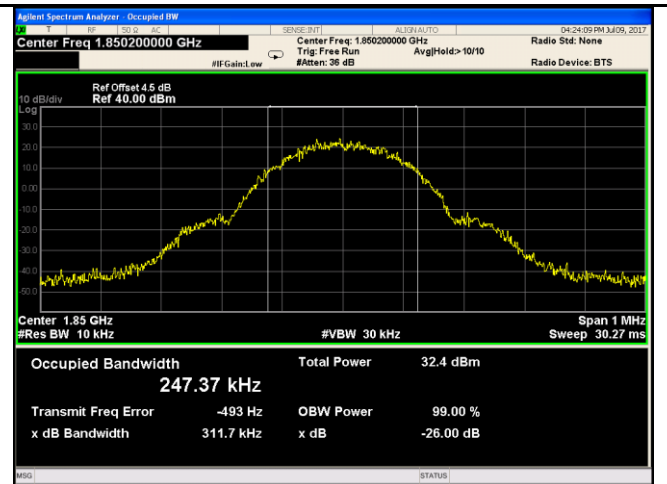

PCS 1900 BW - Low CH 1850.2MHz

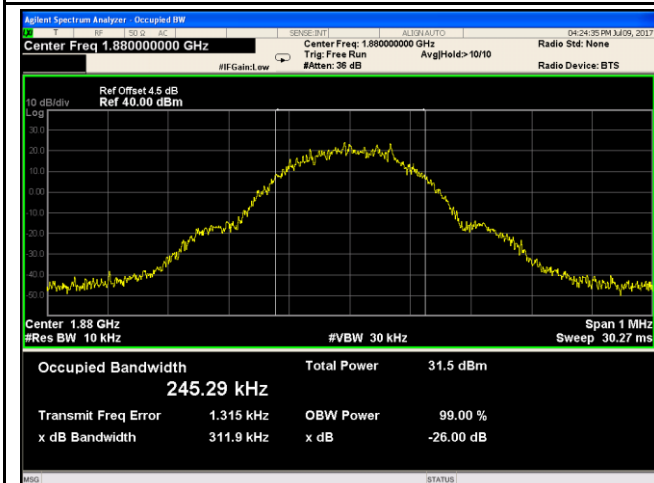


PCS 1900 BW - Mid CH 1880MHz

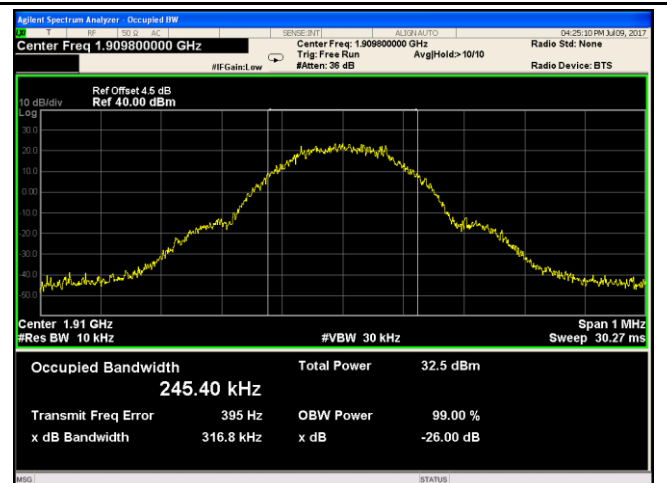


PCS 1900 BW - High CH 1910MHz


**GPRS:**

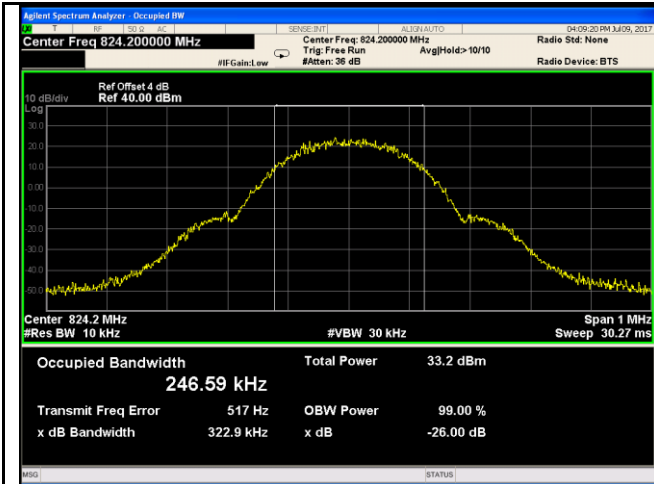


GSM 850 BW - Low CH 824.2MHz

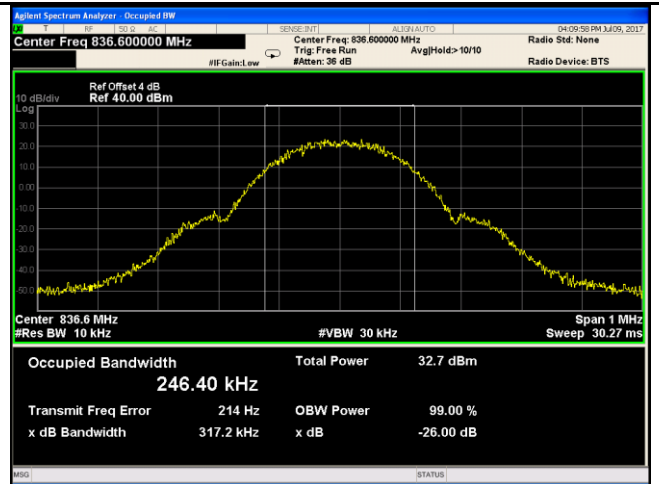


GSM 850 BW - Mid CH 836.6MHz

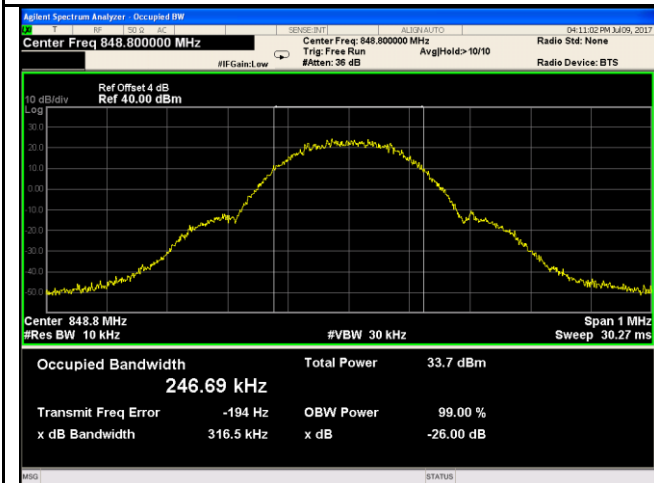


GSM 850 BW - High CH 848.8MHz

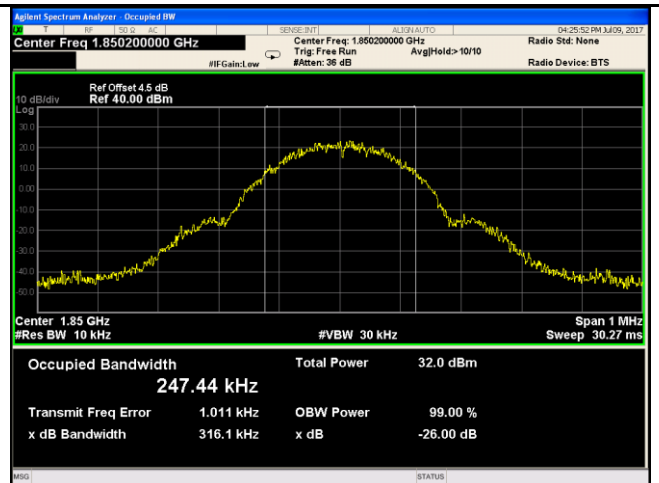

PCS 1900 BW - Low CH 1850.2MHz

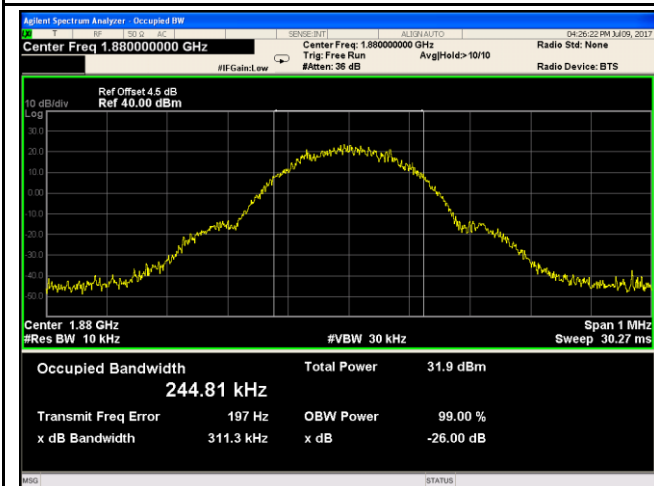


PCS 1900 BW - Mid CH 1880MHz

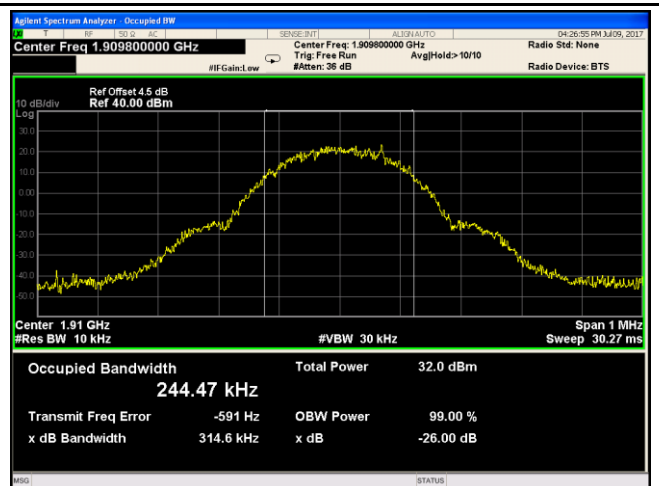


PCS 1900 BW - High CH 1910MHz


**EGPRS:**

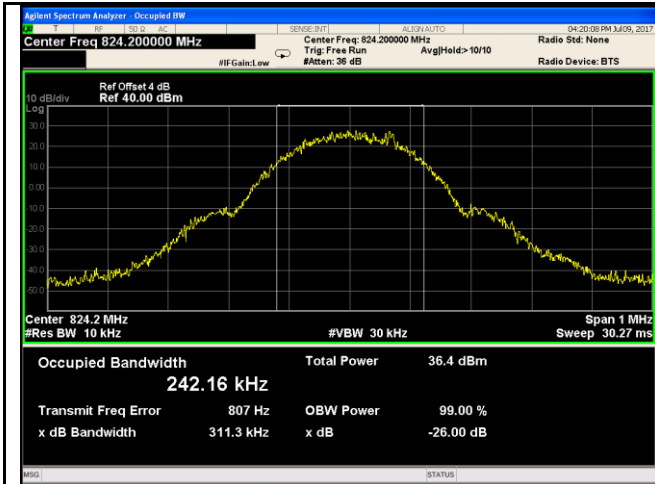


GSM 850 BW - Low CH 824.2MHz

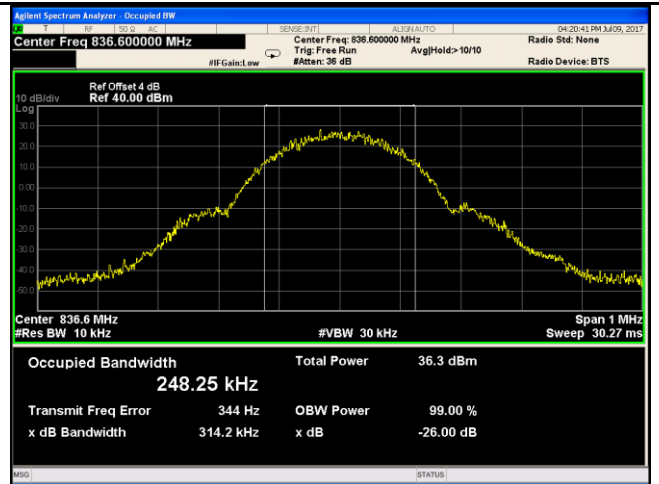


GSM 850 BW - Mid CH 836.6MHz

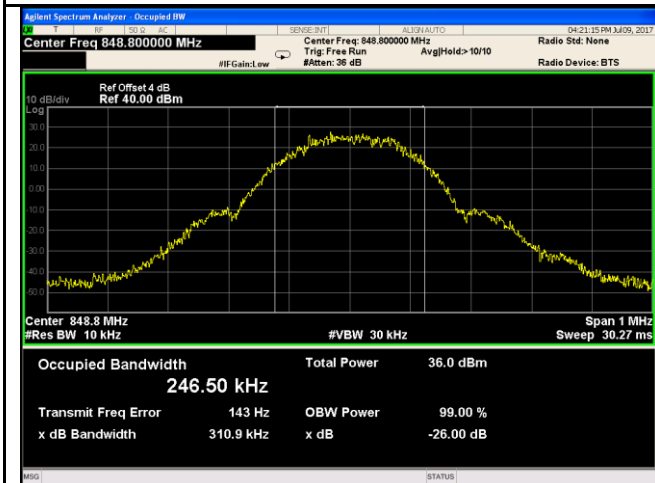


GSM 850 BW - High CH 848.8MHz

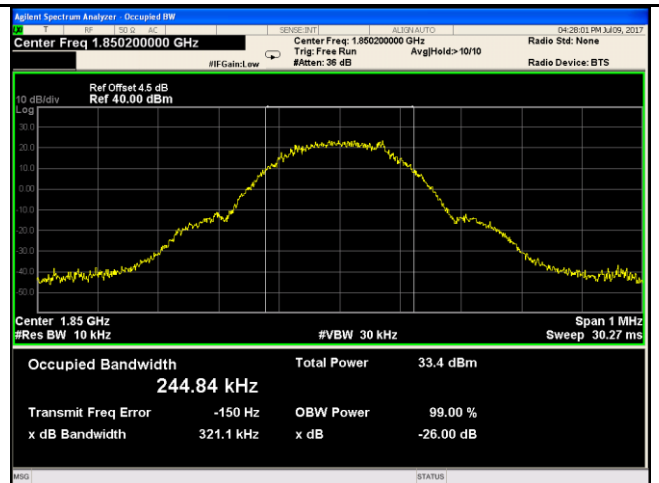

PCS 1900 BW - Low CH 1850.2MHz

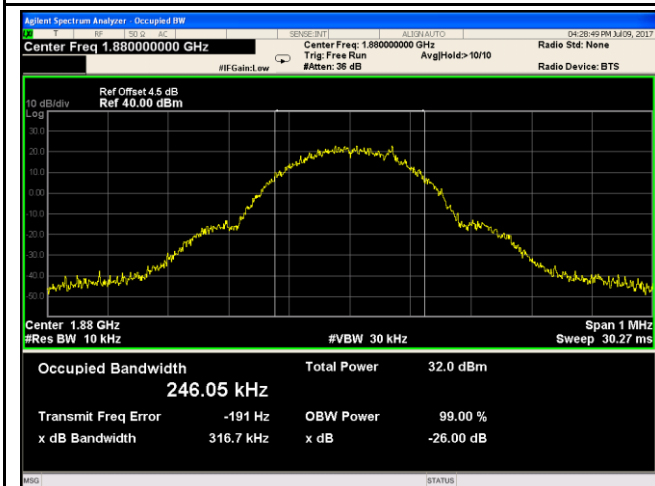


PCS 1900 BW - Mid CH 1880MHz

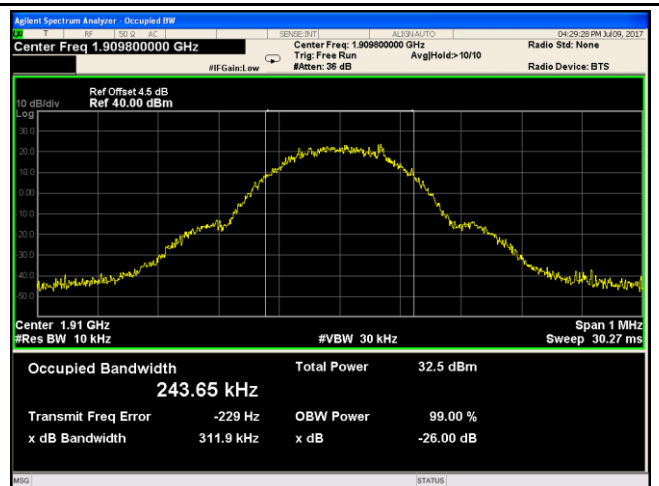


PCS 1900 BW - High CH 1910MHz

RMC:

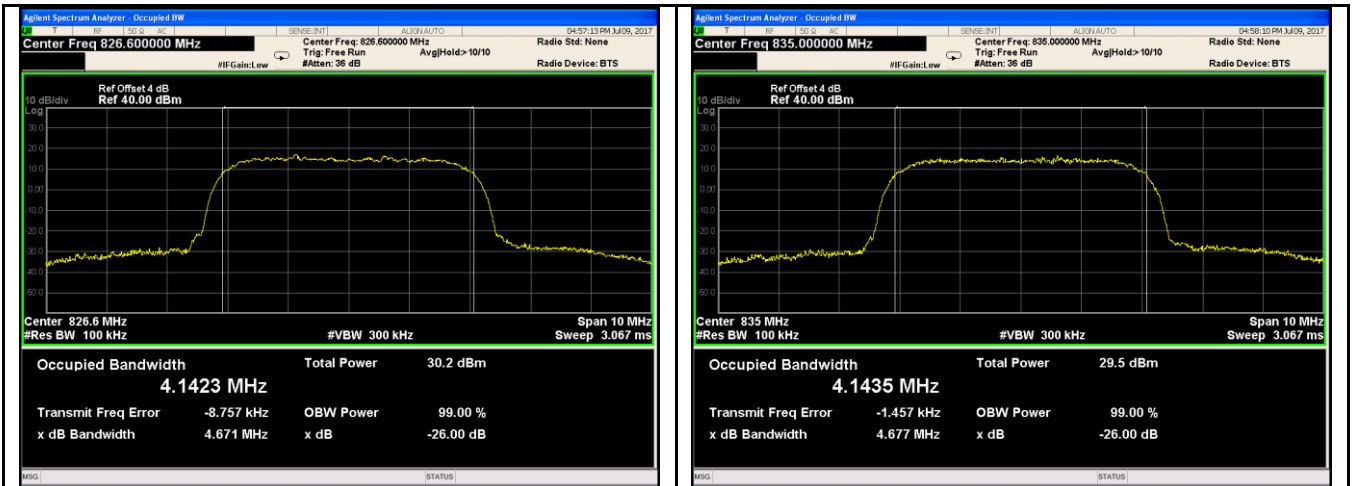


Band V BW - Low CH 826.6 MHz

Band V BW - Mid CH 835.0 MHz

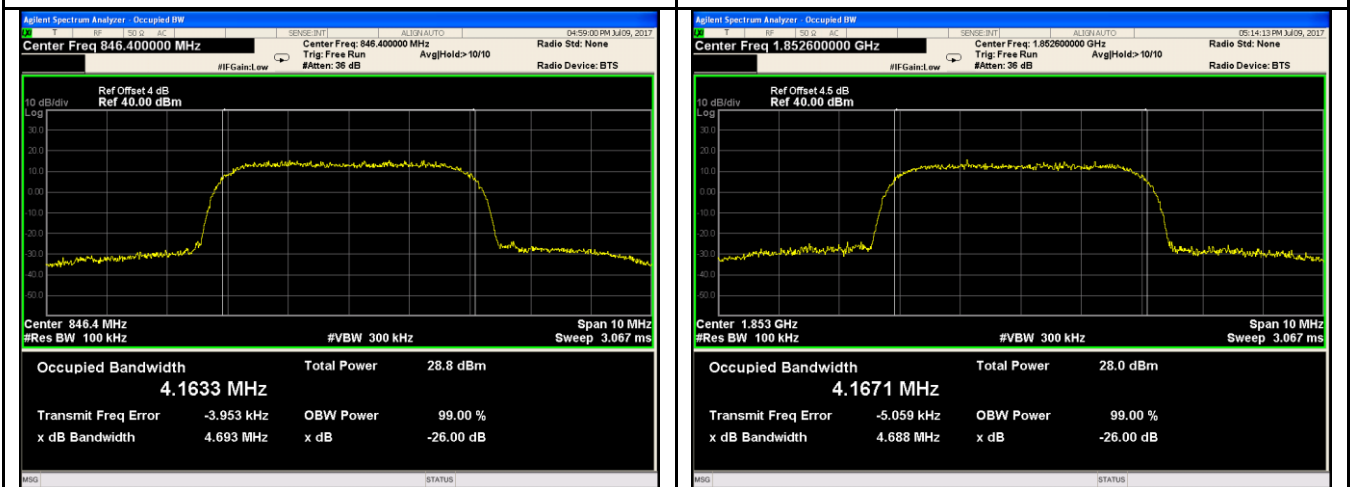


Band V BW - High CH 846.6 MHz

Band II BW - Low CH 1853MHz

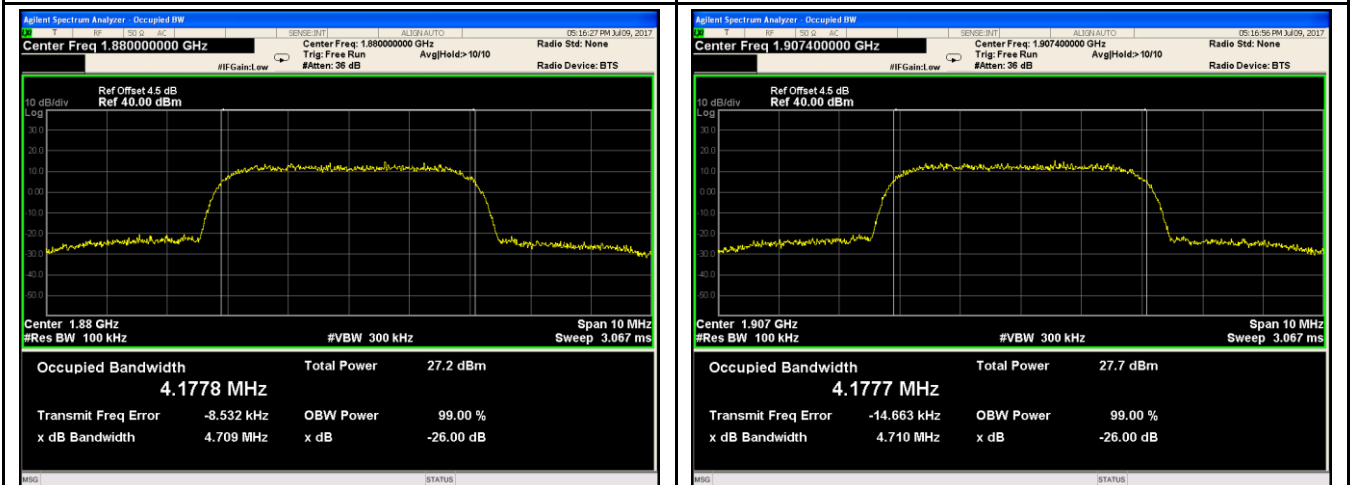


Band II BW - Mid CH 1880MHz


Band II BW - High CH 1907MHz

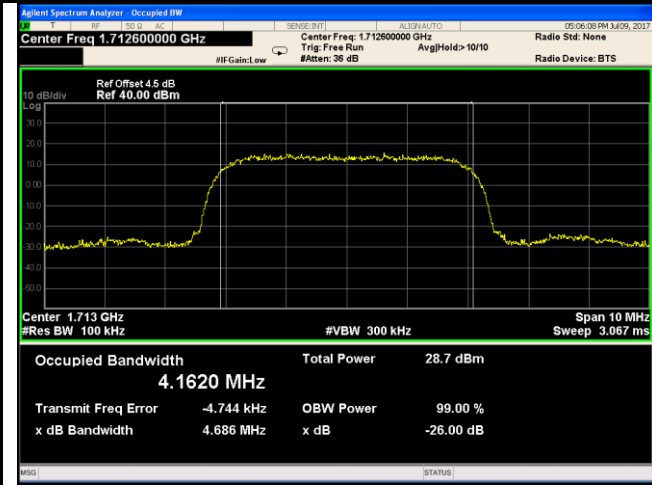

Band IV BW - Low CH 1713MHz

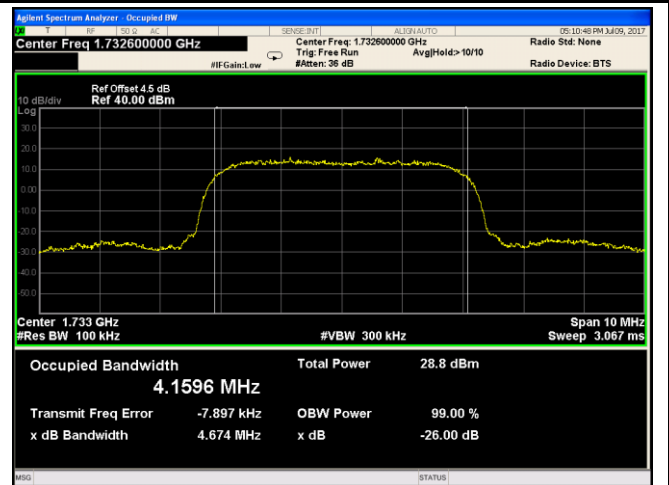


Band IVBW - Mid CH 1733MHz

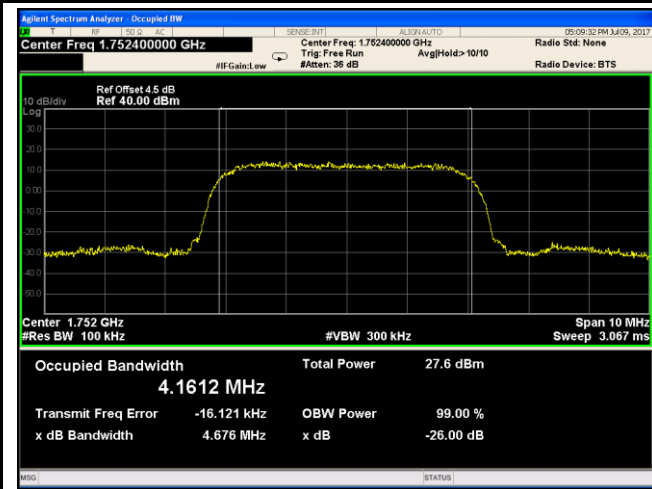


Band IV BW - High CH 1752MHz




**HSDPA:**

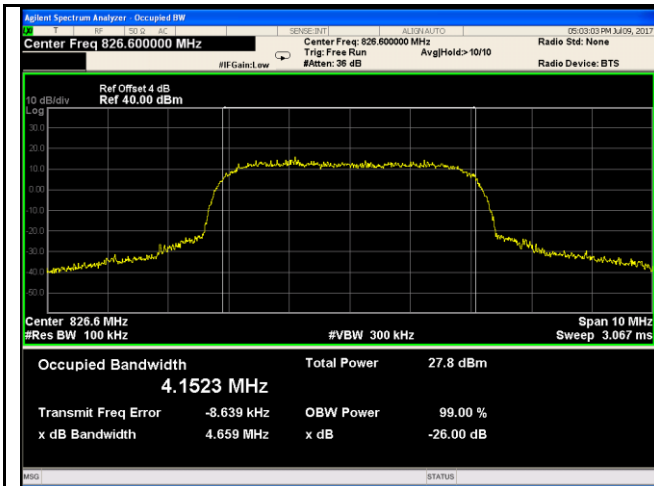


**Band V BW - Low CH 826.6 MHz**

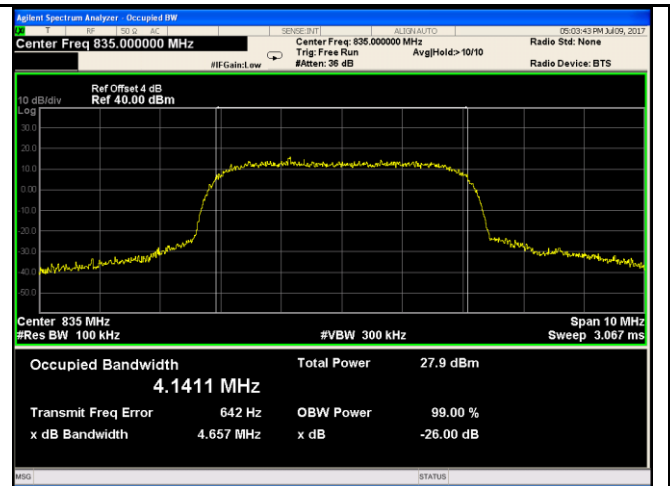


**Band V BW - Mid CH 835.0 MHz**

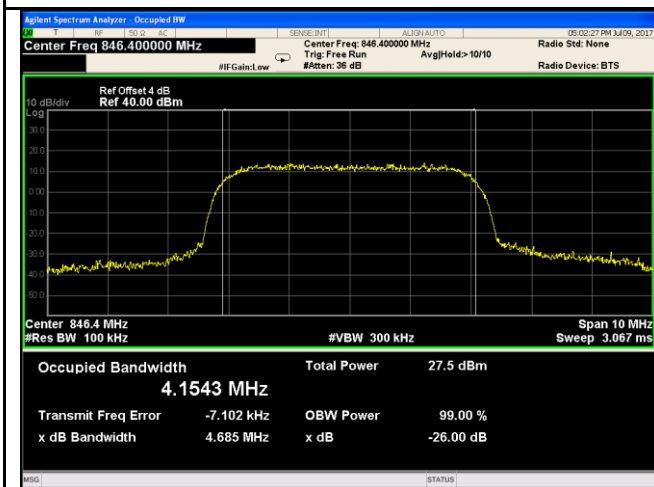


**Band V BW - High CH 846.4 MHz**

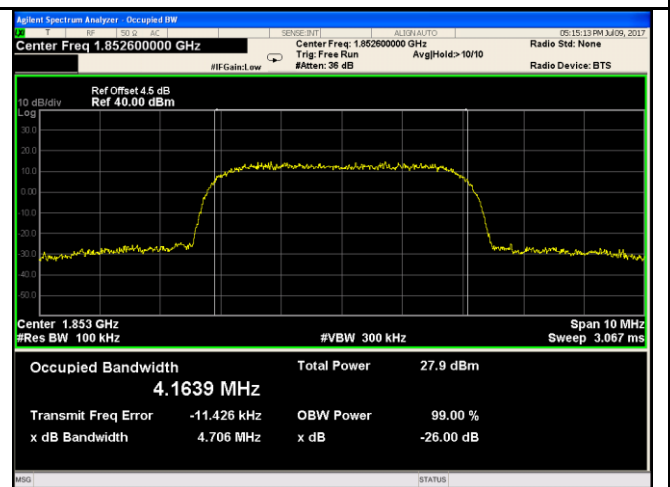


**Band II BW - Low CH 1852.4MHz**

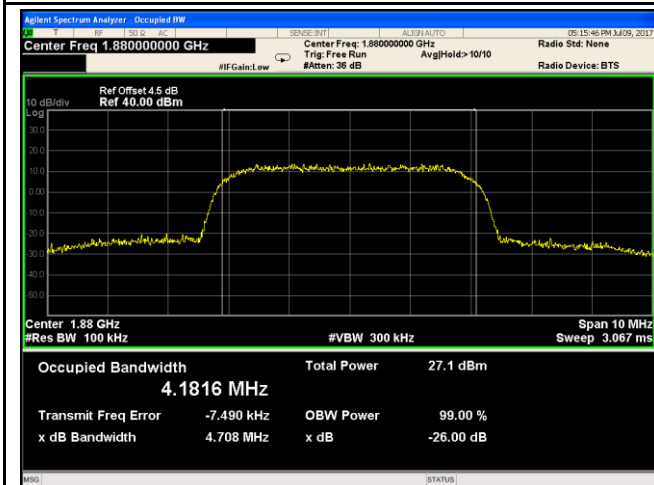


**Band II BW - Mid CH 1880MHz**

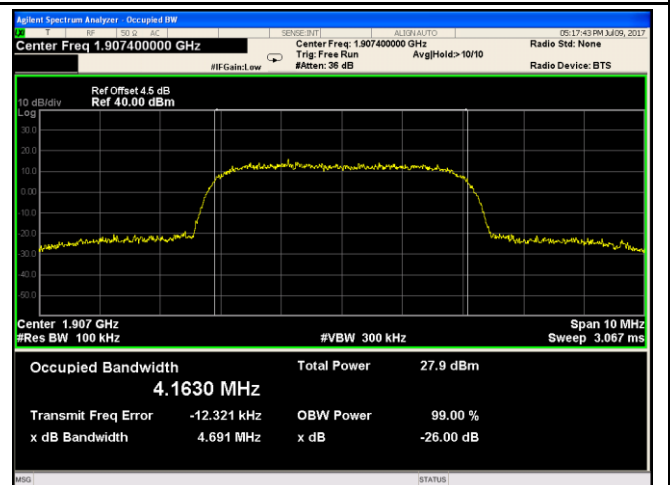


**Band II BW - High CH 1907MHz**

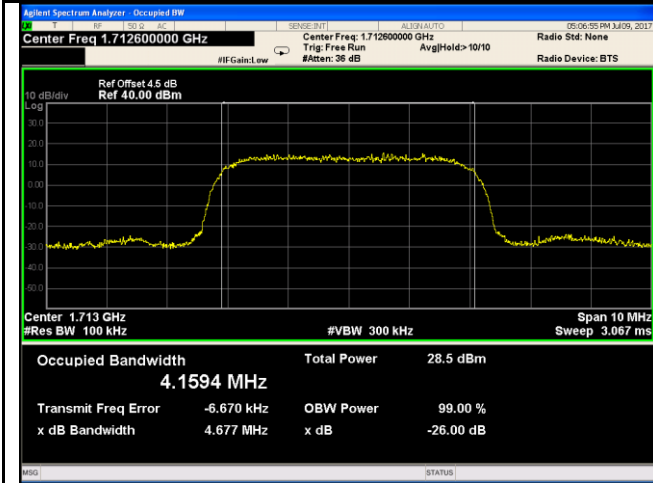

Band IV BW - Low CH 1713MHz

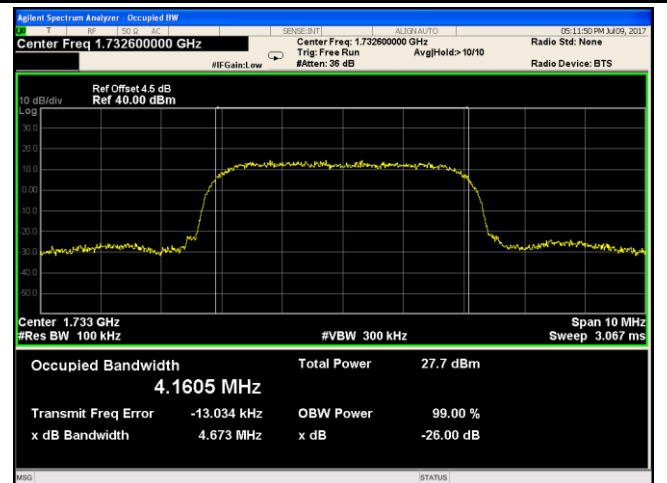


Band IVBW - Mid CH 1733MHz

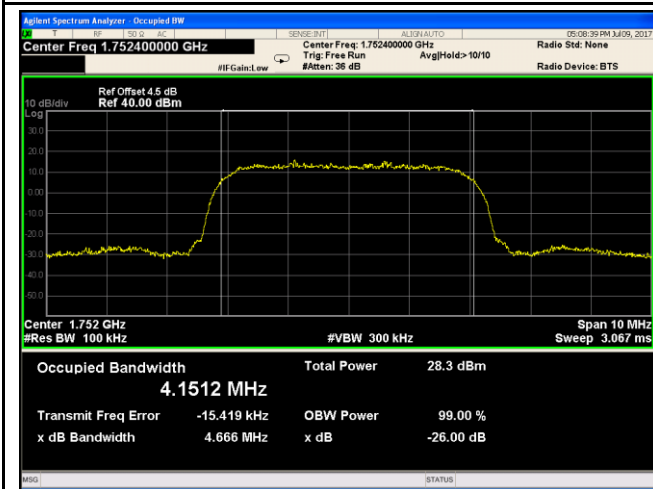


Band IV BW - High CH 1752MHz


HSUPA:

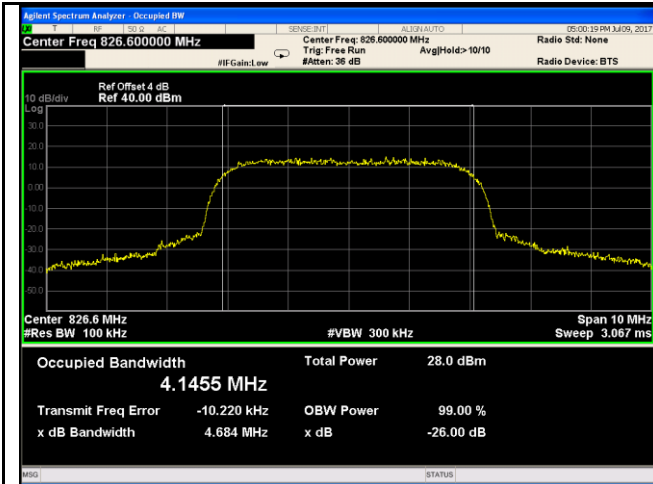


Band V BW - Low CH 826.6 MHz

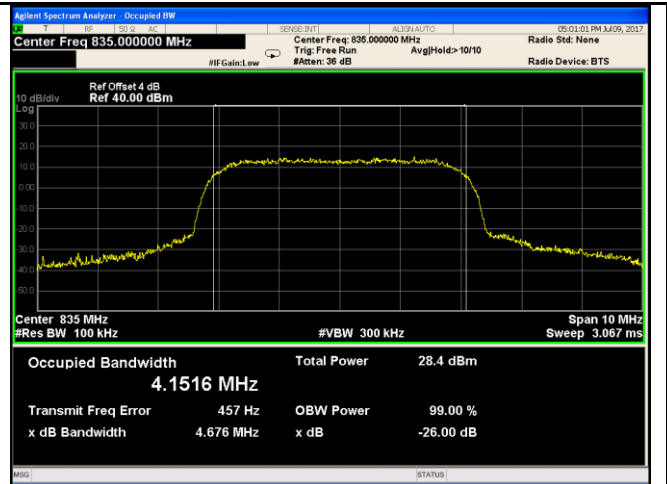


Band V BW - Mid CH 835.0 MHz

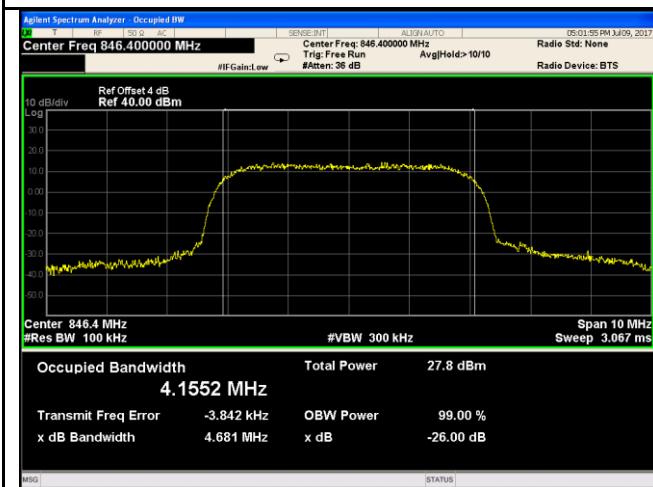


Band V BW - High CH 846.4 MHz

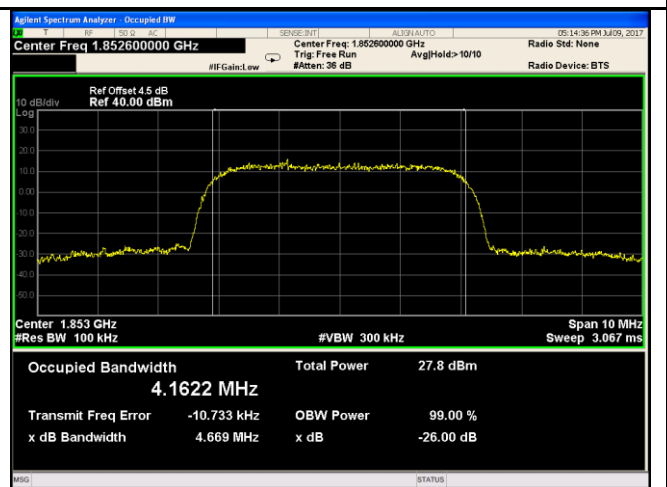


Band II BW - Low CH 1853MHz

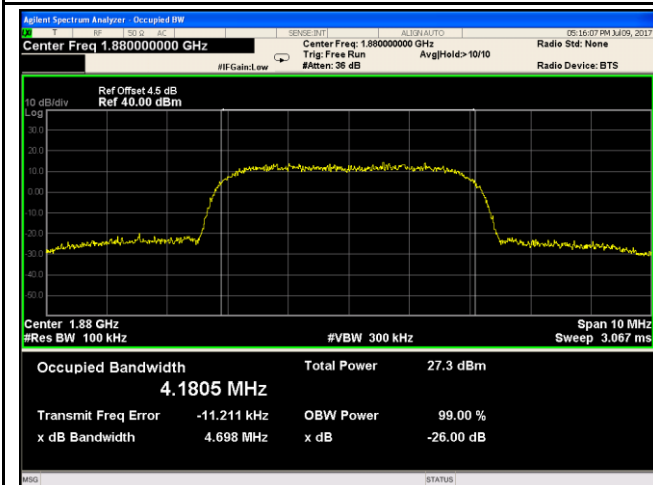


Band II BW - Mid CH 1880MHz

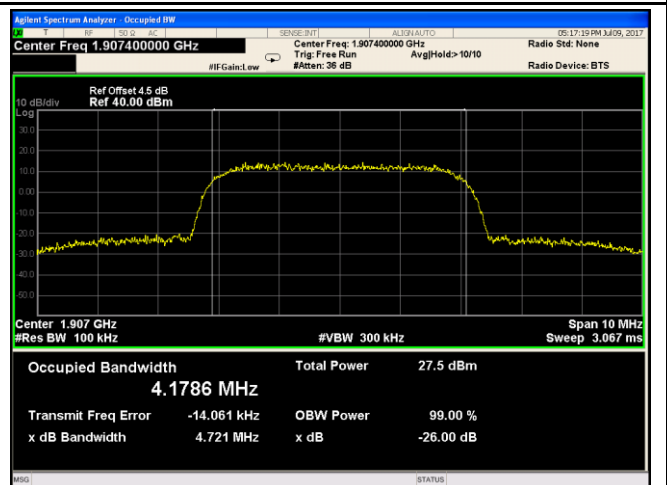


Band II BW - High CH 1907MHz

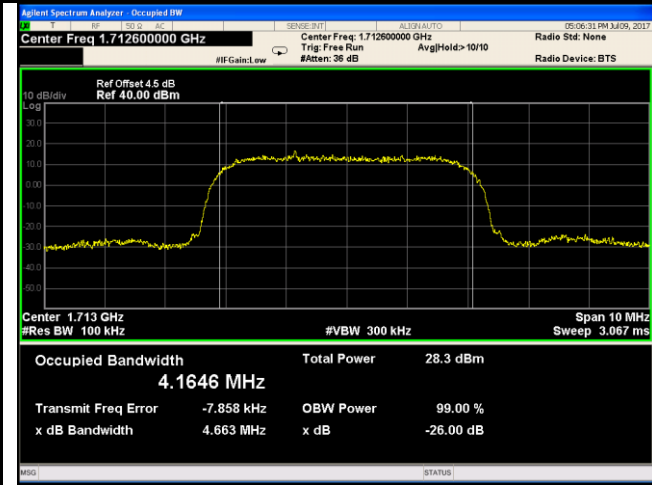

Band IV BW - Low CH 1713MHz

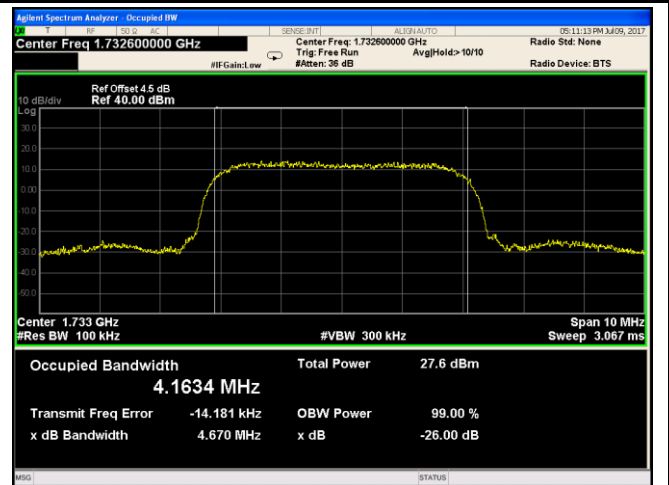

Band IVBW - Mid CH 1733MHz

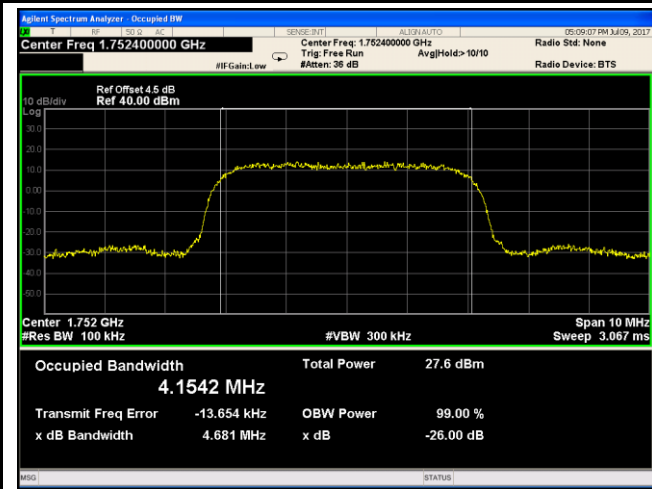


Band IV BW - High CH 1752MHz

## 6.5 Spurious Emissions at Antenna Terminals

Temperature	25 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

### Requirement(s):

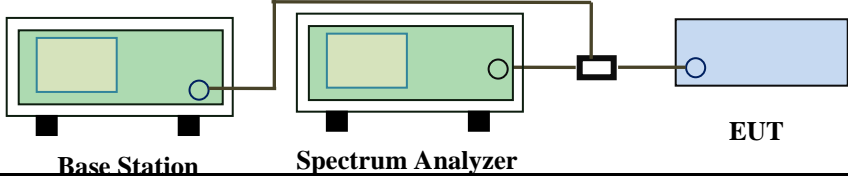
Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram shows a Base Station (green box) connected to a Spectrum Analyzer (green box) and an EUT (blue box) via a power divider (black box). The Base Station and Spectrum Analyzer are connected to each other, and the Spectrum Analyzer is connected to the power divider, which then splits the signal to the EUT.</p>		
Test Procedure	<ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The Band Edges of low and high channels for the highest RF powers were measured.</li> <li>- Setting RBW as roughly BW/100.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A  
 Test Plot     Yes (See below)       N/A


Test Plots

GSM Voice:


Cellular Band (Part 22H) result

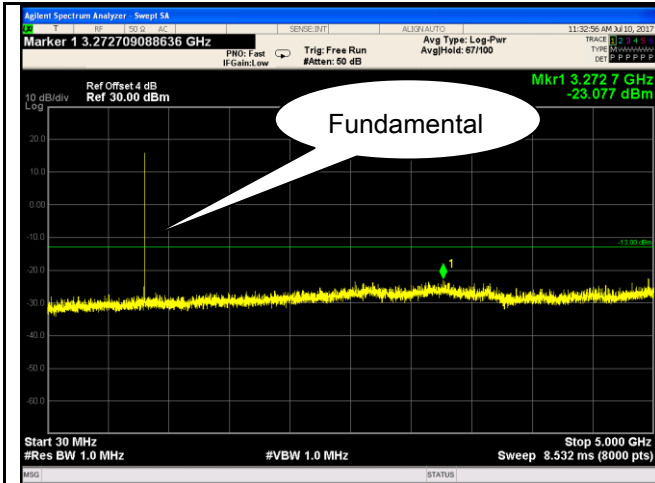


GSM 850 - Low Channel-1

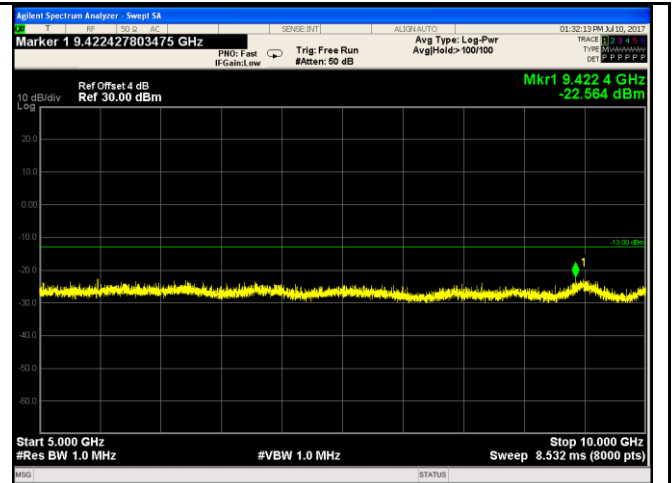


GSM 850 - Low Channel-2

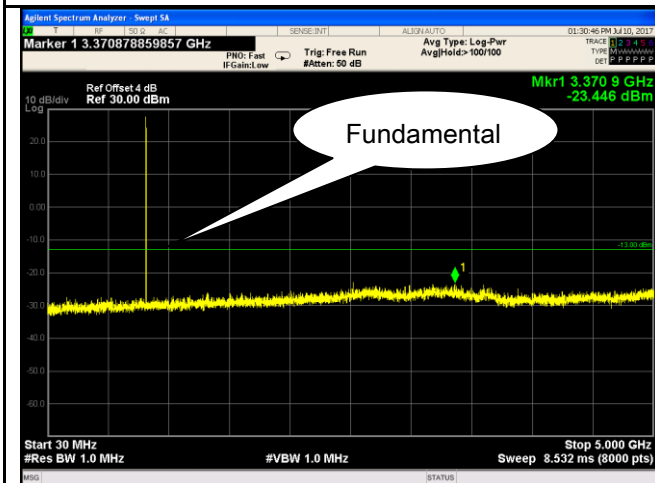


GSM 850 Middle Channel-1

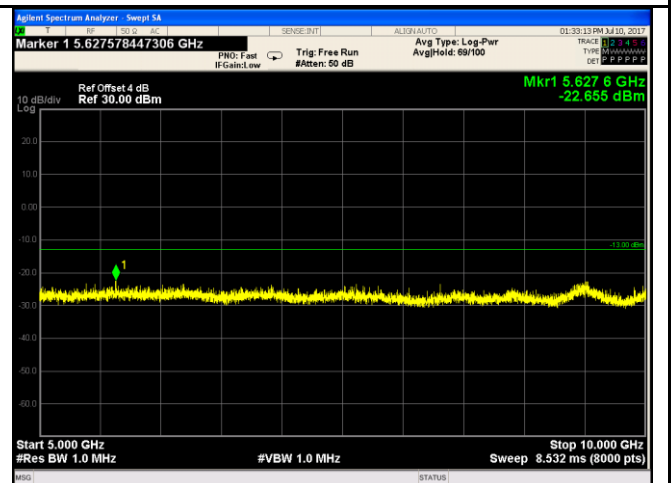

GSM 850 Middle Channel-2

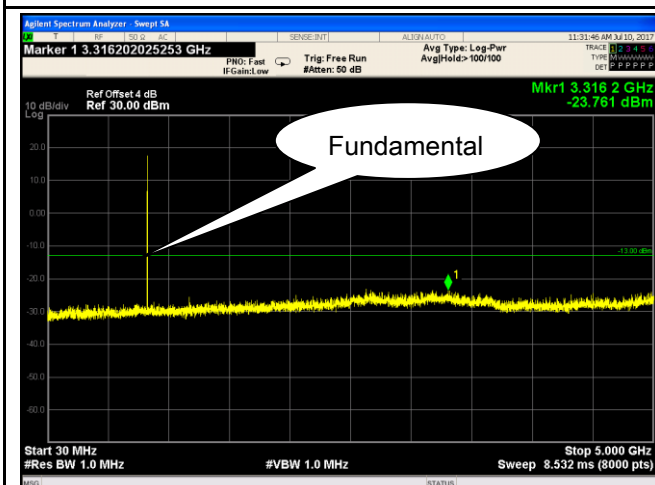


GSM 850 - High Channel-1

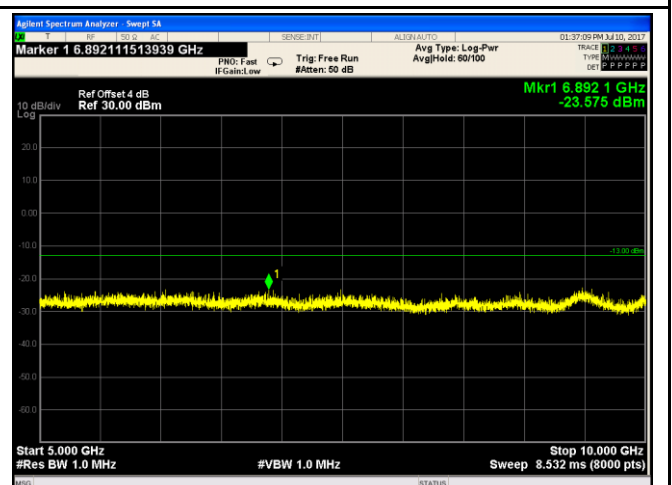


GSM 850 - High Channel-2


### PCS Band (Part24E) result

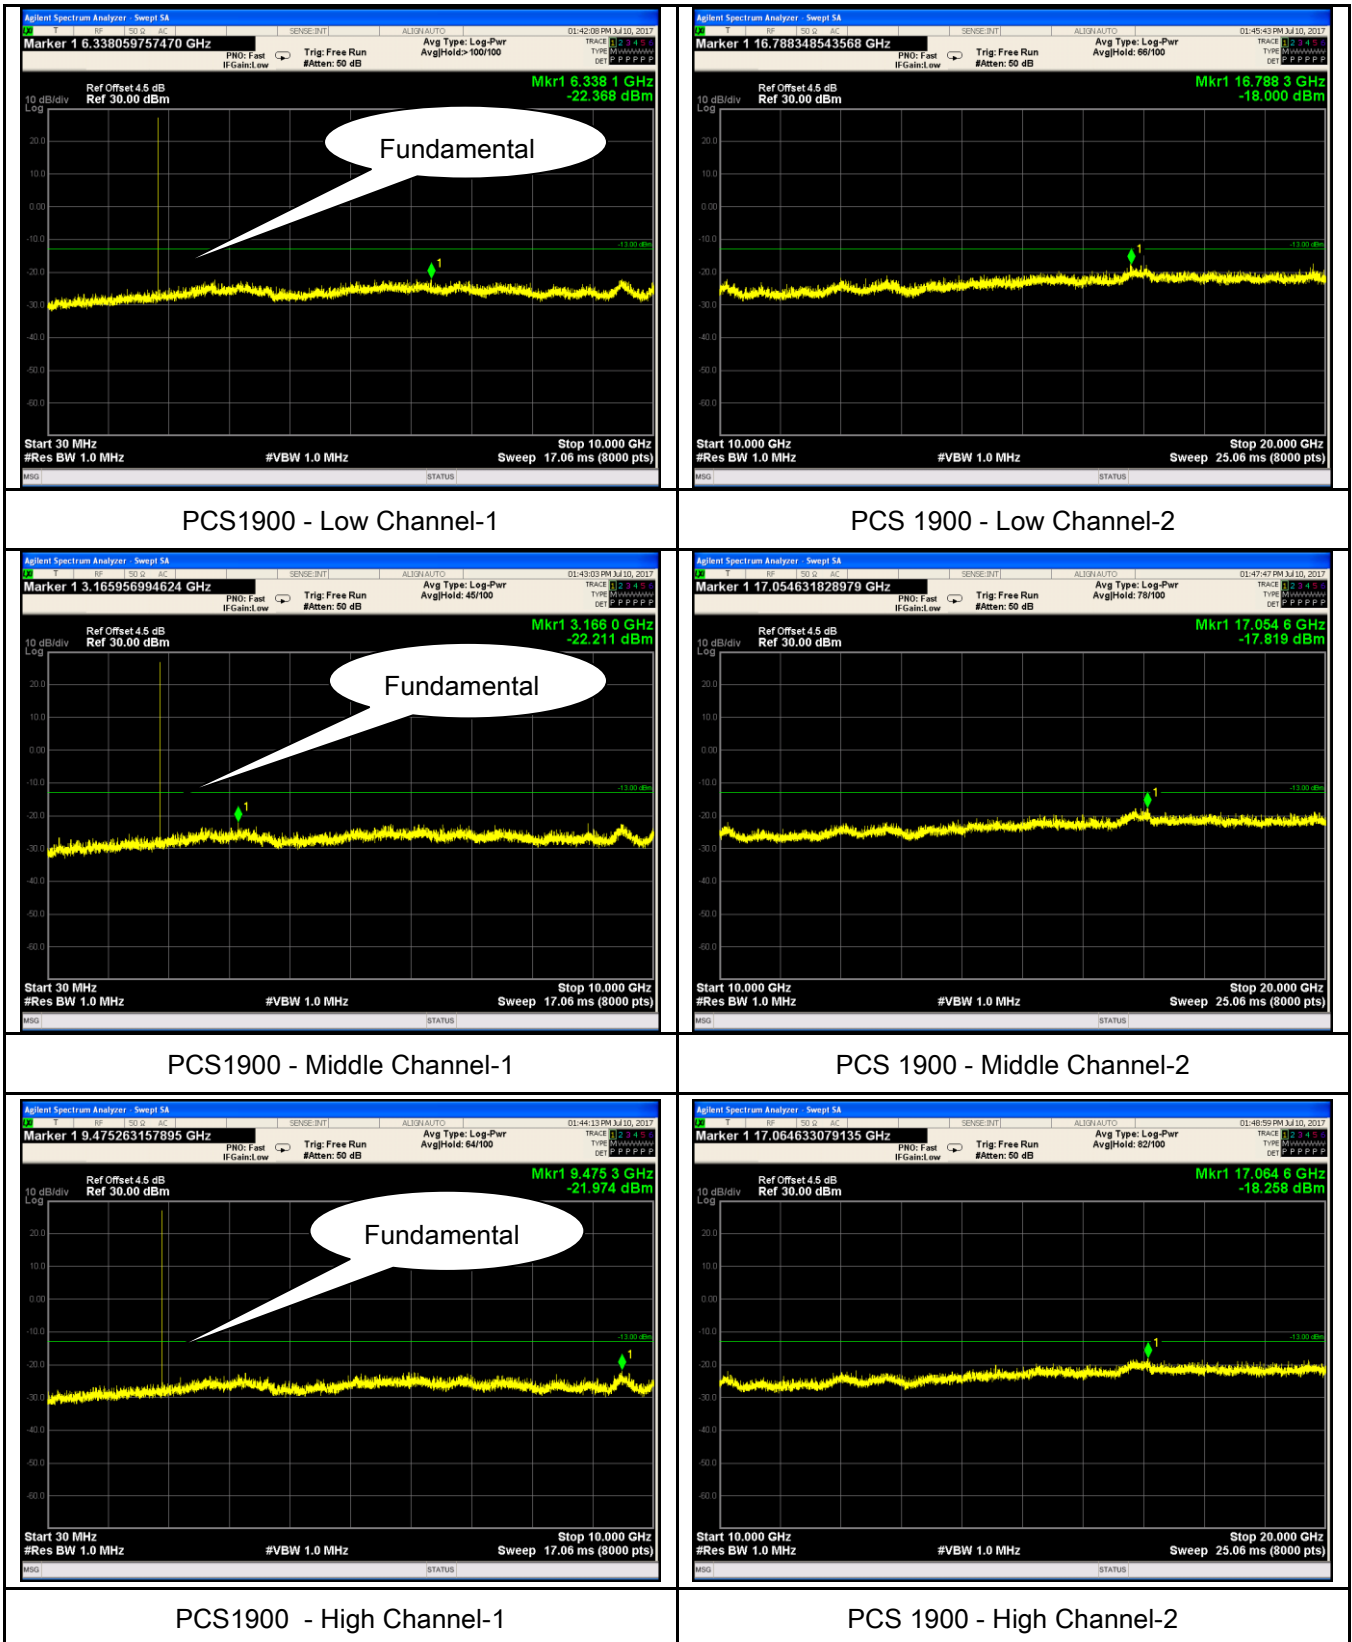


**GPRS:**  
**Cellular Band (Part 22H) result**

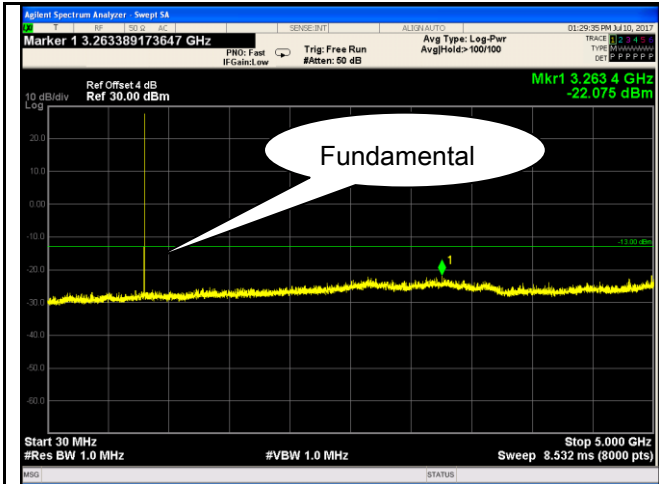


GSM 850 - Low Channel-1

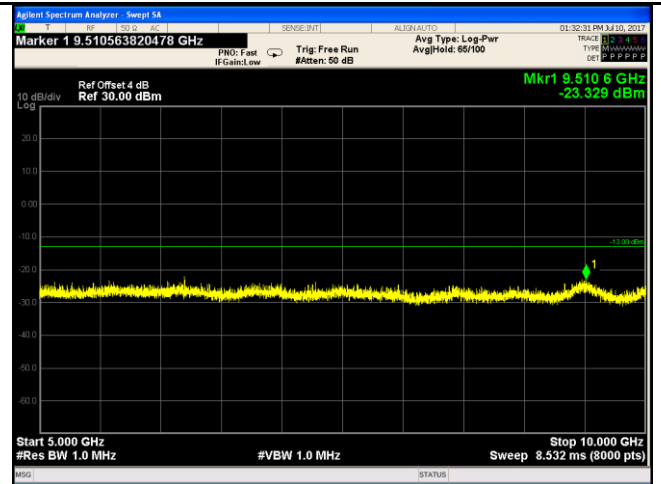


GSM 850 - Low Channel-2

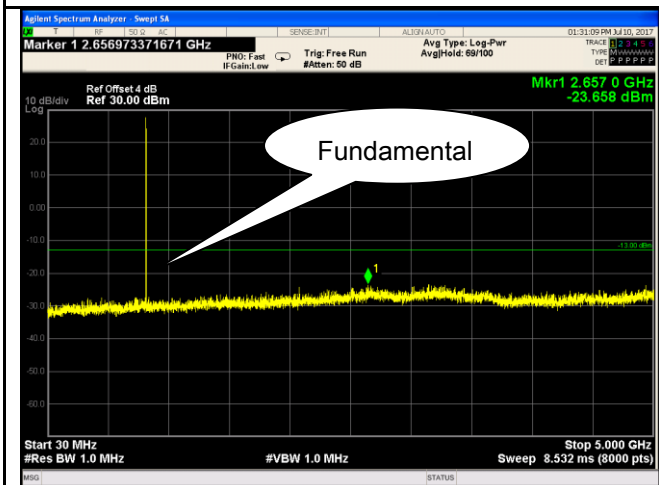


GSM 850 Middle Channel-1

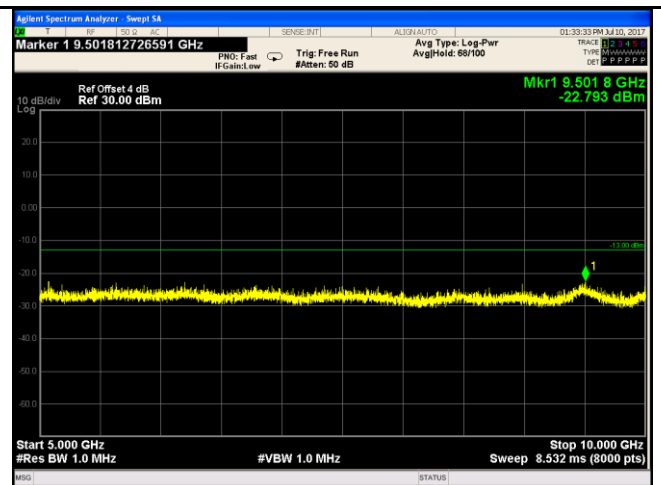

GSM 850 Middle Channel-2

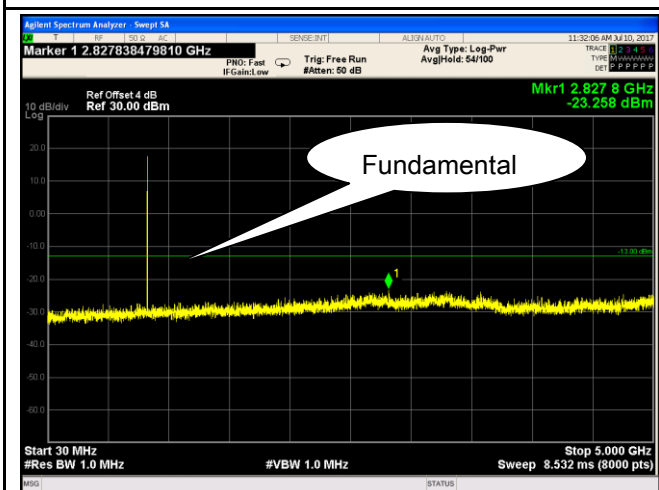


GSM 850 - High Channel-1

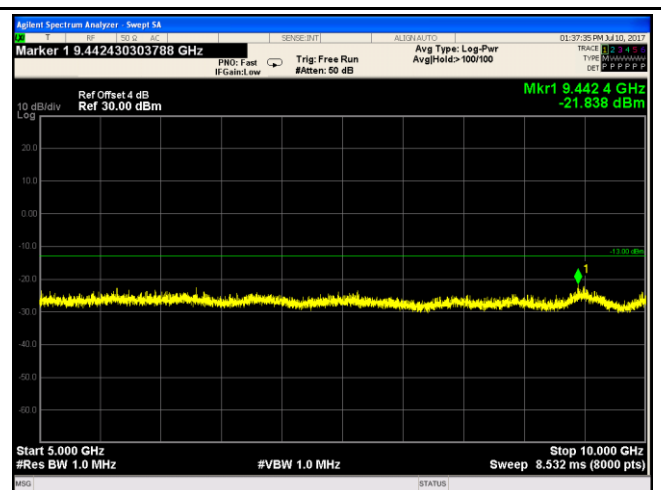


GSM 850 - High Channel-2




PCS Band (Part24E) result

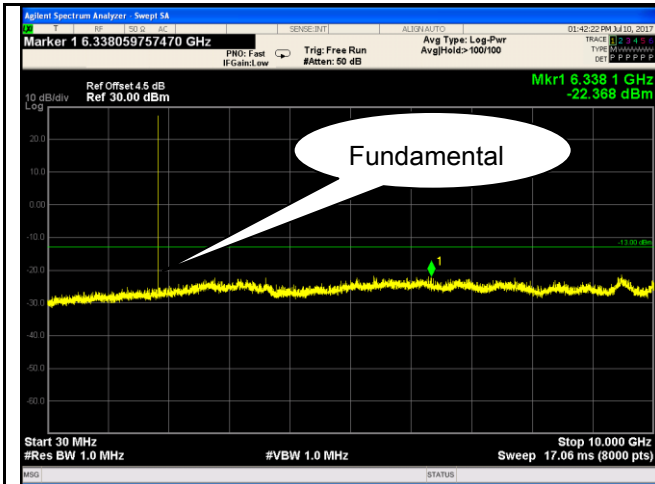


PCS1900 - Low Channel-1

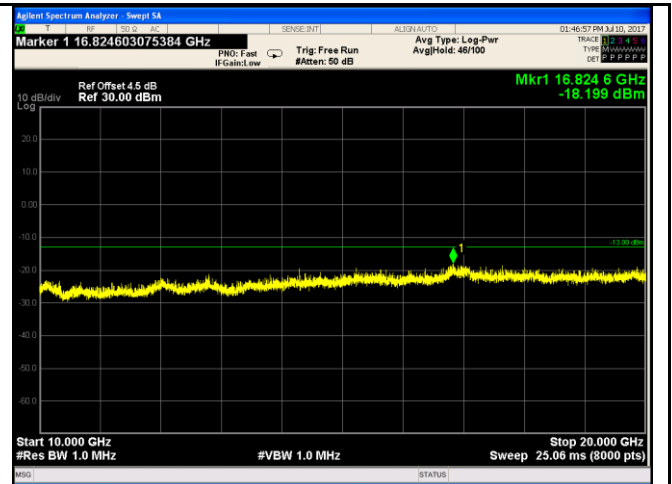


PCS 1900 - Low Channel-2

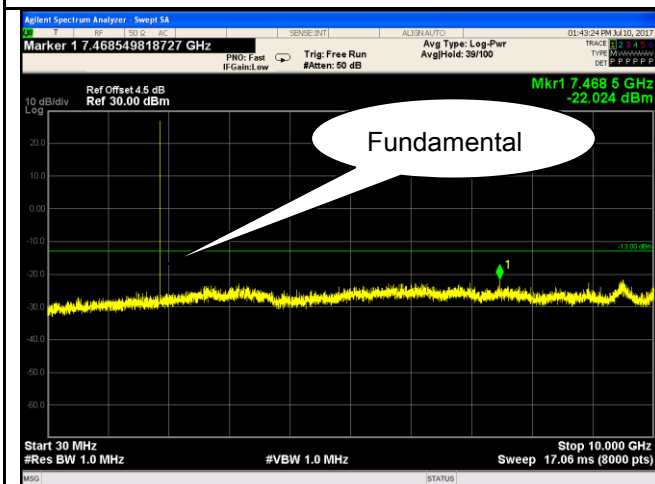


PCS1900 - Middle Channel-1

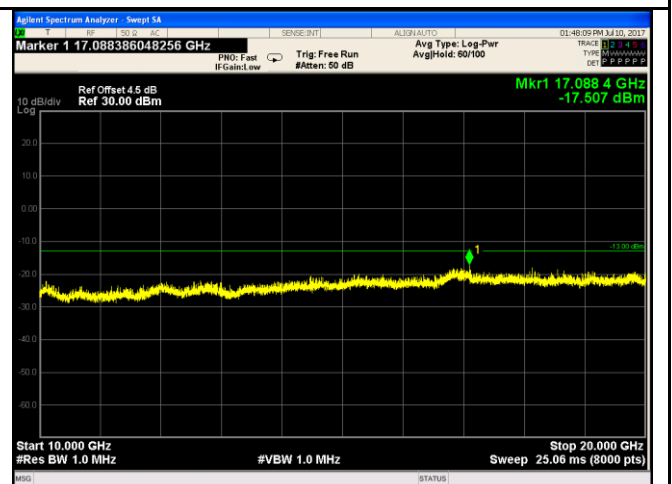

PCS 1900 - Middle Channel-2

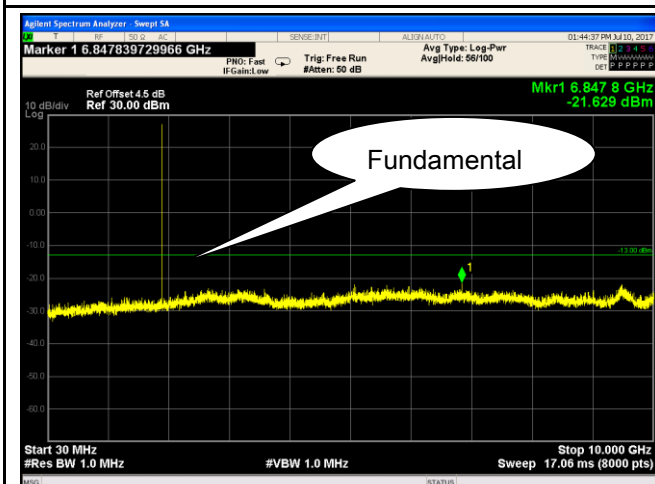


PCS1900 - High Channel-1

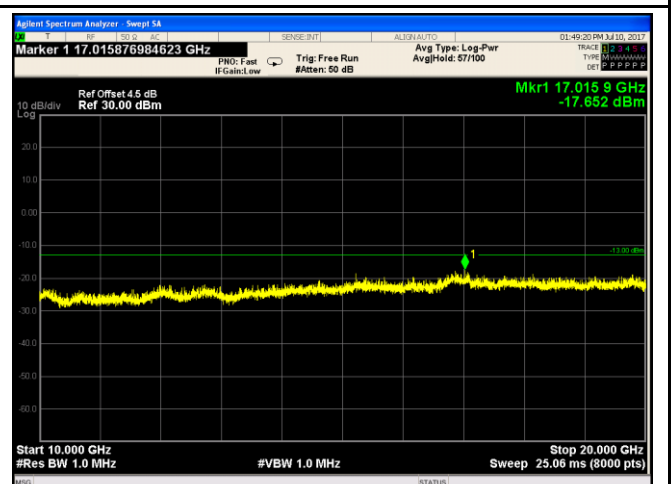


PCS 1900 - High Channel-2


EGPRS (MCS5):  
Cellular Band (Part 22H) result

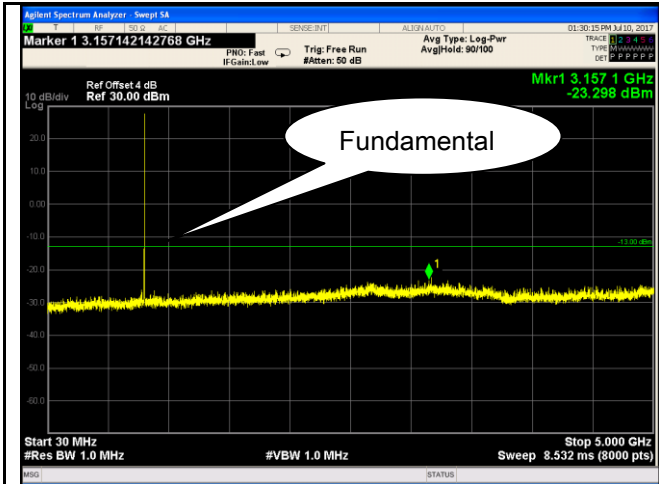


GSM 850 - Low Channel-1

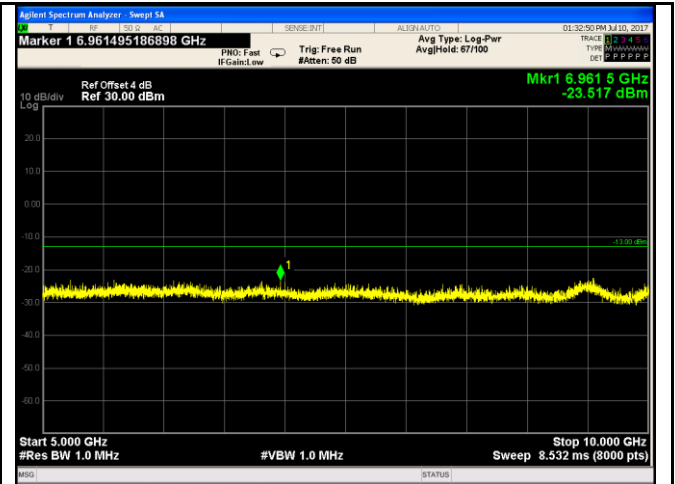


GSM 850 - Low Channel-2

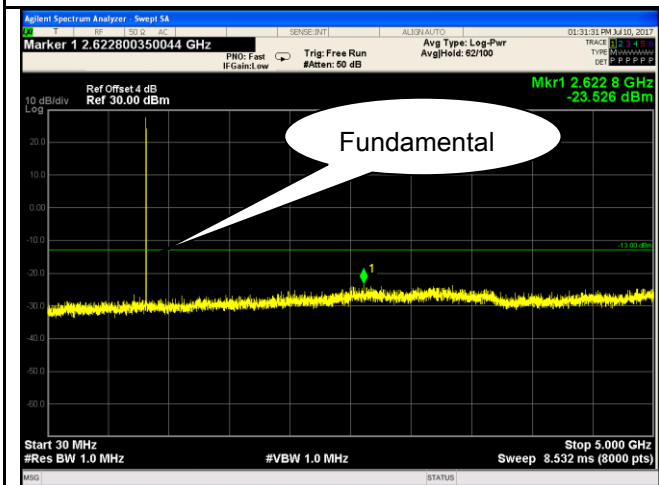


GSM 850 Middle Channel-1

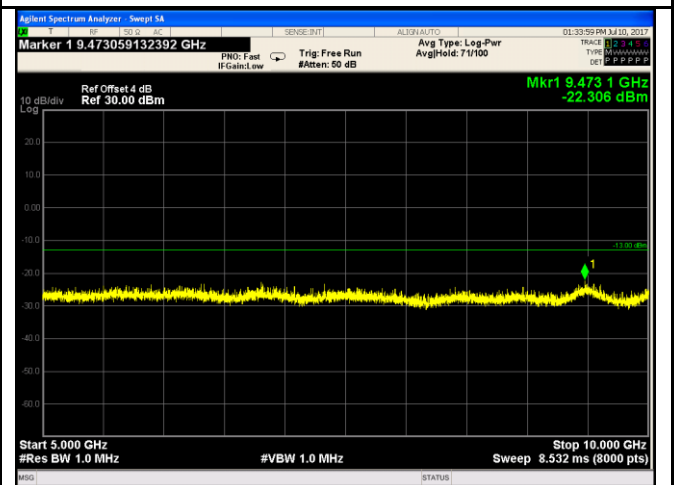

GSM 850 Middle Channel-2

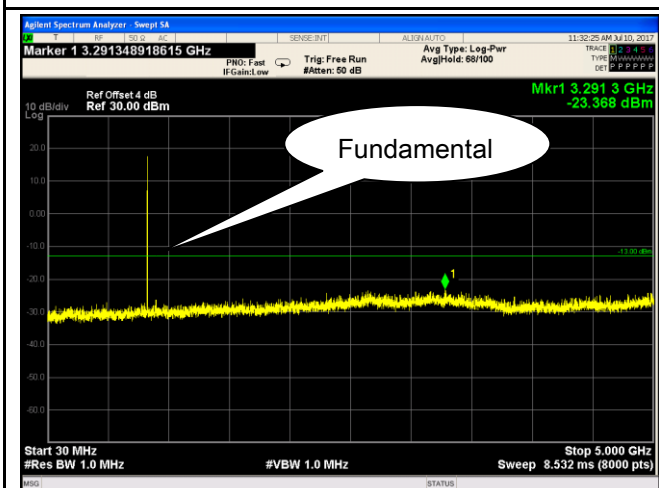


GSM 850 - High Channel-1

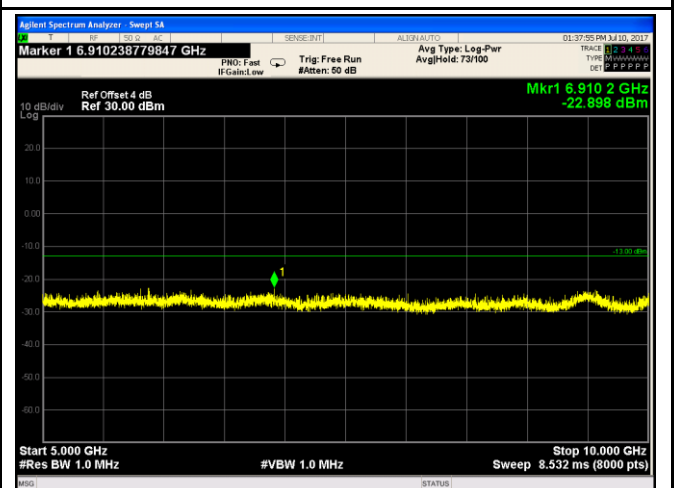


GSM 850 - High Channel-2


PCS Band (Part24E) result

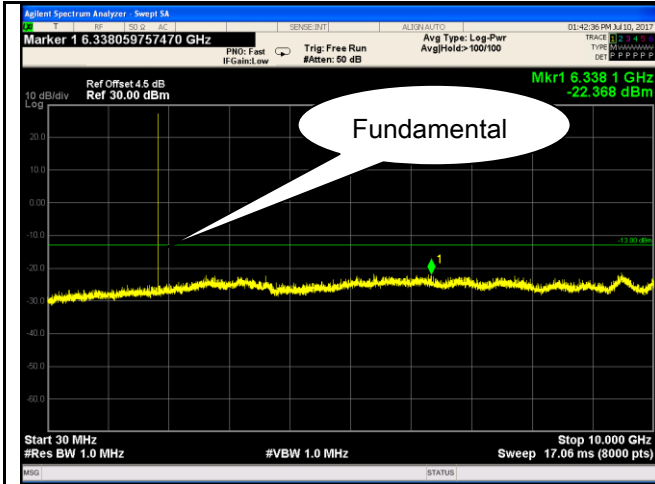


PCS1900 - Low Channel-1

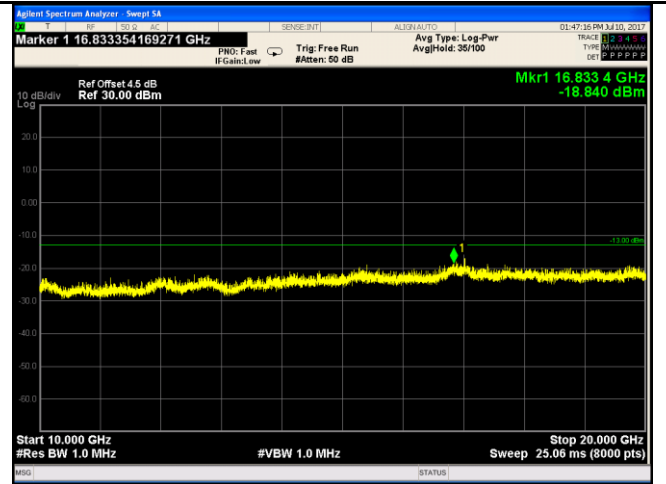


PCS 1900 - Low Channel-2

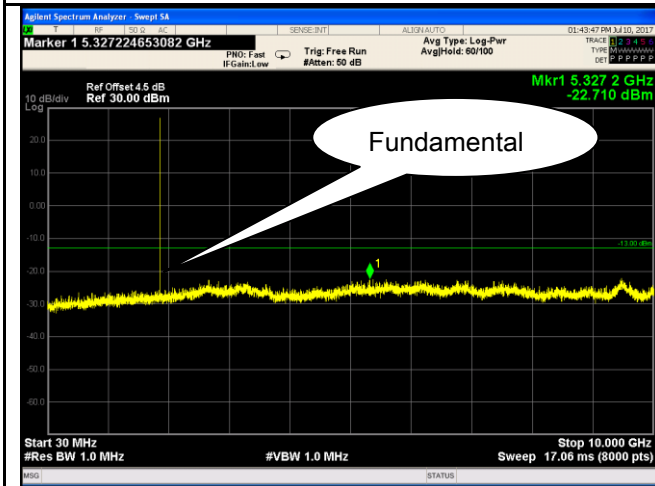


PCS1900 - Middle Channel-1

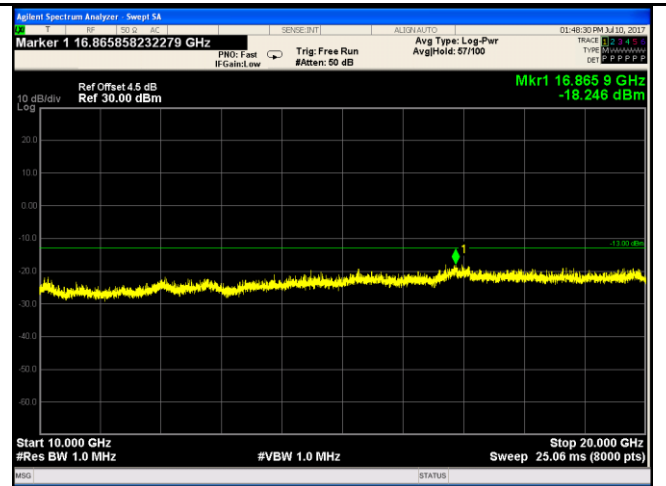

PCS 1900 - Middle Channel-2

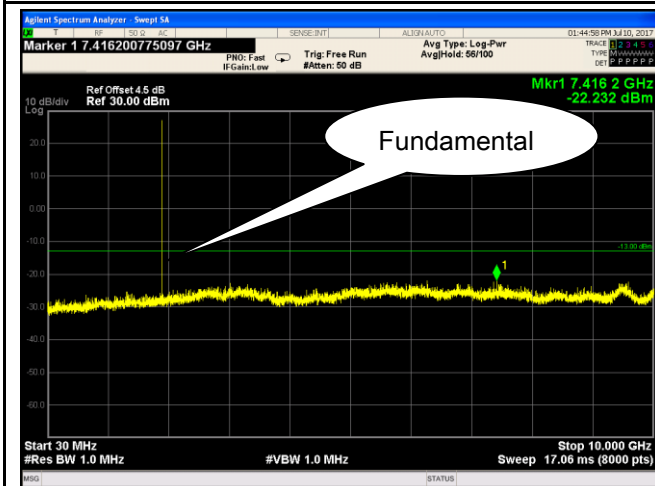


PCS1900 - High Channel-1

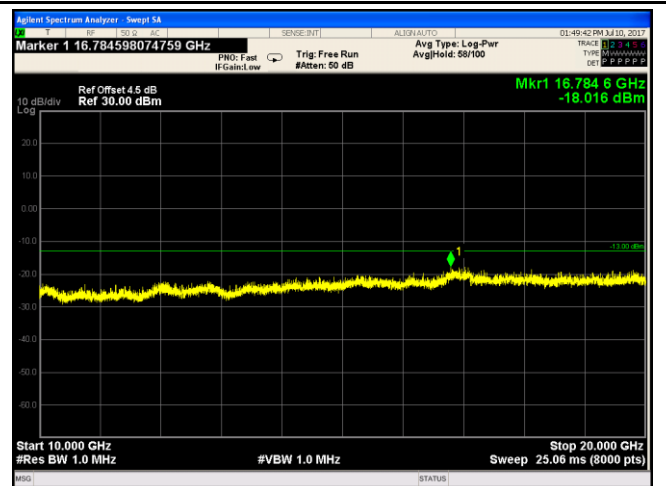


PCS 1900 - High Channel-2

**RMC**


**UMTS-FDD Band V (Part 22H)**

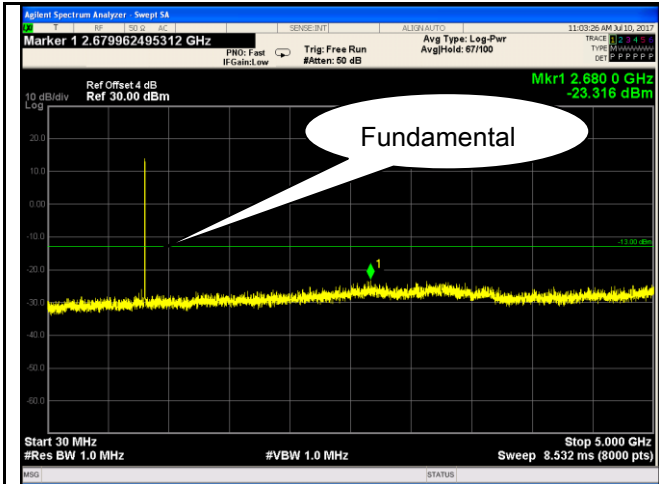


Band V - Low Channel-1

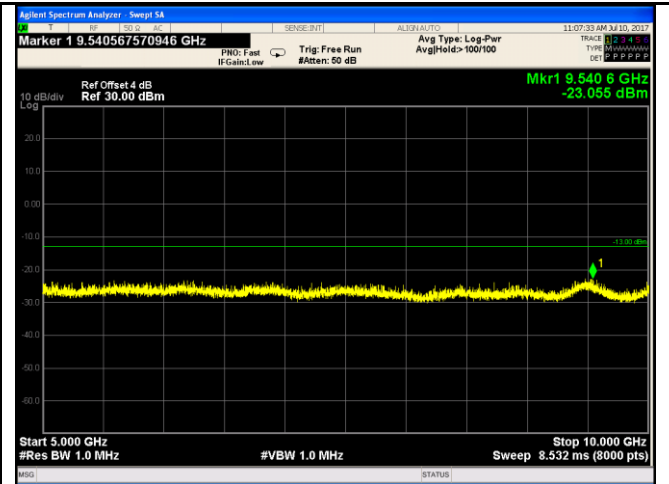


Band V - Low Channel-2

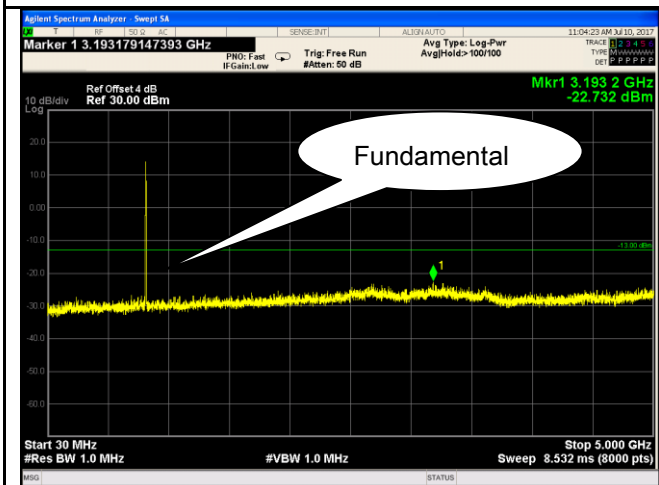


Band V - Middle Channel-1

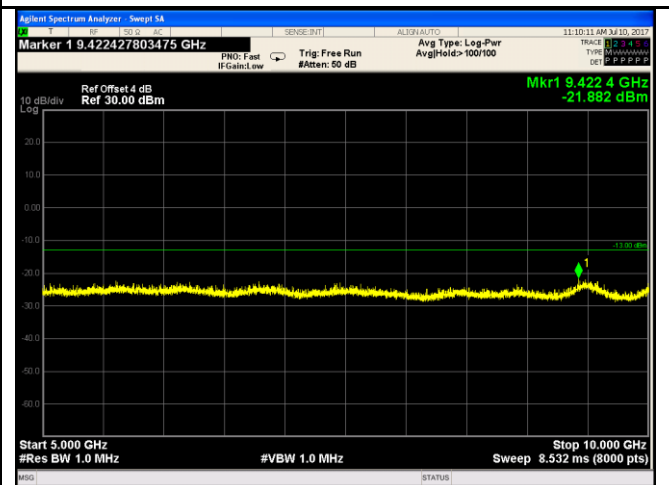

Band V - Middle Channel-2

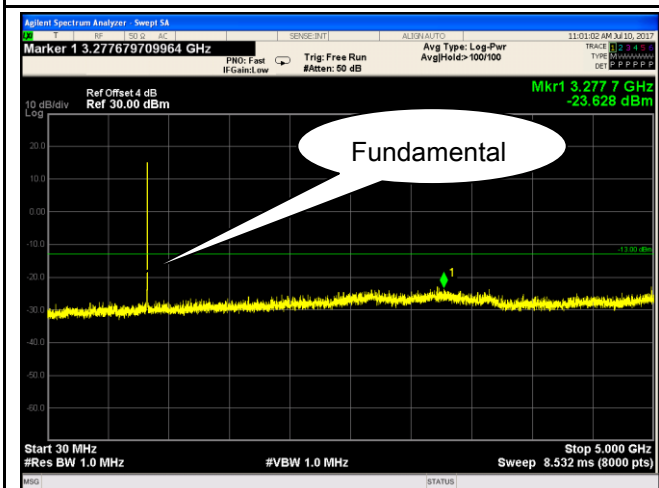

Band V - High Channel-1

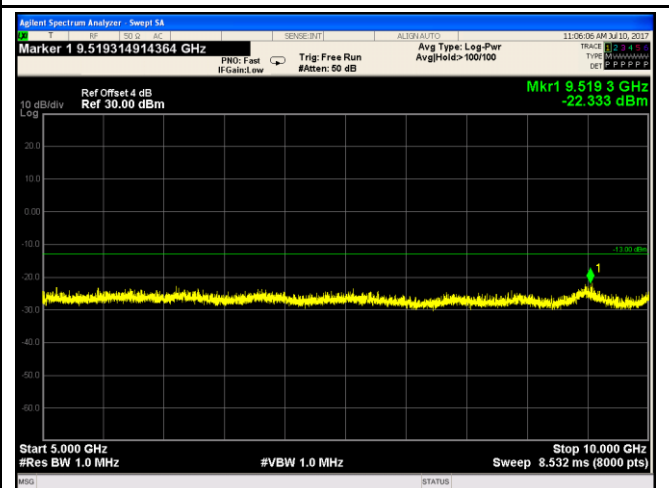

Band V - High Channel-2