
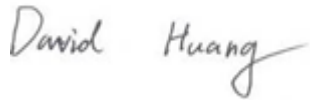



RF TEST REPORT



Report No.: 17070763-FCC-R1

Supersede Report No.: N/A

| | | |
|--|---|---|
| Applicant | BLU Products, Inc. | |
| Product Name | Mobile Phone | |
| Model No. | C5 LTE | |
| Serial No. | N/A | |
| Test Standard | FCC Part 22(H):2016 ;FCC Part 24(E):2016; ANSI/TIA-603-D: 2010 | |
| Test Date | October 16 to November 06, 2017 | |
| Issue Date | November 07, 2017 | |
| Test Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | |
| Equipment complied with the specification | <input checked="" type="checkbox"/> | |
| Equipment did not comply with the specification | <input type="checkbox"/> | |
|  |  |  |
| Loren Luo Test Engineer | David Huang Checked By | |
| This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only | | |

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

| Country/Region | Scope |
|----------------|------------------------------------|
| USA | EMC, RF/Wireless, SAR, Telecom |
| Canada | EMC, RF/Wireless, SAR, Telecom |
| Taiwan | EMC, RF, Telecom, SAR, Safety |
| Hong Kong | RF/Wireless, SAR, Telecom |
| Australia | EMC, RF, Telecom, SAR, Safety |
| Korea | EMI, EMS, RF, SAR, Telecom, Safety |
| Japan | EMI, RF/Wireless, SAR, Telecom |
| Singapore | EMC, RF, SAR, Telecom |
| Europe | EMC, RF, SAR, Telecom, Safety |

| | |
|-------------|-----------------|
| Test Report | 17070763-FCC-R1 |
| Page | 3 of 91 |

This page has been left blank intentionally.

CONTENTS

| | |
|--|----|
| 1. REPORT REVISION HISTORY..... | 5 |
| 2. CUSTOMER INFORMATION | 5 |
| 3. TEST SITE INFORMATION | 5 |
| 4. EQUIPMENT UNDER TEST (EUT) INFORMATION | 6 |
| 5. TEST SUMMARY | 9 |
| 6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS | 10 |
| 6.1 RF EXPOSURE (SAR) | 10 |
| 6.2 RF OUTPUT POWER | 11 |
| 6.3 PEAK-AVERAGE RATIO | 23 |
| 6.4 OCCUPIED BANDWIDTH..... | 28 |
| 6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 39 |
| 6.6 SPURIOUS RADIATED EMISSIONS | 52 |
| 6.7 BAND EDGE | 58 |
| 6.8 FREQUENCY STABILITY | 68 |
| ANNEX A. TEST INSTRUMENT | 72 |
| ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS | 74 |
| ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT | 87 |
| ANNEX C.II. EUT OPERATING CONKITIONS | 89 |
| ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST | 90 |
| ANNEX E. DECLARATION OF SIMILARITY..... | 91 |

1. Report Revision History

| Report No. | Report Version | Description | Issue Date |
|-----------------|----------------|-------------|-------------------|
| 17070763-FCC-R1 | NONE | Original | November 07, 2017 |
| | | | |
| | | | |
| | | | |
| | | | |

2. Customer information

| | |
|------------------|--|
| Applicant Name | BLU Products,Inc. |
| Applicant Add | 10814 NW 33rd St#100 Doral,FL33172,USA |
| Manufacturer | BLU Products,Inc. |
| Manufacturer Add | 10814 NW 33rd St#100 Doral,FL33172,USA |

3. Test site information

Test Lab A:

| | |
|----------------------|--|
| Lab performing tests | SIEMIC (Shenzhen-China) LABORATORIES |
| Lab Address | Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108 |
| FCC Test Site No. | 535293 |
| IC Test Site No. | 4842E-1 |
| Test Software | Radiated Emission Program-To Shenzhen v2.0 |

Test Lab B:

| | |
|----------------------|---|
| Lab performing tests | SIEMIC (Nanjing-China) Laboratories |
| Lab Address | 2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China |
| FCC Test Site No. | 694825 |
| IC Test Site No. | 4842B-1 |
| Test Software | EZ_EMG(ver.lcp-03A1) |

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

| | |
|-------------------------------|---|
| Description of EUT: | Mobile Phone |
| Main Model: | C5 LTE |
| Serial Model: | N/A |
| Date EUT received: | October 16, 2017 |
| Test Date(s): | October 16 to November 06, 2017 |
| Equipment Category : | PCE |
| Antenna Gain: | GSM850: 0.5dBi PCS1900: 0.8dBi UMTS-FDD Band V: 0.5dBi UMTS-FDD Band II: 0.8dBi LTE Band 5: 0.8dBi LTE Band 7: 1.2dBi Bluetooth/BLE: 0.5dBi WIFI: 0.5dBi GPS: 0.5dBi |
| Antenna Type: | PIFA antenna |
| Type of Modulation: | GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK LTE Band: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK FM: FM |
| RF Operating Frequency (ies): | GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; |

RX: 1932.4 ~ 1987.6 MHz

LTE Band 5 TX: 826.5 ~ 846.5 MHz; RX : 871.5 ~ 891.5 MHz

LTE Band 7 TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz

WIFI: 802.11b/g/n(20M): 2412-2462 MHz

WIFI: 802.11n(40M): 2422-2452 MHz

Bluetooth& BLE: 2402-2480 MHz

GPS: 1575.42 MHz

FM: 87.5 MHz - 108 MHz(RX)

GSM Vioce:GSM850: 32.35dBm

PCS1900: 29.73dBm

GPRS:GSM850: 32.34dBm

PCS1900: 29.72dBm

EGPRS:GSM850: 32.31dBm

PCS1900: 29.74dBm

Maximum Conducted

EGPRS(MSC5):GSM850: 25.85dBm

AV Power to Antenna:

PCS1900: 25.89dBm

RMC:UMTS-FDD Band V: 21.99dBm

UMTS-FDD Band II: 22.28dBm

HSUPA:UMTS-FDD Band V: 21.33dBm

UMTS-FDD Band II: 21.70dBm

HSDPA:UMTS-FDD Band V: 21.35dBm

UMTS-FDD Band II: 21.77dBm

GSM Vioce:GSM850: 30.70dBm / ERP

PCS1900: 30.53dBm / EIRP

GPRS:GSM850: 30.69dBm / ERP

PCS1900: 30.52dBm / EIRP

EGPRS(MCS5):GSM850: 24.21dBm / ERP

PCS1900: 26.69dBm / EIRP

ERP/EIRP:

RMC:UMTS-FDD Band V: 20.34dBm / ERP

UMTS-FDD Band II: 23.08dBm / EIRP

HSDPA:UMTS-FDD Band V: 19.70dBm / ERP

UMTS-FDD Band II: 22.57dBm / EIRP

HSUPA:UMTS-FDD Band V: 19.68dBm / ERP

UMTS-FDD Band II: 22.50dBm / EIRP

| | |
|------------------------------|---|
| Number of Channels: | GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V: 102CH UMTS-FDD Band II: 277CH WIFI :802.11b/g/n(20M): 11CH WIFI :802.11n(40M): 7CH Bluetooth: 79CH BLE: 40CH GPS:1CH |
| Port: | USB Port, Earphone Port |
| Input Power: | Adapter: Model: US-WW-1002 Input: AC100-240V~50/60Hz, 0.2A Output: DC 5.0V,1000mA Battery: Model: C775840200L Spec: 3.8V, 2000mAh, 7.60Wh |
| Trade Name : | BLU |
| GPRS/ EGPRS Multi-slot class | 8/10/11/12 |
| FCC ID: | YHLBLUC5LTE |

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

| FCC Rules | Description of Test | Result |
|---|--|------------|
| § 1.1307; § 2.1093 | RF Exposure (SAR) | Compliance |
| §2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10) ; | RF Output Power | Compliance |
| § 24.232 (d) ; | Peak-Average Ratio | Compliance |
| § 2.1049; § 22.905; § 22.917; § 24.238; | 99% & -26 dB Occupied Bandwidth | Compliance |
| § 2.1051; § 22.917(a); § 24.238(a); | Spurious Emissions at Antenna Terminal | Compliance |
| § 2.1053; § 22.917(a); § 24.238(a); | Field Strength of Spurious Radiation | Compliance |
| § 22.917(a); § 24.238(a); | Out of band emission, Band Edge | Compliance |
| § 2.1055; § 22.355; § 24.235; | Frequency stability vs. temperature Frequency stability vs. voltage | Compliance |

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

| Emissions | | |
|--|---|---------------|
| Test Item | Description | Uncertainty |
| Band Edge and Radiated Spurious Emissions | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +5.6dB/-4.5dB |
| - | - | - |

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass

The EUT is a portable device, thus requires SAR evaluation;


Please refer to RF Exposure Evaluation Report: 17070763-FCC-H.

6.2 RF Output Power

| | |
|----------------------|------------------|
| Temperature | 25 °C |
| Relative Humidity | 55% |
| Atmospheric Pressure | 1017mbar |
| Test date : | October 23, 2017 |
| Tested By : | Loren Luo |

Requirement(s):

| Spec | Item | Requirement | Applicable |
|-------------|------|--------------|-------------------------------------|
| §22.913 (a) | a) | ERP:38.45dBm | <input checked="" type="checkbox"/> |
| §24.232 (c) | b) | EIRP:33dBm | <input checked="" type="checkbox"/> |
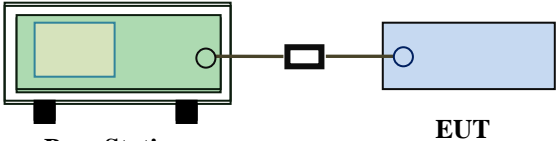
| | |
|------------|--|
| Test Setup |  <p style="text-align: center;">Base Station EUT</p> |
|------------|--|

| | |
|----------------|---|
| Test Procedure | <p>For Conducted Power:</p> <ul style="list-style-type: none"> - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. <p>For ERP/EIRP:</p> <p>According with KDB 971168 v02r02</p> <ul style="list-style-type: none"> - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental frequency was investigated. |
|----------------|---|

| | |
|--------|--|
| | <ul style="list-style-type: none"> - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. - Spurious emissions in dB = 10 log (TX power in Watts/0.001) – the absolute level - Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts). |
| Remark | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |

Test Data Yes N/A
 Test Plot Yes (See below) N/A

Conducted Power

GSM Mode:

| Burst Average Power (dBm); | | | | | | | | |
|--|--------|-------|--------------|------------------------|--------------|-------|--------|------------------------|
| Band | GSM850 | | | | PCS1900 | | | |
| Channel | 128 | 190 | 251 | Tune up Power tolerant | 512 | 661 | 810 | Tune up Power tolerant |
| Frequency (MHz) | 824.2 | 836.6 | 848.8 | / | 1850.2 | 1880 | 1909.8 | / |
| GSM Voice (1 uplink),GMSK | 32.14 | 32.31 | 32.35 | 32±1 | 29.73 | 29.65 | 29.61 | 29±1 |
| GPRS Multi-Slot Class 8 (1 uplink),GMSK | 32.13 | 32.31 | 32.34 | 32±1 | 29.72 | 29.63 | 29.62 | 29±1 |
| GPRS Multi-Slot Class 10 (2 uplink) GMSK | 31.23 | 31.41 | 31.47 | 31±1 | 28.86 | 28.77 | 28.79 | 28±1 |
| GPRS Multi-Slot Class 11 (3 uplink) GMSK | 29.32 | 29.51 | 29.58 | 29±1 | 27.08 | 26.98 | 27.01 | 27±1 |
| GPRS Multi-Slot Class 12 (4 uplink) GMSK | 28.21 | 28.44 | 28.51 | 28±1 | 25.86 | 25.8 | 25.88 | 25±1 |
| EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1 | 32.11 | 32.26 | 32.31 | 32±1 | 29.74 | 29.63 | 29.62 | 29±1 |
| EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1 | 31.21 | 31.41 | 31.45 | 31±1 | 28.84 | 28.73 | 28.76 | 28±1 |
| EGPRS Multi-Slot Class 11 (3 uplink) GMSK MCS1 | 29.32 | 29.5 | 29.57 | 29±1 | 27.06 | 26.99 | 27.02 | 27±1 |
| EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1 | 28.2 | 28.41 | 28.49 | 28±1 | 25.89 | 25.81 | 25.84 | 25±1 |
| EGPRS Multi-Slot Class 8 (1 uplink) 8PSK MCS5 | 25.59 | 25.67 | 25.85 | 25±1 | 25.89 | 25.81 | 24.92 | 25±1 |

| | | | | | | | | |
|--|-------|-------|-------|------|-------|-------|-------|------|
| EGPRS Multi-Slot Class 10 (2 uplink) 8PSK MCS5 | 24.49 | 24.62 | 24.85 | 24±1 | 24.45 | 24.12 | 23.89 | 24±1 |
| EGPRS Multi-Slot Class 11 (3 uplink) 8PSK MCS5 | 22.21 | 22.3 | 22.61 | 22±1 | 22.26 | 21.86 | 21.59 | 22±1 |
| EGPRS Multi-Slot Class 12 (4 uplink) 8PSK MCS5 | 20.91 | 20.96 | 21.15 | 21±1 | 21.04 | 20.71 | 20.49 | 21±1 |

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

EGPRS, MCS5 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

UMTS Mode:

UMTS-FDD Band V

| Band/ Time Slot configuration | Channel | Frequency | Average power (dBm) | Tune up Power tolerant |
|-------------------------------|---------|-----------|---------------------|------------------------|
| RMC 12.2kbps | 4132 | 826.4 | 21.99 | 22±1 |
| | 4175 | 835 | 21.89 | 22±1 |
| | 4233 | 846.6 | 21.58 | 22±1 |
| HSDPA Subtest1 | 4132 | 826.4 | 21.26 | 21±1 |
| | 4175 | 835 | 21.28 | 21±1 |
| | 4233 | 846.6 | 20.83 | 21±1 |
| HSDPA Subtest2 | 4132 | 826.4 | 21.35 | 21±1 |
| | 4175 | 835 | 21.22 | 21±1 |
| | 4233 | 846.6 | 21 | 21±1 |
| HSDPA Subtest3 | 4132 | 826.4 | 21.33 | 21±1 |
| | 4175 | 835 | 21.11 | 21±1 |
| | 4233 | 846.6 | 20.78 | 21±1 |
| HSDPA Subtest4 | 4132 | 826.4 | 21.28 | 21±1 |
| | 4175 | 835 | 21.3 | 21±1 |
| | 4233 | 846.6 | 20.85 | 21±1 |
| HSUPA Subtest1 | 4132 | 826.4 | 21.24 | 21±1 |
| | 4175 | 835 | 21.27 | 21±1 |
| | 4233 | 846.6 | 20.91 | 21±1 |
| HSUPA Subtest2 | 4132 | 826.4 | 21.31 | 21±1 |
| | 4175 | 835 | 21.18 | 21±1 |
| | 4233 | 846.6 | 20.88 | 21±1 |
| HSUPA Subtest3 | 4132 | 826.4 | 21.3 | 21±1 |
| | 4175 | 835 | 21.18 | 21±1 |
| | 4233 | 846.6 | 20.87 | 21±1 |
| HSUPA Subtest4 | 4132 | 826.4 | 21.16 | 21±1 |
| | 4175 | 835 | 21.07 | 21±1 |
| | 4233 | 846.6 | 20.82 | 21±1 |
| HSUPA Subtest5 | 4132 | 826.4 | 21.33 | 21±1 |
| | 4175 | 835 | 21.26 | 21±1 |
| | 4233 | 846.6 | 20.83 | 21±1 |

UMTS-FDD Band II

| Band/ Time Slot configuration | Channel | Frequency | Average power (dBm) | Tune up Power tolerant |
|-------------------------------|---------|-----------|---------------------|------------------------|
| RMC 12.2kbps | 9262 | 1852.4 | 22.24 | 22±1 |
| | 9400 | 1880 | 22.28 | 22±1 |
| | 9538 | 1907.6 | 22.2 | 22±1 |
| HSDPA Subtest1 | 9262 | 1852.4 | 21.6 | 21±1 |
| | 9400 | 1880 | 21.62 | 21±1 |
| | 9538 | 1907.6 | 21.54 | 21±1 |
| HSDPA Subtest2 | 9262 | 1852.4 | 21.58 | 21±1 |
| | 9400 | 1880 | 21.77 | 21±1 |
| | 9538 | 1907.6 | 21.55 | 21±1 |
| HSDPA Subtest3 | 9262 | 1852.4 | 21.51 | 21±1 |
| | 9400 | 1880 | 21.51 | 21±1 |
| | 9538 | 1907.6 | 21.48 | 21±1 |
| HSDPA Subtest4 | 9262 | 1852.4 | 21.63 | 21±1 |
| | 9400 | 1880 | 21.65 | 21±1 |
| | 9538 | 1907.6 | 21.47 | 21±1 |
| HSUPA Subtest1 | 9262 | 1852.4 | 21.44 | 21±1 |
| | 9400 | 1880 | 21.67 | 21±1 |
| | 9538 | 1907.6 | 21.52 | 21±1 |
| HSUPA Subtest2 | 9262 | 1852.4 | 21.32 | 21±1 |
| | 9400 | 1880 | 21.4 | 21±1 |
| | 9538 | 1907.6 | 21.27 | 21±1 |
| HSUPA Subtest3 | 9262 | 1852.4 | 21.61 | 21±1 |
| | 9400 | 1880 | 21.59 | 21±1 |
| | 9538 | 1907.6 | 21.57 | 21±1 |
| HSUPA Subtest4 | 9262 | 1852.4 | 21.49 | 21±1 |
| | 9400 | 1880 | 21.53 | 21±1 |
| | 9538 | 1907.6 | 21.29 | 21±1 |
| HSUPA Subtest5 | 9262 | 1852.4 | 21.7 | 21±1 |
| | 9400 | 1880 | 21.5 | 21±1 |
| | 9538 | 1907.6 | 21.48 | 21±1 |

ERP & EIRP

GSM Voice

ERP for Cellular Band (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 824.2 | 24.92 | V | 6.1 | 0.53 | 30.49 | 38.45 |
| 824.2 | 23.99 | H | 6.1 | 0.53 | 29.56 | 38.45 |
| 836.6 | 24.99 | V | 6.2 | 0.53 | 30.66 | 38.45 |
| 836.6 | 24.04 | H | 6.2 | 0.53 | 29.71 | 38.45 |
| 848.8 | 25.03 | V | 6.2 | 0.53 | 30.7 | 38.45 |
| 848.8 | 24.06 | H | 6.2 | 0.53 | 29.73 | 38.45 |

EIRP for PCS Band (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1850.2 | 23.37 | V | 7.88 | 0.72 | 30.53 | 33 |
| 1850.2 | 22.42 | H | 7.88 | 0.72 | 29.58 | 33 |
| 1880 | 23.29 | V | 7.88 | 0.72 | 30.45 | 33 |
| 1880 | 22.33 | H | 7.88 | 0.72 | 29.49 | 33 |
| 1909.8 | 23.27 | V | 7.86 | 0.72 | 30.41 | 33 |
| 1909.8 | 22.33 | H | 7.86 | 0.72 | 29.47 | 33 |

GPRS:

ERP for Cellular Band (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 824.2 | 24.91 | V | 6.1 | 0.53 | 30.48 | 38.45 |
| 824.2 | 23.97 | H | 6.1 | 0.53 | 29.54 | 38.45 |
| 836.6 | 24.99 | V | 6.2 | 0.53 | 30.66 | 38.45 |
| 836.6 | 24.06 | H | 6.2 | 0.53 | 29.73 | 38.45 |
| 848.8 | 25.02 | V | 6.2 | 0.53 | 30.69 | 38.45 |
| 848.8 | 24.08 | H | 6.2 | 0.53 | 29.75 | 38.45 |

EIRP for PCS Band (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1850.2 | 23.36 | V | 7.88 | 0.72 | 30.52 | 33 |
| 1850.2 | 22.42 | H | 7.88 | 0.72 | 29.58 | 33 |
| 1880 | 23.27 | V | 7.88 | 0.72 | 30.43 | 33 |
| 1880 | 22.33 | H | 7.88 | 0.72 | 29.49 | 33 |
| 1909.8 | 23.28 | V | 7.86 | 0.72 | 30.42 | 33 |
| 1909.8 | 22.34 | H | 7.86 | 0.72 | 29.48 | 33 |

EGPRS (MCS5):

ERP for Cellular Band (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 824.2 | 18.37 | V | 6.1 | 0.53 | 23.94 | 38.45 |
| 824.2 | 17.48 | H | 6.1 | 0.53 | 23.05 | 38.45 |
| 836.6 | 18.35 | V | 6.2 | 0.53 | 24.02 | 38.45 |
| 836.6 | 17.41 | H | 6.2 | 0.53 | 23.08 | 38.45 |
| 848.8 | 18.54 | V | 6.2 | 0.53 | 24.21 | 38.45 |
| 848.8 | 17.59 | H | 6.2 | 0.53 | 23.26 | 38.45 |

EIRP for PCS Band (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1850.2 | 19.53 | V | 7.88 | 0.72 | 26.69 | 33 |
| 1850.2 | 18.6 | H | 7.88 | 0.72 | 25.76 | 33 |
| 1880 | 19.45 | V | 7.88 | 0.72 | 26.61 | 33 |
| 1880 | 18.52 | H | 7.88 | 0.72 | 25.68 | 33 |
| 1909.8 | 18.58 | V | 7.86 | 0.72 | 25.72 | 33 |
| 1909.8 | 17.64 | H | 7.86 | 0.72 | 24.78 | 33 |

RMC

ERP for UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 826.4 | 14.77 | V | 6.1 | 0.53 | 20.34 | 38.45 |
| 826.4 | 12.86 | H | 6.1 | 0.53 | 18.43 | 38.45 |
| 835 | 14.57 | V | 6.2 | 0.53 | 20.24 | 38.45 |
| 835 | 12.62 | H | 6.2 | 0.53 | 18.29 | 38.45 |
| 846.6 | 14.26 | V | 6.2 | 0.53 | 19.93 | 38.45 |
| 846.6 | 12.35 | H | 6.2 | 0.53 | 18.02 | 38.45 |

EIRP for UMTS-FDD Band II (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1852.4 | 15.88 | V | 7.88 | 0.72 | 23.04 | 33 |
| 1852.4 | 13.97 | H | 7.88 | 0.72 | 21.13 | 33 |
| 1880 | 15.92 | V | 7.88 | 0.72 | 23.08 | 33 |
| 1880 | 14.03 | H | 7.88 | 0.72 | 21.19 | 33 |
| 1907.6 | 15.86 | V | 7.86 | 0.72 | 23 | 33 |
| 1907.6 | 13.94 | H | 7.86 | 0.72 | 21.08 | 33 |

HSDPA

ERP for UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 826.4 | 14.13 | V | 6.1 | 0.53 | 19.7 | 38.45 |
| 826.4 | 12.19 | H | 6.1 | 0.53 | 17.76 | 38.45 |
| 835 | 13.98 | V | 6.2 | 0.53 | 19.65 | 38.45 |
| 835 | 12.07 | H | 6.2 | 0.53 | 17.74 | 38.45 |
| 846.6 | 13.68 | V | 6.2 | 0.53 | 19.35 | 38.45 |
| 846.6 | 11.81 | H | 6.2 | 0.53 | 17.48 | 38.45 |

EIRP for UMTS-FDD Band II (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1852.4 | 15.24 | V | 7.88 | 0.72 | 22.4 | 33 |
| 1852.4 | 13.29 | H | 7.88 | 0.72 | 20.45 | 33 |
| 1880 | 15.41 | V | 7.88 | 0.72 | 22.57 | 33 |
| 1880 | 13.48 | H | 7.88 | 0.72 | 20.64 | 33 |
| 1907.6 | 15.21 | V | 7.86 | 0.72 | 22.35 | 33 |
| 1907.6 | 13.27 | H | 7.86 | 0.72 | 20.41 | 33 |

HSUPA

ERP for UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 826.4 | 14.11 | V | 6.1 | 0.53 | 19.68 | 38.45 |
| 826.4 | 12.17 | H | 6.1 | 0.53 | 17.74 | 38.45 |
| 835 | 13.95 | V | 6.2 | 0.53 | 19.62 | 38.45 |
| 835 | 12.01 | H | 6.2 | 0.53 | 17.68 | 38.45 |
| 846.6 | 13.59 | V | 6.2 | 0.53 | 19.26 | 38.45 |
| 846.6 | 11.64 | H | 6.2 | 0.53 | 17.31 | 38.45 |

EIRP for UMTS-FDD Band II (Part 24E)


| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1852.4 | 15.34 | V | 7.88 | 0.72 | 22.5 | 33 |
| 1852.4 | 13.38 | H | 7.88 | 0.72 | 20.54 | 33 |
| 1880 | 15.31 | V | 7.88 | 0.72 | 22.47 | 33 |
| 1880 | 13.37 | H | 7.88 | 0.72 | 20.53 | 33 |
| 1907.6 | 15.23 | V | 7.86 | 0.72 | 22.37 | 33 |
| 1907.6 | 13.28 | H | 7.86 | 0.72 | 20.42 | 33 |

6.3 Peak-Average Ratio

| | |
|----------------------|------------------|
| Temperature | 25°C |
| Relative Humidity | 55% |
| Atmospheric Pressure | 1017mbar |
| Test date : | October 23, 2017 |
| Tested By : | Loren Luo |

Requirement(s):

| Spec | Item | Requirement | Applicable |
|------------|------|--|-------------------------------------|
| §24.232(d) | a) | The peak-to-average ratio (PAR) of the transmission may not exceed 13dB. | <input checked="" type="checkbox"/> |
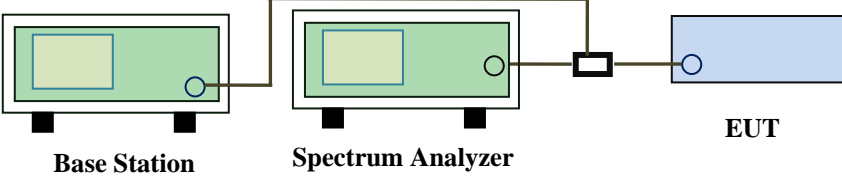
| | |
|------------|---|
| Test Setup |  <p>The diagram shows a test setup where a Base Station (green box) is connected to a Spectrum Analyzer (green box), which is then connected to an EUT (blue box). The connections are made via cables and a small black component, likely a coupler or adapter.</p> |
|------------|---|

| | |
|----------------|--|
| Test Procedure | <p>According with KDB 971168 v02r02</p> <p>5.7.2 Alternate procedure for PAPR</p> <p>5.1.2 Peak power measurements with a peak power meter</p> <p>The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.</p> <p>5.2.3 Average power measurement with average power meter</p> <p>As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions</p> <p>If the EUT can be configured to transmit continuously (i.e., the burst duty cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output</p> |
|----------------|--|

| | |
|-------------|-----------------|
| Test Report | 17070763-FCC-R1 |
| Page | 24 of 91 |

| | |
|--------|---|
| | <p>power level, then a conventional wide-band RF power meter can be used.</p> <p>If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle < 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$</p> |
| Remark | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |

Test Data Yes N/A
Test Plot Yes (See below) N/A

GSM : GSM 1900 PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1850.2 | 30.77 | 29.73 | 1.04 |
| 1880 | 30.68 | 29.65 | 1.03 |
| 1909.8 | 30.75 | 29.72 | 1.03 |

GPRS 1900 PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1850.2 | 30.79 | 29.72 | 1.07 |
| 1880 | 30.66 | 29.63 | 1.03 |
| 1909.8 | 30.22 | 29.62 | 0.6 |

EGPRS (MSC5) 1900 PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1850.2 | 26.9 | 25.89 | 1.01 |
| 1880 | 26.91 | 25.81 | 1.1 |
| 1909.8 | 26.88 | 24.92 | 1.96 |

RMC : UMTS-FDD Band II PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1852.4 | 23.31 | 22.24 | 1.07 |
| 1880 | 23.29 | 22.28 | 1.01 |
| 1907.6 | 23.21 | 22.2 | 1.01 |

UMTS-FDD Band IV PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1712.6 | 22.96 | 21.99 | 0.97 |
| 1732.6 | 22.59 | 21.89 | 0.7 |
| 1752.4 | 22.46 | 21.58 | 0.88 |

HSUPA : UMTS-FDD Band II PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1852.4 | 22.23 | 21.32 | 0.91 |
| 1880 | 22.2 | 21.4 | 0.8 |
| 1907.6 | 22.19 | 21.27 | 0.92 |

UMTS-FDD Band IV PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1712.6 | 22.16 | 21.24 | 0.92 |
| 1732.6 | 22.14 | 21.27 | 0.87 |
| 1752.4 | 21.99 | 20.91 | 1.08 |

HSDPA : UMTS-FDD Band II PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1852.4 | 22.61 | 21.6 | 1.01 |
| 1880 | 22.6 | 21.62 | 0.98 |
| 1907.6 | 22.53 | 21.54 | 0.99 |


UMTS-FDD Band IV PK-AV POWER (PART 24E)

| Frequency (MHz) | Conducted power(dBm) | | Peak-Average Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
| | Peak | Average | |
| 1712.6 | 22.13 | 21.26 | 0.87 |
| 1732.6 | 22.06 | 21.28 | 0.78 |
| 1752.4 | 21.92 | 20.83 | 1.09 |

6.4 Occupied Bandwidth

| | |
|----------------------|------------------|
| Temperature | 25 °C |
| Relative Humidity | 57% |
| Atmospheric Pressure | 1024mbar |
| Test date : | October 24, 2017 |
| Tested By : | Loren Luo |

Requirement(s):
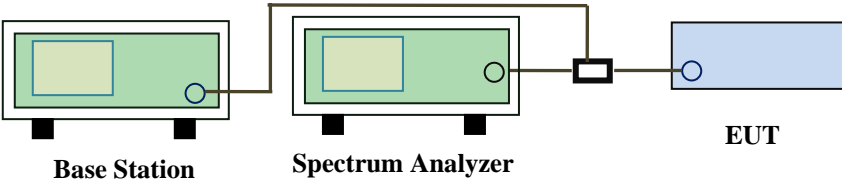
| Spec | Item | Requirement | Applicable |
|--|--|-----------------------------|-------------------------------------|
| §2.1049, §22.917, §22.905 §24.238 | a) | 99% Occupied Bandwidth(kHz) | <input checked="" type="checkbox"/> |
| | b) | 26 dB Bandwidth(kHz) | <input checked="" type="checkbox"/> |
| Test Setup |  <p style="text-align: center;">Base Station Spectrum Analyzer EUT</p> | | |
| Test Procedure | <ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers. | | |
| Remark | | | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | | |

Test Data Yes N/A

Test Plot Yes (See below) N/A

GSM Voice:

Cellular Band (Part 22H) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 128 | 824.2 | 243.5132 | 324.718 |
| 190 | 836.6 | 247.8077 | 321.497 |
| 251 | 848.8 | 247.1068 | 324.251 |

PCS Band (Part 24E) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 512 | 1850 | 248.1086 | 320.553 |
| 661 | 1880 | 245.2185 | 319.342 |
| 810 | 1910 | 243.2395 | 316.643 |

GPRS:

Cellular Band (Part 22H) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 128 | 824.2 | 242.8113 | 322.939 |
| 190 | 836.6 | 248.8921 | 321.692 |
| 251 | 848.8 | 247.1224 | 317.843 |

PCS Band (Part 24E) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 512 | 1850 | 247.6887 | 320.070 |
| 661 | 1880 | 245.1655 | 319.342 |
| 810 | 1910 | 242.0800 | 316.643 |

EGPRS (MSC 5):

Cellular Band (Part 22H) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 128 | 824.2 | 244.6378 | 322.939 |
| 190 | 836.6 | 246.6182 | 322.310 |
| 251 | 848.8 | 247.5086 | 317.843 |

PCS Band (Part 24E) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 512 | 1850 | 246.6291 | 320.860 |
| 661 | 1880 | 245.0824 | 319.342 |
| 810 | 1910 | 243.6537 | 318.374 |

RMC:

UMTS-FDD Band V (Part 22H)

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 4132 | 826.6 | 4.2033 | 4.886 |
| 4175 | 835.0 | 4.2038 | 4.896 |
| 4233 | 846.4 | 4.1981 | 4.880 |

UMTS-FDD Band II (Part 24E)

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 9262 | 1853 | 4.2016 | 4.858 |
| 9400 | 1880 | 4.2083 | 4.879 |
| 9538 | 1907 | 4.2193 | 4.878 |

HSDPA:

UMTS-FDD Band V (Part 22H)

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 4132 | 826.6 | 4.2091 | 4.886 |
| 4175 | 835.0 | 4.2084 | 4.893 |
| 4233 | 846.4 | 4.2069 | 4.888 |

UMTS-FDD Band II (Part 24E)

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 9262 | 1853 | 4.1978 | 4.854 |
| 9400 | 1880 | 4.2060 | 4.853 |
| 9538 | 1907 | 4.2162 | 4.881 |

HSUPA:

UMTS-FDD Band V (Part 22H)


| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 4132 | 826.6 | 4.2055 | 4.886 |
| 4175 | 835.0 | 4.2053 | 4.896 |
| 4233 | 846.4 | 4.2036 | 4.880 |

UMTS-FDD Band II (Part 24E)


| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 9262 | 1853 | 4.2004 | 4.858 |
| 9400 | 1880 | 4.2074 | 4.854 |
| 9538 | 1907 | 4.2180 | 4.878 |

Test Plots


GSM Voice:

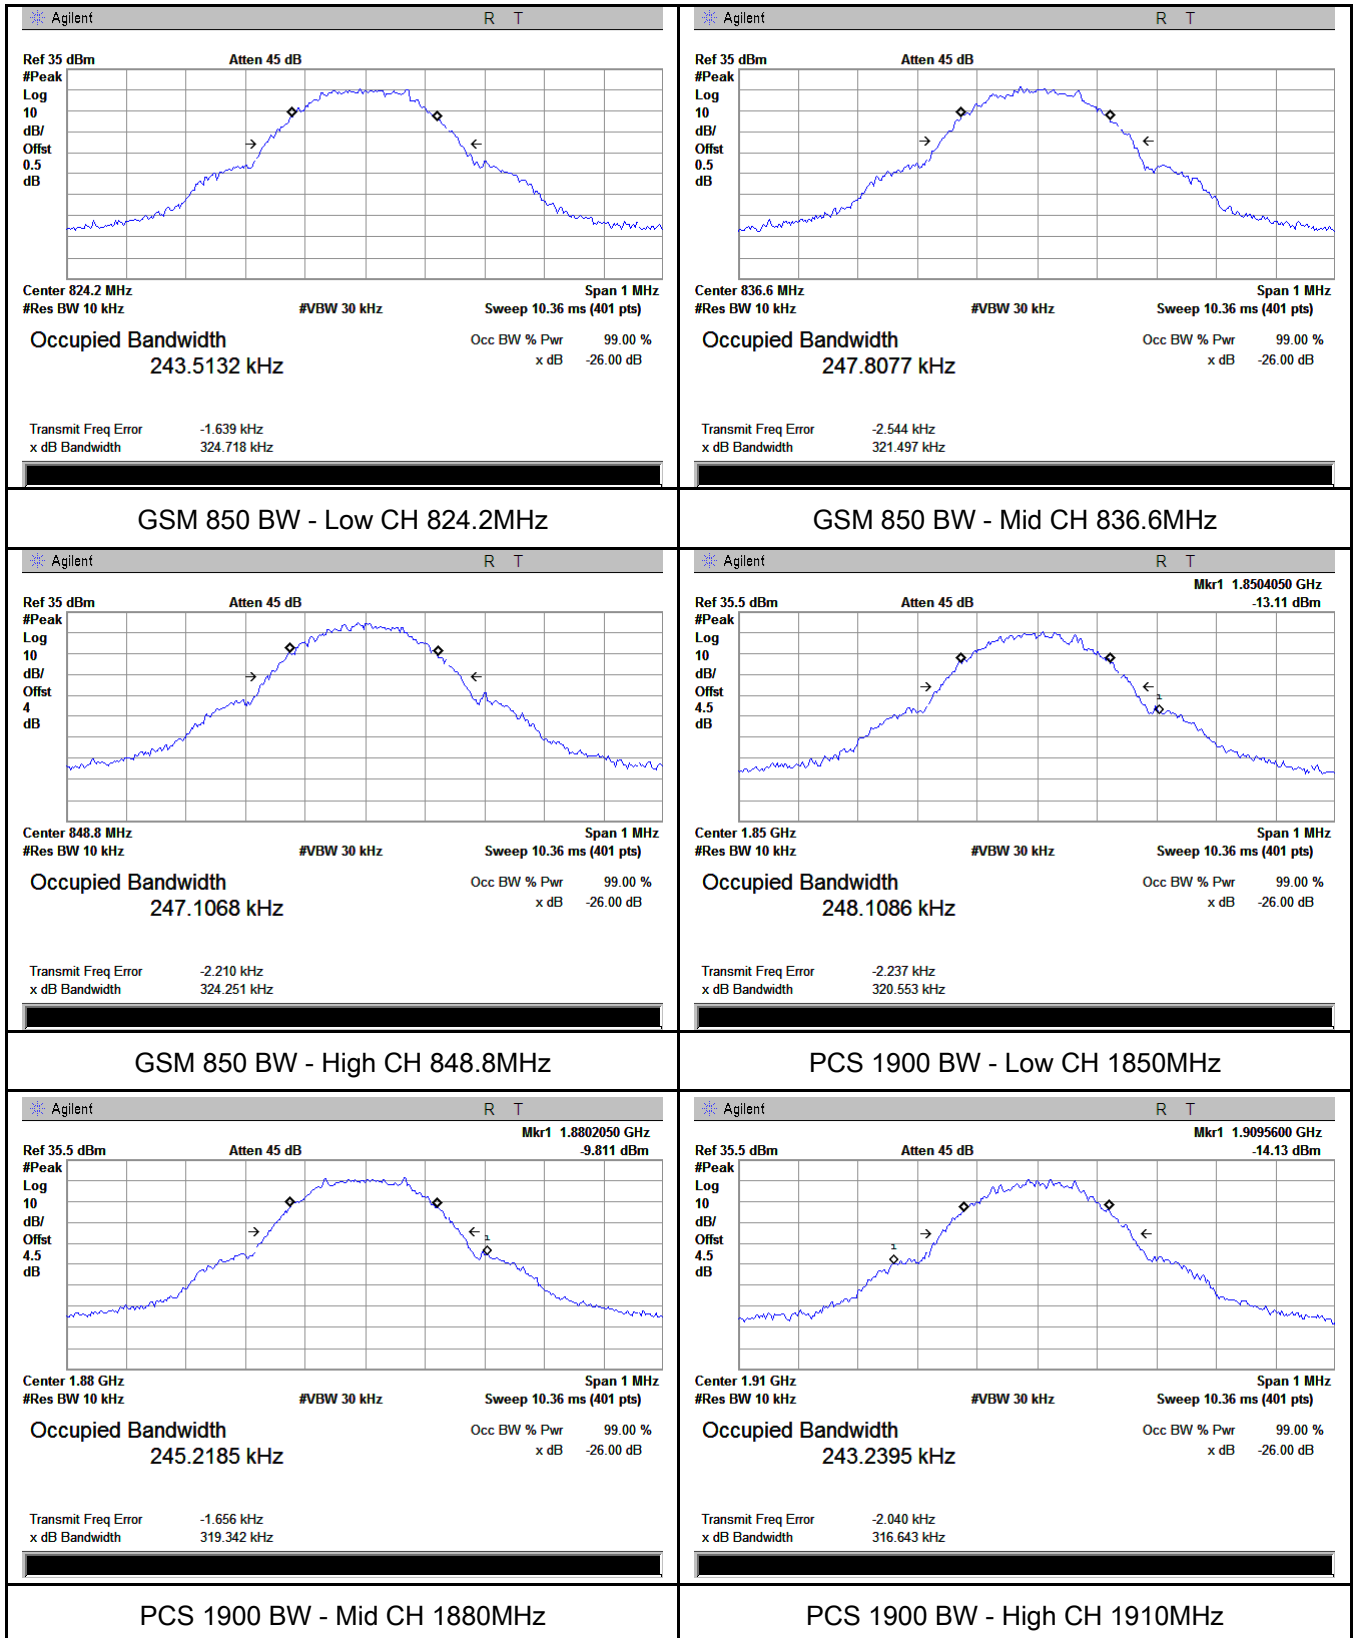


GPRS:

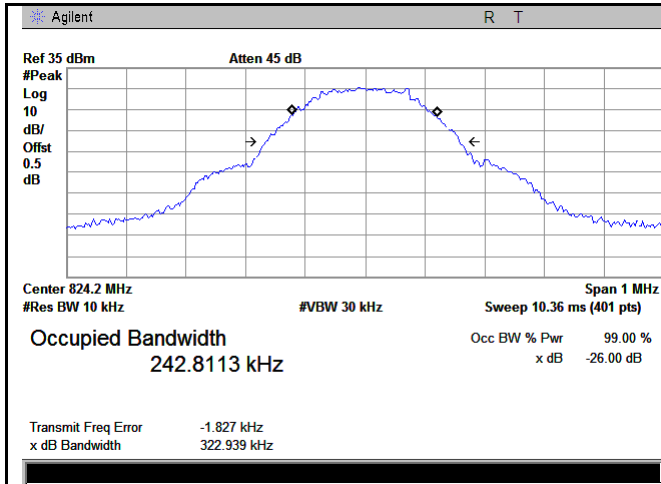


GSM 850 BW - Low CH 824.2MHz

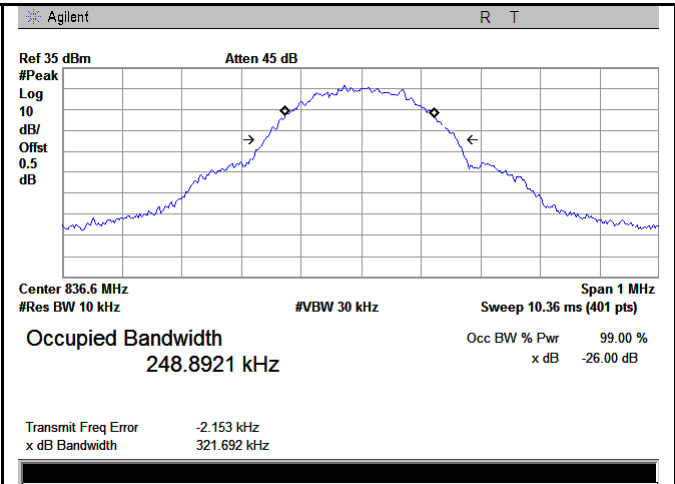


GSM 850 BW - Mid CH 836.6MHz

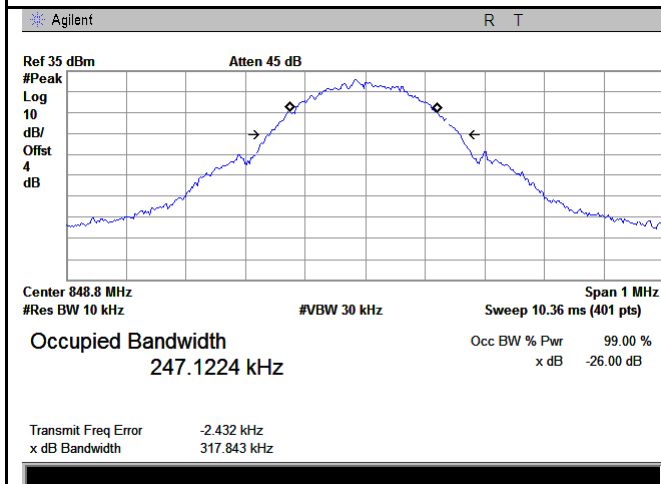


GSM 850 BW - High CH 848.8MHz

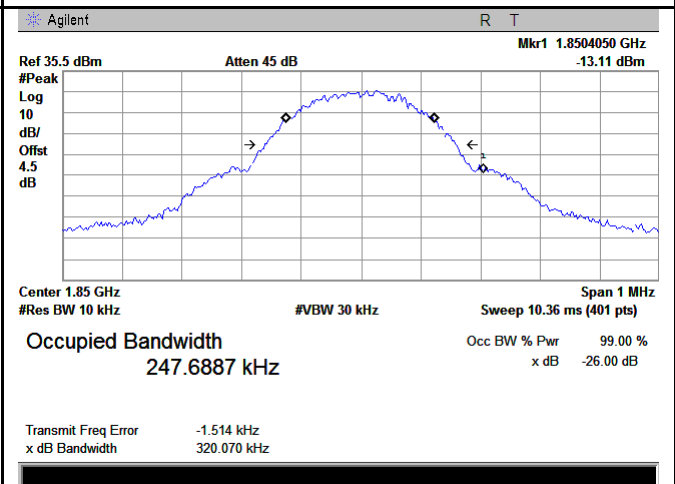

PCS 1900 BW - Low CH 1850MHz

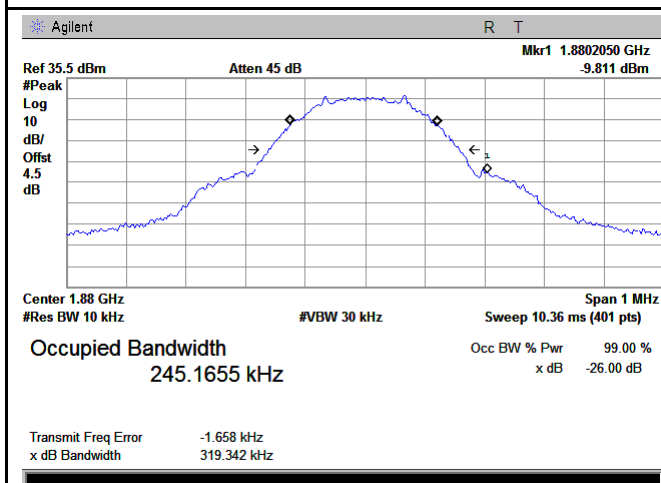


PCS 1900 BW - Mid CH 1880MHz

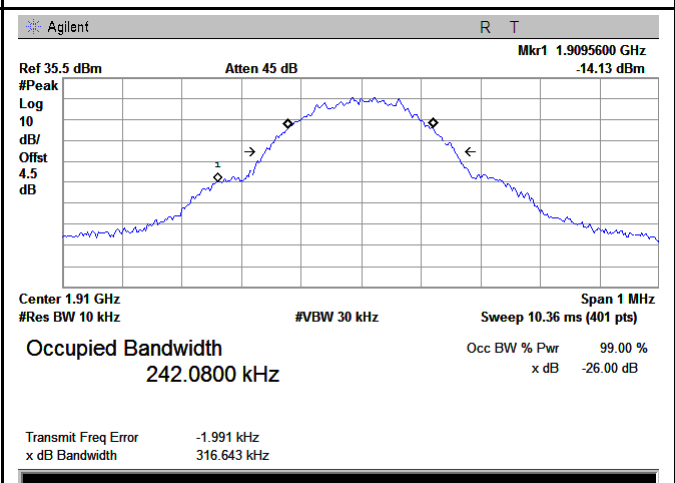


PCS 1900 BW - High CH 1910MHz


EGPRS (MCS5):

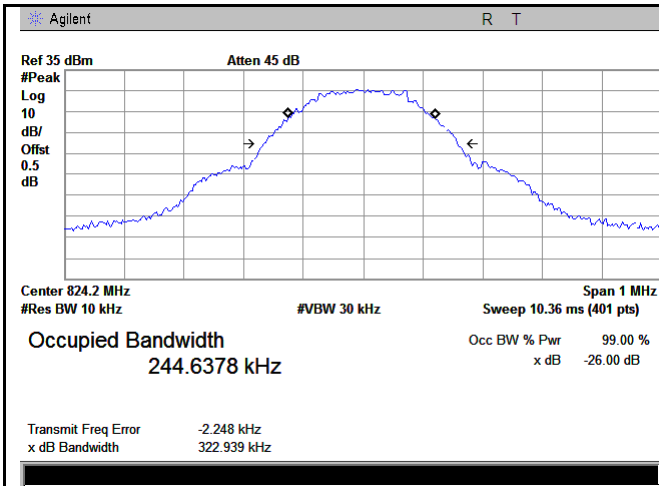


GSM 850 BW - Low CH 824.2MHz

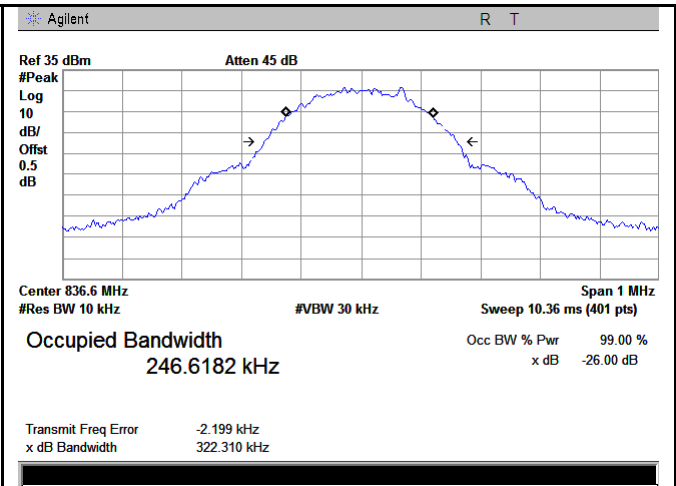


GSM 850 BW - Mid CH 836.6MHz

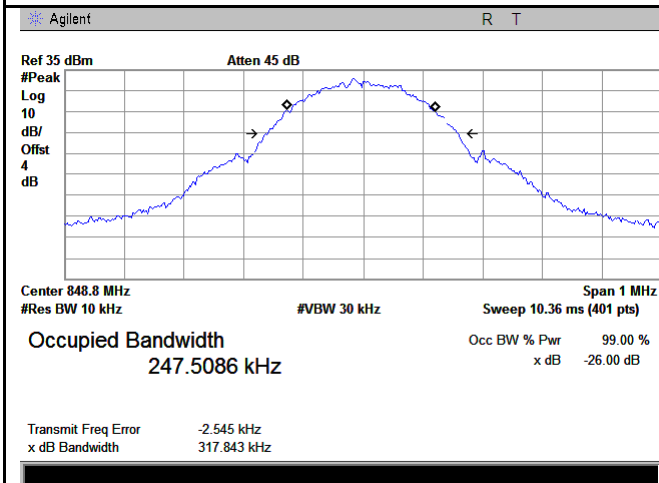


GSM 850 BW - High CH 848.8MHz

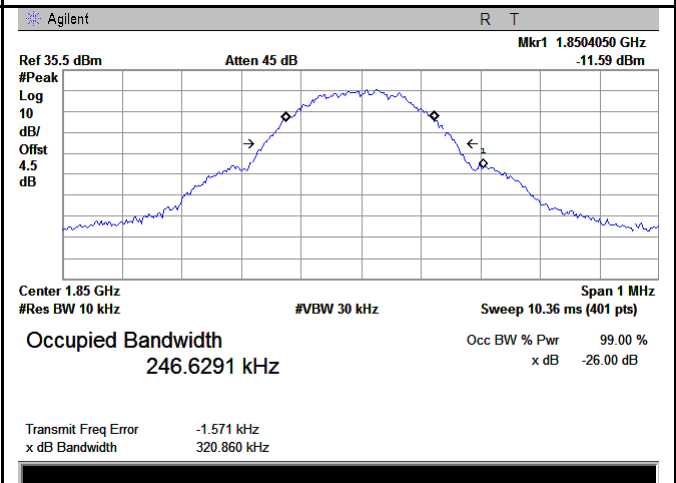

PCS 1900 BW - Low CH 1850MHz

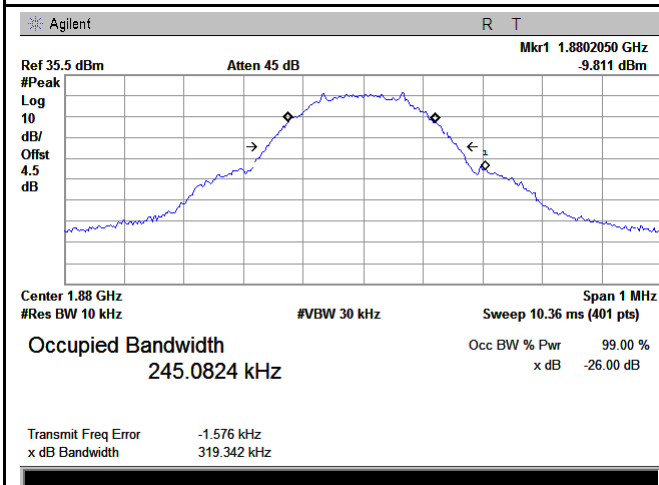


PCS 1900 BW - Mid CH 1880MHz

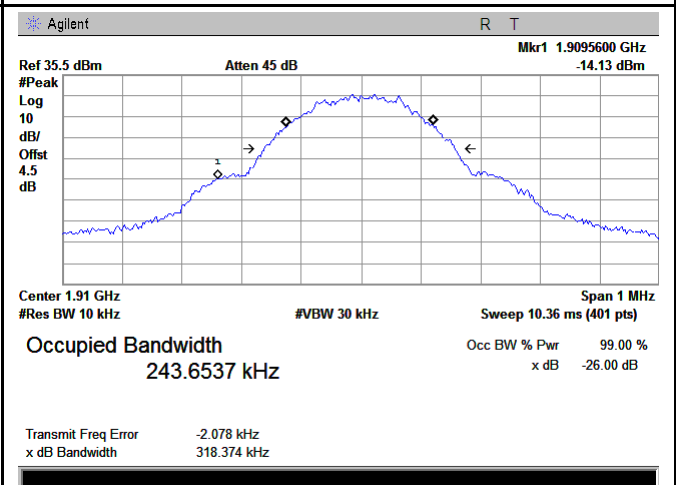


PCS 1900 BW - High CH 1910MHz


RMC:

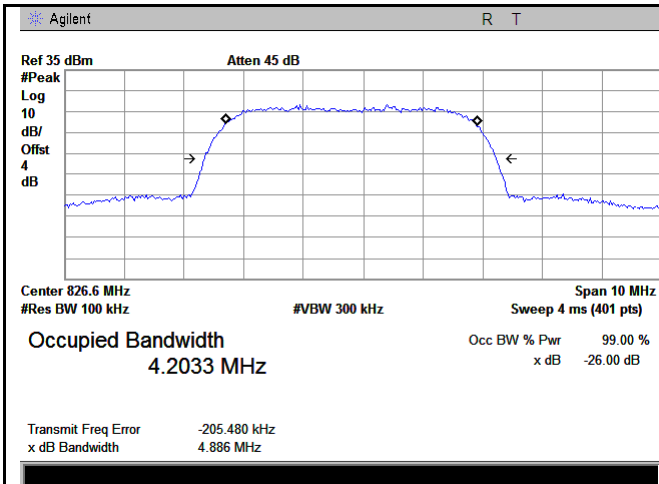


Band V BW - Low CH 826.6 MHz

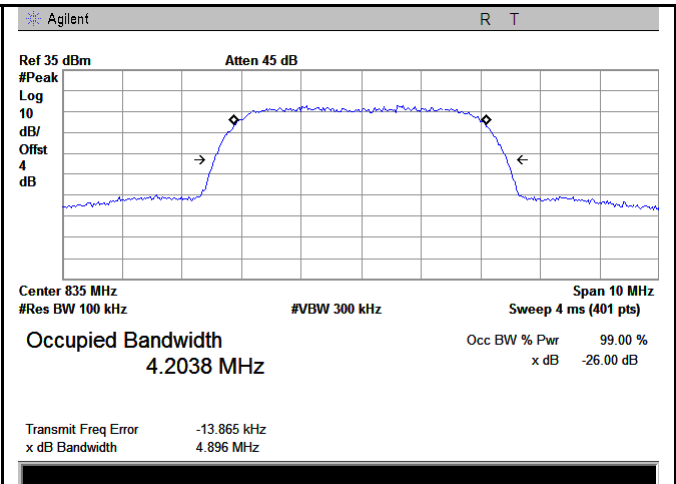


Band V BW - Mid CH 835.0 MHz

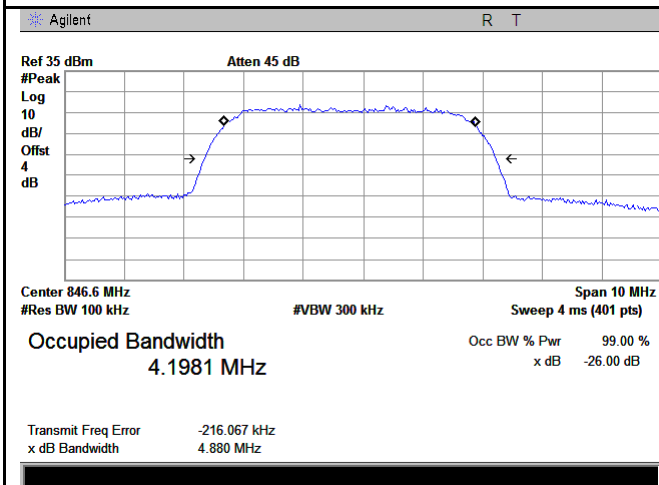


Band V BW - High CH 846.4 MHz

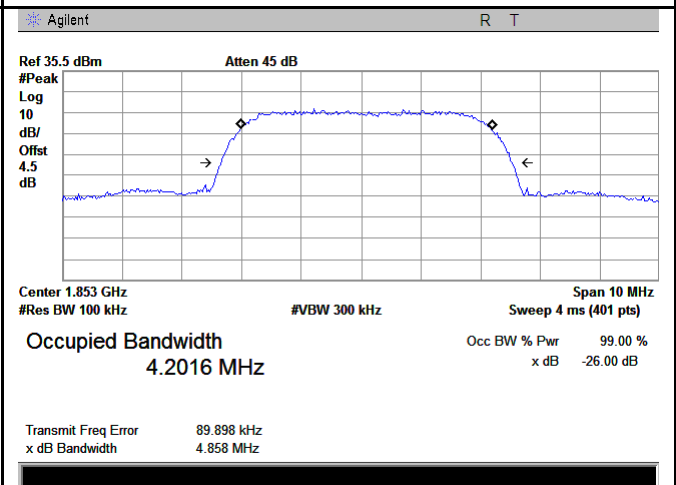

Band II BW - Low CH 1853MHz

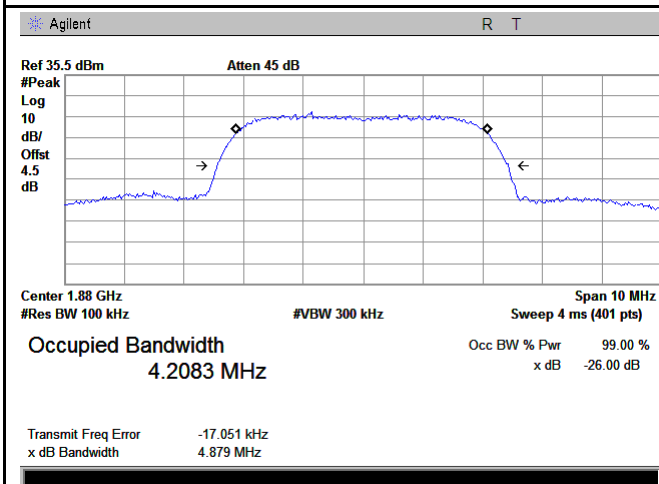


Band II BW - Mid CH 1880MHz

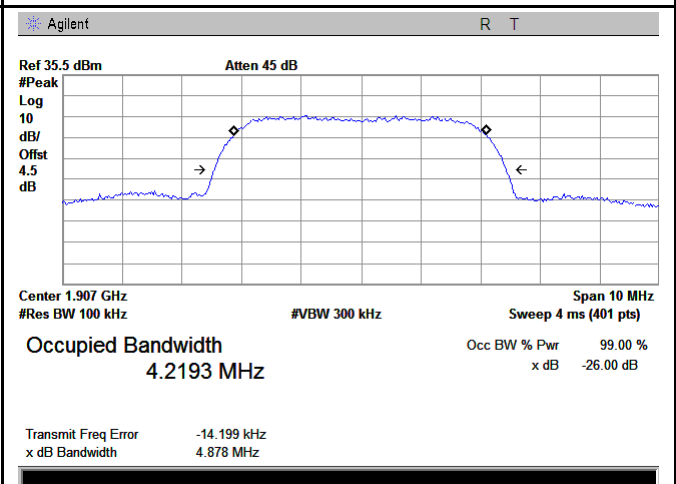


Band II BW - High CH 1907MHz


HSDPA:

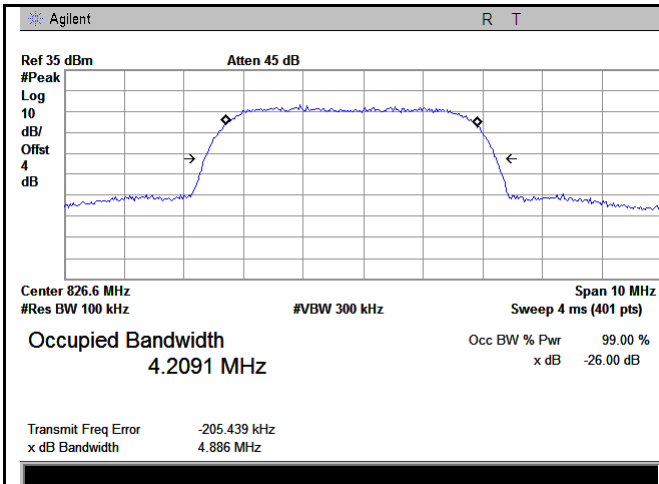


Band V BW - Low CH 826.6 MHz

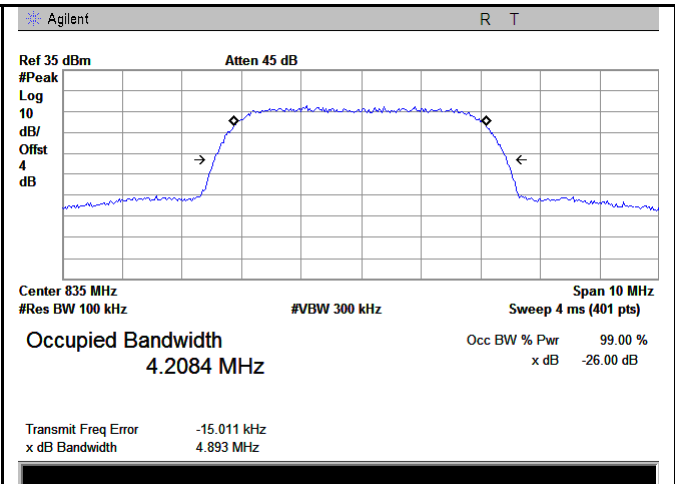


Band V BW - Mid CH 835.0 MHz

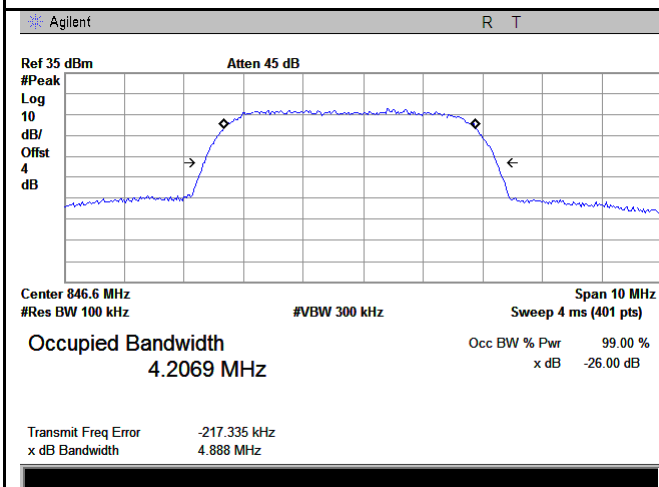


Band V BW - High CH 846.4 MHz

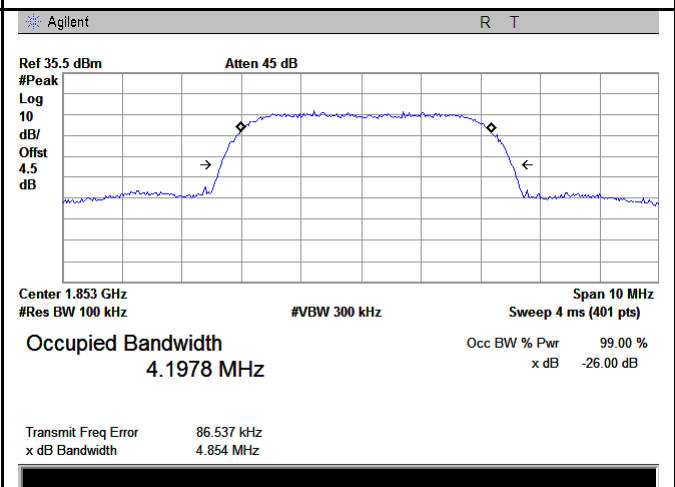

Band II BW - Low CH 1853MHz

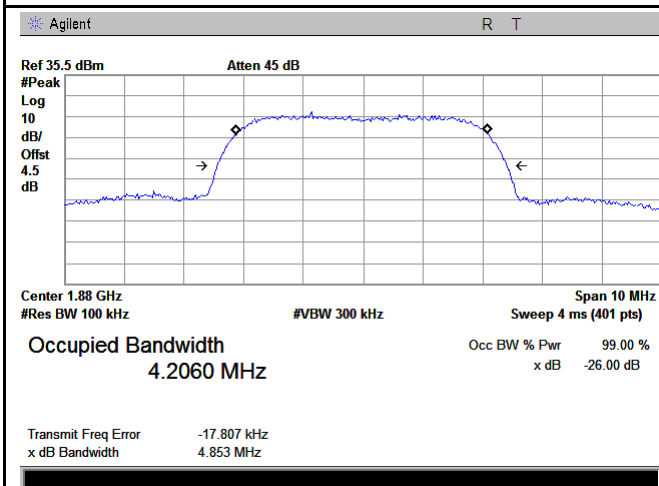


Band II BW - Mid CH 1880MHz

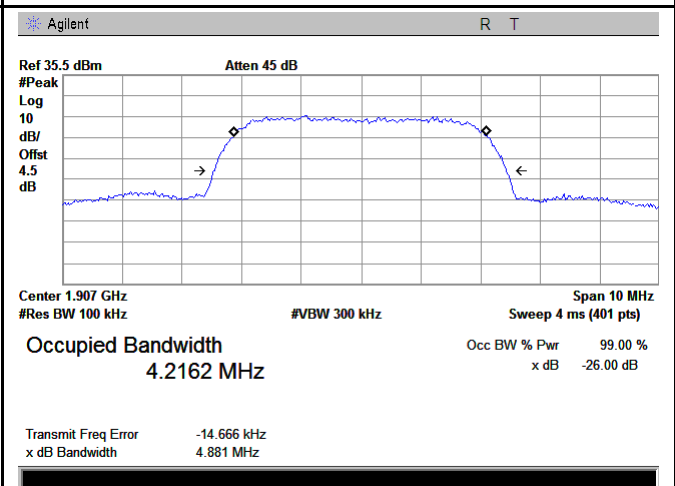


Band II BW - High CH 1907MHz


HSUPA:

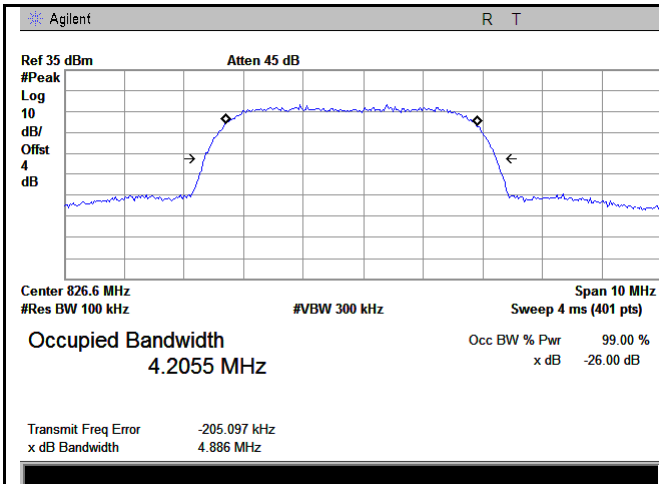


Band V BW - Low CH 826.6 MHz

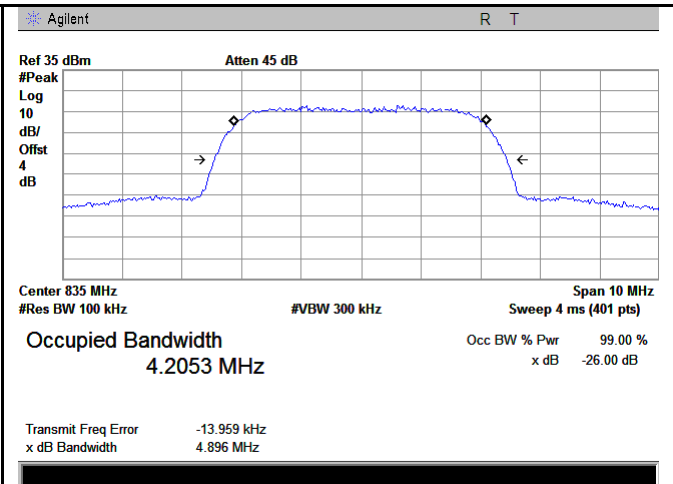


Band V BW - Mid CH 835.0 MHz

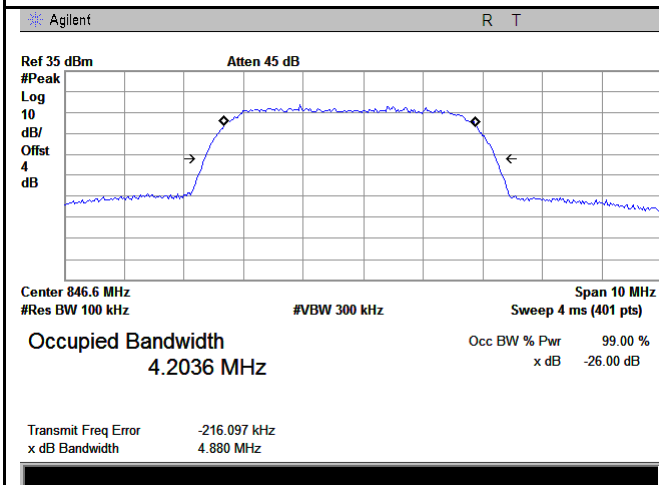


Band V BW - High CH 846.4 MHz

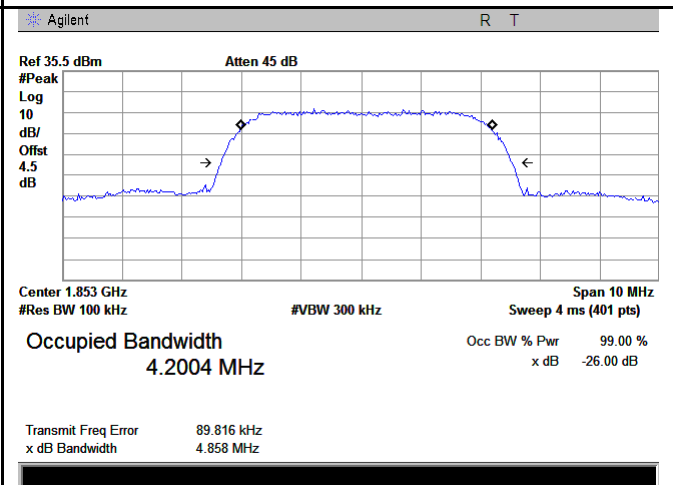

Band II BW - Low CH 1853MHz

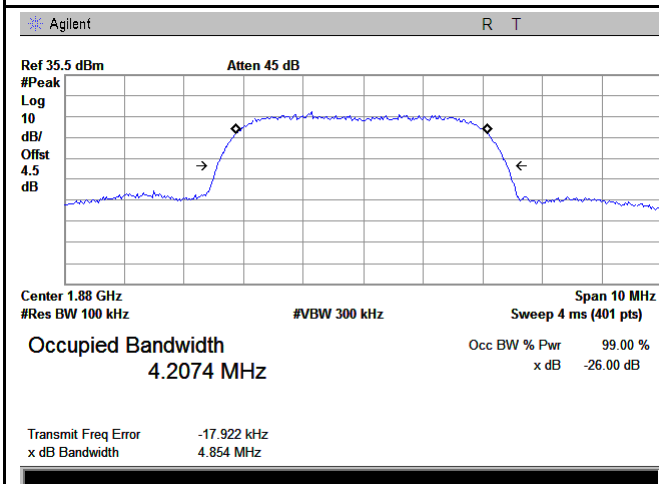

Band II BW - Mid CH 1880MHz

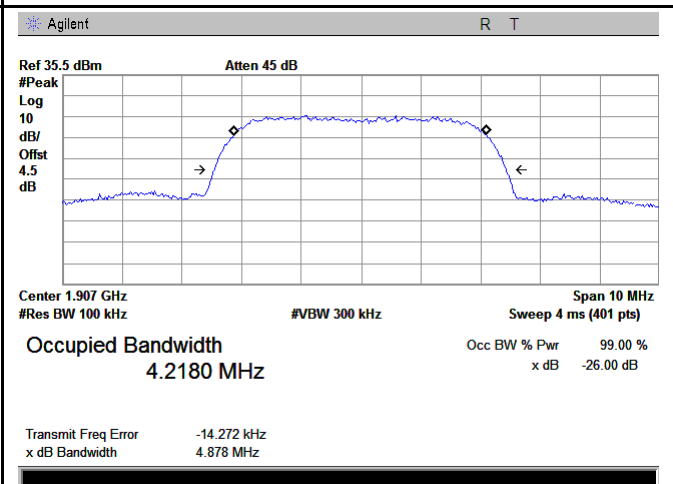


Band II BW - High CH 1907MHz

6.5 Spurious Emissions at Antenna Terminals

| | |
|----------------------|------------------|
| Temperature | 25 °C |
| Relative Humidity | 57% |
| Atmospheric Pressure | 1024mbar |
| Test date : | October 24, 2017 |
| Tested By : | Loren Luo |

Requirement(s):

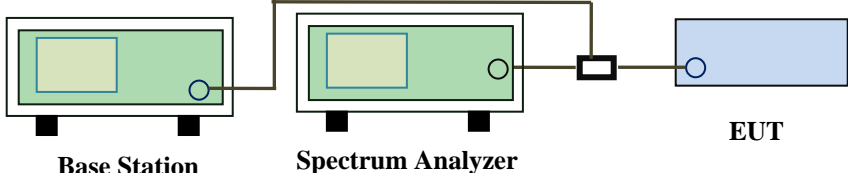
| Spec | Item | Requirement | Applicable |
|---------------------------------------|--|---|-------------------------------------|
| §2.1051, §22.917(a)& §24.238(a) | a) | The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB | <input checked="" type="checkbox"/> |
| Test Setup |  <p style="text-align: center;">Base Station Spectrum Analyzer EUT</p> | | |
| Test Procedure | <ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100. | | |
| Remark | | | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | | |

Test Data Yes N/A
 Test Plot Yes (See below) N/A


Test Plots

GSM Voice:


Cellular Band (Part 22H) result

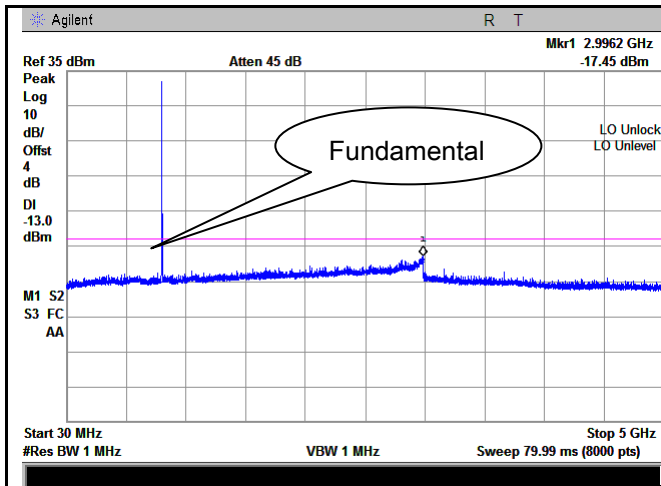


GSM 850 - Low Channel-1

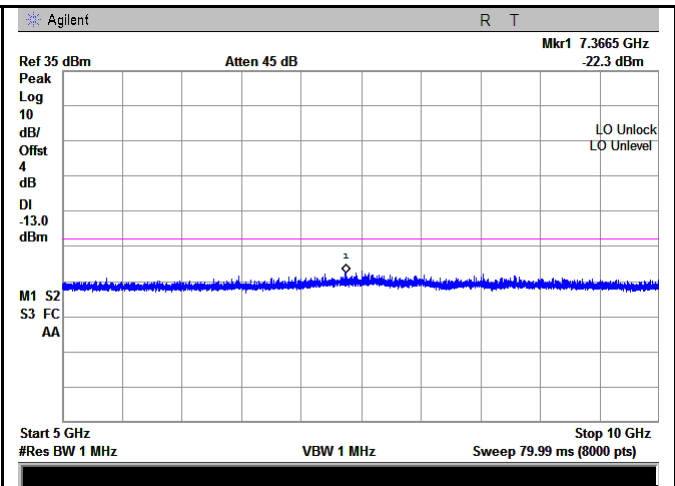


GSM 850 - Low Channel-2

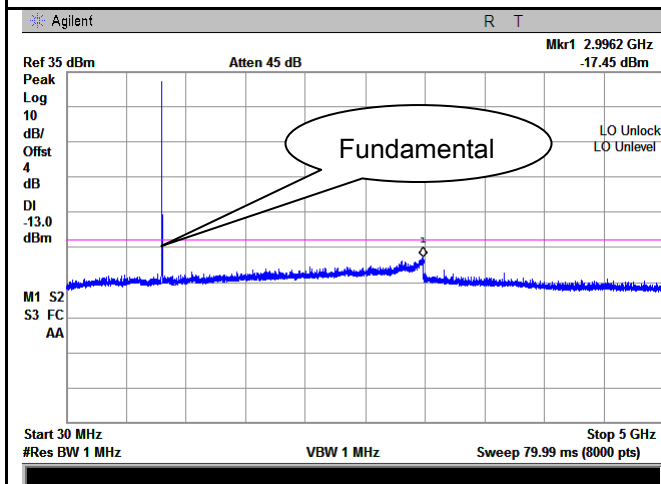


GSM 850 Middle Channel-1

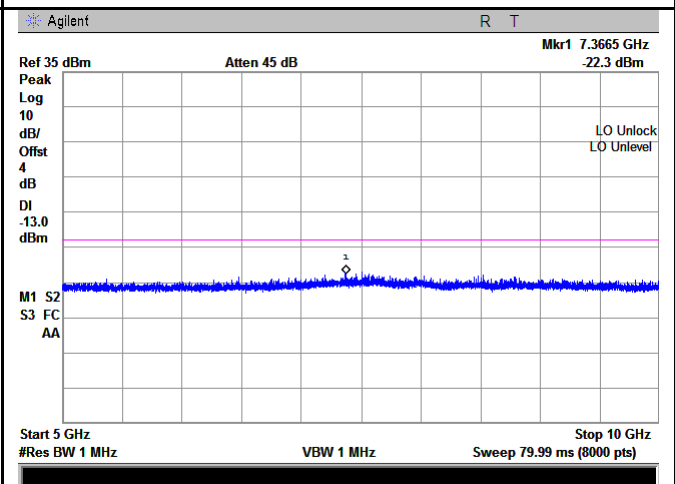

GSM 850 Middle Channel-2

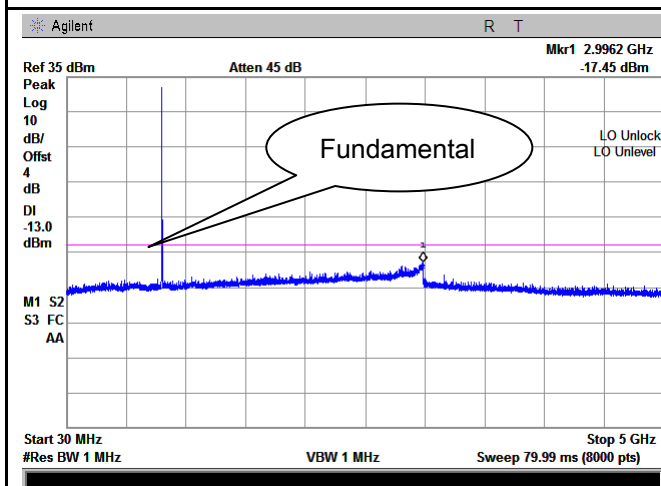


GSM 850 - High Channel-1

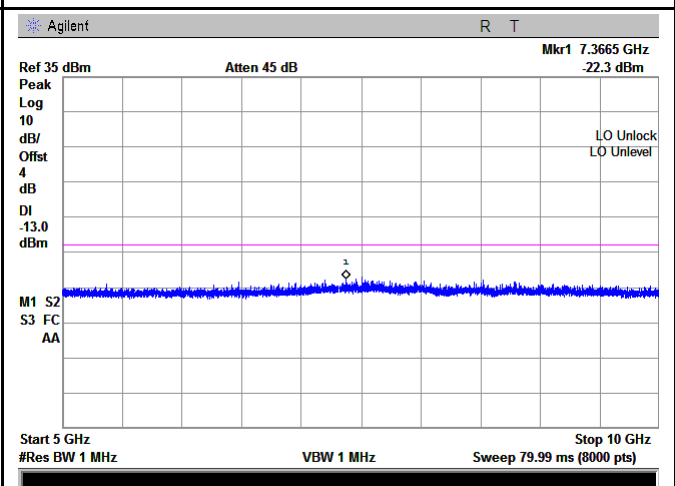


GSM 850 - High Channel-2


PCS Band (Part24E) result

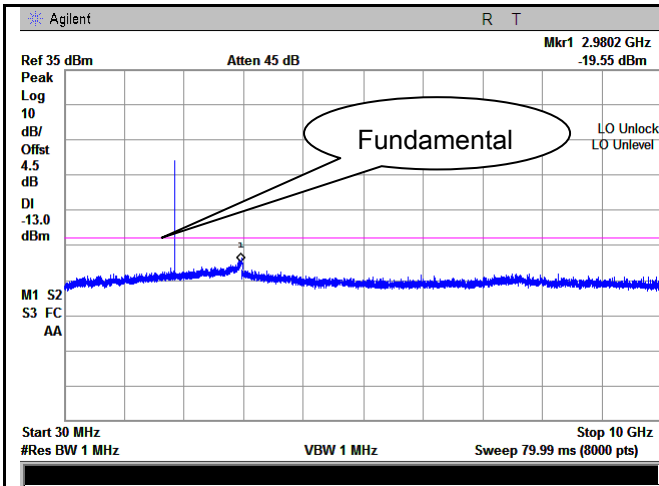


PCS1900 - Low Channel-1

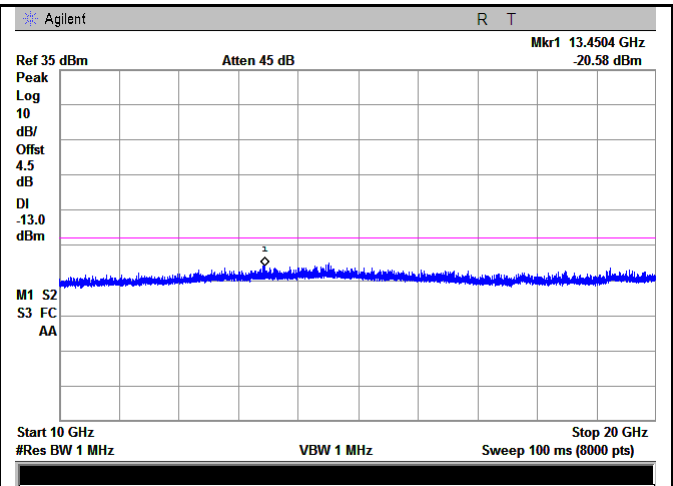


PCS 1900 - Low Channel-2

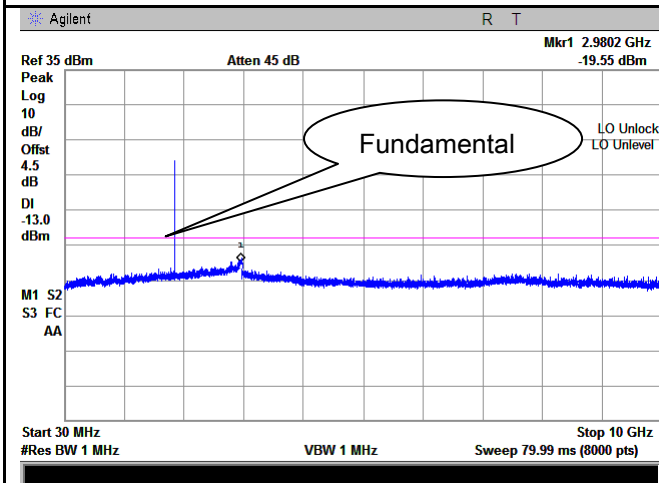


PCS1900 - Middle Channel-1

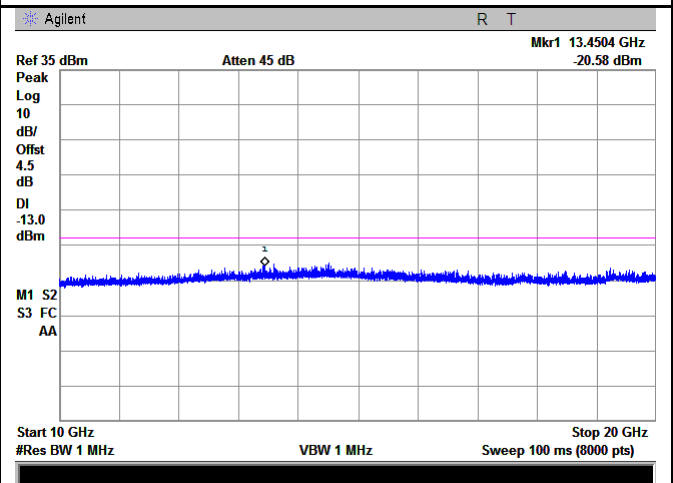

PCS 1900 - Middle Channel-2

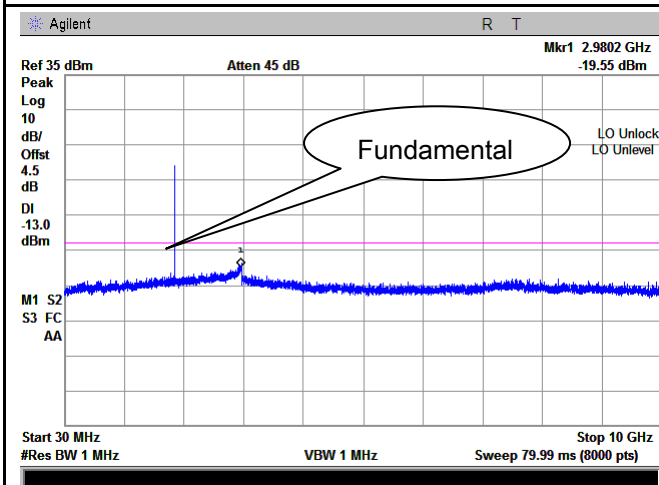


PCS1900 - High Channel-1

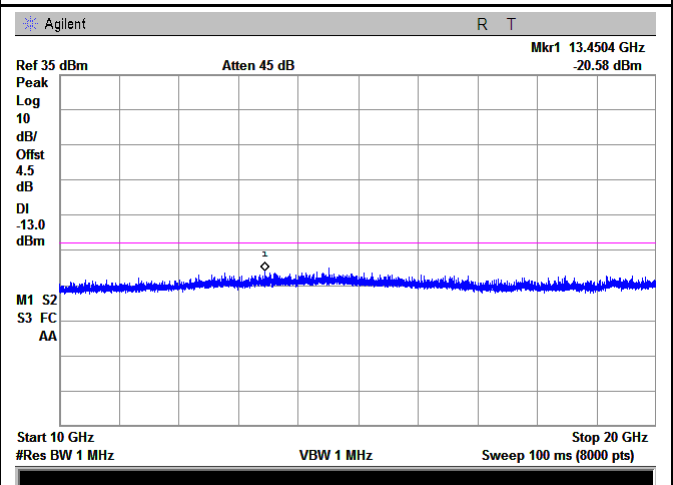


PCS 1900 - High Channel-2

GPRS:


Cellular Band (Part 22H) result

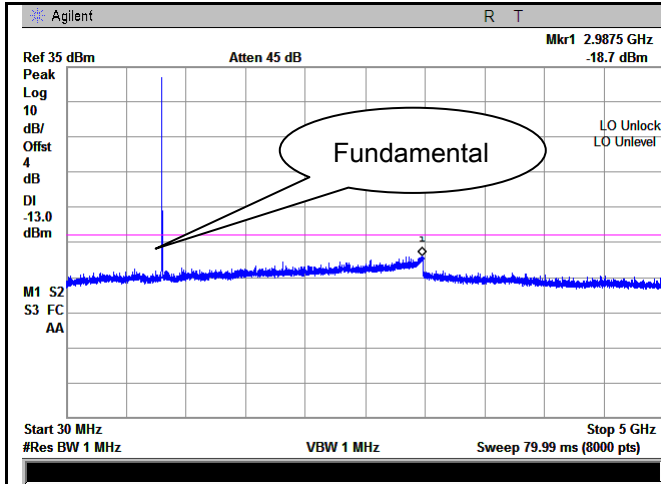


GSM 850 - Low Channel-1

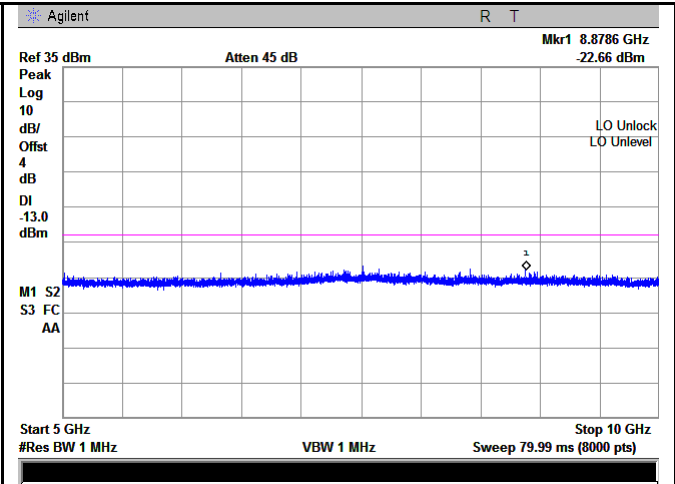


GSM 850 - Low Channel-2

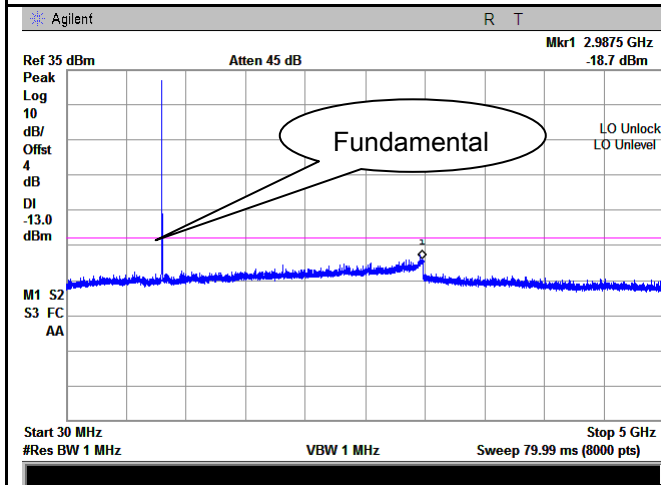


GSM 850 Middle Channel-1

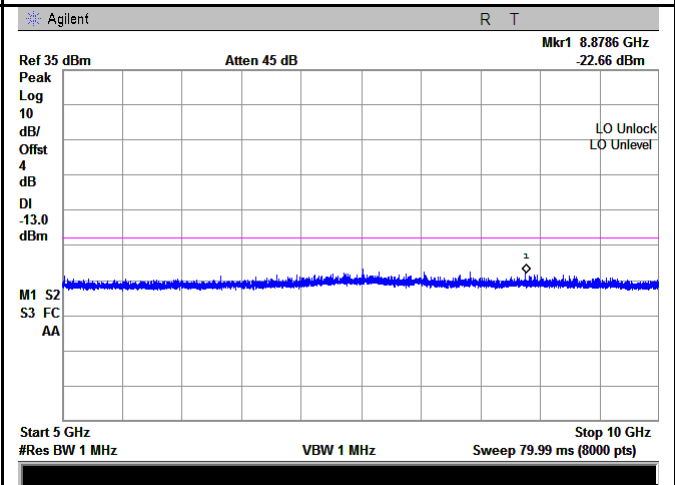

GSM 850 Middle Channel-2

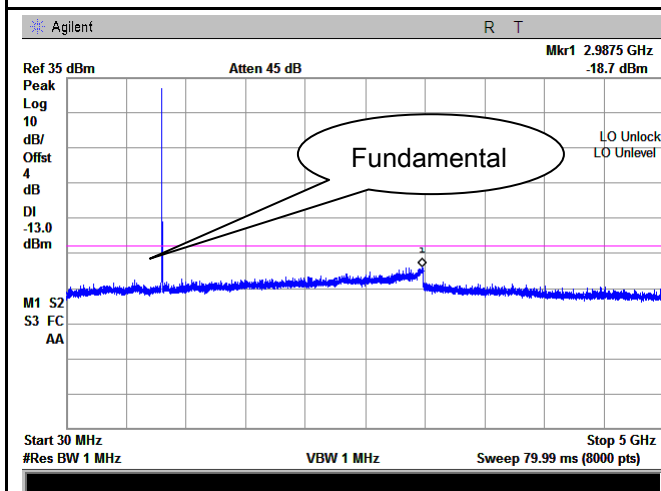


GSM 850 - High Channel-1

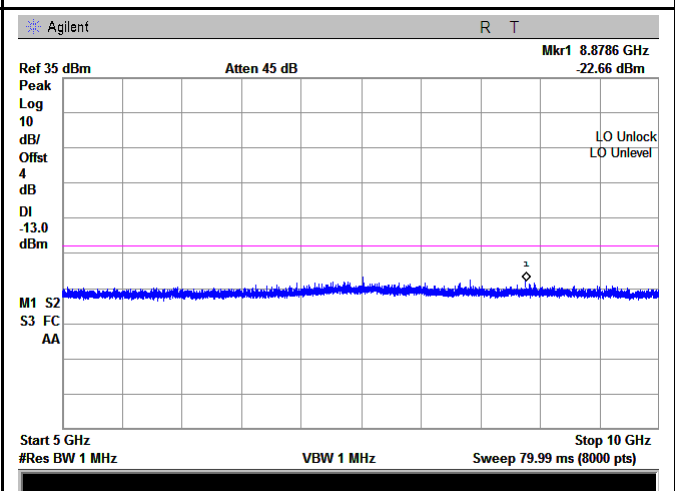


GSM 850 - High Channel-2


PCS Band (Part24E) result

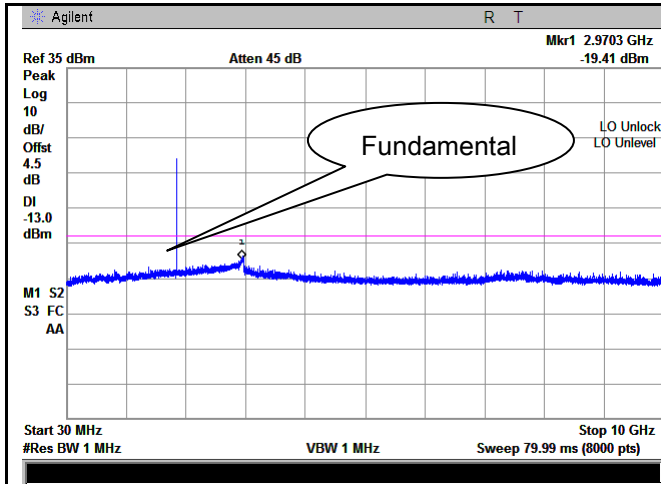


PCS1900 - Low Channel-1

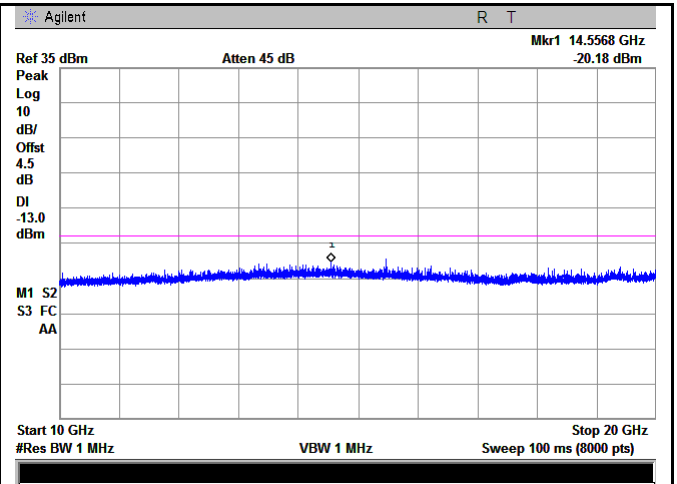


PCS 1900 - Low Channel-2

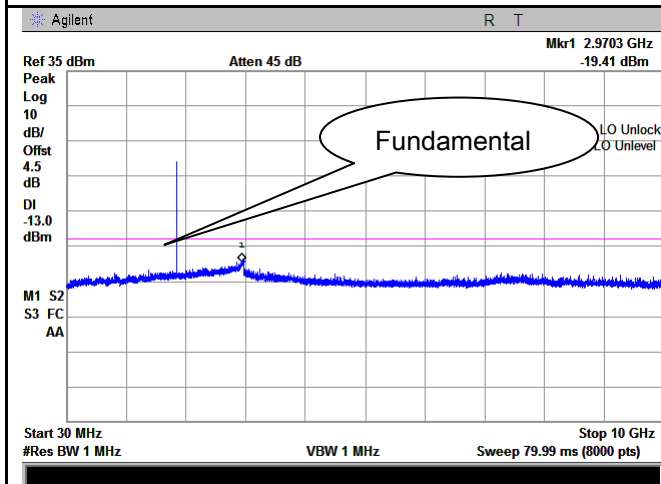


PCS1900 - Middle Channel-1

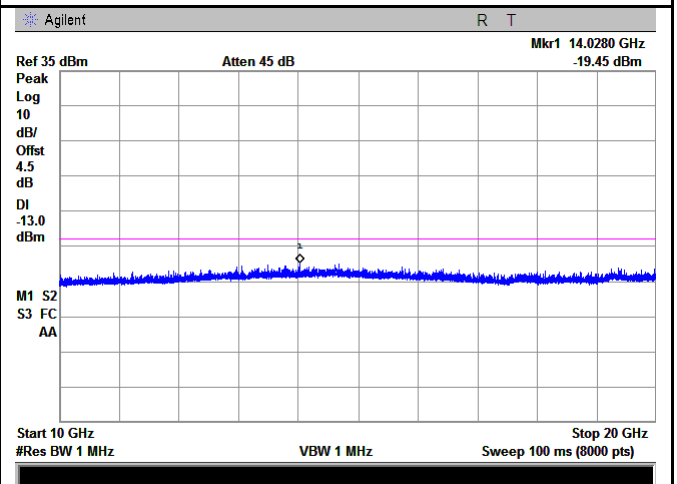

PCS 1900 - Middle Channel-2

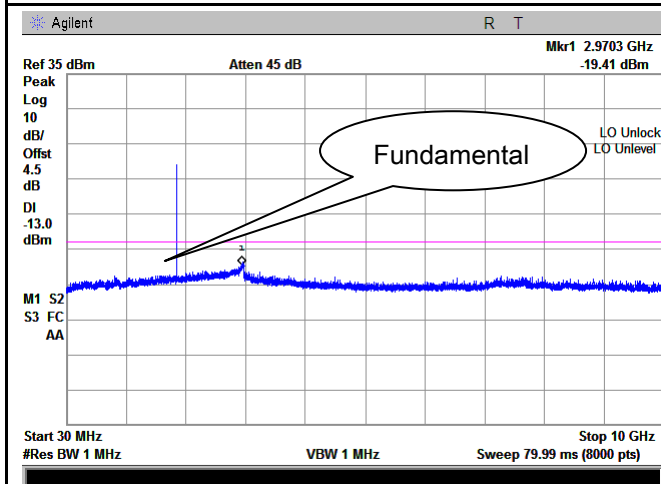


PCS1900 - High Channel-1

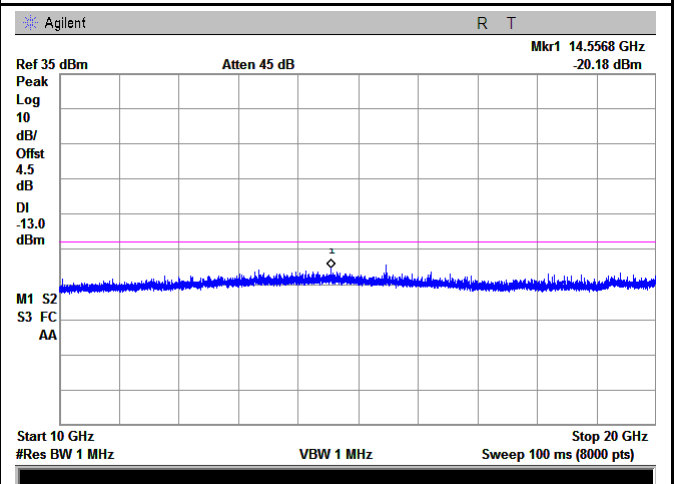


PCS 1900 - High Channel-2


EGPRS (MSC 5):
Cellular Band (Part 22H) result

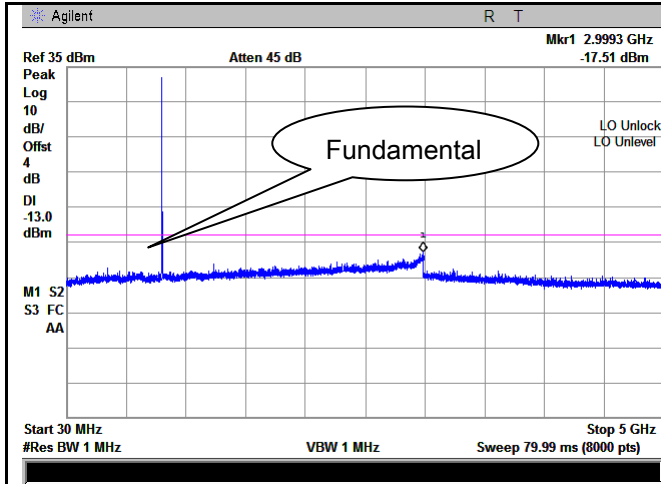


GSM 850 - Low Channel-1

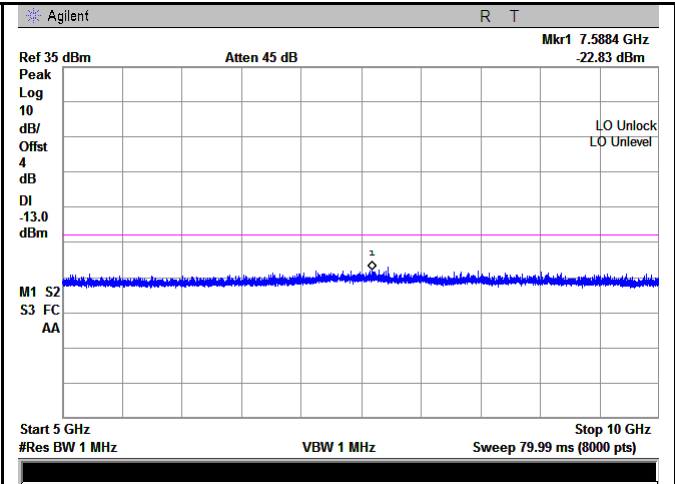


GSM 850 - Low Channel-2

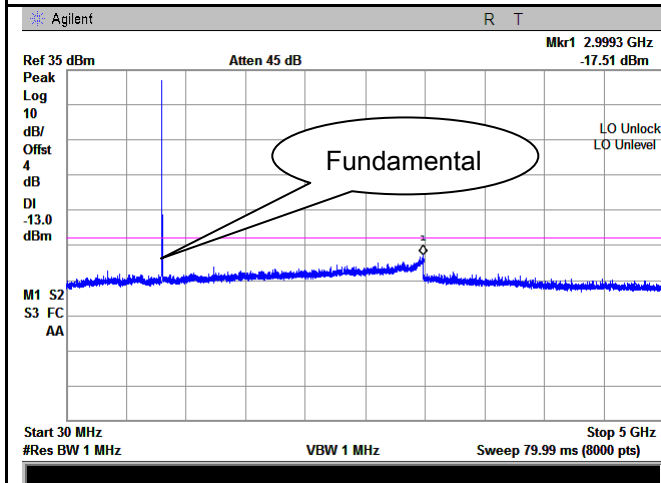


GSM 850 Middle Channel-1

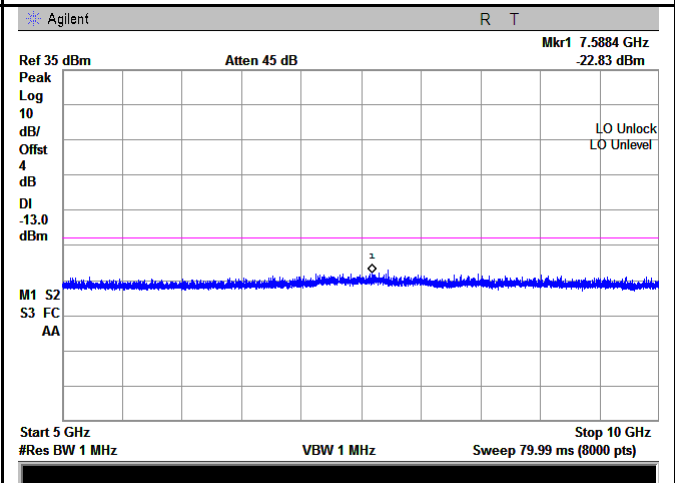

GSM 850 Middle Channel-2

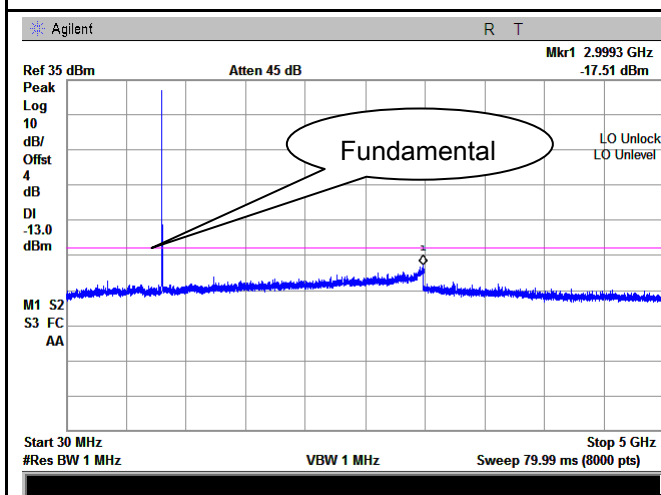


GSM 850 - High Channel-1

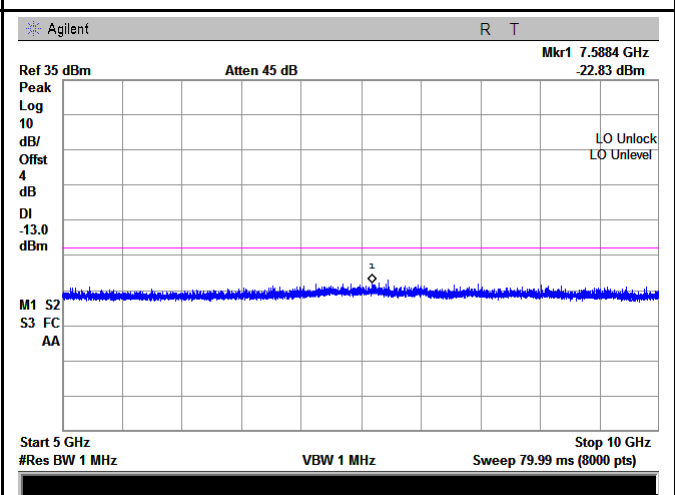



GSM 850 - High Channel-2

PCS Band (Part24E) result

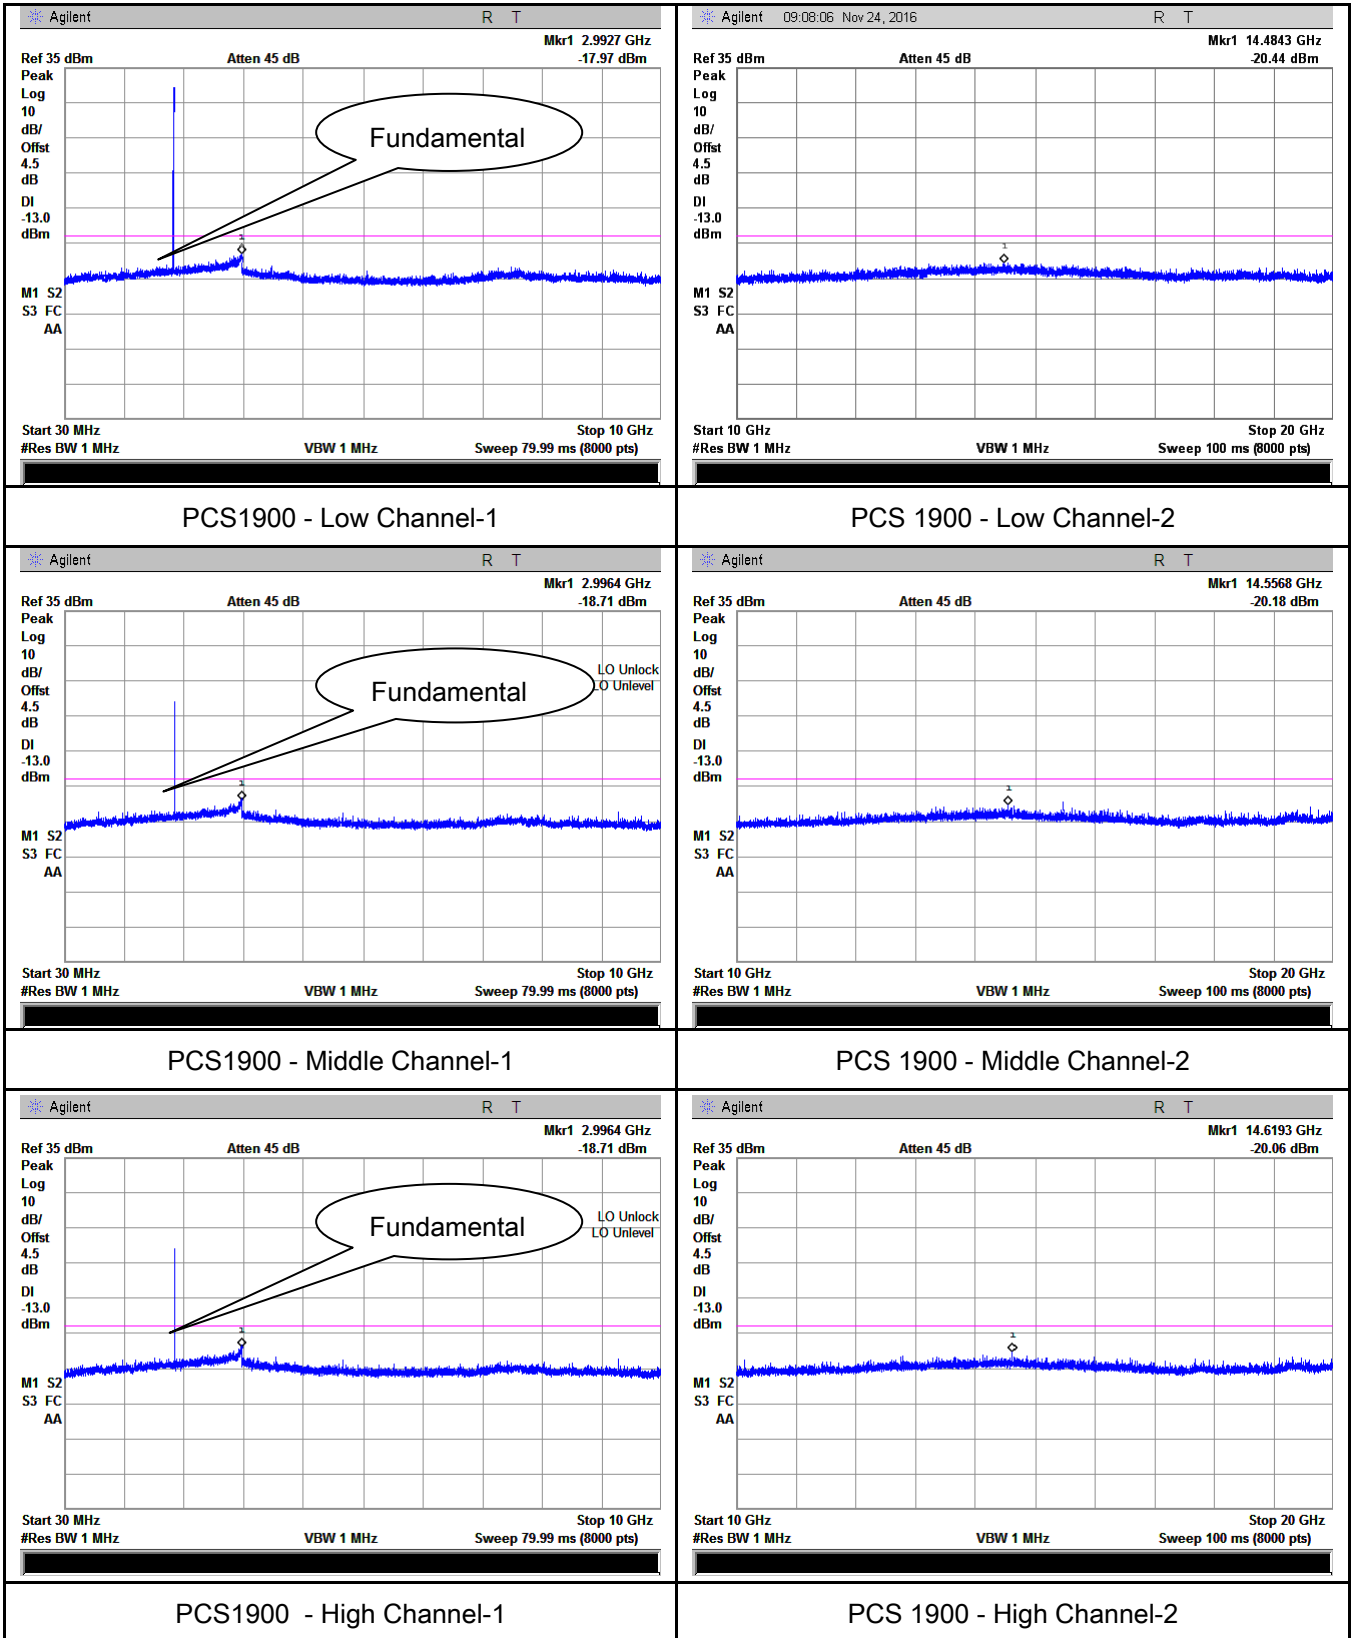



RMC

UMTS-FDD Band V (Part 22H)

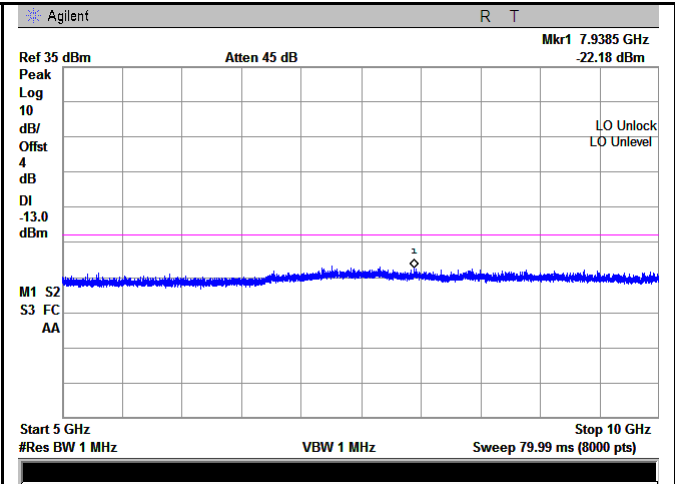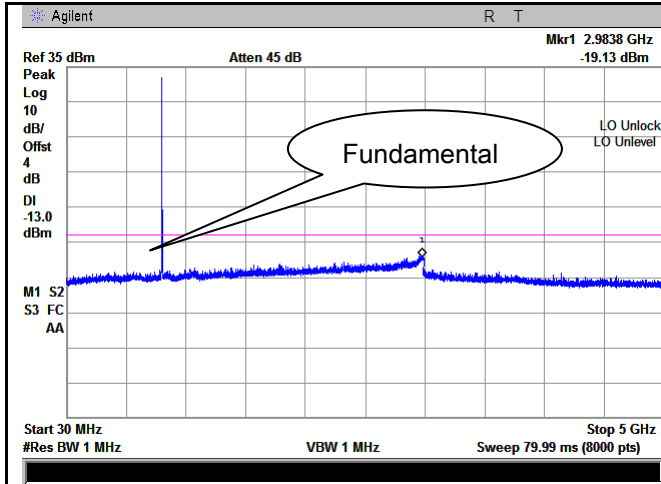



Band V - Low Channel-1

Band V - Low Channel-2

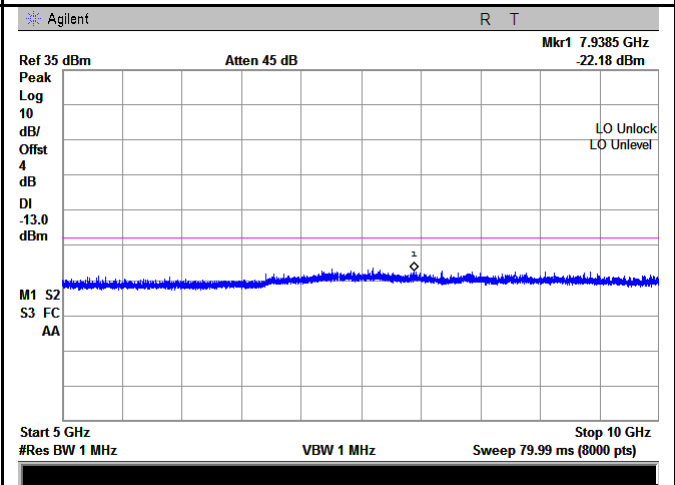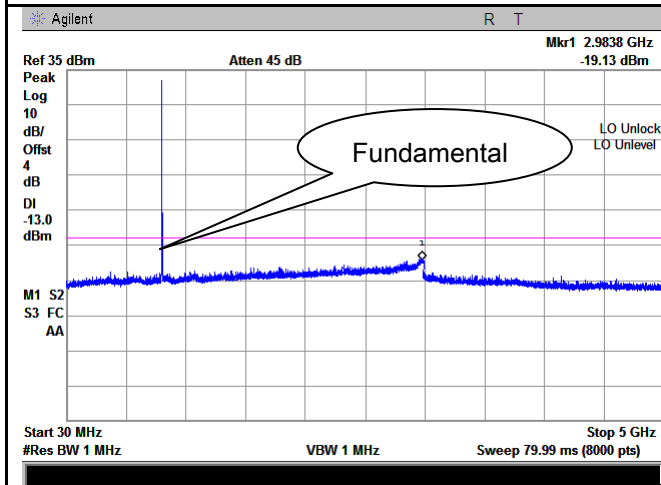

Band V - Middle Channel-1


Band V - Middle Channel-2

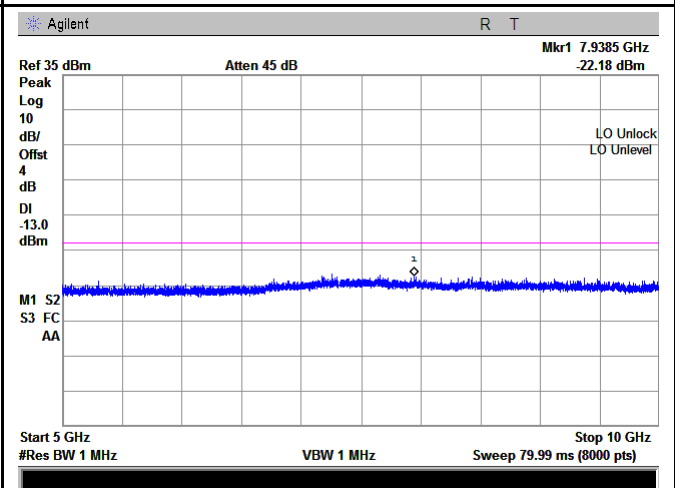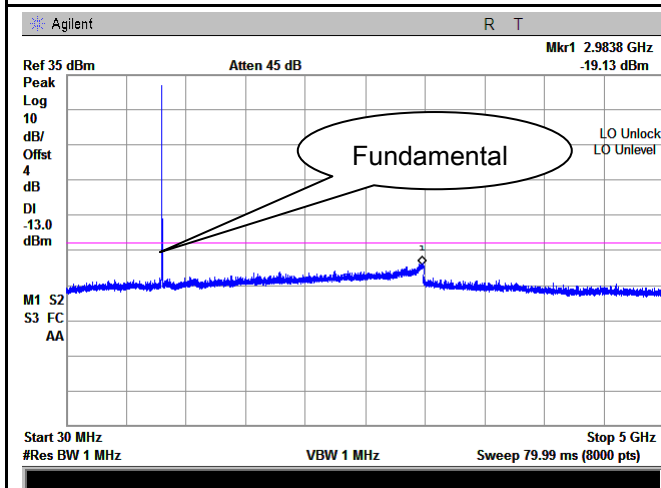


Band V - High Channel-1

Band V - High Channel-2


UMTS-FDD Band II (Part 24E)

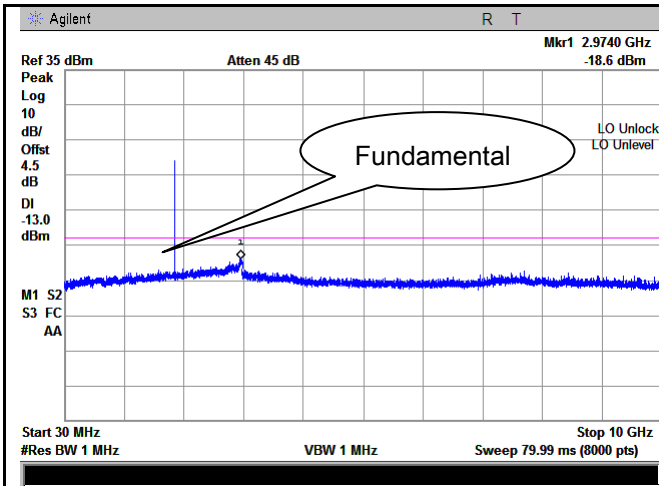


Band II - Low Channel-1

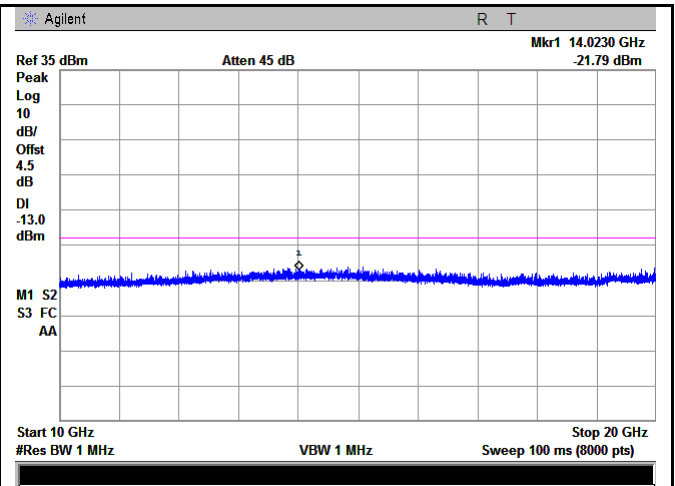


Band II - Low Channel-2

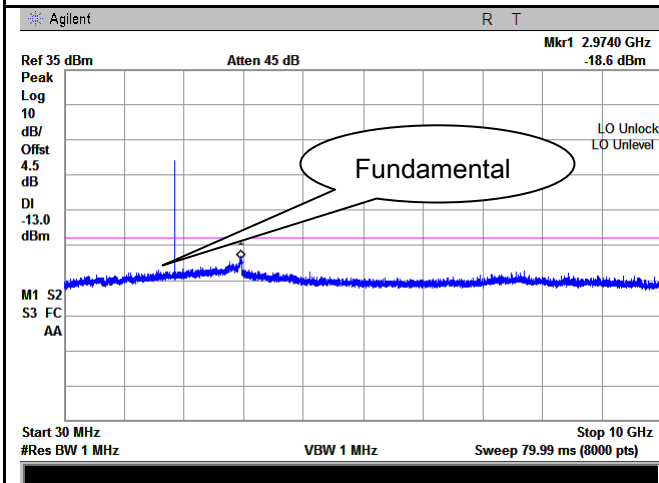


Band II - Middle Channel-1

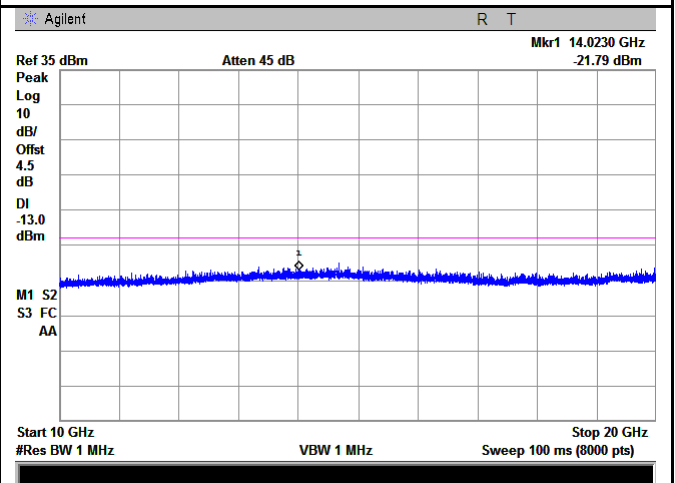

Band II - Middle Channel-2

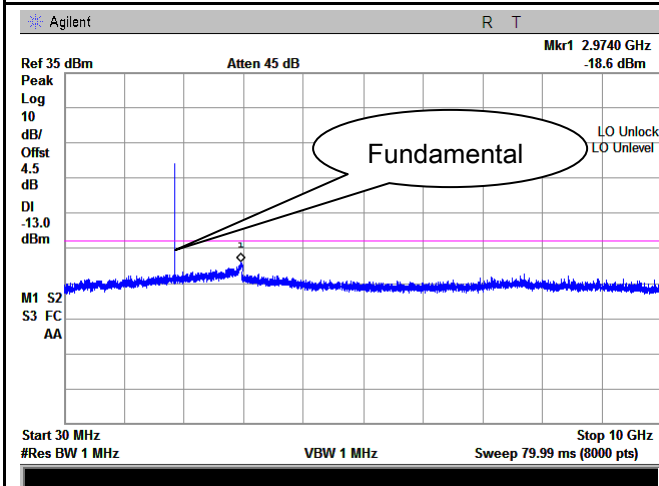


Band II - High Channel-1

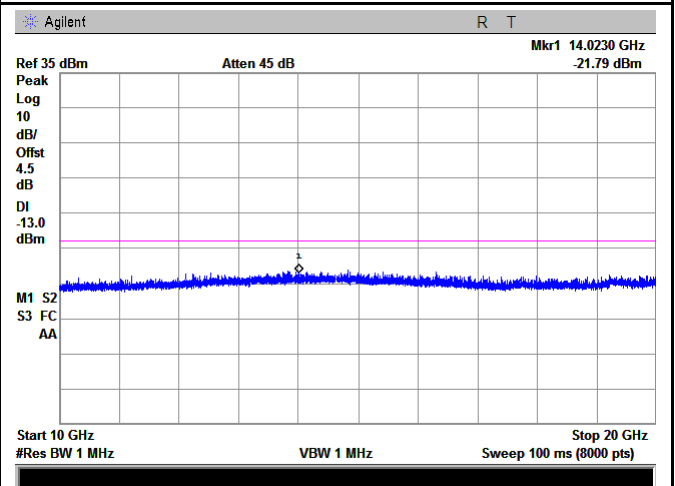


Band II - High Channel-2

HSDPA:


UMTS-FDD Band V (Part 22H)

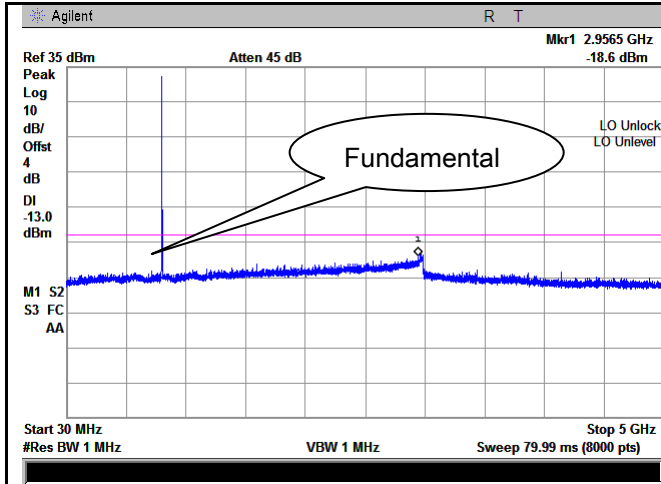


Band V - Low Channel-1

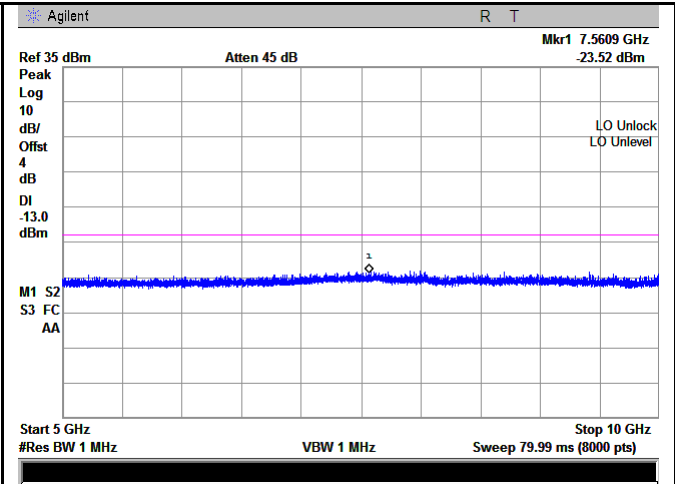


Band V - Low Channel-2

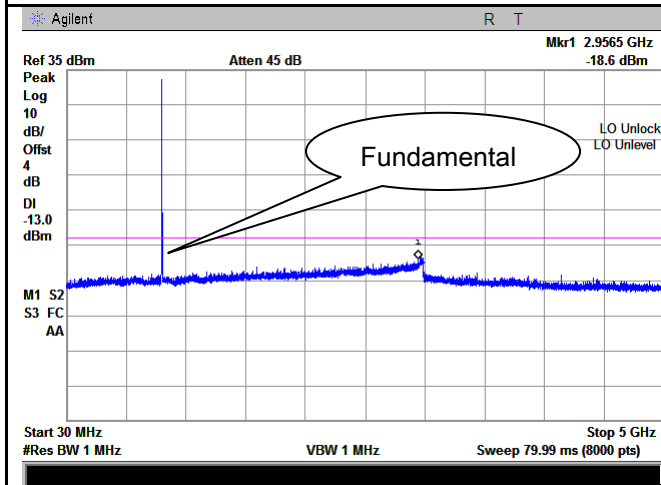


Band V - Middle Channel-1

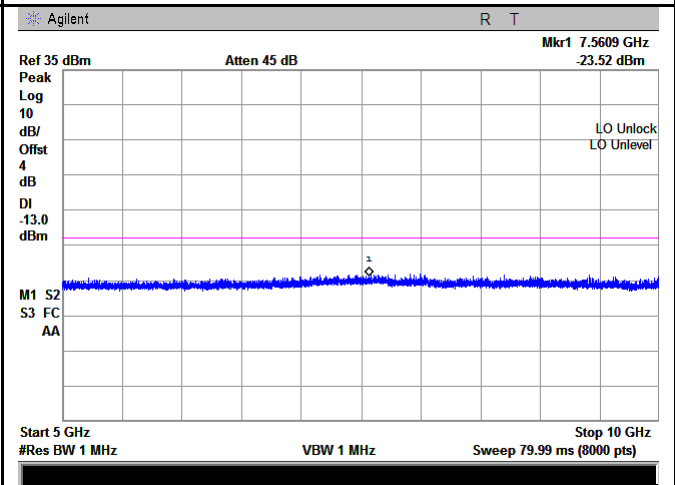

Band V - Middle Channel-2

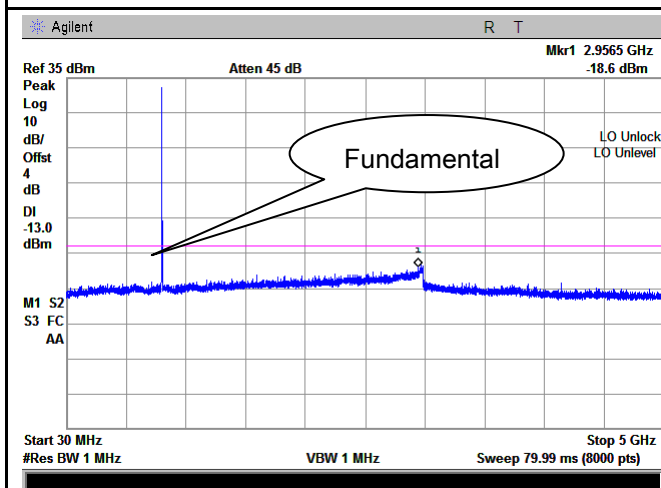


Band V - High Channel-1

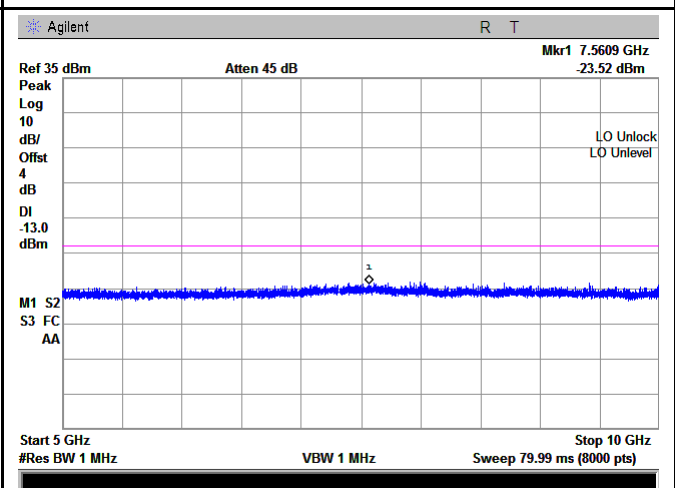


Band V - High Channel-2


UMTS-FDD Band II (Part 24E)

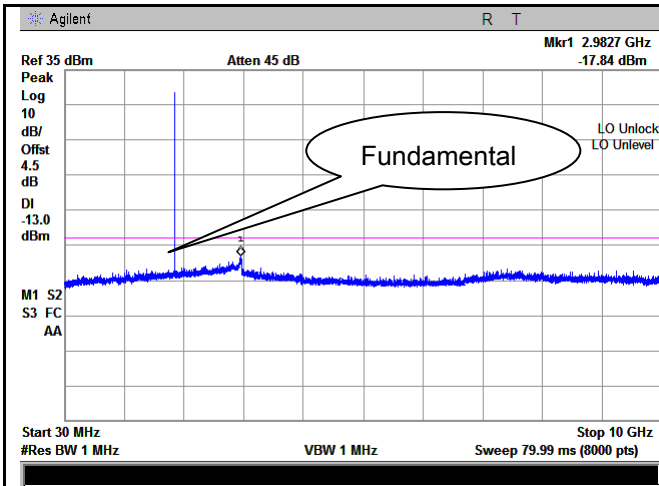


Band II - Low Channel-1

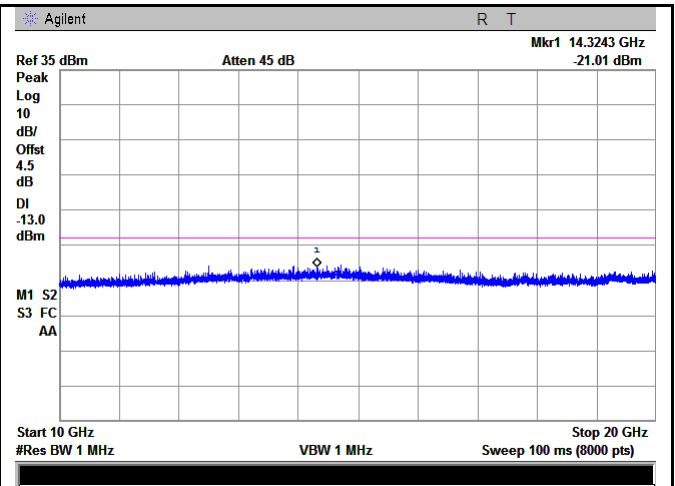


Band II - Low Channel-2

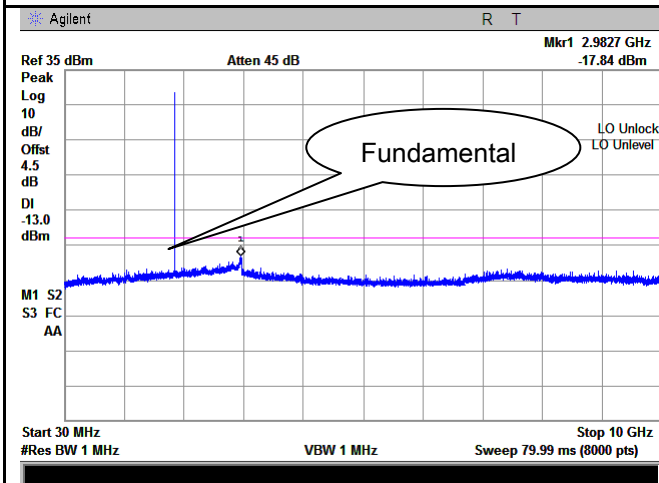


Band II - Middle Channel-1

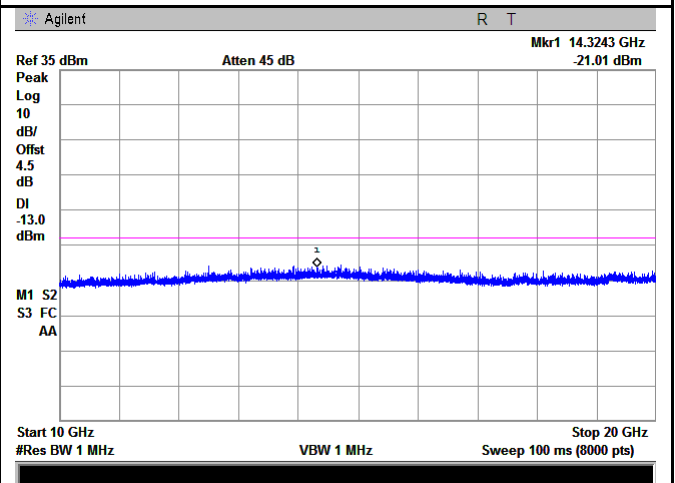

Band II - Middle Channel-2

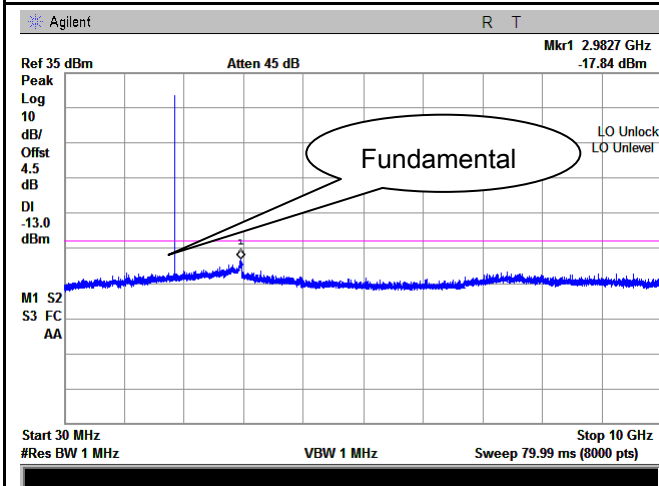


Band II - High Channel-1

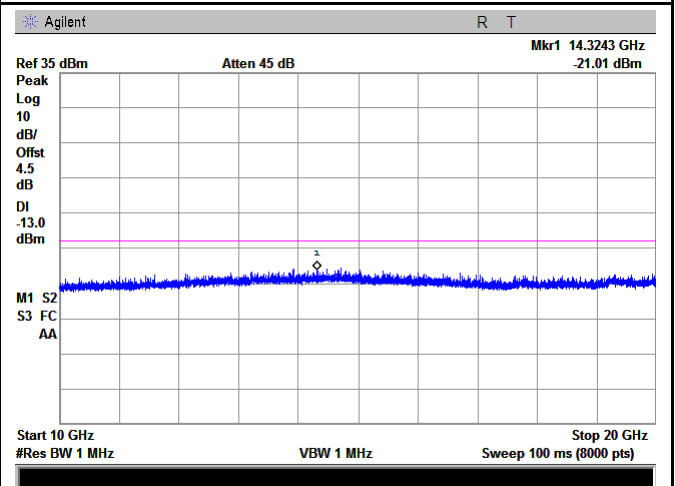


Band II - High Channel-2

HSUPA:


UMTS-FDD Band V (Part 22H)

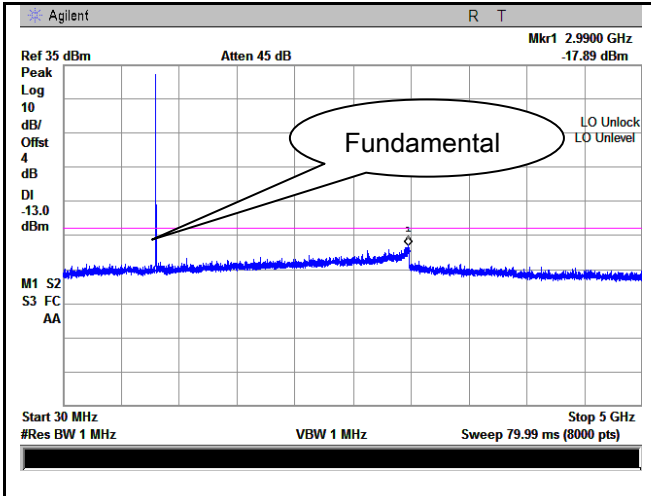


Band V - Low Channel-1

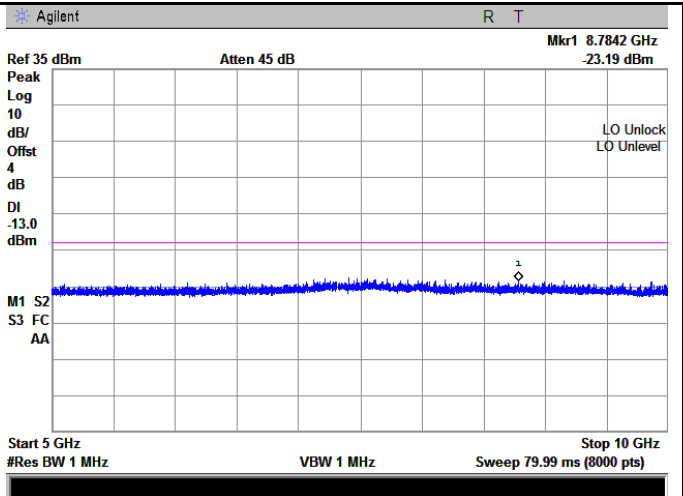


Band V - Low Channel-2

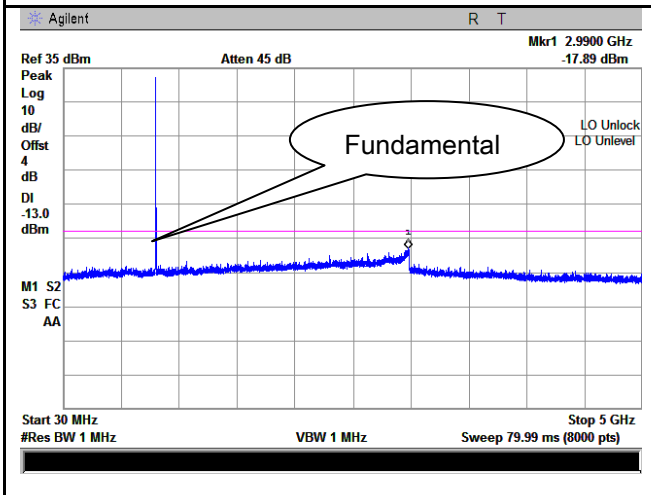


Band V - Middle Channel-1

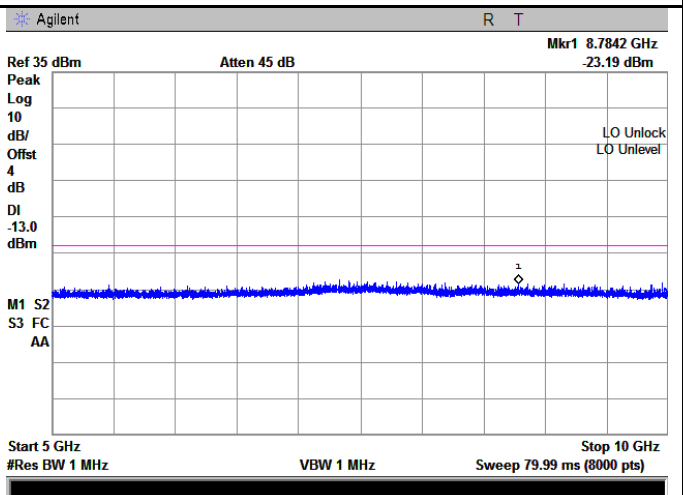

Band V - Middle Channel-2

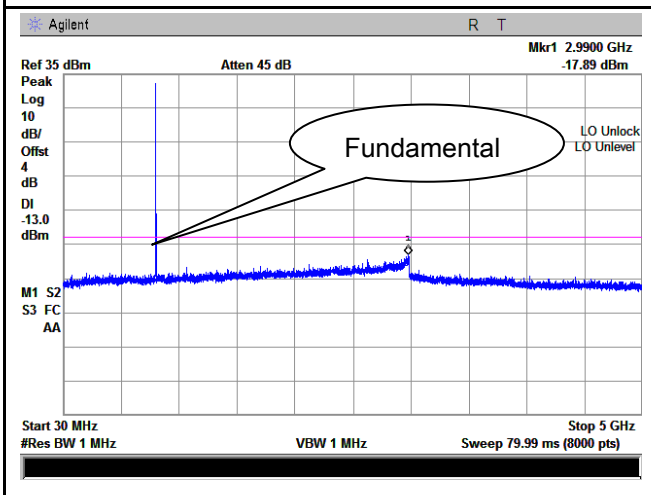


Band V - High Channel-1

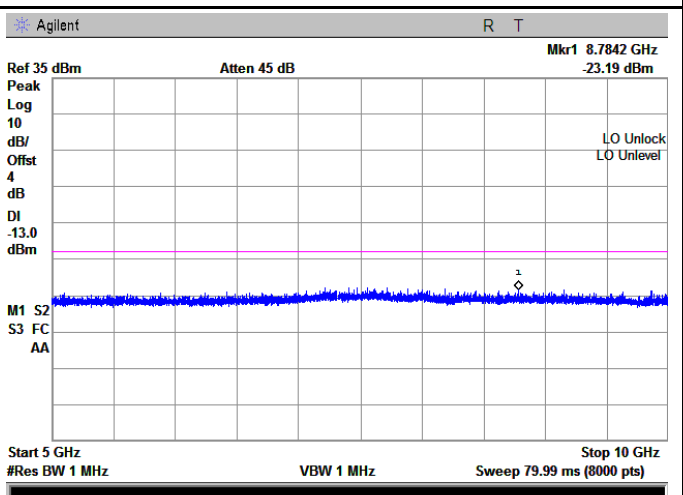


Band V - High Channel-2


UMTS-FDD Band II (Part 24E)

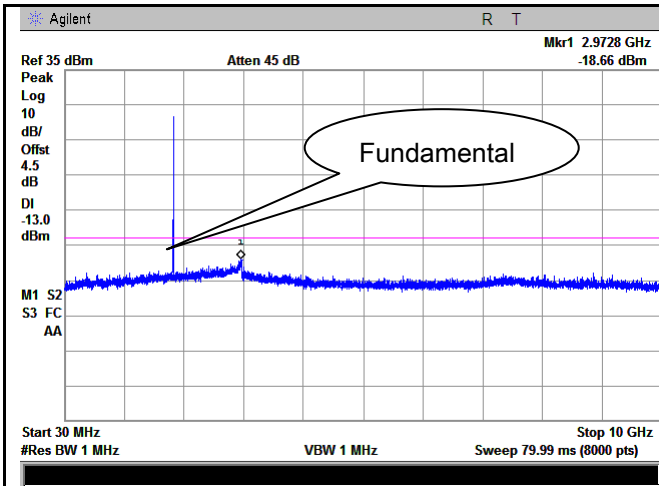


Band II - Low Channel-1

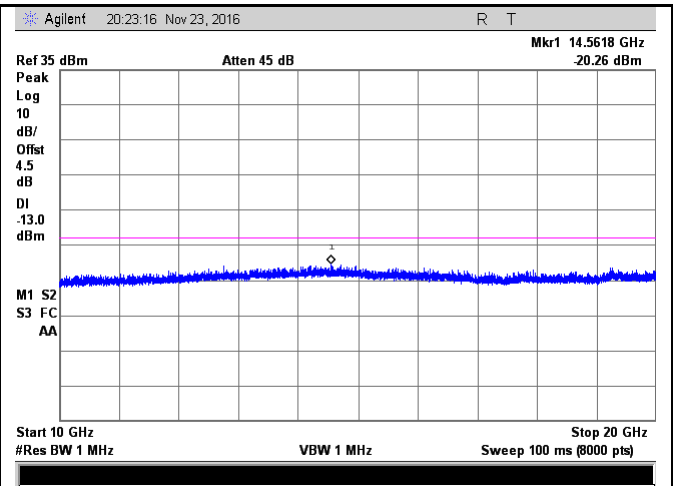


Band II - Low Channel-2

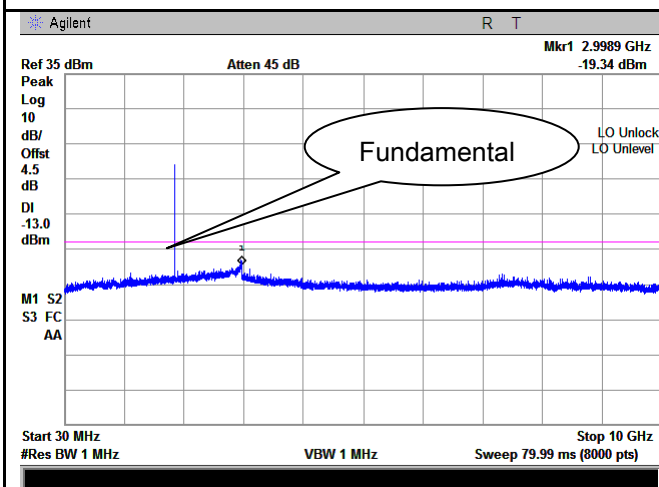


Band II - Middle Channel-1

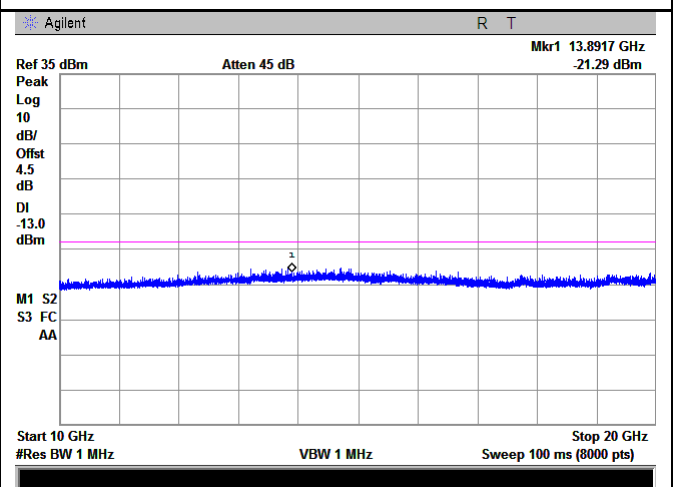

Band II - Middle Channel-2

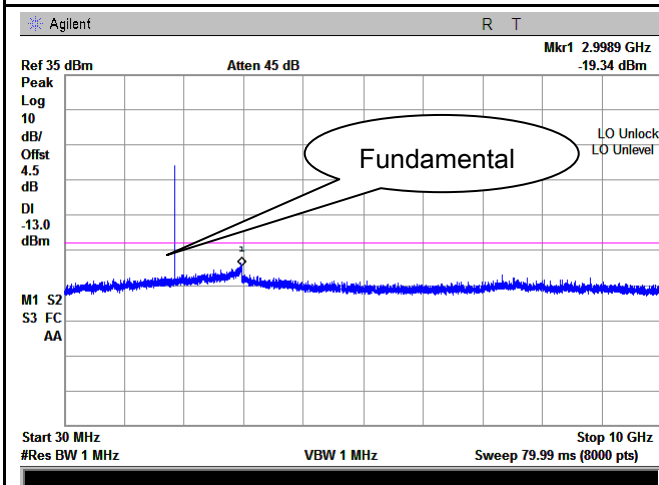

Band II - High Channel-1

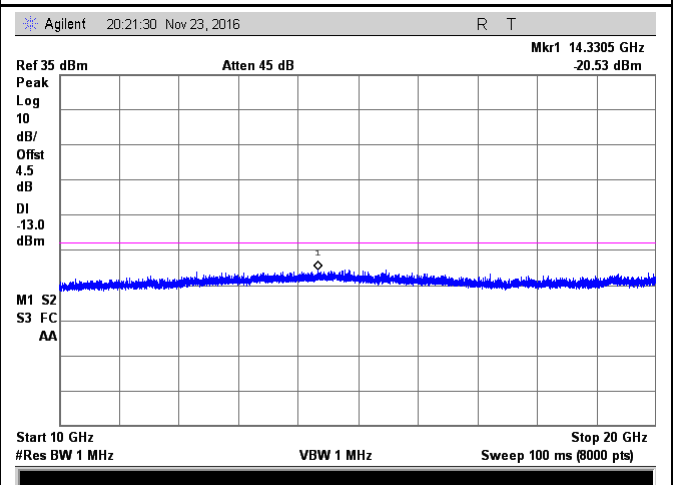


Band II - High Channel-2

6.6 Spurious Radiated Emissions

| | |
|----------------------|------------------|
| Temperature | 26 °C |
| Relative Humidity | 57% |
| Atmospheric Pressure | 1025mbar |
| Test date : | October 25, 2017 |
| Tested By : | Loren Luo |

Requirement(s):

| Spec | Item | Requirement | Applicable |
|----------------------------------|------|---|-------------------------------------|
| §2.1053, §22.917 & §24.238 | a) | The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic. | <input checked="" type="checkbox"/> |
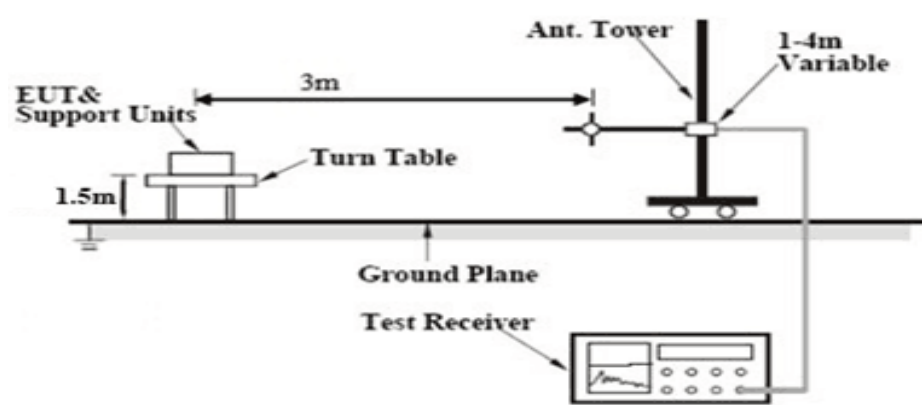
| | |
|------------|--|
| Test setup |  |
|------------|--|

| | |
|----------------|---|
| Test Procedure | <ol style="list-style-type: none"> The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. <p>Sample Calculation:</p> $\text{EUT Field Strength} = \text{Raw Amplitude (dB}\mu\text{V/m)} - \text{Amplifier Gain (dB)} + \text{Antenna Factor (dB)} + \text{Cable Loss (dB)} + \text{Filter Attenuation (dB, if used)}$ |
|----------------|---|

| | |
|--------|--|
| Remark | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |

Test Data Yes N/A

Test Plot Yes (See below) N/A

Cellular Band (Part 22H) result

Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1648.4 | -46.87 | V | 7.95 | 0.67 | -39.59 | -13 | -26.59 |
| 1648.4 | -47.13 | H | 7.95 | 0.67 | -39.85 | -13 | -26.85 |
| 219.5 | -66.35 | V | 3.6 | 0.19 | -62.94 | -13 | -49.94 |
| 169.6 | -68.97 | H | 0.98 | 0.21 | -68.2 | -13 | -55.2 |

Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1673.2 | -43.16 | V | 7.95 | 0.67 | -35.88 | -13 | -22.88 |
| 1673.2 | -45.92 | H | 7.95 | 0.67 | -38.64 | -13 | -25.64 |
| 309.2 | -67.96 | V | 5.53 | 0.24 | -62.67 | -13 | -49.67 |
| 540.2 | -68.69 | H | 6.45 | 0.31 | -62.55 | -13 | -49.55 |

High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1697.6 | -42.61 | V | 7.95 | 0.68 | -35.34 | -13 | -22.34 |
| 1697.6 | -43.85 | H | 7.95 | 0.68 | -36.58 | -13 | -23.58 |
| 146.1 | -68.15 | V | 1 | 0.15 | -67.3 | -13 | -54.3 |
| 970.9 | -68.94 | H | 6.2 | 0.53 | -63.27 | -13 | -50.27 |

Note:

1, The testing has been conformed to $10 \times 848.8 \text{ MHz} = 8,488 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

PCS Band (Part24E) result

Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3700.4 | -46.18 | V | 10.25 | 1 | -36.93 | -13 | -23.93 |
| 3700.4 | -47.52 | H | 10.25 | 1 | -38.27 | -13 | -25.27 |
| 647.3 | -67.08 | V | 6.11 | 0.43 | -61.4 | -13 | -48.4 |
| 395.5 | -66.61 | H | 6.01 | 0.25 | -60.85 | -13 | -47.85 |

Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3760 | -45.27 | V | 10.25 | 1.01 | -36.03 | -13 | -23.03 |
| 3760 | -46.5 | H | 10.25 | 1.01 | -37.26 | -13 | -24.26 |
| 209.5 | -66.8 | V | 3.8 | 0.16 | -63.16 | -13 | -50.16 |
| 172.6 | -65.49 | H | 0.97 | 0.14 | -64.66 | -13 | -51.66 |

High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3819.6 | -43.79 | V | 10.36 | 1.02 | -34.45 | -13 | -21.45 |
| 3819.6 | -46.15 | H | 10.36 | 1.02 | -36.81 | -13 | -23.81 |
| 292.8 | -65.61 | V | 5.59 | 0.29 | -60.31 | -13 | -47.31 |
| 569.1 | -65.61 | H | 6.49 | 0.34 | -59.46 | -13 | -46.46 |

Note:

- 1, The testing has been conformed to $10 \times 1909.8 \text{ MHz} = 19,098 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

UMTS-FDD Band V (Part 22H)

Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1652.8 | -46.22 | V | 7.95 | 0.67 | -38.94 | -13 | -25.94 |
| 1652.8 | -47.51 | H | 7.95 | 0.67 | -40.23 | -13 | -27.23 |
| 638.7 | -65.47 | V | 6.05 | 0.44 | -59.86 | -13 | -46.86 |
| 400.6 | -66.19 | H | 6.03 | 0.26 | -60.42 | -13 | -47.42 |

Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1670 | -44.16 | V | 7.95 | 0.67 | -36.88 | -13 | -23.88 |
| 1670 | -46.37 | H | 7.95 | 0.67 | -39.09 | -13 | -26.09 |
| 846.2 | -66.05 | V | 6.27 | 0.44 | -60.22 | -13 | -47.22 |
| 201.1 | -69.07 | H | 3.77 | 0.17 | -65.47 | -13 | -52.47 |

High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1693.2 | -43.67 | V | 7.95 | 0.68 | -36.4 | -13 | -23.4 |
| 1693.2 | -45.82 | H | 7.95 | 0.68 | -38.55 | -13 | -25.55 |
| 295.7 | -67.85 | V | 5.6 | 0.24 | -62.49 | -13 | -49.49 |
| 571.6 | -67.99 | H | 6.4 | 0.32 | -61.91 | -13 | -48.91 |

Note:

- 1, The testing has been conformed to $10 \times 846.6 \text{ MHz} = 8,466 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

UMTS-FDD Band II (Part 24E)

Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3704.8 | -45.91 | V | 10.25 | 1 | -36.66 | -13 | -23.66 |
| 3704.8 | -47.19 | H | 10.25 | 1 | -37.94 | -13 | -24.94 |
| 49 | -66.42 | V | -4.4 | 0.12 | -70.94 | -13 | -57.94 |
| 859.1 | -64.68 | H | 6.19 | 0.49 | -58.98 | -13 | -45.98 |

Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3760 | -46.33 | V | 10.25 | 1.01 | -37.09 | -13 | -24.09 |
| 3760 | -48.55 | H | 10.25 | 1.01 | -39.31 | -13 | -26.31 |
| 144.9 | -65.66 | V | 0.98 | 0.23 | -64.91 | -13 | -51.91 |
| 943 | -68.33 | H | 6.38 | 0.44 | -62.39 | -13 | -49.39 |

High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3815.2 | -47.24 | V | 10.36 | 1.02 | -37.9 | -13 | -24.9 |
| 3815.2 | -48.95 | H | 10.36 | 1.02 | -39.61 | -13 | -26.61 |
| 285.5 | -65.11 | V | 5.69 | 0.25 | -59.67 | -13 | -46.67 |
| 559 | -68.26 | H | 6.3 | 0.33 | -62.29 | -13 | -49.29 |


Note:

- 1, The testing has been conformed to $10 \times 1907.6 \text{ MHz} = 19,076 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case
- 5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

6.7 Band Edge

| | |
|----------------------|------------------|
| Temperature | 26 °C |
| Relative Humidity | 56% |
| Atmospheric Pressure | 1022mbar |
| Test date : | October 26, 2017 |
| Tested By : | Loren Luo |

Requirement(s):
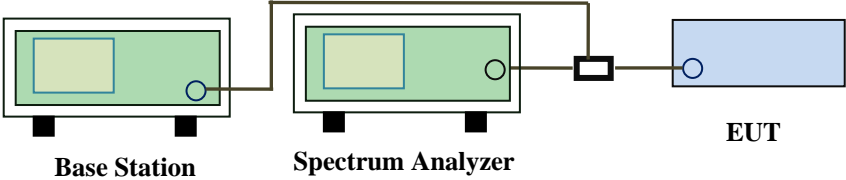
| Spec | Item | Requirement | Applicable |
|--------------------------|--|--|-------------------------------------|
| §22.917(a) §24.238(a) | a) | The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. | <input checked="" type="checkbox"/> |
| Test setup |  <p>The diagram shows a Base Station (green box) and a Spectrum Analyzer (green box) connected to an EUT (blue box) via a power divider (black box). The Base Station and Spectrum Analyzer are connected to the power divider, which then splits the signal to the EUT.</p> | | |
| Procedure | <ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100. | | |
| Remark | | | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | | |

Test Data Yes N/A
 Test Plot Yes (See below) N/A

GSM Voice:

Cellular Band (Part 22H) result

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 823.997 | -17.02 | -13 |
| 849.005 | -16.21 | -13 |

PCS Band (Part24E) result

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.997 | -20.76 | -13 |
| 1910.003 | -16.52 | -13 |

GPRS:

Cellular Band (Part 22H) result

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 823.992 | -17.02 | -13 |
| 849.012 | -16.21 | -13 |

PCS Band (Part24E) result

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.997 | -20.76 | -13 |
| 1910.008 | -16.52 | -13 |

EGPRS (MSC5):

Cellular Band (Part 22H) result

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 823.997 | -17.02 | -13 |
| 849.003 | -16.21 | -13 |

PCS Band (Part24E) result

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.996 | -20.76 | -13 |
| 1910.003 | -16.52 | -13 |

RMC:

UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 823.19 | -31.91 | -13 |
| 849.02 | -29.20 | -13 |

UMTS-FDD Band II (Part 24E)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.02 | -27.84 | -13 |
| 1910.01 | -23.05 | -13 |

HSDPA:

UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 822.83 | -31.91 | -13 |
| 849.89 | -29.20 | -13 |

UMTS-FDD Band II (Part 24E)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.06 | -27.84 | -13 |
| 1910.01 | -23.05 | -13 |

HSUPA:


UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 822.83 | -31.91 | -13 |
| 849.02 | -29.20 | -13 |

UMTS-FDD Band II (Part 24E)


| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.13 | -27.84 | -13 |
| 1910.01 | -23.05 | -13 |

**GSM Voice:
Test Plots**

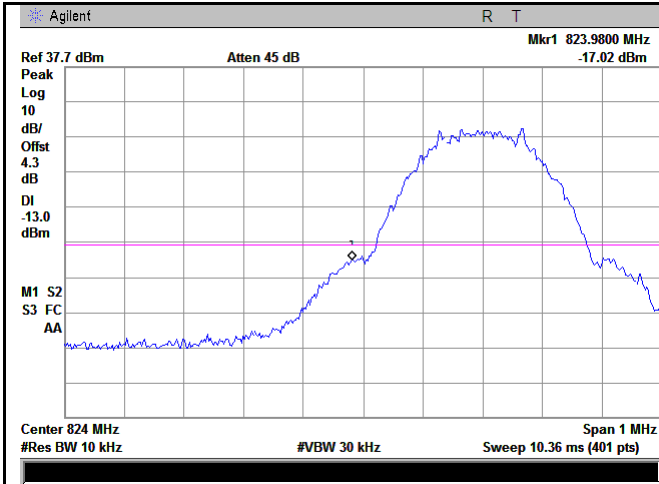


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.24/3)=4.0+0.3=4.3dB

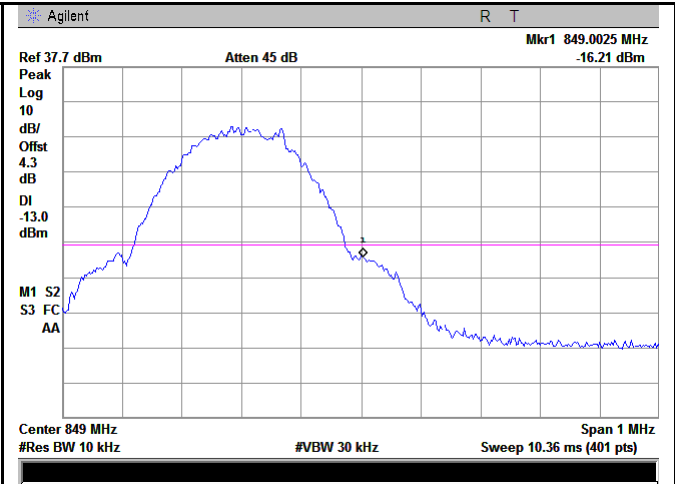


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.24/3)=4.0+0.3=4.3dB

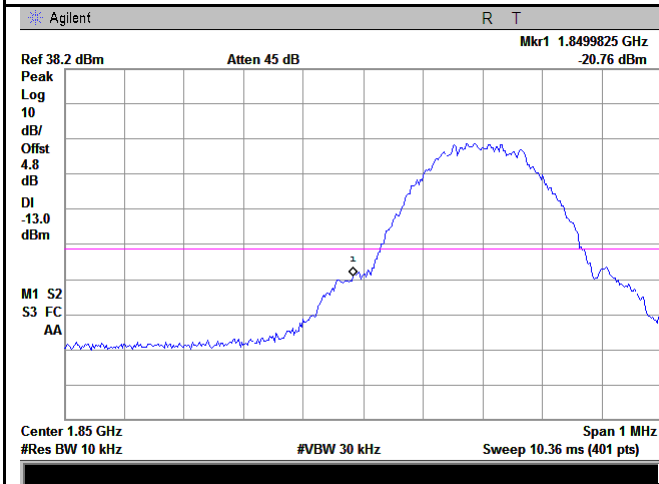

PCS Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.20/3)=4.5+0.3=4.8dB

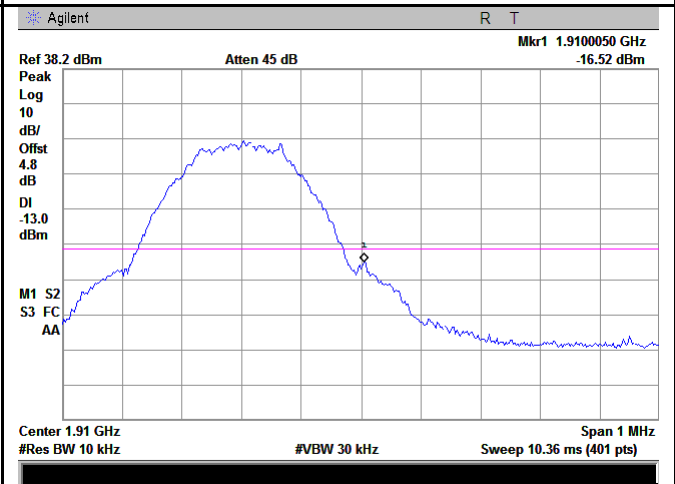


PCS Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.16/3)=4.5+0.3=4.8dB


GPRS:

Test Plots

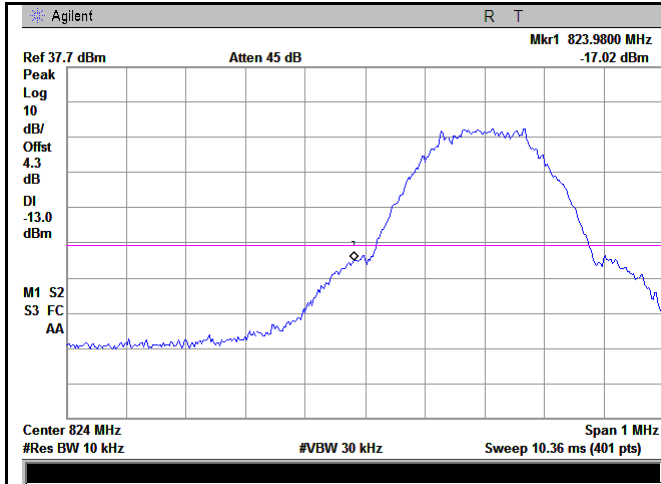


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.22/3)=4.0+0.3=4.3dB

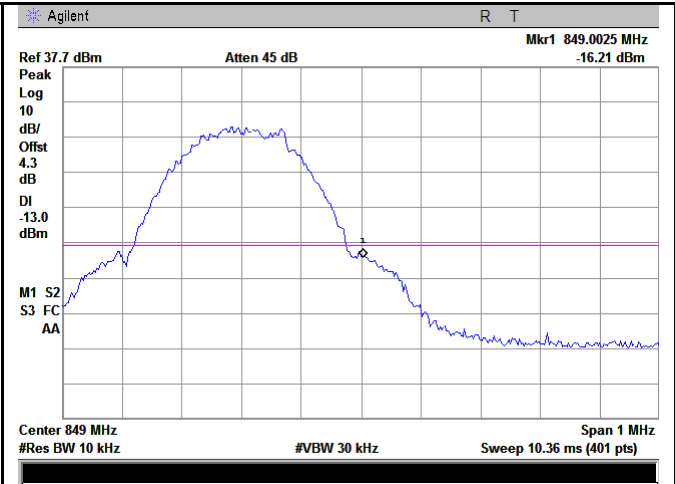


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.17/3)=4.0+0.3=4.3dB

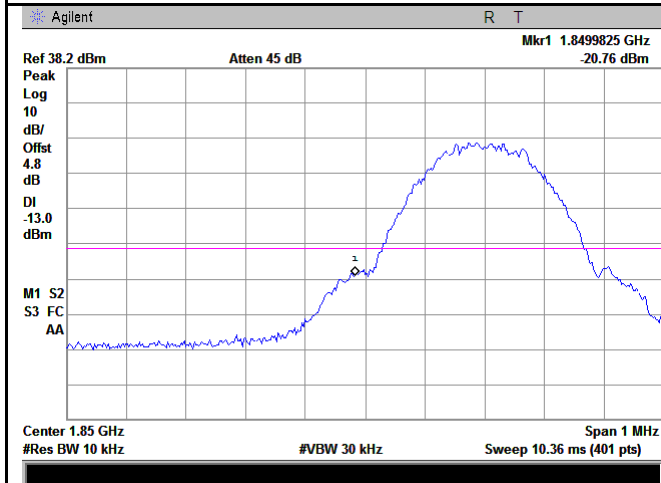

PCS Band - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(3.20/3)=4.5+0.3=4.8dB

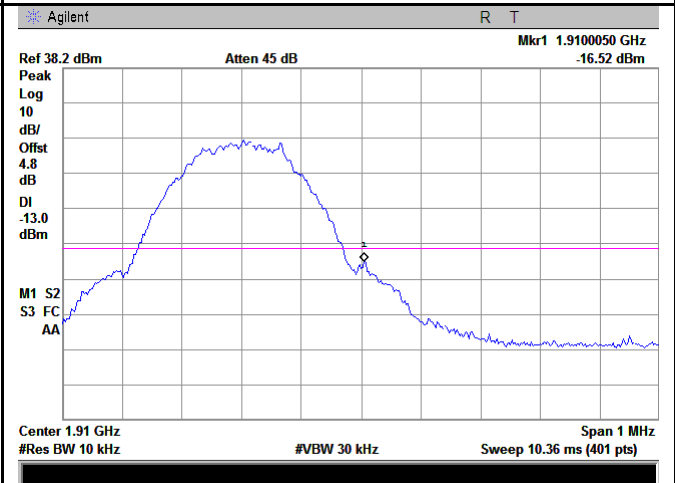


PCS Band - High Channel

Note: Offset=Cable loss (4.5) + 10log
(3.16/3)=4.5+0.3=4.8dB


EGPRS (MSC5):

Test Plots

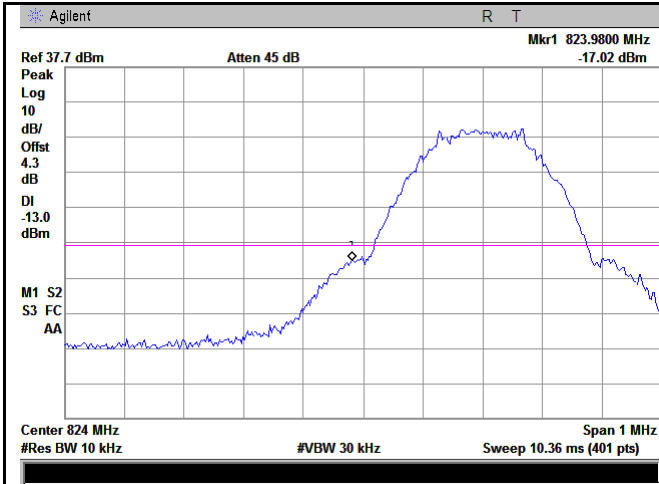


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
 $(3.22/3)=4.0+0.3=4.3\text{dB}$

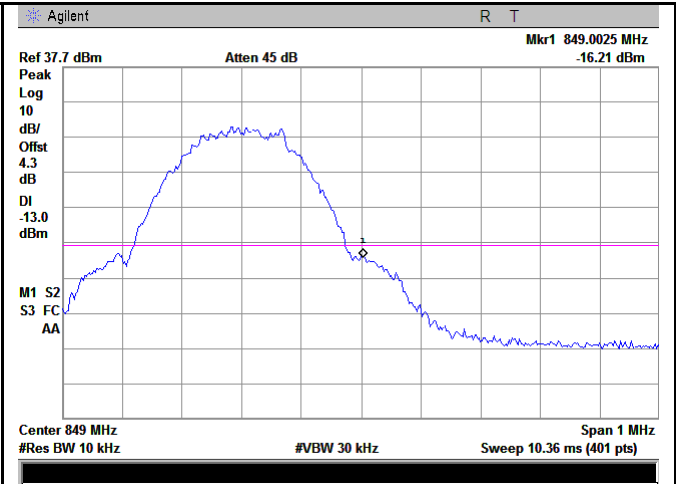


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
 $(3.17/3)=4.0+0.3=4.3\text{dB}$

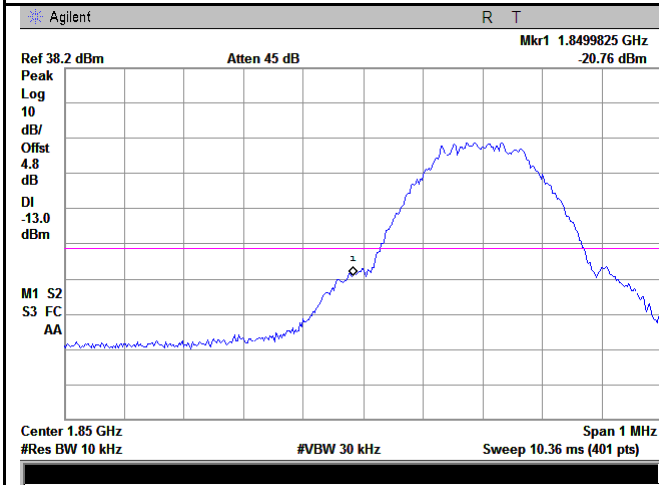

PCS Band - Low Channel


Note: Offset=Cable loss (4.5) + 10log
 $(3.20/3)=4.5+0.3=4.8\text{dB}$

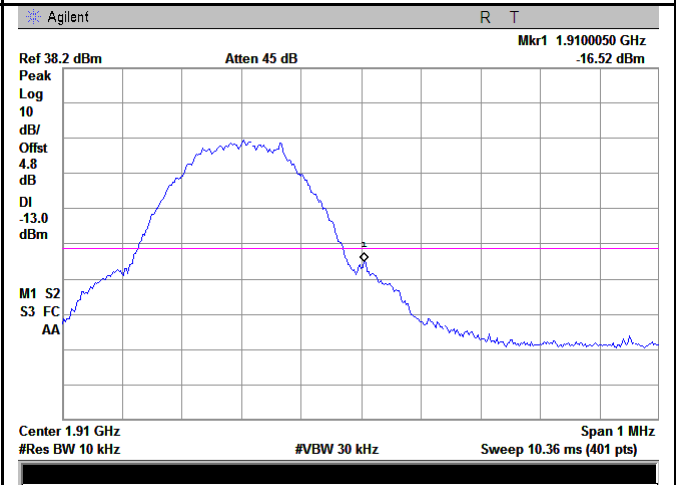

PCS Band - High Channel


Note: Offset=Cable loss (4.5) + 10log
 $(3.18/3)=4.5+0.3=4.8\text{dB}$

RMC:

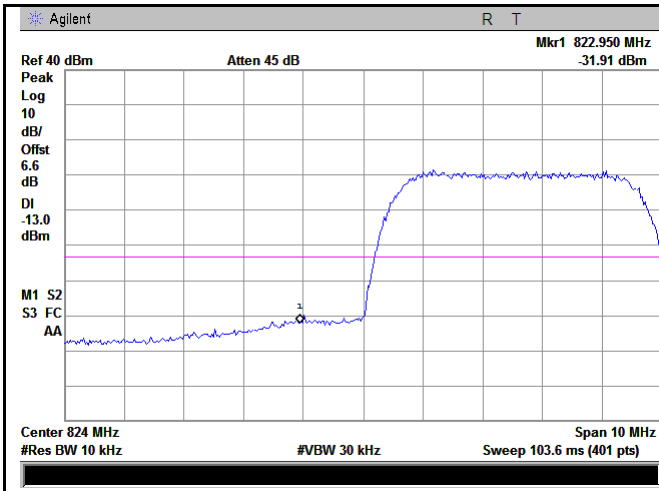


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.86/30)=4.5+2.1=6.6dB

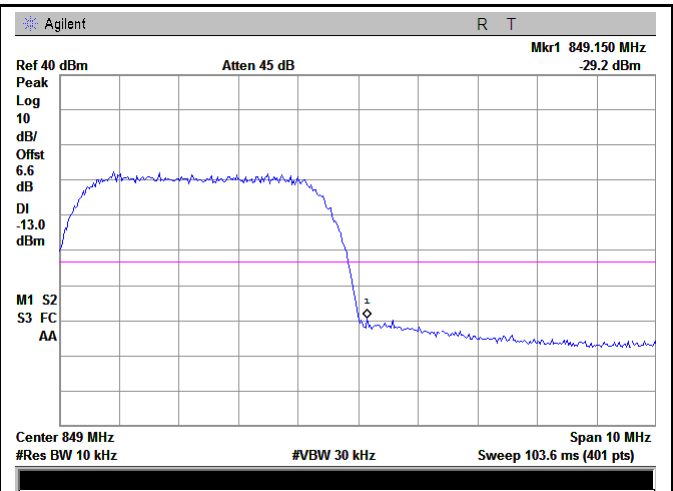


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.80/30)=4.5+2.1=6.6dB

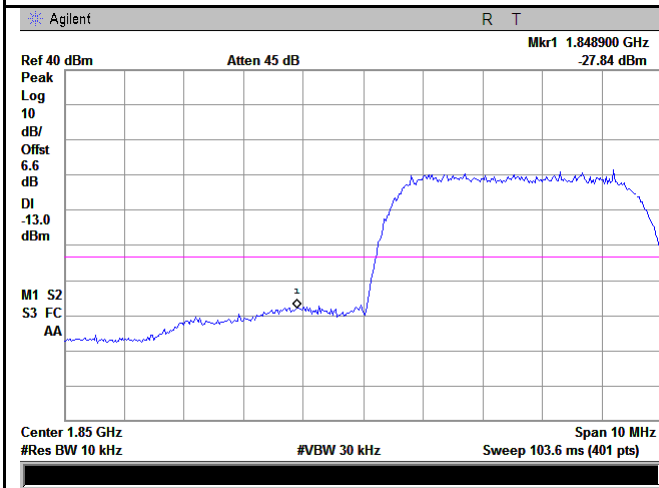

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(48.58/30)=4.5+2.1=6.6dB

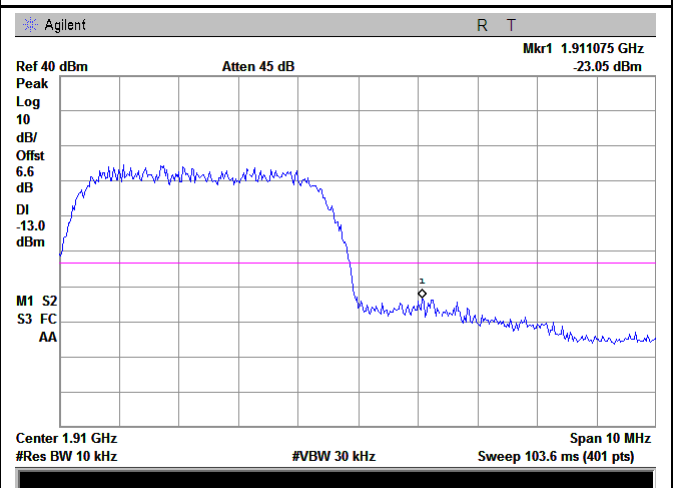

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(48.78/30)=4.5+2.1=6.6dB

HSDPA:

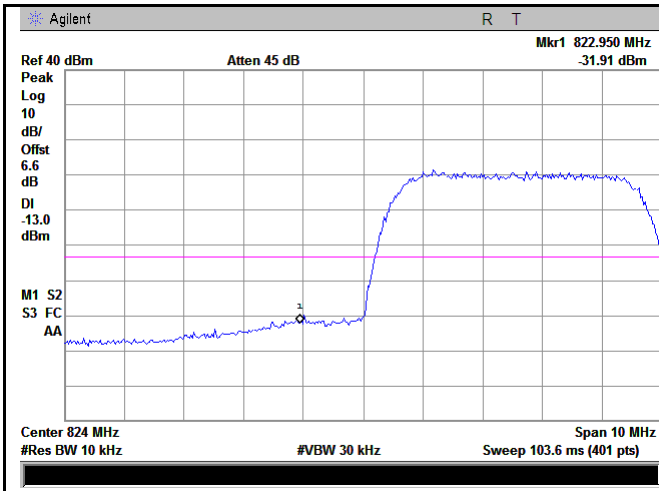


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.86/30)=4.5+2.1=6.6dB

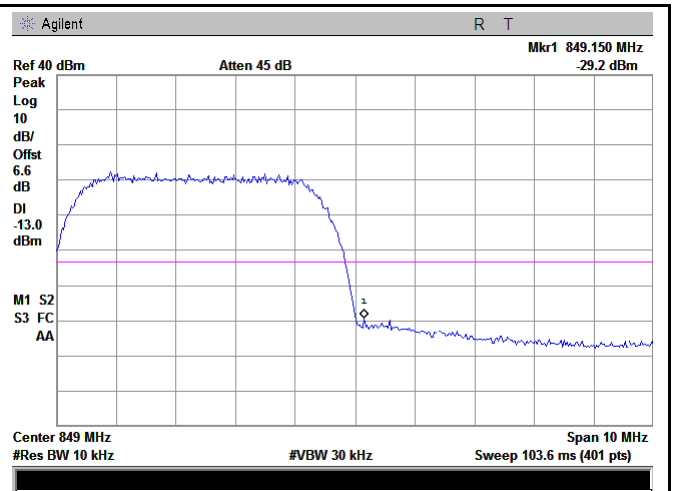


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.88/30)=4.5+2.1=6.6dB

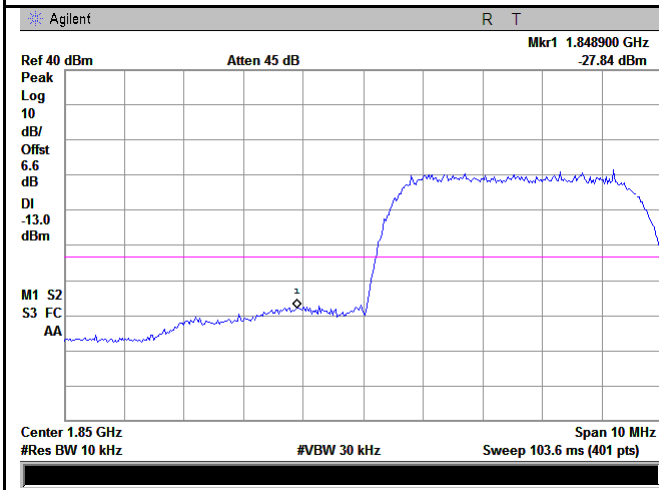

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(48.54/30)=4.5+2.1=6.6dB

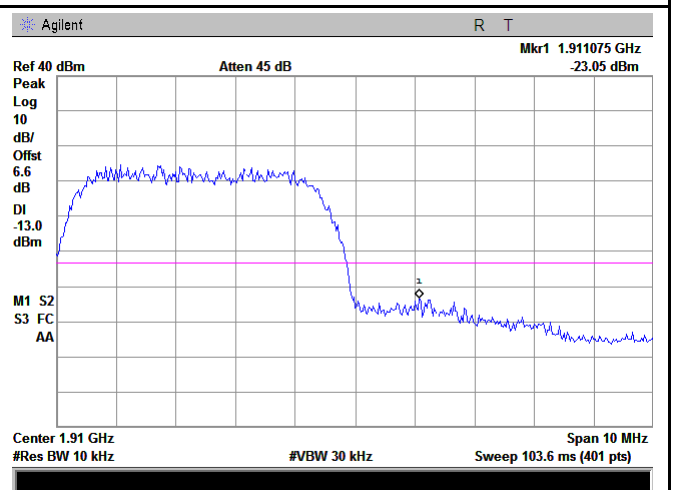

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(48.81/30)=4.5+2.1=6.6dB

HSUPA:

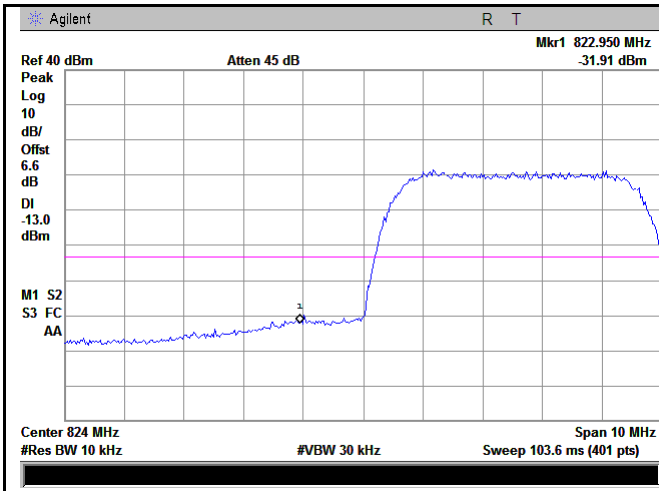


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.86/30)=4.5+2.1=6.6dB

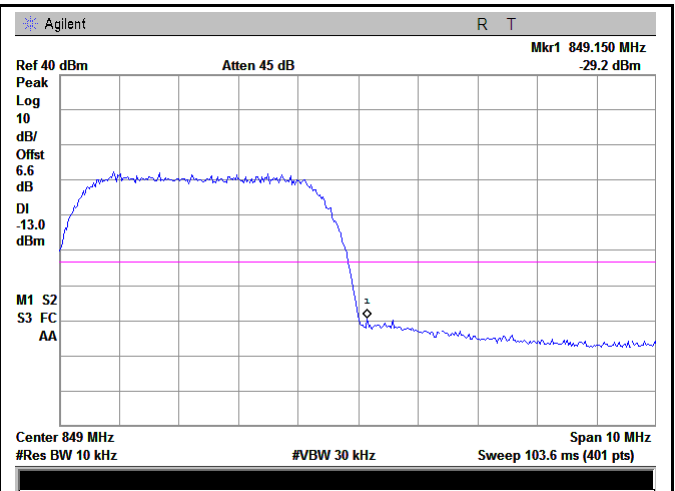


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.80/30)=4.5+2.1=6.6dB

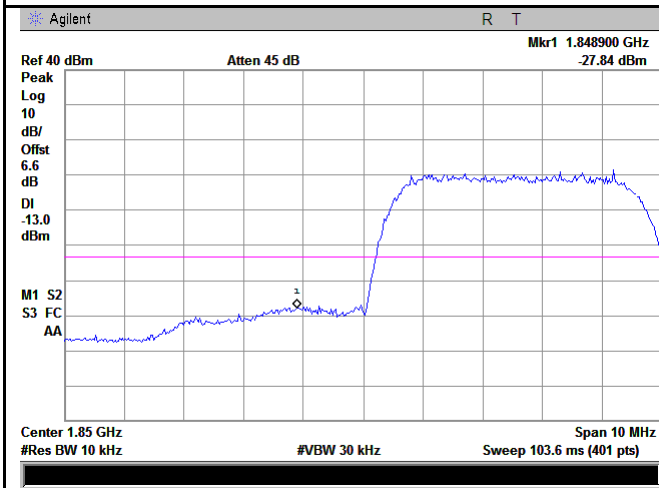

UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(48.58/30)=4.5+2.1=6.6dB

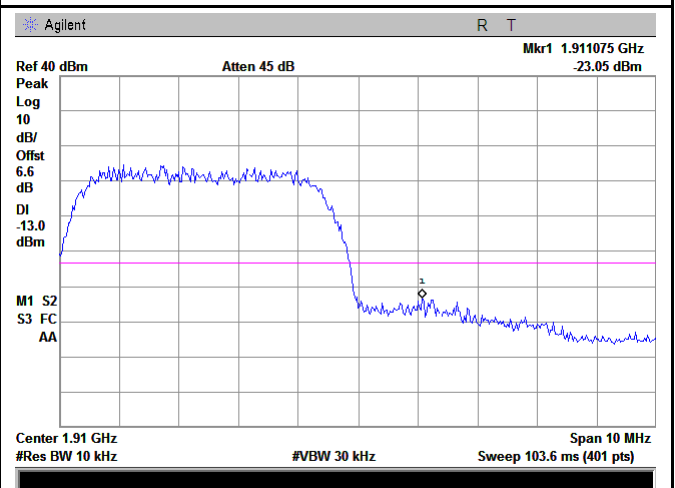


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(48.78/30)=4.5+2.1=6.6dB

6.8 Frequency Stability

| | |
|----------------------|------------------|
| Temperature | 25 °C |
| Relative Humidity | 55% |
| Atmospheric Pressure | 1017mbar |
| Test date : | October 23, 2017 |
| Tested By : | Loren Luo |

Requirement(s):
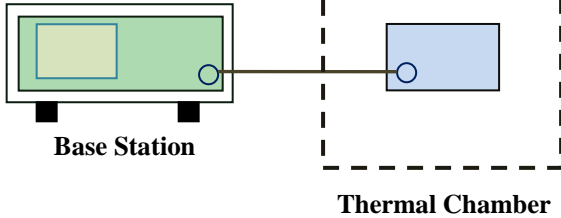
| Spec | Item | Requirement | Applicable | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|------|--|-----------------------|-------------------------|-------------------------|------------------------|----------|------|------|------|-----------|-----|-----|------|------------|-----|-----|-----|------------|-----|-----|-----|------------|-----|-----|-----|-------------|-----|-----|-----|--------------|------|-----|-----|-------------------------------------|
| §2.1055, §22.355 & §24.235 | a) | <p>According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:</p> <p>Frequency Tolerance for Transmitters in the Public Mobile Services</p> <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th> <th>Base, fixed (ppm)</th> <th>Mobile ≥ 3 watts (ppm)</th> <th>Mobile ≤ 3 watts (ppm)</th> </tr> </thead> <tbody> <tr> <td>25 to 50</td> <td>20.0</td> <td>20.0</td> <td>50.0</td> </tr> <tr> <td>50 to 450</td> <td>5.0</td> <td>5.0</td> <td>50.0</td> </tr> <tr> <td>450 to 512</td> <td>2.5</td> <td>5.0</td> <td>5.0</td> </tr> <tr> <td>821 to 896</td> <td>1.5</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>928 to 929</td> <td>5.0</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>929 to 960.</td> <td>1.5</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>2110 to 2220</td> <td>10.0</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table> <p>According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.</p> | Frequency Range (MHz) | Base, fixed (ppm) | Mobile ≥ 3 watts (ppm) | Mobile ≤ 3 watts (ppm) | 25 to 50 | 20.0 | 20.0 | 50.0 | 50 to 450 | 5.0 | 5.0 | 50.0 | 450 to 512 | 2.5 | 5.0 | 5.0 | 821 to 896 | 1.5 | 2.5 | 2.5 | 928 to 929 | 5.0 | N/A | N/A | 929 to 960. | 1.5 | N/A | N/A | 2110 to 2220 | 10.0 | N/A | N/A | <input checked="" type="checkbox"/> |
| | | Frequency Range (MHz) | Base, fixed (ppm) | Mobile ≥ 3 watts (ppm) | Mobile ≤ 3 watts (ppm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 to 50 | 20.0 | 20.0 | 50.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50 to 450 | 5.0 | 5.0 | 50.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 450 to 512 | 2.5 | 5.0 | 5.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 821 to 896 | 1.5 | 2.5 | 2.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 928 to 929 | 5.0 | N/A | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 929 to 960. | 1.5 | N/A | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2110 to 2220 | 10.0 | N/A | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test setup | |  <p>The diagram shows a green rectangular box labeled 'Base Station' on the left, connected by a horizontal line to a blue rectangular box labeled 'Thermal Chamber' on the right. The 'Thermal Chamber' is enclosed in a dashed-line border.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | |
|-------------|-----------------|
| Test Report | 17070763-FCC-R1 |
| Page | 69 of 91 |

| | |
|-----------|---|
| Procedure | <p>A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.</p> <p>Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.</p> |
| Remark | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |

Test Data Yes N/A

Test Plot Yes (See below) N/A

GSM Voice:

Cellular Band (Part 22H) result

| Middle Channel, $f_0 = 836.6$ MHz | | | | |
|-----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C) | Power Supplied (V _{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10 | 3.7 | 21 | 0.0251 | 2.5 |
| 0 | | 14 | 0.0167 | 2.5 |
| 10 | | 17 | 0.0203 | 2.5 |
| 20 | | 15 | 0.0179 | 2.5 |
| 30 | | 13 | 0.0155 | 2.5 |
| 40 | | 13 | 0.0155 | 2.5 |
| 50 | | 20 | 0.0239 | 2.5 |
| 55 | | 17 | 0.0203 | 2.5 |
| 25 | 4.2 | 21 | 0.0251 | 2.5 |
| | 3.5 | 18 | 0.0215 | 2.5 |

PCS Band (Part 24E) result

| Middle Channel, $f_0 = 1880$ MHz | | | | |
|----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C) | Power Supplied (V _{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10 | 3.7 | 22 | 0.0117 | 2.5 |
| 0 | | 17 | 0.0090 | 2.5 |
| 10 | | 17 | 0.0090 | 2.5 |
| 20 | | 13 | 0.0069 | 2.5 |
| 30 | | 17 | 0.0090 | 2.5 |
| 40 | | 15 | 0.0080 | 2.5 |
| 50 | | 19 | 0.0101 | 2.5 |
| 55 | | 18 | 0.0096 | 2.5 |
| 25 | 4.2 | 20 | 0.0106 | 2.5 |
| | 3.5 | 17 | 0.0090 | 2.5 |

RMC:

UMTS-FDD Band V (Part 22H)

| Middle Channel, $f_0 = 835$ MHz | | | | |
|---------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C) | Power Supplied (V _{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10 | 3.7 | 22 | 0.0263 | 2.5 |
| 0 | | 14 | 0.0168 | 2.5 |
| 10 | | 16 | 0.0192 | 2.5 |
| 20 | | 17 | 0.0204 | 2.5 |
| 30 | | 15 | 0.0180 | 2.5 |
| 40 | | 15 | 0.0180 | 2.5 |
| 50 | | 20 | 0.0240 | 2.5 |
| 55 | | 21 | 0.0251 | 2.5 |
| 25 | 4.2 | 21 | 0.0251 | 2.5 |
| | 3.5 | 20 | 0.0240 | 2.5 |

UMTS-FDD Band II (Part 24E)

| Middle Channel, $f_0 = 1880$ MHz | | | | |
|----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C) | Power Supplied (V _{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10 | 3.7 | 19 | 0.0101 | 2.5 |
| 0 | | 18 | 0.0096 | 2.5 |
| 10 | | 16 | 0.0085 | 2.5 |
| 20 | | 16 | 0.0085 | 2.5 |
| 30 | | 16 | 0.0085 | 2.5 |
| 40 | | 14 | 0.0074 | 2.5 |
| 50 | | 22 | 0.0117 | 2.5 |
| 55 | | 20 | 0.0106 | 2.5 |
| 25 | | 4.2 | 20 | 0.0106 |
| | 3.5 | 18 | 0.0096 | 2.5 |

Annex A. TEST INSTRUMENT

| Instrument | Model | Serial # | Cal Date | Cal Due | In use |
|--|-------------------|------------|------------|------------|-------------------------------------|
| RF Conducted Test | | | | | |
| Agilent ESA-E SERIES SPECTRUM ANALYZER | E4407B | MY45108319 | 09/14/2017 | 09/13/2018 | <input checked="" type="checkbox"/> |
| Power Splitter | 1# | 1# | 08/30/2017 | 08/29/2018 | <input checked="" type="checkbox"/> |
| Universal Radio Communication Tester | CMU200 | 121393 | 09/23/2017 | 09/22/2018 | <input checked="" type="checkbox"/> |
| Temperature/Humidity Chamber | UHL-270 | 001 | 10/07/2017 | 10/06/2018 | <input checked="" type="checkbox"/> |
| DC Power Supply | E3640A | MY40004013 | 09/15/2017 | 09/14/2018 | <input checked="" type="checkbox"/> |
| RF Power Sensor | Dare RPR3006C/P/W | AY554013 | 09/15/2017 | 09/14/2018 | <input checked="" type="checkbox"/> |
| Radiated Emissions | | | | | |
| EMI test receiver | ESL6 | 100262 | 09/15/2017 | 09/14/2018 | <input checked="" type="checkbox"/> |
| OPT 010 AMPLIFIER (0.1-1300MHz) | 8447E | 2727A02430 | 08/30/2017 | 08/29/2018 | <input checked="" type="checkbox"/> |
| Microwave Preamplifier (1 ~ 26.5GHz) | 8449B | 3008A02402 | 03/23/2017 | 03/22/2018 | <input checked="" type="checkbox"/> |
| Bilog Antenna (30MHz~6GHz) | JB6 | A110712 | 09/19/2017 | 09/18/2018 | <input checked="" type="checkbox"/> |
| Bilog Antenna (30MHz~2GHz) | JB1 | A112017 | 09/19/2017 | 09/18/2018 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna (1 ~18GHz) | AH-118 | 71259 | 09/22/2017 | 09/21/2018 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna (1 ~18GHz) | AH-118 | 71283 | 09/22/2017 | 09/21/2018 | <input checked="" type="checkbox"/> |
| SYNTHESIZED SIGNAL GENERATOR | 8665B | 3744A01293 | 09/15/2017 | 09/14/2018 | <input checked="" type="checkbox"/> |
| Power Amplifier | SMC150D | R1553-0313 | 03/08/2017 | 03/07/2018 | <input checked="" type="checkbox"/> |
| Power Amplifier | S41-25D | R1553-0314 | 05/26/2017 | 05/25/2018 | <input checked="" type="checkbox"/> |
| Tunable Notch Filter | 3NF-800/1000-S | AA4 | 08/30/2017 | 08/29/2018 | <input checked="" type="checkbox"/> |



| | |
|-------------|-----------------|
| Test Report | 17070763-FCC-R1 |
| Page | 73 of 91 |

| | | | | | |
|----------------------|---------------------|------|------------|------------|-------------------------------------|
| Tunable Notch Filter | 3NF- 1000/2000-S | AM 4 | 08/30/2017 | 08/29/2018 | <input checked="" type="checkbox"/> |
|----------------------|---------------------|------|------------|------------|-------------------------------------|


Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View

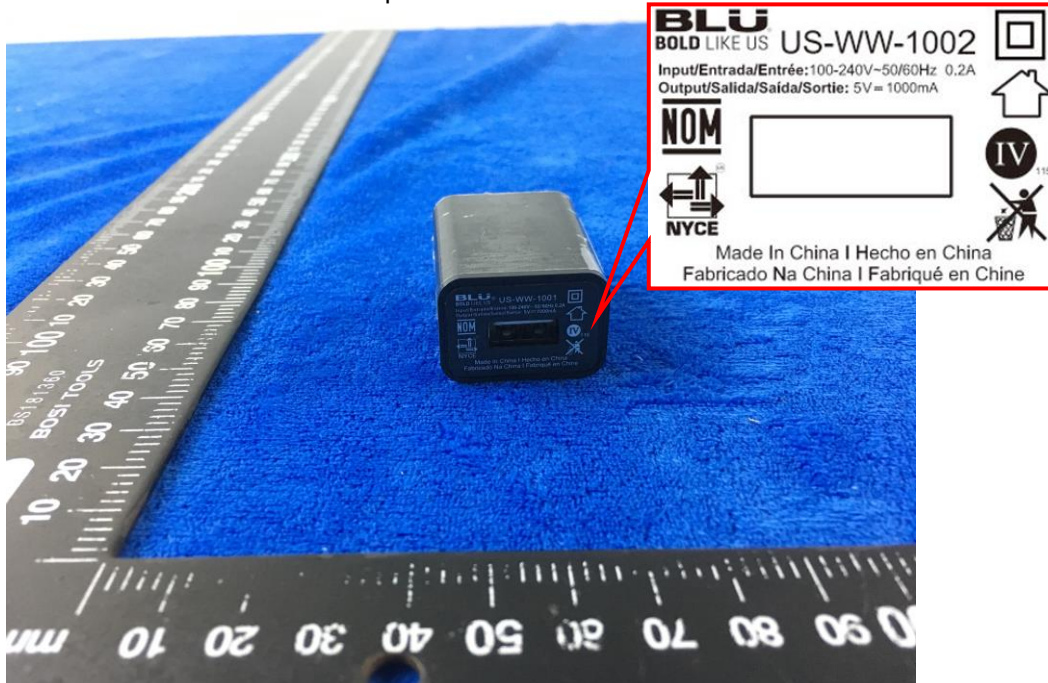

EUT - Front View



EUT - Rear View




EUT - Top View




EUT - Bottom View



EUT - Left View

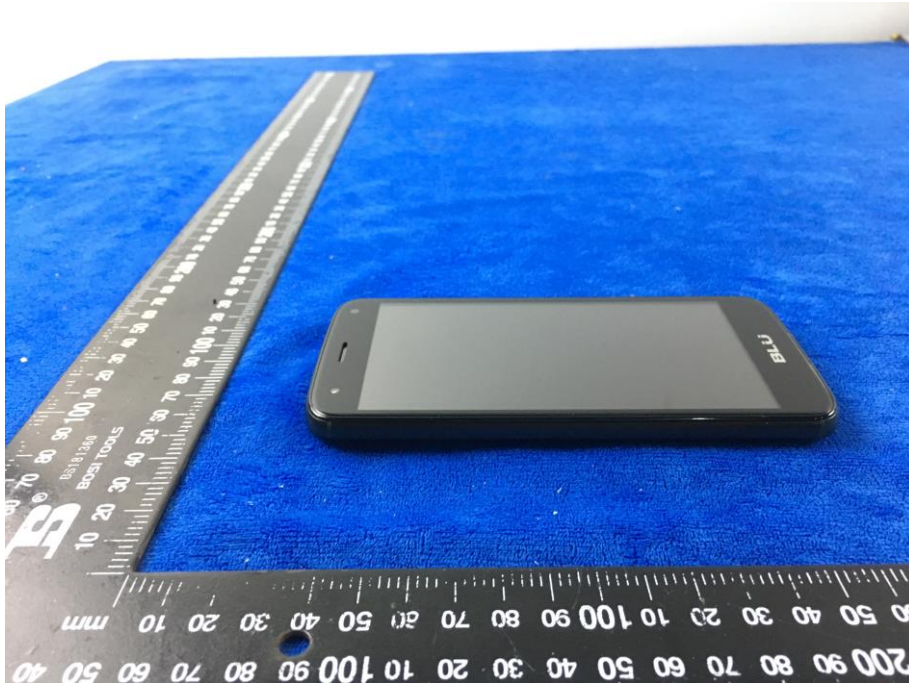

EUT - Right View

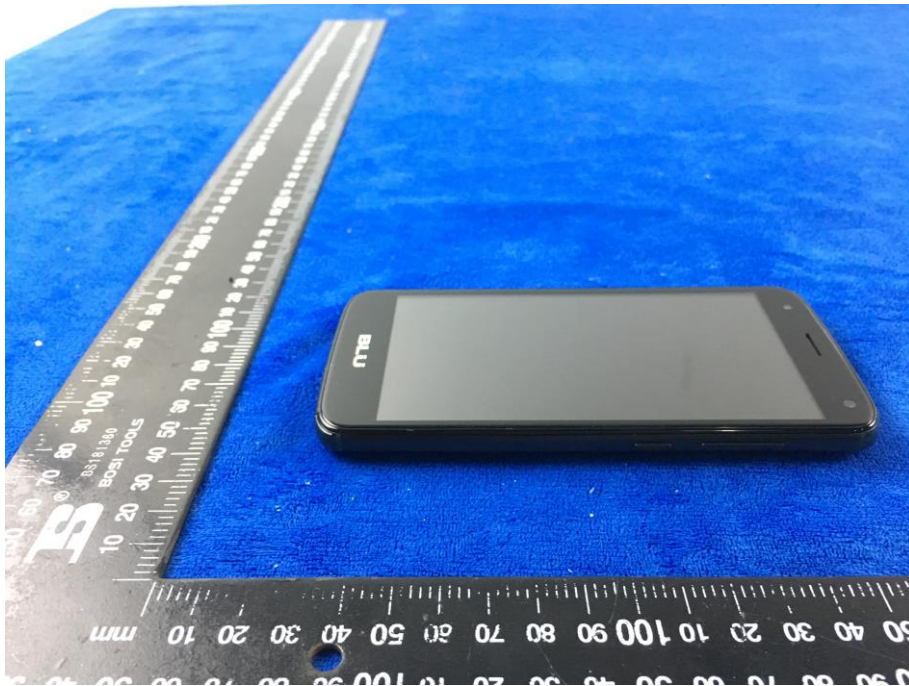

Annex B.ii. Photograph: EUT Internal Photo


Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View

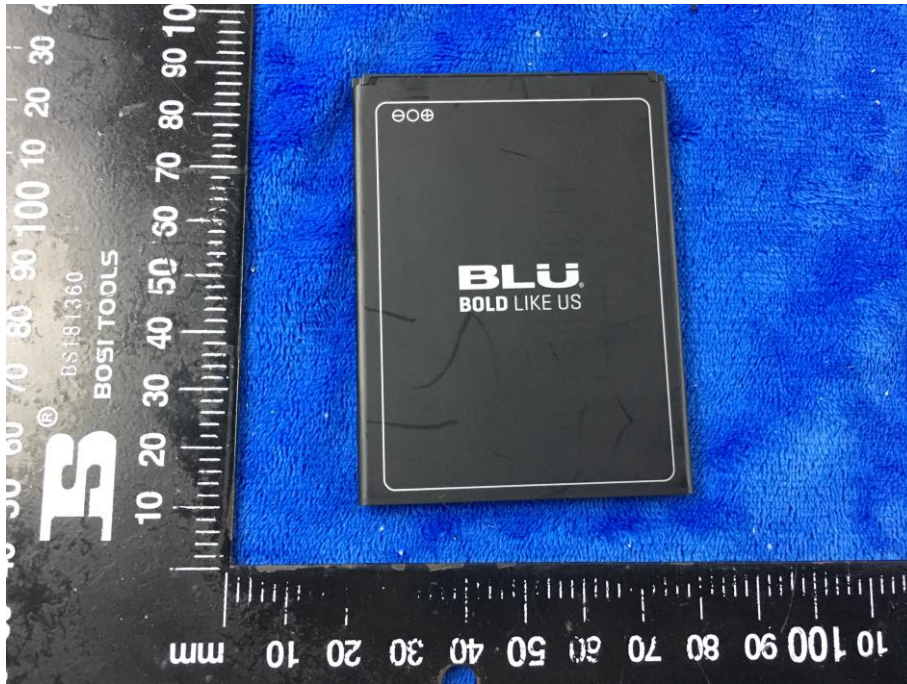


Battery - Rear View




Mainboard with Shielding – Front View

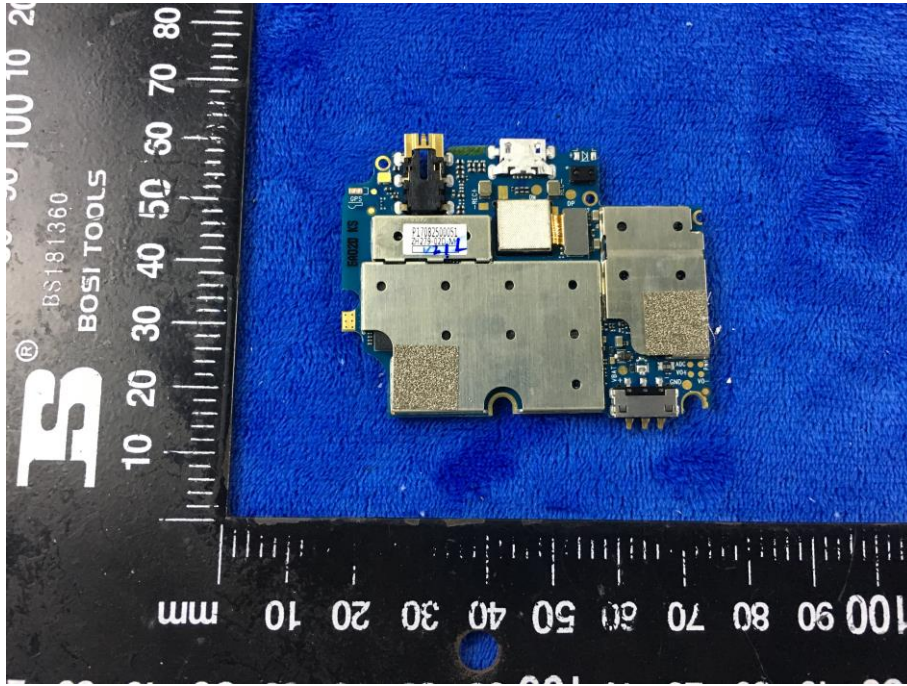


Mainboard with Shielding – Rear View

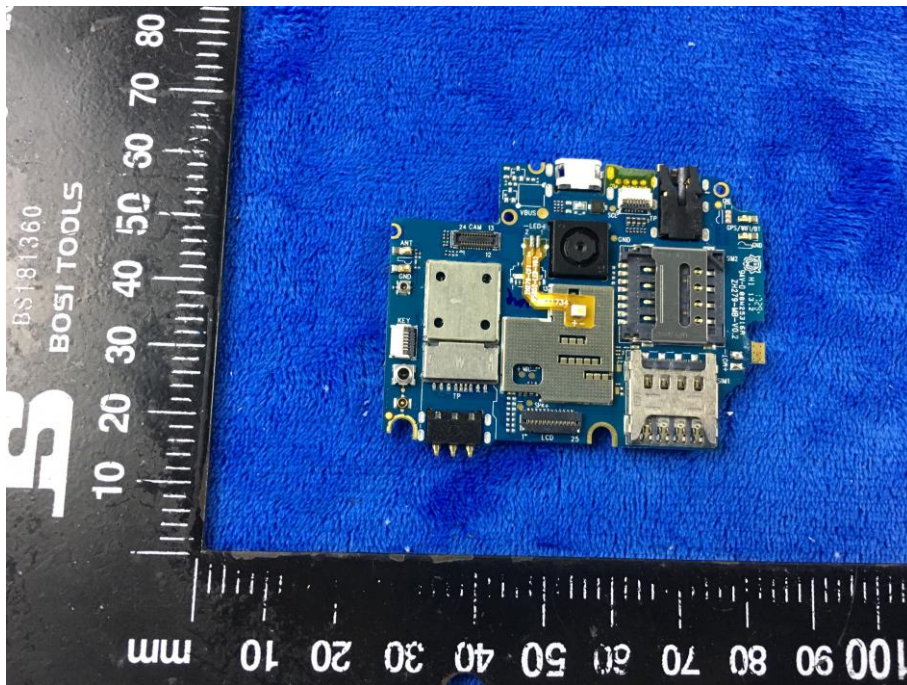


Mainboard without Shielding – Front View

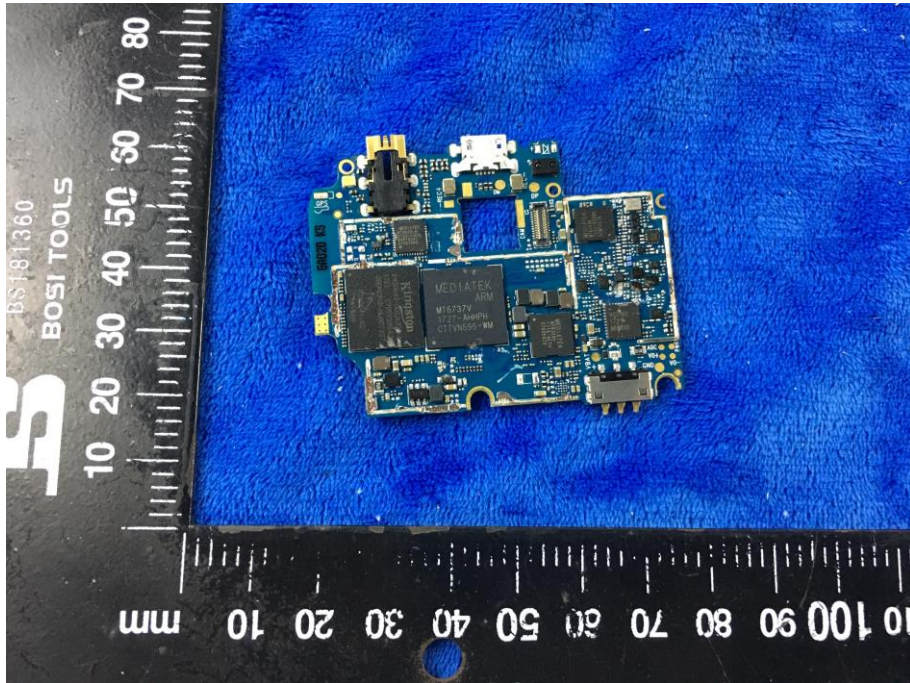


Mainboard without Shielding – Rear View

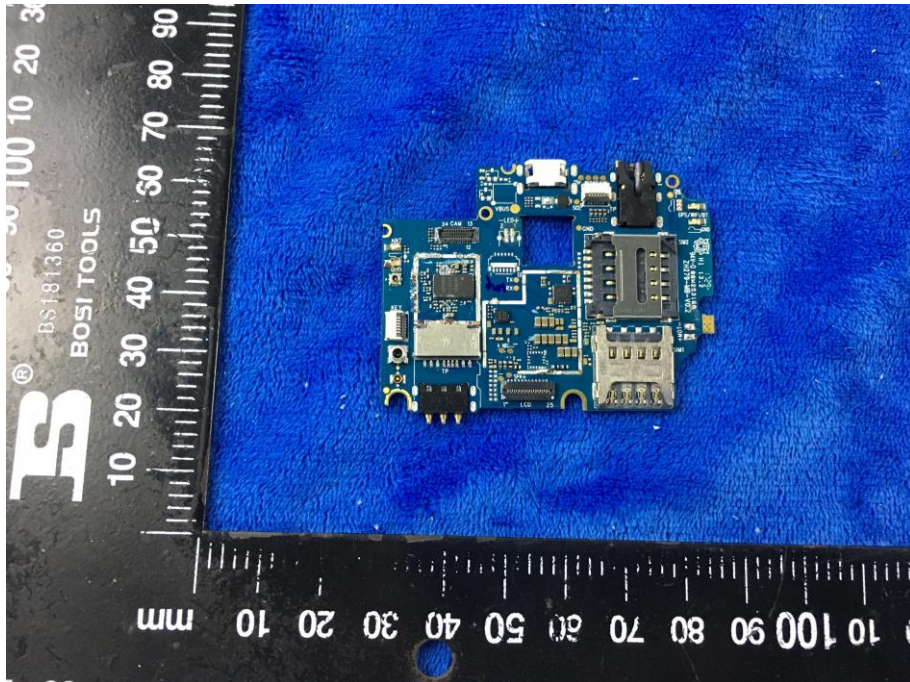

Connected Mainboard – Front View

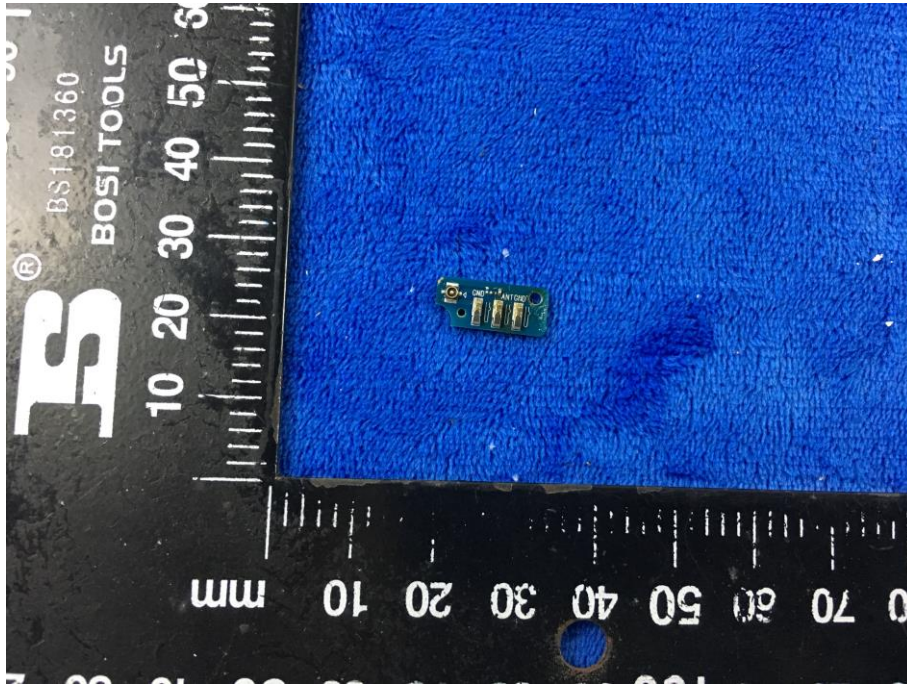

Connected Mainboard – Rear View

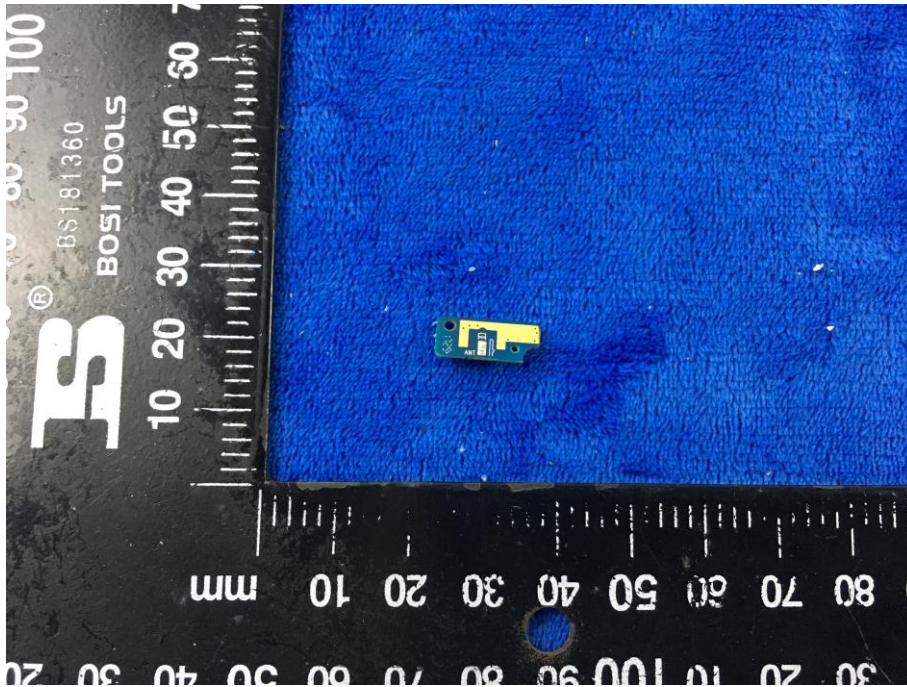

LCD – Front View



LCD – Rear View




GSM/PCS/UMTS-FDD/LTE - Antenna View




WIFI/BT/BLE/GPS - Antenna View




RXD- Antenna View

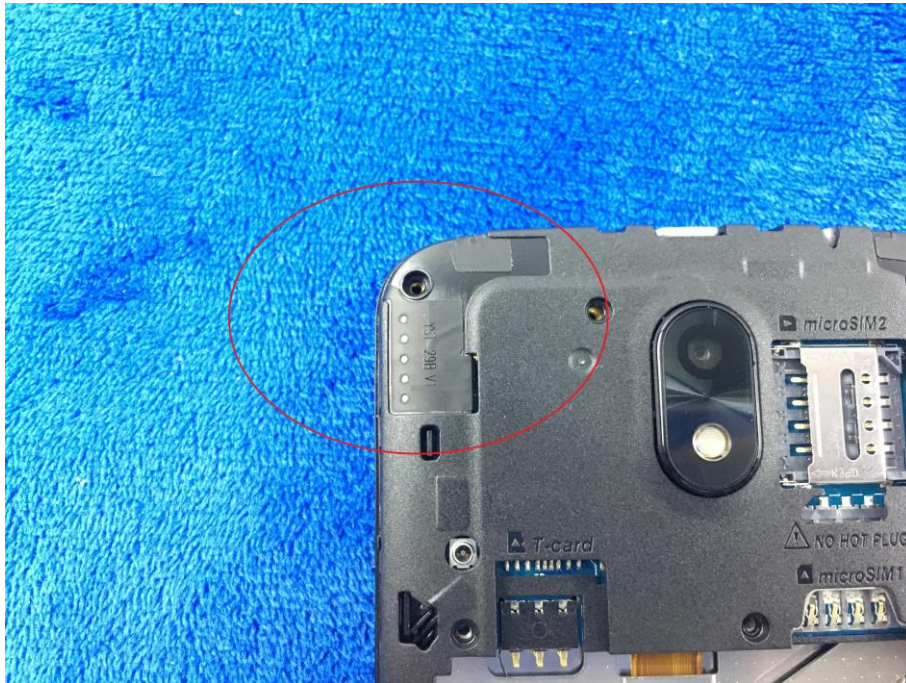

Annex B.iii. Photograph: Test Setup Photo

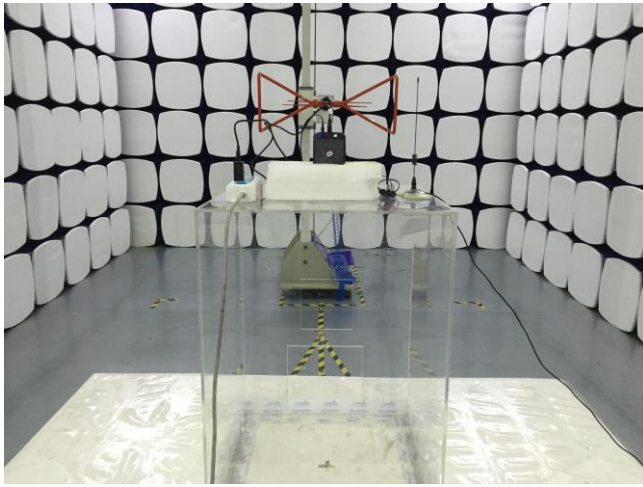

Radiated Spurious Emissions Test Setup Below 1GHz

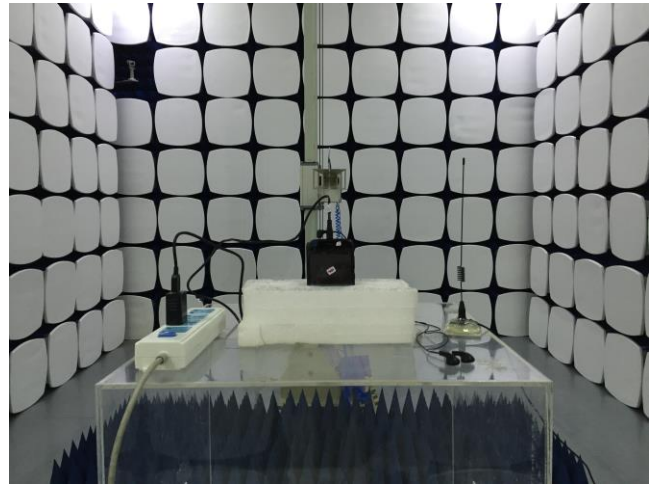


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

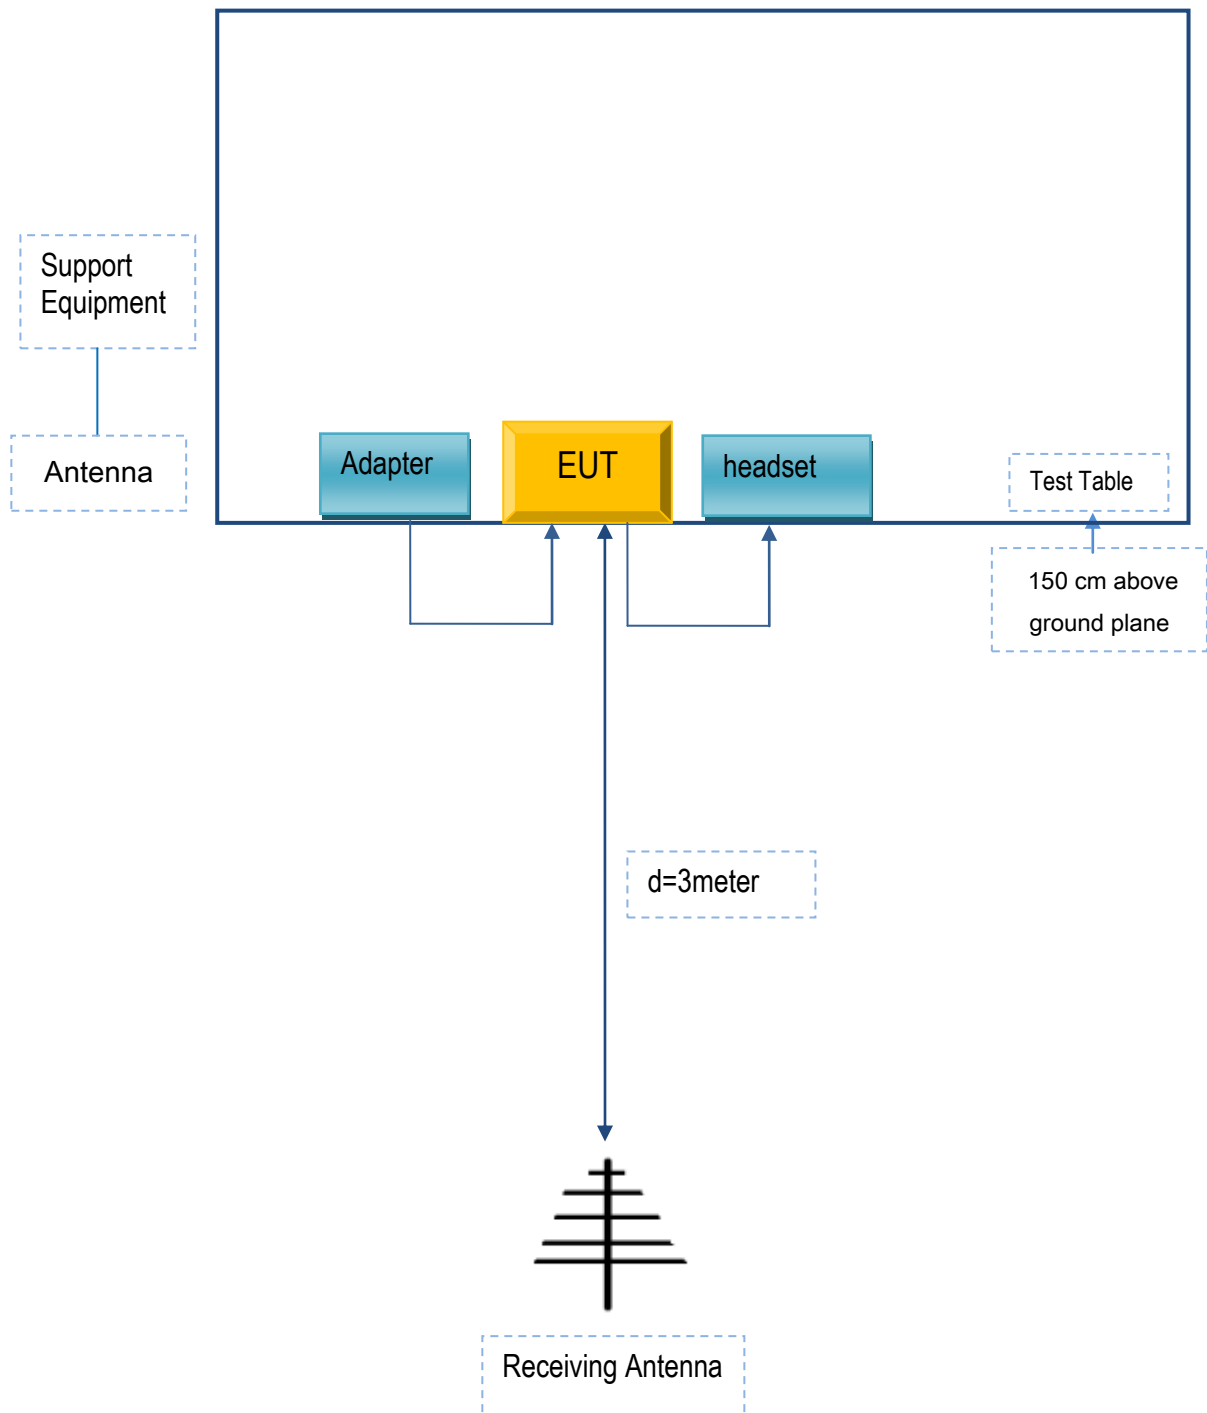

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

| Manufacturer | Equipment Description | Model | Serial No |
|--------------------|--------------------------------|------------|-----------|
| BLU Products, Inc. | Adapter | US-WW-1002 | N/A |
| SAMSUNG | headset | HS330 | N/A |
| Agilent | Wireless Connectivity Test Set | N4010A | N/A |
| OEM | omnidirectional antenna | AntSuck | N/A |

Supporting Cable:

| Cable type | Shield Type | Ferrite Core | Length | Serial No |
|------------|--------------|--------------|--------|-----------|
| USB Cable | Un-shielding | No | 0.8m | N/A |

Annex C.ii. EUT OPERATING CONKITIONS

N/A

| | |
|-------------|-----------------|
| Test Report | 17070763-FCC-R1 |
| Page | 90 of 91 |

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

| | |
|-------------|-----------------|
| Test Report | 17070763-FCC-R1 |
| Page | 91 of 91 |

Annex E. DECLARATION OF SIMILARITY

N/A