

FCC TEST REPORT

Product Name: Smart Phone
Trade Mark: BLU
Model No.: C6L MAX
Report Number: 2309266970RFC-2
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: YHLBLUC6LMXWW
Test Result: PASS
Date of Issue: October 20, 2023

Prepared for:

BLU Products, Inc.
8600 NW 36th Street, Suite #200 Doral, FL 33166

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by: David Chen
David Chen
Senior Project Engineer

Reviewed by: Henry Lu
Henry Lu
Team Leader

Approved by: Kevin Liang
Kevin Liang
Assistant Manager

Date: October 20, 2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Version

| Version No. | Date | Description |
|-------------|------------------|-------------|
| V1.0 | October 20, 2023 | Original |

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

CONTENTS

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 5 |
| 1.1 CLIENT INFORMATION | 5 |
| 1.2 EUT INFORMATION | 5 |
| 1.2.1 GENERAL DESCRIPTION OF EUT | 5 |
| 1.2.2 DESCRIPTION OF ACCESSORIES | 5 |
| 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD | 6 |
| 1.4 OTHER INFORMATION | 6 |
| 1.5 DESCRIPTION OF SUPPORT UNITS | 6 |
| 1.6 TEST LOCATION | 7 |
| 1.7 TEST FACILITY | 7 |
| 1.8 DEVIATION FROM STANDARDS | 7 |
| 1.9 ABNORMALITIES FROM STANDARD CONDITIONS | 7 |
| 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 7 |
| 1.11 MEASUREMENT UNCERTAINTY | 8 |
| 2. TEST SUMMARY | 9 |
| 3. EQUIPMENT LIST | 10 |
| 4. TEST CONFIGURATION | 11 |
| 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING | 11 |
| 4.1.1 NORMAL OR EXTREME TEST CONDITIONS | 11 |
| 4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE | 11 |
| 4.2 TEST CHANNELS | 11 |
| 4.3 EUT TEST STATUS | 11 |
| 4.4 PRE-SCAN | 12 |
| 4.4.1 PRE-SCAN UNDER ALL PACKETS AT MIDDLE CHANNEL | 12 |
| 4.4.2 WORST-CASE DATA PACKETS | 12 |
| 4.4.3 TESTED CHANNEL DETAIL | 12 |
| 4.5 TEST SETUP | 13 |
| 4.5.1 FOR RADIATED EMISSIONS TEST SETUP | 13 |
| 4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP | 14 |
| 4.5.3 FOR CONDUCTED RF TEST SETUP | 15 |
| 4.6 SYSTEM TEST CONFIGURATION | 15 |
| 4.7 DUTY CYCLE | 16 |
| 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION | 17 |
| 5.1 REFERENCE DOCUMENTS FOR TESTING | 17 |
| 5.2 ANTENNA REQUIREMENT | 17 |
| 5.3 CONDUCTED PEAK OUTPUT POWER | 18 |
| 5.4 20 dB BANDWIDTH | 19 |
| 5.5 CARRIER FREQUENCIES SEPARATION | 20 |
| 5.6 NUMBER OF HOPPING CHANNEL | 21 |
| 5.7 DWELL TIME | 22 |
| 5.8 CONDUCTED OUT OF BAND EMISSION | 23 |
| 5.9 RADIATED SPURIOUS EMISSIONS | 24 |
| 5.10 BAND EDGE MEASUREMENTS (RADIATED) | 28 |
| 5.11 CONDUCTED EMISSION | 31 |
| APPENDIX A RF TEST DATA | 34 |
| A.1 99% BANDWIDTH | 34 |
| A.2 20dB BANDWIDTH | 36 |
| A.3 CARRIER FREQUENCIES SEPARATION | 38 |
| A.4 CONDUCTED OUT OF BAND EMISSION | 39 |
| A.5 DWELL TIME | 44 |
| A.6 NUMBER OF HOPPING CHANNEL | 48 |

APPENDIX 1 PHOTOS OF TEST SETUP.....49
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....49



1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

| | |
|---------------------------------|---|
| Applicant: | BLU Products, Inc. |
| Address of Applicant: | 8600 NW 36th Street, Suite #200 Doral, FL 33166 |
| Manufacturer: | BLU Products, Inc. |
| Address of Manufacturer: | 8600 NW 36th Street, Suite #200 Doral, FL 33166 |

1.2 EUT INFORMATION

1.2.1 General Description of EUT

| | | | |
|---|--|--|-------------------|
| Product Name: | Smart Phone | | |
| Model No.: | C6L MAX | | |
| Trade Mark: | BLU | | |
| DUT Stage: | Identical Prototype | | |
| EUT Supports Function: (Provided by the customer) | GSM Bands: | GSM850/PCS 1900 | |
| | UTRA Bands: | WCDMA Band II/ Band IV/ Band V | |
| | E-UTRA Bands: | FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 17 TDD Band 38 | |
| | 2.4 GHz ISM Band: | IEEE 802.11b/g/n | |
| | | Bluetooth V4.2 | |
| | RNSS Band: | 1559 MHz to 1610 MHz | GPS/ BDS/ GLONASS |
| BSR: | VHF Band II | FM | |
| Software Version: | BLU_C0210_V13.0.G.05.02_TIGO 21-09-2023 14:22 (Provided by the customer) | | |
| Hardware Version: | FS170-76E (Provided by the customer) | | |
| Sample Received Date: | September 26, 2023 | | |
| Sample Tested Date: | September 26, 2023 to October 17, 2023 | | |
| Remark: | The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description. | | |

1.2.2 Description of Accessories

| Adapter | |
|-------------------|--------------------------|
| Model No.: | US-AR-1001 |
| Input: | 100-240 V~50/60 Hz 0.2 A |
| Output: | 5.0 V = 1000 mA |

| Battery | |
|--------------------------------|-----------------------------|
| Model No.: | C846050300L |
| Battery Type: | Lithium-ion Polymer Battery |
| Rated Voltage: | 3.8 Vdc |
| Limited Charge Voltage: | 4.35 Vdc |
| Rated Capacity: | 3000 mAh |

| Cable | |
|--------------------|----------------------------|
| Connector: | USB Cable |
| Cable Type: | Unshielded without ferrite |
| Length: | 0.5 Meter |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

| | |
|--|--|
| Frequency Band: | 2400 MHz to 2483.5 MHz |
| Frequency Range: | 2402 MHz to 2480 MHz |
| Bluetooth Version: | Bluetooth BR + EDR |
| Modulation Technique: | Frequency Hopping Spread Spectrum (FHSS) |
| Type of Modulation: | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Number of Channels: | 79 |
| Channel Separation: | 1 MHz |
| Hopping Channel Type: | Adaptive Frequency Hopping Systems |
| Antenna Type: (Provided by the customer) | FPCB Antenna |
| Antenna Gain: (Provided by the customer) | 2.06 dBi |
| Maximum Peak Power: | 9.367 dBm |
| Normal Test Voltage: | 3.8 Vdc |

1.4 OTHER INFORMATION

| Operation Frequency Each of Channel | |
|--|-----------------------------------|
| $f = 2402 + k \text{ MHz}, k = 0, \dots, 78$ | |
| Note: | |
| f | is the operating frequency (MHz); |
| k | is the operating channel. |

| Modulation Configure | | | |
|----------------------|--------|-------------|-------------|
| Modulation | Packet | Packet Type | Packet Size |
| GFSK | 1-DH1 | 4 | 27 |
| | 1-DH3 | 11 | 183 |
| | 1-DH5 | 15 | 339 |
| $\pi/4$ DQPSK | 2-DH1 | 20 | 54 |
| | 2-DH3 | 26 | 367 |
| | 2-DH5 | 30 | 679 |
| 8DPSK | 3-DH1 | 24 | 83 |
| | 3-DH3 | 27 | 552 |
| | 3-DH5 | 31 | 1021 |

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

| Description | Manufacturer | Model No. | Serial Number | Supplied by |
|-------------|--------------|-----------|---------------|-------------|
| -- | -- | -- | -- | -- |

2) Support Cable

| Cable No. | Description | Connector | Length | Supplied by |
|-----------|---------------|-----------|-----------|-------------|
| 1 | Antenna Cable | SMA | 0.1 Meter | UnionTrust |

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|-----------------------------------|
| 1 | Conducted emission 9kHz-150kHz | ±3.2 dB |
| 2 | Conducted emission 150kHz-30MHz | ±2.7 dB |
| 3 | Radiated emission 9kHz-30MHz | ± 4.7 dB |
| 4 | Radiated emission 30MHz-1GHz | ± 4.9 dB |
| 5 | Radiated emission 1GHz-18GHz | ± 4.8 dB |
| 6 | Radiated emission 18GHz-26GHz | ± 5.1 dB |
| 7 | Radiated emission 26GHz-40GHz | ± 5.1 dB |
| 8 | Conducted spurious emissions | ± 2.7 dB |
| 9 | RF Power, Conducted | ± 0.68 dB |
| 10 | Occupied Bandwidth | ± 1.86 % |
| 11 | Radio Frequency | 2.4 GHz: ± 6.5 x 10 ⁻⁸ |
| 12 | Transmission Time | ± 0.19 % |

2. TEST SUMMARY

| FCC 47 CFR Part 15 Subpart C Test Cases | | | |
|---|---|---|--------|
| Test Item | Test Requirement | Test Method | Result |
| Antenna Requirement | FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b) | N/A | PASS |
| AC Power Line Conducted Emission | FCC 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 Section 6.2 | PASS |
| Conducted Peak Output Power | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) | ANSI C63.10-2013 Section 7.8.5 | PASS |
| 20 dB Bandwidth | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 Section 6.9.2 | PASS |
| Carrier Frequencies Separation | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 Section 7.8.2 | PASS |
| Number of Hopping Channel | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)(iii) | ANSI C63.10-2013 Section 7.8.3 | PASS |
| Dwell Time | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 Section 7.8.4 | PASS |
| Conducted Out of Band Emission | FCC 47 CFR Part 15 Subpart C Section 15.247(d) | ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8 | PASS |
| Radiated Emissions | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6 | PASS |
| Band Edge Measurement | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 Section 6.10.5 | PASS |
| Disclaimer and Explanations: | | | |
| The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification. | | | |

3. EQUIPMENT LIST

| Radiated Emission Test Equipment List | | | | | | |
|---------------------------------------|--|---------------|------------|----------------------------|-------------|---------------|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date | Cal. Due date |
| <input checked="" type="checkbox"/> | 3m SAC | ETS-LINDGREN | 3M | Euroshiedpn-CT001270-1317 | 22-Jan-2021 | 21-Jan-2024 |
| <input checked="" type="checkbox"/> | Receiver | R&S | ESIB26 | 100114 | 3-Nov-2022 | 2-Nov-2023 |
| <input checked="" type="checkbox"/> | EXA Spectrum Analyzer | KEYSIGHT | N9010A | MY51440197 | 14-Apr-2023 | 13-Apr-2024 |
| <input checked="" type="checkbox"/> | Loop Antenna | ETS-LINDGREN | 6502 | 00202525 | 21-Nov-2022 | 20-Nov-2023 |
| <input checked="" type="checkbox"/> | Broadband Antenna | ETS-LINDGREN | 3142E | 00201566 | 13-Dec-2022 | 12-Dec-2023 |
| <input checked="" type="checkbox"/> | 6dB Attenuator | Talent | RA6A5-N-18 | 18103001 | 13-Dec-2022 | 12-Dec-2023 |
| <input checked="" type="checkbox"/> | Preamplifier | HP | 8447F | 2805A02960 | 1-Nov-2022 | 31-Oct-2023 |
| <input checked="" type="checkbox"/> | Double-Ridged Waveguide Horn Antenna (Pre-amplifier) | ETS-LINDGREN | 3117-PA | 00201541 | 16-Apr-2023 | 15-Apr-2025 |
| <input checked="" type="checkbox"/> | Pre-amplifier | ETS-LINDGREN | 00118385 | 00201874 | 1-Nov-2022 | 31-Oct-2023 |
| <input checked="" type="checkbox"/> | Double-Ridged Waveguide Horn Antenna (Pre-amplifier) | ETS-LINDGREN | 3116C-PA | 00202652 | 21-Nov-2022 | 20-Nov-2023 |
| <input checked="" type="checkbox"/> | Pre-amplifier | ETS-LINDGREN | 00118384 | 00202652 | 21-Nov-2022 | 20-Nov-2023 |
| <input checked="" type="checkbox"/> | Band Reject Filter (2400MHz~2500MHz) | Micro-Tronics | BRM50702 | G248 | 2-Nov-2022 | 1-Nov-2023 |
| <input checked="" type="checkbox"/> | Multi device Controller | ETS-LINDGREN | 7006-001 | 00160105 | N/A | N/A |
| <input checked="" type="checkbox"/> | Test Software | Audix | e3 | Software Version: 9.160323 | | |

| Conducted Emission Test Equipment List | | | | | | |
|--|---------------|--------------|-----------|-------------------------------|------------|---------------|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date | Cal. Due date |
| <input checked="" type="checkbox"/> | Receiver | R&S | ESR7 | 101181 | 1-Nov-2022 | 31-Oct-2023 |
| <input checked="" type="checkbox"/> | Pulse Limiter | R&S | ESH3-Z2 | 0357.8810.54 | 1-Nov-2022 | 31-Oct-2023 |
| <input checked="" type="checkbox"/> | LISN | R&S | ESH2-Z5 | 860014/024 | 1-Nov-2022 | 31-Oct-2023 |
| <input type="checkbox"/> | LISN | ETS-Lindgren | 3816/2SH | 00201088 | 1-Nov-2022 | 31-Oct-2023 |
| <input checked="" type="checkbox"/> | Test Software | Audix | e3 | Software Version: 9 20151119i | | |

| RF Conducted Test Equipment List | | | | | | |
|-------------------------------------|---------------------------|--------------|-----------|---------------|-------------|---------------|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date | Cal. Due date |
| <input type="checkbox"/> | EXA Spectrum Analyzer | KEYSIGHT | N9010A | MY51440197 | 14-Apr-2023 | 13-Apr-2024 |
| <input checked="" type="checkbox"/> | EXA Spectrum Analyzer | KEYSIGHT | N9020A | MY51286807 | 1-Nov-2022 | 31-Oct-2023 |
| <input checked="" type="checkbox"/> | USB Wideband Power Sensor | KEYSIGHT | U2021XA | MY55430035 | 3-Nov-2022 | 2-Nov-2023 |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

| Environment Parameter | Selected Values During Tests | | |
|---|------------------------------|------------|-----------------------|
| Test Condition | Ambient | | |
| | Temperature (°C) | Voltage(V) | Relative Humidity (%) |
| NT/NV | +15 to +35 | 3.8 | 20 to 75 |
| Remark: | | | |
| 1) NV: Normal Voltage; NT: Normal Temperature | | | |

4.1.2 Record of Normal Environment and Test Sample

| Test Item | Temp. (°C) | Relative Humidity (%) | Pressure (kPa) | Sample No. | Tested by |
|----------------------------------|------------|-----------------------|----------------|-----------------------|--------------|
| AC Power Line Conducted Emission | 24.5 | 51.1 | 99.5 | S202309262172-ZJA05/6 | Lucas Ouyang |
| Conducted Peak Output Power | 24.5 | 51.2 | 99.5 | S202309262172-ZJA02/6 | Rain Wang |
| 20 dB Bandwidth | | | | | |
| Carrier Frequencies Separation | | | | | |
| Number of Hopping Channel | | | | | |
| Dwell Time | | | | | |
| Conducted Out of Band Emission | 24.5 | 59.9 | 99.5 | S202309262172-ZJA05/6 | Fire Huo |
| Radiated Emissions | | | | | |
| Band Edge Measurement | | | | | |

4.2 TEST CHANNELS

| Mode | Tx/Rx Frequency | Test RF Channel Lists | | |
|-----------------------------|----------------------|-----------------------|------------|------------|
| | | Lowest(L) | Middle(M) | Highest(H) |
| GFSK (DH1, DH3, DH5) | 2402 MHz to 2480 MHz | Channel 0 | Channel 39 | Channel 78 |
| | | 2402 MHz | 2441 MHz | 2480 MHz |
| π/4DQPSK (DH1, DH3, DH5) | 2402 MHz to 2480 MHz | Channel 0 | Channel 39 | Channel 78 |
| | | 2402 MHz | 2441 MHz | 2480 MHz |
| 8DPSK (DH1, DH3, DH5) | 2402 MHz to 2480 MHz | Channel 0 | Channel 39 | Channel 78 |
| | | 2402 MHz | 2441 MHz | 2480 MHz |

4.3 EUT TEST STATUS

| Type of Modulation | Tx Function | Description |
|-------------------------|-------------|--|
| GFSK/π/4DQPSK/ 8DPSK | 1Tx | <ol style="list-style-type: none"> Keep the EUT in continuously transmitting with Modulation test single Keep the EUT in continuously transmitting with Modulation test Hopping Frequency. |

| Power Setting (Provided by the customer) |
|--|
| Power Setting: 4 |

| |
|---|
| Test Software (Provided by the customer) |
| Engineering mode: *##83781#*## |

4.4 PRE-SCAN

4.4.1 Pre-scan under all packets at middle channel

| Conducted Average Power (dBm) for packets | | | | | | | | | |
|---|-------|-------|-------|----------|-------|-------|-------|-------|-------|
| Type of Modulation | GFSK | | | π/4DQPSK | | | 8DPSK | | |
| Packets | 1-DH1 | 1-DH3 | 1-DH5 | 2-DH1 | 2-DH3 | 2-DH5 | 3-DH1 | 3-DH3 | 3-DH5 |
| Power (dBm) | 2.44 | 5.62 | 6.29 | 1.85 | 4.94 | 5.61 | 1.85 | 4.89 | 5.59 |

4.4.2 Worst-case data packets

| Type of Modulation | Worst-case data rates |
|--------------------|-----------------------|
| GFSK | 1-DH5 |
| π/4DQPSK | 2-DH5 |
| 8DPSK | 3-DH5 |

4.4.3 Tested channel detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

| Type of Modulation | GFSK | | | π/4DQPSK | | | 8DPSK | | |
|-----------------------------------|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Data Packets | 1-DH1 | 1-DH3 | 1-DH5 | 2-DH1 | 2-DH3 | 2-DH5 | 3-DH1 | 3-DH3 | 3-DH5 |
| Available Channel | 0 to 78 | | | | | | | | |
| Test Item | Test channel and choose of data packets | | | | | | | | |
| AC Power Line Conducted Emission | Frequency Hopping Channel 0 to 78 | | | | | | | | |
| | Link | | | | | | | | |
| Conducted Peak Output Power | Channel 0 & 39 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 20 dB Bandwidth | Channel 0 & 39 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Carrier Frequencies Separation | Frequency Hopping Channel 0 to 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Number of Hopping Channel | Frequency Hopping Channel 0 to 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Dwell Time | Channel 39 | | | | | | | | |
| | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Conducted Out of Band Emission | Channel 0 & 39 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Radiated Emissions | Channel 0 & 39 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Band Edge Measurements (Radiated) | Channel 0 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Remark:

- The mark “☒” means is chosen for testing;
- The mark “☐” means is not chosen for testing.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

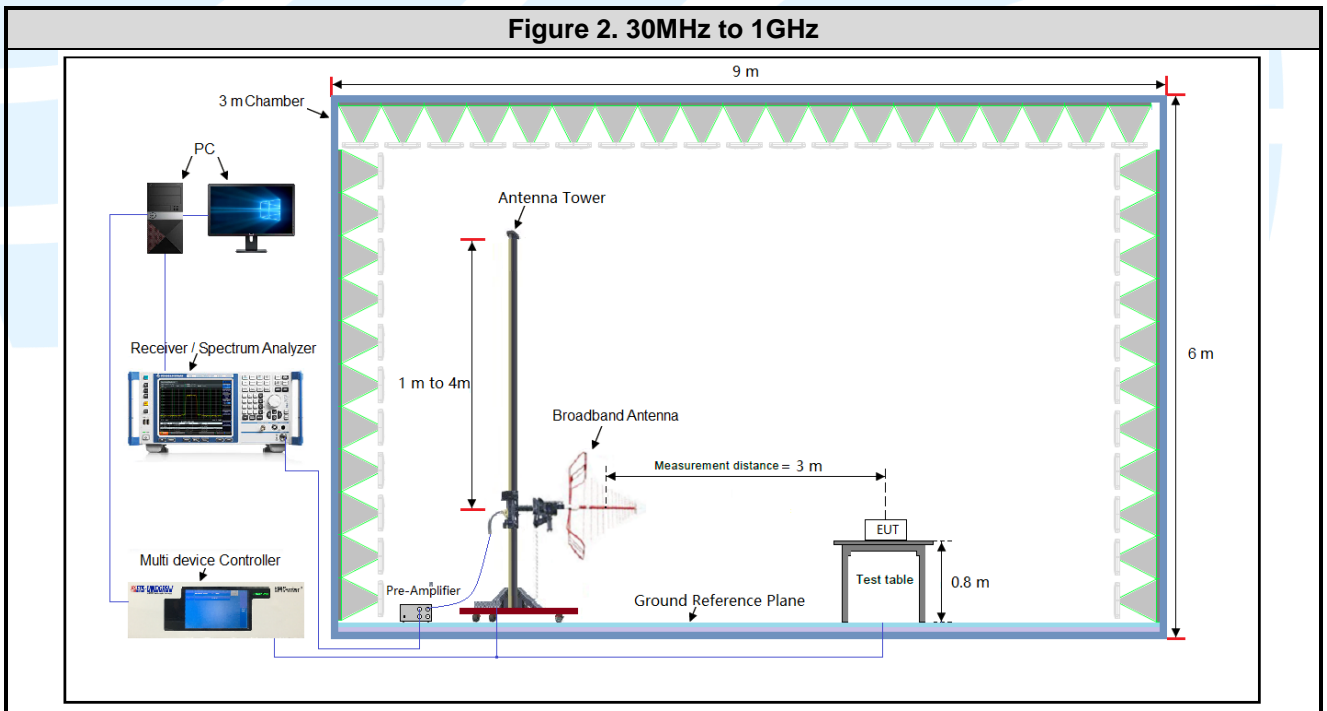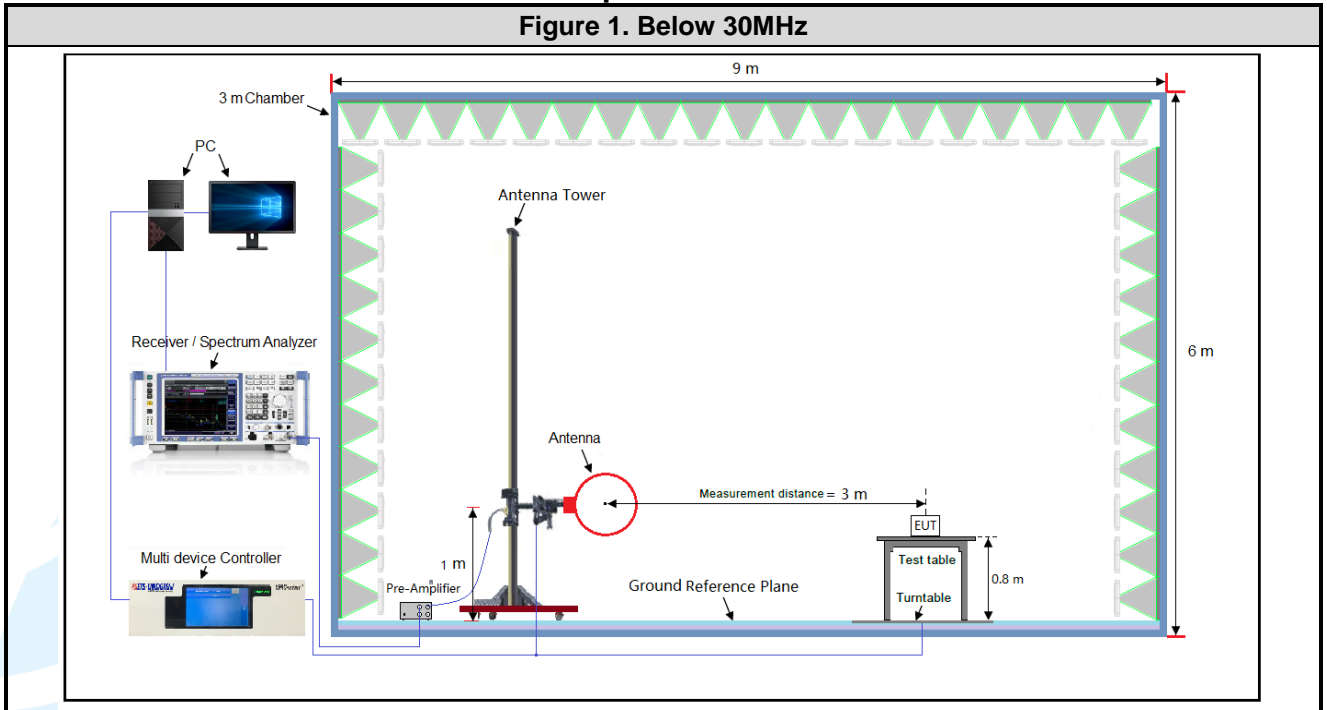


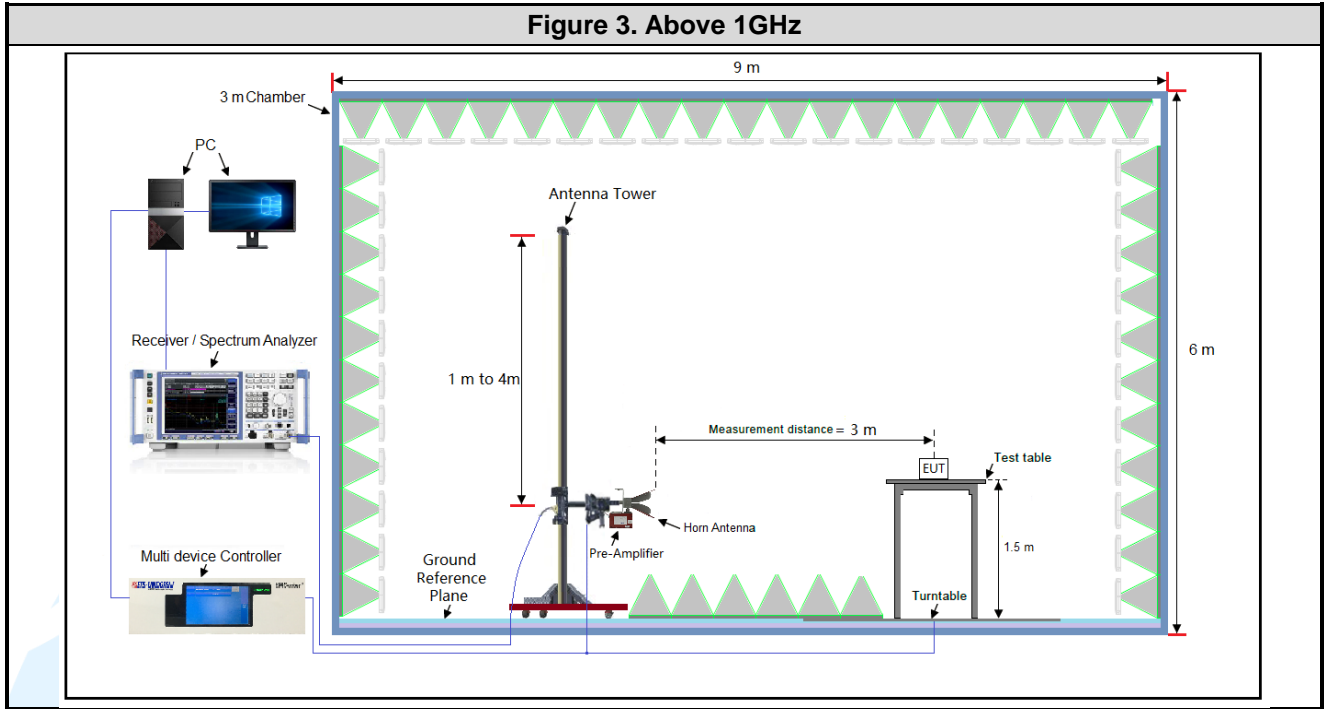

4.5.2 For Conducted Emissions test setup

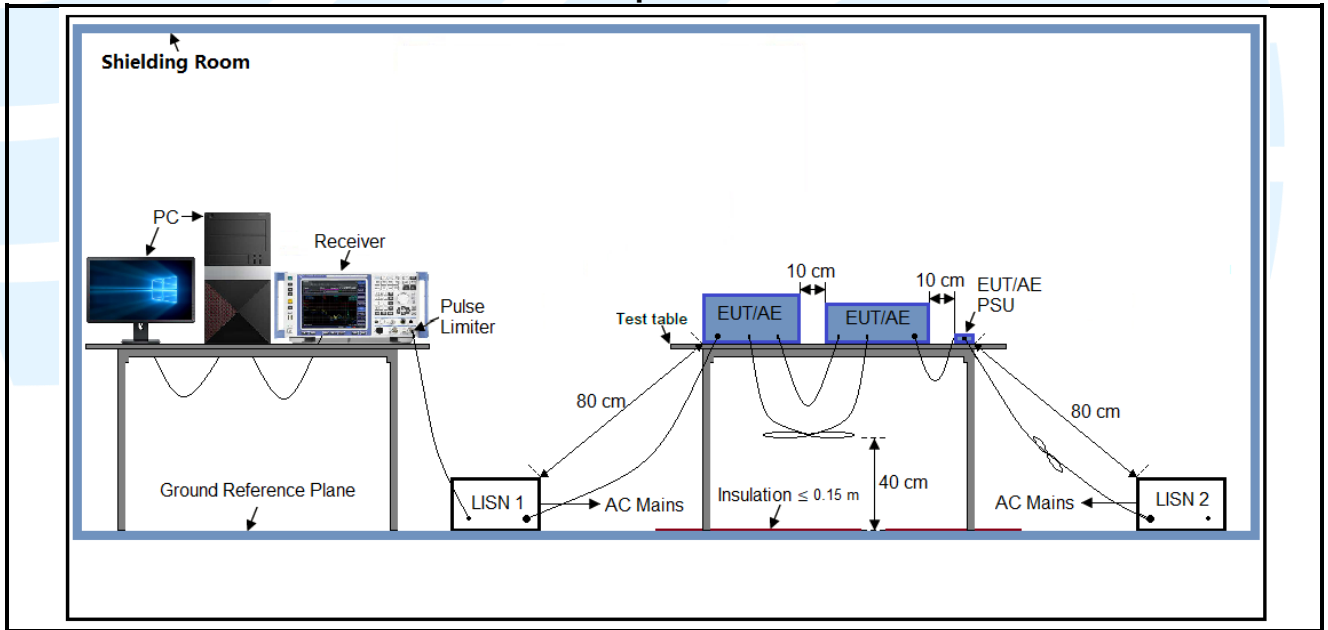

4.5.3 For Conducted RF test setup

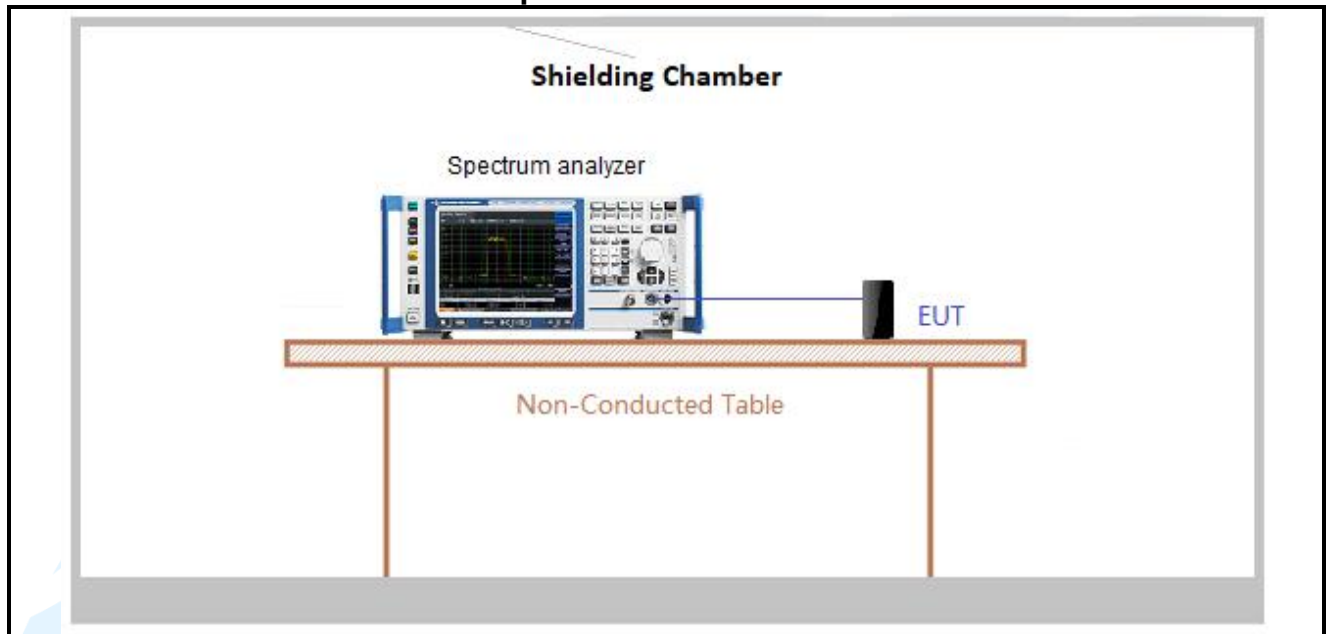

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results

| Modulation | Packets | On Time (msec) | Period (msec) | Duty Cycle (linear) | Duty Cycle (%) | Duty Cycle Factor (dB) | 1/T Minimum VBW (kHz) |
|------------|---------|----------------|---------------|---------------------|----------------|------------------------|-----------------------|
| GFSK | 1-DH5 | 2.895 | 3.750 | 0.77 | 77.20 | 1.12 | 0.35 |

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 * log(1/ Duty cycle);

The test plots as follows

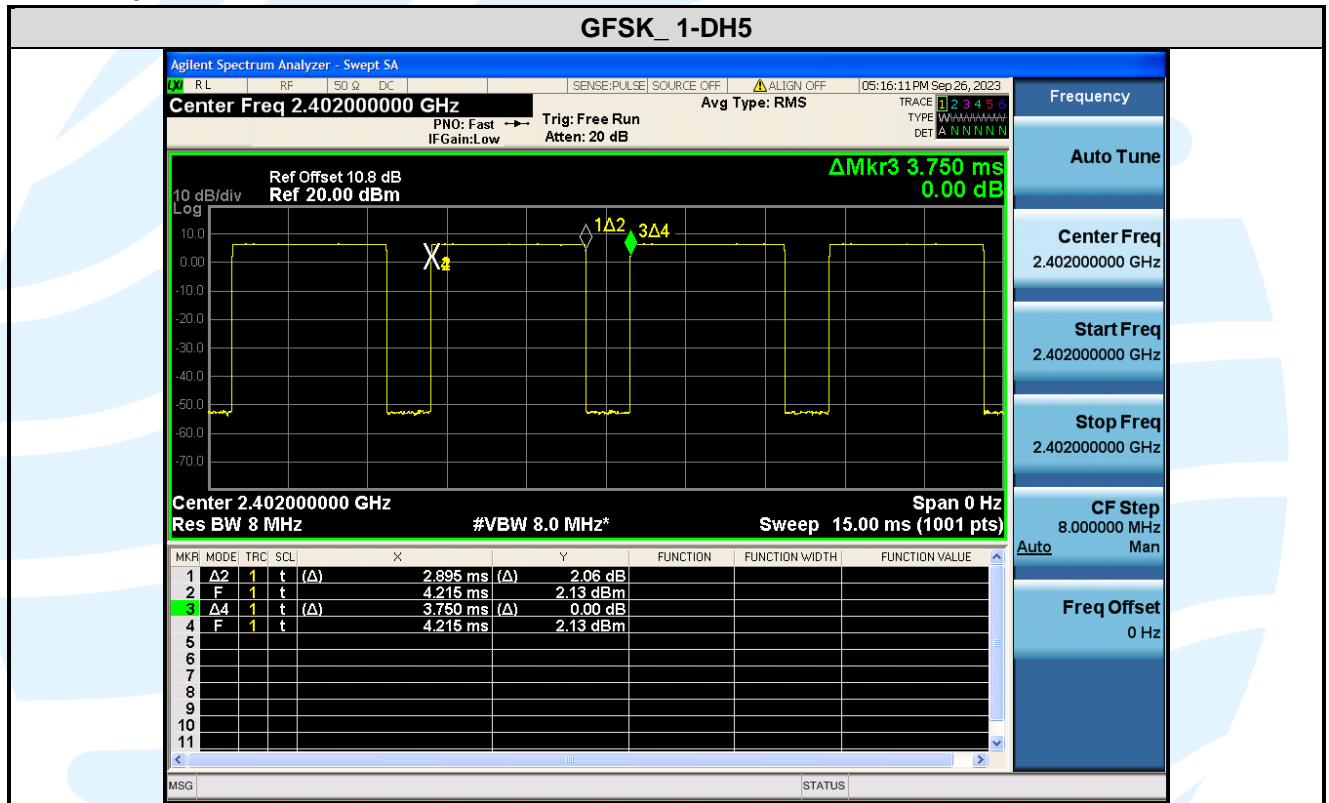

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

| No. | Identity | Document Title |
|-----|--|---|
| 1 | FCC 47 CFR Part 2 | Frequency allocations and radio treaty matters; general rules and regulations |
| 2 | FCC 47 CFR Part 15 | Radio Frequency Devices |
| 3 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |
| 4 | KDB 558074 D01 15.247 Meas Guidance v05r02 | Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules |

5.2 ANTENNA REQUIREMENT

| Standard Requirement |
|---|
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> |
| <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |
| <p>EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 2.06 dBi.</p> |

5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)

Test Method: ANSI C63.10-2013 Section 7.8.5

Limit: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW ≥ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

| Modulation | Channel | Frequency | Max. Peak Power | | Peak Power Limit | Max. Avg. Power | Result |
|------------|---------|-----------|-----------------|-------|------------------|-----------------|--------|
| | | (MHz) | (dBm) | (mW) | (dBm) | (dBm) | |
| GFSK | 0 | 2402 | 6.839 | 4.829 | 20.97 | 6.07 | Pass |
| | 39 | 2441 | 7.153 | 5.192 | 20.97 | 6.29 | Pass |
| | 78 | 2480 | 7.147 | 5.184 | 20.97 | 6.22 | Pass |
| π/4DQPSK | 0 | 2402 | 8.735 | 7.473 | 20.97 | 5.37 | Pass |
| | 39 | 2441 | 9.115 | 8.156 | 20.97 | 5.61 | Pass |
| | 78 | 2480 | 8.803 | 7.591 | 20.97 | 5.51 | Pass |
| 8DPSK | 0 | 2402 | 8.931 | 7.818 | 20.97 | 5.37 | Pass |
| | 39 | 2441 | 9.367 | 8.644 | 20.97 | 5.59 | Pass |
| | 78 | 2480 | 9.085 | 8.100 | 20.97 | 5.52 | Pass |

Note: The antenna gain of 2.06 dBi less than 6dBi maximum permission antenna gain value based on 125 mW peak output power limit.

5.420 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)
Test Method: ANSI C63.10-2013 Section 6.9.2
Limit: None; for reporting purposes only.
Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
 Use the following spectrum analyzer settings:

- a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel.
- b) RBW = 1% to 5% of the OBW.
- c) VBW \geq 3 x RBW
- d) Sweep = auto;
- e) Detector function = peak
- f) Trace = max hold
- g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.
Instruments Used: Refer to section 3 for details
Test Mode: Link mode
Test Results: Please refer to Appendix A

5.5 CARRIER FREQUENCIES SEPARATION

| | |
|--------------------------|--|
| Test Requirement: | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10-2013 Section 7.8.2 |
| Limit: | <p>Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.</p> |
| Test Procedure: | <p>Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.</p> <p>Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none"> a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) \geq RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p> |
| Test Setup: | Refer to section 4.5.3 for details. |
| Instruments Used: | Refer to section 3 for details |
| Test Mode: | Link mode |
| Test Results: | Please refer to Appendix A |

5.6 NUMBER OF HOPPING CHANNEL

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1)(iii)
Test Method: ANSI C63.10-2013 Section 7.8.3
Limit: Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.
Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
 Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW ≥ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: **Please refer to Appendix A**

5.7 DWELL TIME

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1)
- Test Method:** ANSI C63.10-2013 Section 7.8.4
- Limit:** Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:
 - a) Span = zero span, centered on a hopping channel
 - b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
 - c) Sweep = As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
 - d) Detector function = peak
 - e) Trace = max hold
 - f) Use the marker-delta function to determine the dwell time
- Note:** The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Mode:** Link mode
- Test Results:** **Please refer to Appendix A**

5.8 CONDUCTED OUT OF BAND EMISSION

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(d)
- Test Method:** ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8
- Limit:** In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- a) Set instrument center frequency to 2400 MHz or 2483.5 MHz.
- b) Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Sweep points $\geq 2 \times$ Span/RBW
- h) Trace mode = max hold.
- i) Allow the trace to stabilize.
- j) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

Step 2: Measurement Procedure OOBE

- a) Set RBW = 100 kHz.
- b) Set VBW ≥ 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Mode:** Hopping Frequencies Transmitter mode
- Test Results:** Please refer to Appendix A

5.9 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6

Receiver Setup:

| Frequency | RBW |
|---------------------|-------------|
| 0.009 MHz-0.150 MHz | 200/300 kHz |
| 0.150 MHz -30 MHz | 9/10 kHz |
| 30 MHz-1 GHz | 100/120 kHz |
| Above 1 GHz | 1 MHz |

Limits:

Spurious Emissions

| Frequency | Field strength (microvolt/meter) | Limit (dBµV/m) | Remark | Measurement distance (m) |
|---------------------|----------------------------------|-----------------|------------|--------------------------|
| 0.009 MHz-0.490 MHz | 2400/F(kHz) | -- | -- | 300 |
| 0.490 MHz-1.705 MHz | 24000/F(kHz) | -- | -- | 30 |
| 1.705 MHz-30 MHz | 30 | -- | -- | 30 |
| 30 MHz-88 MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88 MHz-216 MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216 MHz-960 MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1 GHz | 500 | 54.0 | Average | 3 |

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:
 - 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
2. Above 1GHz test procedure as below:
 - 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
 - 2) Test the EUT in the lowest channel, middle channel, the Highest channel

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:

Radiated Emission Test Data (9 kHz ~ 30 MHz):
 The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Radiated Emission Test Data (30 MHz ~ 1 GHz):
Worst-Case Configuration

Horizontal

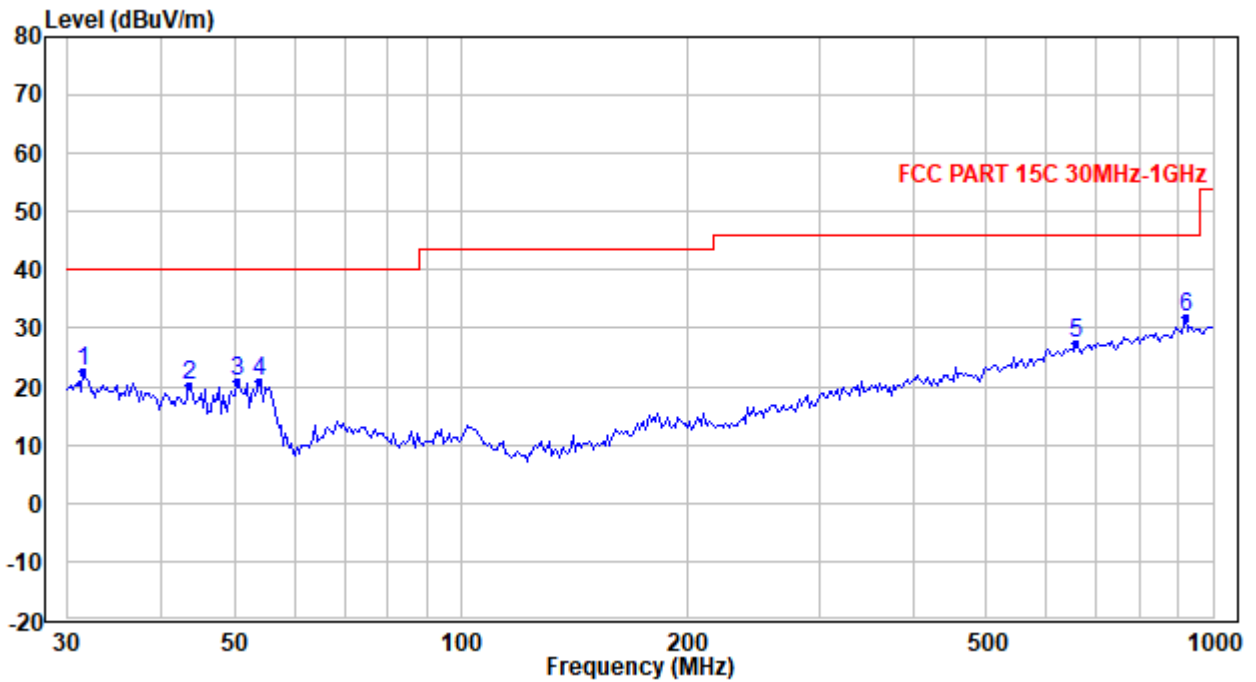

| No. | Frequency (MHz) | Reading (dBUV) | Correction factor (dB) | Result (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|------------------------|-----------------|----------------|-------------|----------|
| 1 | 31.513 | 27.5 | -5.0 | 22.4 | 40.0 | -17.6 | QP |
| 2 | 43.538 | 30.3 | -10.1 | 20.2 | 40.0 | -19.8 | QP |
| 3 | 50.461 | 35.7 | -14.8 | 20.9 | 40.0 | -19.1 | QP |
| 4 | 53.756 | 37.2 | -16.2 | 21.1 | 40.0 | -19.0 | QP |
| 5 | 655.977 | 25.9 | 1.5 | 27.4 | 46.0 | -18.6 | QP |
| 6 | 919.132 | 27.1 | 4.9 | 32.0 | 46.0 | -14.0 | QP |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

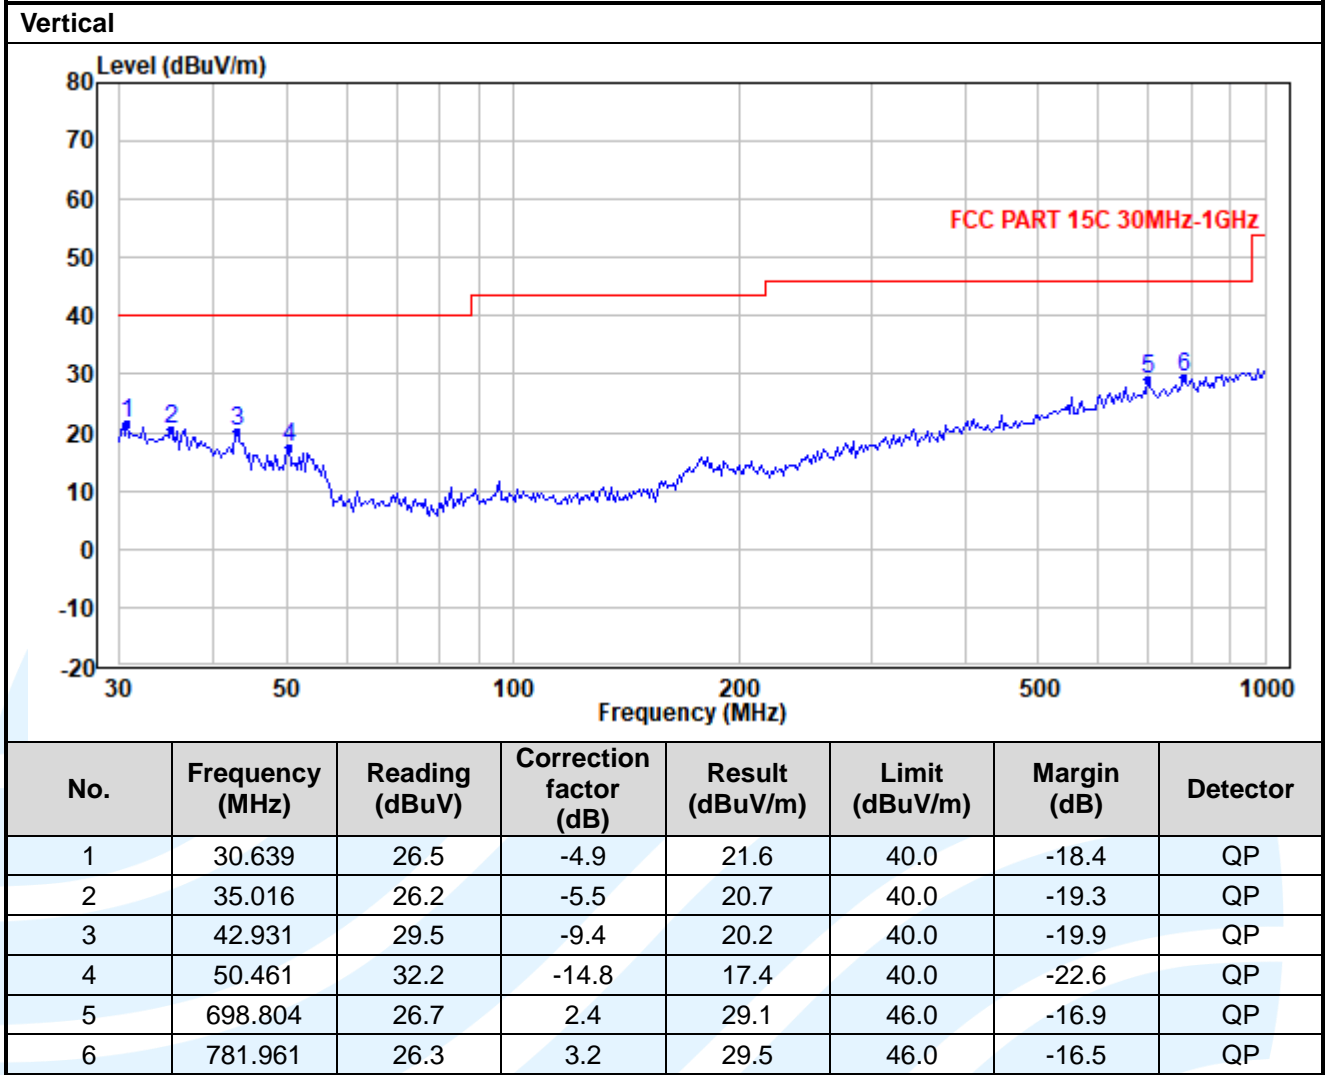

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

| Radiated Emission Test Data (Above 1GHz): | | | | | | | | |
|---|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| Lowest Channel: | | | | | | | | |
| No. | Frequency (MHz) | Reading (dBµV) | Correction factor (dB/m) | Result (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4804 | 40.7 | -1.6 | 39.1 | 74 | -34.9 | Peak | Horizontal |
| 2 | 4804 | 28.5 | -1.6 | 26.9 | 54 | -27.1 | Average | Horizontal |
| 3 | 7206 | 38.6 | 2.3 | 40.9 | 74 | -33.1 | Peak | Horizontal |
| 4 | 7206 | 26.2 | 2.3 | 28.5 | 54 | -25.5 | Average | Horizontal |
| 5 | 4804 | 39.8 | -1.6 | 38.3 | 74 | -35.7 | Peak | Vertical |
| 6 | 4804 | 28.3 | -1.6 | 26.7 | 54 | -27.3 | Average | Vertical |
| 7 | 7206 | 37.8 | 2.3 | 40.1 | 74 | -33.9 | Peak | Vertical |
| 8 | 7206 | 26.1 | 2.3 | 28.4 | 54 | -25.6 | Average | Vertical |
| Middle Channel: | | | | | | | | |
| 1 | 4882 | 40.6 | -1.5 | 39.2 | 74 | -34.8 | Peak | Horizontal |
| 2 | 4882 | 28.5 | -1.5 | 27.0 | 54 | -27.0 | Average | Horizontal |
| 3 | 7323 | 38.7 | 2.3 | 41.1 | 74 | -32.9 | Peak | Horizontal |
| 4 | 7323 | 26.6 | 2.3 | 28.9 | 54 | -25.1 | Average | Horizontal |
| 5 | 4882 | 40.8 | -1.5 | 39.4 | 74 | -34.6 | Peak | Vertical |
| 6 | 4882 | 28.7 | -1.5 | 27.2 | 54 | -26.8 | Average | Vertical |
| 7 | 7323 | 38.4 | 2.3 | 40.7 | 74 | -33.3 | Peak | Vertical |
| 8 | 7323 | 26.5 | 2.3 | 28.8 | 54 | -25.2 | Average | Vertical |
| Highest Channel: | | | | | | | | |
| 1 | 4960 | 38.3 | -1.4 | 36.9 | 74 | -37.1 | Peak | Horizontal |
| 2 | 4960 | 26.6 | -1.4 | 25.2 | 54 | -28.8 | Average | Horizontal |
| 3 | 7440 | 39.1 | 2.4 | 41.5 | 74 | -32.5 | Peak | Horizontal |
| 4 | 7440 | 25.5 | 2.4 | 27.9 | 54 | -26.1 | Average | Horizontal |
| 5 | 4960 | 38.8 | -1.4 | 37.4 | 74 | -36.6 | Peak | Vertical |
| 6 | 4960 | 26.7 | -1.4 | 25.3 | 54 | -28.7 | Average | Vertical |
| 7 | 7440 | 38.0 | 2.4 | 40.4 | 74 | -33.6 | Peak | Vertical |
| 8 | 7440 | 25.4 | 2.4 | 27.8 | 54 | -26.2 | Average | Vertical |

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

5.10 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2013 Section 6.10.5

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

| Frequency | Limit (dBµV/m @3m) | Remark |
|-----------------|--------------------|------------------|
| 30 MHz-88 MHz | 40.0 | Quasi-peak Value |
| 88 MHz-216 MHz | 43.5 | Quasi-peak Value |
| 216 MHz-960 MHz | 46.0 | Quasi-peak Value |
| 960 MHz-1 GHz | 54.0 | Quasi-peak Value |
| Above 1 GHz | 54.0 | Average Value |
| | 74.0 | Peak Value |

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:



Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).

1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

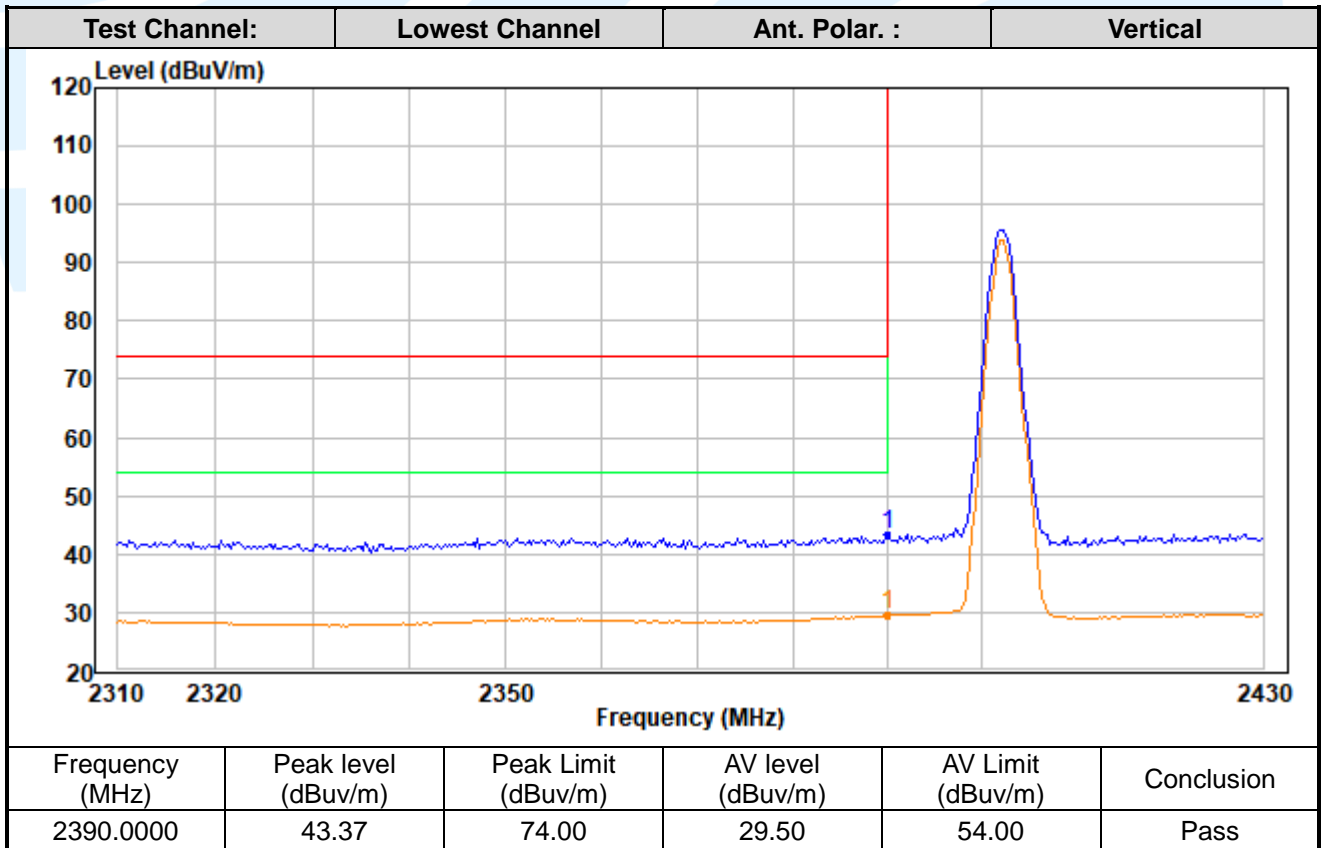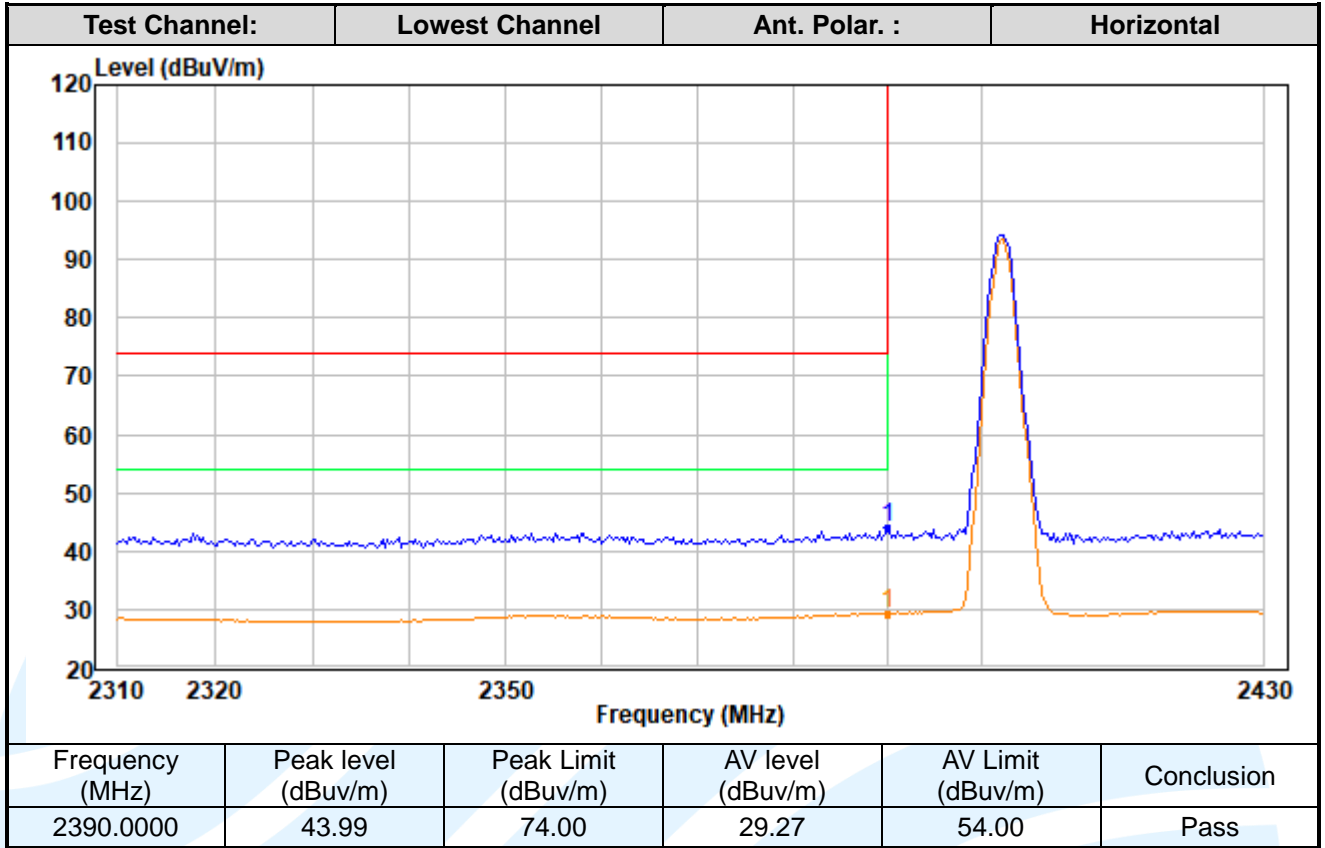

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

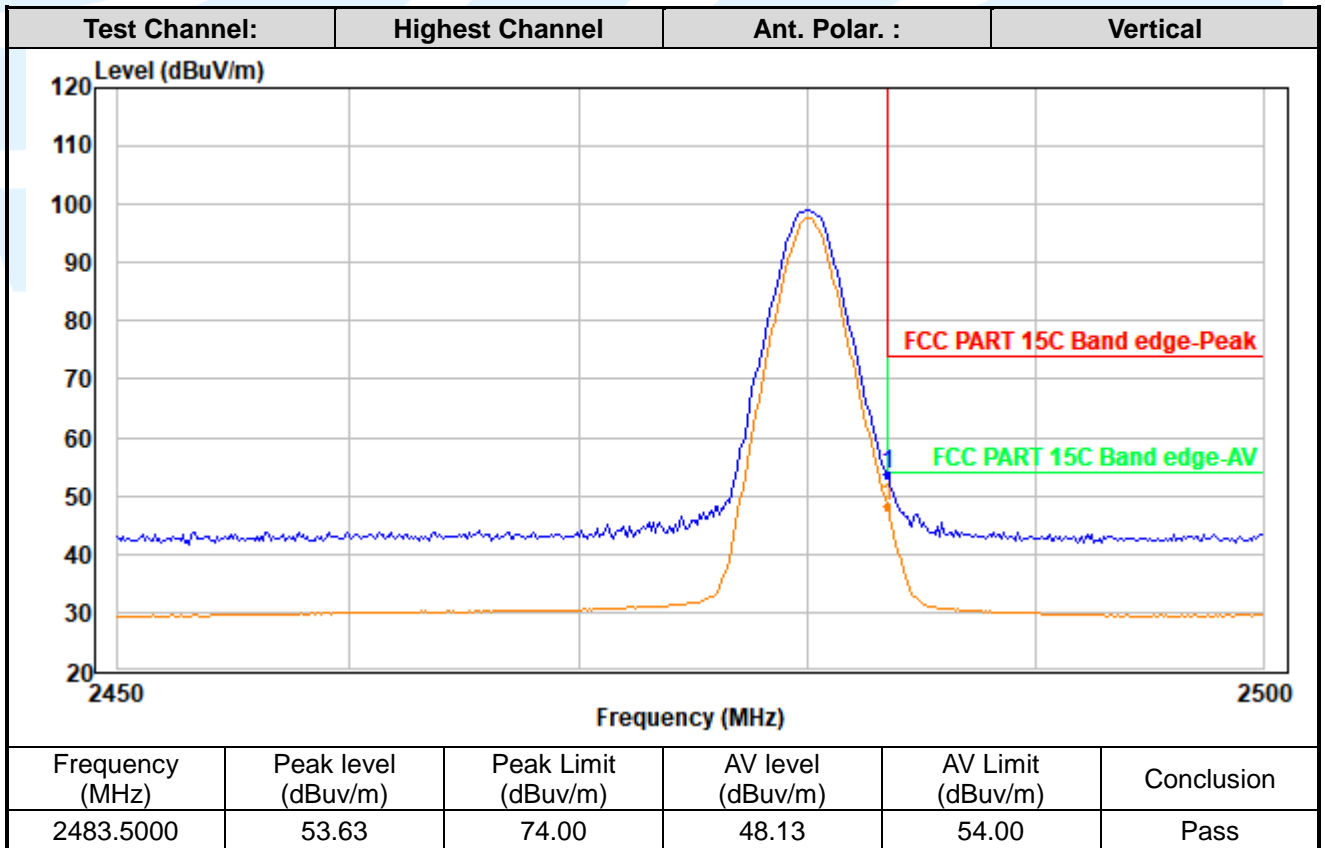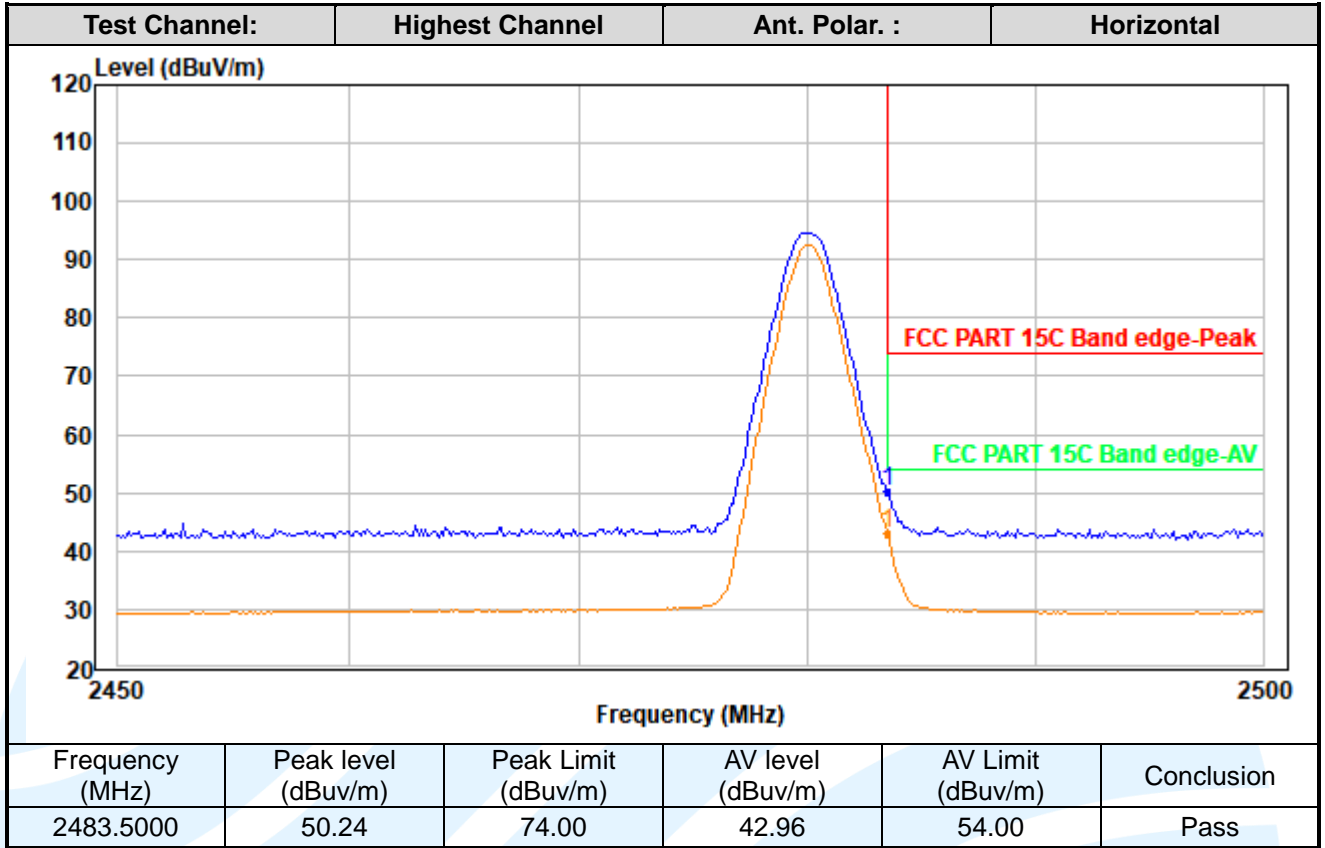

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

5.11 CONDUCTED EMISSION

Test Requirement: 47 CFR Part 15C Section 15.207

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

| Frequency range (MHz) | Limits (dB(µV)) | |
|-----------------------|-----------------|----------|
| | Quasi-peak | Average |
| 0,15 to 0,50 | 66 to 56 | 56 to 46 |
| 0,50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.5.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Equipment Used: Refer to section 3 for details.

Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:

Mode: BT Link

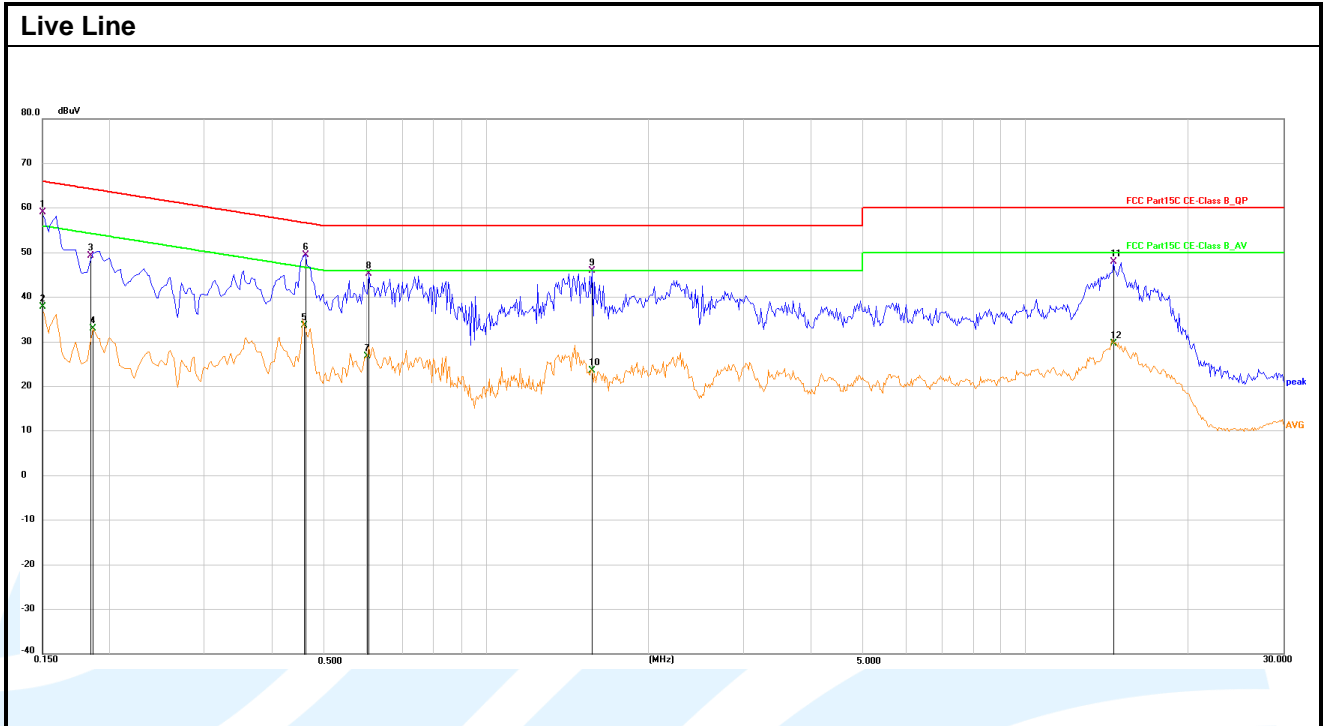

| No. | Frequency (MHz) | Reading (dBµV) | Correction factor(dB) | Result (dBµV) | Limit (dBµV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-----------------------|---------------|--------------|-------------|----------|
| 1 | 0.1500 | 49.09 | 10.04 | 59.13 | 66.00 | -6.87 | QP |
| 2 | 0.1500 | 27.81 | 10.04 | 37.85 | 56.00 | -18.15 | Average |
| 3 | 0.1853 | 39.31 | 10.01 | 49.32 | 64.24 | -14.92 | QP |
| 4 | 0.1864 | 22.95 | 10.01 | 32.96 | 54.20 | -21.24 | Average |
| 5 | 0.4588 | 23.57 | 10.02 | 33.59 | 46.71 | -13.12 | Average |
| 6 | 0.4612 | 39.45 | 10.02 | 49.47 | 56.67 | -7.20 | QP |
| 7 | 0.6011 | 16.69 | 10.02 | 26.71 | 46.00 | -19.29 | Average |
| 8 | 0.6043 | 35.18 | 10.02 | 45.20 | 56.00 | -10.80 | QP |
| 9 | 1.5684 | 35.86 | 10.05 | 45.91 | 56.00 | -10.09 | QP |
| 10 | 1.5684 | 13.56 | 10.05 | 23.61 | 46.00 | -22.39 | Average |
| 11 | 14.5171 | 37.29 | 10.62 | 47.91 | 60.00 | -12.09 | QP |
| 12 | 14.5171 | 18.91 | 10.62 | 29.53 | 50.00 | -20.47 | Average |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

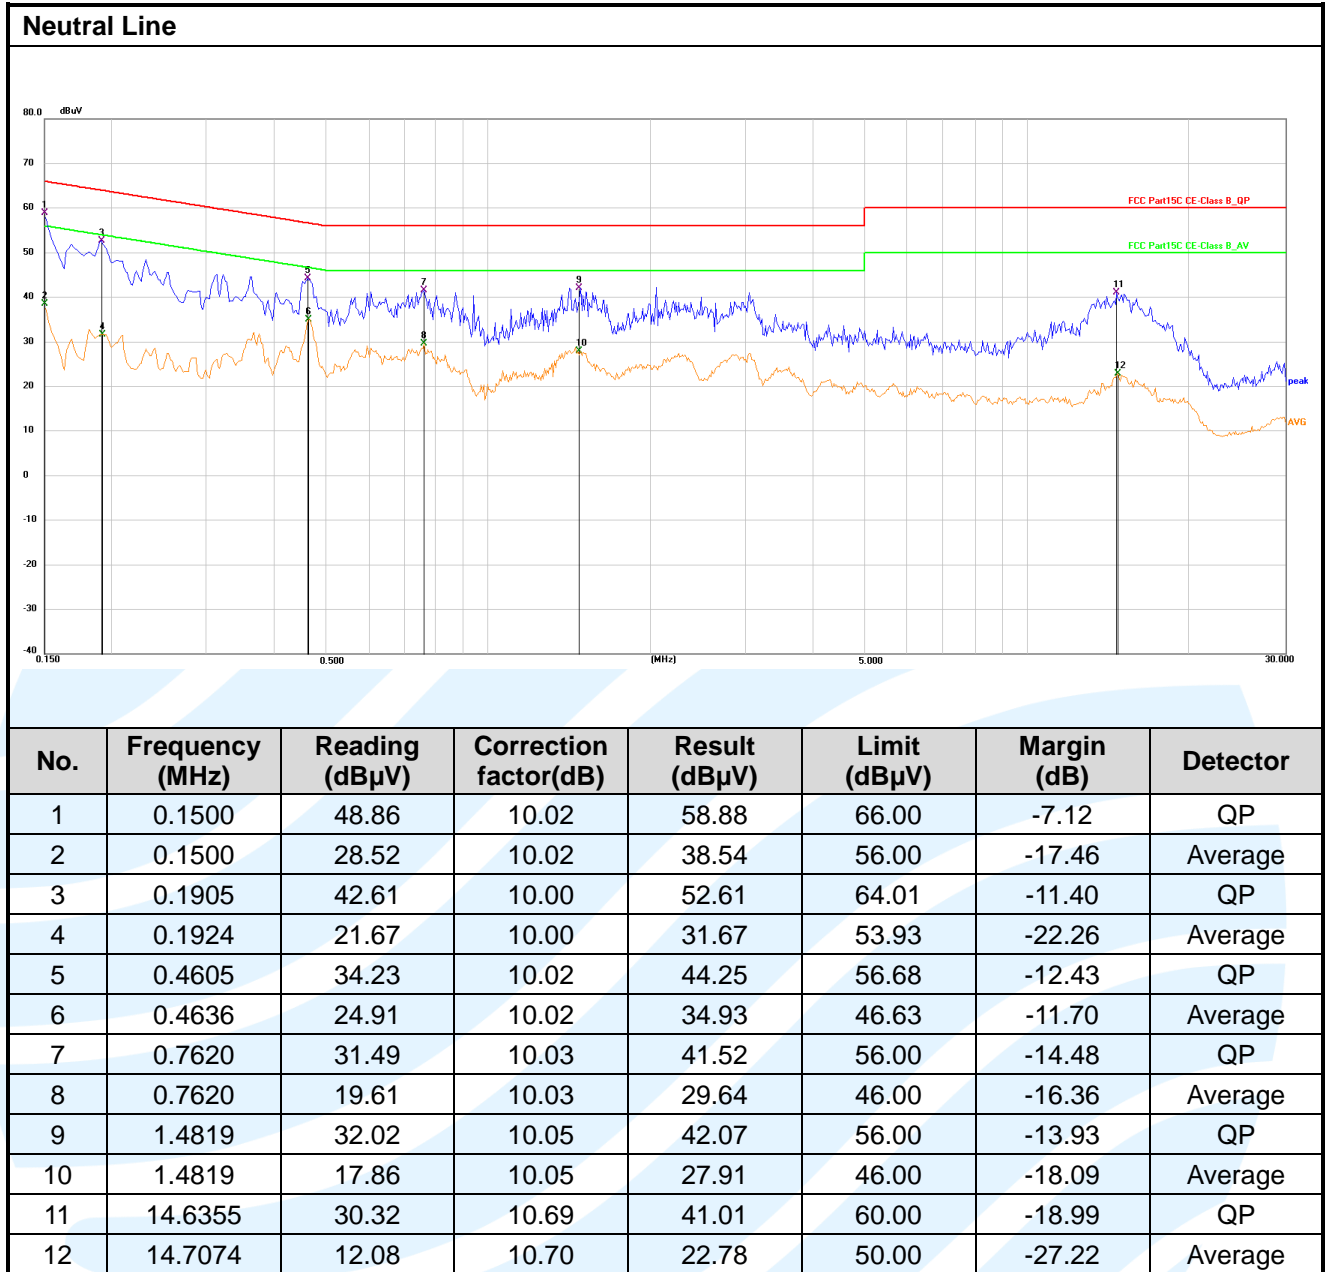

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V~50Hz and 120V~60Hz, only the worst case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1


APPENDIX A RF TEST DATA

A.1 99% BANDWIDTH


| Modulation | Channel | 99% BW (MHz) |
|---------------|---------|--------------|
| GFSK | 0 | 0.84975 |
| | 39 | 0.83691 |
| | 78 | 0.84141 |
| $\pi/4$ DQPSK | 0 | 1.1874 |
| | 39 | 1.1877 |
| | 78 | 1.1854 |
| 8DPSK | 0 | 1.1959 |
| | 39 | 1.1956 |
| | 78 | 1.1945 |

Test Graphs




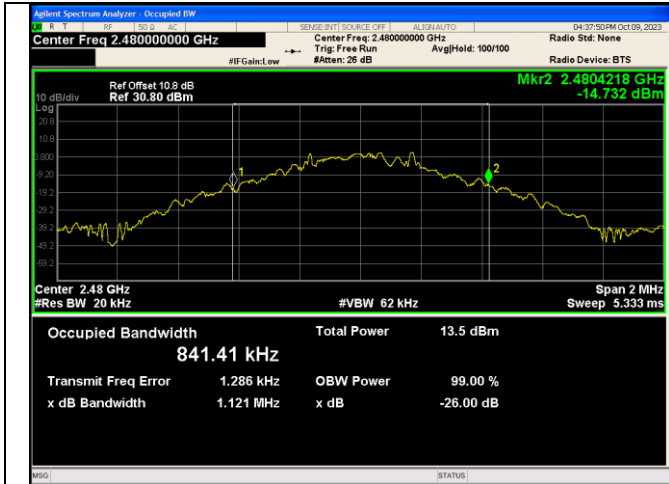


GFSK_DH5_Channel 78

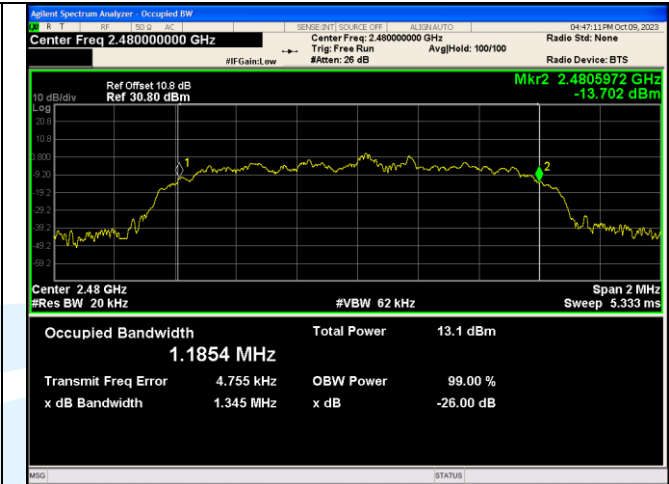


$\pi/4$ DQPSK_2-DH5_Channel 78

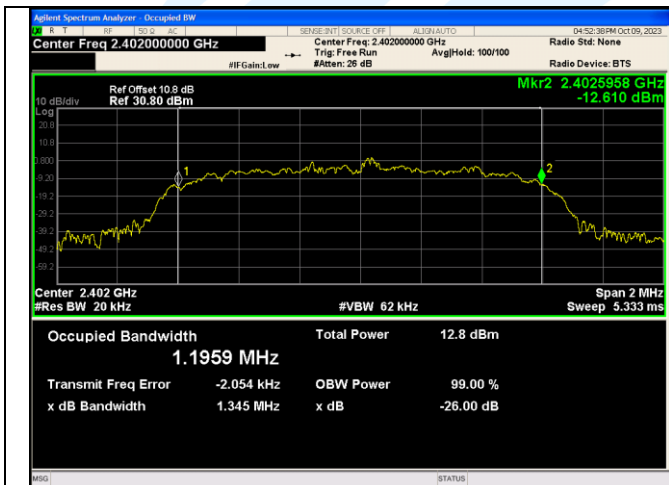


8DPSK_3-DH5_Channel 0

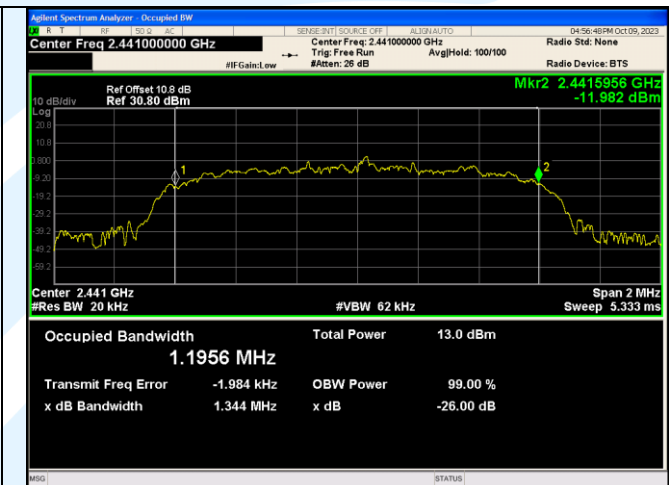

8DPSK_3-DH5_Channel 39

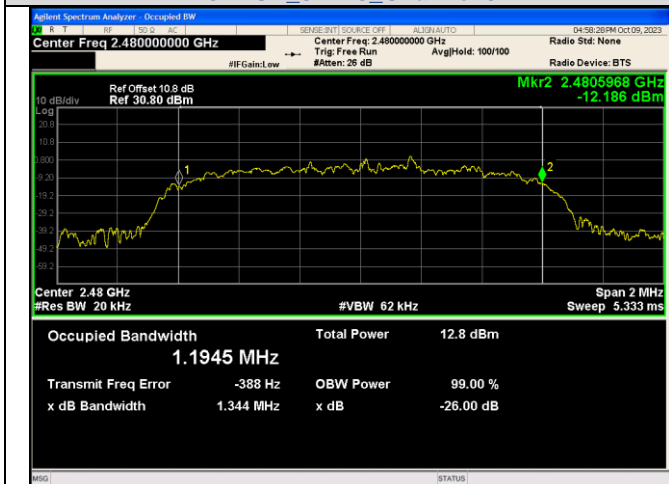

8DPSK_3-DH5_Channel 78






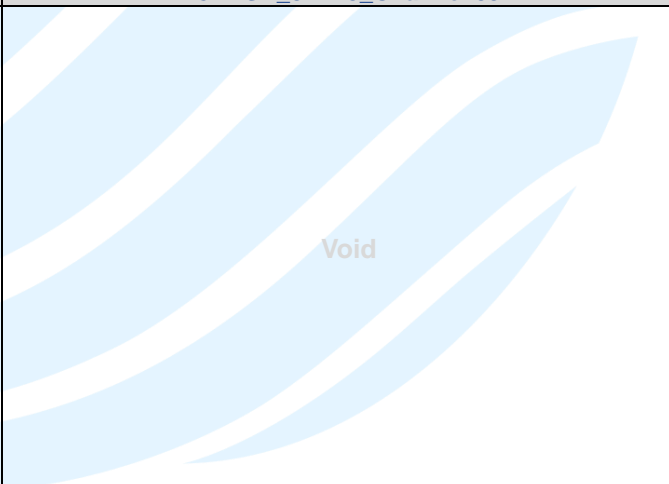


A.2 20DB BANDWIDTH

| Modulation | Channel | Center Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------------|---------|------------------------|-----------------------|
| GFSK | 0 | 2402 MHz | 0.9519 |
| | 39 | 2441 MHz | 0.9411 |
| | 78 | 2480 MHz | 0.9606 |
| $\pi/4$ DQPSK | 0 | 2402 MHz | 1.290 |
| | 39 | 2441 MHz | 1.288 |
| | 78 | 2480 MHz | 1.288 |
| 8DPSK | 0 | 2402 MHz | 1.297 |
| | 39 | 2441 MHz | 1.295 |
| | 78 | 2480 MHz | 1.303 |

Test Graphs




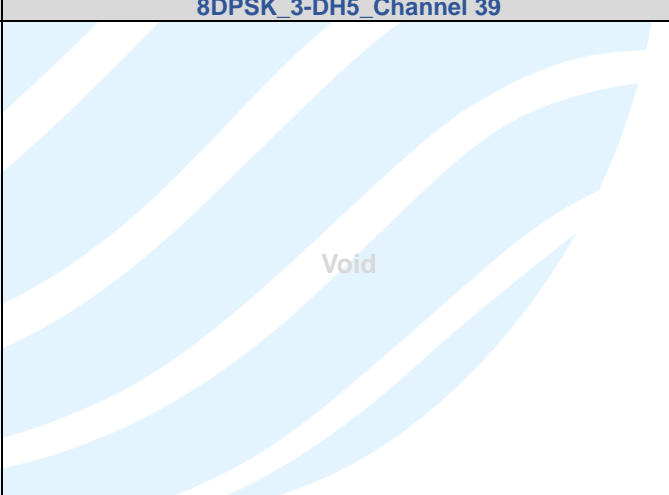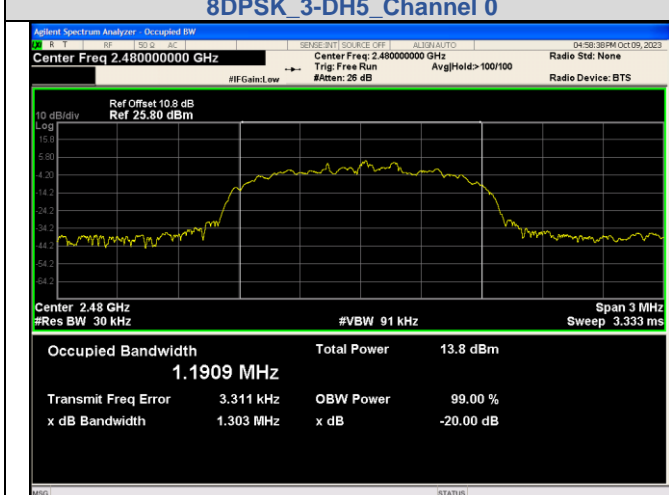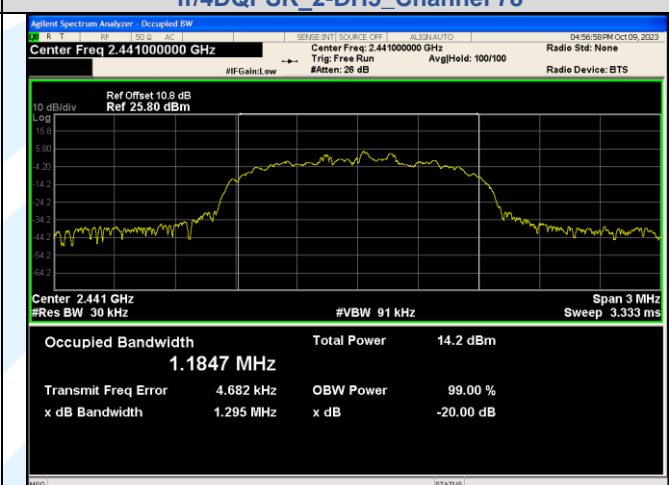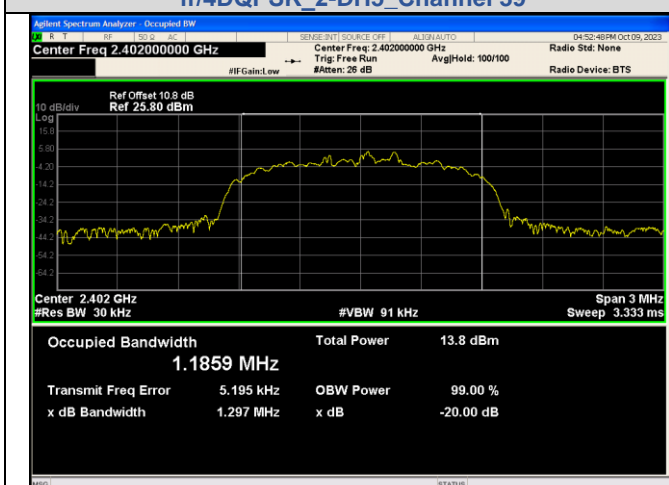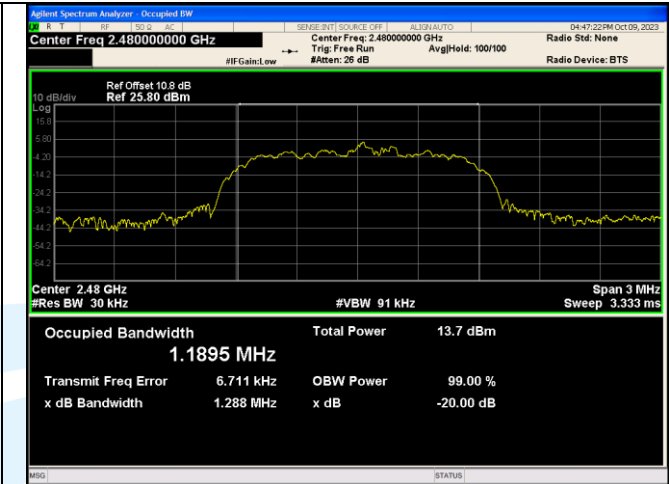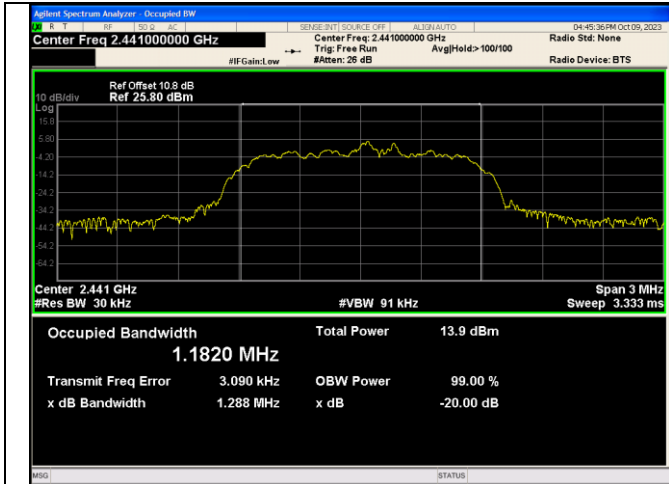

A.3 CARRIER FREQUENCIES SEPARATION

| Modulation | Packet | Left Center frequency (MHz) | Right Center frequency (MHz) | Hopping Frequency Separation (MHz) | Limit (MHz) | Result |
|---------------|--------|-----------------------------|------------------------------|------------------------------------|-------------|--------|
| GFSK | DH5 | 2439.8521 | 2440.8521 | 1 | 0.627 | PASS |
| $\pi/4$ DQPSK | 2-DH5 | 2439.9928 | 2440.9928 | 1 | 0.859 | PASS |
| 8DPSK | 3-DH5 | 2440.1503 | 2441.1590 | 1.0087 | 0.863 | PASS |

Test Graphs

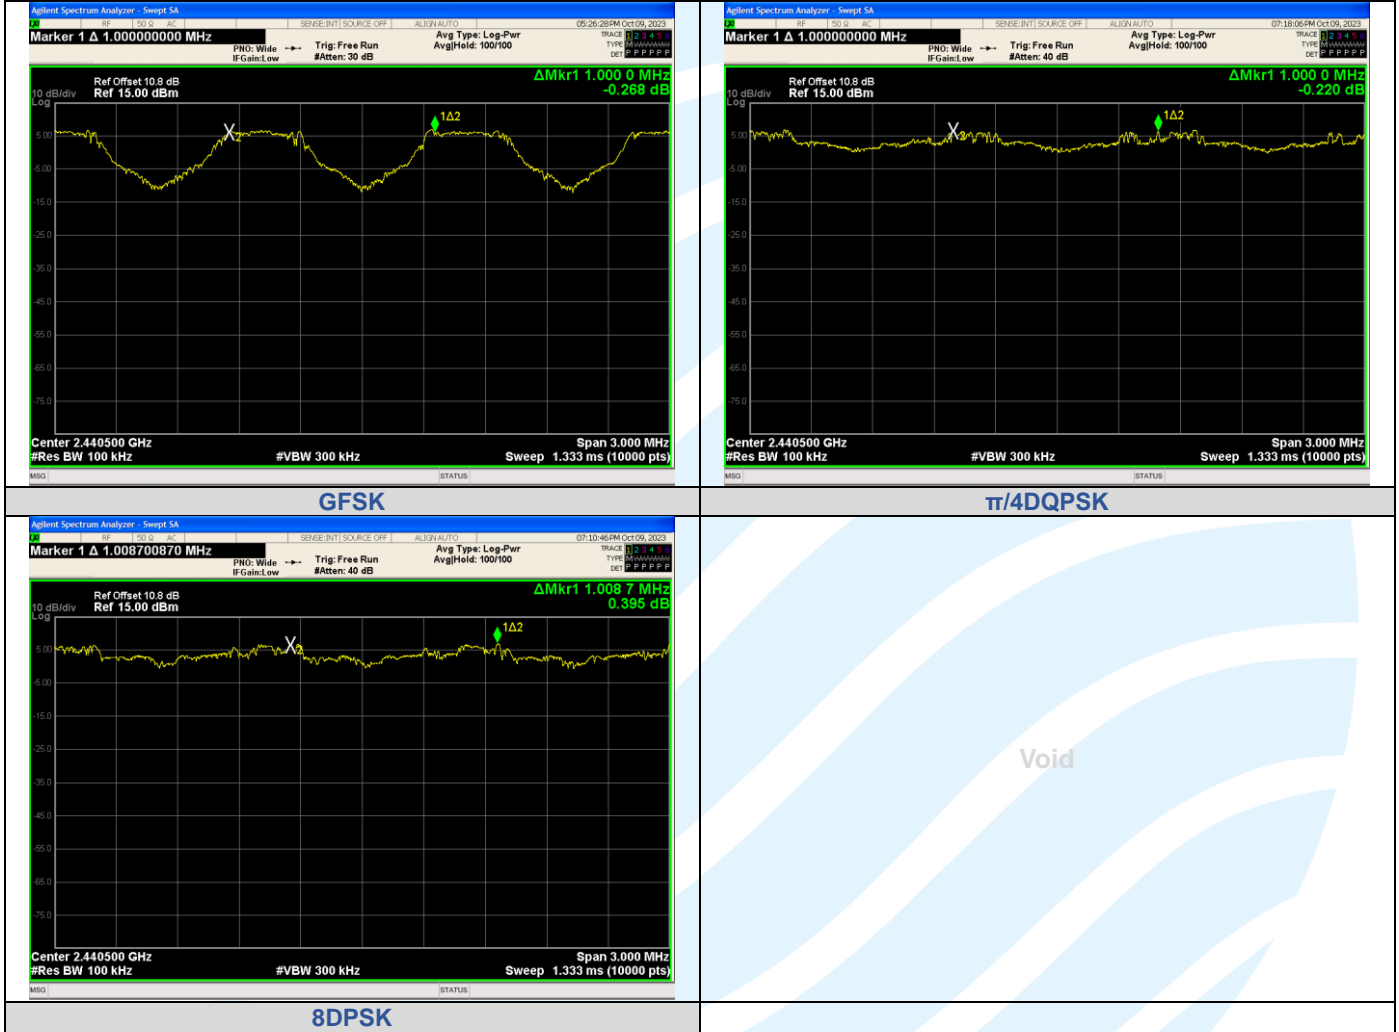

A.4 CONDUCTED OUT OF BAND EMISSION


Non-Hopping

| Modulation | Packet | Channel | OOB Emission Frequency (MHz) | OOB Emission Level (dBm) | Limit (dBm) | Over Limit (dB) | Result |
|---------------|--------|---------|------------------------------|--------------------------|-------------|-----------------|--------|
| GFSK | DH5 | 0 | 2400.00 | -52.186 | -13.34 | -38.846 | PASS |
| | | | 2397.36 | -52.090 | -13.34 | -38.750 | PASS |
| | | | 24248.4 | -52.837 | -13.34 | -39.496 | PASS |
| | | 78 | 24357.0 | -53.047 | -13.09 | -39.957 | PASS |
| | | | 2483.50 | -53.456 | -13.16 | -40.296 | PASS |
| | | | 24252.8 | -52.780 | -13.16 | -39.620 | PASS |
| π /4DQPSK | 2-DH5 | 0 | 2400.00 | -44.929 | -13.46 | -31.469 | PASS |
| | | | 24900.1 | -52.307 | -13.46 | -38.847 | PASS |
| | | 39 | 24408.8 | -52.748 | -13.11 | -39.638 | PASS |
| | | | 2483.50 | -48.277 | -13.15 | -35.127 | PASS |
| | | 78 | 24779.6 | -52.238 | -13.15 | -39.088 | PASS |
| | | | 24233.4 | -51.453 | -13.13 | -38.323 | PASS |
| 8DPSK | 3-DH5 | 0 | 2400.00 | -45.145 | -13.33 | -31.815 | PASS |
| | | | 24453.1 | -52.558 | -13.33 | -39.228 | PASS |
| | | 39 | 24217.2 | -51.384 | -13.14 | -38.244 | PASS |
| | | | 2483.50 | -49.859 | -13.13 | -36.729 | PASS |
| | | 78 | 24233.4 | -51.453 | -13.13 | -38.323 | PASS |
| | | | 24233.4 | -51.453 | -13.13 | -38.323 | PASS |


Hopping

| Modulation | Packet | Channel | OOB Emission Frequency (MHz) | OOB Emission Level (dBm) | Limit (dBm) | Over Limit (dB) | Result |
|---------------|--------|---------|------------------------------|--------------------------|-------------|-----------------|--------|
| GFSK | DH5 | Hopping | 2395.04 | -51.949 | -13.29 | -38.659 | PASS |
| | | | 2400.00 | -53.639 | -13.29 | -40.349 | PASS |
| | | | 2483.50 | -53.275 | -13.17 | -40.105 | PASS |
| π /4DQPSK | 2-DH5 | | 2400.00 | -45.669 | -13.4 | -32.269 | PASS |
| | | | 2483.50 | -51.915 | -13.37 | -38.545 | PASS |
| 8DPSK | 3-DH5 | | 2400.00 | -44.626 | -13.31 | -31.316 | PASS |
| | | | 2483.50 | -51.985 | -13.13 | -38.855 | PASS |


Test Graphs

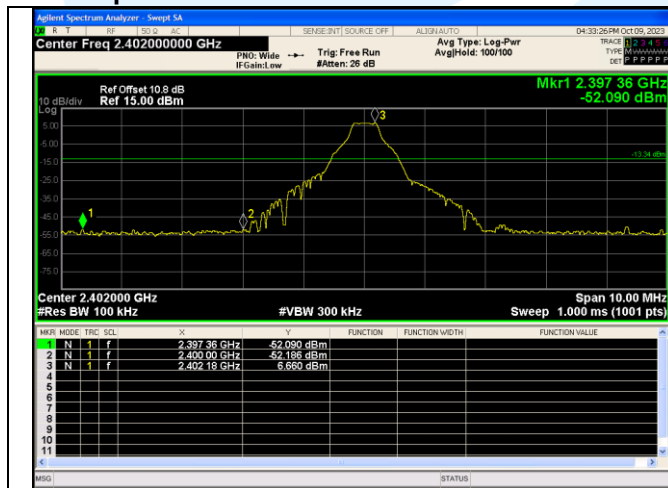


Out Of Band Emission
GFSK_DH5_Channel 0

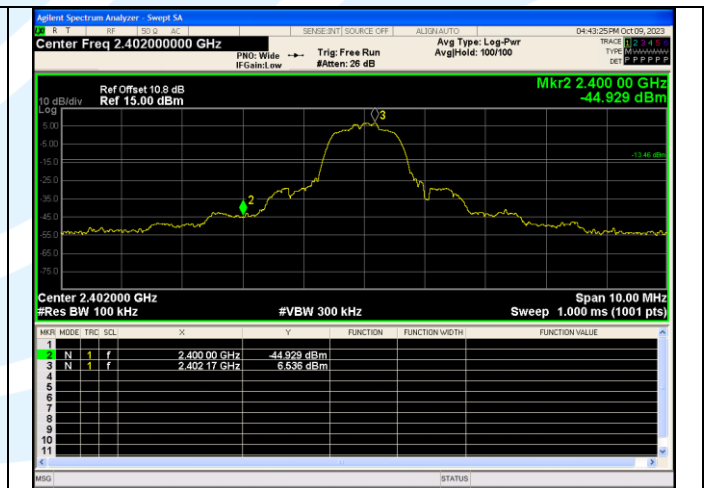


Out Of Band Emission
 π /4DQPSK_2-DH5_Channel 0

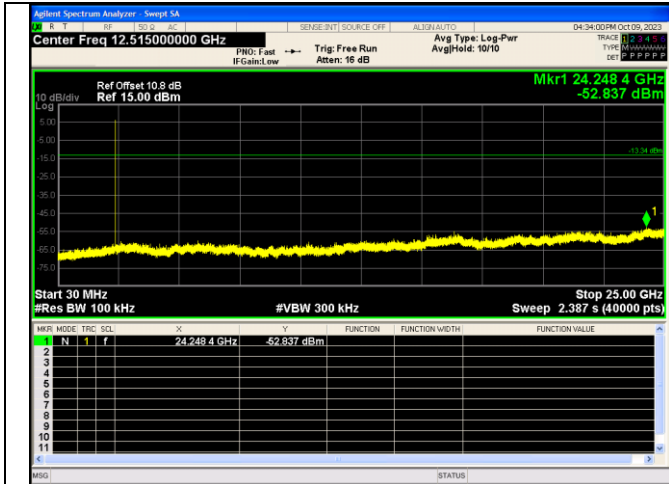


**Spurious Emission
GFSK_DH5_Channel 0**

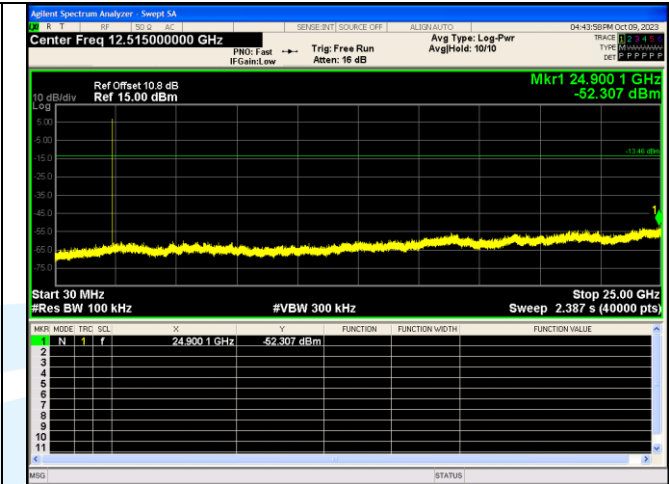


**Spurious Emission
π/4DQPSK_2-DH5_Channel 0**

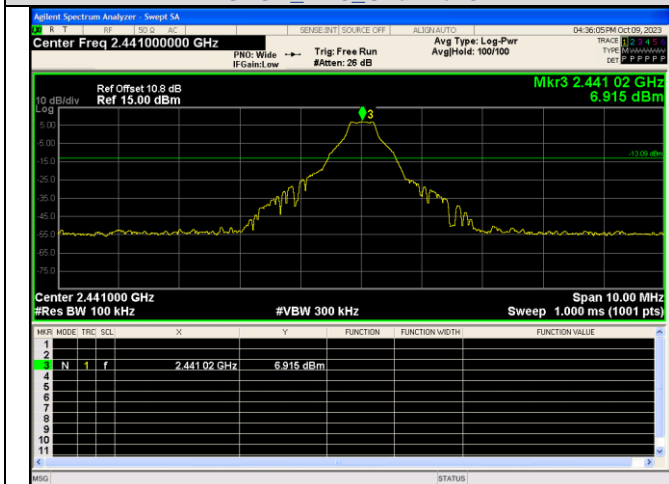


**Out Of Band Emission
GFSK_DH5_Channel 39**

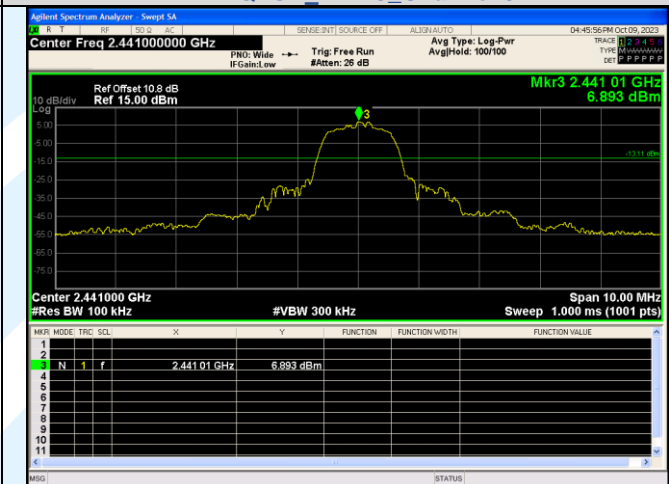


**Out Of Band Emission
π/4DQPSK_2-DH5_Channel 39**

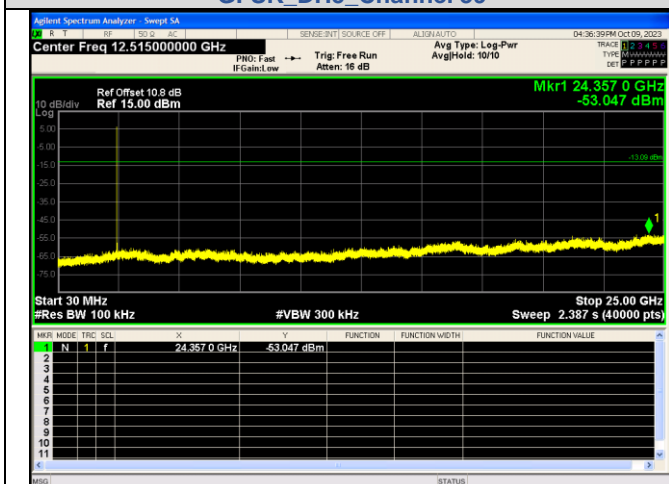


**Spurious Emissions
GFSK_DH5_Channel 39**

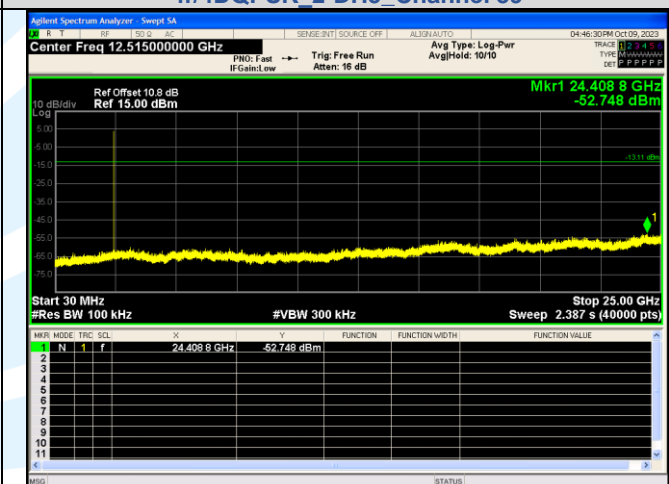


**Spurious Emissions
π/4DQPSK_2-DH5_Channel 39**

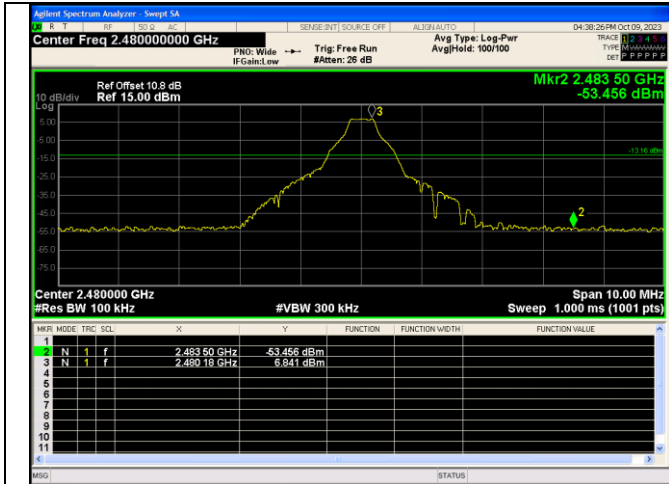


**Out Of Band Emission
GFSK_DH5_Channel 78**

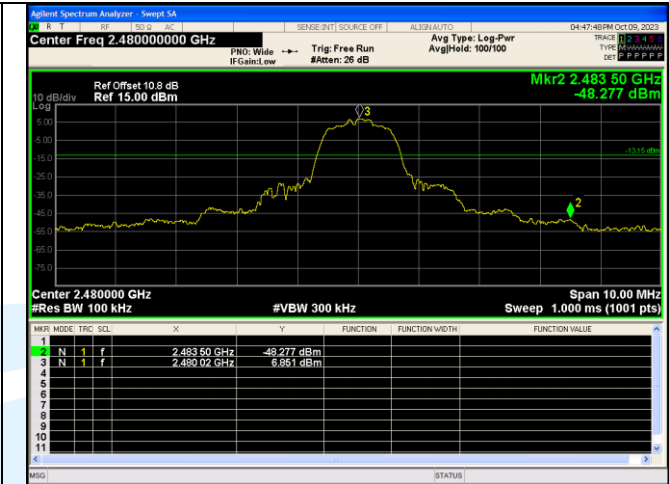


**Out Of Band Emission
π/4DQPSK_2-DH5_Channel 78**

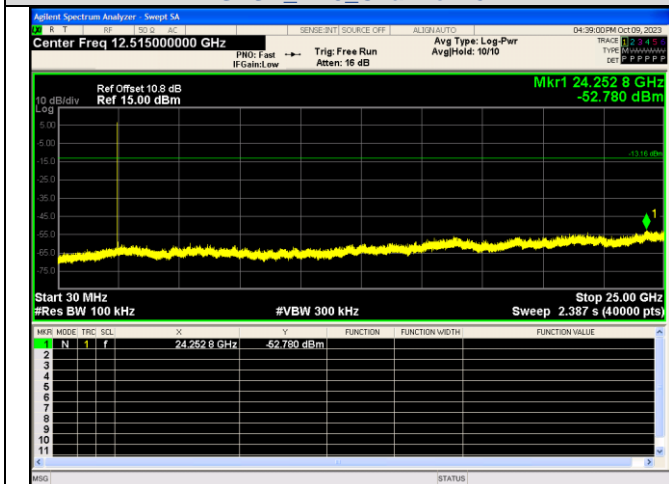


**Spurious Emission
GFSK_DH5_Channel 78**

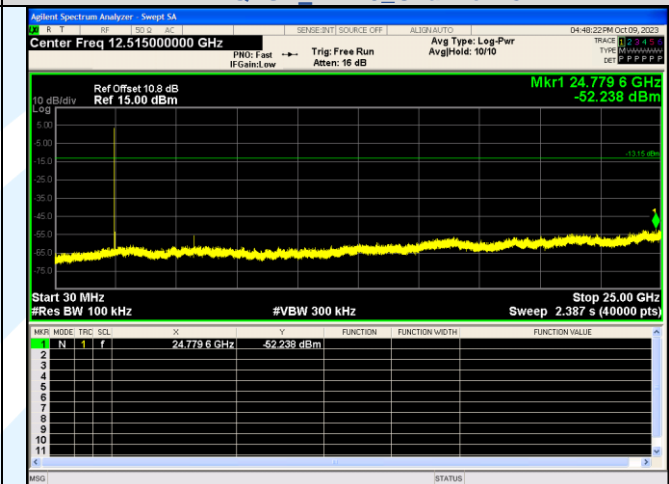


**Spurious Emission
π/4DQPSK_2-DH5_Channel 78**

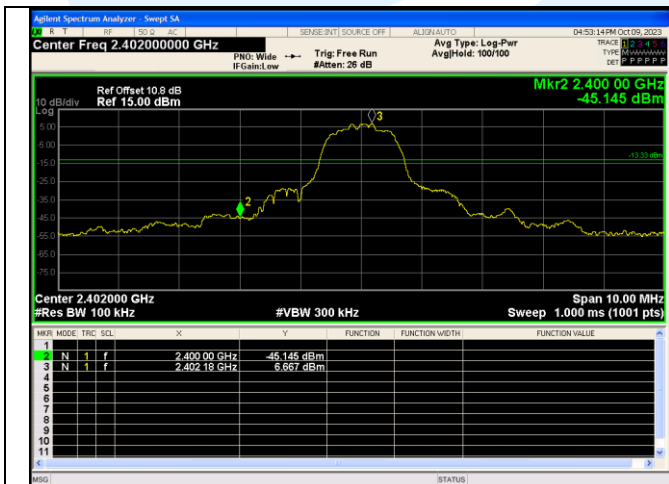


**Out Of Band Emission
8DPSK_3-DH5_Channel 0**

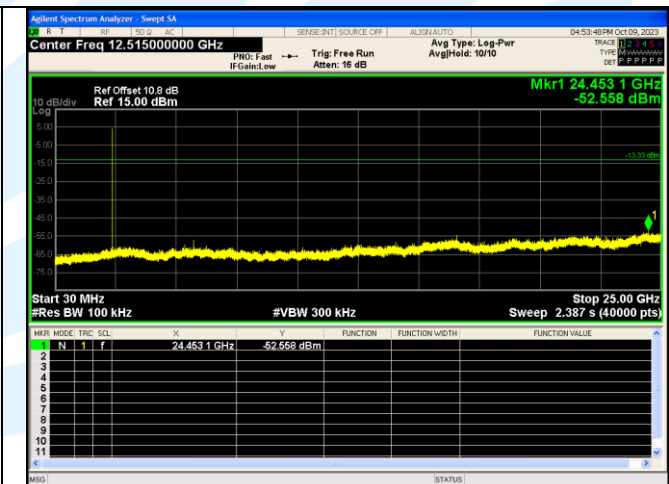


**Spurious Emission
8DPSK_3-DH5_Channel 0**

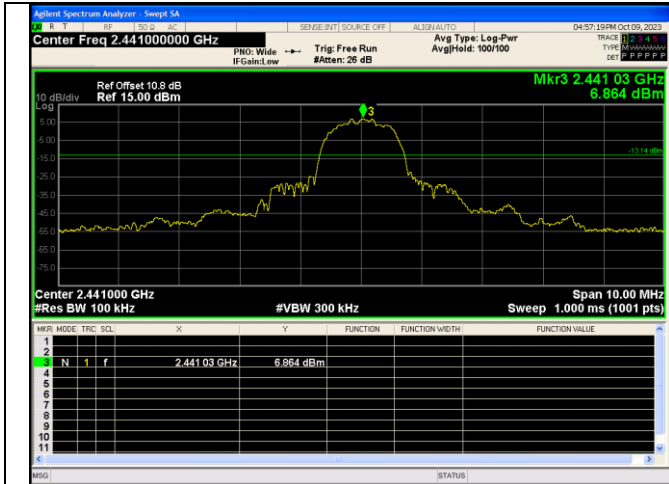


Out Of Band Emission
8DPSK_3-DH5_Channel 39

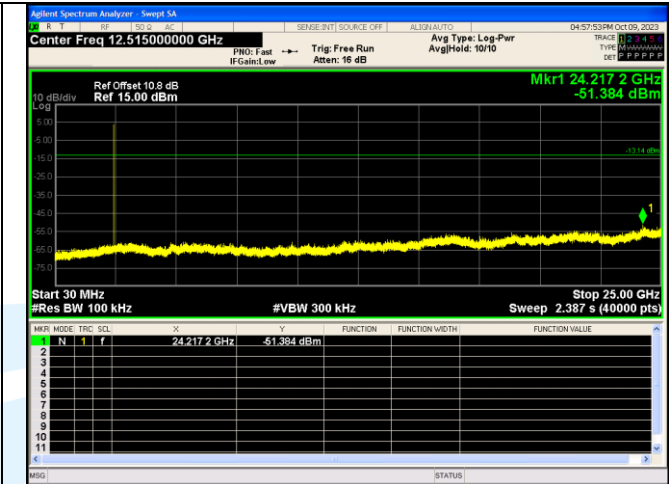


Spurious Emissions
8DPSK_3-DH5_Channel 39

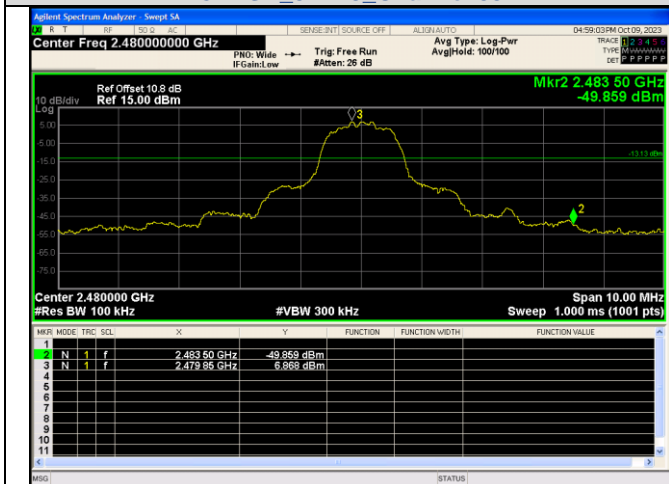


Out Of Band Emission
8DPSK_3-DH5_Channel 78

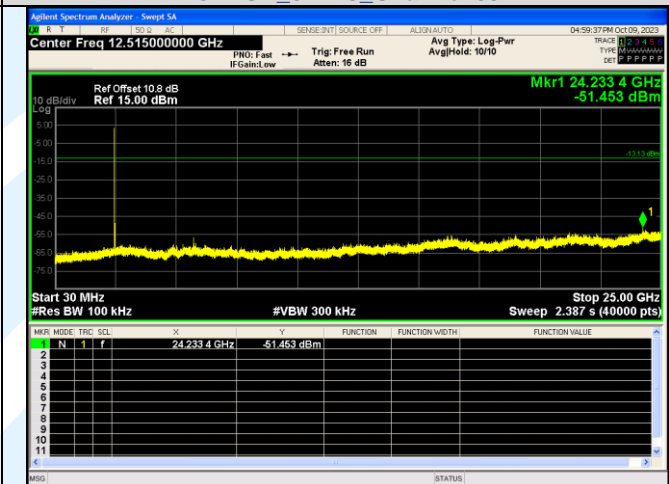

Spurious Emission
8DPSK_3-DH5_Channel 78

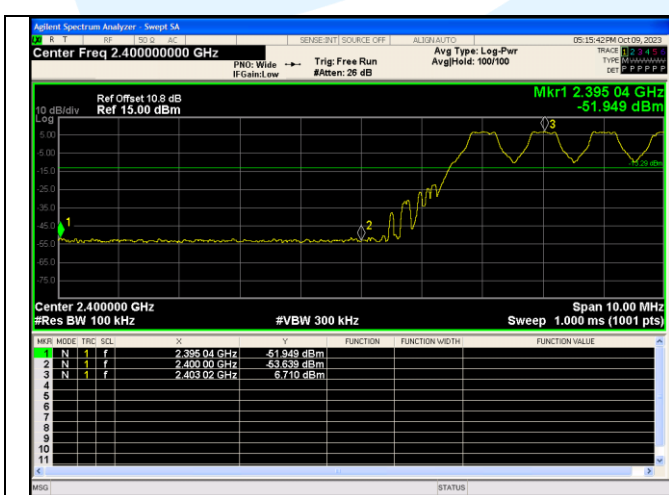

Out Of Band Emission(Left)
GFSK_DH5_Channel Hopping

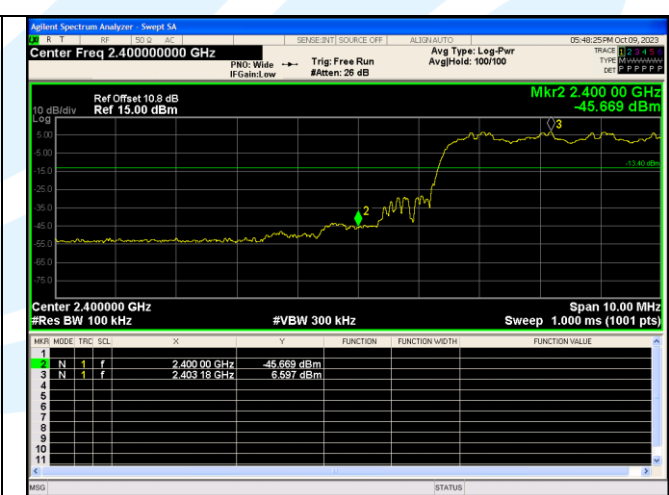


Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping



Out Of Band Emission(Right)
GFSK_DH5_Channel Hopping



Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping

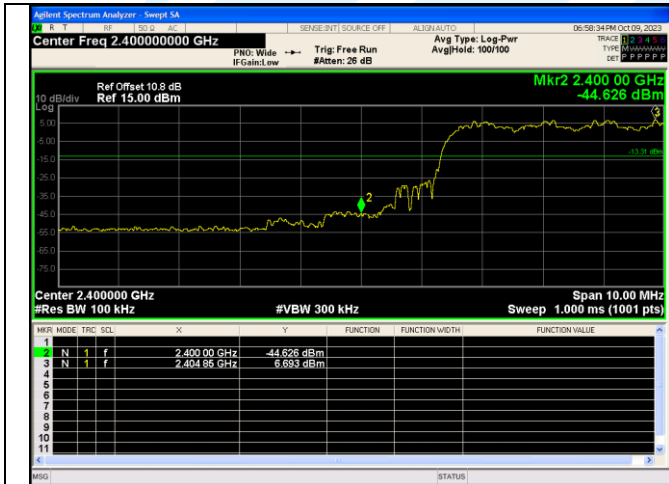

Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping




Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping


A.5 DWELL TIME

| Modulation | Packet | Channel | Pulse Width (ms) | Number of Pulses in 31.6 seconds | Dwell Time (ms) | Limit (ms) | Result |
|------------|--------|-------------------|------------------|----------------------------------|-----------------|------------|--------|
| GFSK | DH1 | CH39 (2441MHz) | 0.3900 | 317 | 123.63 | < 400 | PASS |
| | DH3 | | 1.656 | 156 | 258.34 | | PASS |
| | DH5 | | 2.896 | 112 | 324.35 | | PASS |
| π/4DQPSK | 2-DH1 | | 0.3840 | 317 | 121.73 | | PASS |
| | 2-DH3 | | 1.632 | 161 | 262.75 | | PASS |
| | 2-DH5 | | 2.880 | 102 | 293.76 | | PASS |
| 8DPSK | 3-DH1 | | 0.3804 | 317 | 120.59 | | PASS |
| | 3-DH3 | | 1.632 | 168 | 274.18 | | PASS |
| | 3-DH5 | | 2.880 | 101 | 290.88 | | PASS |


Test Graphs

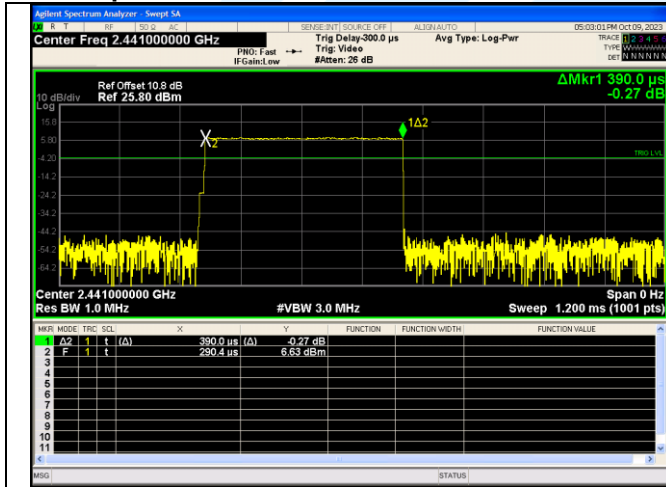


**Pulse Width
GFSK DH1**

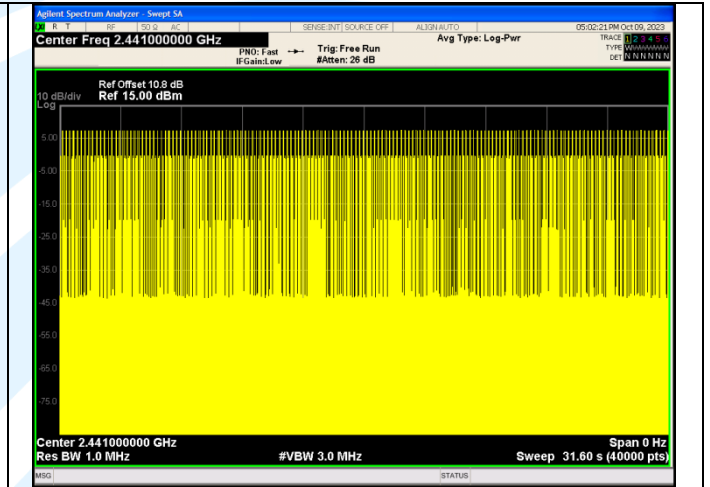


**Number of Pulses in 31.6 seconds
GFSK DH1**

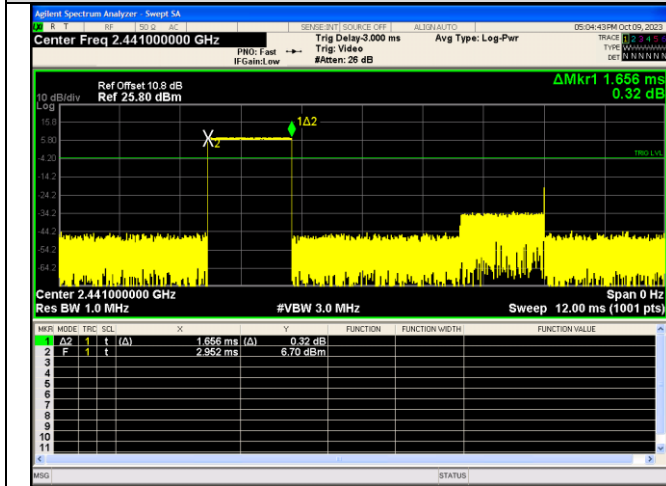


**Pulse Width
GFSK DH3**

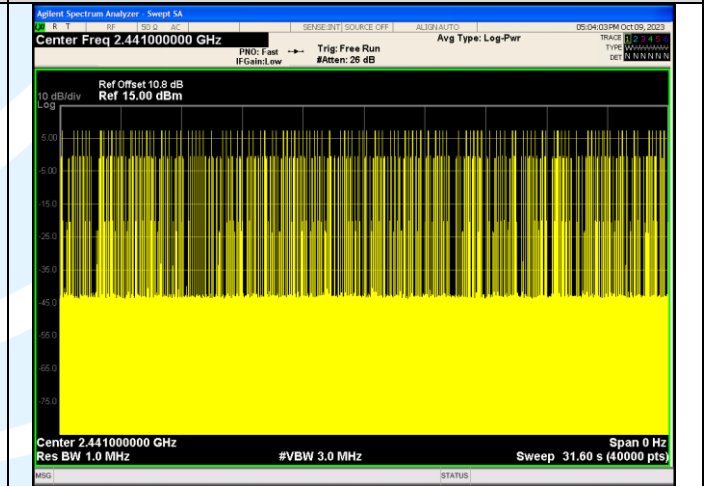


**Number of Pulses in 31.6 seconds
GFSK DH3**

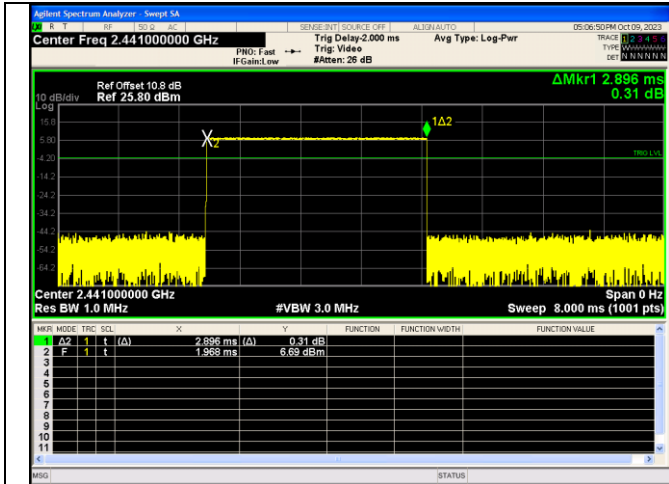


**Pulse Width
GFSK DH5**

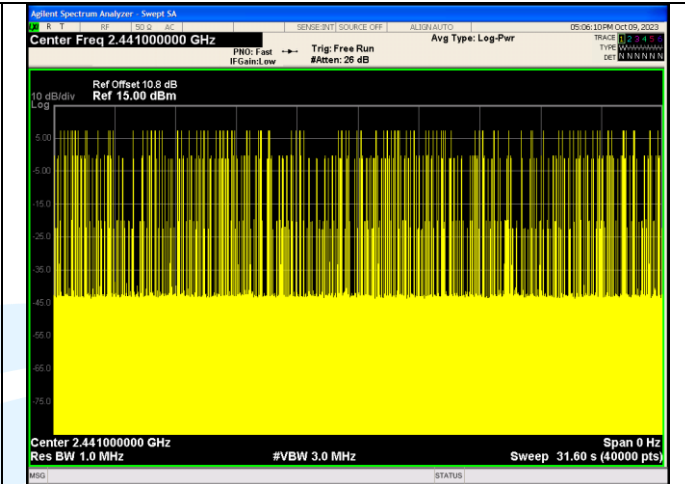


**Number of Pulses in 31.6 seconds
GFSK DH5**

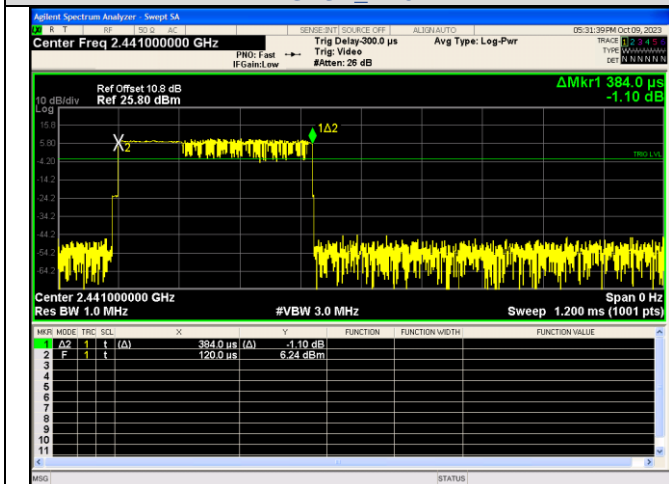


**Pulse Width
 $\pi/4$ DQPSK 2-DH1**

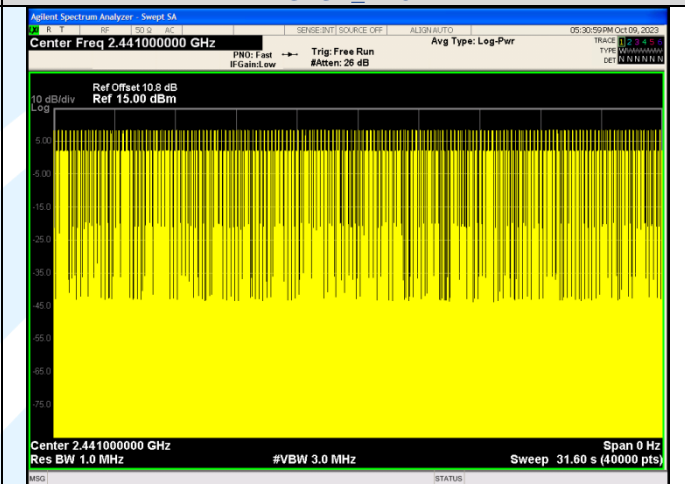


**Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK 2-DH1**

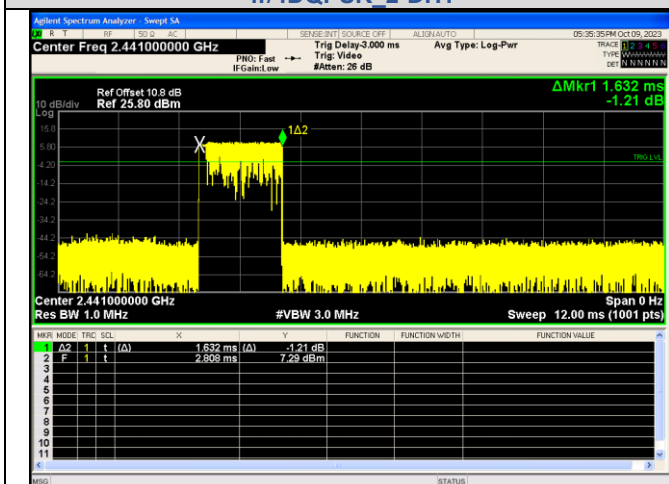


**Pulse Width
 $\pi/4$ DQPSK 2-DH3**

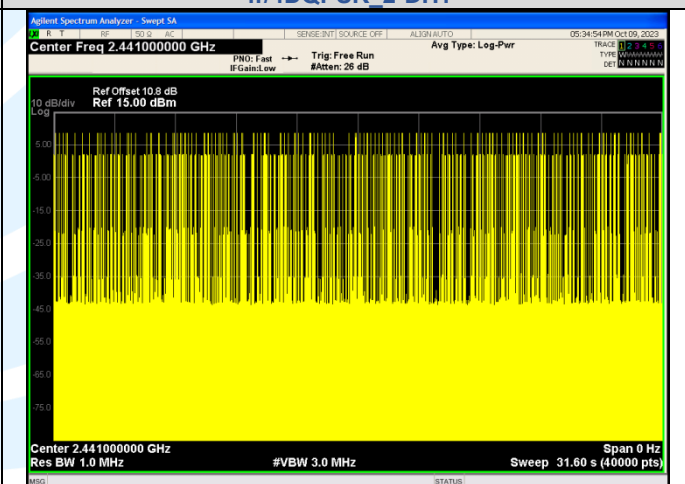


**Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK 2-DH3**

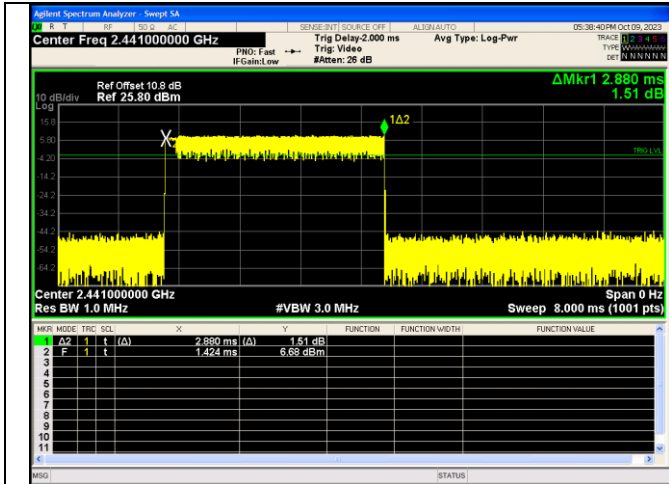


**Pulse Width
 $\pi/4$ DQPSK 2-DH5**

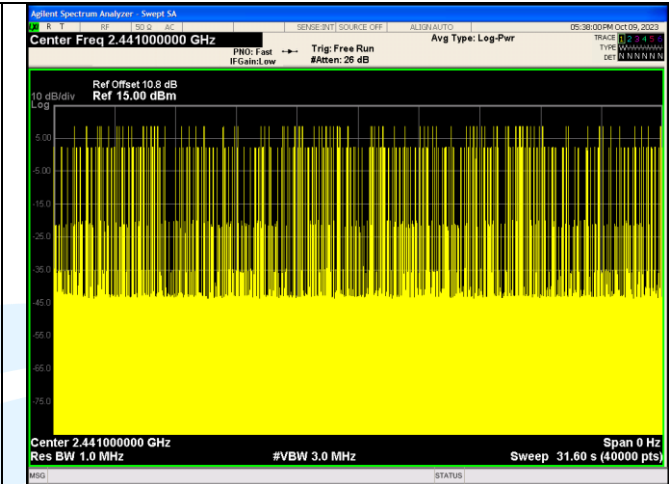


**Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK 2-DH5**

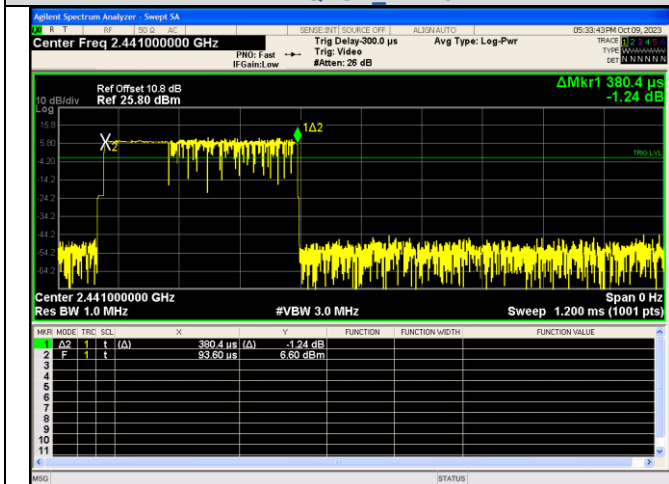


**Pulse Width
8DPSK 3-DH1**

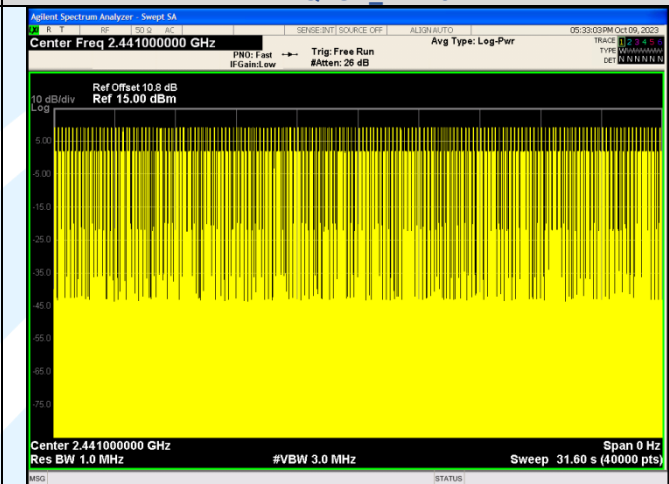


**Number of Pulses in 31.6 seconds
8DPSK 3-DH1**

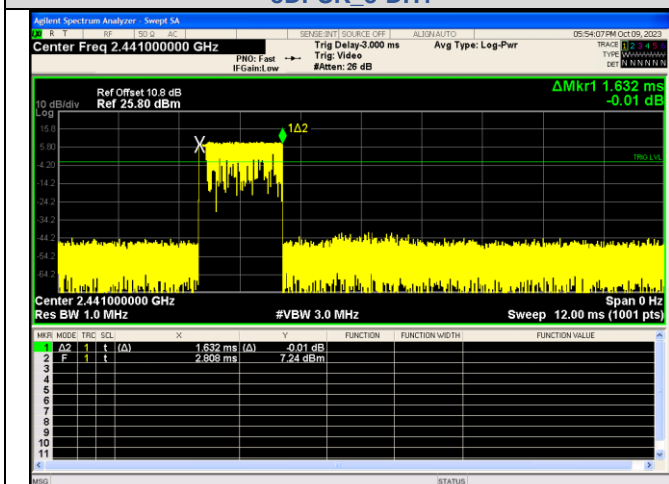


**Pulse Width
8DPSK 3-DH3**

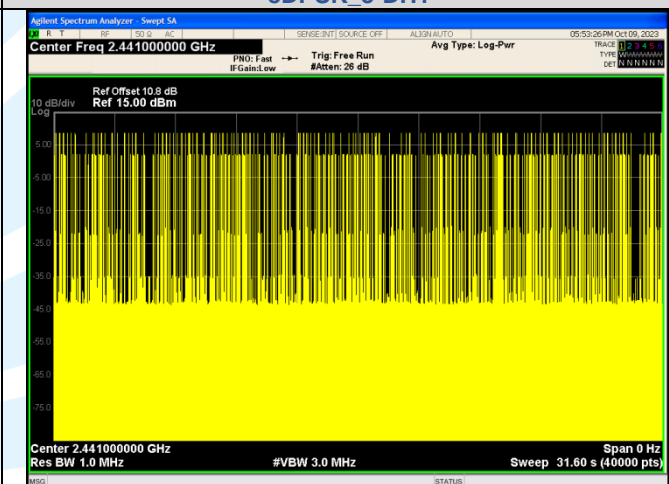

**Number of Pulses in 31.6 seconds
8DPSK 3-DH3**

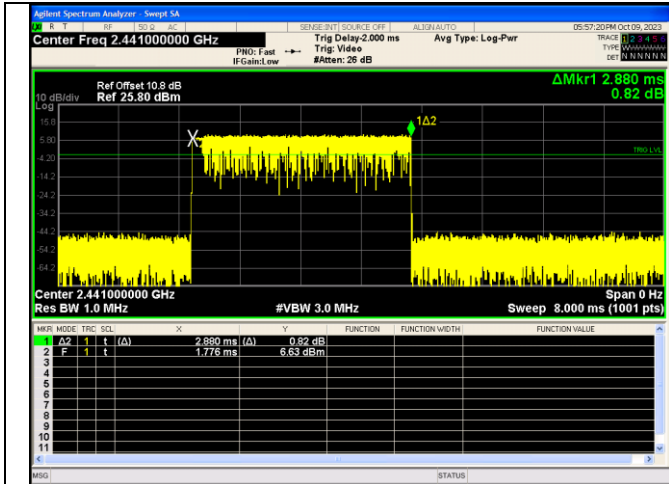

Pulse Width
8DPSK_3-DH5

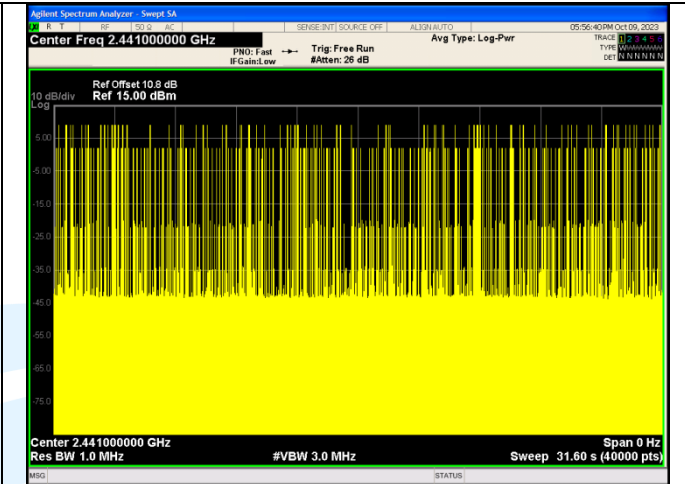

Number of Pulses in 31.6 seconds
8DPSK_3-DH5

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1


A.6 NUMBER OF HOPPING CHANNEL

| Modulation | Packet | Number of Hopping Channel | Limit | Result |
|---------------|--------|---------------------------|-------|--------|
| GFSK | DH5 | 79 | 15 | PASS |
| $\pi/4$ DQPSK | 2-DH5 | 79 | 15 | PASS |
| 8DPSK | 3-DH5 | 79 | 15 | PASS |


Test Graphs

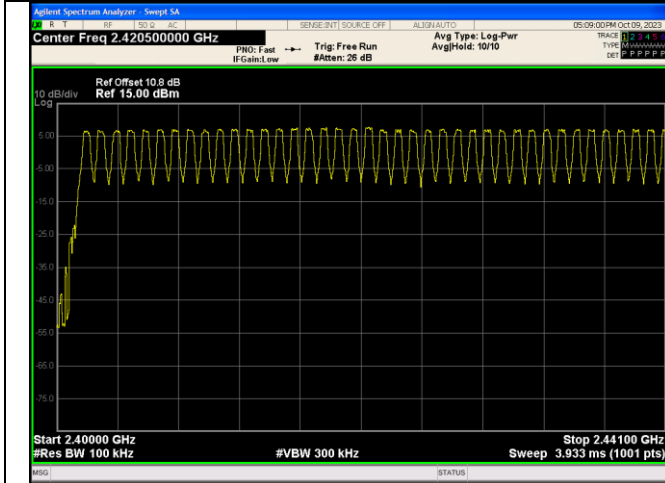


Low End Spectrum Channel Hopping Plot
GFSK

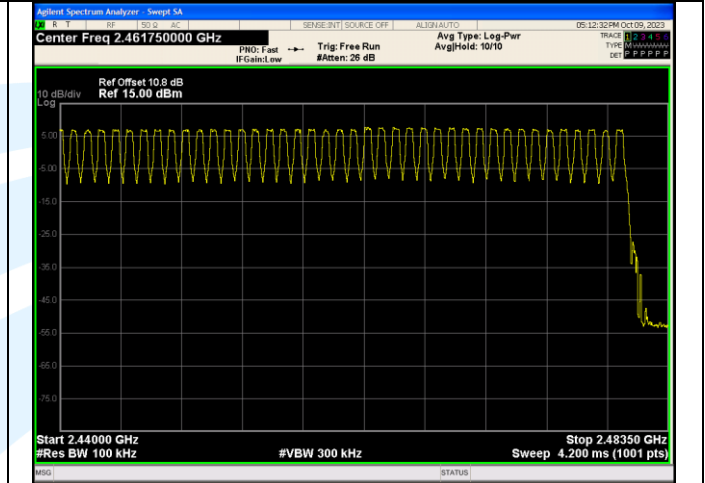


High End Spectrum Channel Hopping Plot
GFSK

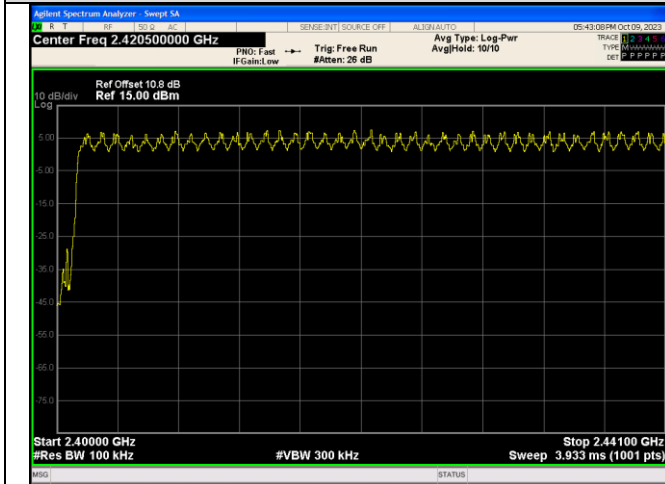


Low End Spectrum Channel Hopping Plot
 $\pi/4$ DQPSK

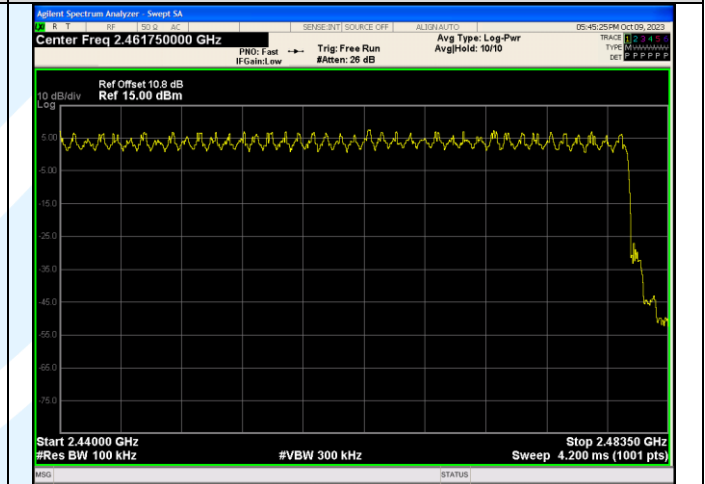

High End Spectrum Channel Hopping Plot
 $\pi/4$ DQPSK

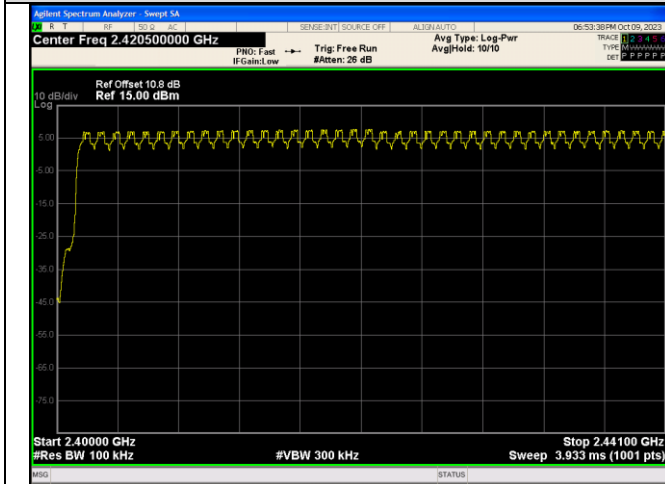

Low End Spectrum Channel Hopping Plot
8DPSK

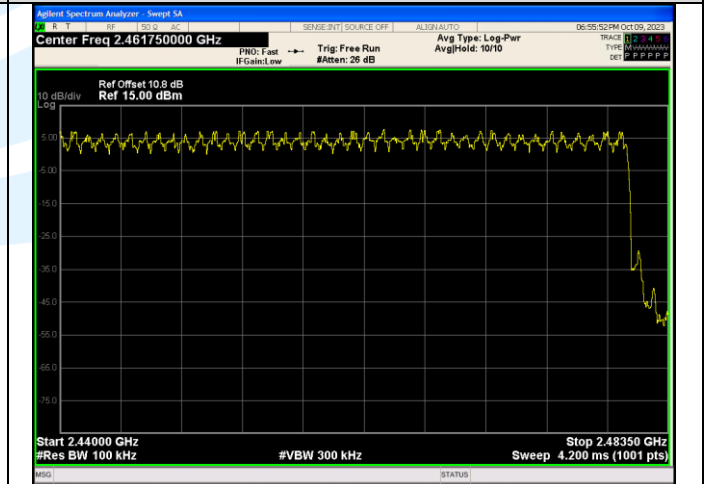

High End Spectrum Channel Hopping Plot
8DPSK

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
