

FCC TEST REPORT

Product Name: Smart Phone
Trade Mark: BLU
Model No.: G72 MAX
Add. Model No.: N/A
Report Number: 2210112022RFC-4
Test Standards: FCC 47 CFR Part 15 Subpart E
FCC ID: YHLBLUG72MX
Test Result: PASS
Date of Issue: November 17, 2022


Prepared for:

BLU Products, Inc.
10814 NW 33rd St # 100 Doral, FL 33172, USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:



Kieron Luo
Project Engineer

Reviewed by:



Henry Lu
Team Leader

Approved by:



Kevin Liang
Assistant Manager

Date:

November 17, 2022

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Version

Version No.	Date	Description
V1.0	November 17, 2022	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 OTHER INFORMATION	7
1.5 DESCRIPTION OF SUPPORT UNITS	7
1.6 TEST LOCATION	7
1.7 TEST FACILITY	8
1.8 DEVIATION FROM STANDARDS	8
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	8
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
1.11 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	10
4. TEST CONFIGURATION	11
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	11
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	11
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	11
4.2 TEST CHANNELS	12
4.3 EUT TEST STATUS	12
4.4 PRE-SCAN	13
4.5 TEST SETUP	13
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	13
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	15
4.5.3 FOR CONDUCTED RF TEST SETUP	15
4.6 SYSTEM TEST CONFIGURATION	16
4.7 DUTY CYCLE	17
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	21
5.1 REFERENCE DOCUMENTS FOR TESTING	21
5.2 ANTENNA REQUIREMENT	21
5.3 26 DB BANDWIDTH	22
5.4 6 DB BANDWIDTH	33
5.5 MAXIMUM CONDUCTED OUTPUT POWER	37
5.6 PEAK POWER SPECTRAL DENSITY	42
5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT	58
5.8 DYNAMIC FREQUENCY SELECTION	96
5.9 AC POWER LINE CONDUCTED EMISSION	106
APPENDIX 1 PHOTOS OF TEST SETUP	109
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	109

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	10814 NW 33rd St # 100 Doral, FL 33172, USA
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	10814 NW 33rd St # 100 Doral, FL 33172, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smart Phone			
Model No.:	G72 MAX			
Add. Model No.:	N/A			
Trade Mark:	BLU			
DUT Stage:	Identical Prototype			
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM850/PCS 1900		
	UTRA Bands:	WCDMA Band II/ Band IV/ Band V		
	E-UTRA Bands:	LTE FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 12/ Band 17/ Band 66		
	2.4 GHz ISM Band:	IEEE 802.11b/g/n		
		Bluetooth 5.0		
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac	
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac	
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac	
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac	
RNSS Bands:	1559 MHz to 1610 MHz	GPS/ BDS/ Galileo/ GLONASS		
BSR:	VHF Band II	FM		
Software Version:	BLU_G0770WW_V12.0.G.01.00_GENERIC (Provided by the customer)			
Hardware Version:	2003SD-MB-P1 (Provided by the customer)			
Sample Received Date:	September 7, 2022			
Sample Tested Date:	October 12, 2022 to October 26, 2022			
Remark:	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.			

1.2.2 Description of Accessories

Adapter	
Model No.:	US-HY-2000
Input:	100-240 V~50/60 Hz 0.3 A
Output:	5.0 V $\overline{=}$ 2000 mA
AC Cable:	N/A
DC Cable:	N/A

Battery	
Model No.:	C806051500P
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.87 Vdc
Limited Charge Voltage:	4.45 Vdc
Rated Capacity:	5000 mAh

Cable	
Description:	USB Type-C Plug Cable
Cable Type:	Shielded without ferrite
Length:	0.8 Meter

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Bands:	5150 MHz to 5250 MHz (U-NII-1)				
	5250 MHz to 5350 MHz (U-NII-2A)				
	5470 MHz to 5725 MHz (U-NII-2C)				
	5 725 MHz to 5 850 MHz (U-NII-3)				
Frequency Ranges:	5180 MHz to 5240 MHz				
	5260 MHz to 5320 MHz				
	5500 MHz to 5700 MHz				
	5 745 MHz to 5 825 MHz				
Support Standards:	IEEE 802.11a/n/ac				
TPC Function:	Not Support				
DFS Operational mode:	Slave without radar Interference detection function				
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)				
Channel Spacing:	IEEE 802.11a/n-HT20/ac-VHT20: 20 MHz				
	IEEE 802.11n-HT40/ac-VHT40: 40 MHz				
	IEEE 802.11ac-VHT80: 80 MHz				
Data Rate:	IEEE 802.11a: Up to 54 Mbps				
	IEEE 802.11n-HT20: Up to MCS7				
	IEEE 802.11n-HT40: Up to MCS7				
	IEEE 802.11ac-VHT20: Up to MCS8				
	IEEE 802.11ac-VHT40: Up to MCS9				
	IEEE 802.11ac-VHT80: Up to MCS9				
Number of Channels:	5150 MHz to 5250 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11acVHT80				
	5250 MHz to 5350 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11acVHT80				
	5470 MHz to 5725 MHz: 11 for IEEE 802.11a/n-HT20/ac-VHT20 5 for IEEE 802.11n-HT40/ac-VHT40 2 for IEEE 802.11ac-VHT80				
	5725 MHz to 5850 MHz: 5 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11ac-VHT80				
Antenna Type:	FPCB Antenna				
Antenna Gain: (Provided by the customer)	5150 - 5250 MHz	1.17 dBi			
	5250 - 5350 MHz	1.17 dBi			
	5470 - 5725 MHz	1.17 dBi			
	5725 - 5850 MHz	1.17 dBi			
Maximum conducted output power (dBm):		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
	IEEE 802.11a:	12.69	12.45	12.29	11.71
	IEEE 802.11n-HT20:	11.04	10.94	10.41	10.48
	IEEE 802.11n-HT40:	11.32	11.14	10.67	10.63

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

	IEEE 802.11ac-VHT20:	11.01	10.92	10.42	10.51
	IEEE 802.11ac-VHT40:	11.30	10.96	10.74	10.68
	IEEE 802.11ac-VHT80:	10.98	10.82	10.44	10.29
Normal Test Voltage:	3.87 Vdc and/or 120V~60Hz				

1.4 OTHER INFORMATION

Operation Frequency Each of Channel				
	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
IEEE 802.11a, IEEE 802.11n-HT20, IEEE 802.11ac-VHT20	$f = 5000 + 5k, k = 32 + 4n$			$f = 5000 + 5k,$ $k = 145 + 4n$
	$n = 1, \dots, 4$	$n = 5, \dots, 8$	$n = 17, \dots, 27$	$n = 1, \dots, 5$
IEEE 802.11n-HT40, IEEE 802.11ac-VHT40	$f = 5000 + 5k, k = 30 + 8n$			$f = 5000 + 5k,$ $k = 143 + 8n$
	$n = 1, 2$	$n = 1, \dots, 5$	$n = 9, \dots, 13$	$n = 1, 2$
IEEE 802.11ac-VHT80	$f = 5000 + 5k, k = 26 + 16n$			$f = 5000 + 5k,$ $k = 155$
	$n = 1$	$n = 1, 2$	$n = 5, 6$	
Note: f is the operating frequency (MHz); k is the operating channel.				

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	FCC ID	Supplied by
Notebook	DELL	Inspiron 5409	N/A	N/A	UnionTrust
Wireless Home Router	SAGEMCOM	FAST5280	N/A	VW3FAST5280	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109
 Telephone: +86 (0) 755 2823 0888
 Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	±4.7 dB
4	Radiated emission 30MHz-1GHz	±4.6 dB
5	Radiated emission 1GHz-18GHz	±4.4 dB
6	Radiated emission 18GHz-40GHz	±4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 FCC 47 CFR Part 15 Subpart E Section 15.407(a)(1) (2)	N/A	PASS
26 dB emission bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5)	KDB 789033 D02 v02r01 Section C.1	PASS
6 dB bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (e)	KDB 789033 D02 v02r01 Section C.2	PASS
Maximum conducted output power	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	PASS
Peak Power Spectral Density	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section F	PASS
Radiated Emissions and Band Edge Measurement	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6) FCC 47 CFR Part 15 Subpart C Section 15.209/205	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	PASS
Dynamic Frequency Selection	FCC 47 CFR Part 15 Subpart E Section 15.407 (h)	KDB 905462 D03 Client Without DFS New Rules v01r02	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(6) FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013, Section 6.2.	PASS
Disclaimer and Explanations: The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

For Dynamic Frequency Selection

Test Case	Result
Channel Availability Check Time	N/A ¹
U-NII Detection Bandwidth	N/A ¹
Channel Closing Transmission Time	PASS
Channel Move Time	PASS
DFS Detection Threshold	N/A ¹
Non- Occupancy Period	N/A ¹

Note:

1) The EUT is slave, NA In this whole report not applicable.

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021	21-Jan-2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	15-Apr-2022	14-Apr-2023
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	17-Apr-2022	16-Apr-2024
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118385	00201874	6-Nov-2021	5-Nov-2022
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	17-Apr-2022	16-Apr-2024
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	14-Nov-2020	13-Nov-2022
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118384	00202652	17-Nov-2020	16-Nov-2022
<input checked="" type="checkbox"/>	Band Rejection Filter (5150MHz~5880MHz)	Micro-Tronics	BRM50716	G186	6-Nov-2021	5-Nov-2022
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	101181	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9 20151119i		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	15-Apr-2022	14-Apr-2023
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	EXG-B RF Analog Signal Generator	KEYSIGHT	N5171B	MY53051777	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	5-Nov-2021	4-Nov-2022

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage	Relative Humidity (%)
NT/NV	+15 to +35	3.8 Vdc and/or 120V~60Hz	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	23.5	37.9	99.75	S20220907475-ZJA05/5	David Zhang
26 dB emission bandwidth	23.9	42.5	99.9	S20220907475-ZJA01/4	Bowie Zhang
Maximum conducted output power					
Peak Power Spectral Density					
6 dB bandwidth					
Dynamic Frequency Selection					
Radiated Emissions and Band Edge Measurement	23.8	46.9	99.5	S20220907475-ZJA05/5	Fire Huo

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11a IEEE 802.11n-HT20 IEEE 802.11ac-VHT20	5150 MHz to 5250 MHz	Channel 36	Channel 44	Channel 48
		5180 MHz	5220 MHz	5240 MHz
	5250 MHz to 5350 MHz	Channel 52	Channel 60	Channel 64
		5260 MHz	5300 MHz	5320 MHz
	5470 MHz to 5725 MHz	Channel 100	Channel 120	Channel 140
		5500 MHz	5600 MHz	5700 MHz
	5725 MHz to 5850 MHz	Channel 149	Channel 157	Channel 165
		5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n-HT40 IEEE 802.11ac-VHT40	5150 MHz to 5250 MHz	Channel 38	--	Channel 46
		5190 MHz	--	5230 MHz
	5250 MHz to 5350 MHz	Channel 54	--	Channel 62
		5270 MHz	--	5310 MHz
	5470 MHz to 5725 MHz	Channel 102	Channel 118	Channel 134
		5510 MHz	5590 MHz	5670 MHz
	5725 MHz to 5850 MHz	Channel 151	--	Channel 159
		5755 MHz	--	5795 MHz
IEEE 802.11ac-VHT80	5150 MHz to 5250 MHz	--	Channel 42	--
		--	5210 MHz	--
	5250 MHz to 5350 MHz	--	Channel 58	--
		--	5290 MHz	--
	5470 MHz to 5725 MHz	Channel 106	--	Channel 122
		5530 MHz	--	5610 MHz
	5725 MHz to 5850 MHz	Channel 138	Channel 155	--
		5610 MHz/	5775 MHz	--

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11a/n/ac	1Tx/1Rx	1. Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Power Setting (Provided by the customer)				
Mode	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
IEEE 802.11a	14	14	14	14
IEEE 802.11n-HT20 IEEE 802.11ac-VHT20	13	13	13	13
IEEE 802.11n-HT40 IEEE 802.11ac-VHT40	13	13	13	13
IEEE 802.11ac-VHT80	13	13	13	13
Test Software (Provided by the customer)				
Engineering mode: *##3646633##*				


4.4 PRE-SCAN



Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11a	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0
IEEE 802.11ac-VHT20	MCS0
IEEE 802.11ac-VHT40	MCS0
IEEE 802.11ac-VHT80	MCS0


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

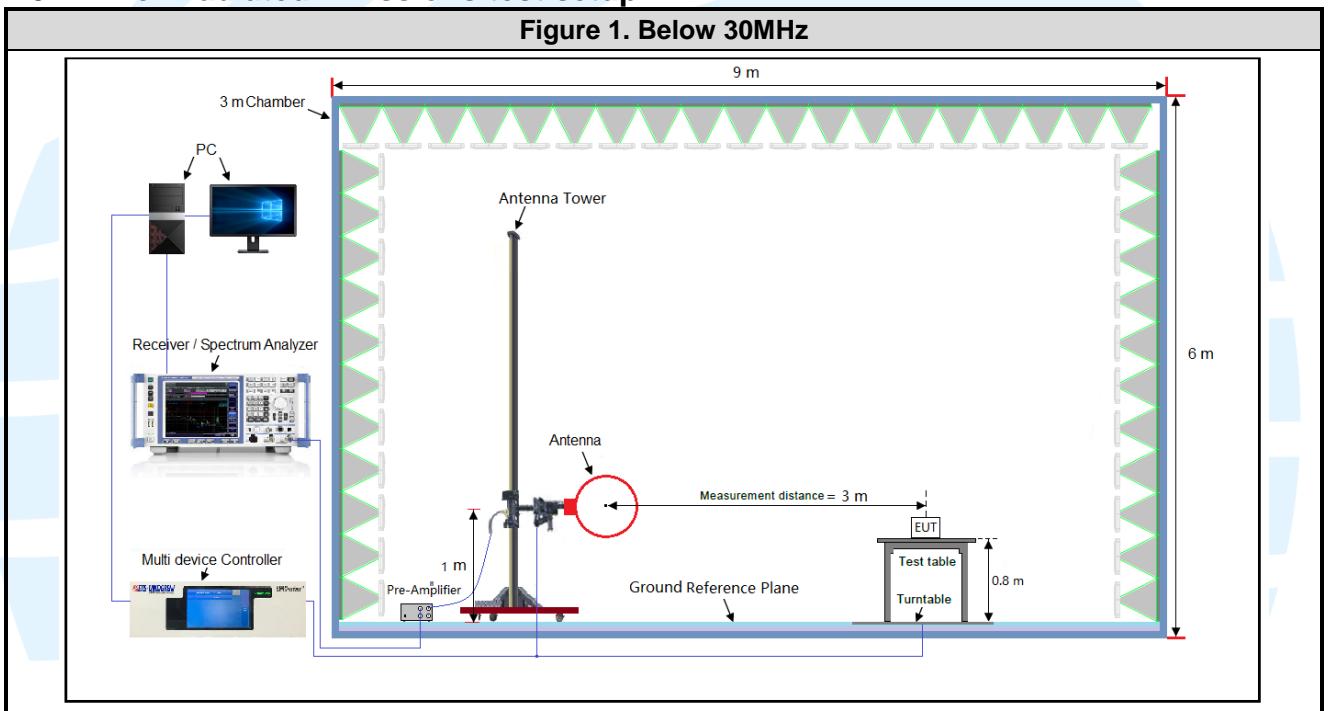


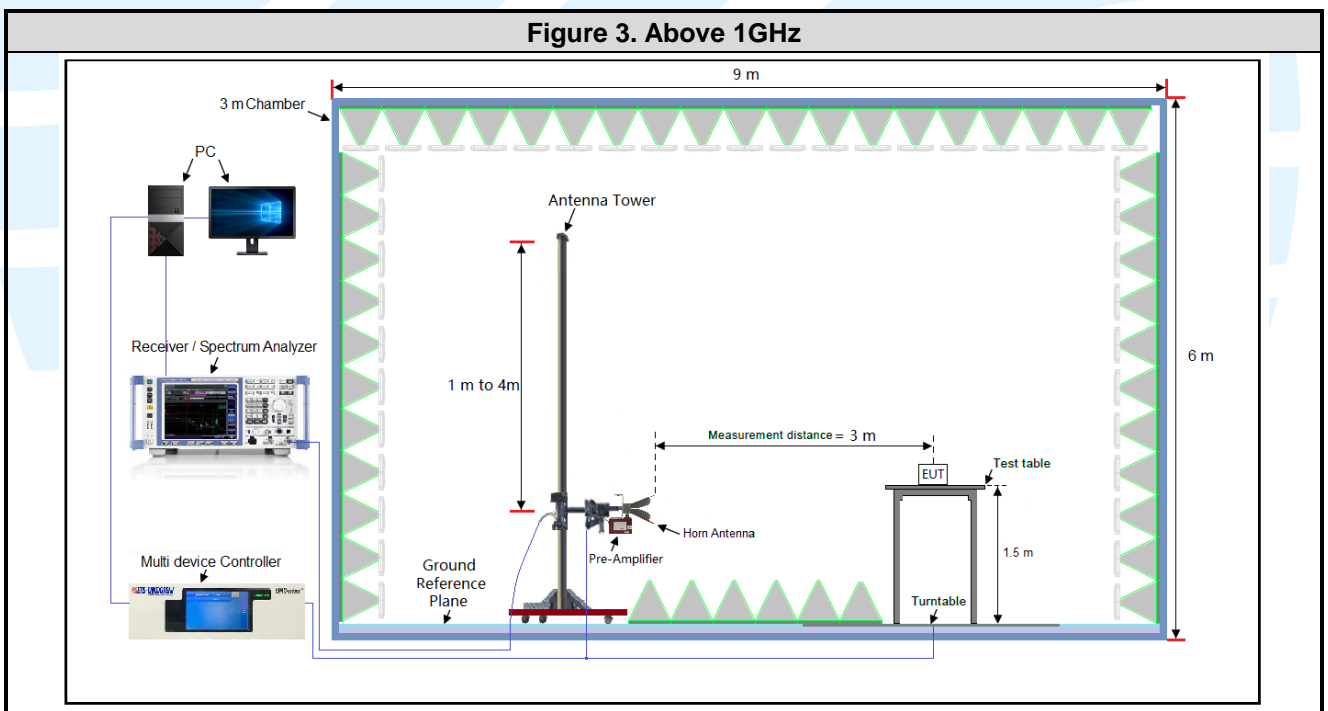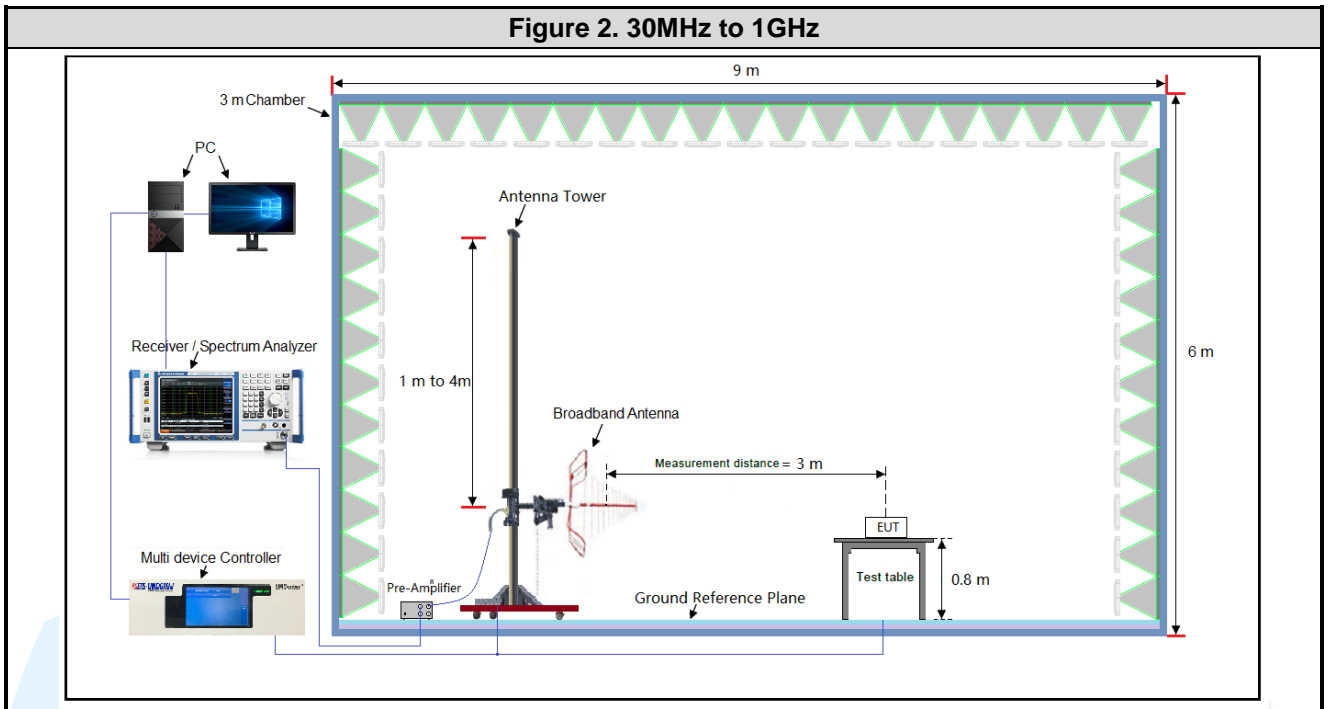

4.5.2 For Conducted Emissions test setup

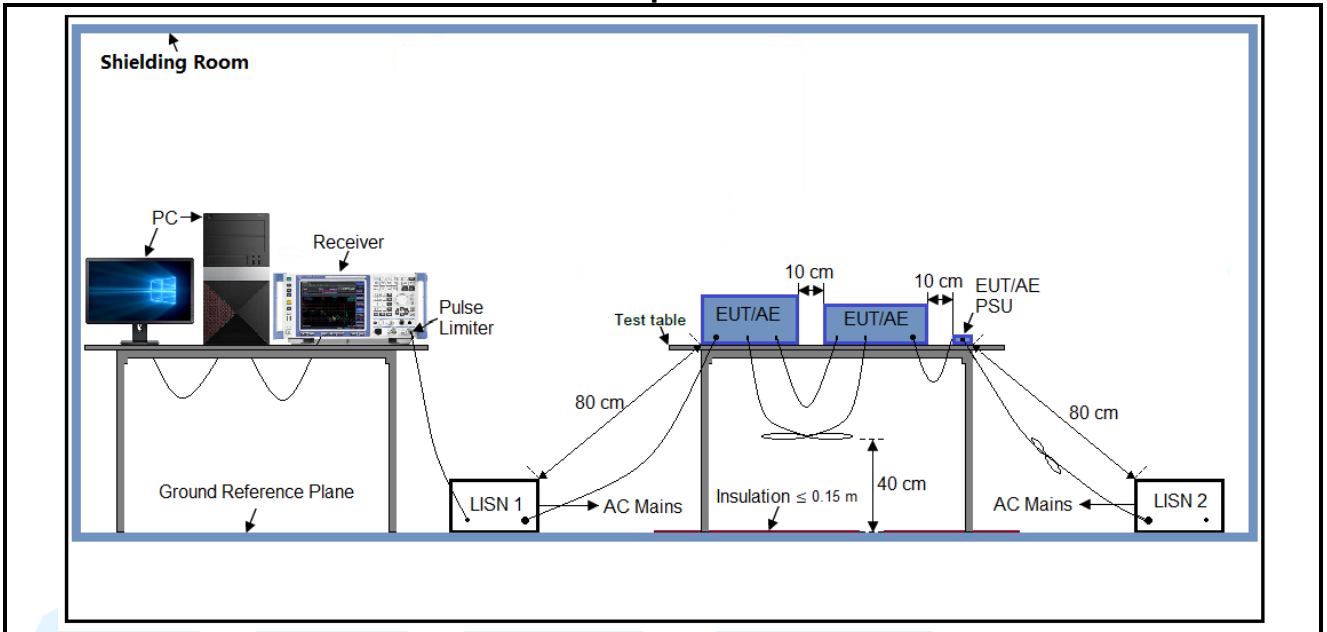

4.5.3 For Conducted RF test setup

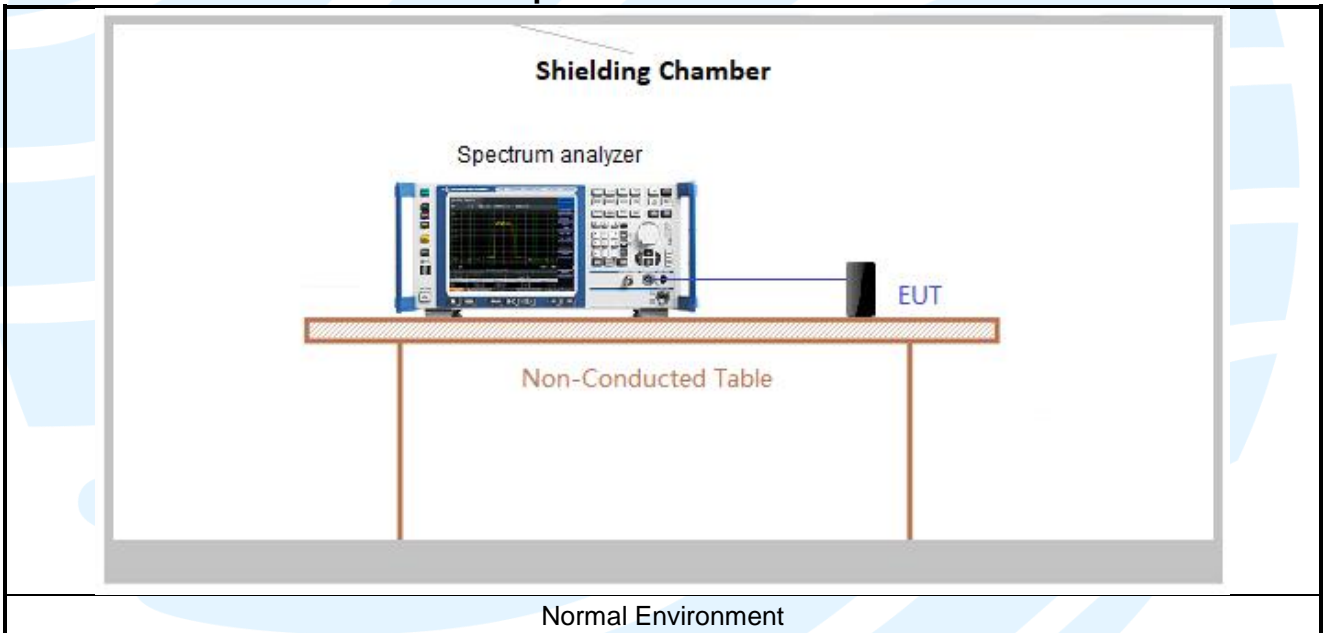

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.87V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 12.2.


Test Results



Mode	Data Rates	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11a	6 Mbps	1.385	1.440	0.96	96.18	0.17	0.72
IEEE 802.11n-HT20	MCS 0	1.295	1.345	0.96	96.28	0.16	0.77
IEEE 802.11n-HT40	MCS 0	0.610	0.700	0.87	87.14	0.60	1.64
IEEE 802.11ac-VHT20	MCS 0	1.300	1.355	0.96	95.94	0.18	0.77
IEEE 802.11ac-VHT40	MCS 0	0.615	0.695	0.88	88.49	0.53	1.63
IEEE 802.11ac-VHT80	MCS 0	0.320	0.368	0.87	86.96	0.61	3.13



Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 * log(1/ Duty cycle);

The test plots as follows

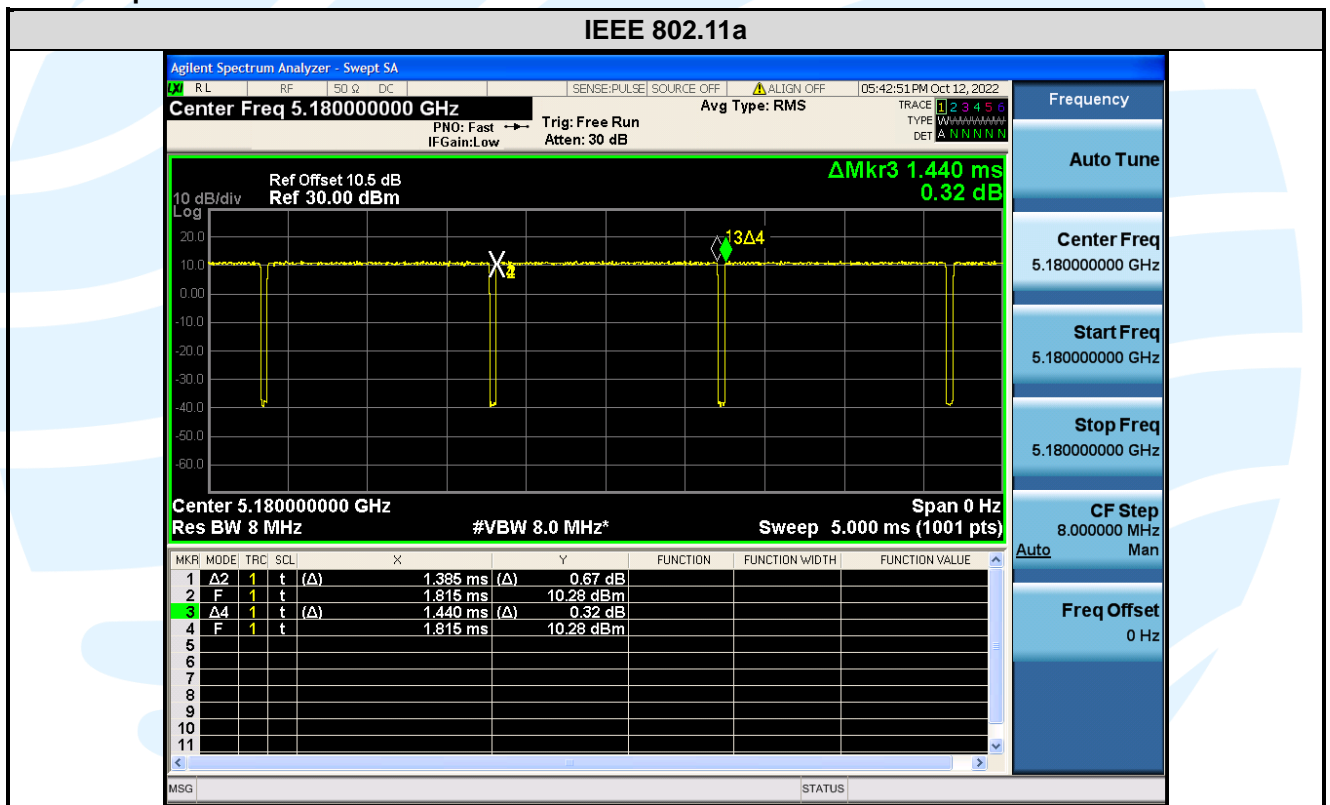

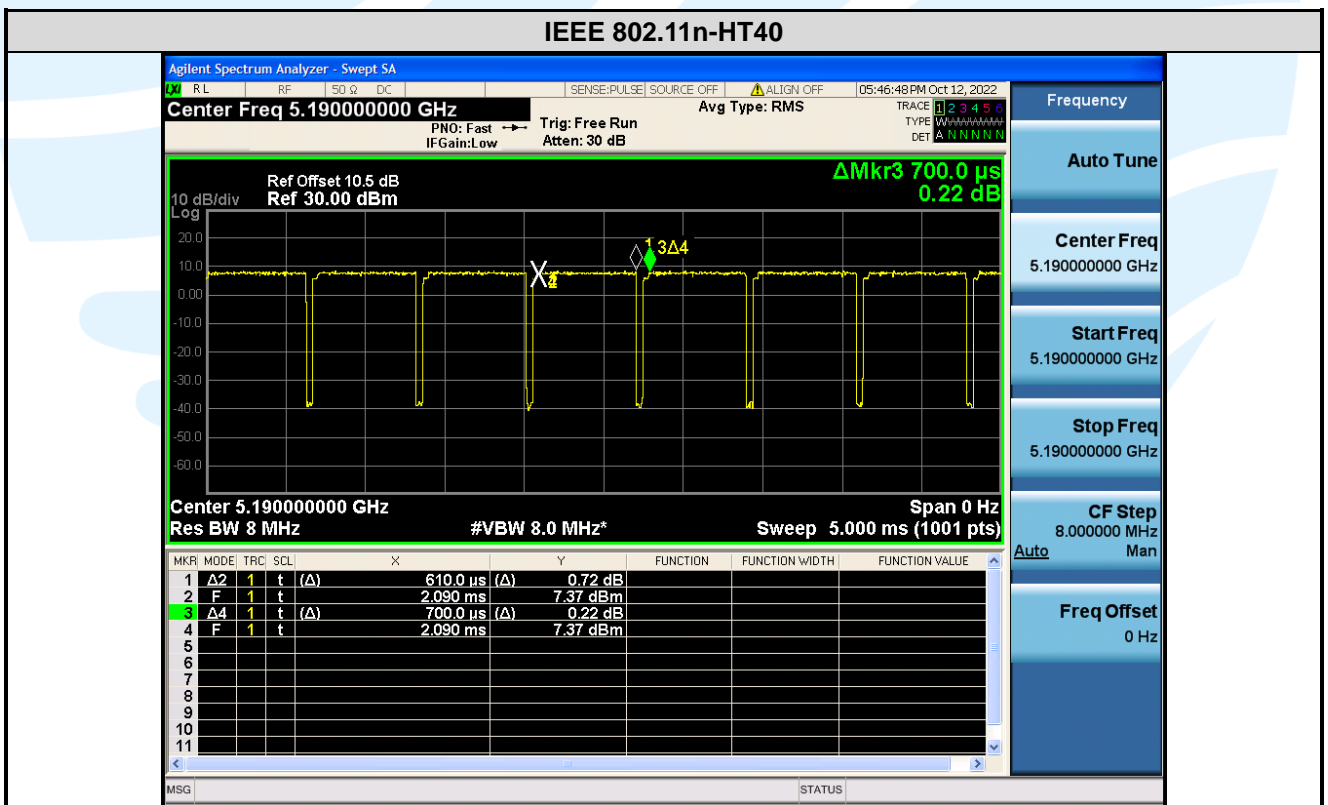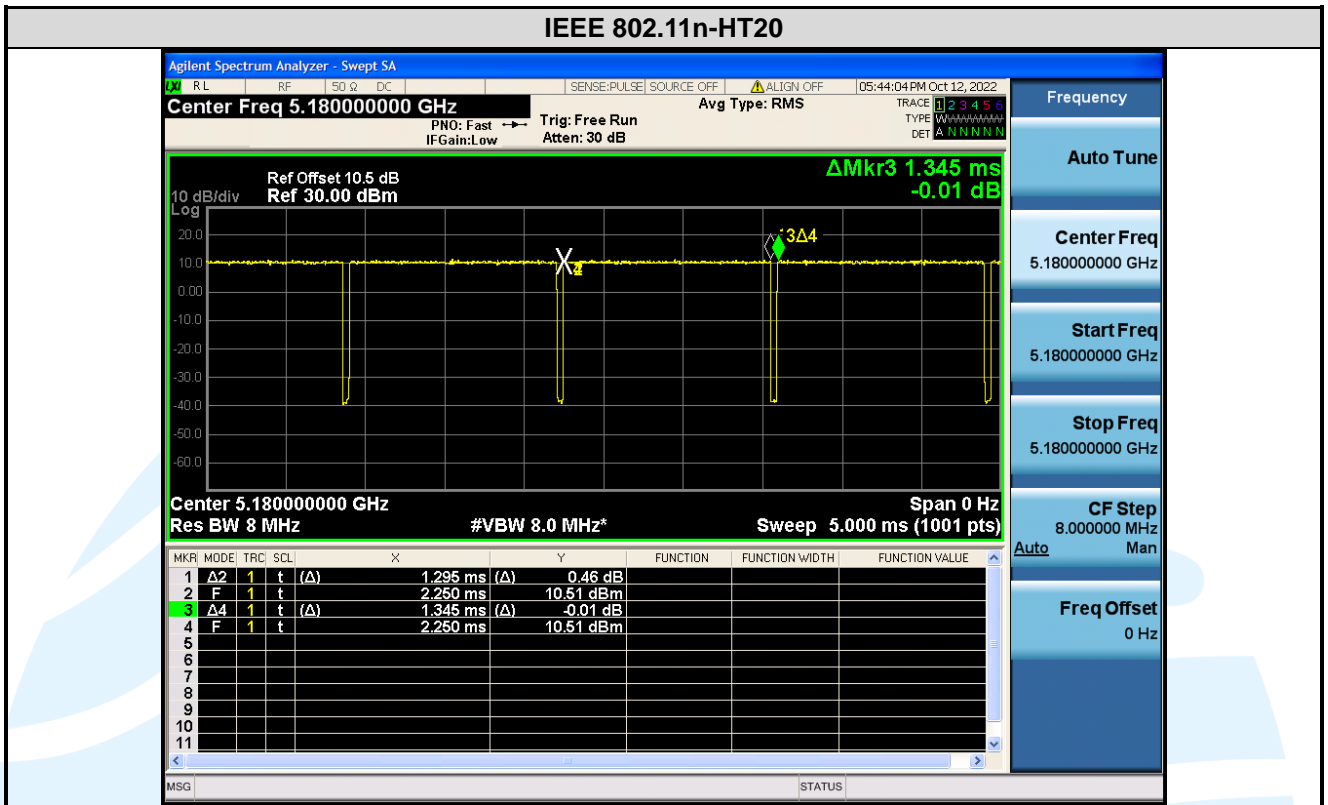

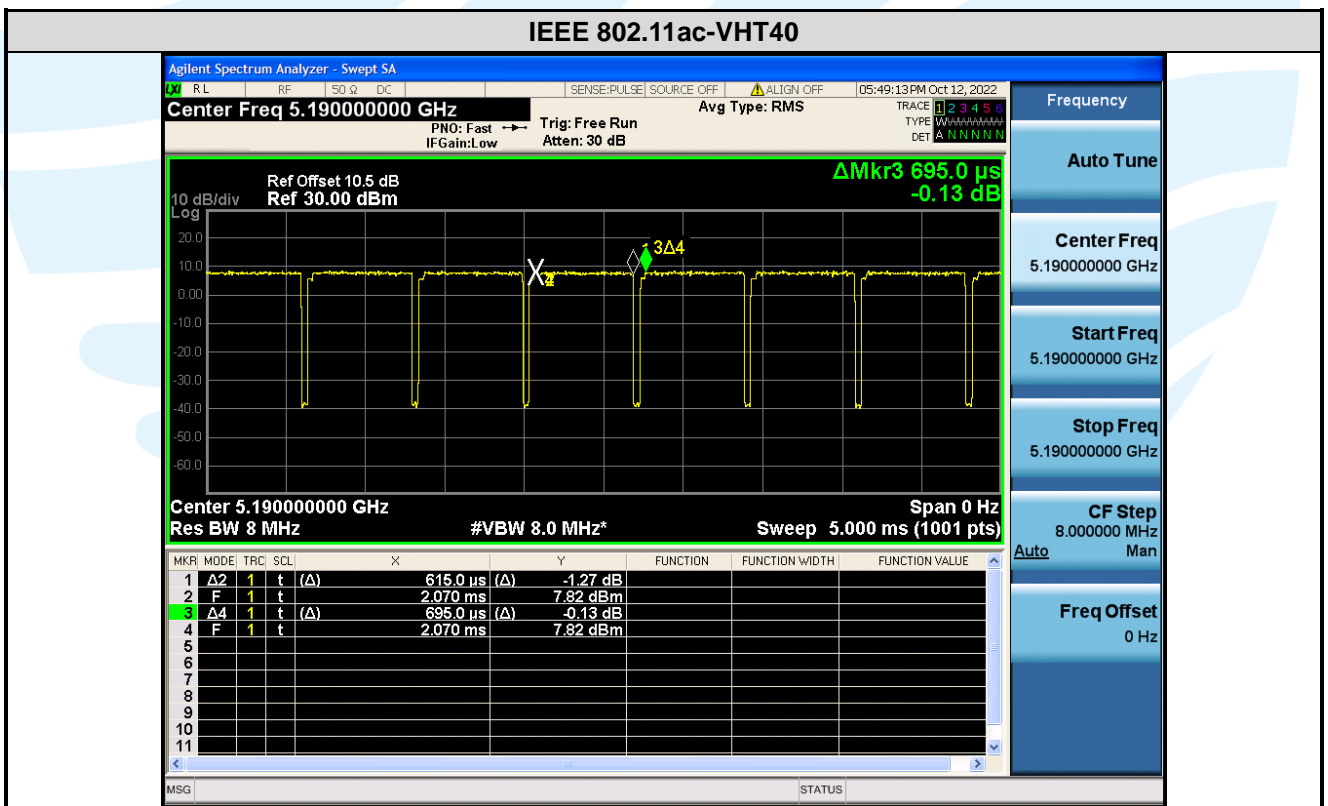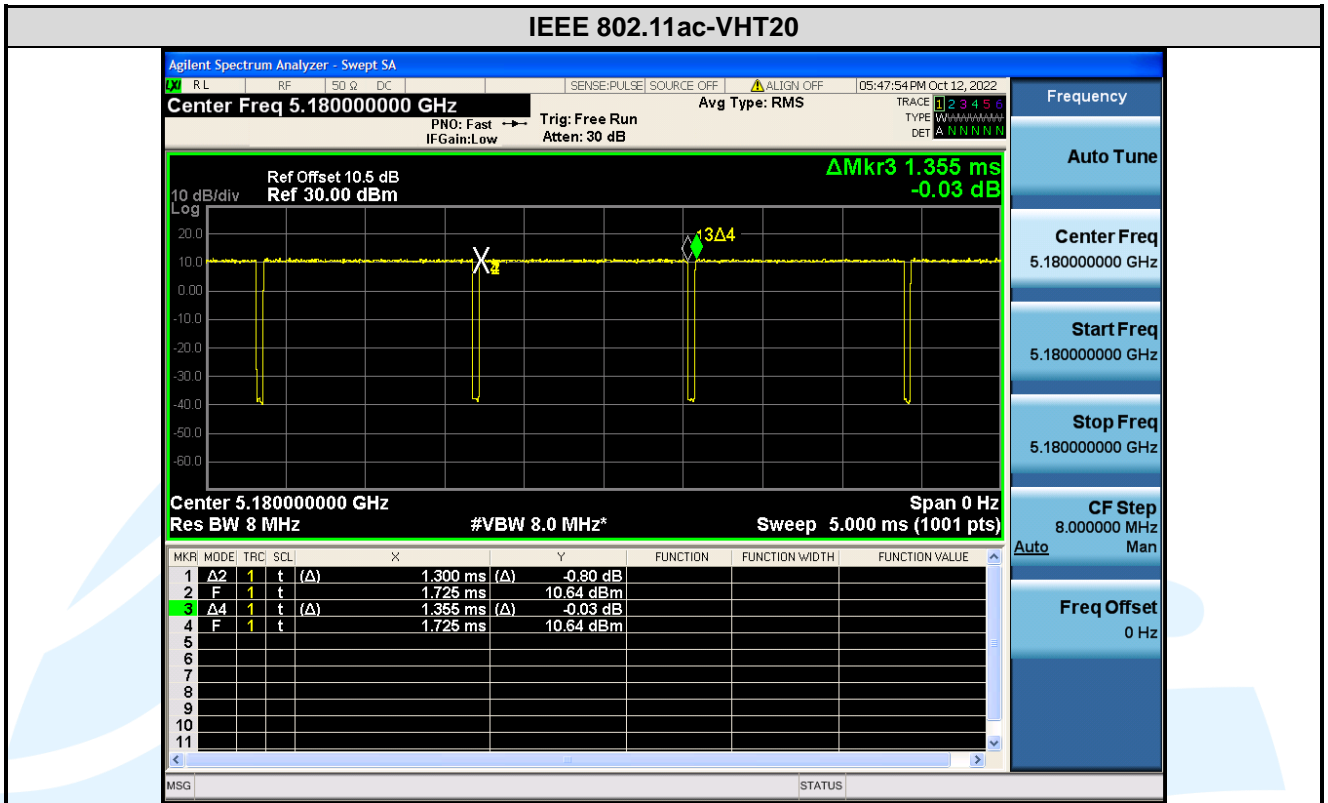

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

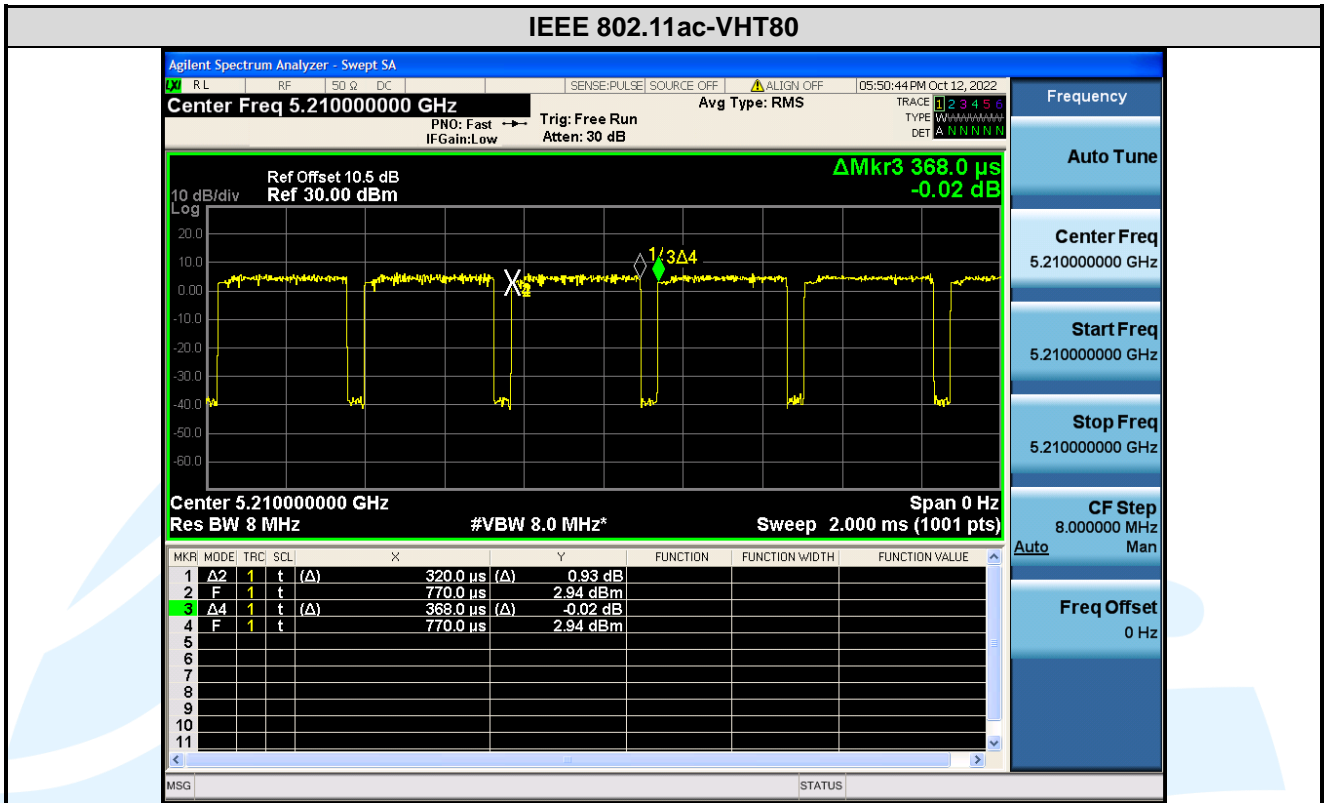

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
5	KDB 905462 D06 802.11 Channel Plans New Rules v02	Operation in U-NII bands -802.11 channel PLAN(§15.407)
6	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	Compliance measurement procedures for Unlicensed –National Information Infrastructure devices operates in the frequency bands 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands incorporating dynamic frequency selection
7	KDB 905462 D03 Client Without DFS New Rules v01r02	U-NII client devices without radar detection capability

5.2 ANTENNA REQUIREMENT

Standard Requirement
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.407(a)(1) (2) requirement: The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<p>EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 1.17 dBi.</p>

5.326 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a) (2)(5)

Test Method: KDB 789033 D02 v02r01 Section C.1

Limit: None; for reporting purposes only.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.

Spectrum analyzer according to the following Settings:

- a) Set RBW = approximately 1 % of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.


Instruments Used: Refer to section 3 for details

Test Results: Pass

Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
IEEE 802.11a	36 (5180)	19.79	16.377
	44 (5220)	19.65	16.386
	48 (5240)	19.77	16.371
	52 (5260)	19.43	16.388
	60 (5300)	19.81	16.401
	64 (5320)	19.70	16.428
	100 (5500)	19.71	16.396
	120 (5600)	19.70	16.392
	140 (5700)	19.71	16.381
IEEE 802.11n-HT20	36 (5180)	19.96	17.565
	44 (5220)	19.96	17.557
	48 (5240)	20.06	17.547
	52 (5260)	19.87	17.540
	60 (5300)	20.06	17.531
	64 (5320)	20.07	17.537
	100 (5500)	19.98	17.560
	120 (5600)	20.08	17.545
	140 (5700)	20.04	17.530

Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
IEEE 802.11n-HT40	38 (5190)	40.34	35.960
	46 (5230)	39.85	35.986
	54 (5270)	40.42	35.927
	62 (5310)	40.46	35.933
	102 (5510)	39.99	35.972
	118 (5590)	40.08	36.019
	134 (5670)	39.83	35.972
IEEE 802.11ac-VHT20	36 (5180)	19.95	17.509
	44 (5220)	19.89	17.530
	48 (5240)	19.86	17.533
	52 (5260)	20.02	17.519
	60 (5300)	20.29	17.528
	64 (5320)	19.95	17.522
	100 (5500)	20.15	17.544
	120 (5600)	19.82	17.545
	140 (5700)	20.24	17.541
IEEE 802.11ac-VHT40	38 (5190)	39.72	35.944
	46 (5230)	39.86	35.985
	54 (5270)	39.93	35.907
	62 (5310)	40.41	35.945
	102 (5510)	40.64	35.961
	118 (5590)	39.91	35.936
	134 (5670)	40.15	35.959
IEEE 802.11ac-VHT80	42 (5210)	80.92	75.305
	58 (5290)	80.11	75.350
	106 (5530)	80.70	75.279
	122 (5610)	79.78	75.331

The test plots as follows:

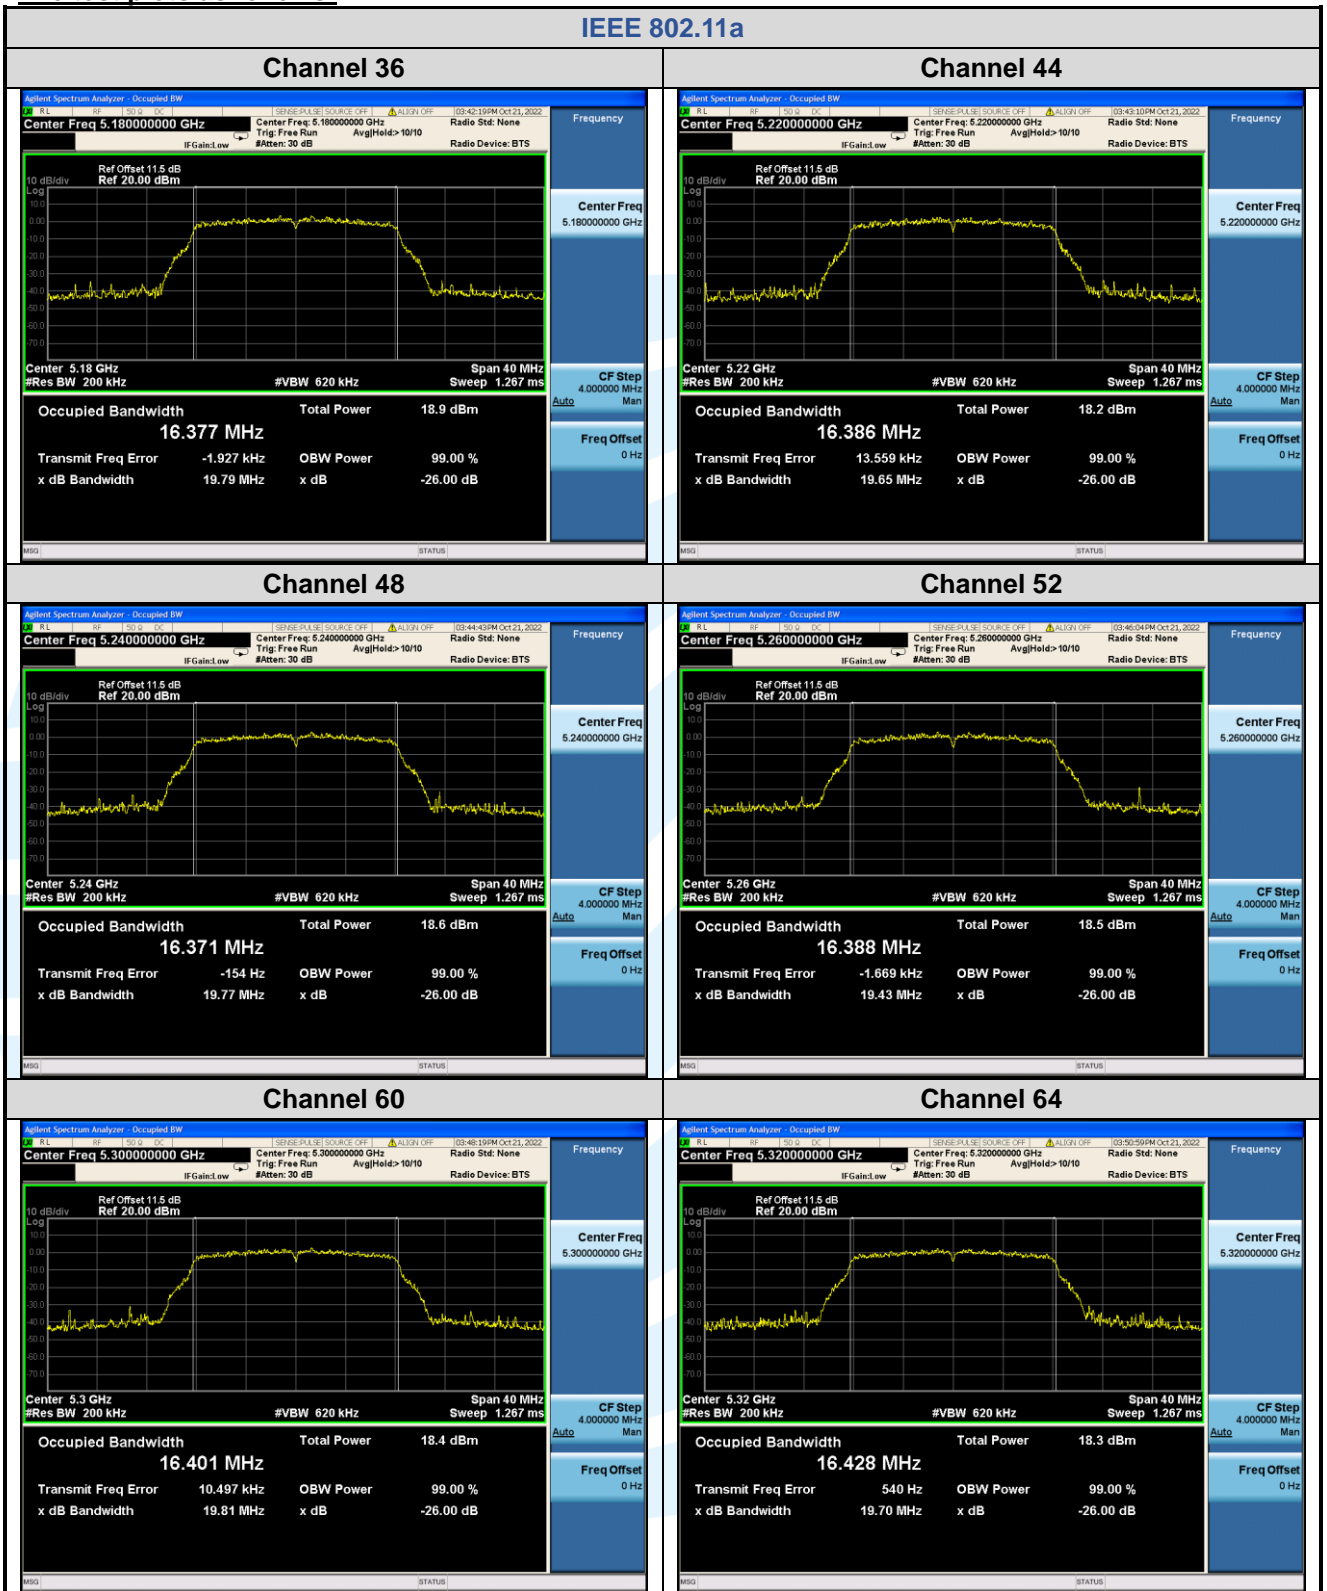

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

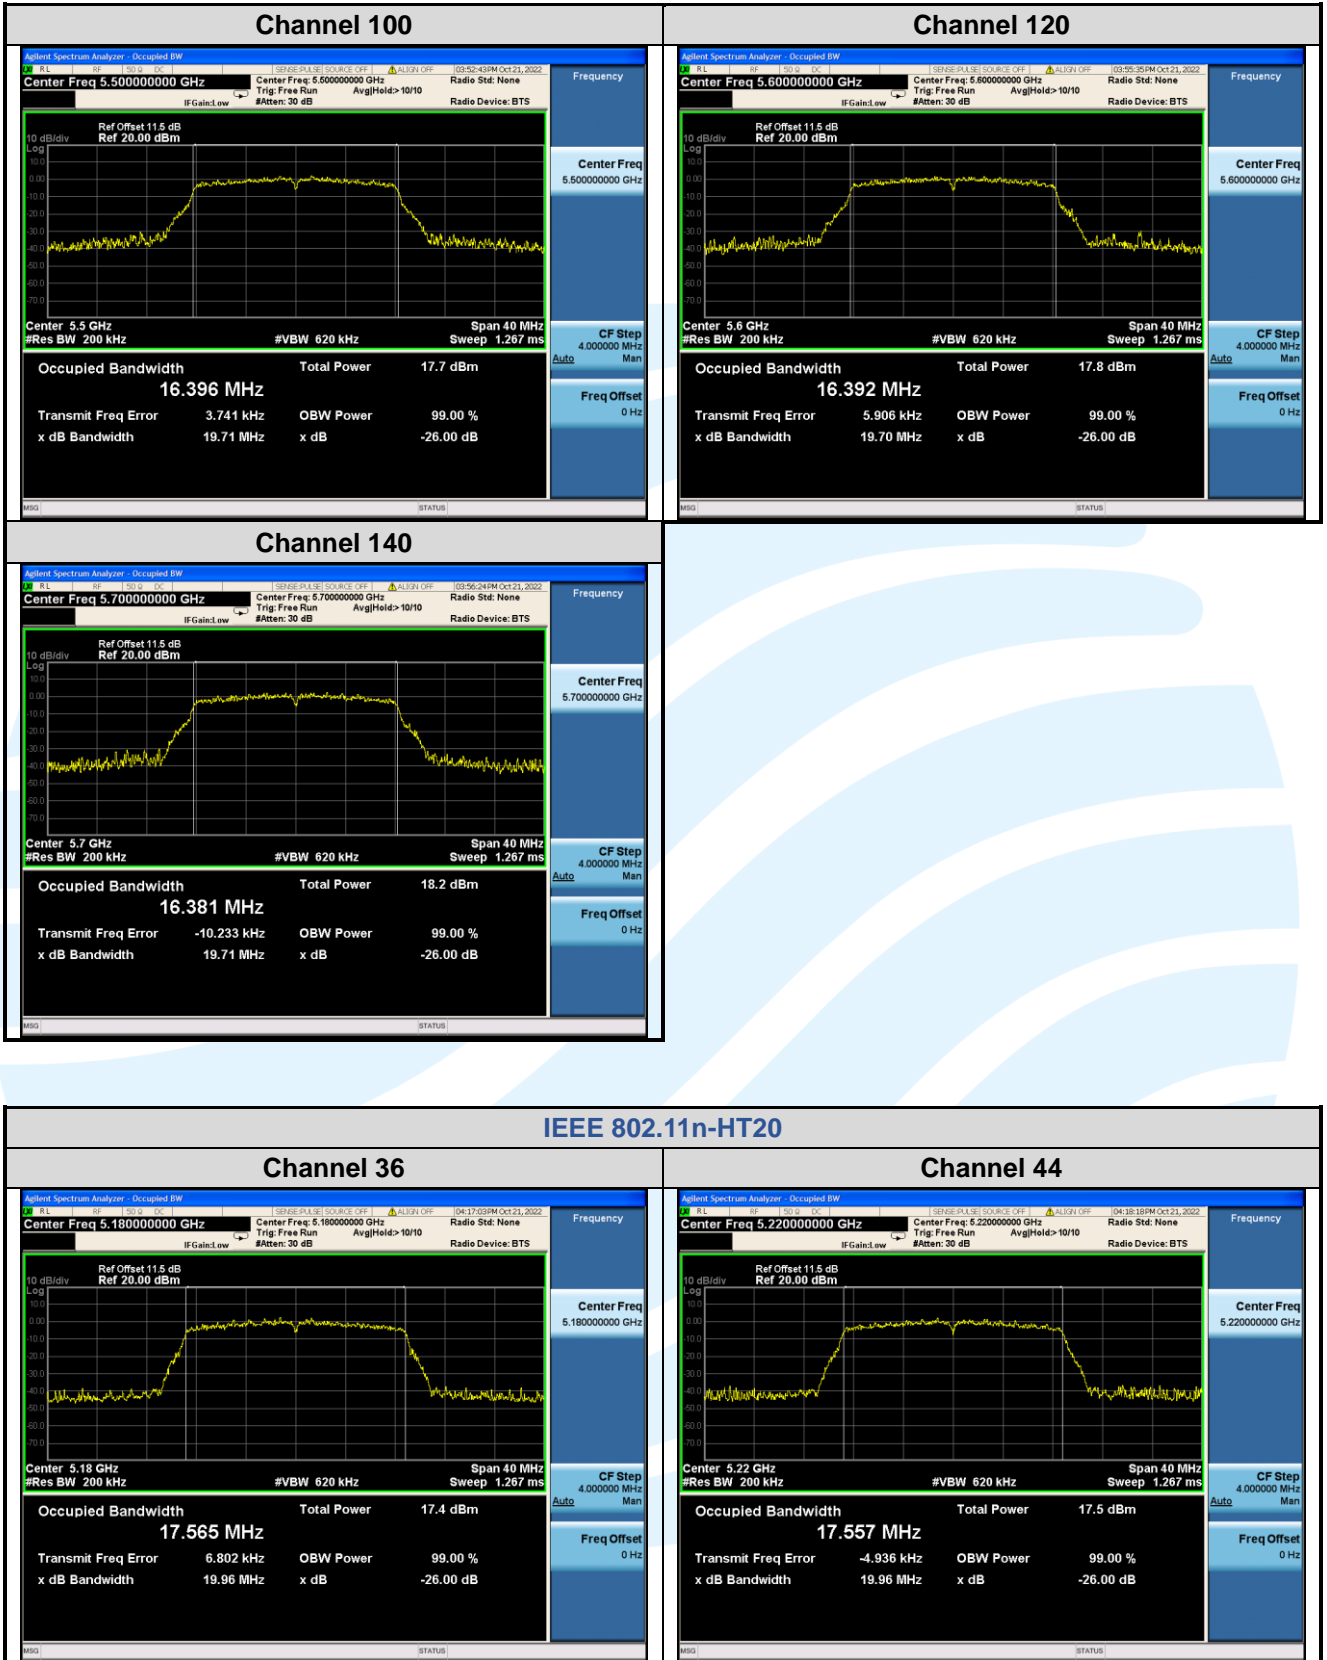

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

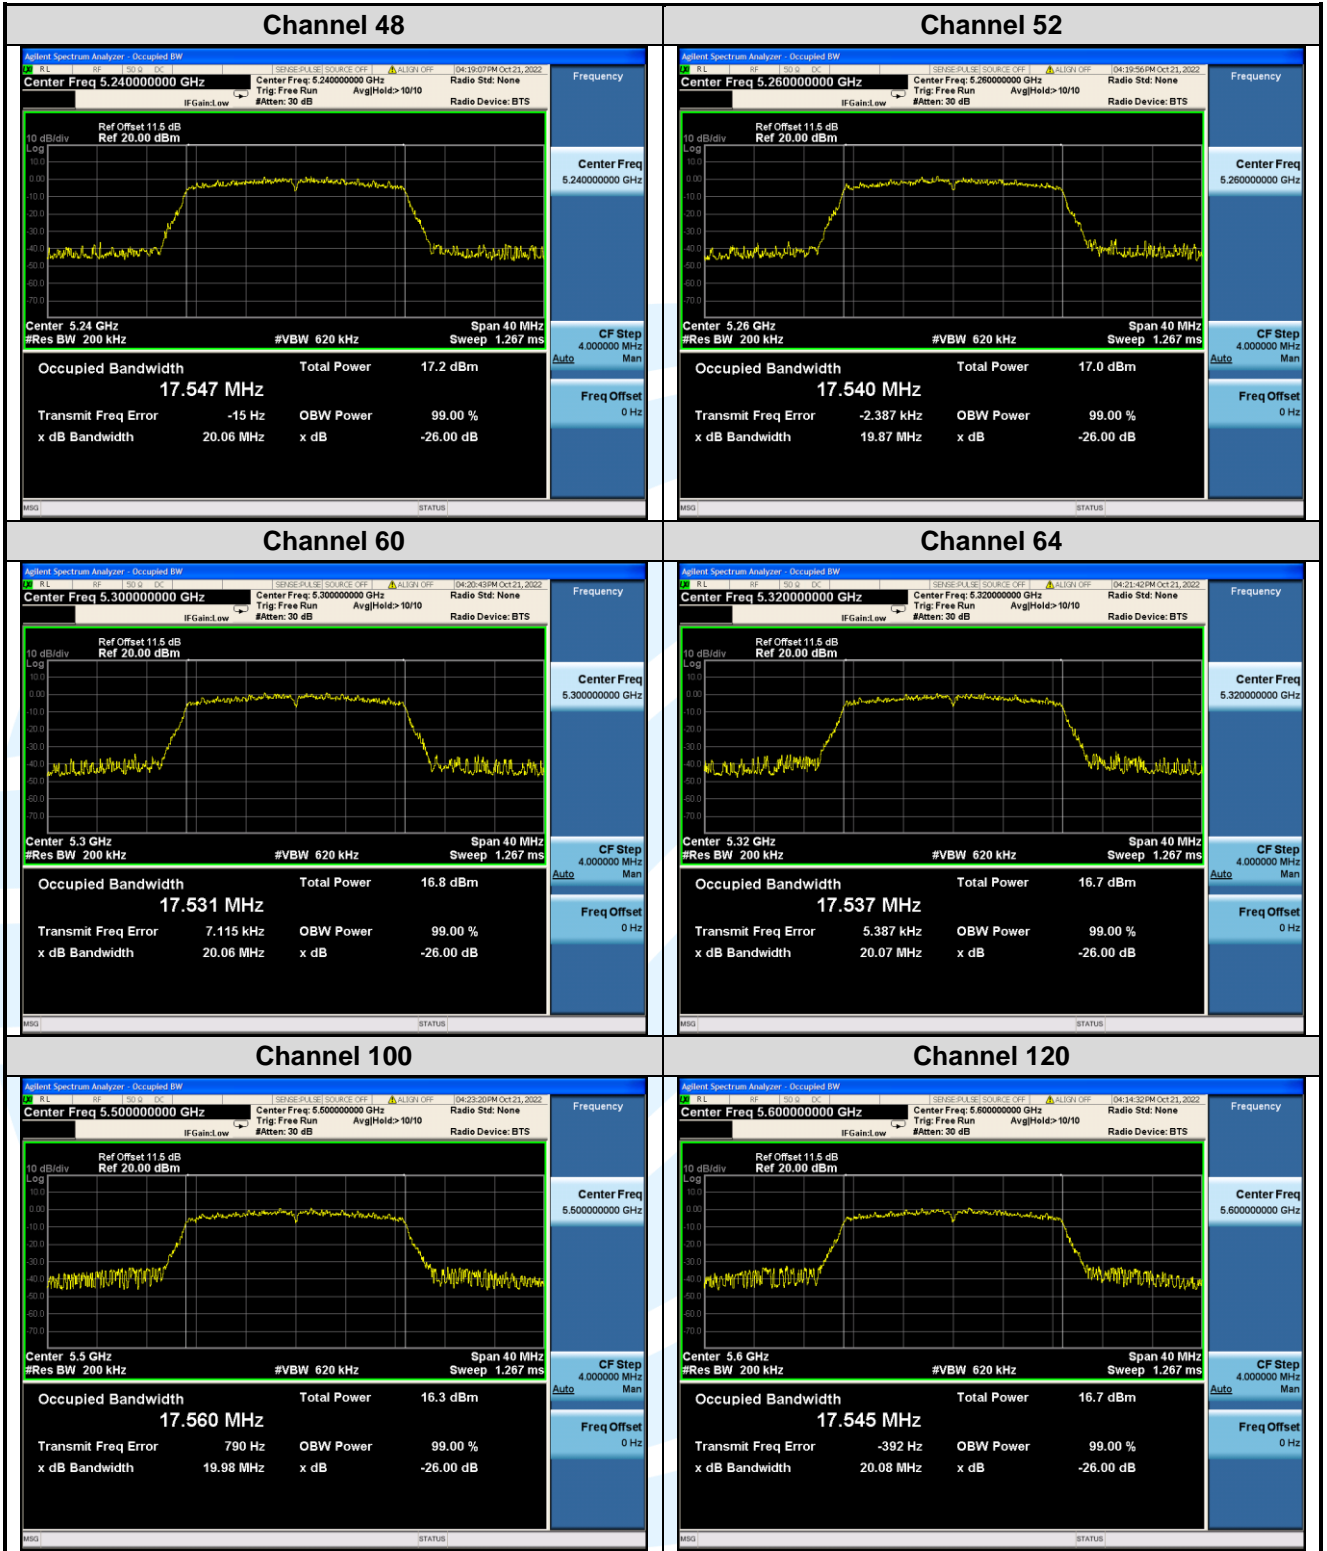

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

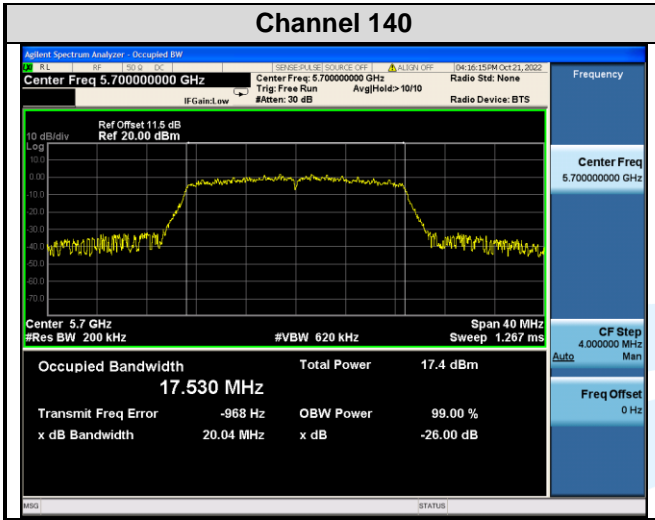

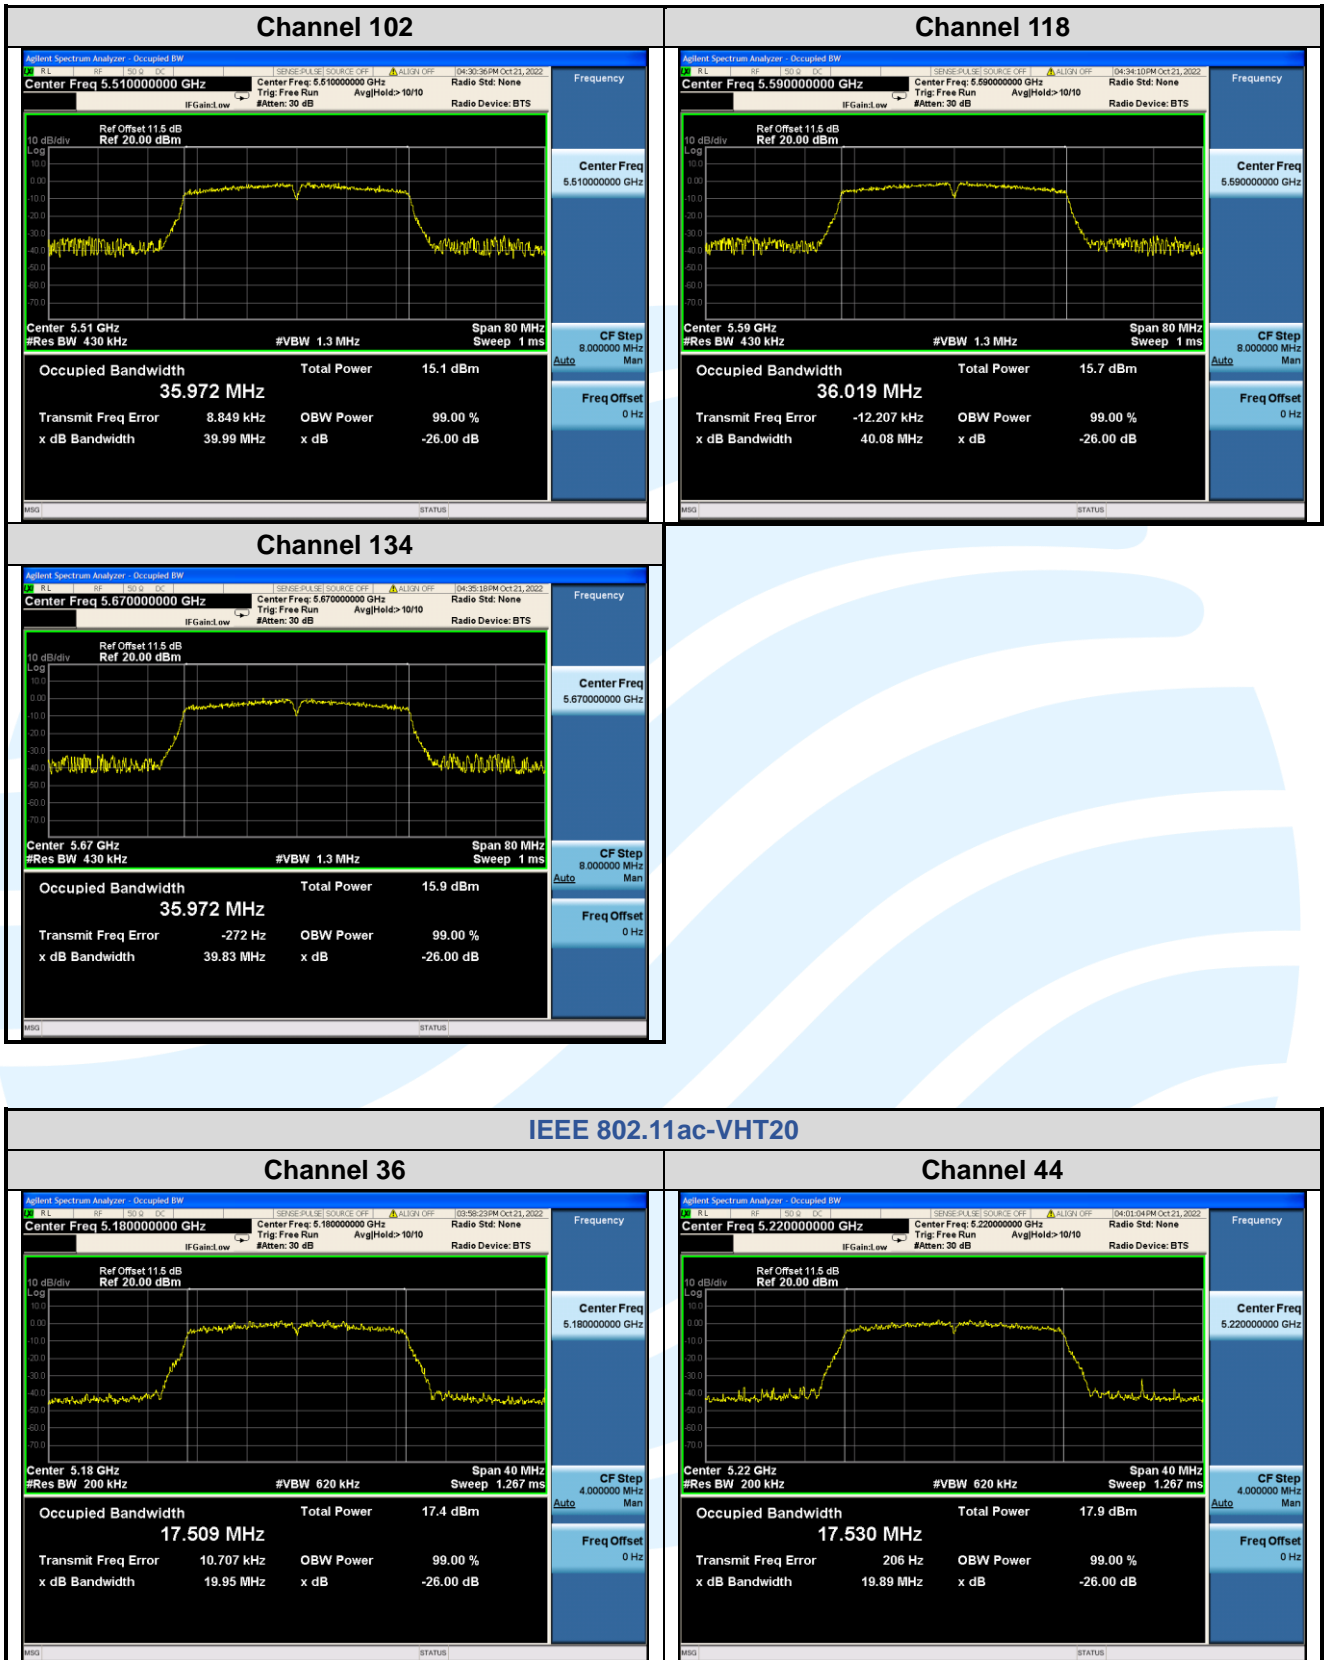

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

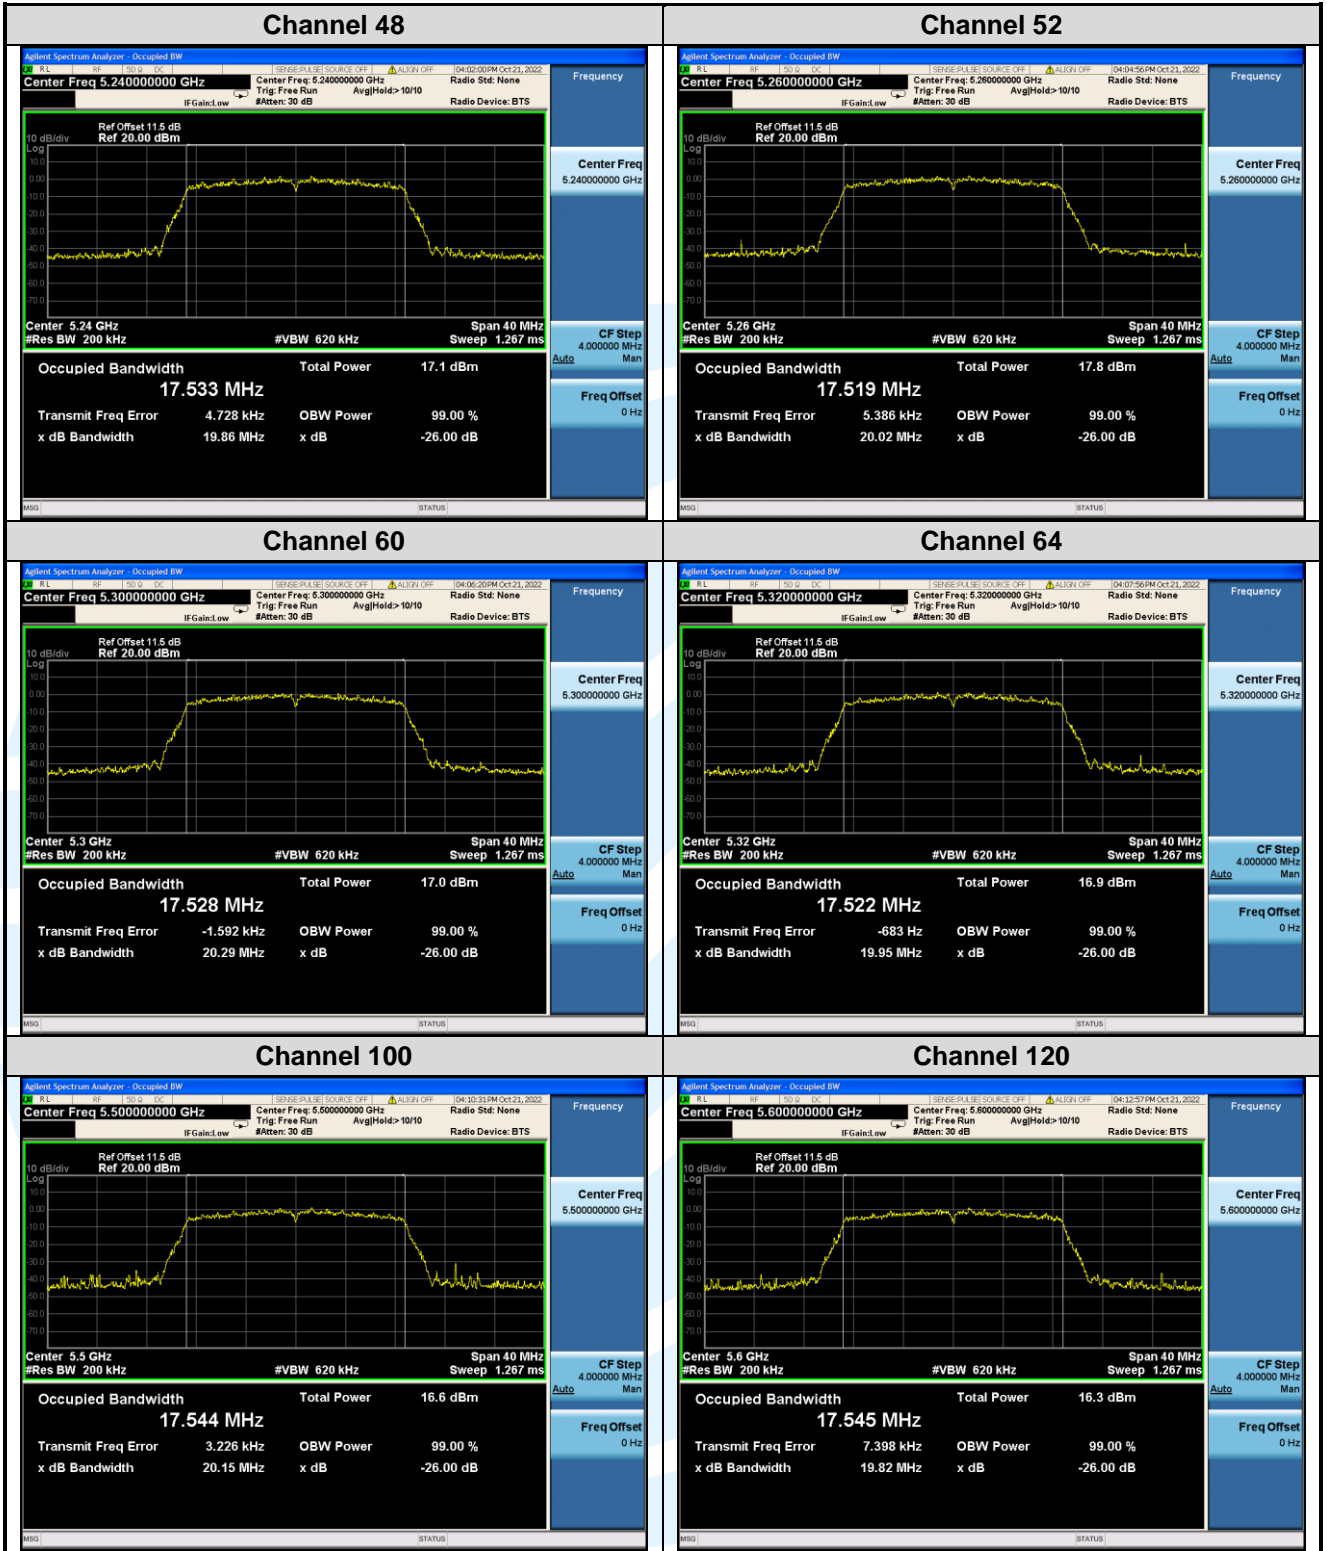

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2