



# TEST REPORT

**APPLICANT** : BLU Products, Inc.

**PRODUCT NAME** : Smart Phone

**MODEL NAME** : J8L

**BRAND NAME** : BLU

**FCC ID** : YHLBLUJ8LUU

**STANDARD(S)** : 47 CFR Part 2  
47 CFR Part 22  
47 CFR Part 24  
47 CFR Part 27

**RECEIPT DATE** : 2023-07-13

**TEST DATE** : 2023-07-18 to 2023-07-30

**ISSUE DATE** : 2023-08-28



Edited by: Li Huaijie  
Li Huaijie (Rapporteur)

Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator ..... 5**
- 1.4. Test Standards and Results ..... 6**
- 1.5. Environmental Conditions ..... 8**
- 2. Summary Test Results And Description ..... 9**
- 2.1. Conducted RF Output Power ..... 9**
- 2.2. Peak to Average Ratio ..... 12**
- 2.3. Occupied Bandwidth ..... 18**
- 2.4. Frequency Stability ..... 27**
- 2.5. Conducted Out of Band Emissions ..... 32**
- 2.6. Band Edge ..... 40**
- 2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements ..... 44**
- 2.8. Radiated Out of Band Emissions ..... 49**
- Annex A Test Uncertainty ..... 73**
- Annex B Testing Laboratory Information ..... 74**

Change History		
Version	Date	Reason for change
1.0	2023-08-28	First edition





# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	BLU Products, Inc.
<b>Applicant Address:</b>	8600 NW 36th Street, Suite #200 Doral, FL 33166, USA
<b>Manufacturer:</b>	BLU Products, Inc.
<b>Manufacturer Address:</b>	8600 NW 36th Street, Suite #200 Doral, FL 33166, USA

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Smart Phone	
<b>Sample No.:</b>	6#,7#	
<b>Hardware Version:</b>	H612A_MB_V1	
<b>Software Version:</b>	BLU_J0170_V13.0.G.01.00_GENERIC_28-06-2023023	
<b>Modulation Type:</b>	GSM/GPRS Mode with GMSK Modulation WCDMA Mode with QPSK Modulation HSDPA Mode with QPSK Modulation HSUPA Mode with QPSK Modulation HSPA+ Mode with 16QAM Modulation	
<b>Operating Frequency Range:</b>	GSM 850MHz	Tx: 824MHz-849MHz
		Rx: 869MHz-894MHz
	GSM 1900MHz	Tx: 1850MHz-1910MHz
		Rx: 1930MHz-1990MHz
	WCDMA Band V	Tx: 824MHz-849MHz
		Rx: 869MHz-894MHz
WCDMA Band IV	Tx: 1710MHz-1755MHz	
	Rx: 2110MHz-2155MHz	
WCDMA Band II	Tx: 1850MHz-1910MHz	
	Rx: 1930MHz-1990MHz	
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	GSM 850:	0.35dBi
	GSM1900:	0.60dBi
	WCDMA Band V:	0.35dBi



	WCDMA Band IV:	0.55dBi
	WCDMA Band II:	0.60dBi
<b>Accessory Information:</b>	Battery	
	Brand Name:	BLU
	Model No.:	C876445200L
	Serial No.:	N/A
	Capacity:	2000mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.2V
	Manufacturer:	Shenzhen Aerospace Electronic Co.,Ltd.
	AC Adapter	
	Brand Name:	BLU
	Model No.:	US-HY-1000
	Serial No.:	N/A
	Rated Output:	5.0V $\pm$ 1000mA
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.3A
	Manufacturer:	Shenzhen Zhongfu core Technology Co., LTD

**Note 1:** The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula  $F(n)=824.2+0.2*(n-128)$ ,  $128 \leq n \leq 251$ ; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 189 (836.4MHz) and 251 (848.8MHz).

**Note 2:** The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula  $F(n)=1850.2+0.2*(n-512)$ ,  $512 \leq n \leq 810$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

**Note 3:** The transmitter (Tx) frequency arrangement of the WCDMA Band V used by the EUT can be represented with the formula  $F(n)=826.4+0.2*(n-4132)$ ,  $4132 \leq n \leq 4233$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4182(836.4MHz) and 4233 (846.6MHz).

**Note 4:** The transmitter (Tx) frequency arrangement of the WCDMA IV band used by the EUT can be represented with the formula  $F(n)=1712.4+0.2*(n-1312)$ ,  $1312 \leq n \leq 1513$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 1312 (1712.4MHz), 1413 (1732.6MHz) and 1513 (1752.6MHz).

**Note 5:** The transmitter (Tx) frequency arrangement of the WCDMA Band II used by the EUT can be represented with the formula  $F(n)=1852.4+0.2*(n-9262)$ ,  $9262 \leq n \leq 9538$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).





**Note 6:** All test modes and data rates were considered and evaluated respectively by performing full test. Test modes are chosen to be reported as the worst case below:

- GSM mode and GPRS mode for GSM 850;
- GSM mode and GPRS mode for GSM 1900;
- WCDMA mode for WCDMA band V;
- WCDMA mode for WCDMA band IV;
- WCDMA mode for WCDMA band II;

**Note 7:** For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.

### 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

Test Mode	Maximum E.R.P./E.I.R.P. (W)	Emission Designator
GSM850(GSM)	1.297	247KGXW
GSM850(GPRS)	1.282	246KG7W
GSM1900(GSM)	1.094	247KGXW
GSM1900(GPRS)	1.079	241KG7W
WCDMA Band V	0.123	4M21F9W
WCDMA Band IV	0.180	4M19F9W
WCDMA Band II	0.207	4M22F9W



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22, Part 24 and Part 27 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22	Public Mobile Services
3	47 CFR Part 24	Personal Communications Services
4	47 CFR Part 27	Miscellaneous Wireless Communications Services

GSM850 & WCDMA Band V			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7W	PASS
Peak-Average Ratio	N/A	N/A	N/A
Bandwidth	§2.1049	OBW: No limit EBW: No limit	PASS
Band Edges Compliance	§2.1051, §22.917(a)(b)	Refer to section 2.6	PASS
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	≤ -13 dBm/1MHz	PASS
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	≤ -13 dBm/1MHz	PASS
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm	PASS





WCDMA Band IV			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP $\leq$ 1 W	PASS
Peak-Average Ratio	§22.913(d)(5)	Limit $\leq$ 13 dB	PASS
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	PASS
Band Edges Compliance	§2.1051, §27.53(h)(1) §27.53(h)(3)(i)	Refer to section 2.6	PASS
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)(1)	$\leq$ -13 dBm/1MHz	PASS
Field Strength of Spurious Radiation	§2.1053, §27.53(h)(1)	$\leq$ -13 dBm/1MHz.	PASS
Frequency Stability	§2.1055, §27.54	No limit	N/A

PCS1900 & WCDMA Band II			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP $\leq$ 2 W	PASS
Peak-Average Ratio	§24.232(d)	Limit $\leq$ 13 dB	PASS
Bandwidth	§2.1049	OBW: No limit EBW: No limit	PASS
Band Edges Compliance	§2.1051, §24.238(a)(b)	Refer to section 2.6	PASS
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)(b)	$\leq$ -13 dBm/1MHz	PASS
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	$\leq$ -13 dBm/1MHz	PASS
Frequency Stability	§2.1055, §24.235	No limit	N/A





Test detailed items/section required by FCC rules and results are as below:

Description	Test Date	Test Engineer	Result	Method determination/Remark
Conducted RF Output Power	2023/07/18	Chen Hao	PASS	No deviation
Peak -Average Ratio	2023/07/18	Li Huaijie	PASS	No deviation
Occupied Bandwidth	2023/07/18	Li Huaijie	PASS	No deviation
Frequency Stability	2023/07/18	Li Huaijie	PASS	No deviation
Conducted Out of Band Emissions	2023/07/18	Li Huaijie	PASS	No deviation
Band Edge	2023/07/18	Li Huaijie	PASS	No deviation
Transmitter Radiated Power (E.I.P.R./E.R.P.)	2023/07/18	Li Huaijie	PASS	No deviation
Radiated Out of Band Emissions	2023/07/30	Su Zhan	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03r01 and ANSI/TIA-603-E-2016.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 24.5dB contains two parts that cable loss 14.5dB and Attenuator 10dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** The declared of product specification for EUT presented in the report are provided by manufacturer and the test laboratory is not responsible for the accuracy of the information.

**Note 5:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

## 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106





## 2. Summary Test Results And Description


### 2.1. Conducted RF Output Power

#### 2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

#### 2.1.2. Test Description

Test Setup:

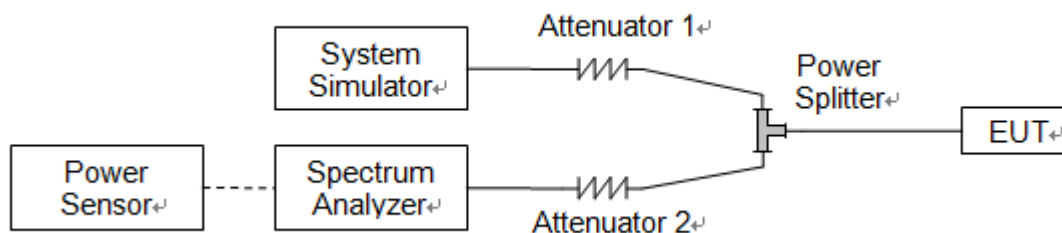

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.





## 2.1.3. Test Results

<b>GSM850</b>	<b>Average Power (dBm)</b>		
<b>TX Channel</b>	<b>128</b>	<b>189</b>	<b>251</b>
<b>Frequency (MHz)</b>	<b>824.2</b>	<b>836.4</b>	<b>848.8</b>
GSM 1 Tx slot	32.90	32.93	32.78
GPRS 1 Tx slot	32.83	32.88	32.83
GPRS 2 Tx slots	31.83	31.94	31.85
GPRS 3 Tx slots	29.79	29.82	29.69
GPRS 4 Tx slots	28.39	28.35	28.42

<b>GSM1900</b>	<b>Average Power (dBm)</b>		
<b>TX Channel</b>	<b>512</b>	<b>661</b>	<b>810</b>
<b>Frequency (MHz)</b>	<b>1850.2</b>	<b>1880</b>	<b>1909.8</b>
GSM 1 Tx slot	29.77	29.79	29.74
GPRS 1 Tx slot	29.67	29.73	29.70
GPRS 2 Tx slots	28.77	28.81	28.77
GPRS 3 Tx slots	26.15	26.16	26.14
GPRS 4 Tx slots	24.90	24.92	24.89

<b>WCDMA Band V</b>	<b>Average Power (dBm)</b>		
<b>TX Channel</b>	<b>4132</b>	<b>4182</b>	<b>4233</b>
<b>Frequency (MHz)</b>	<b>826.4</b>	<b>836.4</b>	<b>846.6</b>
RMC 12.2Kbps	22.66	22.71	22.70
HSDPA Subtest-1	22.30	22.40	22.32
HSDPA Subtest-2	22.23	22.35	22.31
HSDPA Subtest-3	21.80	21.85	21.80
HSDPA Subtest-4	21.77	21.83	21.79
HSUPA Subtest-1	21.76	21.81	21.80
HSUPA Subtest-2	22.28	22.35	22.31
HSUPA Subtest-3	21.29	21.35	21.32
HSUPA Subtest-4	22.28	22.37	22.29
HSUPA Subtest-5	21.27	21.33	21.31
HSPA+ (16QAM) Subtest-1	21.29	21.34	21.35





WCDMA Band IV	Average Power (dBm)		
	1312	1413	1513
<b>TX Channel</b>	<b>1312</b>	<b>1413</b>	<b>1513</b>
<b>Frequency (MHz)</b>	<b>1712.4</b>	<b>1732.6</b>	<b>1752.6</b>
RMC 12.2Kbps	21.89	22.01	21.97
HSDPA Subtest-1	21.71	21.73	21.78
HSDPA Subtest-2	21.73	21.76	21.78
HSDPA Subtest-3	21.20	21.28	21.27
HSDPA Subtest-4	21.19	21.24	21.26
HSUPA Subtest-1	21.23	21.23	21.26
HSUPA Subtest-2	21.69	21.72	21.76
HSUPA Subtest-3	20.73	20.78	20.83
HSUPA Subtest-4	21.69	21.70	21.78
HSUPA Subtest-5	20.70	20.76	20.80
HSPA+ (16QAM) Subtest-1	20.71	20.75	20.78

WCDMA Band II	Average Power (dBm)		
	9262	9400	9538
<b>TX Channel</b>	<b>9262</b>	<b>9400</b>	<b>9538</b>
<b>Frequency (MHz)</b>	<b>1852.4</b>	<b>1880.0</b>	<b>1907.6</b>
RMC 12.2Kbps	22.53	22.56	22.48
HSDPA Subtest-1	21.84	21.92	22.04
HSDPA Subtest-2	21.87	21.89	21.99
HSDPA Subtest-3	21.33	21.41	21.39
HSDPA Subtest-4	21.32	21.39	21.38
HSUPA Subtest-1	21.85	21.41	21.51
HSUPA Subtest-2	21.83	21.91	22.04
HSUPA Subtest-3	20.87	20.92	20.94
HSUPA Subtest-4	21.82	21.94	22.02
HSUPA Subtest-5	20.86	20.90	20.94
HSPA+ (16QAM) Subtest-1	20.81	20.88	20.81



## 2.2. Peak to Average Ratio

### 2.2.1. Requirement

According to FCC 24.232(d) and 27.50(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 2.2.2. Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

### 2.2.3. Test procedure

1. For GSM/EDGE operating mode:
  - a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
  - b. Set EUT in maximum output power, and triggered the bust signal.
  - c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.
2. For UMTS operating mode:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.





## 2.2.4. Test Result




## A. Test Verdict:

GSM1900					
Mode	Channel	Frequency (MHz)	Peak to Average ratio (dB)	Limit (dB)	Verdict
GSM	512	1850.2	0.55	13	PASS
	661	1880.0	0.56		PASS
	810	1909.8	0.53		PASS
GPRS	512	1850.2	0.56		PASS
	661	1880.0	0.58		PASS
	810	1909.8	0.55		PASS

WCDMA Band IV					
Mode	Channel	Frequency (MHz)	Peak to Average ratio (dB)	Limit (dB)	Verdict
WCDMA	1312	1712.4	2.95	13	PASS
	1413	1732.6	3.07		PASS
	1513	1752.6	2.84		PASS

WCDMA Band II					
Mode	Channel	Frequency (MHz)	Peak to Average ratio (dB)	Limit (dB)	Verdict
WCDMA	9262	1852.4	2.89	13	PASS
	9400	1880.0	2.38		PASS
	9538	1907.6	2.44		PASS



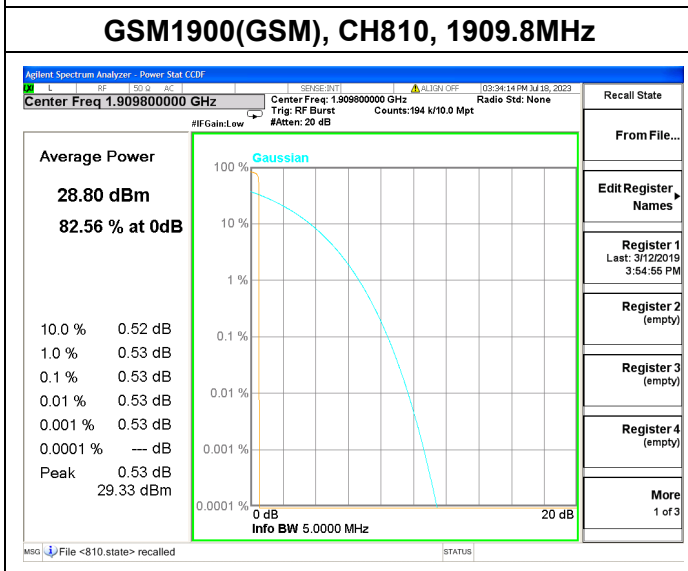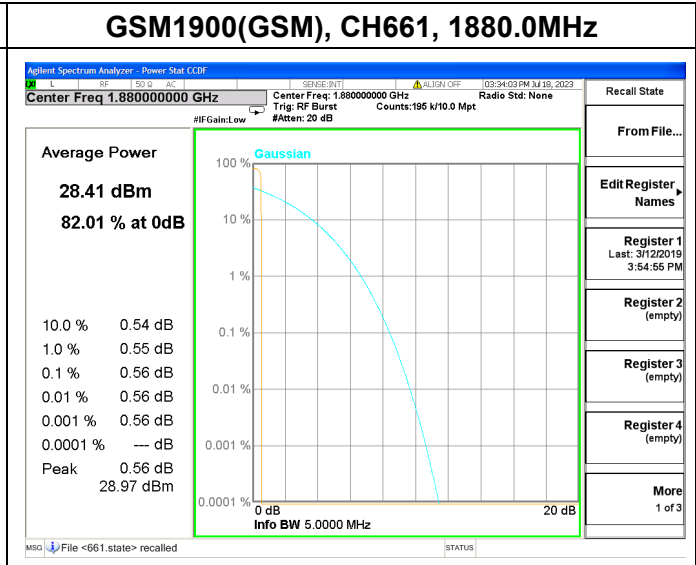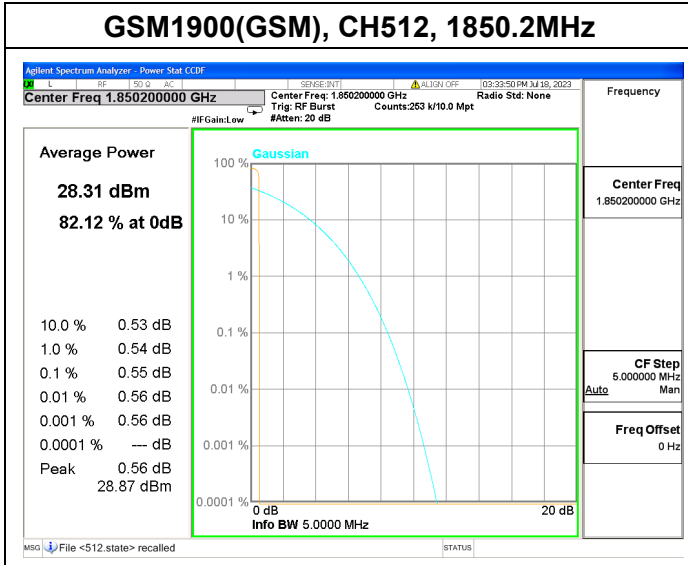


N/A







### GSM1900(GSM), CH512, 1850.2MHz

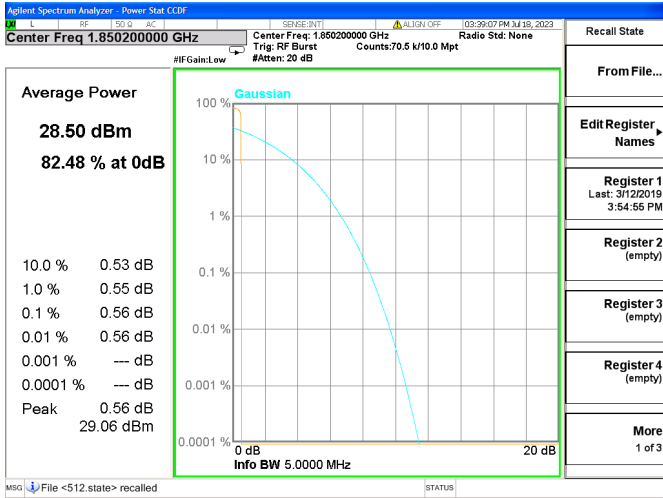

### GSM1900(GSM), CH661, 1880.0MHz

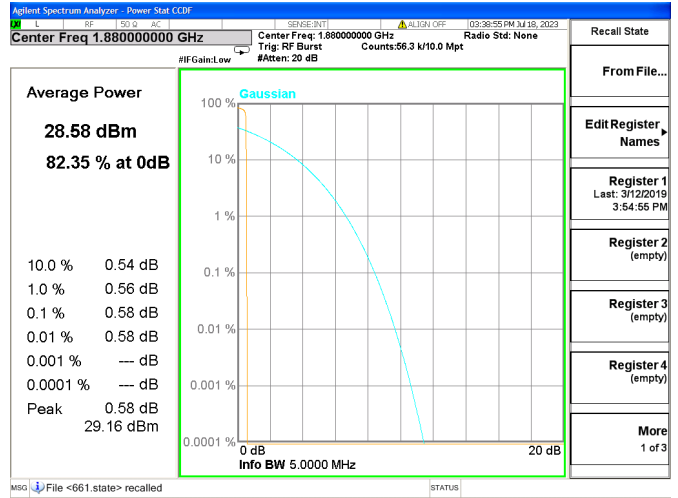

### GSM1900(GSM), CH810, 1909.8MHz

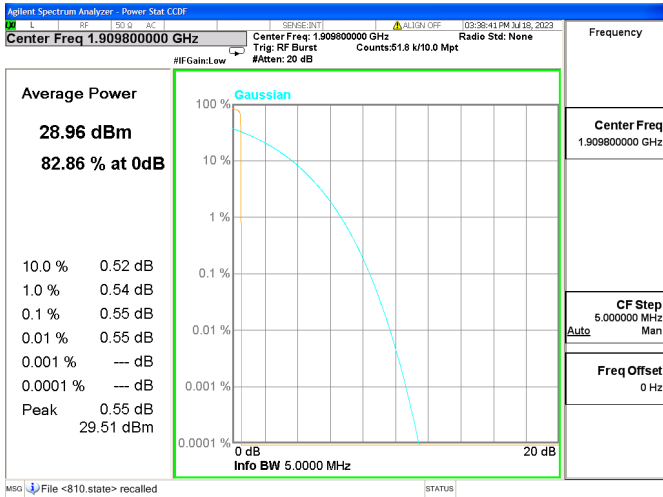


N/A







### WCDMA Band IV, CH1312, 1712.4MHz

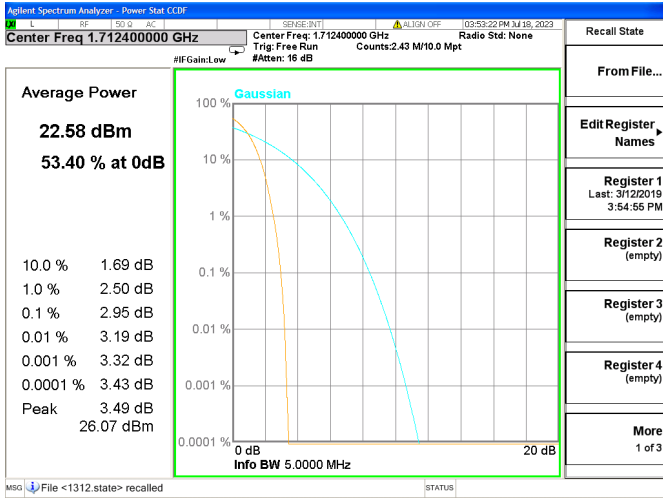

### WCDMA Band IV, CH1413, 1732.6MHz

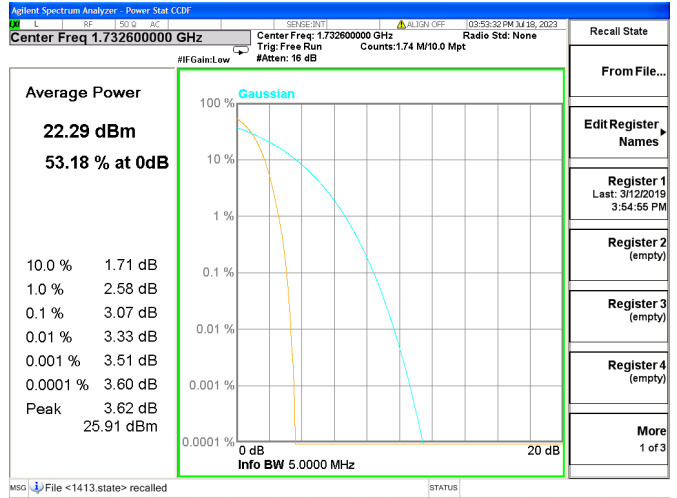




### WCDMA Band IV, CH1513, 1752.6MHz

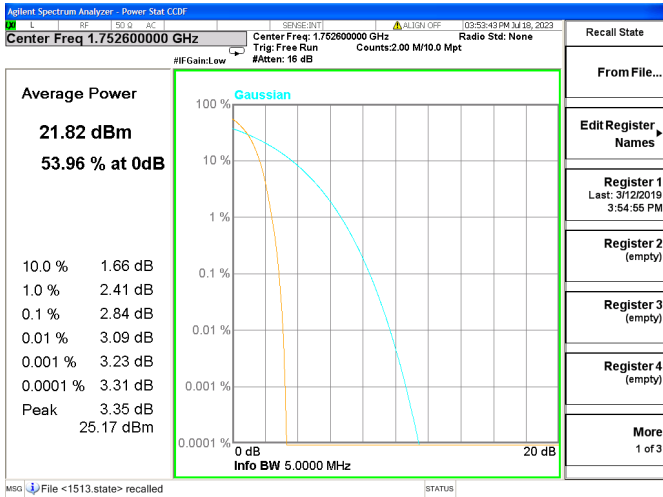

N/A





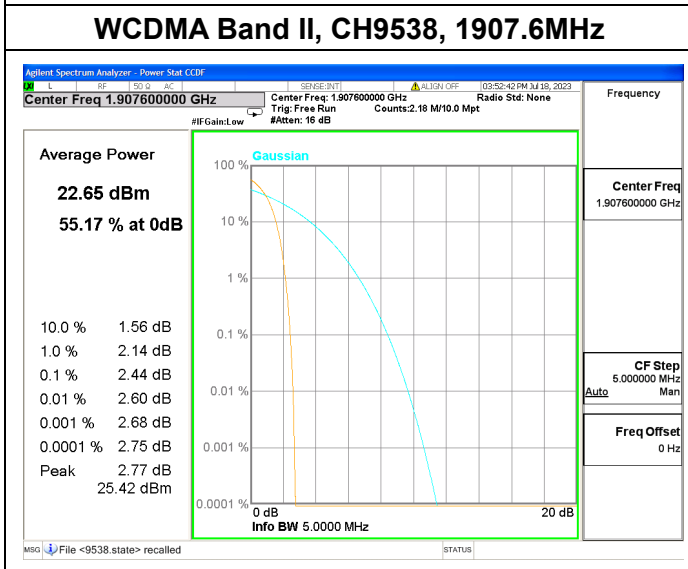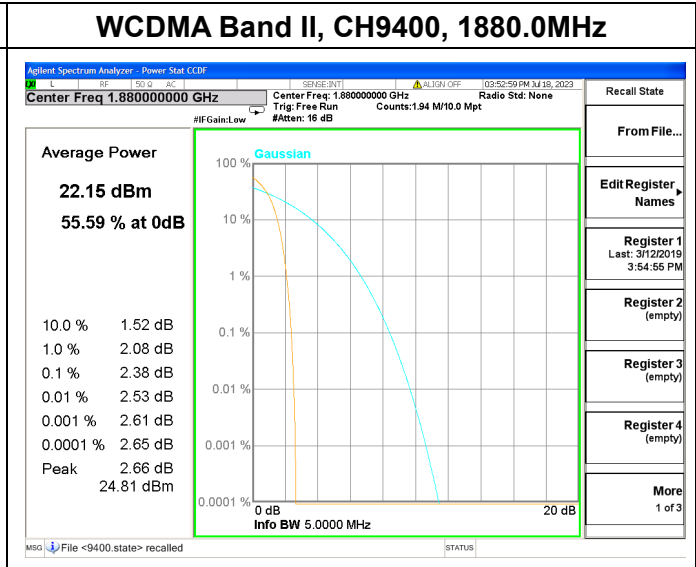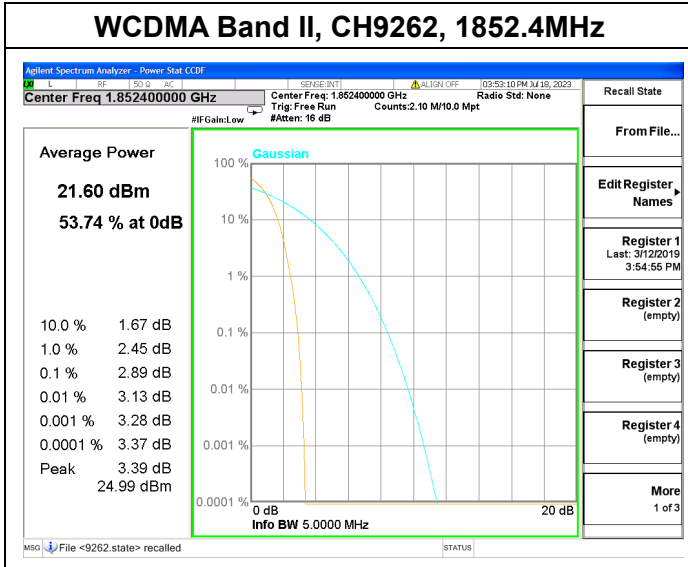

N/A




## 2.3. Occupied Bandwidth

### 2.3.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

### 2.3.2. Test Description

Test Setup:

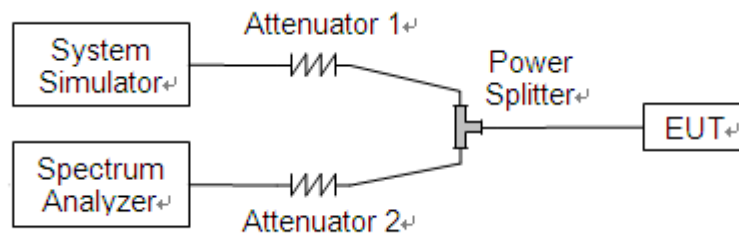

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



**2.3.3.Test Result**

GSM850				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)
GSM	128	824.2	244.42	320.7
	189	836.4	246.24	310.4
	251	848.8	246.94	318.3
GPRS	128	824.2	246.42	308.9
	189	836.4	242.19	317.6
	251	848.8	236.16	311.9

GSM1900				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)
GSM	512	1850.2	247.01	320.3
	661	1880.0	246.26	317.9
	810	1909.8	246.89	314.3
GPRS	512	1850.2	239.41	308.5
	661	1880.0	236.54	306.5
	810	1909.8	240.65	314.4




WCDMA Band V				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	4132	826.4	4.18	4.72
	4182	836.4	4.21	4.73
	4233	846.6	4.19	4.73

WCDMA Band IV				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	1312	1712.4	4.18	4.71
	1413	1732.6	4.16	4.72
	1513	1752.6	4.19	4.75








WCDMA Band II				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	9262	1852.4	4.18	4.71
	9400	1880.0	4.22	4.76
	9538	1907.6	4.19	4.76

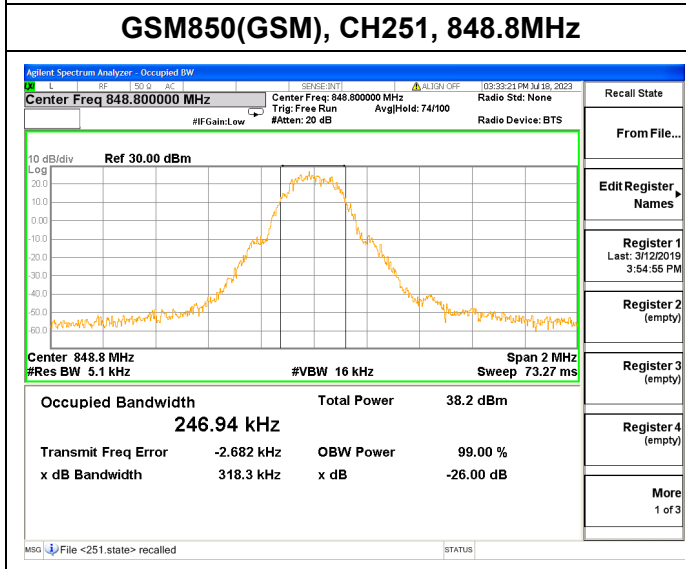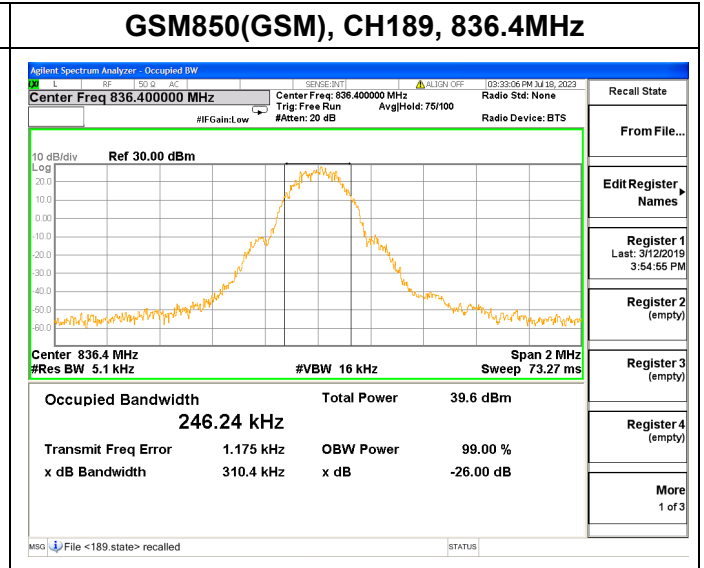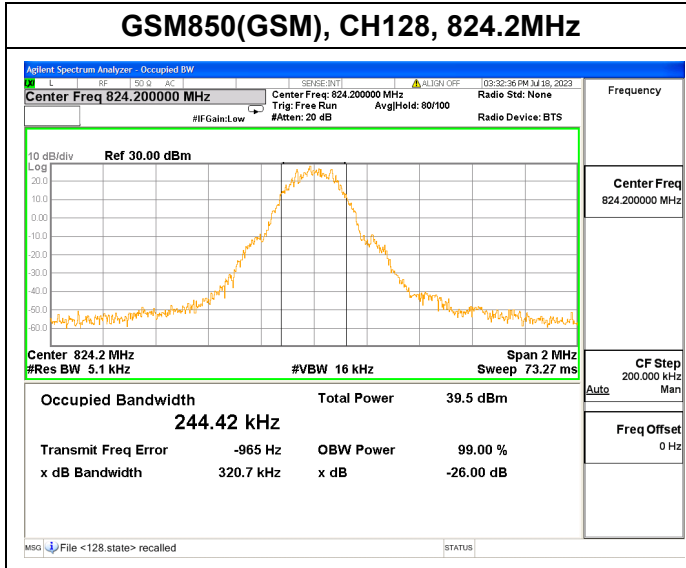




N/A



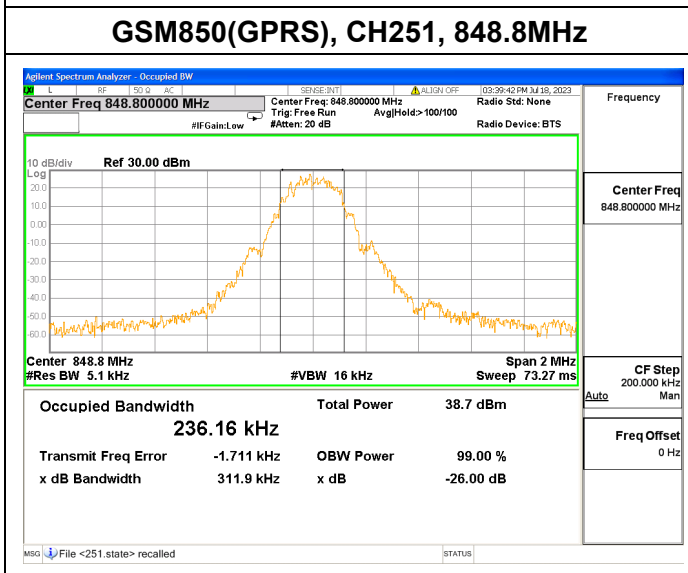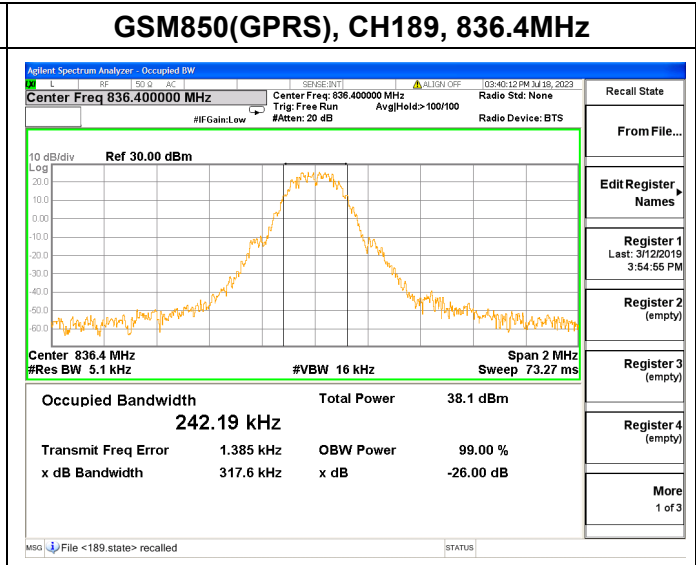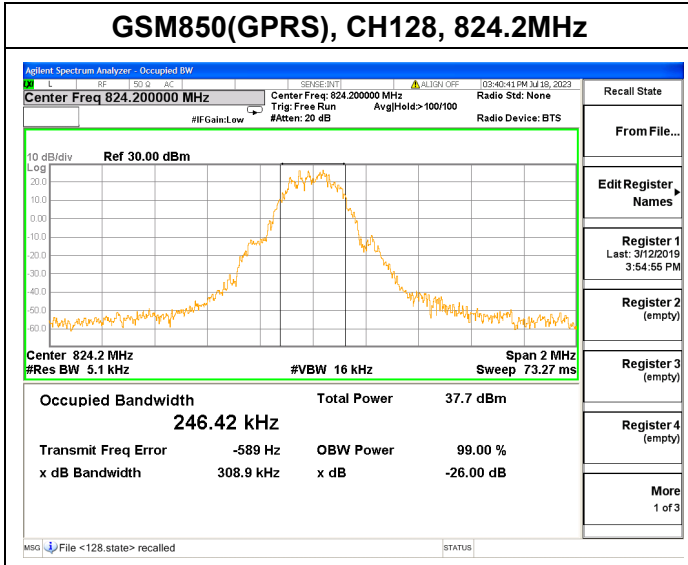




N/A



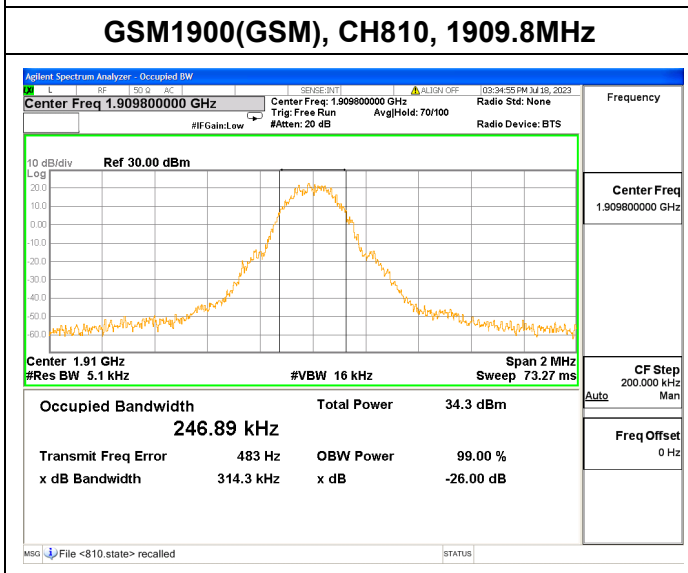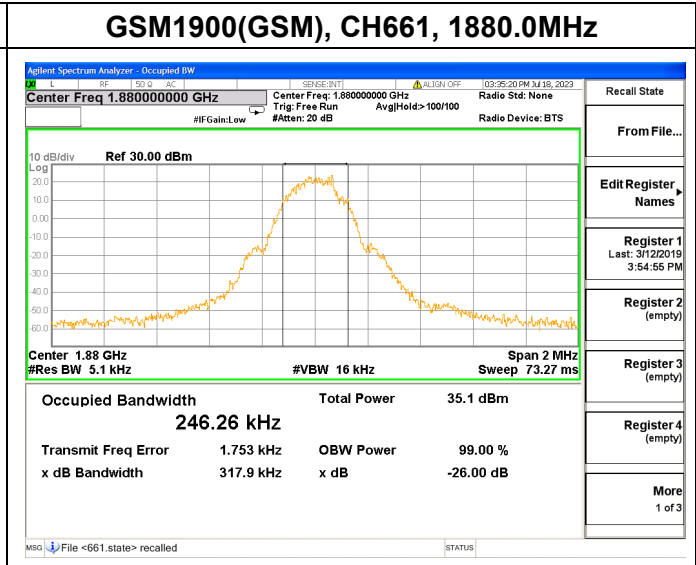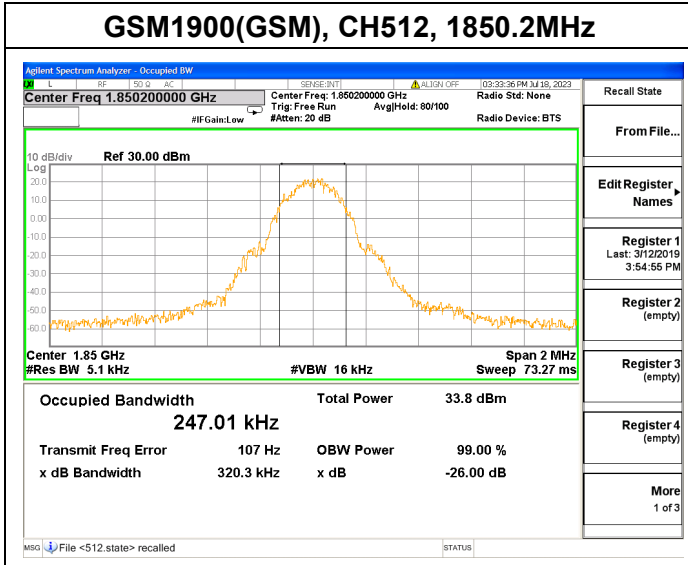




N/A



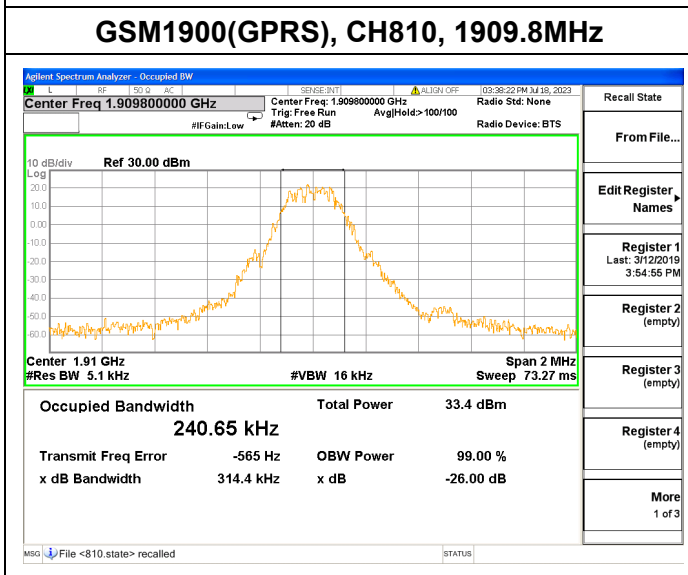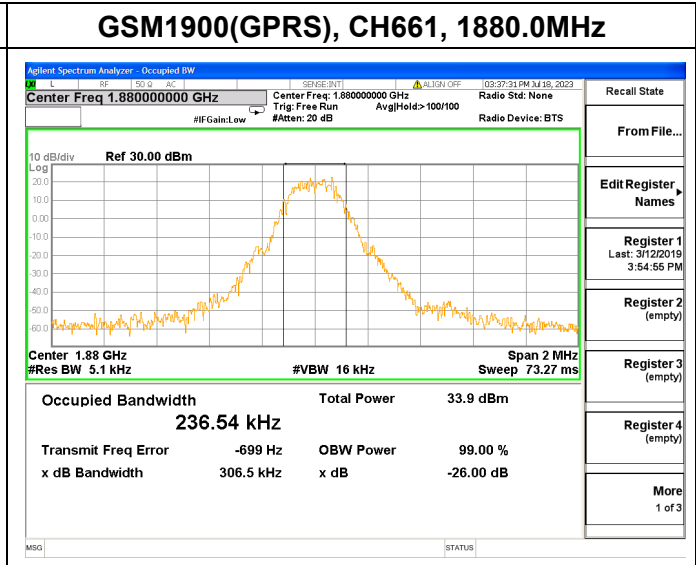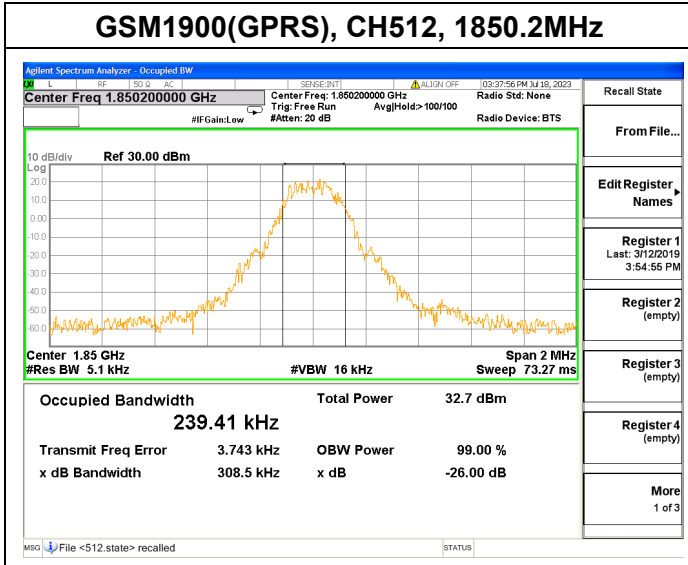

N/A



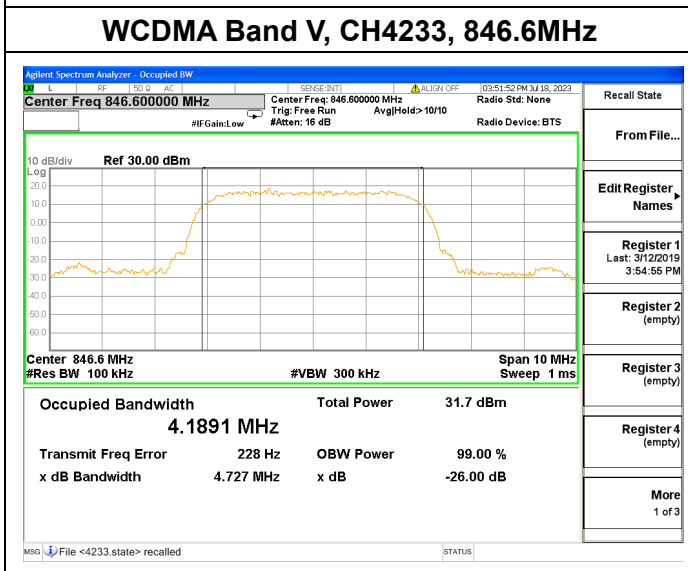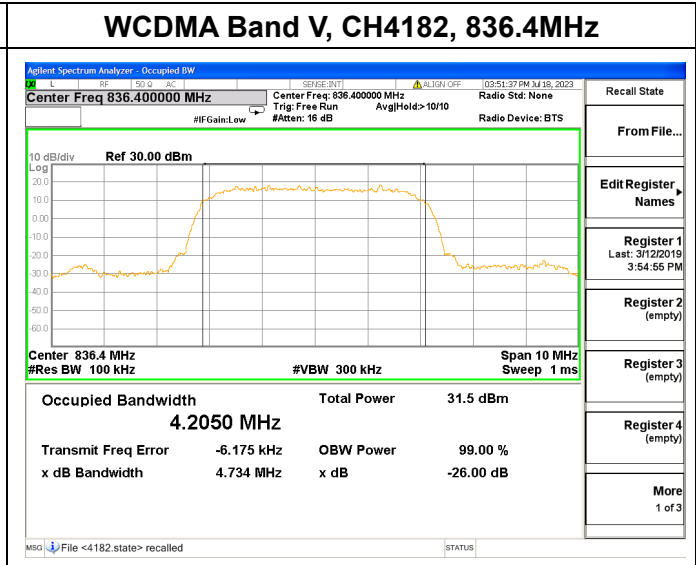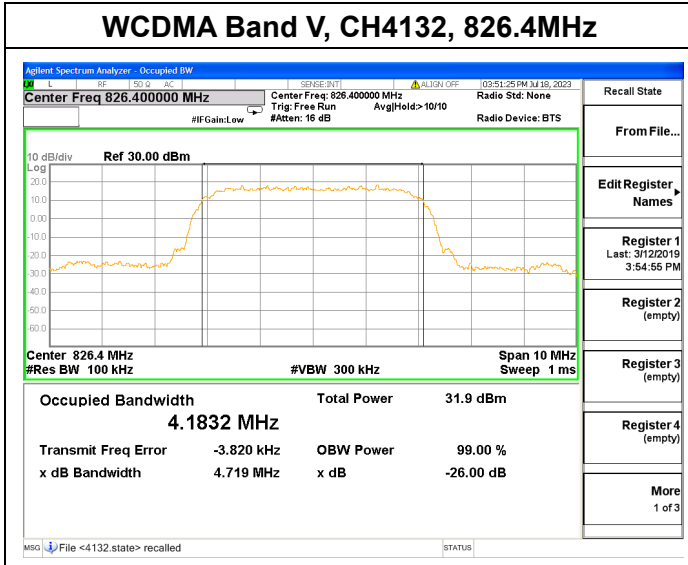


N/A









**WCDMA Band IV, CH1312, 1712.4MHz**

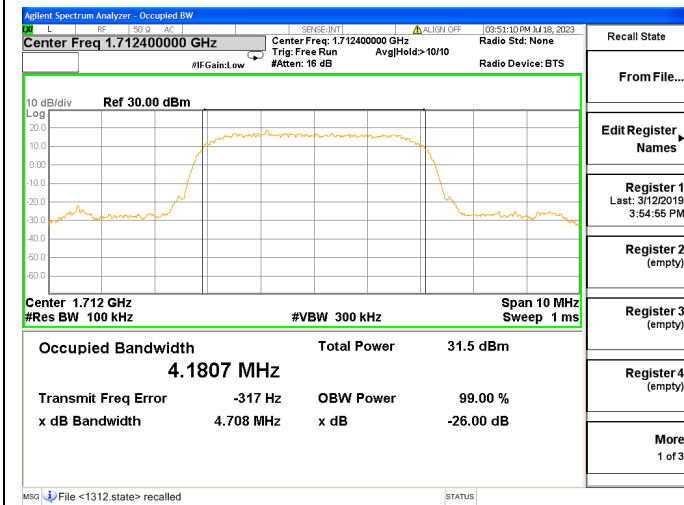

**WCDMA Band IV, CH1413, 1732.6MHz**

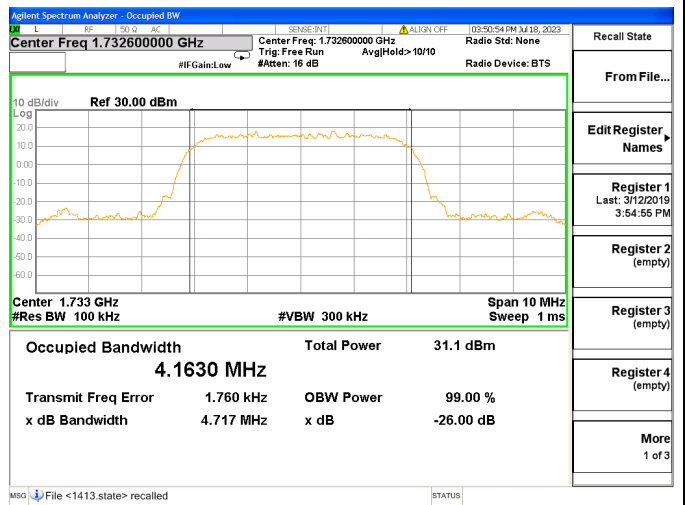

**WCDMA Band IV, CH1513, 1752.6MHz**

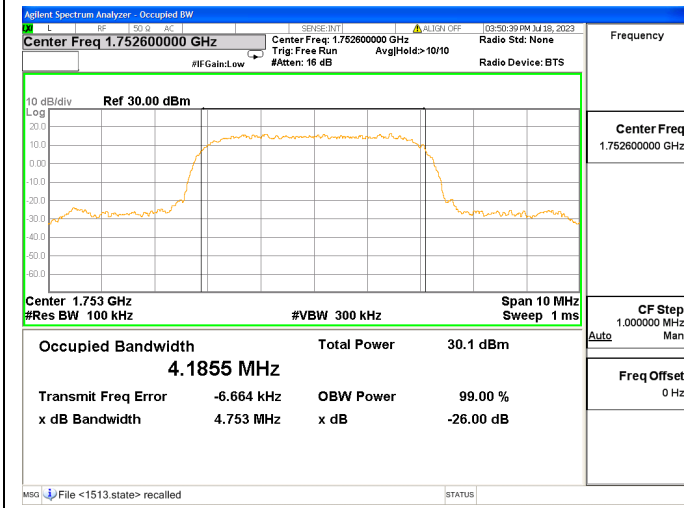


N/A







**WCDMA Band II, CH9262, 1852.4MHz**

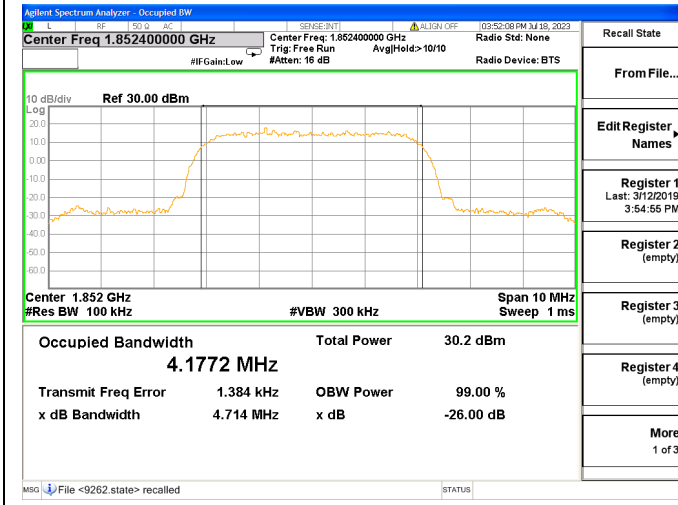

**WCDMA Band II, CH9400, 1880.0MHz**

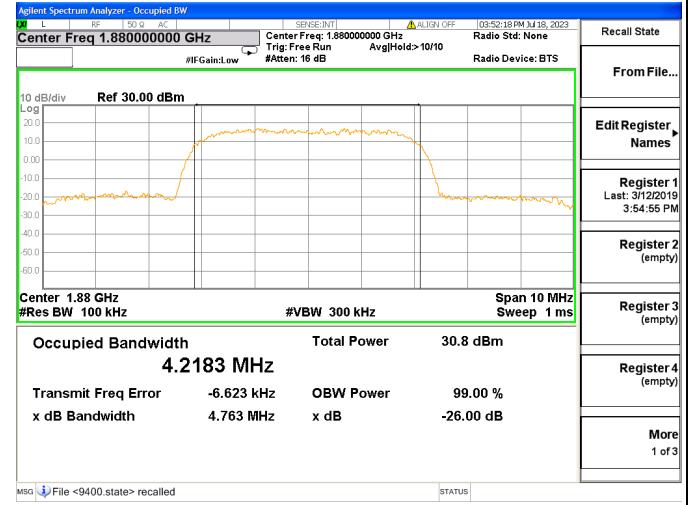

**WCDMA Band II, CH9538, 1907.6MHz**

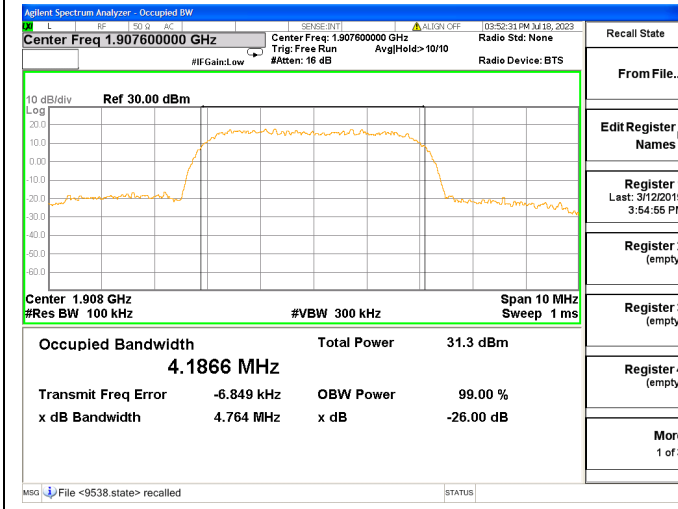

N/A



## 2.4. Frequency Stability

### 2.4.1. Requirement


According to FCC section 22.355, 24.235 and 27.54 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of not more than  $10^{\circ}\text{C}$ .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

**Note:** The operating temperature of EUT is from  $-10^{\circ}\text{C}$  to  $55^{\circ}\text{C}$ , which are specified by the applicant.

### 2.4.2. Test Description

Test Setup:

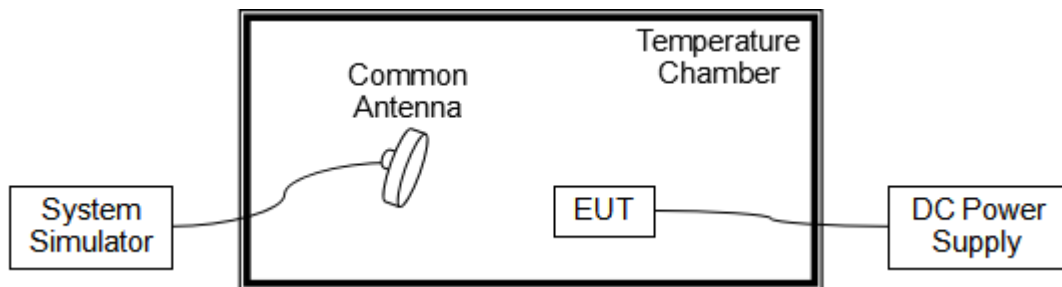

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.





**2.4.3. Test Result**

The nominal, highest and lowest extreme voltages are separately 3.70V, 4.20V and 3.40V, which are specified by the applicant; the normal temperature here used is 20°C.

GSM 850MHz, Channel 189, Frequency 836.4MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.70	+20(Ref)	-2	-0.002	PASS
Normal		-10	18	0.022	
Normal		0	16	0.019	
Normal		+10	20	<b>0.024</b>	
Normal		+20	19	0.023	
Normal		+30	7	0.008	
Normal		+40	15	0.018	
Normal		+50	-5	-0.006	
Normal		+55	13	0.016	
High	4.20	+20	-22	-0.026	
BATT.ENDPOINT	3.40	+20	-4	-0.005	

GSM 1900MHz, Channel 661, Frequency 1880.0MHz					
Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.70	+20(Ref)	-10	-0.005	PASS
Normal		-10	20	<b>0.011</b>	
Normal		0	17	0.009	
Normal		+10	18	0.010	
Normal		+20	-4	-0.002	
Normal		+30	17	0.009	
Normal		+40	1	0.001	
Normal		+50	17	0.009	
Normal		+55	18	0.010	
High	4.20	+20	11	0.006	
BATT.ENDPOINT	3.40	+20	19	0.010	





GPRS 850MHz, Channel 189, Frequency 836.4MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.70	+20(Ref)	19	0.023	PASS
Normal		-10	11	0.013	
Normal		0	15	0.018	
Normal		+10	13	0.016	
Normal		+20	14	0.017	
Normal		+30	18	0.022	
Normal		+40	14	0.017	
Normal		+50	20	<b>0.024</b>	
Normal		+55	14	0.017	
High	4.20	+20	-8	-0.010	
BATT.ENDPOINT	3.40	+20	14	0.017	

GPRS 1900MHz, Channel 661, Frequency 1880.0MHz					
Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.70	+20(Ref)	-9	-0.005	PASS
Normal		-10	14	0.007	
Normal		0	13	0.007	
Normal		+10	17	0.009	
Normal		+20	20	<b>0.011</b>	
Normal		+30	7	0.004	
Normal		+40	16	0.009	
Normal		+50	17	0.009	
Normal		+55	-5	-0.003	
High	4.20	+20	15	0.008	
BATT.ENDPOINT	3.40	+20	18	0.010	





WCDMA Band V, Channel 4182, Frequency 836.4MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.70	+20(Ref)	13	0.016	PASS
Normal		-10	14	0.017	
Normal		0	-7	-0.008	
Normal		+10	19	0.023	
Normal		+20	19	0.023	
Normal		+30	20	<b>0.024</b>	
Normal		+40	14	0.017	
Normal		+50	16	0.019	
Normal		+55	9	0.011	
High	4.20	+20	16	0.019	
BATT.ENDPOINT	3.40	+20	15	0.018	

WCDMA Band II, Channel 9400, Frequency 1880.0MHz					
Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.70	+20(Ref)	17	0.009	PASS
Normal		-10	20	<b>0.011</b>	
Normal		0	11	0.006	
Normal		+10	18	0.010	
Normal		+20	13	0.007	
Normal		+30	-6	-0.003	
Normal		+40	13	0.007	
Normal		+50	-9	-0.005	
Normal		+55	19	0.010	
High	4.20	+20	7	0.004	
BATT.ENDPOINT	3.40	+20	15	0.008	





WCDMA Band IV, Channel 1413, Frequency 1732.6MHz					
Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.70	+20(Ref)	17	0.010	PASS
Normal		-10	7	0.004	
Normal		0	16	0.009	
Normal		+10	-3	-0.002	
Normal		+20	10	0.006	
Normal		+30	16	0.009	
Normal		+40	-16	-0.009	
Normal		+50	3	0.002	
Normal		+55	15	0.009	
High		4.20	+20	19	
BATT.ENDPOINT	3.40	+20	13	0.008	




## 2.5. Conducted Out of Band Emissions

### 2.5.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10<sup>th</sup> harmonic of the fundamental frequency.

### 2.5.2. Test Description

Test Setup:

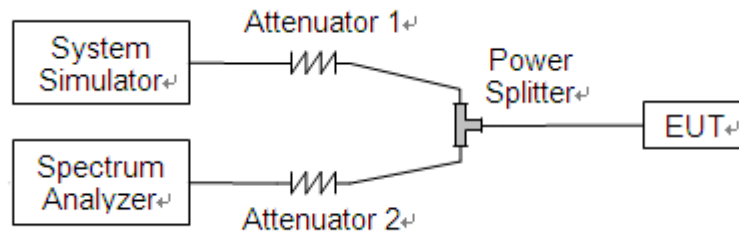


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.










2.5.3.Test Result

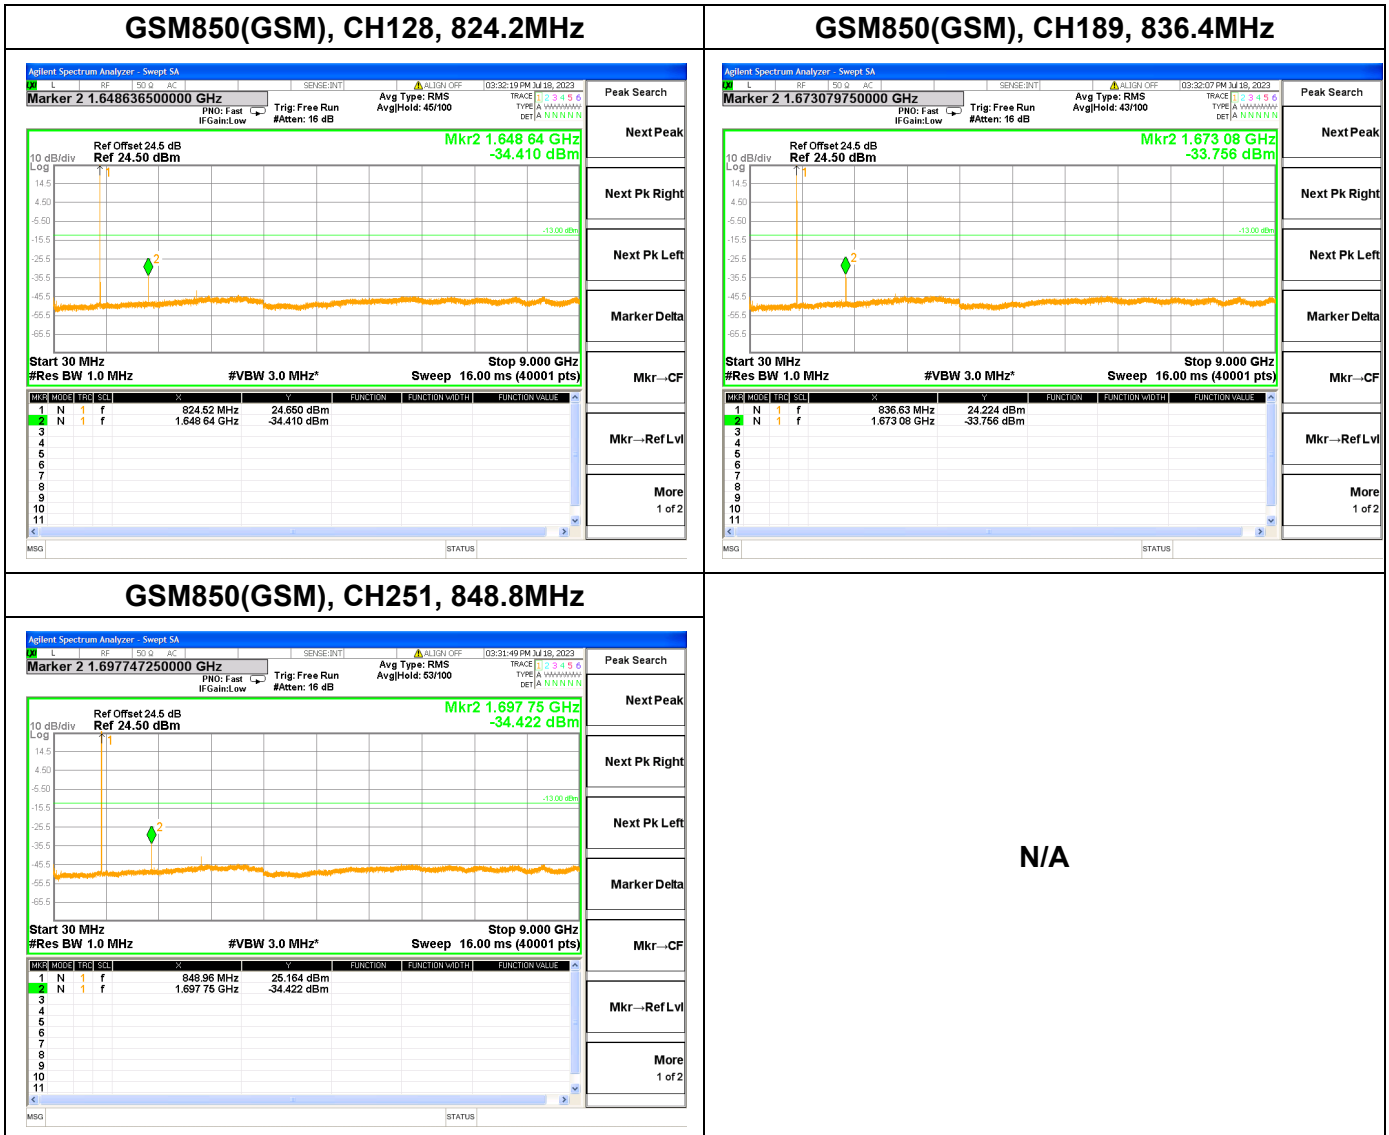

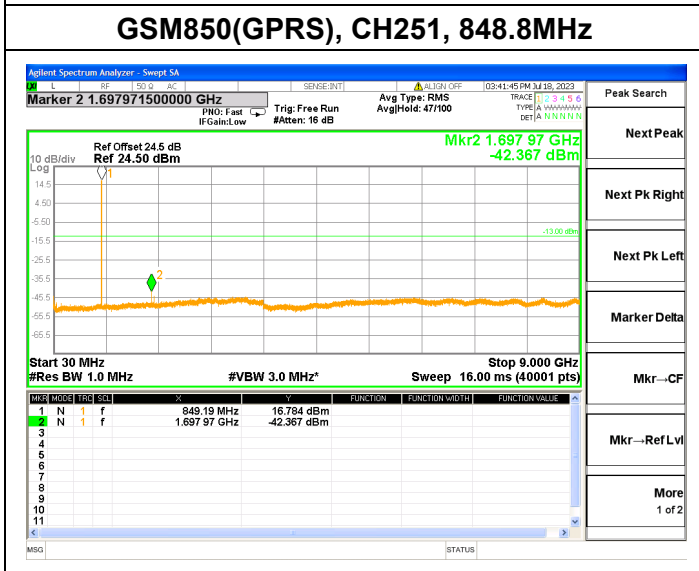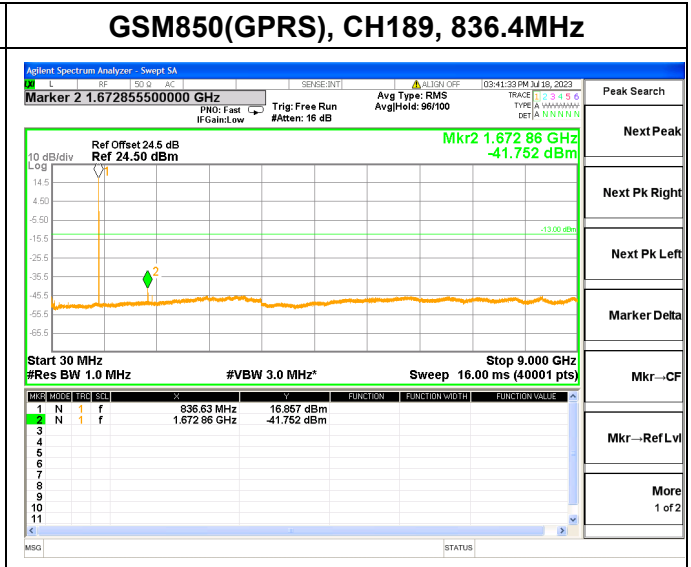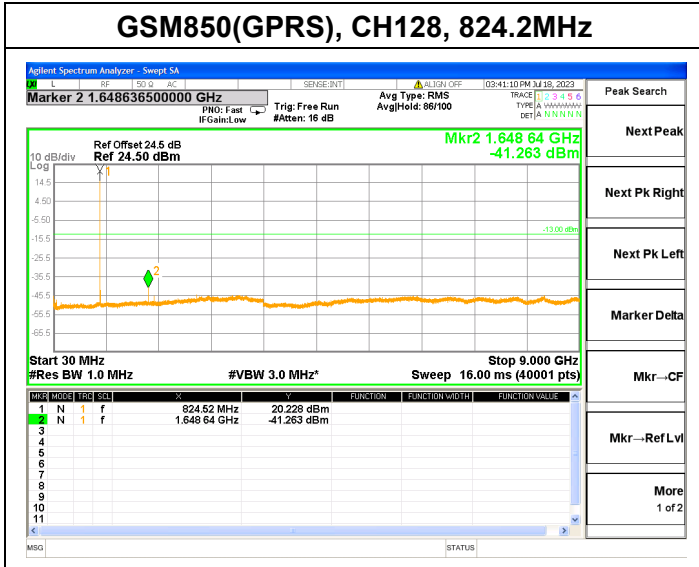


N/A







**GSM1900(GSM), CH512, 1850.2MHZ**

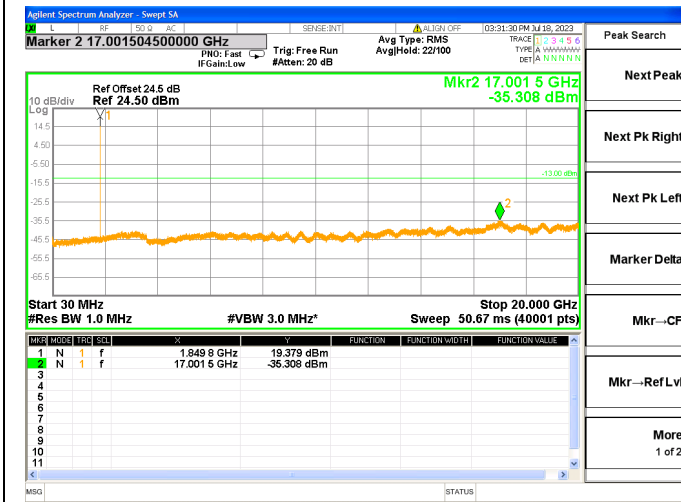

**GSM1900(GSM), CH661, 1880.0MHZ**

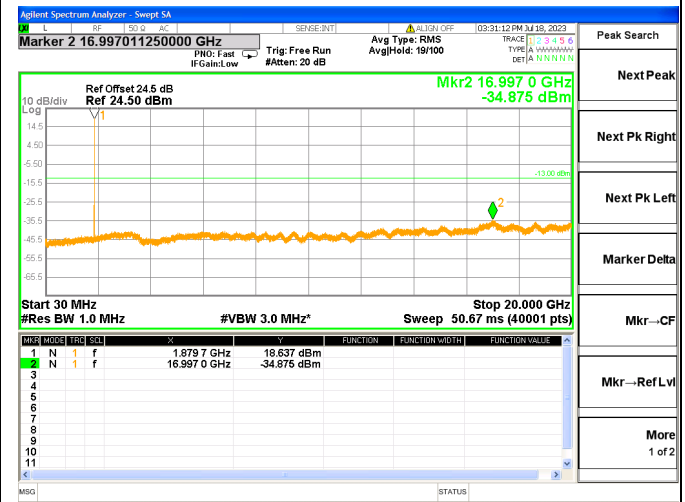

**GSM1900(GSM), CH810, 1909.8MHZ**

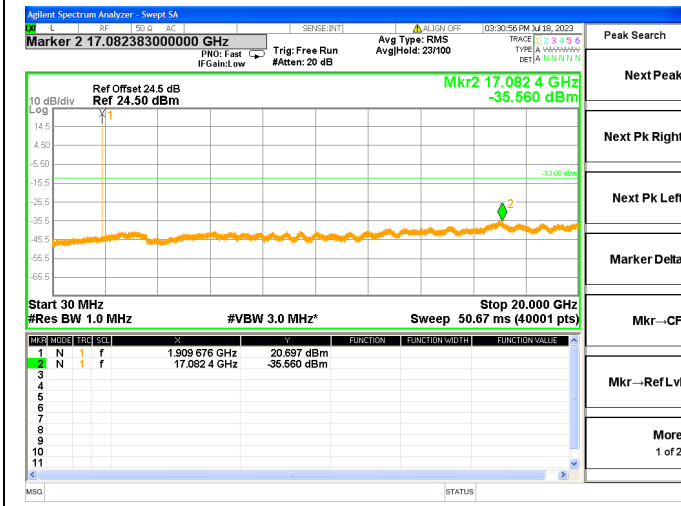


N/A







**GSM1900(GPRS), CH512, 1850.2MHz**

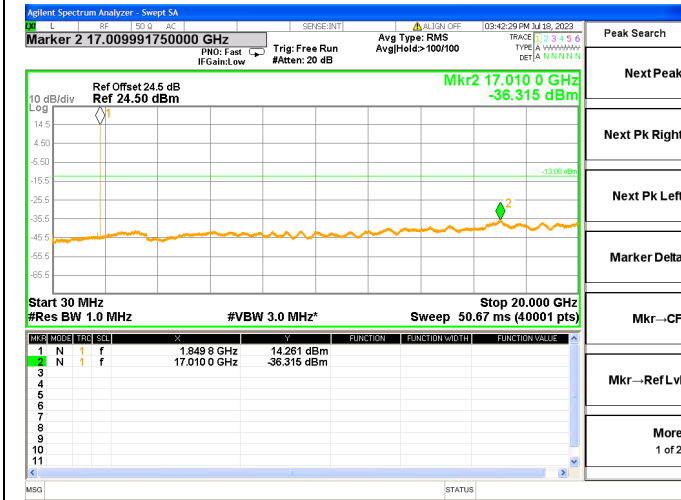

**GSM1900(GPRS), CH661, 1880.0MHz**

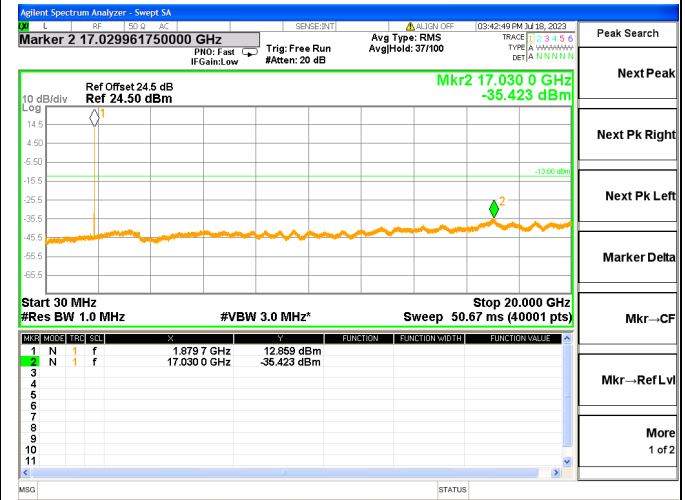

**GSM1900(GPRS), CH810, 1909.8MHz**

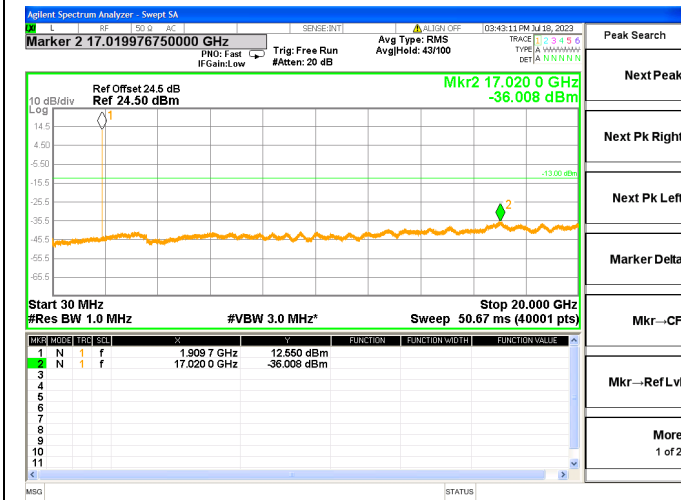


N/A







**WCDMA Band V, CH4132, 826.4MHz**

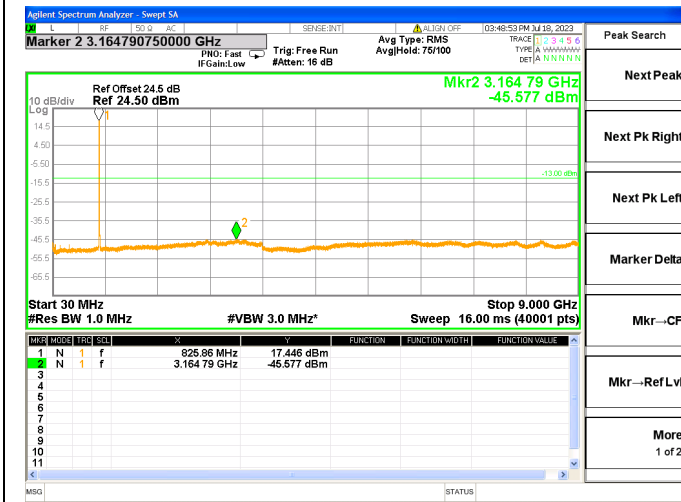

**WCDMA Band V, CH4182, 836.4MHz**



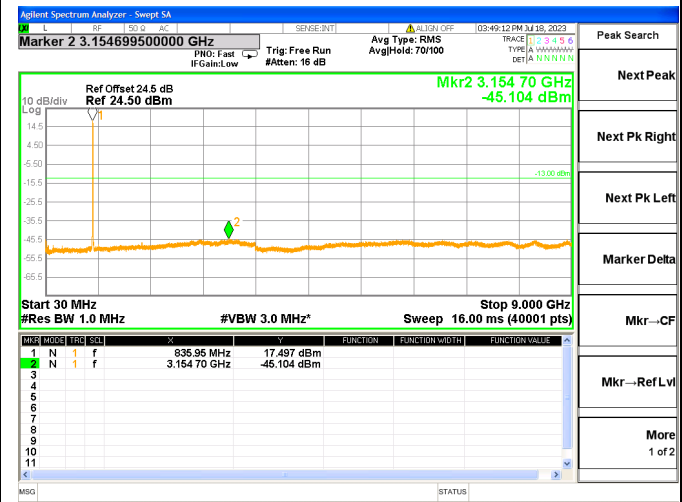


**WCDMA Band V, CH4233, 846.6MHz**

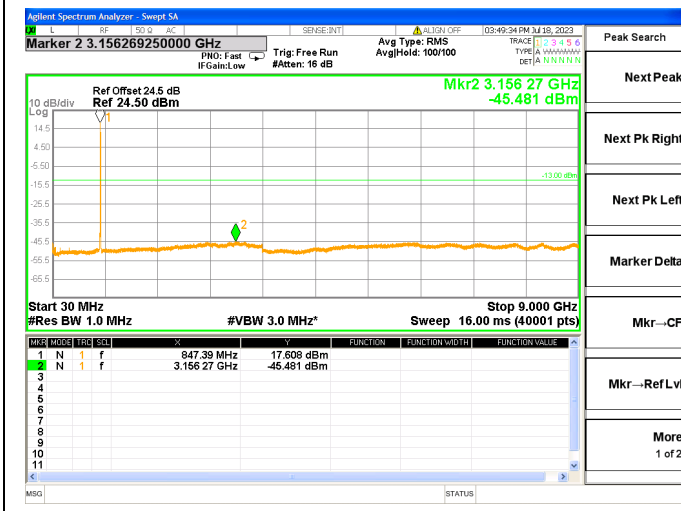

N/A



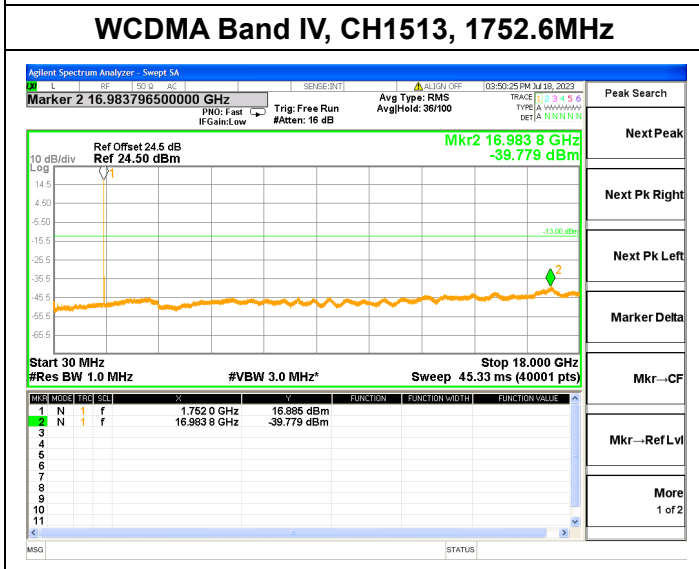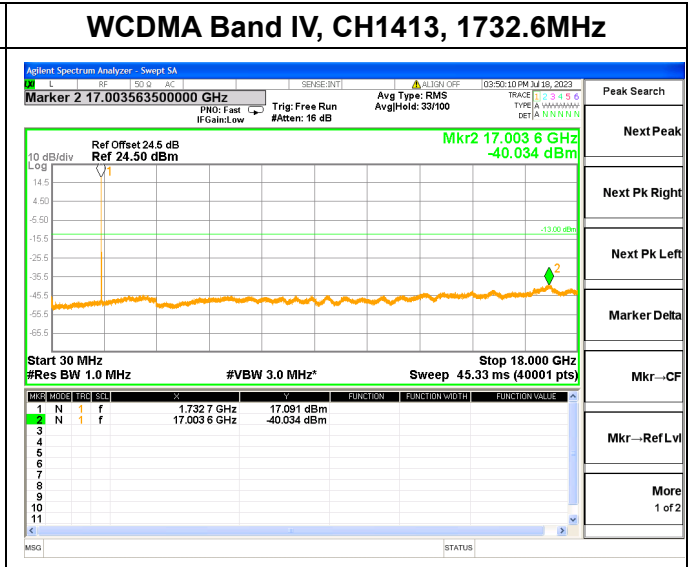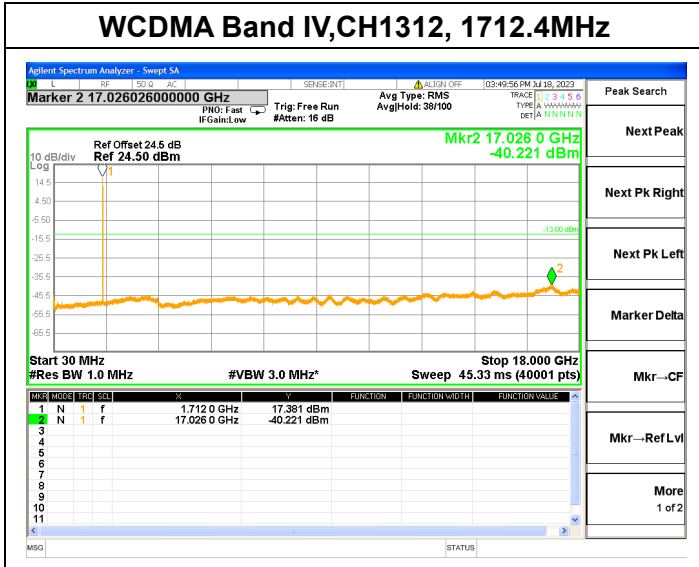


N/A







**WCDMA Band II, CH9262, 1852.4MHz**

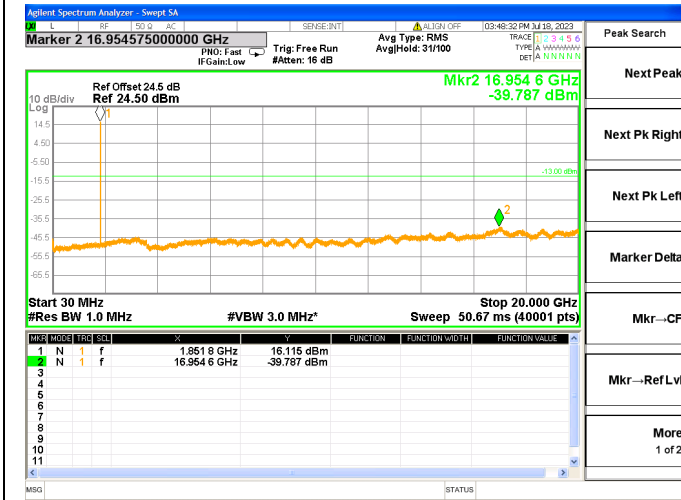

**WCDMA Band II, CH9400, 1880.0MHz**

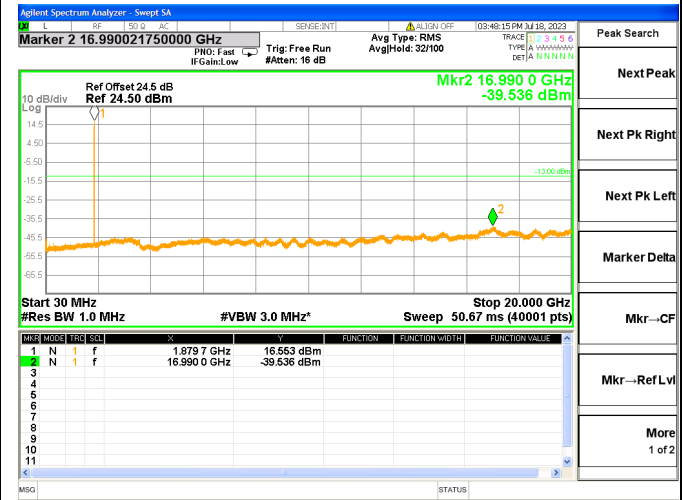

**WCDMA Band II, CH9538, 1907.6MHz**

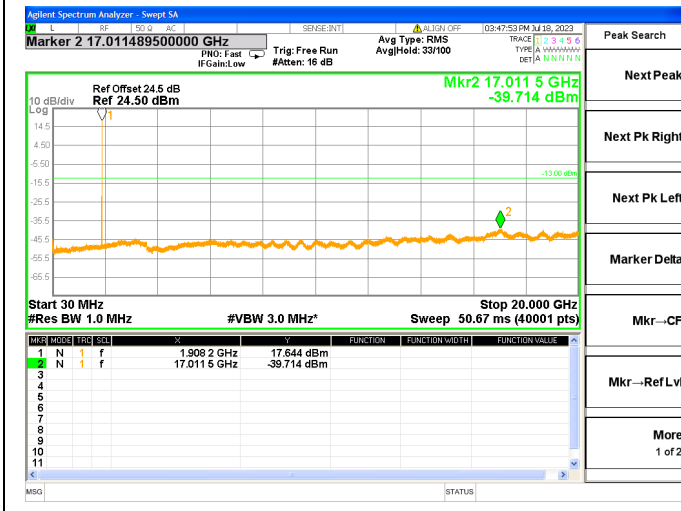

N/A




## 2.6. Band Edge

### 2.6.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB.

### 2.6.2. Test Description

Test Setup:

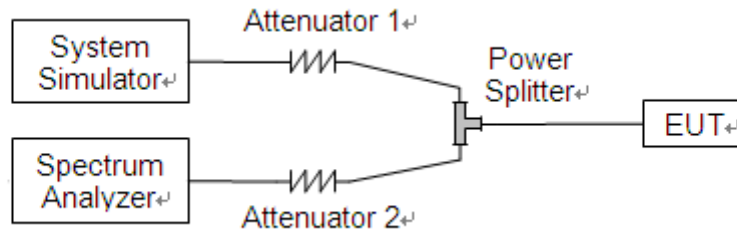

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.












2.6.3. Test Result


The lowest and highest channels are tested to verify the band edge emissions.

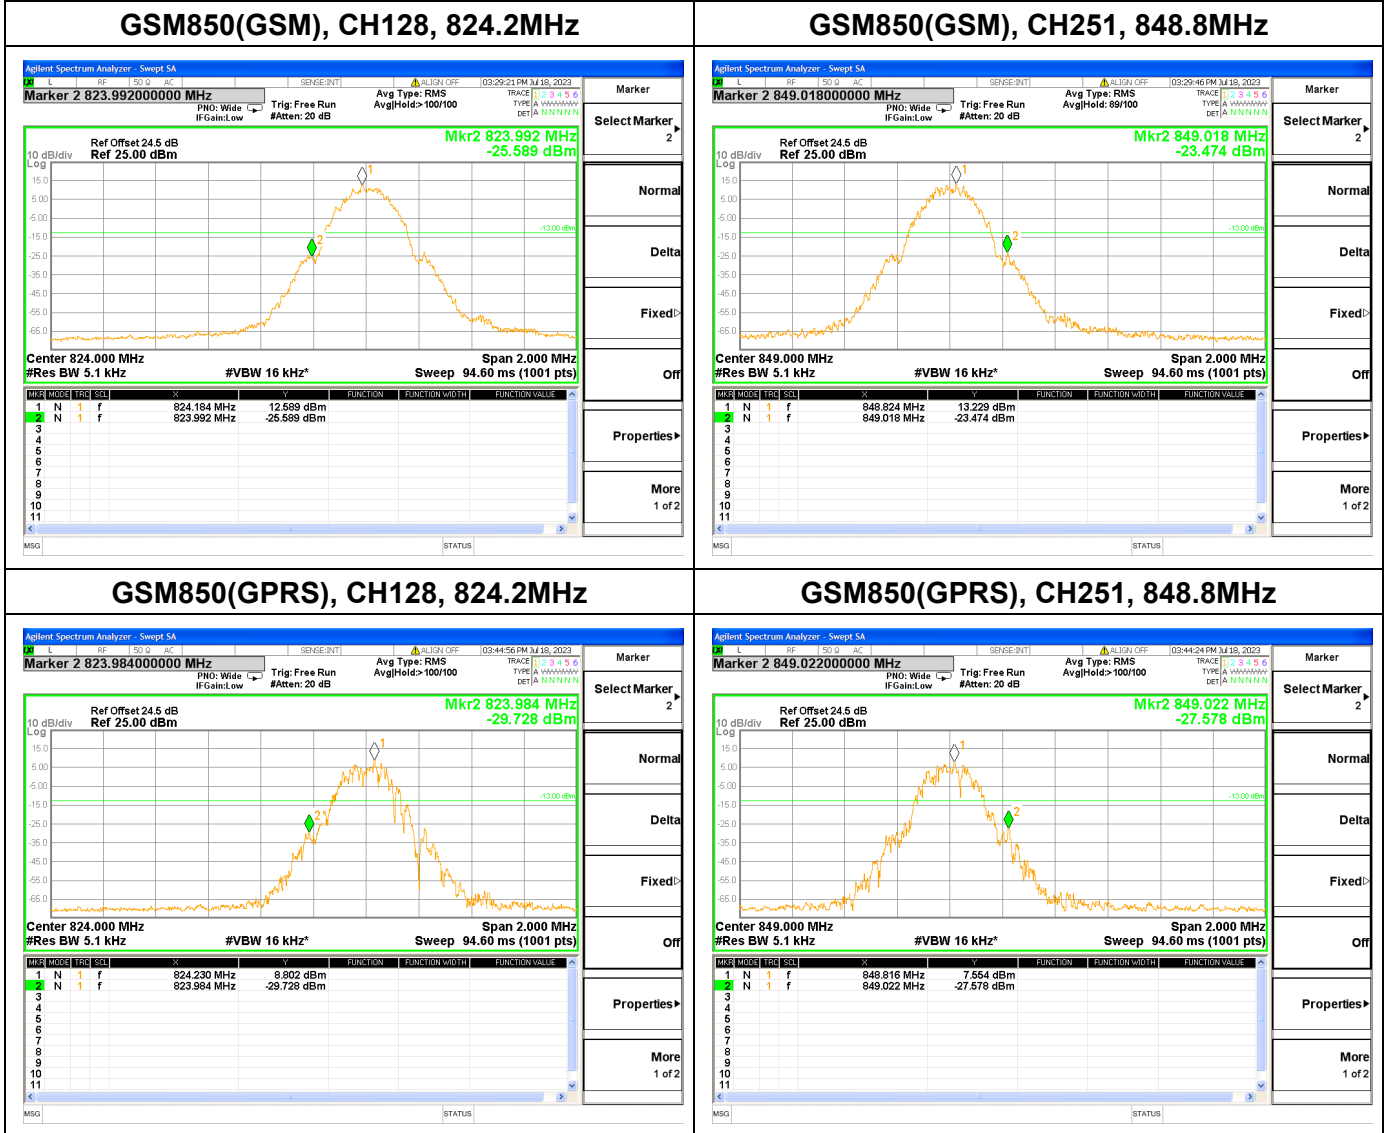

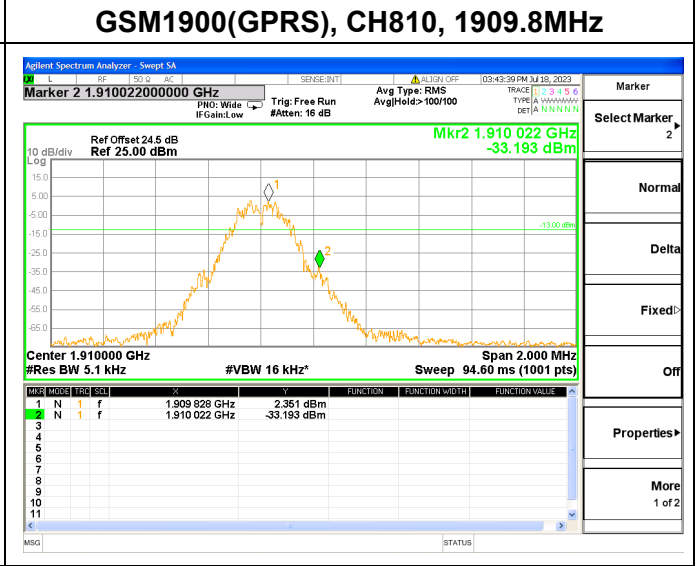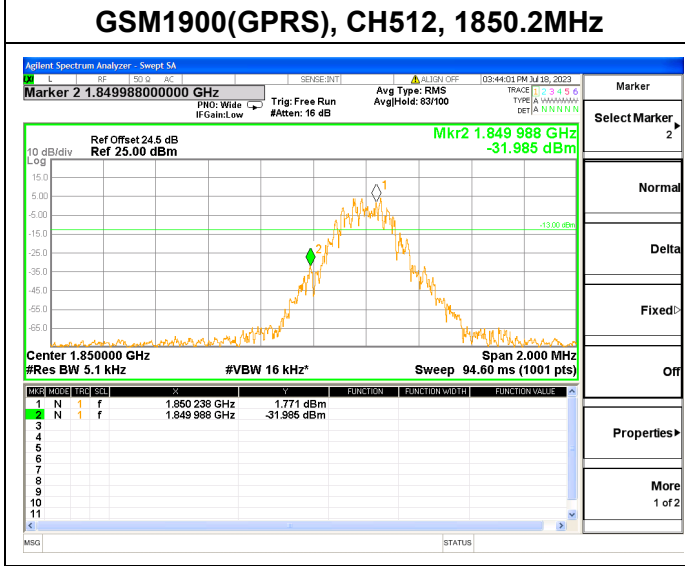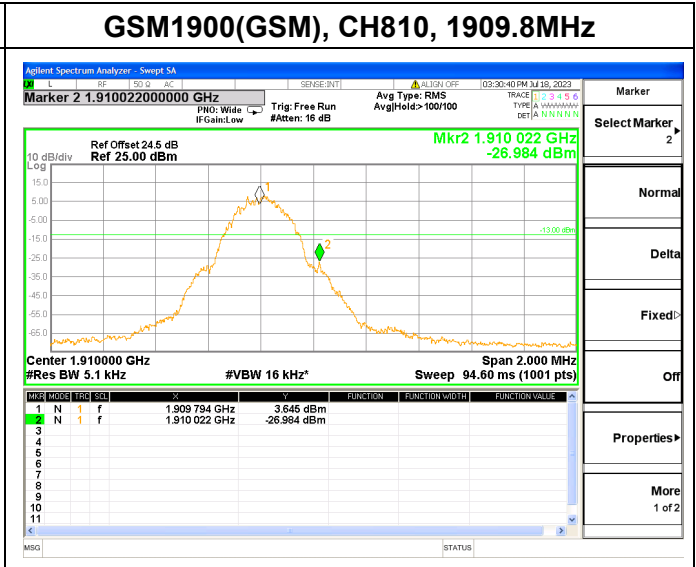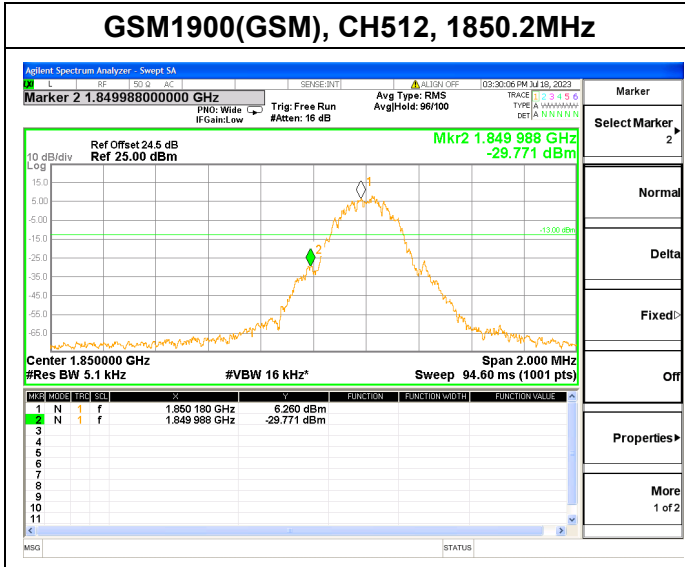





### WCDMA Band V, CH4132, 826.4MHz

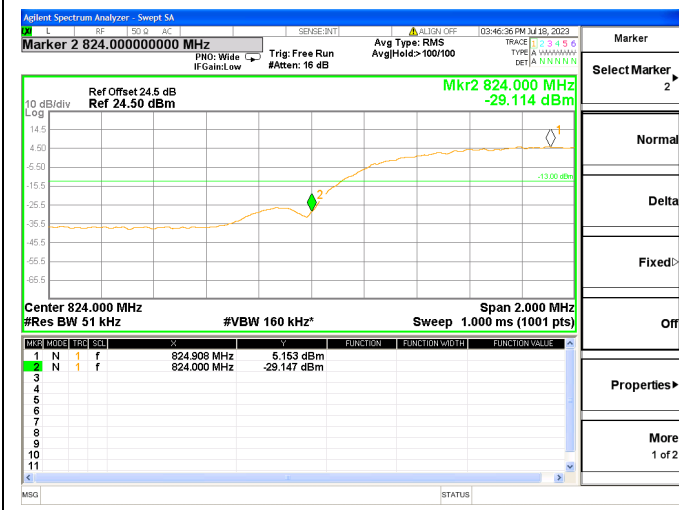


### WCDMA Band V, CH4233, 846.6MHz

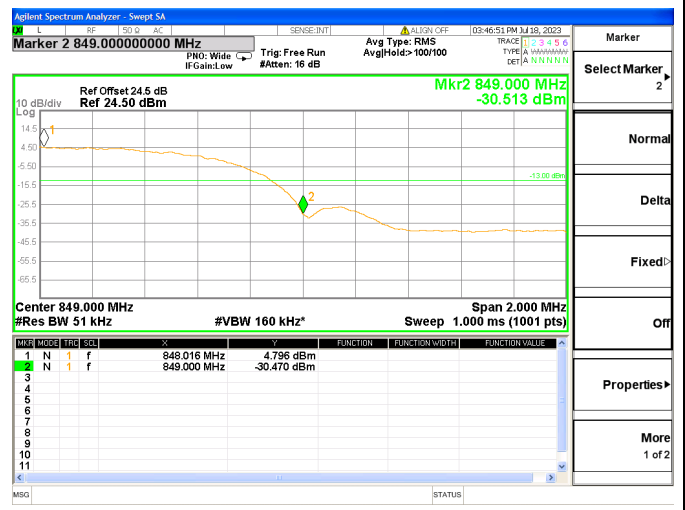


### WCDMA Band IV, CH1312, 1712.4MHz

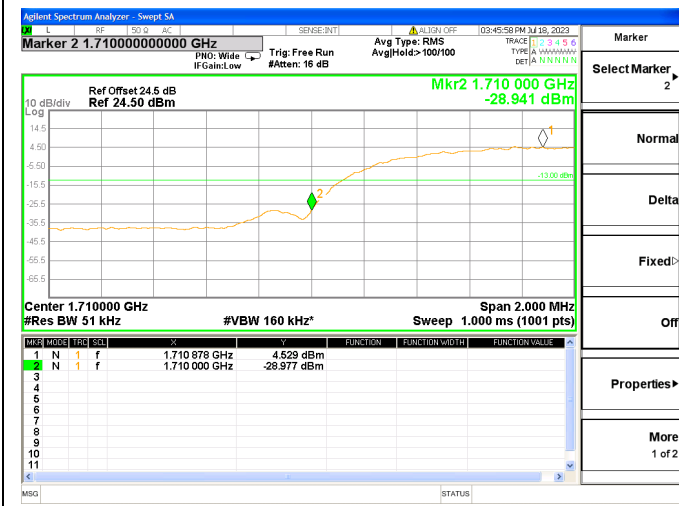


### WCDMA Band IV, CH1513, 1752.6MHz

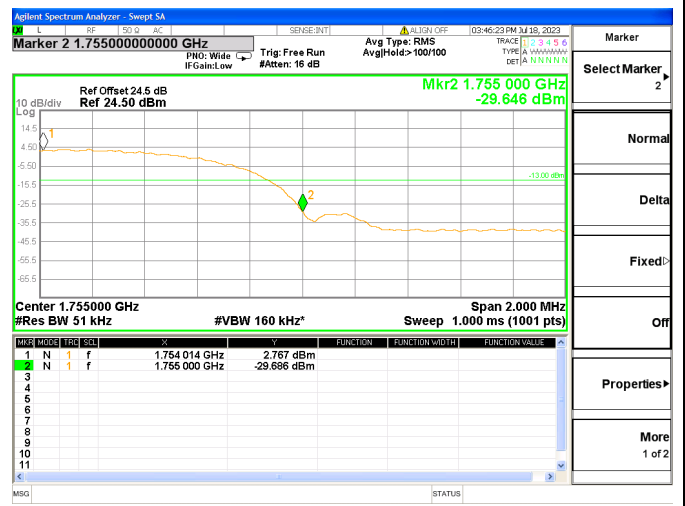

### WCDMA Band II, CH9262, 1852.4MHz

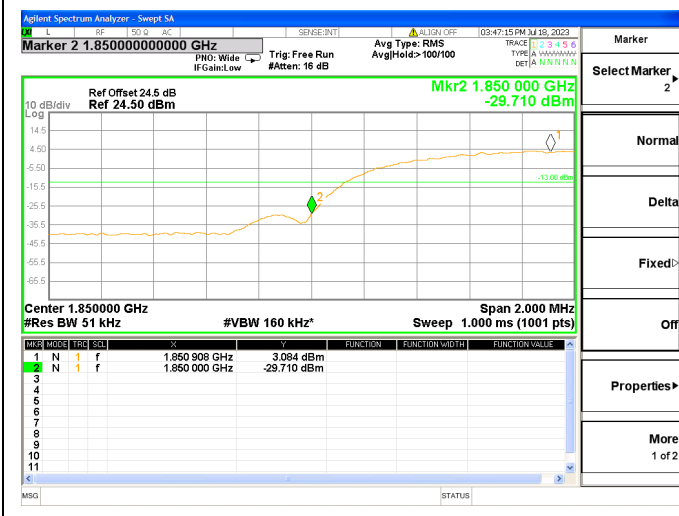

### WCDMA Band II, CH9538, 1907.6MHz

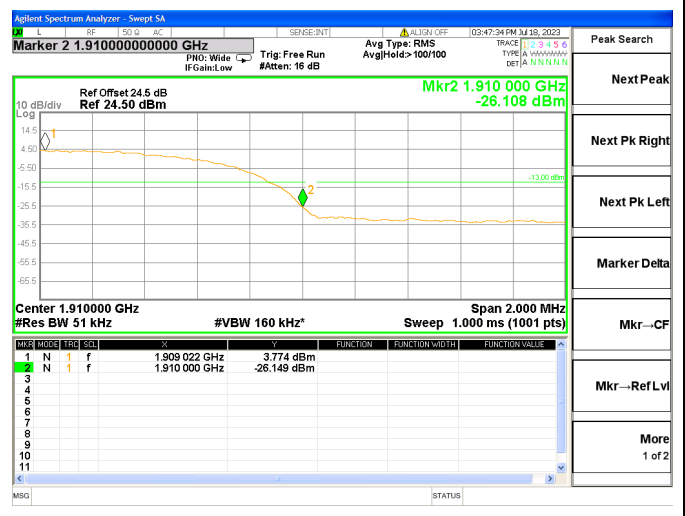

## 2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements

### 2.7.1. Requirement

According to FCC section 22.913, the Effective Radiated Power (E.R.P.) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

According to FCC section 27.50, mobile, and portable (hand-held) stations is limited to 1 Watts e.i.r.p. peak power.

### 2.7.2. Test Description

The test setups refer to section 2.1.3

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded. Please refer to section 2.1.3 of this report.

The relevant equation for determining the maximum E.R.P. or E.I.R.P. from the measured RF output power is given in Equation (1) as follows:

$$\text{E.R.P. or E.I.R.P.} = P_{\text{Meas}} + G_{\text{T}}$$

Where:

E.R.P. or E.I.R.P. effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_{\text{T}}$  gain of the transmitting antenna, in dBd (E.R.P.) or dBi (E.I.R.P.)

For devices utilizing multiple antennas, see ANSI C63.25-2015 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

The following equations demonstrate the mathematical relationship between E.R.P. and E.I.R.P.:

- E.R.P. = E.I.R.P. - 2.15, where E.R.P. and E.I.R.P. are expressed in consistent units.
- E.I.R.P. = E.R.P. + 2.15, where E.R.P. and E.I.R.P. are expressed in consistent units.





2.7.3. Test Result

GSM850								
Band	Channel	Frequency (MHz)	PCL	Measured E.R.P.		Limit		Verdict
				dBm	W	dBm	W	
GSM	128	824.20	5	31.100	1.288	38.5	7	PASS
	189	836.40	5	31.130	1.297			PASS
	251	848.80	5	30.980	1.253			PASS
GPRS	128	824.20	5	31.030	1.268	38.5	7	PASS
	189	836.40	5	31.080	1.282			PASS
	251	848.80	5	31.030	1.268			PASS

**Note 1:** For the GPRS mode, all the slots were tested and just the worst data were recorded in this report.

GSM1900								
Band	Channel	Frequency (MHz)	PCL	Measured E.I.R.P.		Limit		Verdict
				dBm	W	dBm	W	
GSM	512	1850.2	0	30.370	1.089	33	2	PASS
	661	1880.0	0	30.390	1.094			PASS
	810	1909.8	0	30.340	1.081			PASS
GPRS	512	1850.2	0	30.270	1.064	33	2	PASS
	661	1880.0	0	30.330	1.079			PASS
	810	1909.8	0	30.300	1.072			PASS

**Note 1:** For the GPRS mode, all the slots were tested and just the worst data were recorded in this report.





WCDMA Band V							
Band	Channel	Frequency (MHz)	Measured E.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	4132	826.4	20.86	0.122	38.5	7	PASS
	4182	836.4	20.91	0.123			PASS
	4233	846.6	20.90	0.123			PASS
HSDPA	4132	826.4	20.50	0.112	38.5	7	PASS
	4182	836.4	20.60	0.115			PASS
	4233	846.6	20.52	0.113			PASS
HSUPA	4132	826.4	20.48	0.112	38.5	7	PASS
	4182	836.4	20.57	0.114			PASS
	4233	846.6	20.51	0.112			PASS
HSPA+	4132	826.4	19.49	0.089	38.5	7	PASS
	4182	836.4	19.54	0.090			PASS
	4233	846.6	19.55	0.090			PASS

**Note 1:** For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.



WCDMA Band IV							
Band	Channel	Frequency (MHz)	Measured E.I.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	1312	1712.4	22.44	0.175	30	1	PASS
	1413	1732.6	22.56	0.180			PASS
	1513	1752.6	22.52	0.179			PASS
HSDPA	1312	1712.4	22.28	0.169	30	1	PASS
	1413	1732.6	22.31	0.170			PASS
	1513	1752.6	22.33	0.171			PASS
HSUPA	1312	1712.4	22.24	0.167	30	1	PASS
	1413	1732.6	22.27	0.169			PASS
	1513	1752.6	22.33	0.171			PASS
HSPA+	1312	1712.4	21.26	0.134	30	1	PASS
	1413	1732.6	21.30	0.135			PASS
	1513	1752.6	21.33	0.136			PASS

**Note 1:** For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.





WCDMA Band II							
Band	Channel	Frequency (MHz)	Measured E.I.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	9262	1852.4	23.13	0.206	33	2	PASS
	9400	1880.0	23.16	0.207			PASS
	9538	1907.6	23.08	0.203			PASS
HSDPA	9262	1852.4	22.47	0.177	33	2	PASS
	9400	1880.0	22.52	0.179			PASS
	9538	1907.6	22.64	0.184			PASS
HSUPA	9262	1852.4	22.45	0.176	33	2	PASS
	9400	1880.0	22.54	0.179			PASS
	9538	1907.6	22.64	0.184			PASS
HSPA+	9262	1852.4	21.41	0.138	33	2	PASS
	9400	1880.0	21.48	0.141			PASS
	9538	1907.6	21.41	0.138			PASS

**Note 1:** For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.






## 2.8. Radiated Out of Band Emissions

### 2.8.1. Requirement


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.

### 2.8.2. Test Description

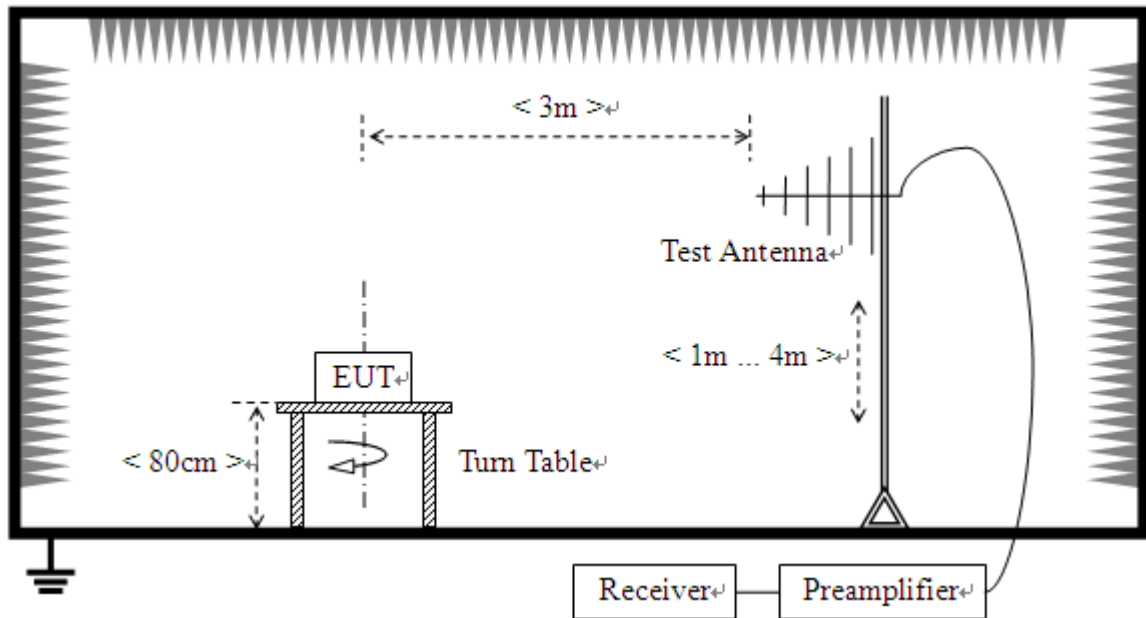

(For the test frequency from 30MHz to 1GHz)



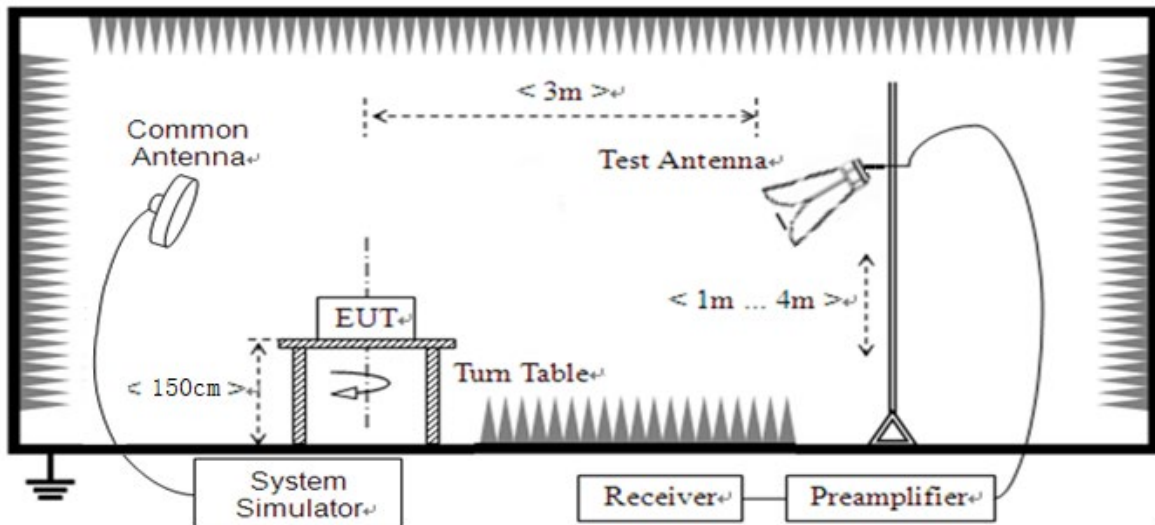

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

**Note:** When doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

### 2.8.3. Test Procedure

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.





#### 2.8.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST\_TX}} - P_{\text{SUBST\_RX}} - L_{\text{SUBST\_CABLES}} + G_{\text{SUBST\_TX\_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where  $A_{\text{SUBST}}$  is the final substitution correction including receive antenna gain.

$P_{\text{SUBST\_TX}}$  is signal generator level,

$P_{\text{SUBST\_RX}}$  is receiver level,

$L_{\text{SUBST\_CABLES}}$  is cable losses including TX cable,

$G_{\text{SUBST\_TX\_ANT}}$  is substitution antenna gain.

$A_{\text{TOT}}$  is total correction factor including cable loss and substitution correction

During the test, the data of  $A_{\text{TOT}}$  was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of  $A_{\text{TOT}}$ .

**Note1:** The power of the EUT transmitting frequency should be ignored.


**Note2:** All test mode and condition mentioned were considered and evaluated respectively by performing full test, only the worst data were recorded and reported.

**Note3:** All spurious emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


**Note4:** N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.




Top Antenna

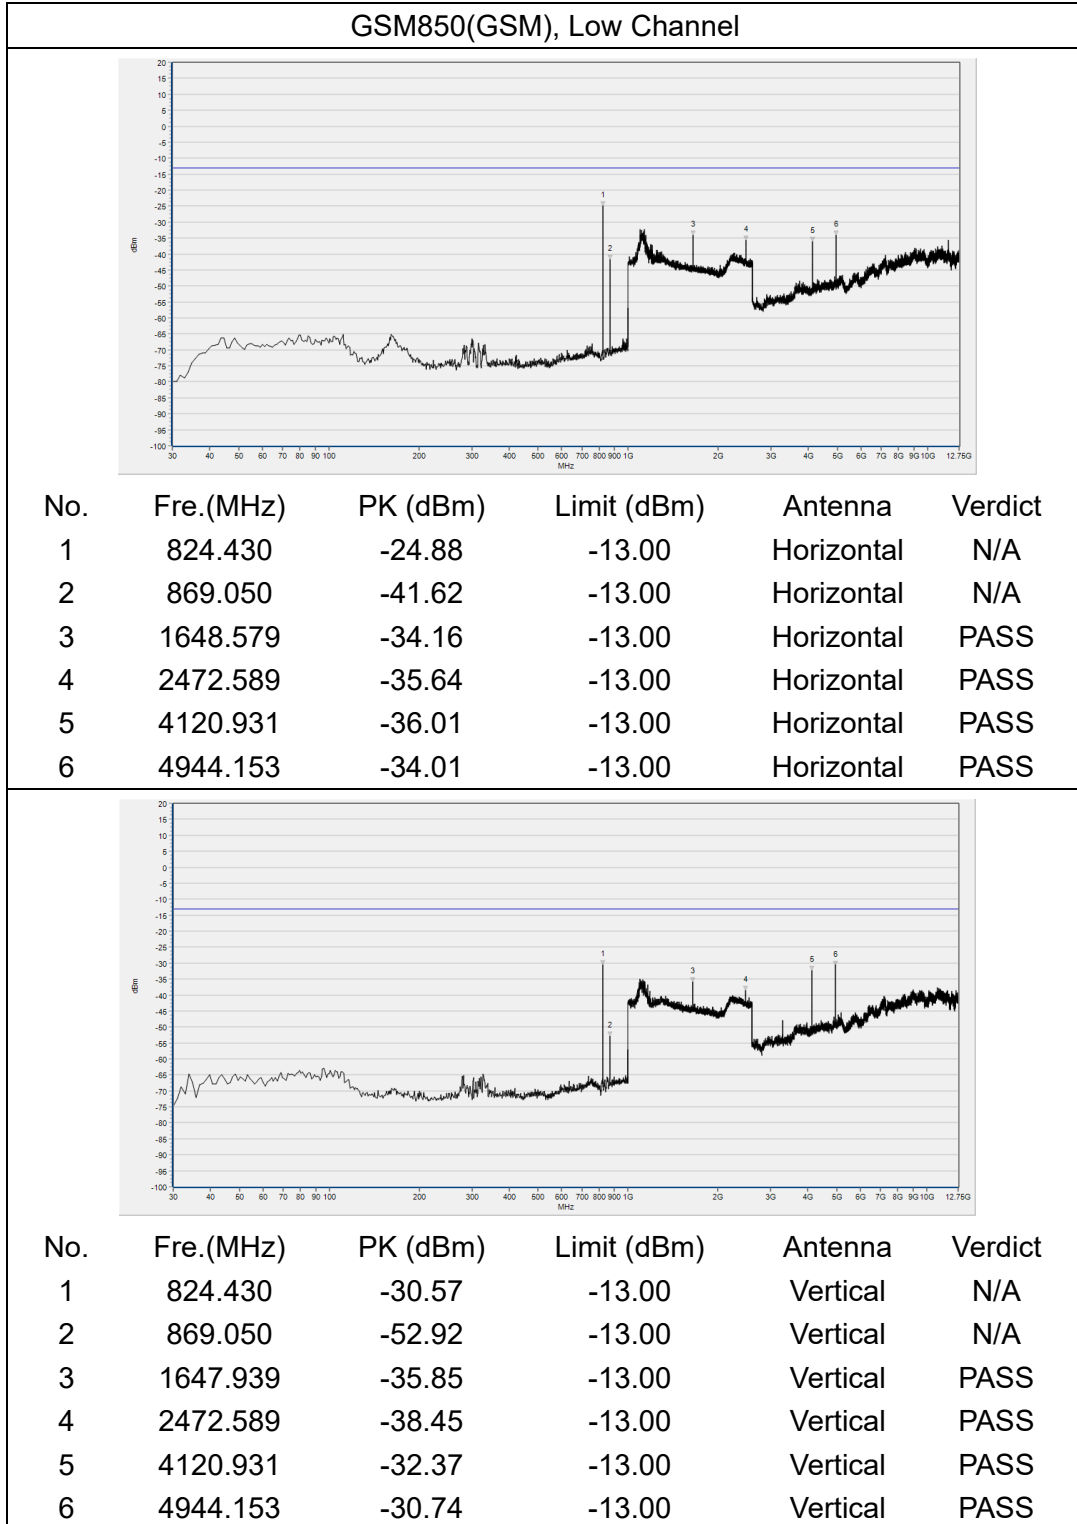

GSM850(GSM), Mid Channel

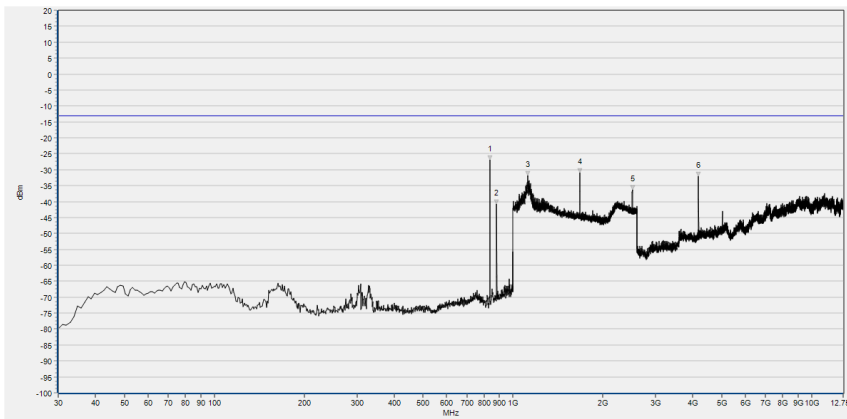


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	836.070	-27.02	-13.00	Horizontal	N/A
2	881.660	-40.68	-13.00	Horizontal	N/A
3	1118.447	-31.79	-13.00	Horizontal	PASS
4	1672.269	-30.99	-13.00	Horizontal	PASS
5	2509.084	-36.22	-13.00	Horizontal	PASS
6	4181.842	-31.99	-13.00	Horizontal	PASS

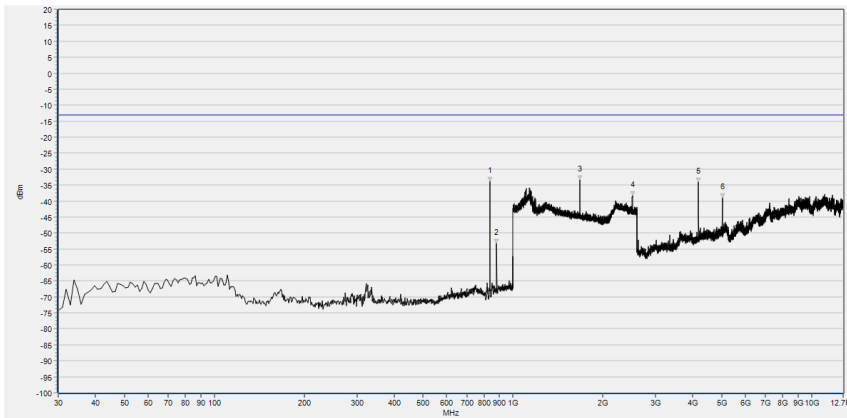


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	836.070	-33.89	-13.00	Vertical	N/A
2	881.660	-53.24	-13.00	Vertical	N/A
3	1672.269	-33.44	-13.00	Vertical	PASS
4	2509.084	-38.27	-13.00	Vertical	PASS
5	4181.842	-34.17	-13.00	Vertical	PASS
6	5017.985	-39.08	-13.00	Vertical	PASS



GSM850(GSM), High Channel

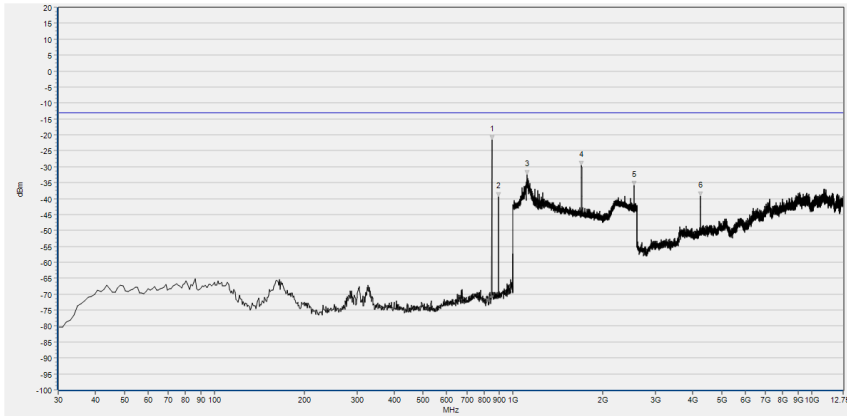


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	848.680	-21.57	-13.00	Horizontal	N/A
2	893.300	-39.34	-13.00	Horizontal	N/A
3	1112.685	-32.57	-13.00	Horizontal	PASS
4	1697.239	-29.67	-13.00	Horizontal	PASS
5	2546.218	-35.87	-13.00	Horizontal	PASS
6	4244.599	-39.27	-13.00	Horizontal	PASS

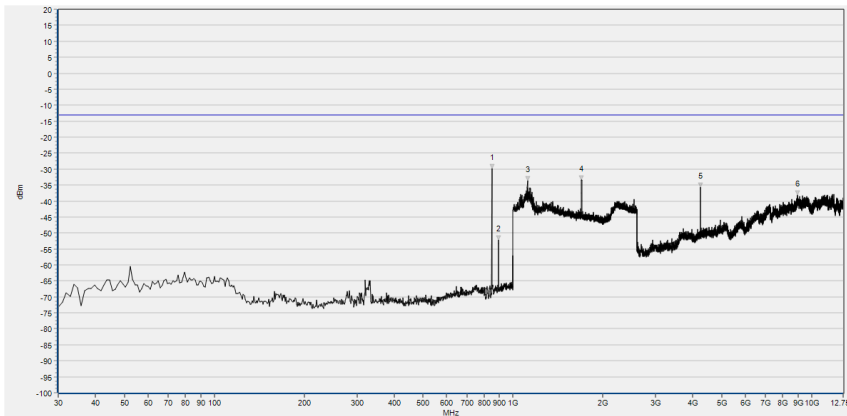


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	848.680	-29.72	-13.00	Vertical	N/A
2	894.270	-52.16	-13.00	Vertical	N/A
3	1117.807	-33.74	-13.00	Vertical	PASS
4	1697.239	-33.32	-13.00	Vertical	PASS
5	4244.599	-35.56	-13.00	Vertical	PASS
6	8949.518	-38.20	-13.00	Vertical	PASS



GSM1900(GSM), Low Channel

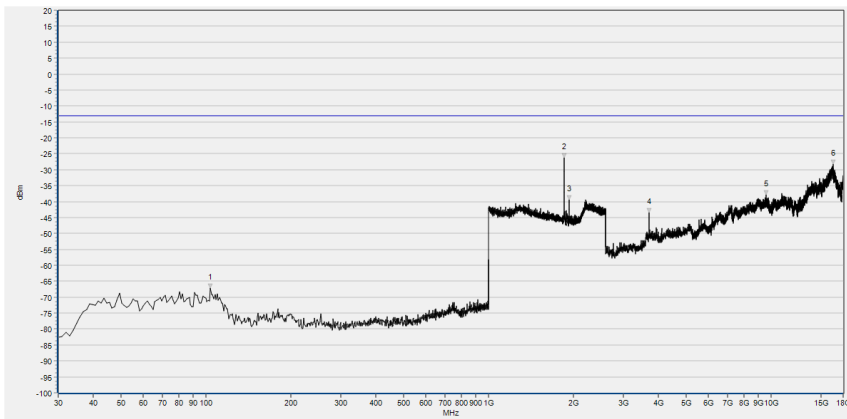


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	103.720	-67.11	-13.00	Horizontal	PASS
2	1849.620	-26.28	-13.00	Horizontal	N/A
3	1930.292	-39.33	-13.00	Horizontal	N/A
4	3700.600	-43.56	-13.00	Horizontal	PASS
5	9601.273	-37.99	-13.00	Horizontal	PASS
6	16557.738	-28.25	-13.00	Horizontal	PASS

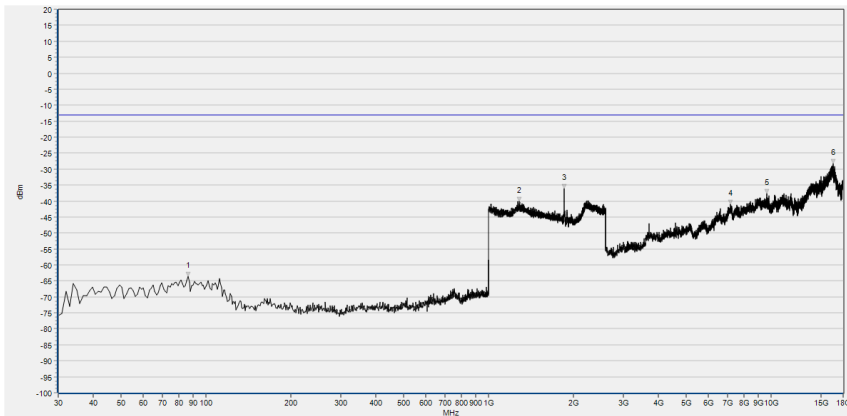


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	86.260	-63.65	-13.00	Vertical	PASS
2	1287.475	-40.05	-13.00	Vertical	PASS
3	1849.620	-36.16	-13.00	Vertical	N/A
4	7173.231	-41.11	-13.00	Vertical	PASS
5	9646.081	-37.68	-13.00	Vertical	PASS
6	16554.937	-28.33	-13.00	Vertical	PASS



GSM1900(GSM), Mid Channel

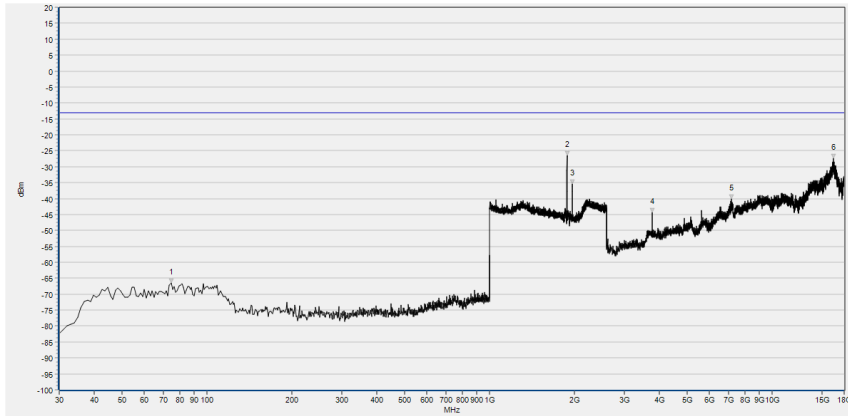

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	74.620	-66.52	-13.00	Horizontal	PASS
2	1879.712	-26.58	-13.00	Horizontal	N/A
3	1959.744	-35.48	-13.00	Horizontal	N/A
4	3759.411	-44.44	-13.00	Horizontal	PASS
5	7198.436	-40.07	-13.00	Horizontal	PASS
6	16524.132	-27.40	-13.00	Horizontal	PASS

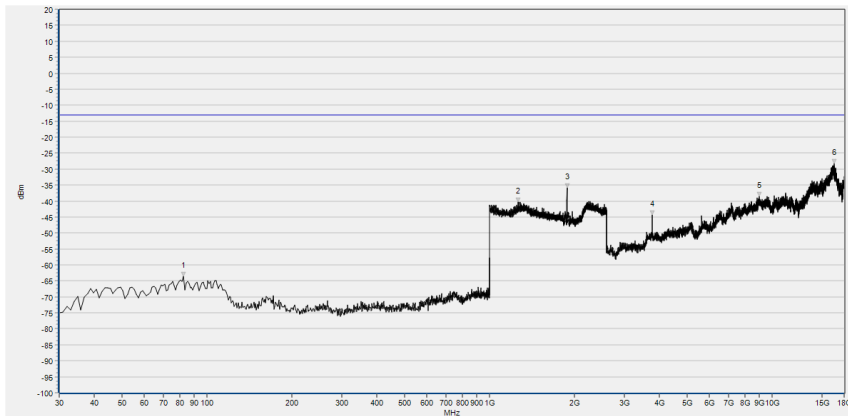


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	82.380	-63.61	-13.00	Vertical	PASS
2	1259.304	-40.39	-13.00	Vertical	PASS
3	1879.712	-35.98	-13.00	Vertical	N/A
4	3759.411	-44.39	-13.00	Vertical	PASS
5	9001.964	-38.60	-13.00	Vertical	PASS
6	16554.937	-28.20	-13.00	Vertical	PASS






GSM1900(GSM), High Channel

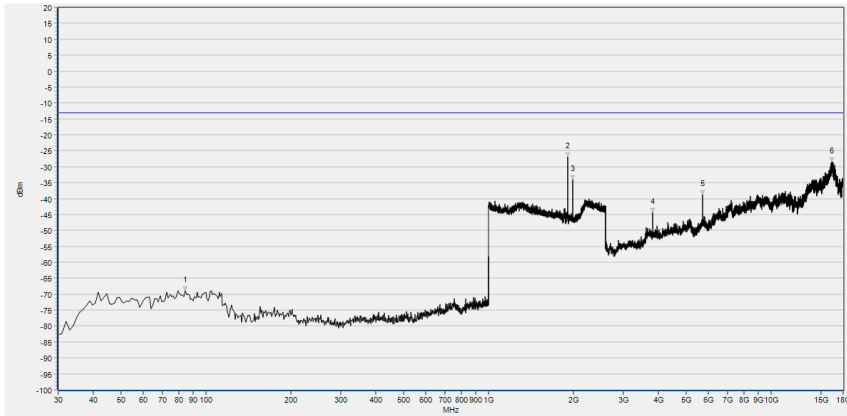


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	84.320	-68.94	-13.00	Horizontal	PASS
2	1909.804	-26.84	-13.00	Horizontal	N/A
3	1989.836	-34.02	-13.00	Horizontal	N/A
4	3818.221	-44.47	-13.00	Horizontal	PASS
5	5728.169	-38.66	-13.00	Horizontal	PASS
6	16412.111	-28.46	-13.00	Horizontal	PASS

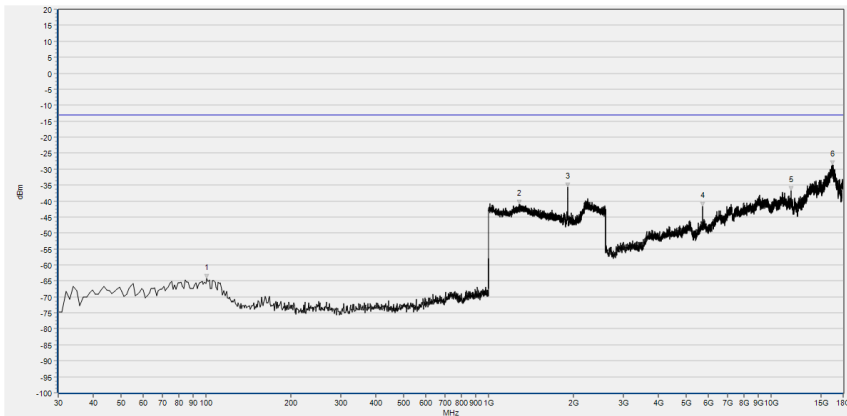


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	100.810	-64.31	-13.00	Vertical	PASS
2	1285.554	-40.97	-13.00	Vertical	PASS
3	1909.804	-35.62	-13.00	Vertical	N/A
4	5728.169	-41.68	-13.00	Vertical	PASS
5	11746.463	-36.75	-13.00	Vertical	PASS
6	16451.318	-28.78	-13.00	Vertical	PASS



GSM850(GPRS), Low Channel

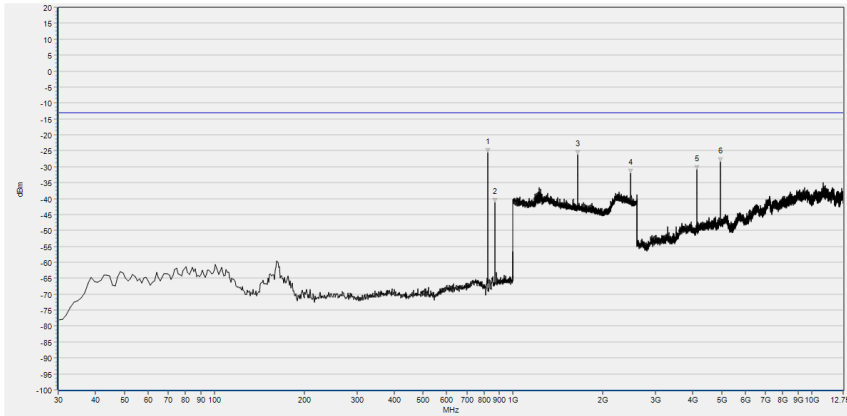


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	824.430	-25.56	-13.00	Horizontal	N/A
2	869.050	-41.15	-13.00	Horizontal	N/A
3	1647.939	-26.31	-13.00	Horizontal	PASS
4	2472.589	-32.10	-13.00	Horizontal	PASS
5	4120.931	-30.93	-13.00	Horizontal	PASS
6	4944.153	-28.43	-13.00	Horizontal	PASS

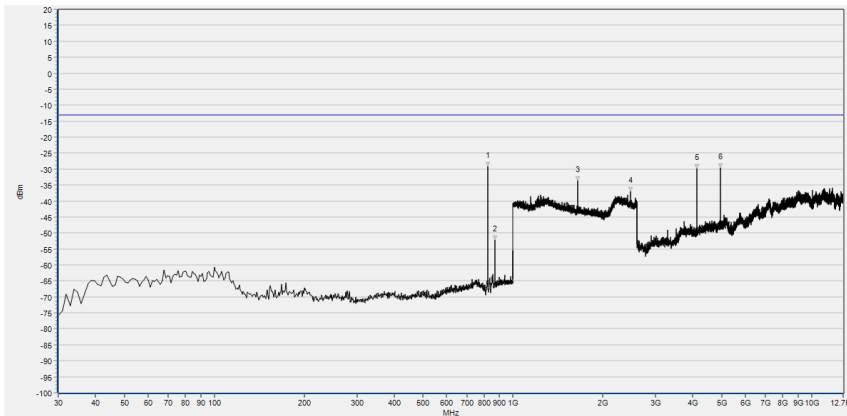


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	824.430	-29.24	-13.00	Vertical	N/A
2	869.050	-52.15	-13.00	Vertical	N/A
3	1647.939	-33.71	-13.00	Vertical	PASS
4	2472.589	-36.99	-13.00	Vertical	PASS
5	4120.931	-29.79	-13.00	Vertical	PASS
6	4944.153	-29.55	-13.00	Vertical	PASS



GSM850(GPRS), Mid Channel

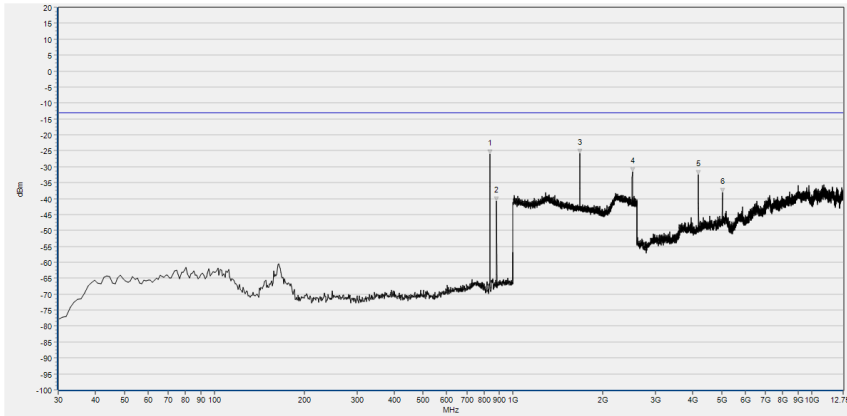


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	836.070	-25.97	-13.00	Horizontal	N/A
2	881.660	-40.78	-13.00	Horizontal	N/A
3	1672.909	-25.92	-13.00	Horizontal	PASS
4	2509.084	-31.56	-13.00	Horizontal	PASS
5	4181.842	-32.54	-13.00	Horizontal	PASS
6	5017.985	-38.14	-13.00	Horizontal	PASS

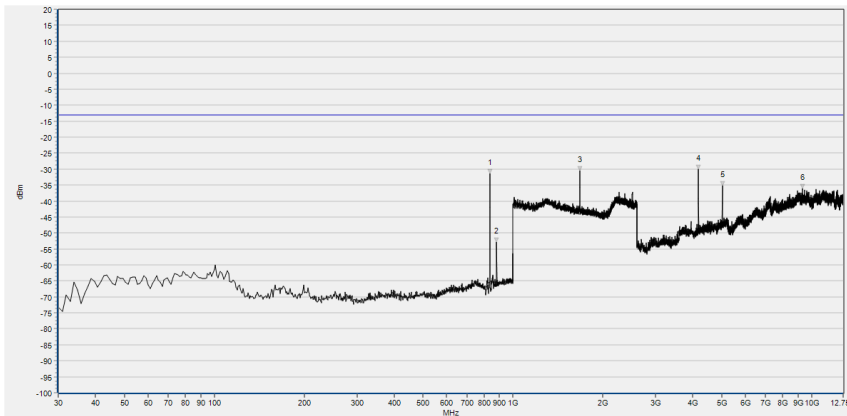


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	836.070	-31.41	-13.00	Vertical	N/A
2	881.660	-52.76	-13.00	Vertical	N/A
3	1672.269	-30.51	-13.00	Vertical	PASS
4	4181.842	-30.12	-13.00	Vertical	PASS
5	5017.985	-35.20	-13.00	Vertical	PASS
6	9327.905	-36.18	-13.00	Vertical	PASS



GSM850(GPRS), High Channel

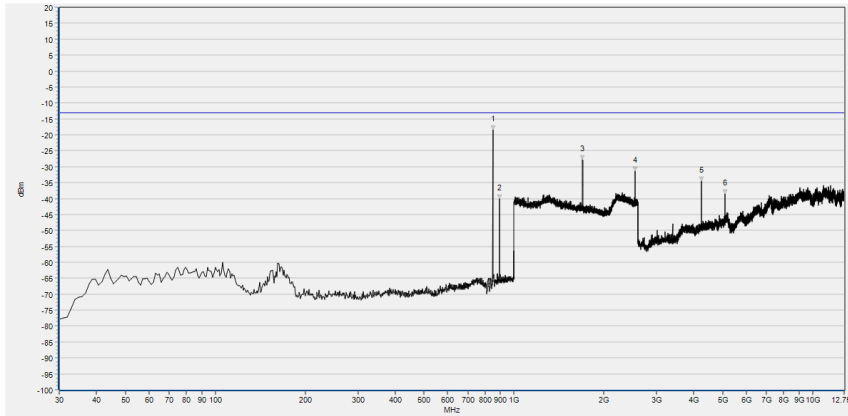


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	848.680	-18.44	-13.00	Horizontal	N/A
2	893.300	-40.17	-13.00	Horizontal	N/A
3	1697.239	-27.77	-13.00	Horizontal	PASS
4	2546.218	-31.39	-13.00	Horizontal	PASS
5	4242.753	-34.58	-13.00	Horizontal	PASS
6	5091.817	-38.56	-13.00	Horizontal	PASS

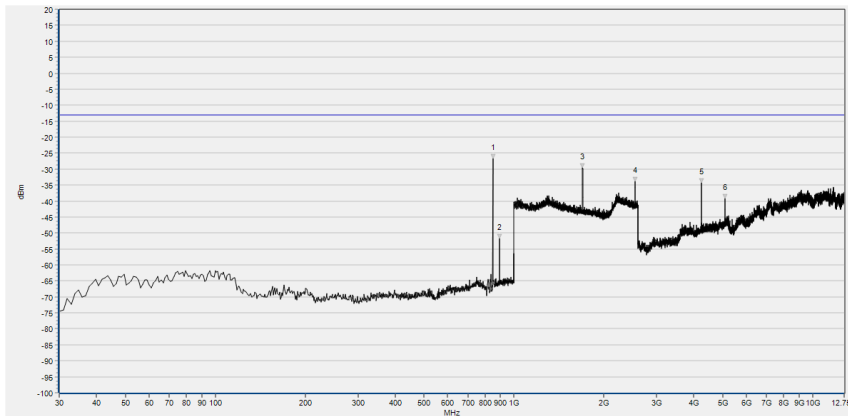


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	848.680	-26.68	-13.00	Vertical	N/A
2	893.300	-51.67	-13.00	Vertical	N/A
3	1697.239	-29.51	-13.00	Vertical	PASS
4	2546.218	-33.94	-13.00	Vertical	PASS
5	4242.753	-34.33	-13.00	Vertical	PASS
6	5091.817	-39.22	-13.00	Vertical	PASS



GSM1900(GPRS), Low Channel

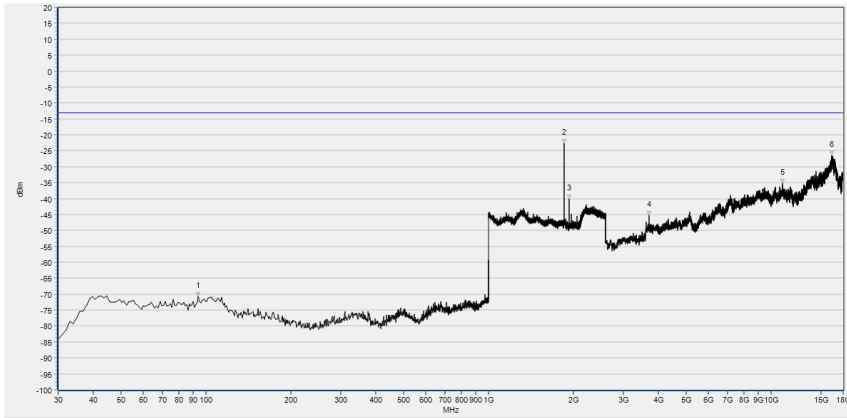


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	94.020	-70.62	-13.00	Horizontal	PASS
2	1850.260	-22.66	-13.00	Horizontal	N/A
3	1930.292	-40.22	-13.00	Horizontal	N/A
4	3700.600	-45.17	-13.00	Horizontal	PASS
5	11004.328	-35.28	-13.00	Horizontal	PASS
6	16437.316	-26.46	-13.00	Horizontal	PASS

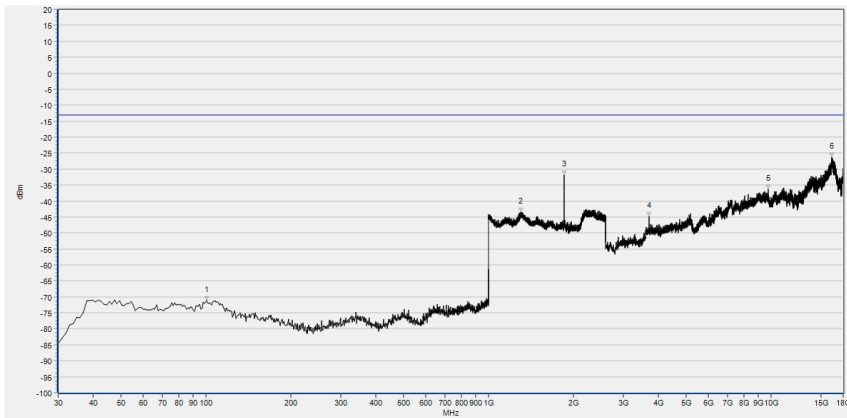


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	100.810	-71.19	-13.00	Vertical	PASS
2	1298.359	-43.49	-13.00	Vertical	PASS
3	1850.260	-31.82	-13.00	Vertical	N/A
4	3700.600	-44.84	-13.00	Vertical	PASS
5	9769.304	-36.28	-13.00	Vertical	PASS
6	16389.707	-26.36	-13.00	Vertical	PASS



GSM1900(GPRS), Mid Channel

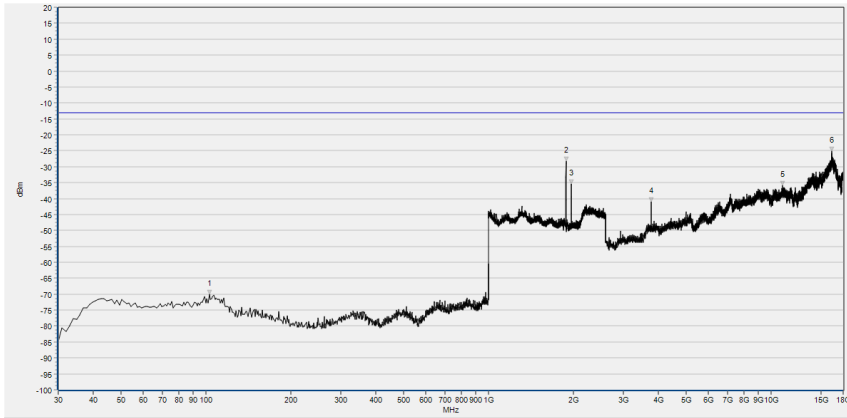

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	102.750	-70.09	-13.00	Horizontal	PASS
2	1879.712	-28.32	-13.00	Horizontal	N/A
3	1959.744	-35.50	-13.00	Horizontal	N/A
4	3759.411	-41.00	-13.00	Horizontal	PASS
5	10967.921	-35.90	-13.00	Horizontal	PASS
6	16403.710	-25.17	-13.00	Horizontal	PASS

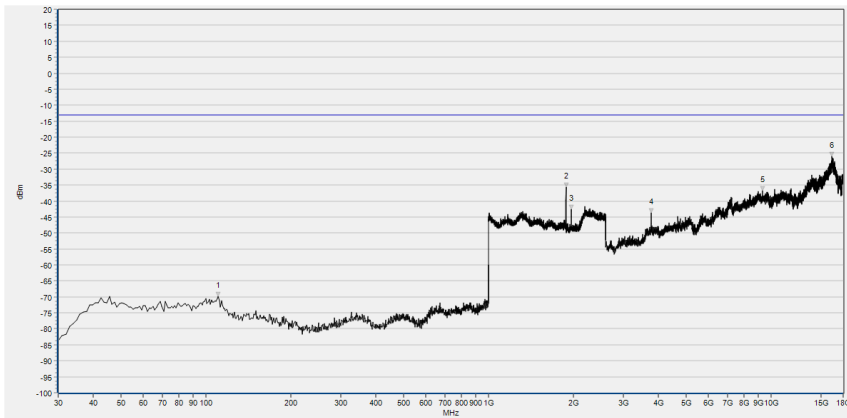

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	110.510	-69.72	-13.00	Vertical	PASS
2	1879.712	-35.61	-13.00	Vertical	N/A
3	1959.744	-42.53	-13.00	Vertical	N/A
4	3759.411	-43.80	-13.00	Vertical	PASS
5	9338.025	-36.77	-13.00	Vertical	PASS
6	16445.717	-26.03	-13.00	Vertical	PASS

