
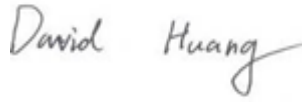



# RF TEST REPORT



Report No.: 17070437-FCC-R2-V1

Supersede Report No.: N/A

Applicant	BLU Products , Inc	
Product Name	Mobile phone	
Model No.	Studio PRO	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	June 14 to July 02, 2017	
Issue Date	July 19, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070437-FCC-R2-V1
Page	3 of 67

This page has been left blank intentionally.

# CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION .....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	9
6.1 ANTENNA REQUIREMENT .....	9
6.2 CHANNEL SEPARATION.....	10
6.3 20DB BANDWIDTH .....	14
6.4 PEAK OUTPUT POWER .....	18
6.5 NUMBER OF HOPPING CHANNEL .....	22
6.6 TIME OF OCCUPANCY (DWELL TIME).....	24
6.7 BAND EDGE & RESTRICTED BAND .....	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED EMISSIONS & RESTRICTED BAND.....	42
ANNEX A. TEST INSTRUMENT.....	49
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	50
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	62
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	66
ANNEX E. DECLARATION OF SIMILARITY .....	67

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070437-FCC-R2	NONE	Original	July 03, 2017
17070437-FCC-R2-V1	V1	Changed the EUT Photo	July 19, 2017

## 2. Customer information

Applicant Name	BLU Products , Inc
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products , Inc
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software of Radiated Emission	Radiated Emission Program-To Shenzhen v2.0
Test Software of Conducted Emission	EZ-EMC(ver.lcp-03A1)

## 4. Equipment under Test (EUT) Information

Description of EUT:	Mobile phone
Main Model:	Studio PRO
Serial Model:	N/A
Date EUT received:	June 13, 2017
Test Date(s):	June 14 to July 02, 2017
Equipment Category :	DSS
Antenna Gain:	GSM850: -1.02dBi PCS1900: -1.2dBi UMTS-FDD Band V: -1.2dBi UMTS-FDD Band IV: -1.03dBi UMTS-FDD Band II: -1.2dBi WIFI: -0.61dBi Bluetooth/BLE: -0.45dBi GPS: -1.2dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK BLE: GFSK GPS: BPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band IV TX: 1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz

WIFI: 802.11b/g/n(20M): 2412-2462 MHz  
 WIFI: 802.11n(40M): 2422-2452 MHz  
 Bluetooth& BLE: 2402-2480 MHz  
 GPS: 1575.42 MHz

Max. Output Power: 2.821dBm

Number of Channels: GSM 850: 124CH  
 PCS1900: 299CH  
 UMTS-FDD Band V: 102CH  
 UMTS-FDD Band IV: 202CH  
 UMTS-FDD Band II: 277CH  
 WIFI :802.11b/g/n(20M): 11CH  
 WIFI :802.11n(40M): 7CH  
 Bluetooth: 79CH  
 BLE: 40CH  
 GPS:1CH

Port: USB Port, Earphone Port

Adapter:  
 Model: TPA-46B050100UU  
 Input: AC100-240V~50/60Hz,0.2A  
 Input Power: Output: DC 5.0V,1.0A  
 Battery:  
 Model: C745243200L  
 Spec : 3.8V,2000mAh,7.60Wh

Trade Name : BLU

FCC ID: YHLBLUSTUDIOPRO

GPRS/ EGPRS Multi-slot class 8/10/12

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-



## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 3 antennas:

A permanently attached PIFA antenna for GSM /PCS/ UMTS-FDD Band V/ IV/ II, the gain is -1.02dBi for GSM, the gain is -1.2dBi for PCS/ UMTS-FDD Band V/II, the gain is -1.03dBi for UMTS-FDD Band IV.

A permanently attached PIFA antenna for Bluetooth/WIFI/BLE/GPS, the gain is -0.45dBi for Bluetooth/BLE, the gain is -0.61dBi for WIFI.

A permanently attached PIFA antenna for GPS, the gain is -1.2dBi for GPS.


**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 Channel Separation

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2017
Tested By :	Loren Luo

### Requirement(s):

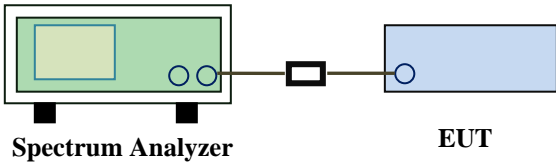Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.</li> </ul>		

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

### Channel Separation measurement result


Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.694	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.692	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.689	Pass
	Adjacency Channel	2479			
CH Separation $\pi$ / 4 DQPSK	Low Channel	2402	1.005	0.868	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.868	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.861	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.865	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.870	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.861	Pass
	Adjacency Channel	2479			

## Test Plots


### Channel Separation measurement result

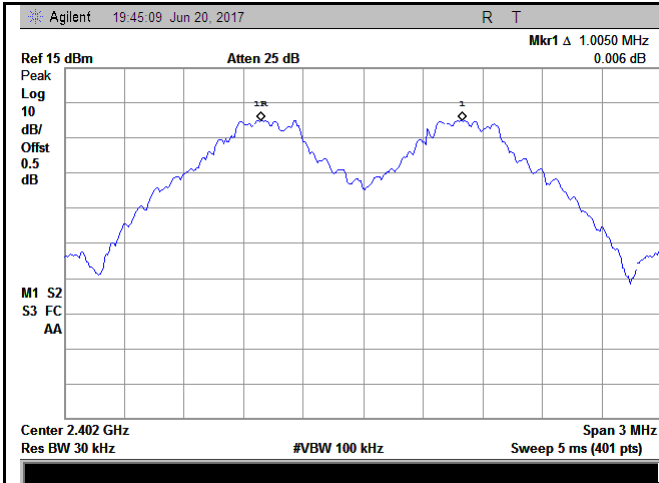


GFSK - Low Channel

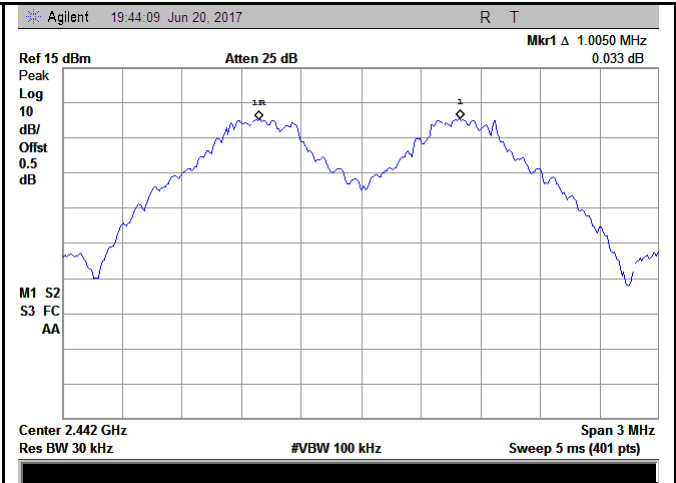


GFSK - Middle Channel

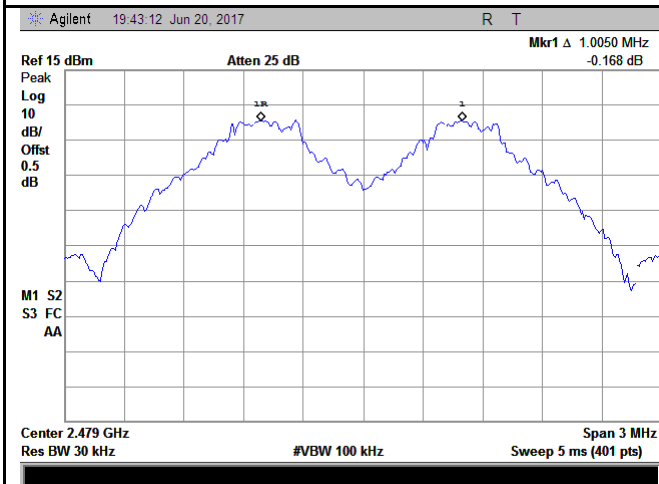


GFSK - High Channel

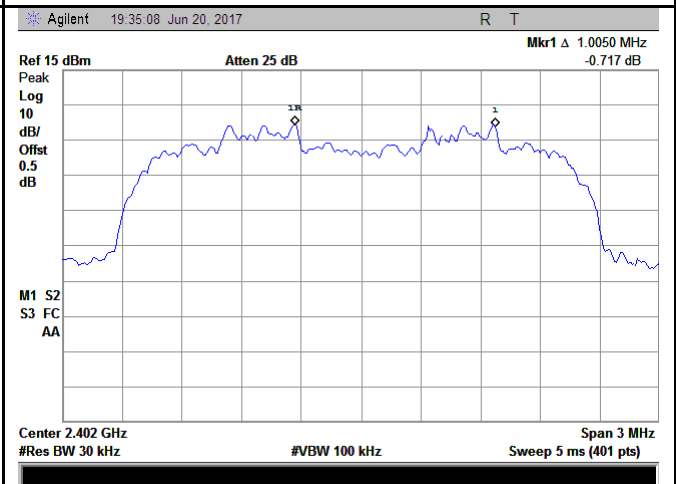


$\pi/4$  DPSK - Low Channel

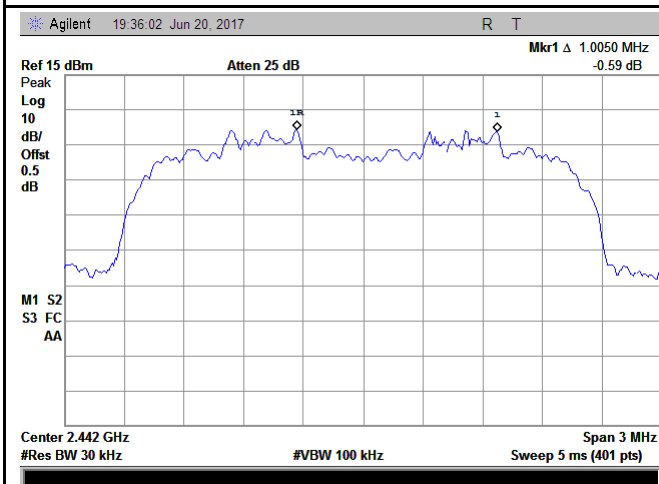


$\pi/4$  DQPSK - Middle Channel

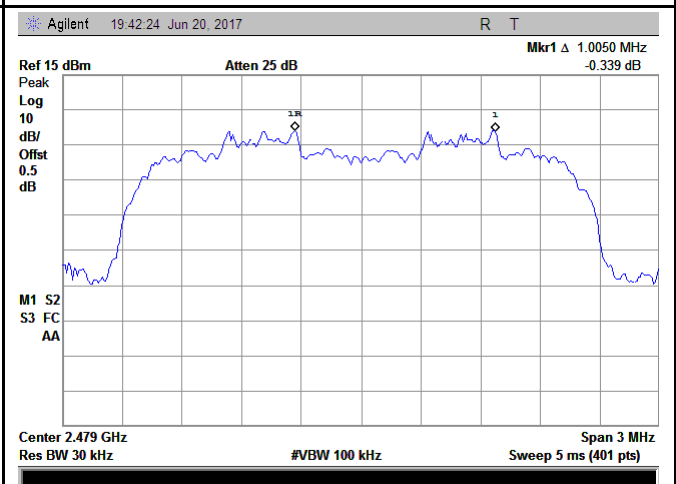


$\pi/4$  DQPSK - High Channel

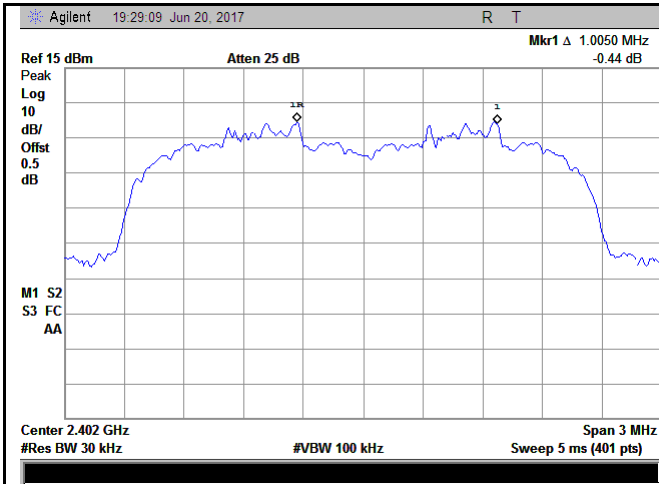

8DPSK - Low Channel

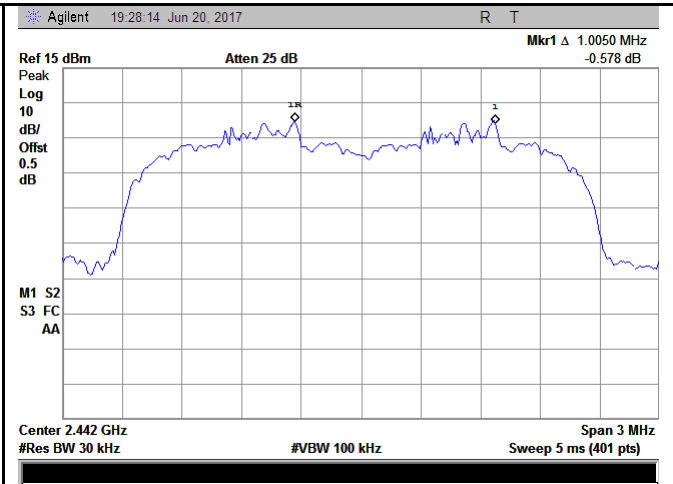

8DPSK - Middle Channel

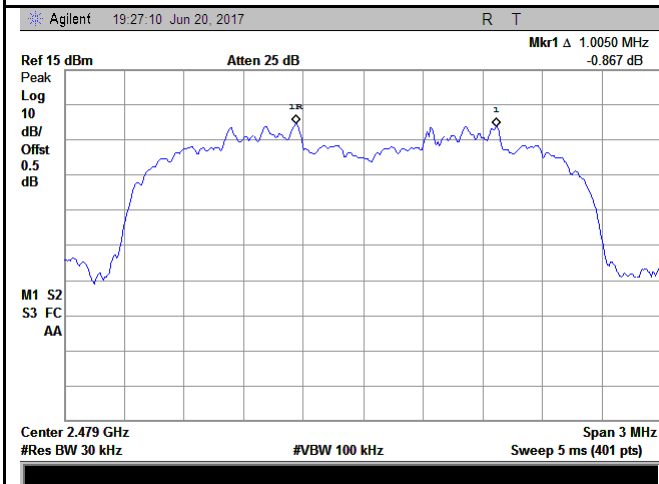


8DPSK - High Channel

### 6.3 20dB Bandwidth

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2017
Tested By :	Loren Luo

#### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

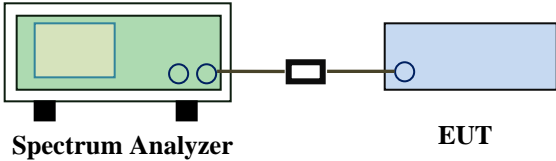Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW <math>\geq</math> 1% of the 20 dB bandwidth</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold.</li> <li>- The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference</li> </ul>
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

#### Measurement result


Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.041	0.9034
	Mid	2441	1.038	0.9085
	High	2480	1.034	0.9007
$\pi/4$ DQPSK	Low	2402	1.302	1.1687
	Mid	2441	1.302	1.1676
	High	2480	1.292	1.1642
8-DPSK	Low	2402	1.298	1.1764
	Mid	2441	1.305	1.1735
	High	2480	1.292	1.1681

## Test Plots


### 20dB Bandwidth measurement result

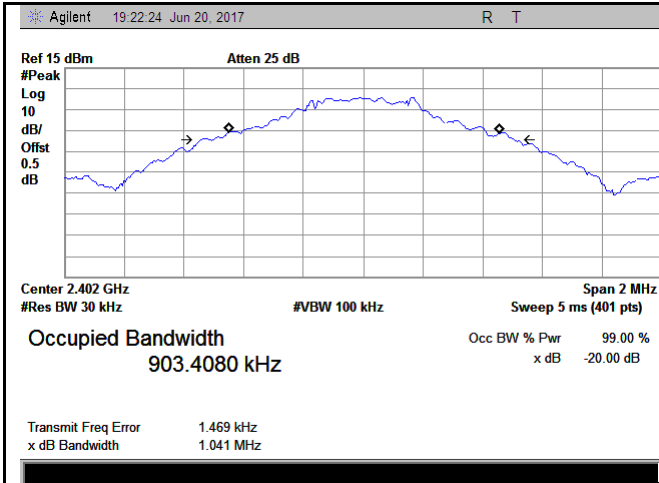


GFSK - Low Channel

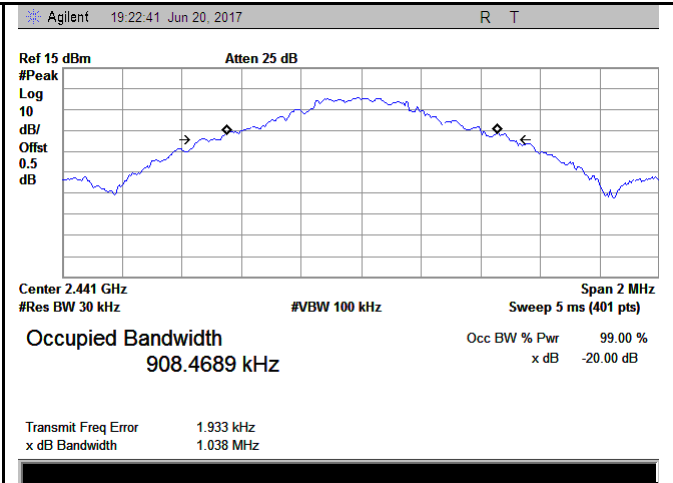


GFSK - Middle Channel

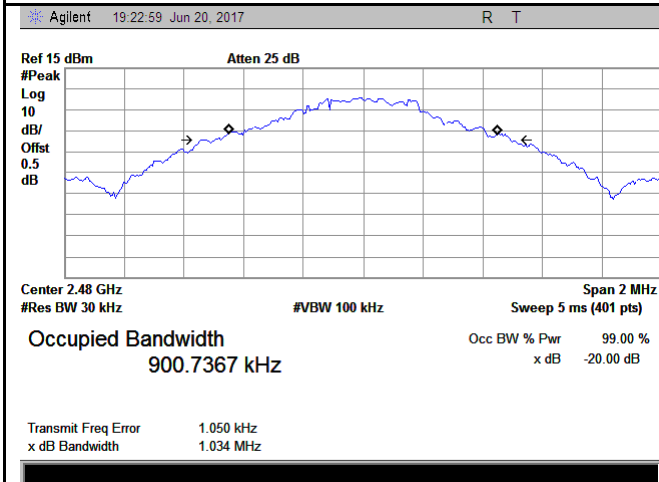


GFSK - High Channel

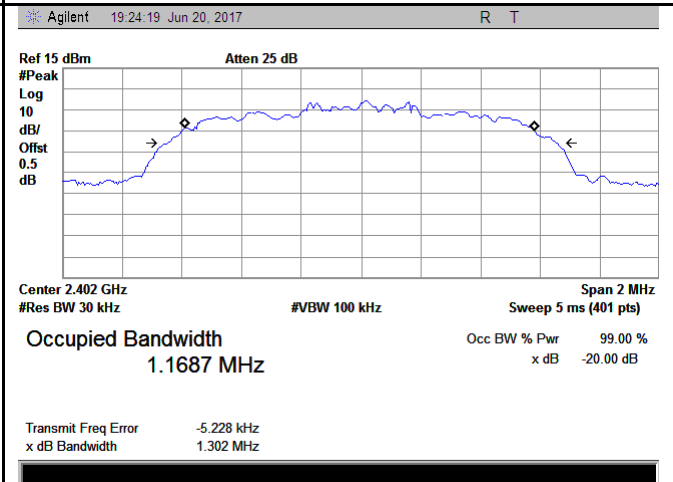

$\pi/4$  DPSK - Low Channel

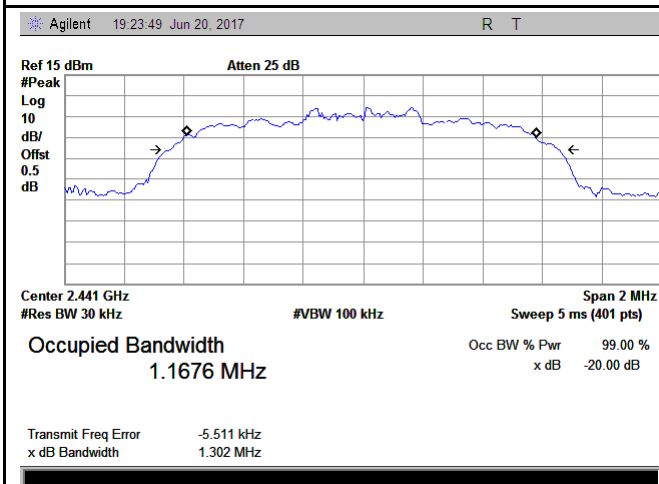


$\pi/4$  DPSK - Middle Channel

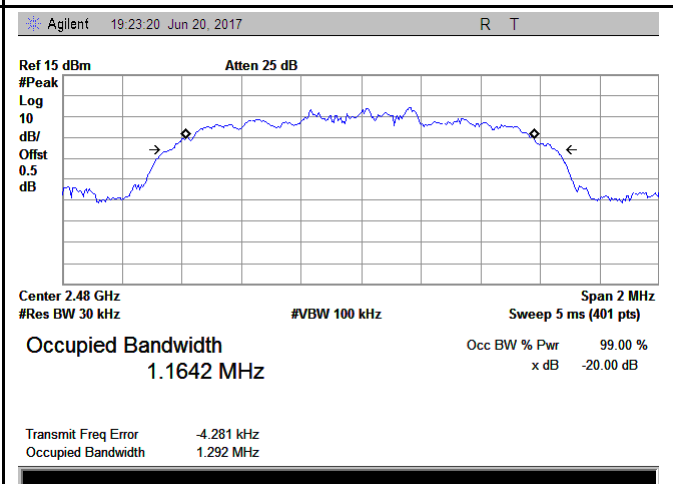


$\pi/4$  DPSK - High Channel




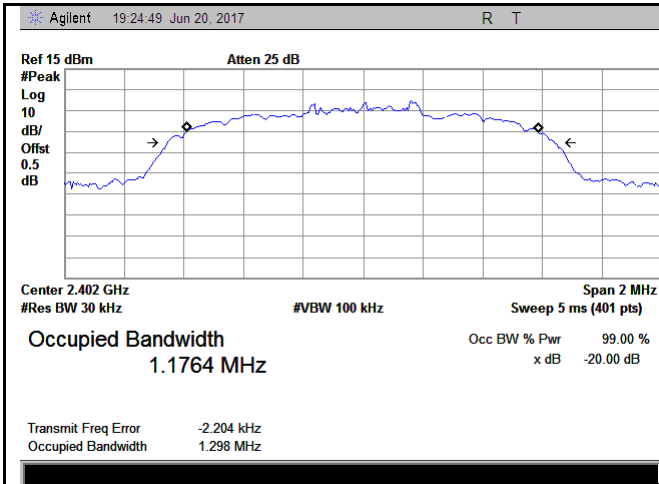

8DPSK - Low Channel

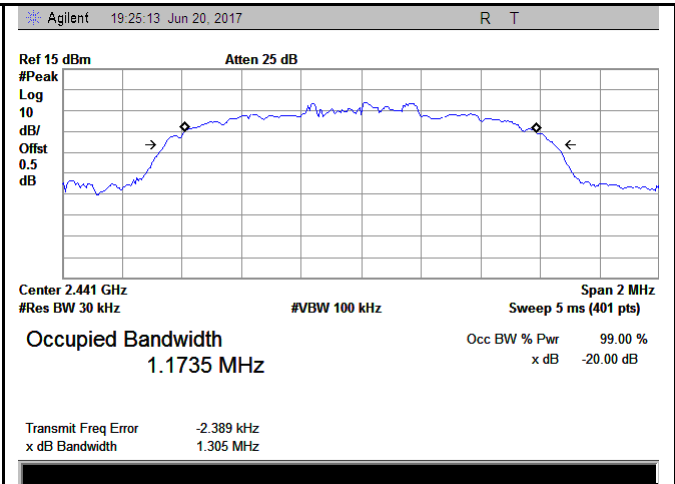

8DPSK - Middle Channel

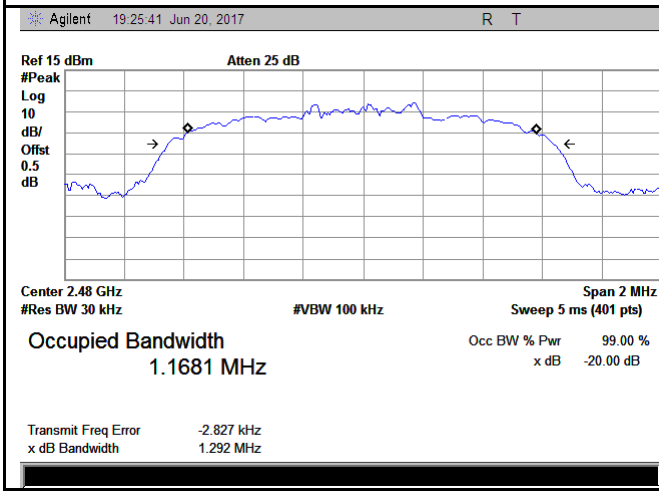


8DPSK - High Channel

## 6.4 Peak Output Power

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq 25$ & $< 50$ channels: $\leq 0.25$ Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: $\leq 1$ Watt	<input type="checkbox"/>

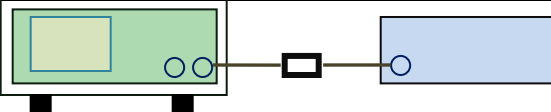Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW &gt; the 20 dB bandwidth of the emission being measured</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize.</li> </ul>
----------------	--

	<ul style="list-style-type: none"> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data  Yes  N/A  
 Test Plot  Yes (See below)  N/A


**Peak Output Power measurement result**

Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	2.652	125	Pass
		Mid	2441	2.712	125	Pass
		High	2480	<b>2.821</b>	125	Pass
	$\pi/4$ DQPSK	Low	2402	2.499	125	Pass
		Mid	2441	2.439	125	Pass
		High	2480	<b>2.534</b>	125	Pass
	8-DPSK	Low	2402	2.636	125	Pass
		Mid	2441	<b>2.682</b>	125	Pass
		High	2480	2.752	125	Pass


## Test Plots

### Output Power measurement result

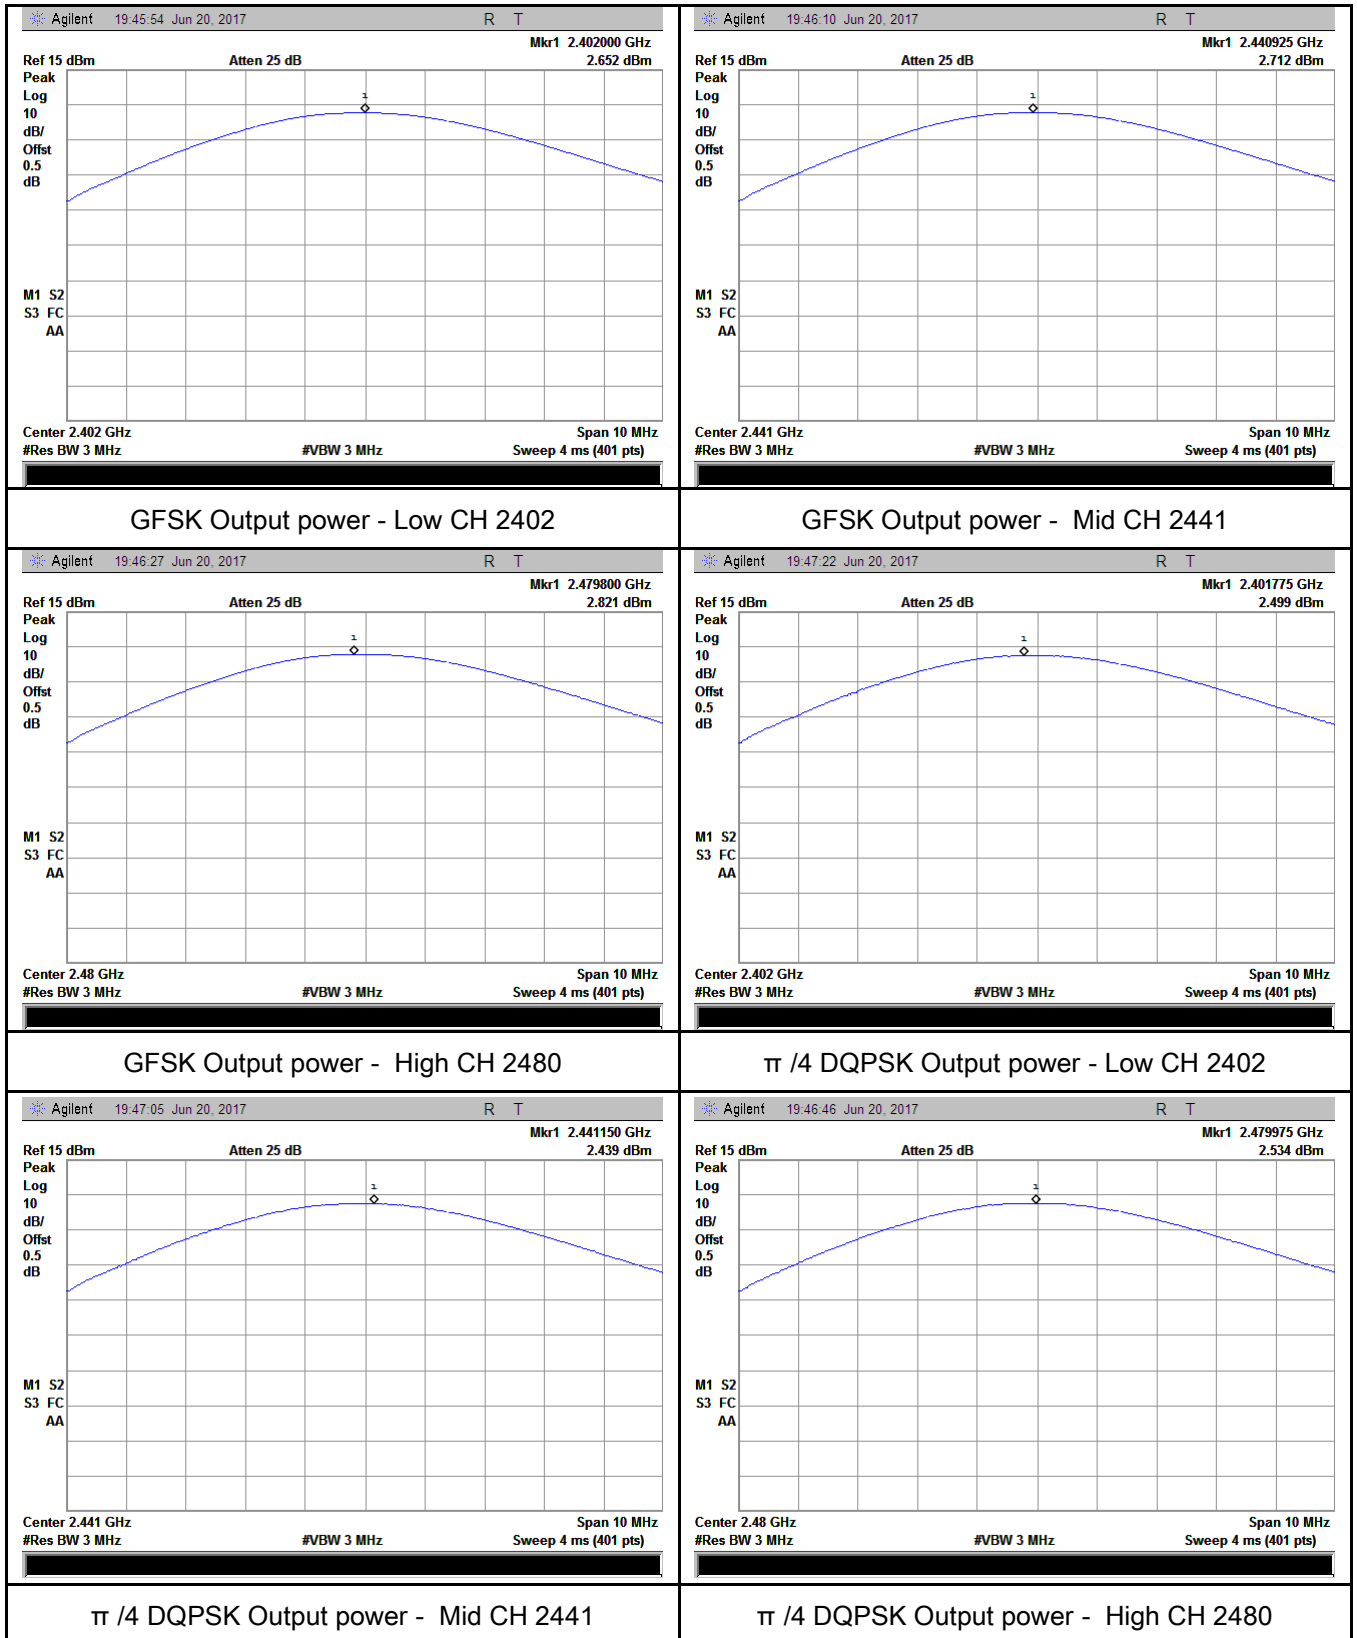


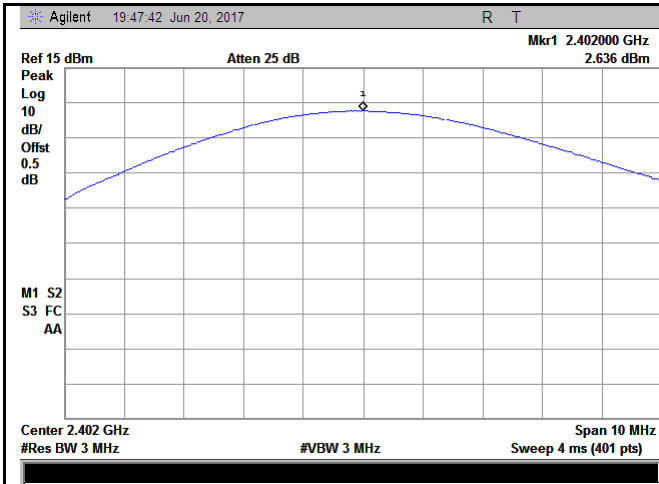

8DPSK Output power - Low CH 2402

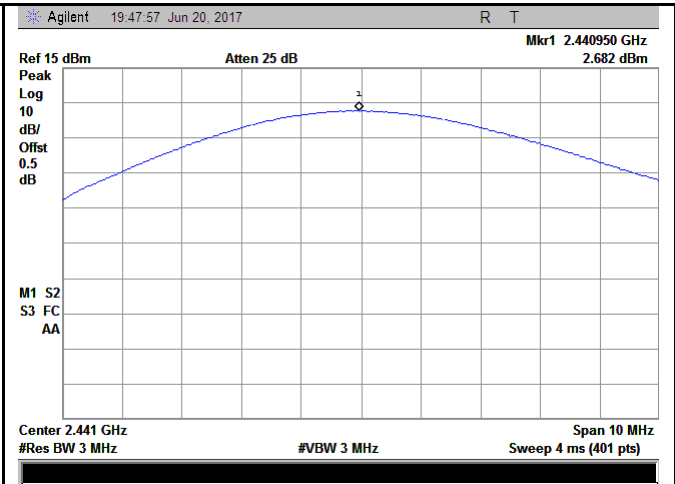

8DPSK Output power - Mid CH 2441

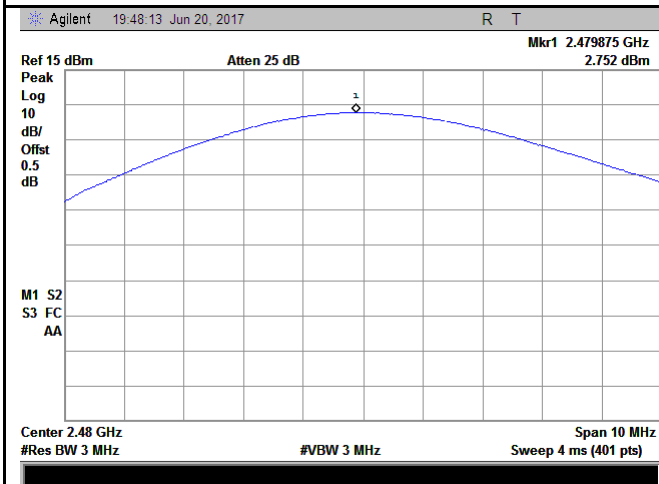


8DPSK Output power - High CH 2480



## 6.5 Number of Hopping Channel

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2017
Tested By :	Loren Luo

### Requirement(s):

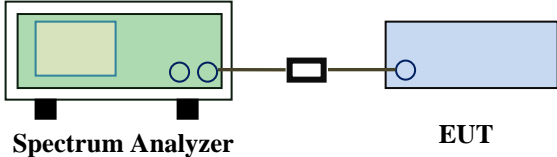Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz $\geq$ 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.  <u>Use the following spectrum analyzer settings:</u>            The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> <li>- Span = the frequency band of operation</li> <li>- RBW <math>\geq</math> 1% of the span</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow trace to fully stabilize.</li> <li>- It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data     Yes                       N/A  
 Test Plot     Yes (See below)                       N/A

### Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

### Test Plots


#### Number of Hopping Channels measurement result

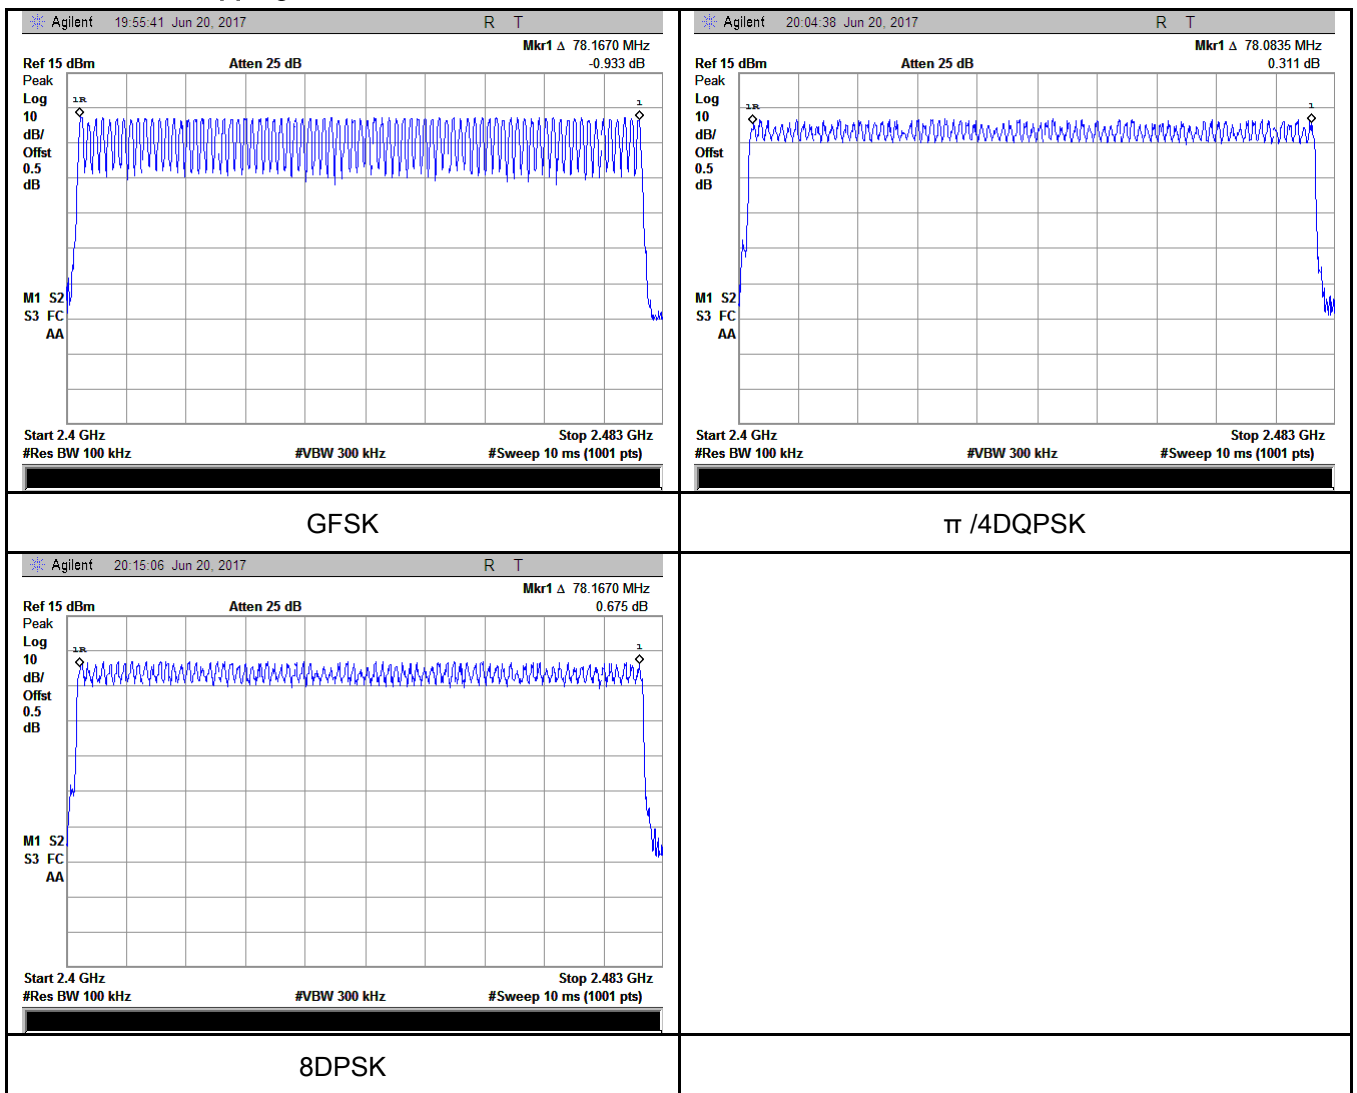

## 6.6 Time of Occupancy (Dwell Time)

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2017
Tested By :	Loren Luo

### Requirement(s):

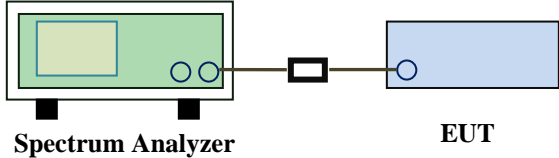Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.  <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> <li>- Span = zero span, centered on a hopping channel</li> <li>- RBW = 1 MHz</li> <li>- VBW ≥ RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- use the marker-delta function to determine the dwell time</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A  
 Test Plot     Yes (See below)                       N/A





**Dwell Time measurement result**

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.870	306.133	400	Pass
		Mid	2.870	306.133	400	Pass
		High	2.870	306.133	400	Pass
	π /4 DQPSK	Low	2.870	306.133	400	Pass
		Mid	2.880	307.200	400	Pass
		High	2.870	306.133	400	Pass
	8-DPSK	Low	2.880	307.200	400	Pass
		Mid	2.880	307.200	400	Pass
		High	2.880	307.200	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						


## Test Plots

### Dwell Time measurement result

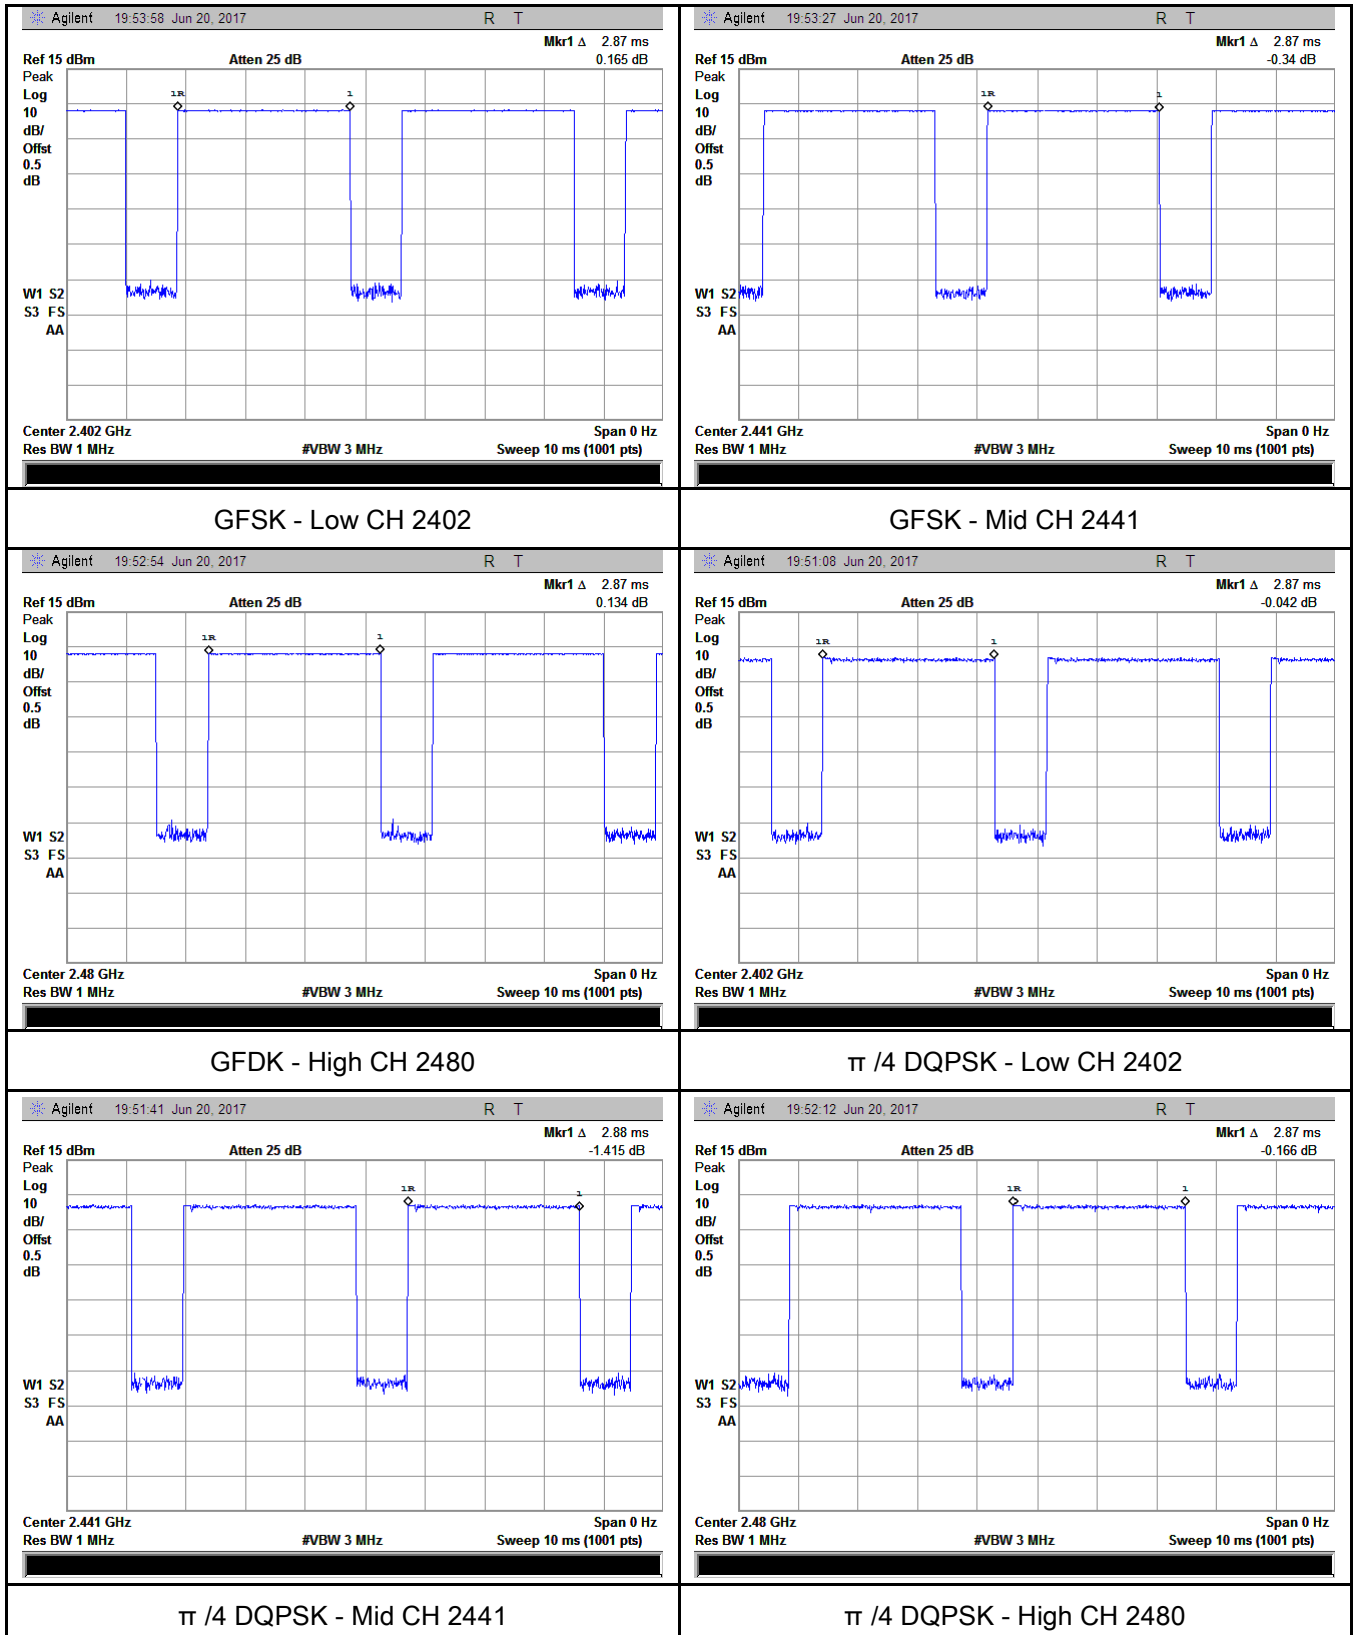


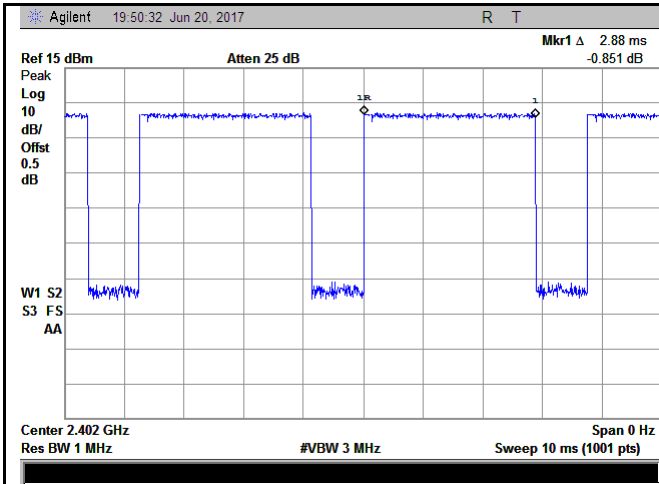

8DPSK - Low CH 2402

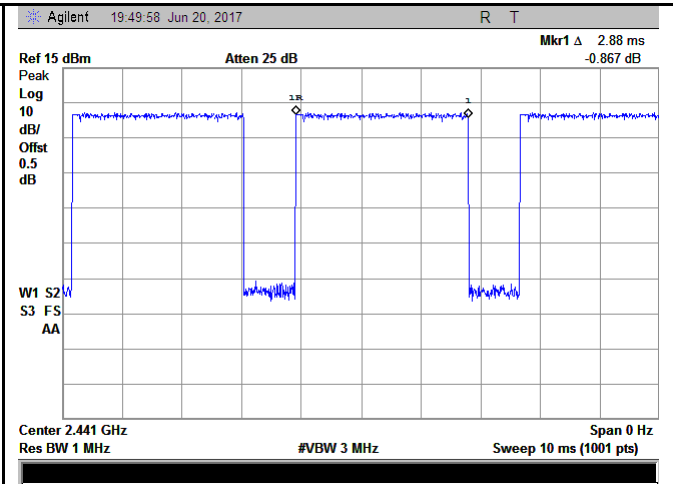

8DPSK - Mid CH 2441

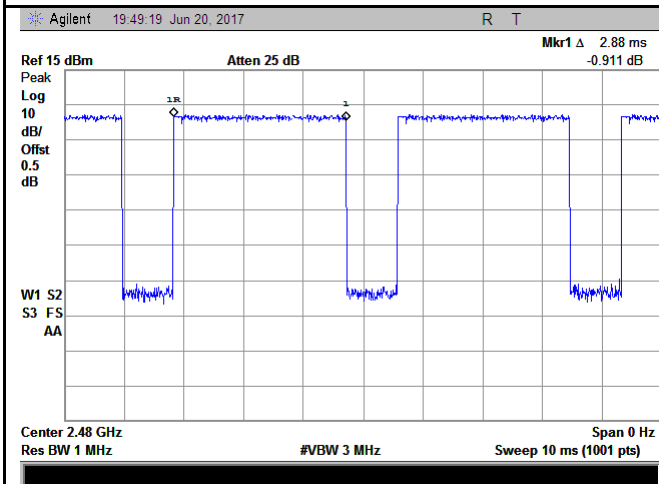


8DPSK - High CH 2480

## 6.7 Band Edge & Restricted Band

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1018mbar
Test date :	June 19, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. □	<input checked="" type="checkbox"/>

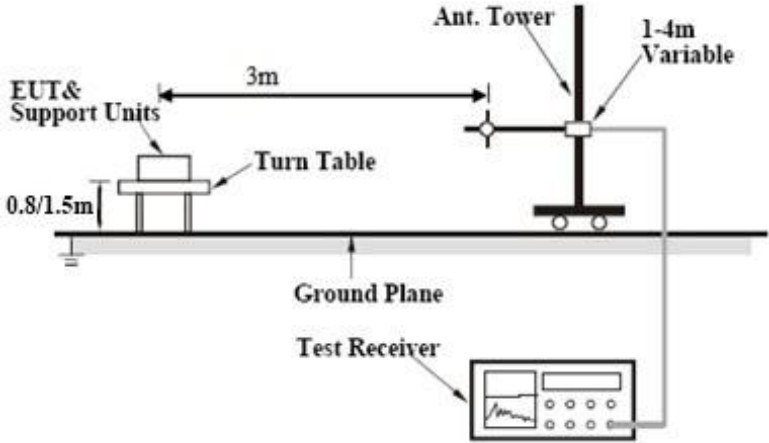Test Setup	
------------	--



Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,</li> </ul>
----------------	--


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**Test Data**     Yes                       N/A  
**Test Plot**     Yes (See below)       N/A

### Test Plots

#### GFSK Mode:

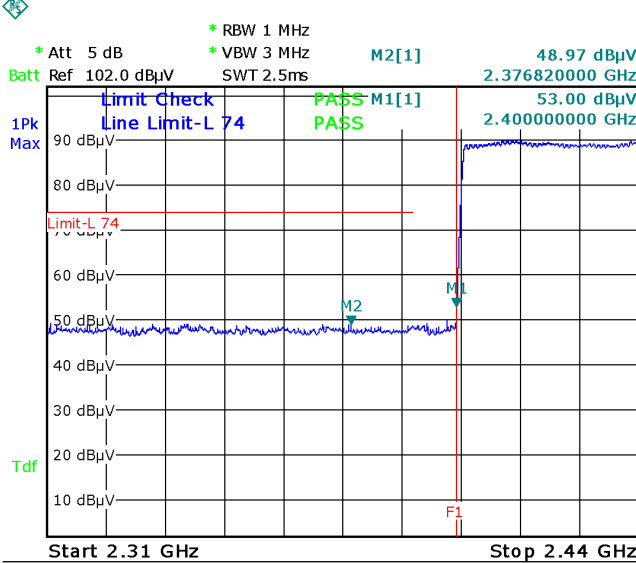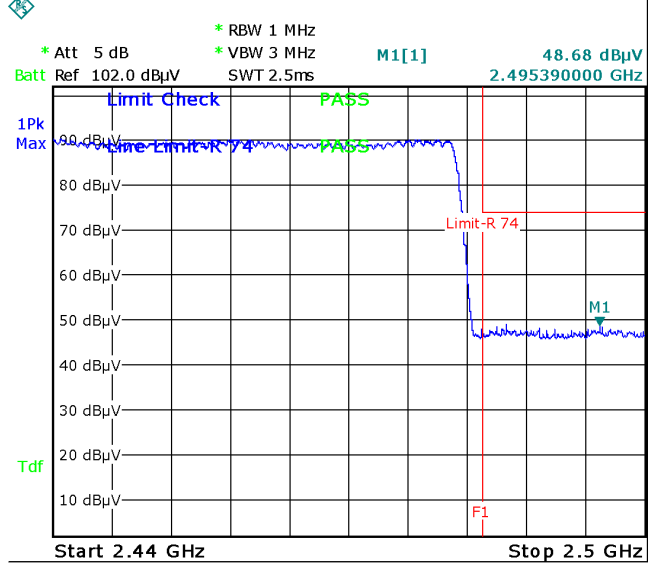
 <p>Date: 19.JUN.2017 16:33:19</p>	 <p>Date: 19.JUN.2017 16:56:57</p>
<p style="text-align: center;"><b>GFSK-Hopping Left Side-PK</b></p> <p style="text-align: center;"><b>Note: F1 is frequency 2400MHz</b></p>	<p style="text-align: center;"><b>GFSK-Hopping Right Side-PK</b></p> <p style="text-align: center;"><b>Note: F1 is frequency 2483.5MHz</b></p>
<p style="text-align: center;">Note: (no need if PK value less than the AV limit)</p>	<p style="text-align: center;">Note: (no need if PK value less than the AV limit)</p>
<p style="text-align: center;"><b>GFSK-Hopping Left Side-AV</b></p>	<p style="text-align: center;"><b>GFSK-Hopping Right Side-AV</b></p>

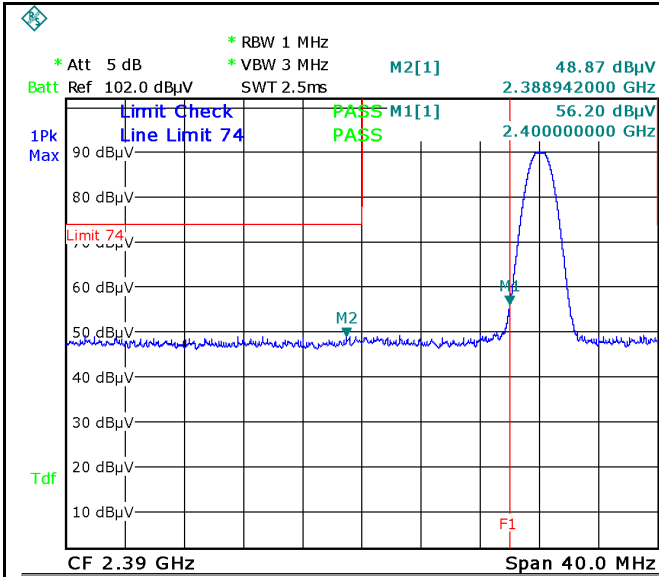

Date: 19.JUN.2017 17:10:09

GFSK-Left Side-PK


Note: F1 is frequency 2400MHz

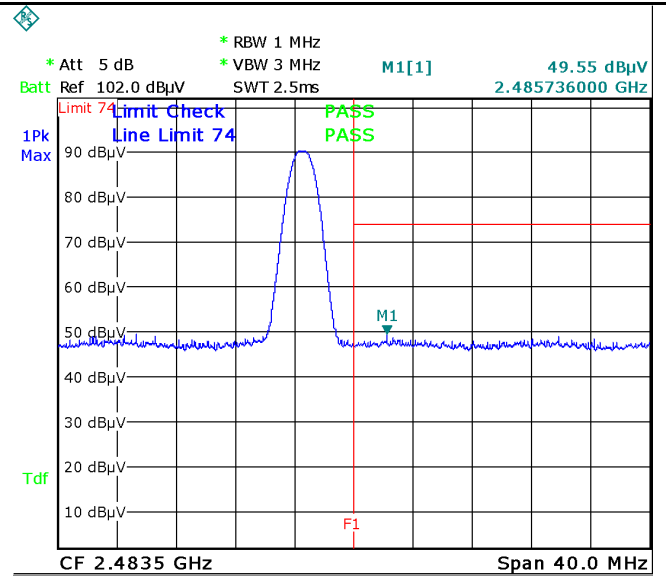

Date: 19.JUN.2017 17:19:58

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

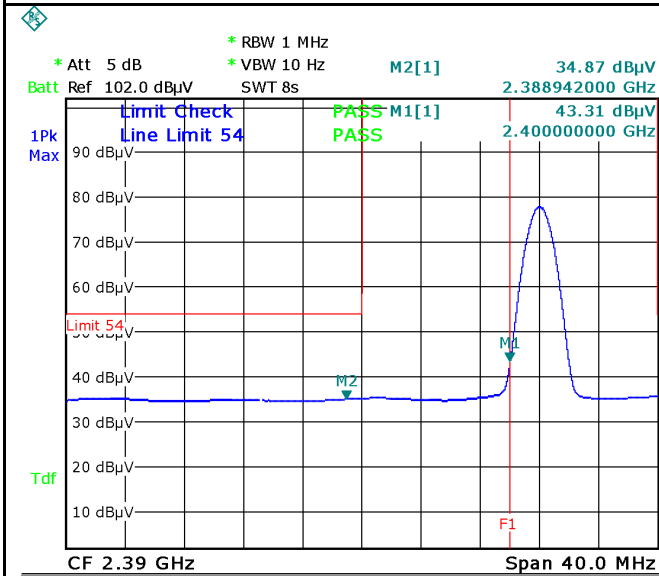



Date: 19.JUN.2017 17:10:44

GFSK-Left Side-AV

Note: (no need if PK value less than the AV limit)

GFSK-Right Side-AV

$\pi/4$  DQPSK Mode:

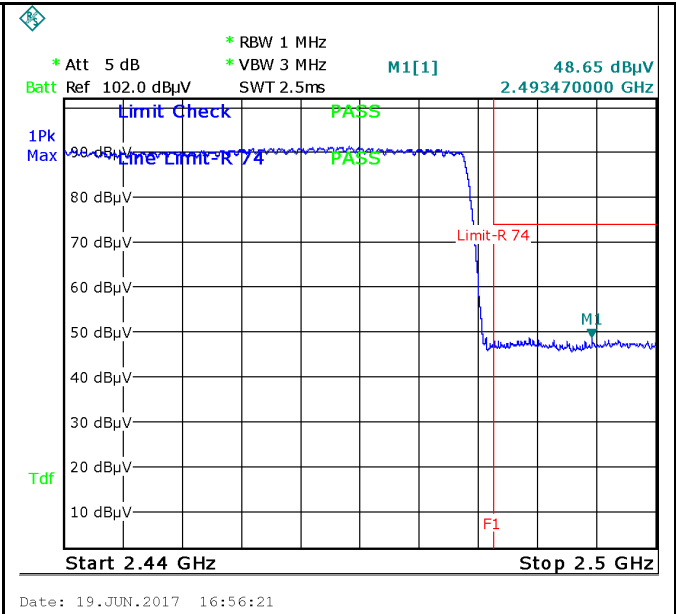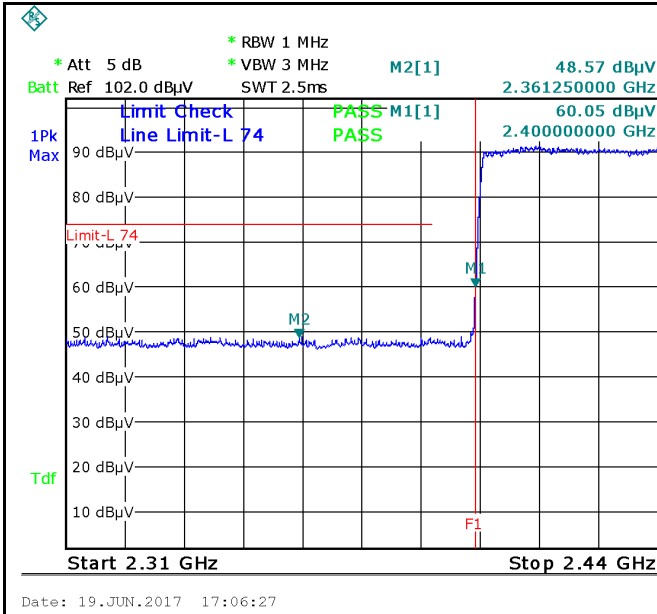


$\pi/4$  DQPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

$\pi/4$  DQPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz

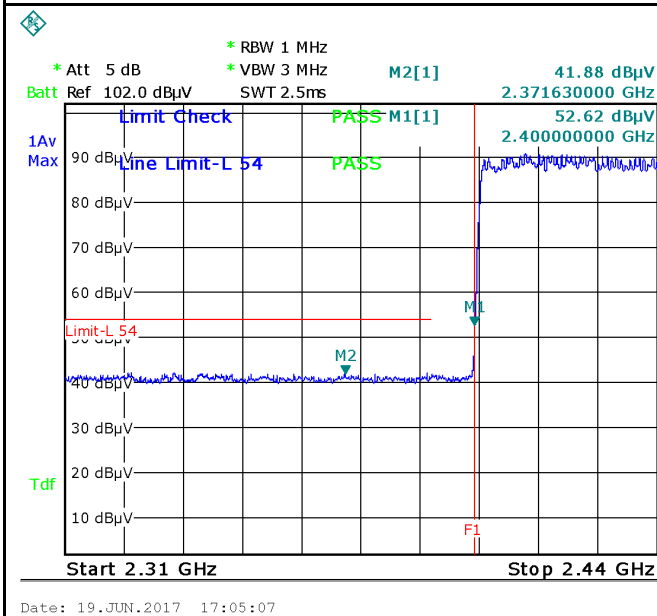


Note: (no need if PK value less than the AV limit)


$\pi/4$  DQPSK-Hopping Left-AV

$\pi/4$  DQPSK-Hopping Right-AV



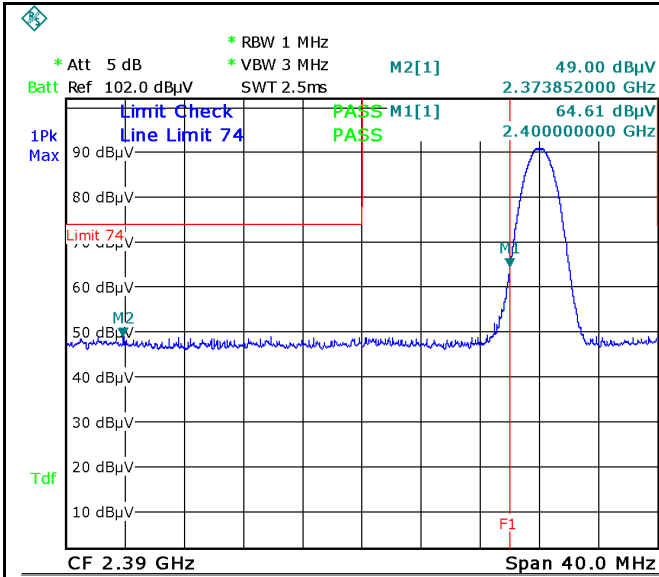

Date: 19.JUN.2017 17:14:19

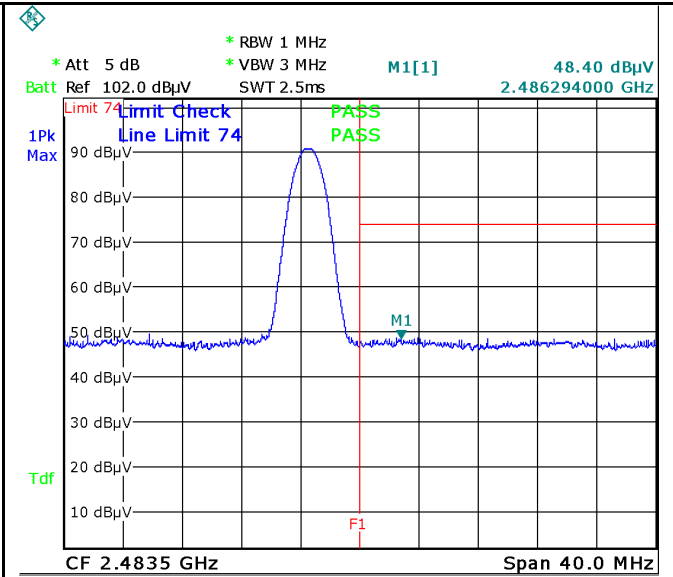


Date: 19.JUN.2017 17:18:23

$\pi$  / 4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

$\pi$  / 4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

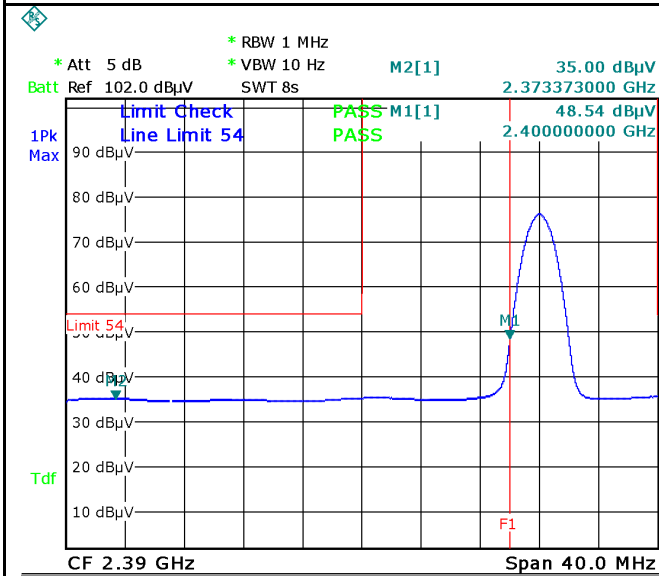


Date: 19.JUN.2017 17:13:22

Note: (no need if PK value less than the AV limit)

$\pi$  / 4 DQPSK-Left Side-AV


$\pi$  / 4 DQPSK-Right Side-AV

**8-DPSK Mode:**

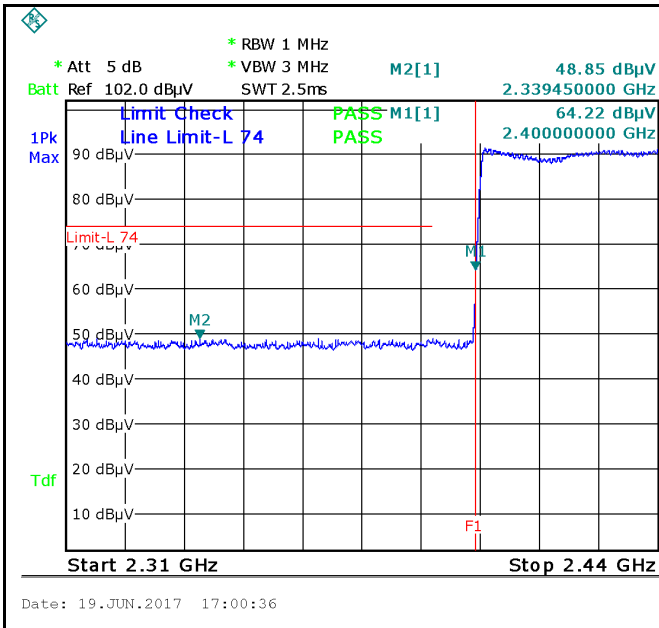


8DPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

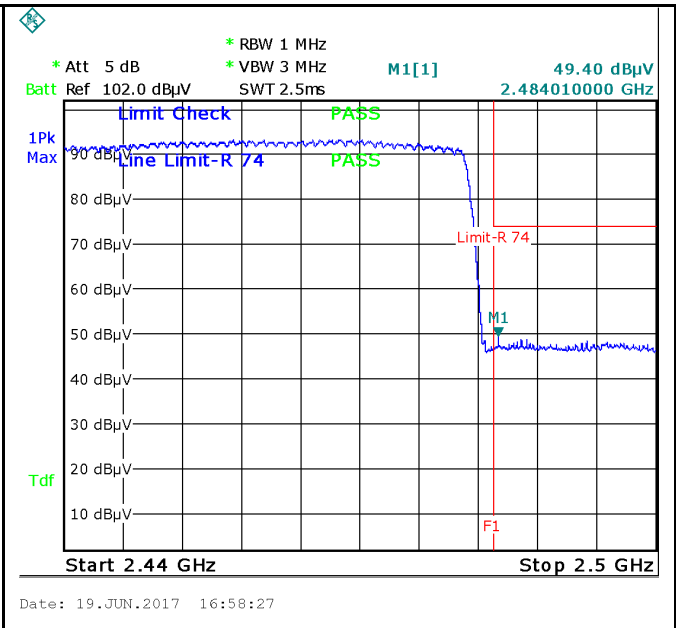

8DPSK-Hopping Right Side-PK


Note: F1 is frequency 2483.5MHz

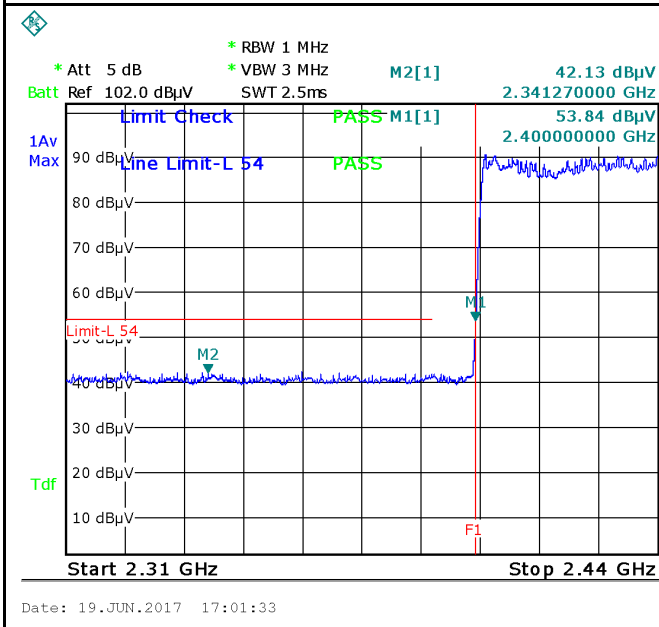


8DPSK-Hopping Left-AV

Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Right-AV

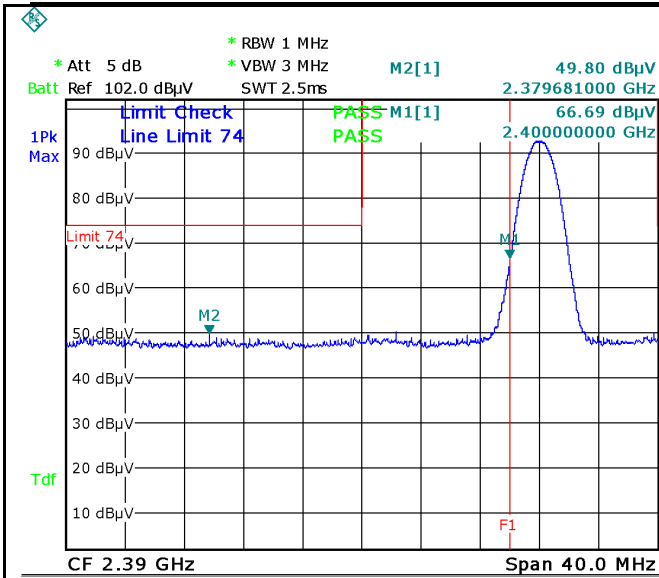

Date: 19.JUN.2017 17:15:20

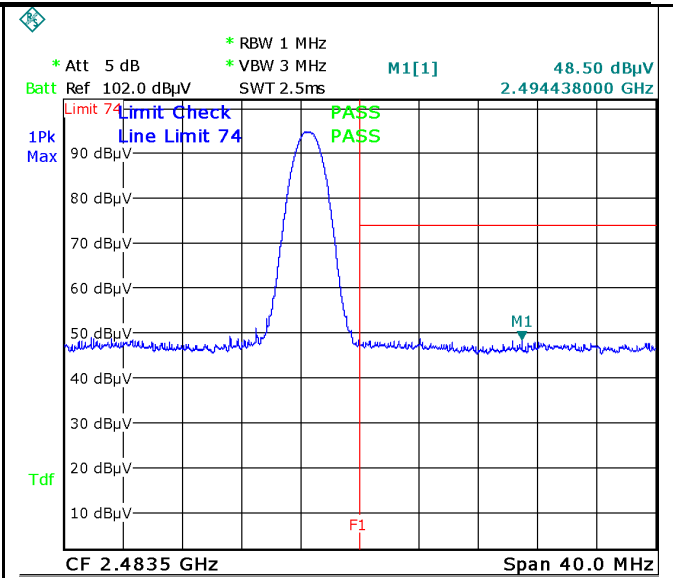


Date: 19.JUN.2017 17:21:18

8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

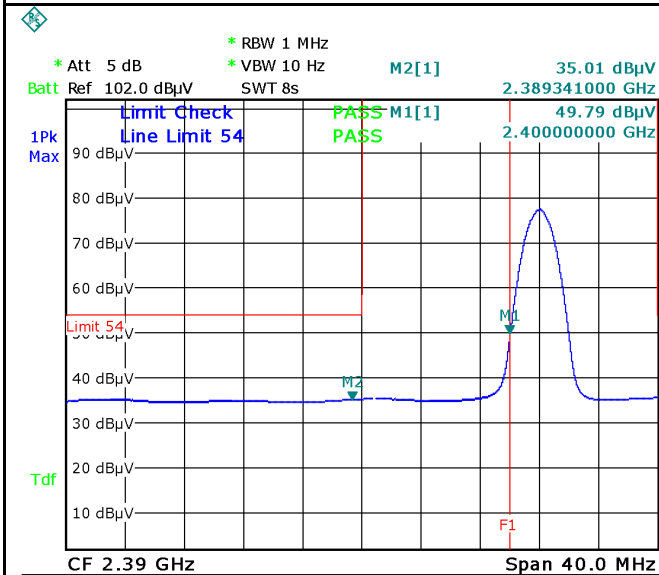

Date: 19.JUN.2017 17:16:10

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV


8DPSK-Right Side-AV

## 6.8 AC Power Line Conducted Emissions

Temperature	24 °C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	June 15, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

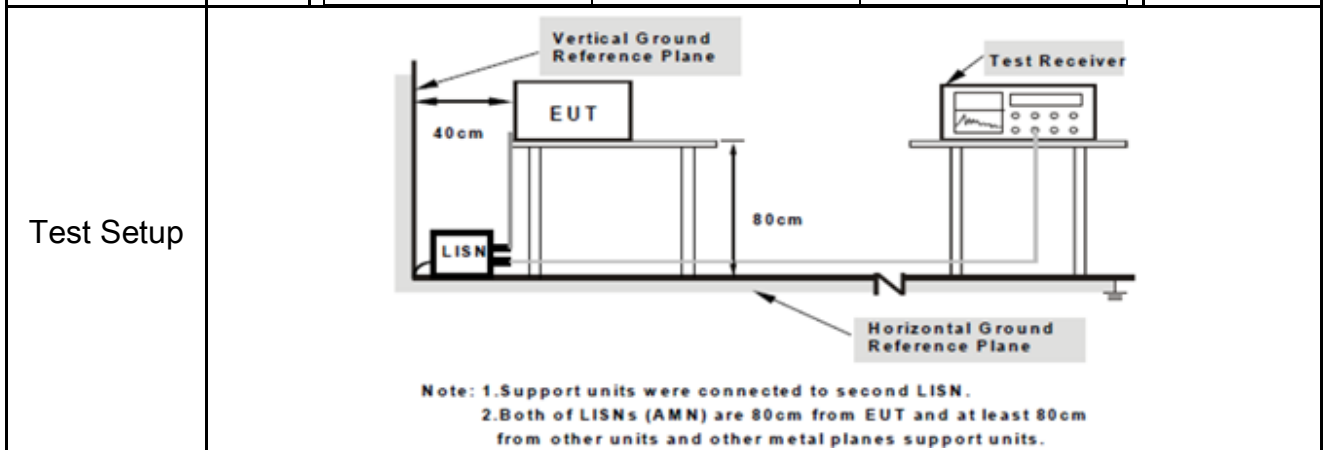

Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>
-----------	---


Test Report	17070437-FCC-R2-V1
Page	37 of 67

	<p>coaxial cable.</p> <ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

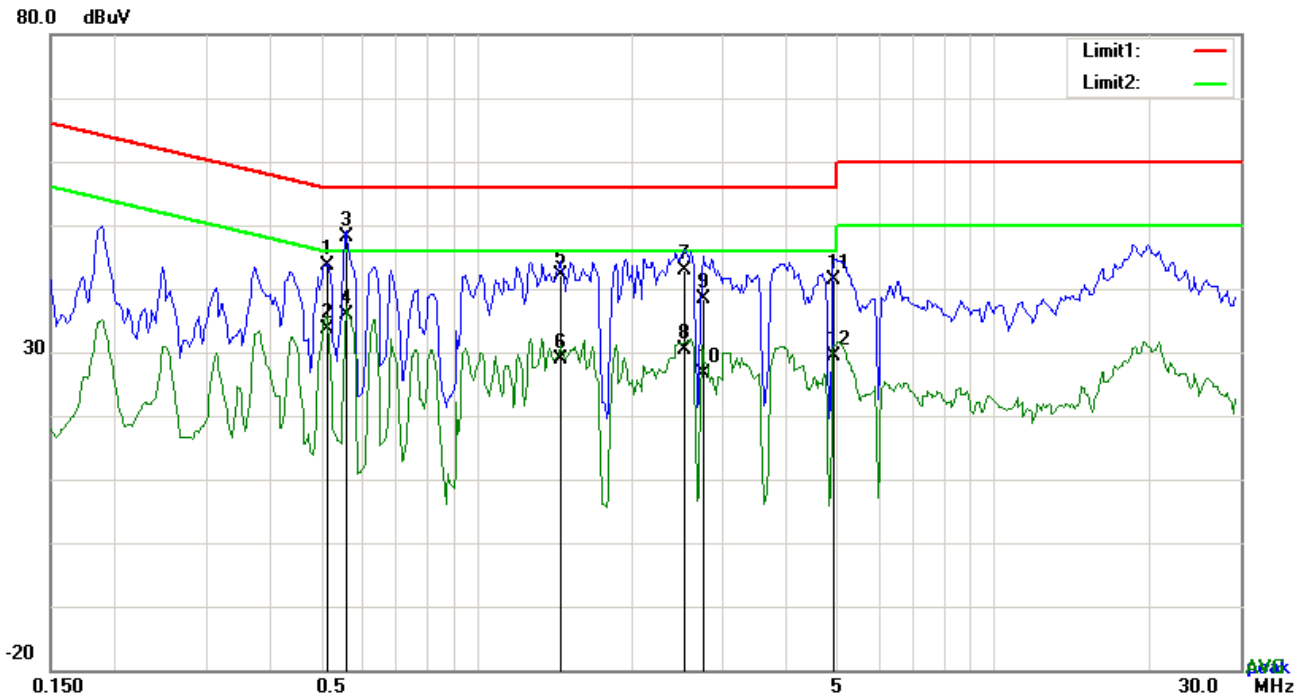


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.5166	33.59	QP	10.03	43.62	56.00	-12.38
2	L1	0.5166	23.59	AVG	10.03	33.62	46.00	-12.38
3	L1	0.5595	38.08	QP	10.03	48.11	56.00	-7.89
4	L1	0.5595	25.92	AVG	10.03	35.95	46.00	-10.05
5	L1	1.4487	31.98	QP	10.04	42.02	56.00	-13.98
6	L1	1.4487	18.72	AVG	10.04	28.76	46.00	-17.24
7	L1	2.5251	32.95	QP	10.05	43.00	56.00	-13.00
8	L1	2.5251	20.25	AVG	10.05	30.30	46.00	-15.70
9	L1	2.7513	28.22	QP	10.05	38.27	56.00	-17.73
10	L1	2.7513	16.63	AVG	10.05	26.68	46.00	-19.32
11	L1	4.9071	31.18	QP	10.08	41.26	56.00	-14.74
12	L1	4.9071	19.38	AVG	10.08	29.46	46.00	-16.54

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

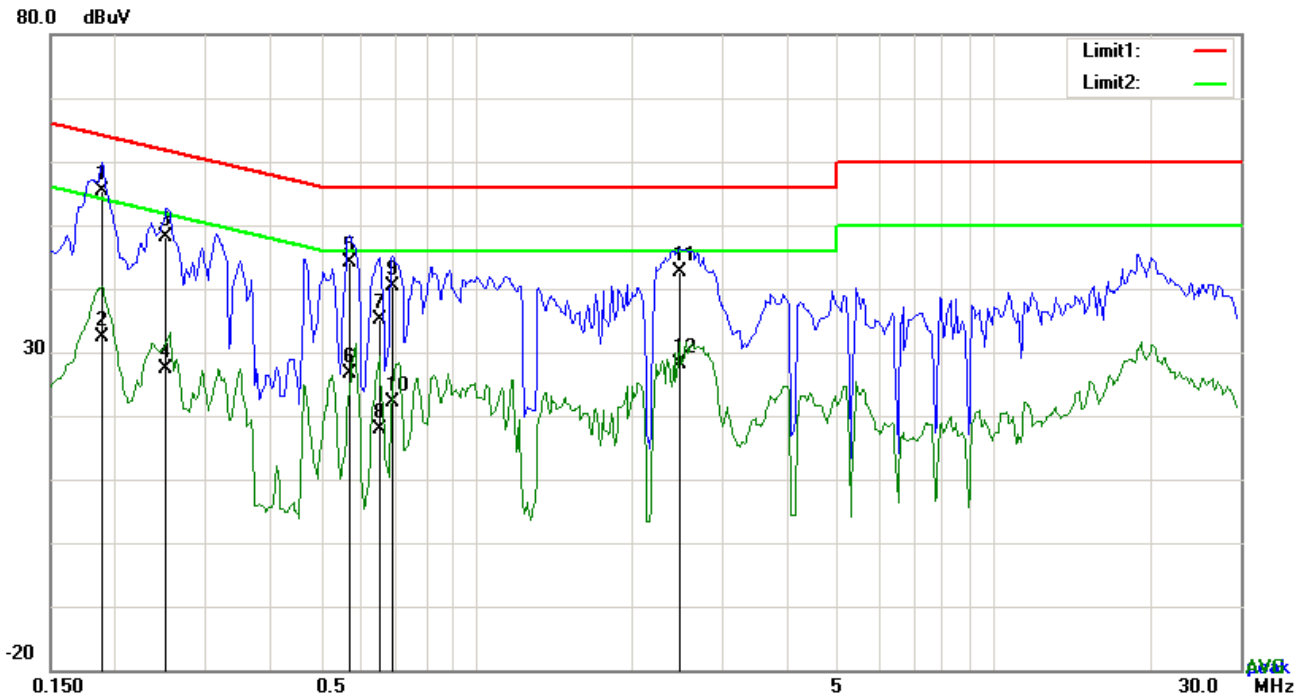


**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1890	45.29	QP	10.02	55.31	64.08	-8.77
2	N	0.1890	22.34	AVG	10.02	32.36	54.08	-21.72
3	N	0.2514	38.10	QP	10.02	48.12	61.71	-13.59
4	N	0.2514	17.46	AVG	10.02	27.48	51.71	-24.23
5	N	0.5673	34.00	QP	10.02	44.02	56.00	-11.98
6	N	0.5673	16.53	AVG	10.02	26.55	46.00	-19.45
7	N	0.6492	25.12	QP	10.02	35.14	56.00	-20.86
8	N	0.6492	7.96	AVG	10.02	17.98	46.00	-28.02
9	N	0.6882	30.37	QP	10.02	40.39	56.00	-15.61
10	N	0.6882	12.17	AVG	10.02	22.19	46.00	-23.81
11	N	2.4705	32.50	QP	10.04	42.54	56.00	-13.46
12	N	2.4705	18.11	AVG	10.04	28.15	46.00	-17.85

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

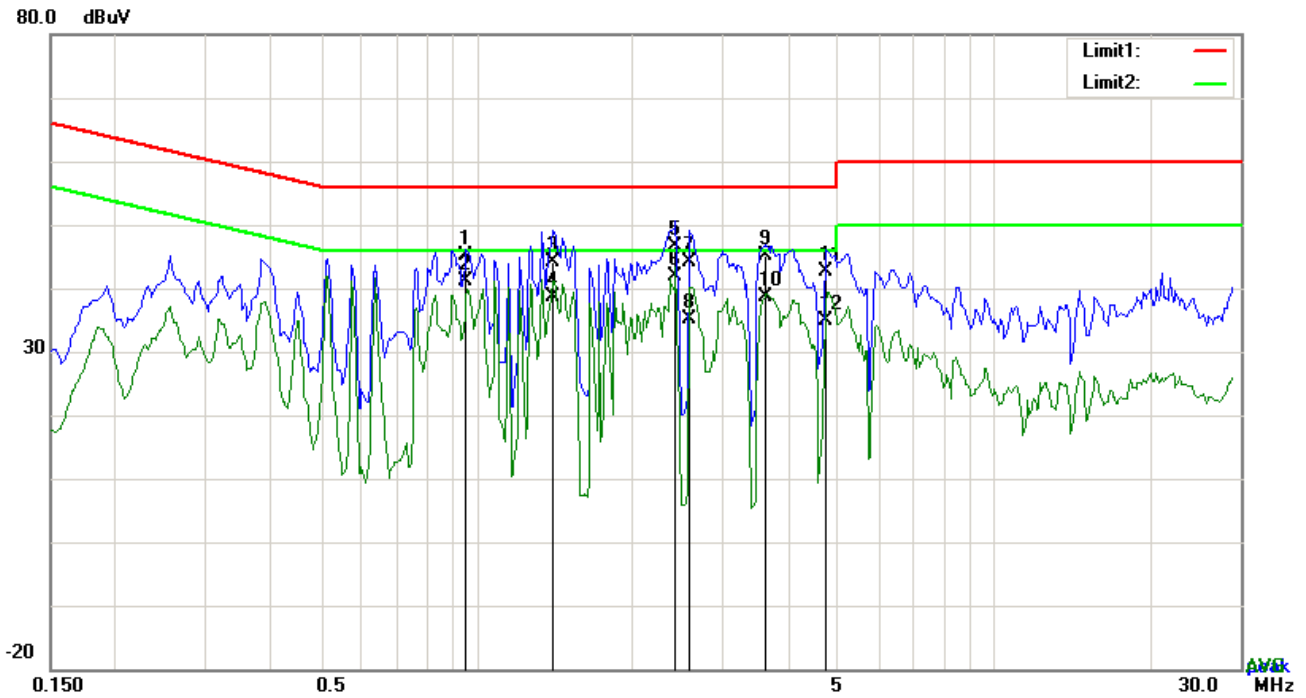


**Test Data**

**Phase Line Plot at 240Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.9573	35.07	QP	10.03	45.10	56.00	-10.90
2	L1	0.9573	30.98	AVG	10.03	41.01	46.00	-4.99
3	L1	1.4097	34.15	QP	10.04	44.19	56.00	-11.81
4	L1	1.4097	28.64	AVG	10.04	38.68	46.00	-7.32
5	L1	2.4237	36.48	QP	10.05	46.53	56.00	-9.47
6	L1	2.4237	31.80	AVG	10.05	41.85	46.00	-4.15
7	L1	2.5680	34.07	QP	10.05	44.12	56.00	-11.88
8	L1	2.5680	25.11	AVG	10.05	35.16	46.00	-10.84
9	L1	3.6279	35.01	QP	10.06	45.07	56.00	-10.93
10	L1	3.6279	28.67	AVG	10.06	38.73	46.00	-7.27
11	L1	4.7238	32.55	QP	10.08	42.63	56.00	-13.37
12	L1	4.7238	24.77	AVG	10.08	34.85	46.00	-11.15



<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

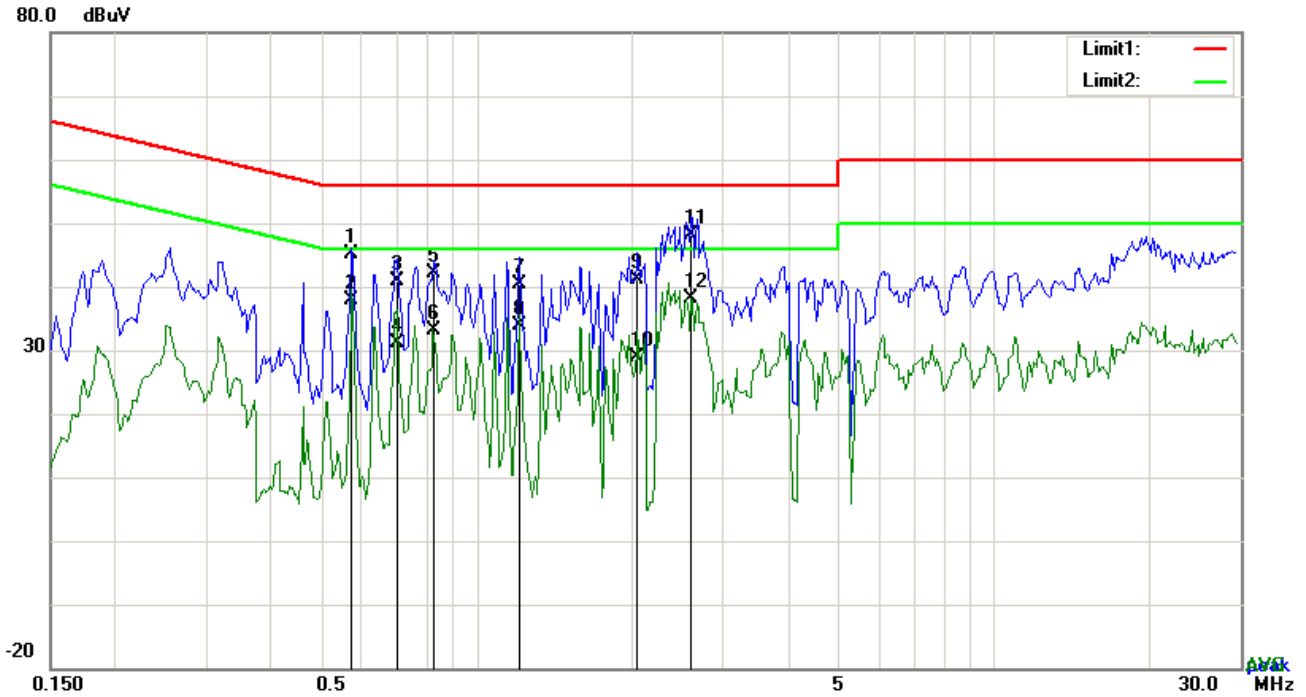

**Test Data**

**Phase Neutral Plot at 240Vac, 60Hz**


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.5751	35.09	QP	10.02	45.11	56.00	-10.89
2	N	0.5751	27.86	AVG	10.02	37.88	46.00	-8.12
3	N	0.7038	30.87	QP	10.02	40.89	56.00	-15.11
4	N	0.7038	21.06	AVG	10.02	31.08	46.00	-14.92
5	N	0.8286	31.98	QP	10.03	42.01	56.00	-13.99
6	N	0.8286	23.03	AVG	10.03	33.06	46.00	-12.94
7	N	1.2108	30.43	QP	10.03	40.46	56.00	-15.54
8	N	1.2108	23.82	AVG	10.03	33.85	46.00	-12.15
9	N	2.0454	31.20	QP	10.04	41.24	56.00	-14.76
10	N	2.0454	18.93	AVG	10.04	28.97	46.00	-17.03
11	N	2.6070	38.19	QP	10.05	48.24	56.00	-7.76
12	N	2.6070	27.96	AVG	10.05	38.01	46.00	-7.99


## 6.9 Radiated Emissions & Restricted Band

Temperature	25 °C
Relative Humidity	51%
Atmospheric Pressure	1020mbar
Test date :	June 14, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>																
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V}/\text{m}</math>)</th> </tr> </thead> <tbody> <tr> <td>0.009~0.490</td> <td>2400/F(KHz)</td> </tr> <tr> <td>0.490~1.705</td> <td>24000/F(KHz)</td> </tr> <tr> <td>1.705~30.0</td> <td>30</td> </tr> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength ( $\mu\text{V}/\text{m}$ )															
		0.009~0.490		2400/F(KHz)															
		0.490~1.705		24000/F(KHz)															
		1.705~30.0		30															
		30 – 88		100															
		88 – 216		150															
216 960	200																		
Above 960	500																		

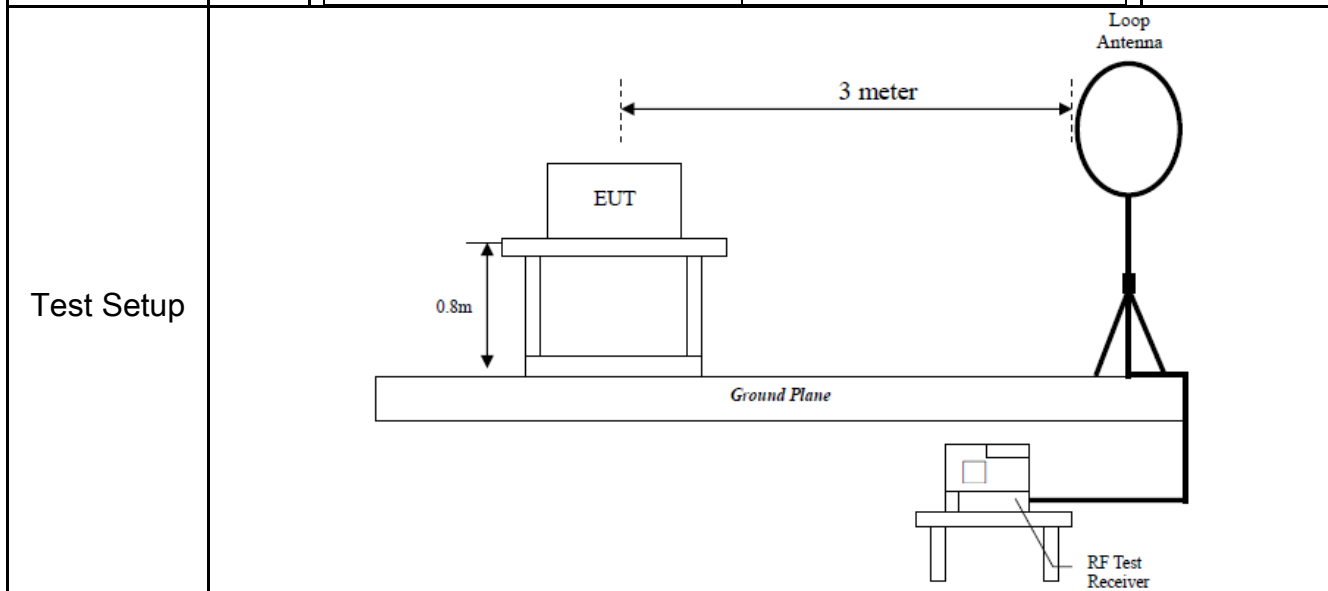

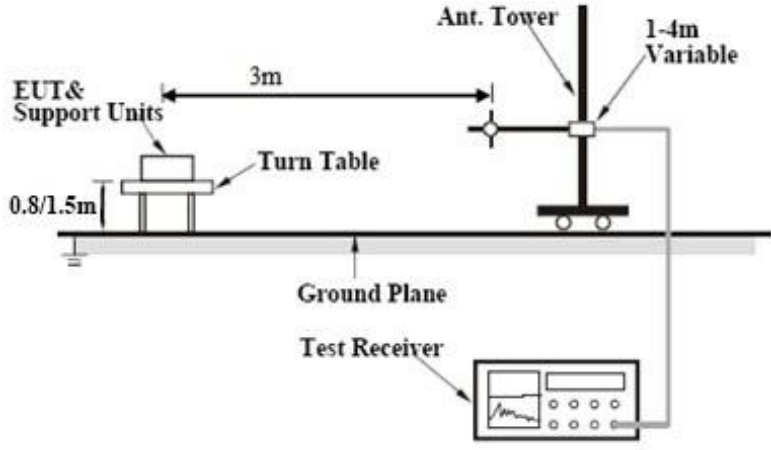	
<p>Procedure</p>	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:             <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> <li>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>
<p>Remark</p>	
<p>Result</p>	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes

N/A

Test Plot  Yes (See below)  N/A

**Test Result:**

<b>Test Mode:</b>	Bluetooth Mode
-------------------	----------------

Frequency range: 9KHz - 30MHz

Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

**30MHz -1GHz**

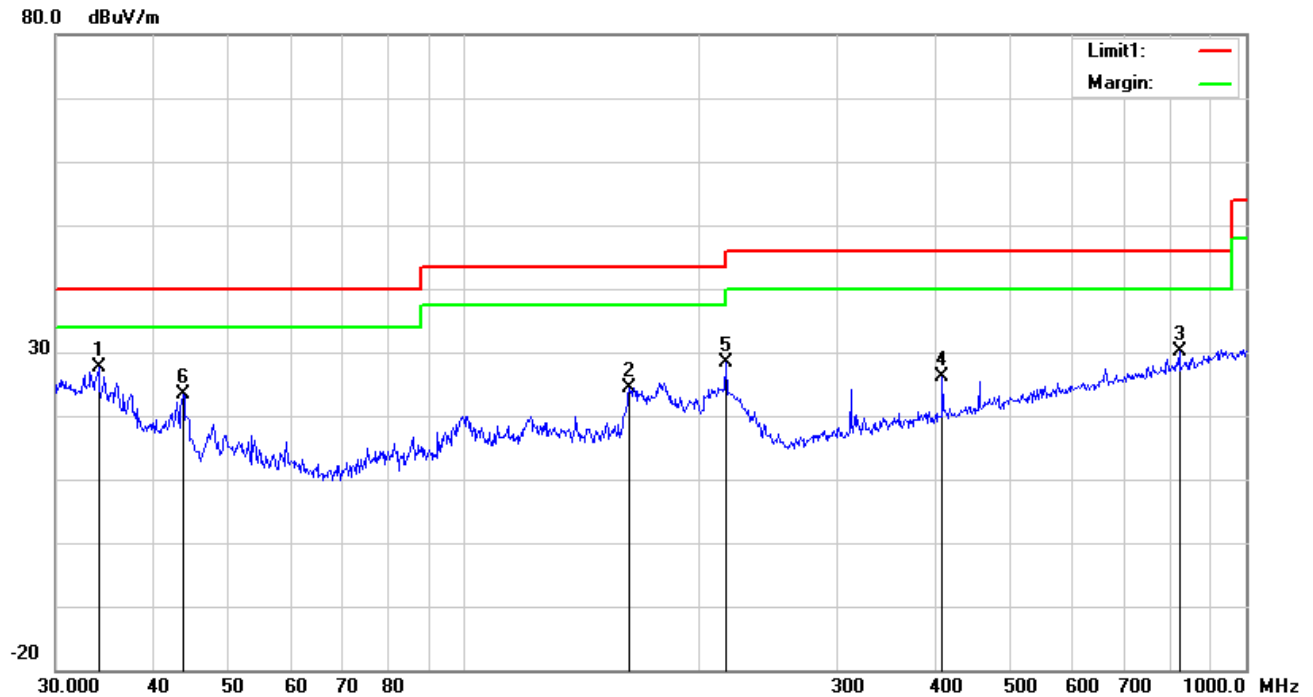


**Test Data**

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee ( )
1	H	34.0365	30.75	peak	18.29	22.26	0.73	27.51	40.00	-12.49	100	52
2	H	162.6106	32.84	peak	12.39	22.27	1.38	24.34	43.50	-19.16	100	5
3	H	821.7104	26.66	peak	21.64	21.09	2.92	30.13	46.00	-15.87	100	260
4	H	408.9460	30.24	peak	15.88	21.99	2.03	26.16	46.00	-19.84	100	202
5	H	216.0240	37.24	peak	11.88	22.35	1.59	28.36	46.00	-17.64	100	279
6	H	43.6585	33.51	peak	11.49	22.29	0.76	23.47	40.00	-16.53	100	275

### 30MHz -1GHz

80.0 dBuV/m

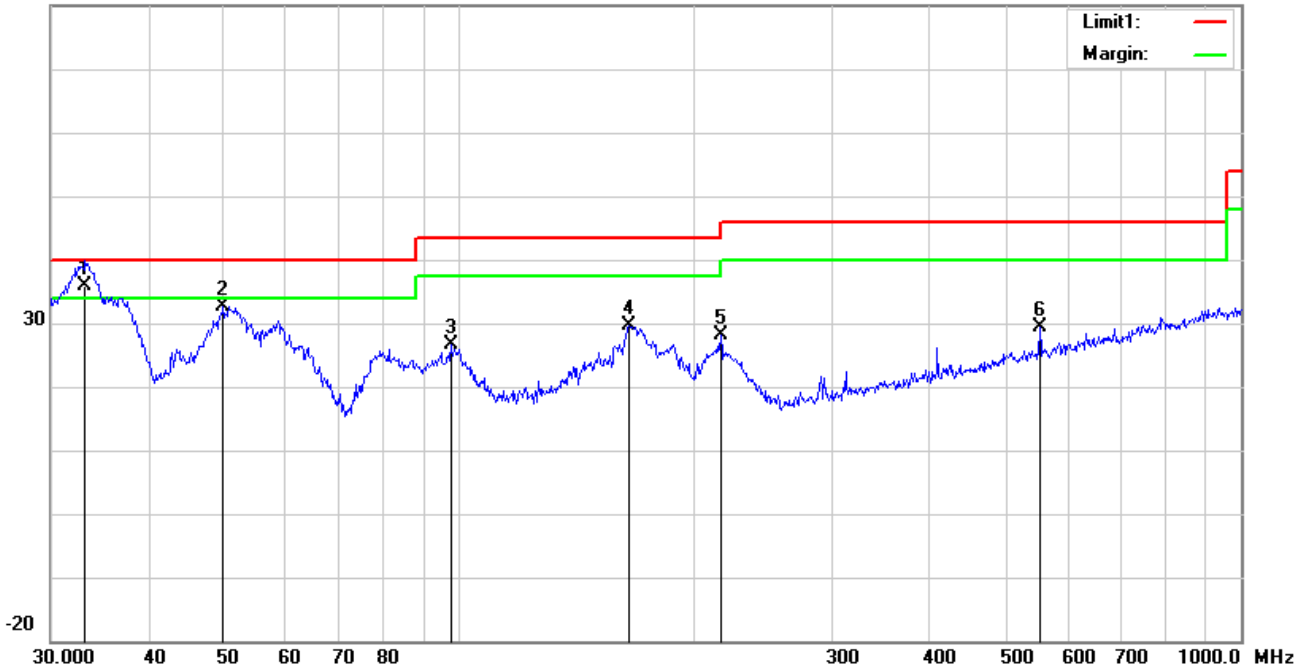

#### Test Data

#### Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee ( )
1	V	33.2112	38.42	QP	18.93	22.26	0.71	35.80	40.00	-4.20	200	338
2	V	49.8814	45.81	peak	8.45	22.38	0.80	32.68	40.00	-7.32	100	4
3	V	97.4560	38.20	peak	9.79	22.32	1.05	26.72	43.50	-16.78	100	19
4	V	164.9075	38.20	peak	12.21	22.27	1.38	29.52	43.50	-13.98	100	344
5	V	216.0240	37.00	peak	11.88	22.35	1.59	28.12	46.00	-17.88	100	58
6	V	552.8833	30.13	peak	18.44	21.69	2.48	29.36	46.00	-16.64	100	74

**Above 1GHz**

<b>Test Mode:</b>	<b>Transmitting Mode</b>
-------------------	--------------------------

**Low Channel: GFSK Mode (Worst Case) (2402 MHz)**

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	39.82	AV	V	33.67	6.86	32.66	47.69	54	-6.31
4804	39.26	AV	H	33.67	6.86	32.66	47.13	54	-6.87
4804	47.86	PK	V	33.67	6.86	32.66	55.73	74	-18.27
4804	46.09	PK	H	33.67	6.86	32.66	53.96	74	-20.04
3811	23.67	AV	V	31.41	6.8	49.2	47.53	54	-6.47
3811	24.95	AV	H	31.41	6.8	49.2	48.81	54	-5.19
3811	40.83	PK	V	31.41	6.8	49.2	64.69	74	-9.31
3811	42.35	PK	H	31.41	6.8	49.2	66.21	74	-7.79

**Middle Channel: GFSK Mode (Worst Case) (2441 MHz)**

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4882	38.45	AV	V	33.71	6.95	32.74	46.37	54	-7.63
4882	38.63	AV	H	33.71	6.95	32.74	46.55	54	-7.45
4882	48.62	PK	V	33.71	6.95	32.74	56.54	74	-17.46
4882	46.71	PK	H	33.71	6.95	32.74	54.63	74	-19.37
5597	25.64	AV	V	34.35	8.41	48.37	49.56	54	-4.44
5597	23.24	AV	H	34.35	8.41	48.37	47.16	54	-6.84
5597	41.61	PK	V	34.35	8.41	48.37	65.53	74	-8.47
5597	40.76	PK	H	34.35	8.41	48.37	64.68	74	-9.32

**High Channel: GFSK Mode (Worst Case) (2480 MHz)**

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	37.94	AV	V	33.9	6.76	32.74	45.86	54	-8.14
4960	38.45	AV	H	33.9	6.76	32.74	46.37	54	-7.63
4960	48.25	PK	V	33.9	6.76	32.74	56.17	74	-17.83
4960	46.63	PK	H	33.9	6.76	32.74	54.55	74	-19.45
17821	24.29	AV	V	45.22	11.35	32.38	48.48	54	-5.52
17821	24.27	AV	H	45.22	11.35	32.38	48.46	54	-5.54
17821	42.52	PK	V	45.22	11.35	32.38	66.71	74	-7.29
17821	40.51	PK	H	45.22	11.35	32.38	64.7	74	-9.3

**Note:**

- 1, The testing has been conformed to  $10 \times 2480 \text{ MHz} = 24,800 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
ISN	ISN T800	34373	09/24/2016	09/23/2017	<input type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Active Antenna (9kHz-30MHz)	AL-130	121031	10/13/2016	10/12/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>


## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Front View

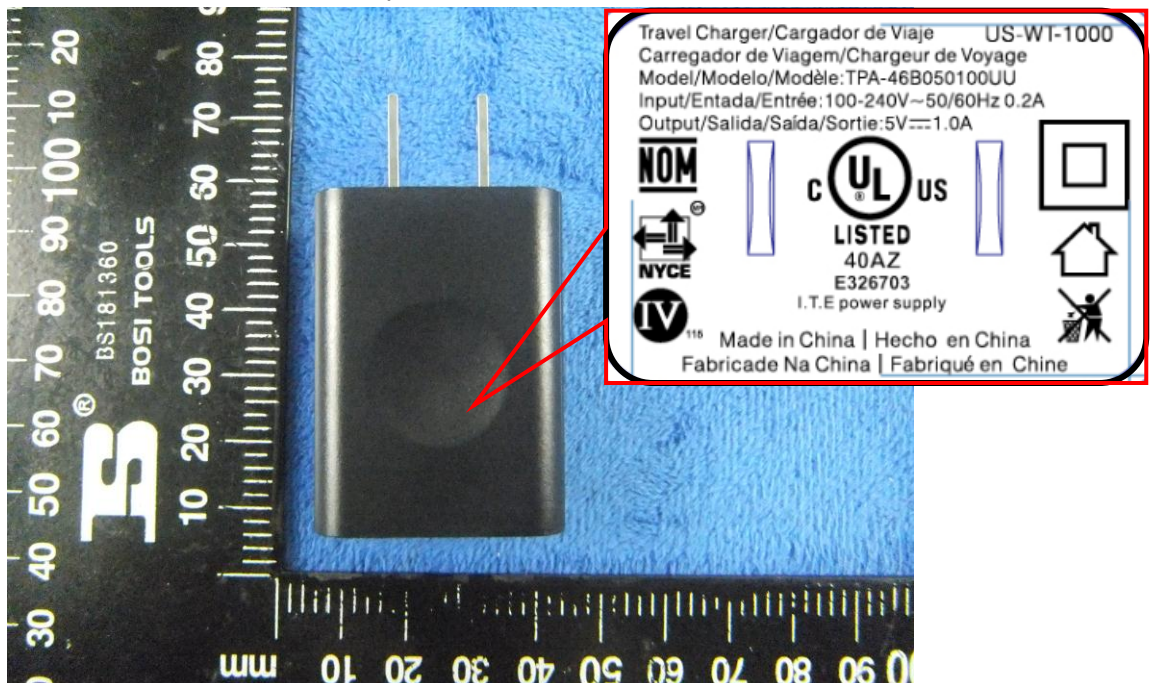


EUT - Front View




EUT - Rear View



EUT - Top View

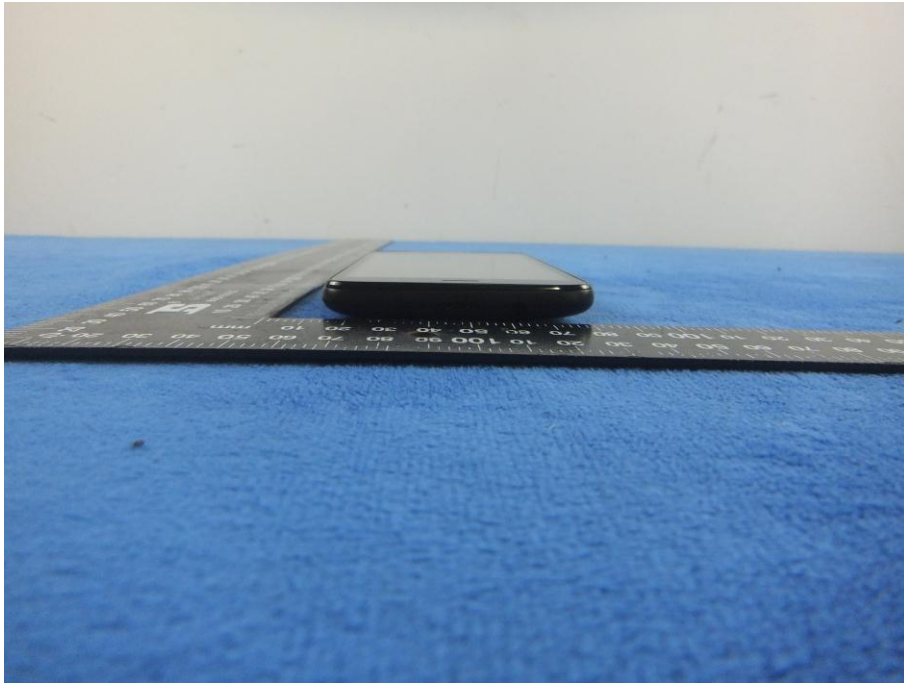


EUT - Bottom View

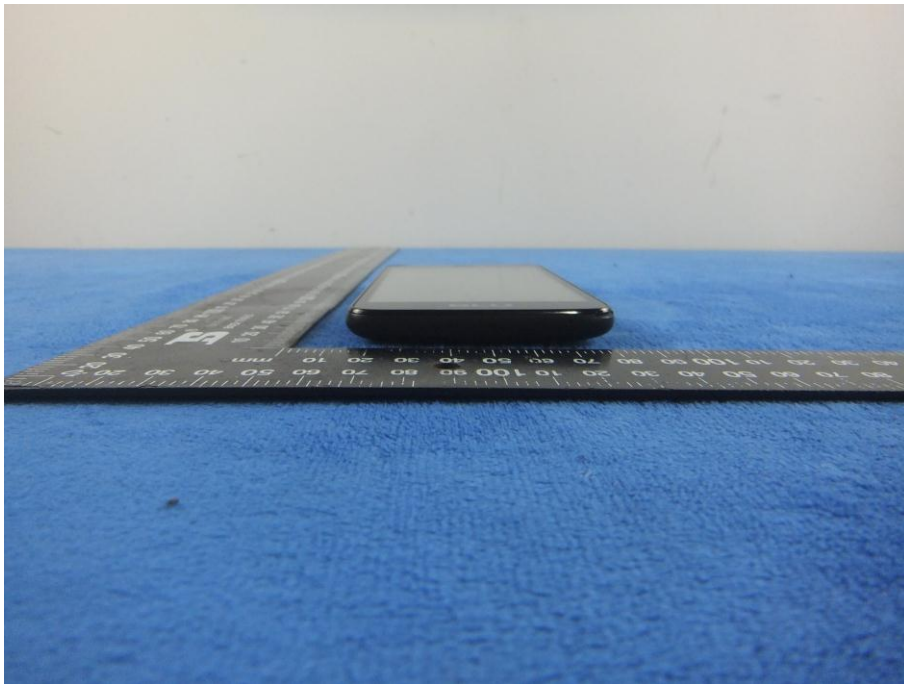

EUT - Left View



EUT - Right View

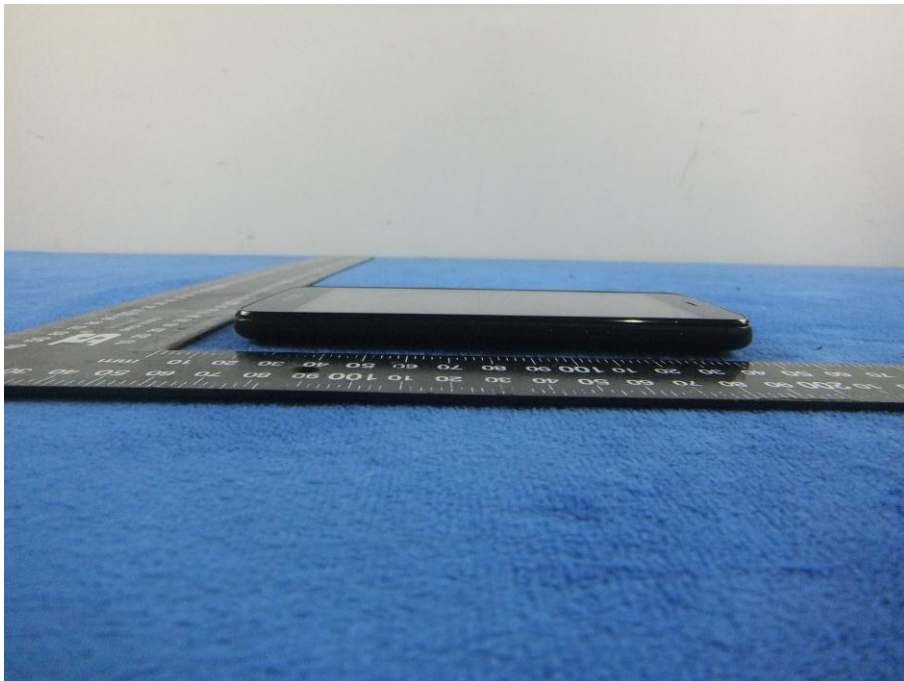

**Annex B.ii. Photograph: EUT Internal Photo**


Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View

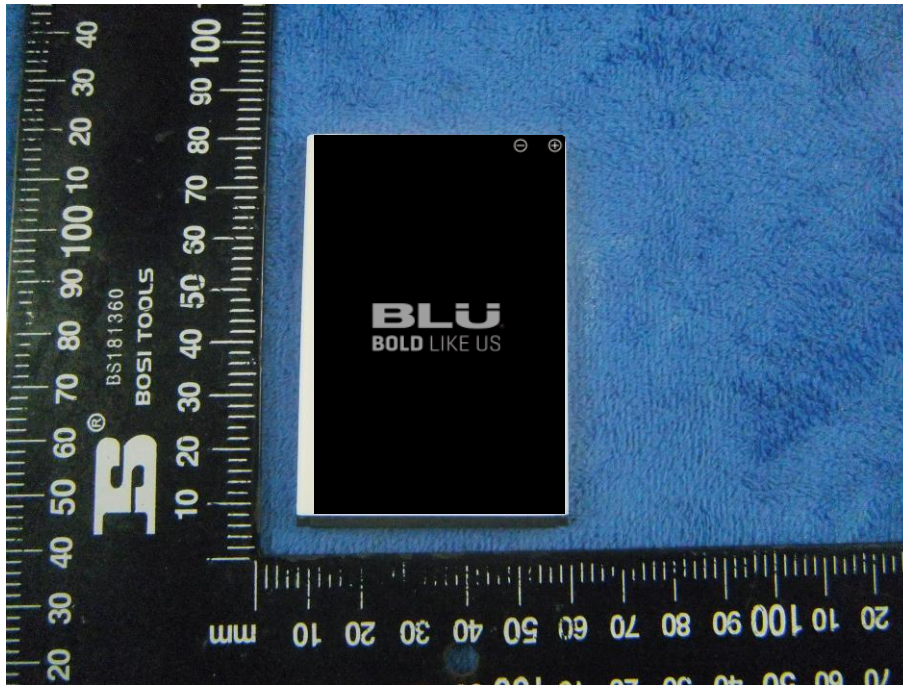


Battery - Rear View

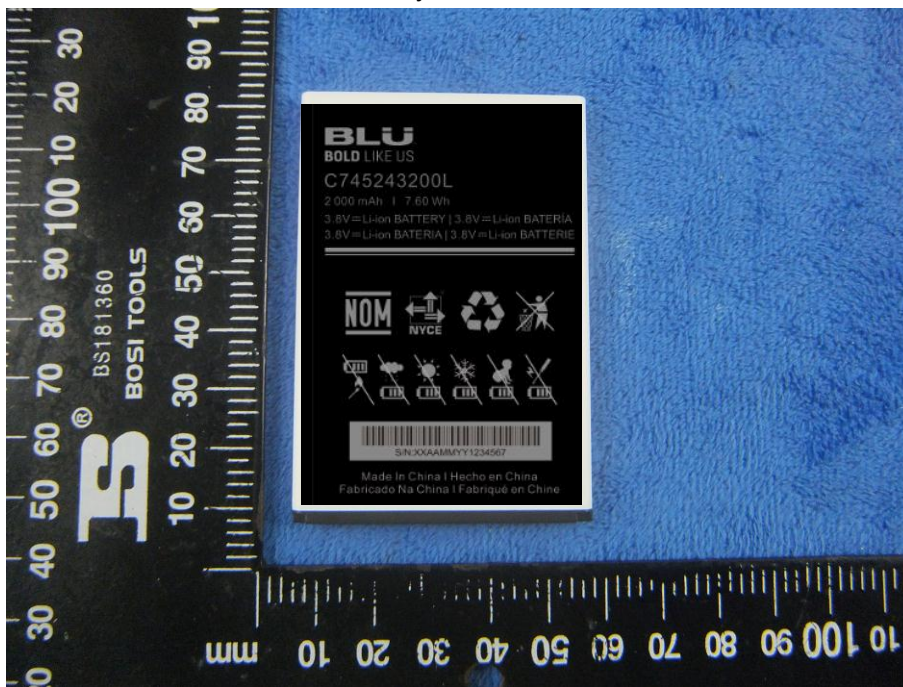

Mainboard without Shielding - Front View

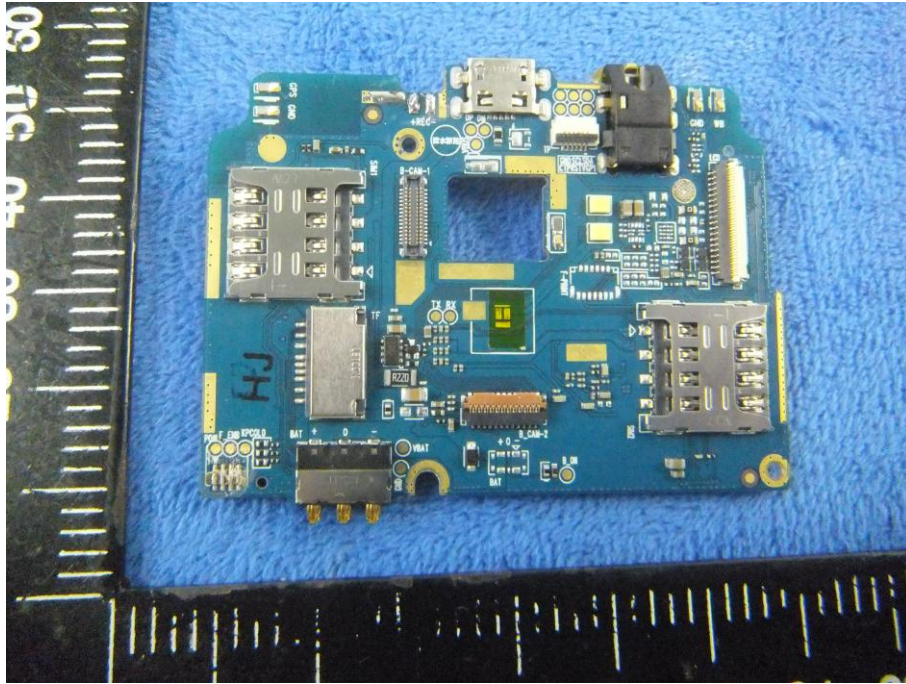


Mainboard with Shielding - Rear View

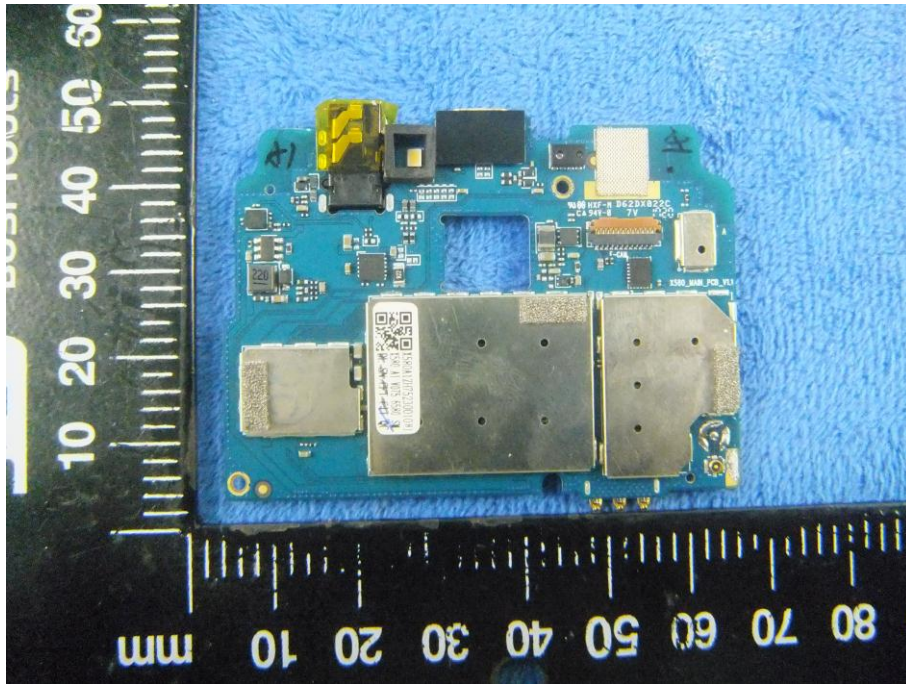





Mainboard without Shielding - Rear View

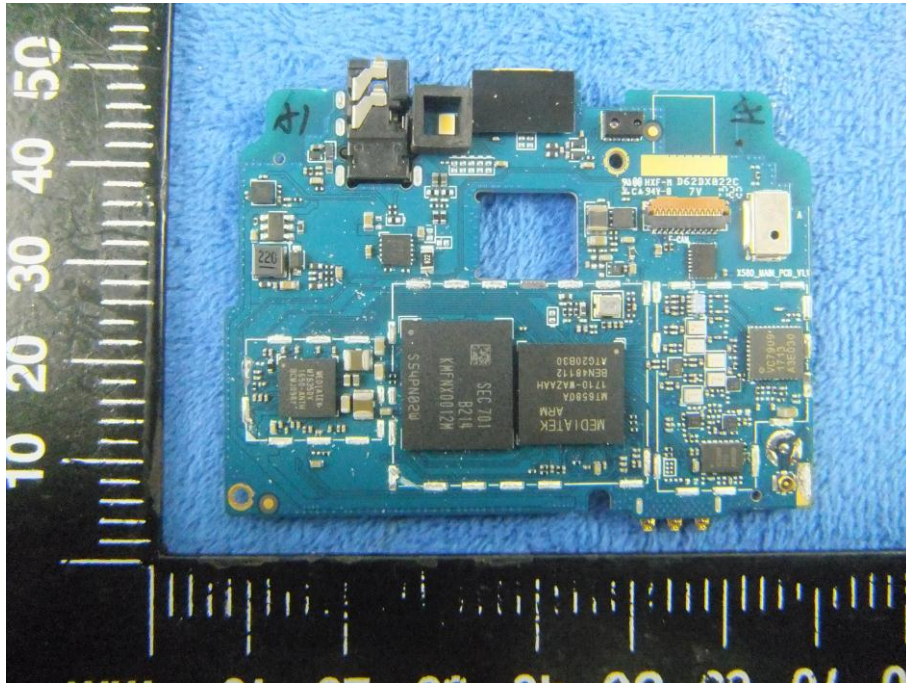

Small Mainboard - Front View

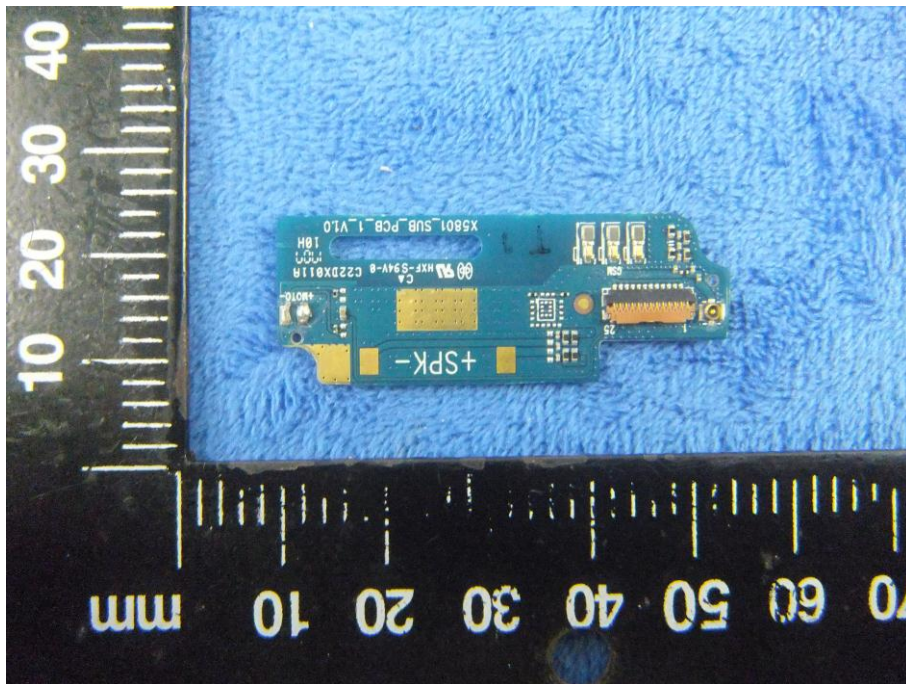


Small Mainboard - Rear View

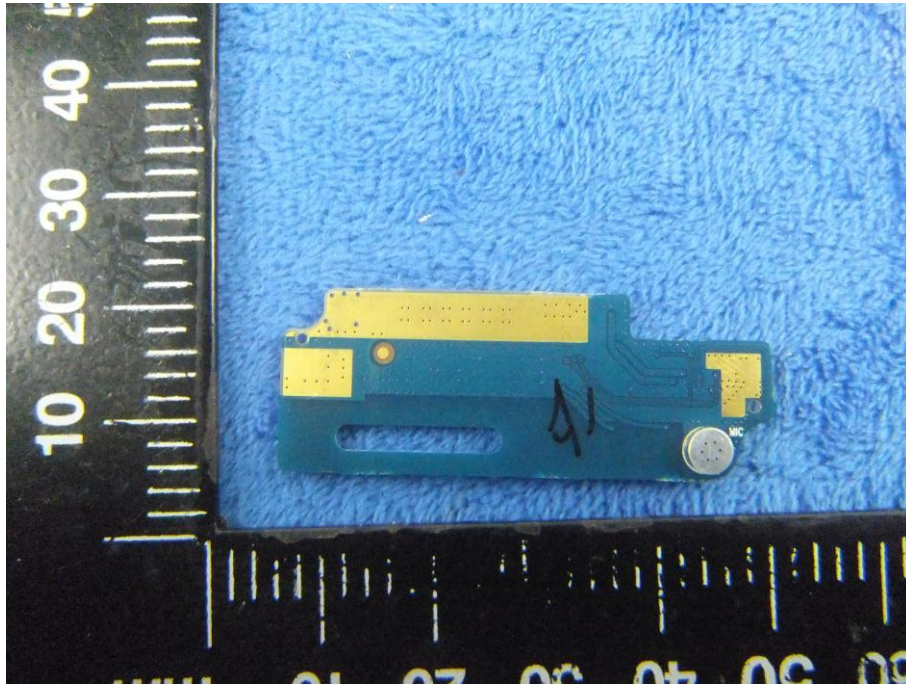


LCD - Front View




LCD – Rear View

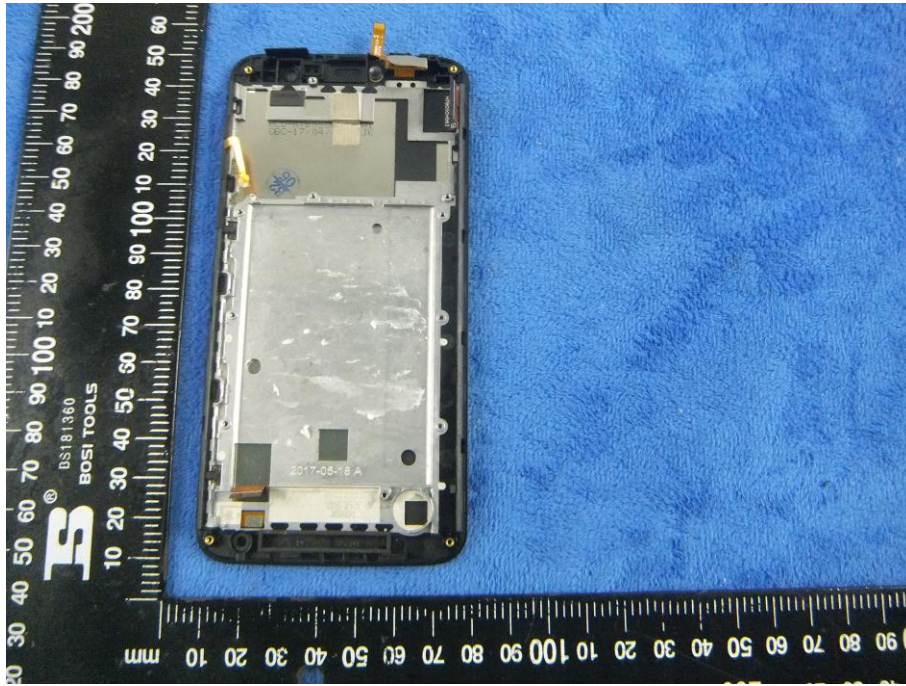


GSM/PCS/UMTS - Antenna View

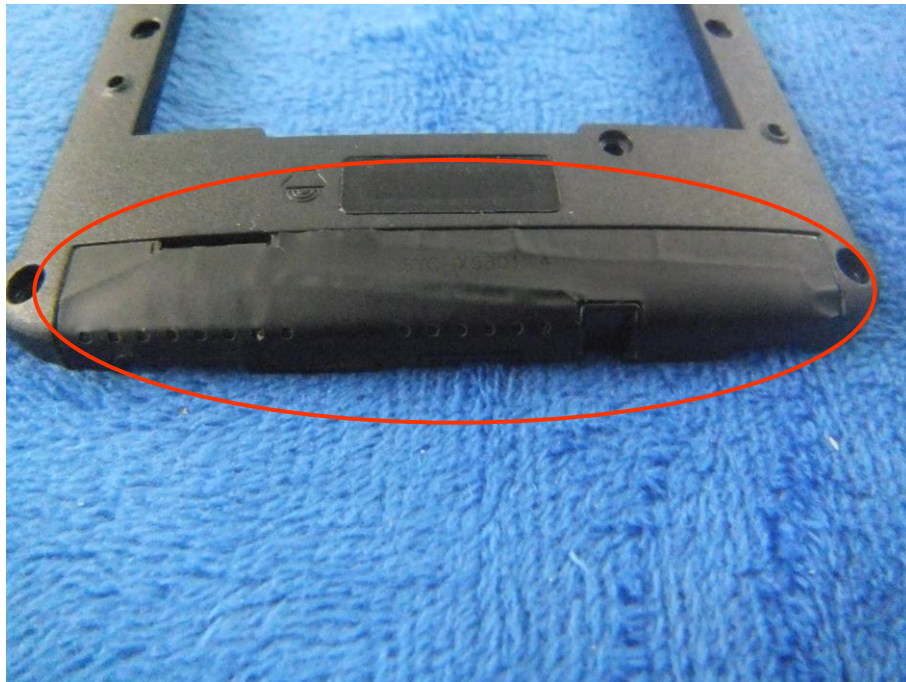

BT/WIFI - Antenna View

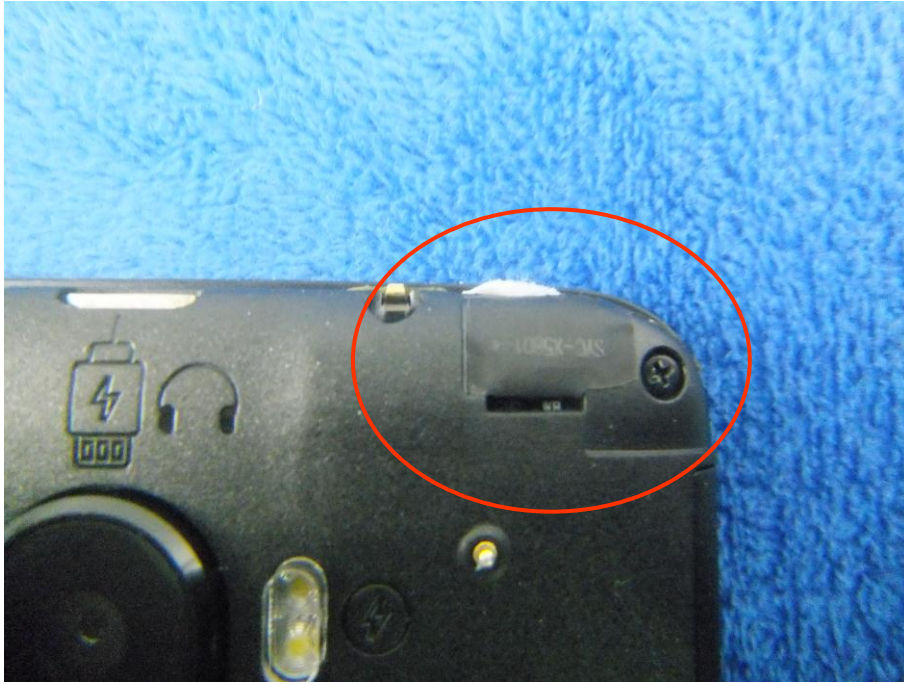

GPS - Antenna View

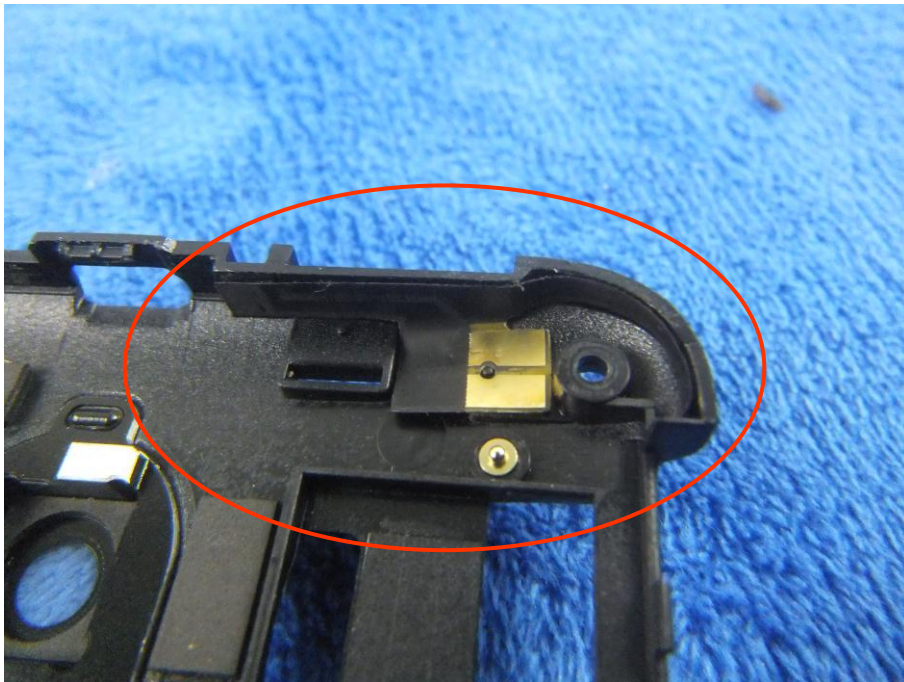


**Annex B.iii. Photograph: Test Setup Photo**




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

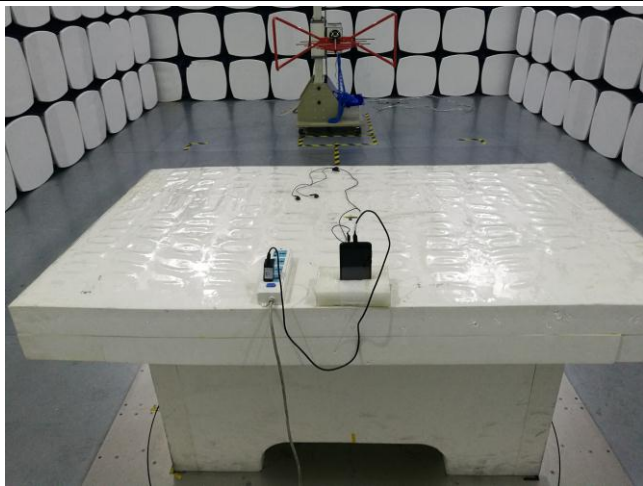

Radiated Spurious Emissions Test Setup Below 1GHz

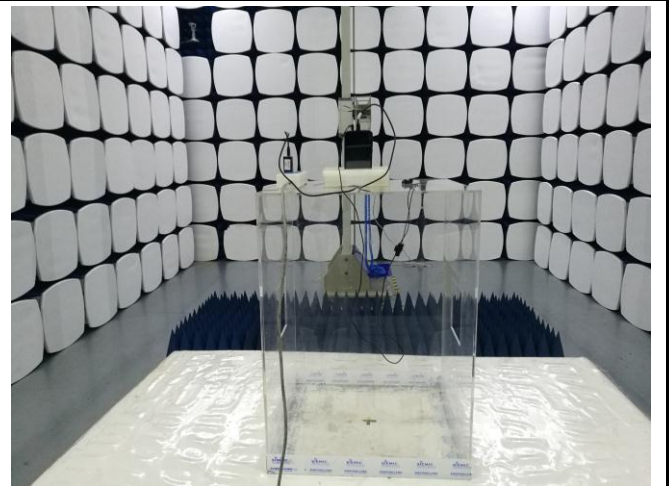


Radiated Spurious Emissions Test Setup Above  
1GHz


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK


#### Block Configuration Diagram for AC Line Conducted Emissions

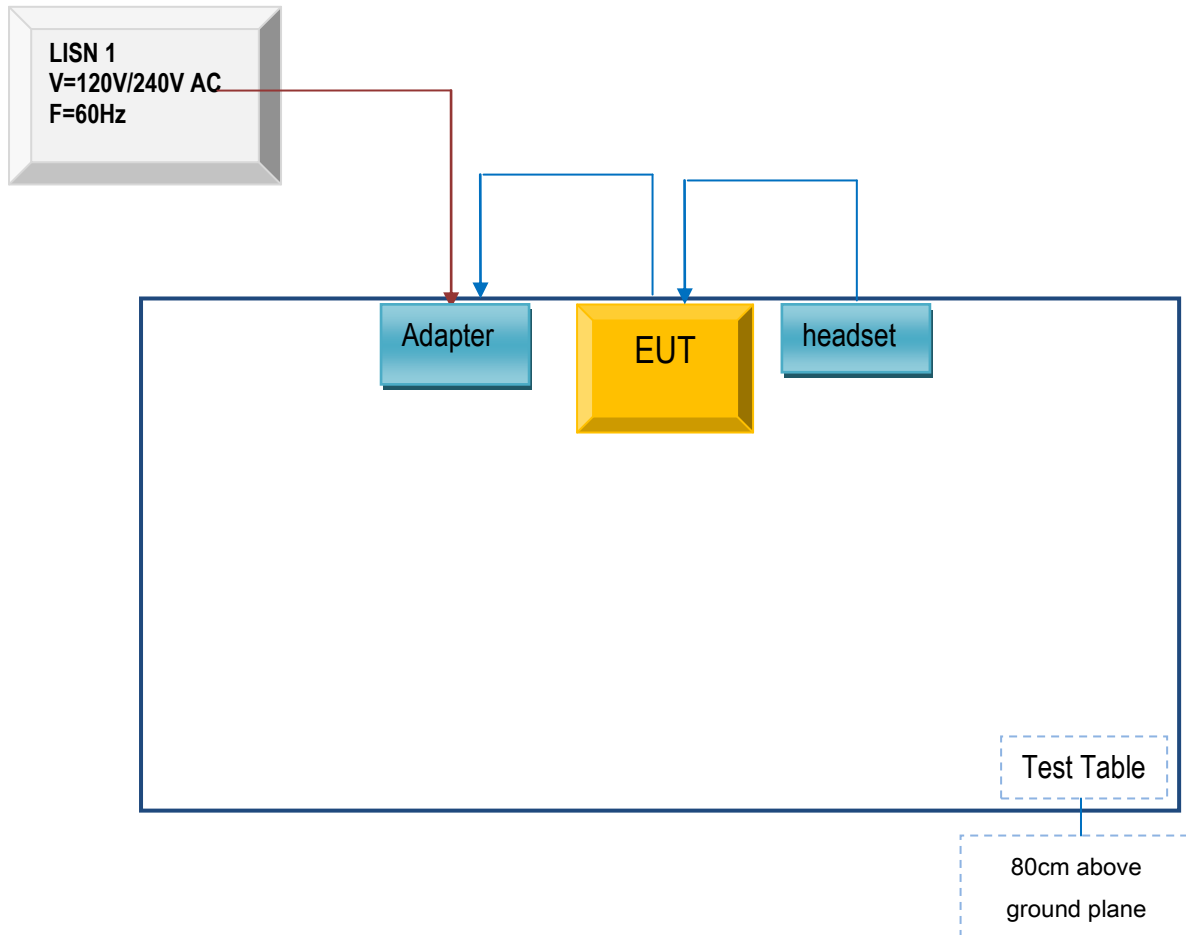

Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .

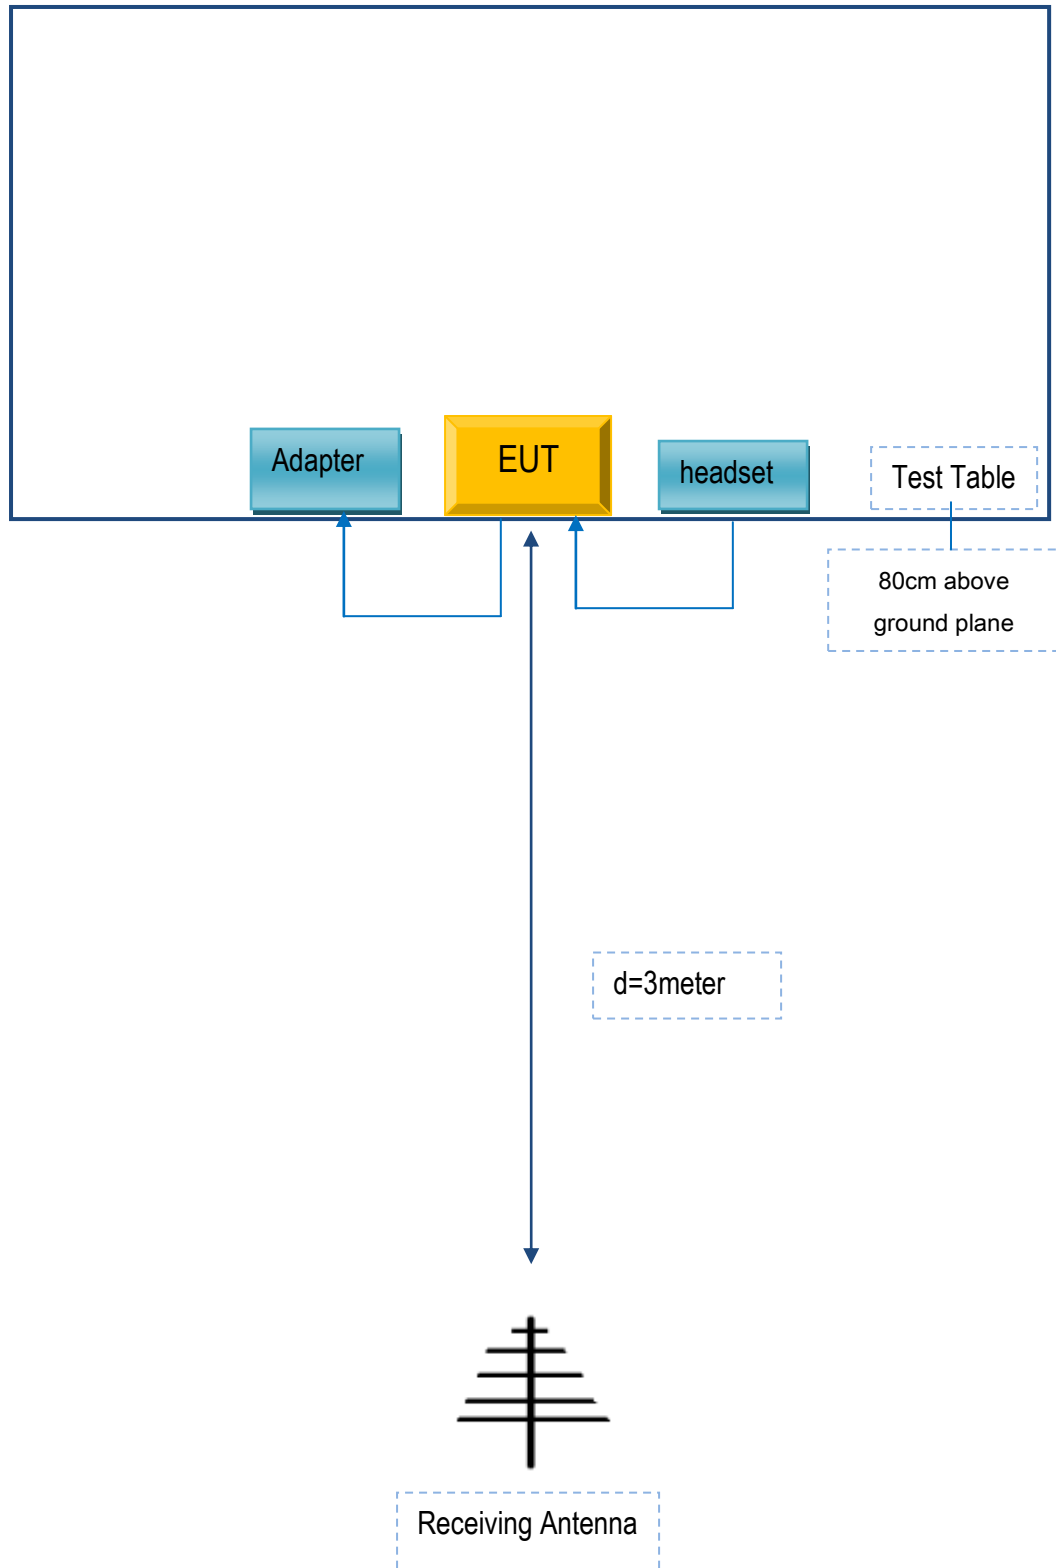

**Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .**

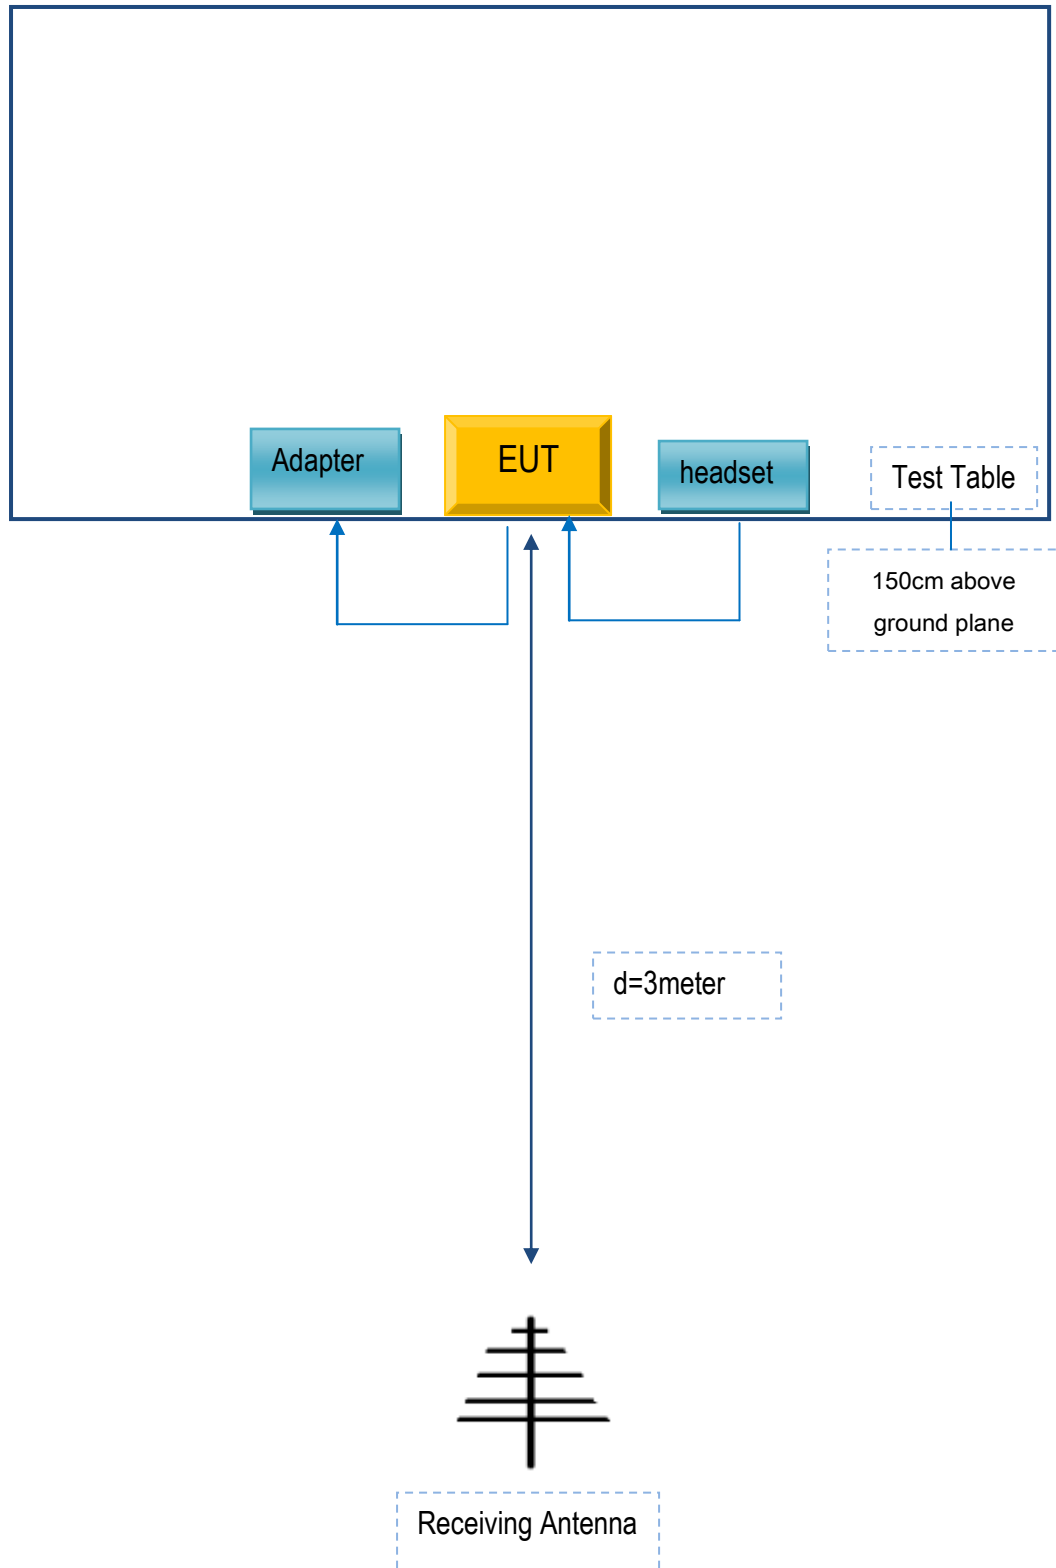



## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

### Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products , Inc	Adapter	TPA-46B050100UU	N/A
SAMSUNG	headset	HS330	N/A

### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Test Report	17070437-FCC-R2-V1
Page	66 of 67

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Test Report	17070437-FCC-R2-V1
Page	67 of 67

## Annex E. DECLARATION OF SIMILARITY

N/A