

FCC PART 15B
MEASUREMENT AND TEST REPORT

For

GUARDIAN SHANGHAI CORP.

368, Min Shen Rd, SongJiang, Shanghai, China

FCC ID: YJFDCRX01-CC

Report Type: Original Report	Product Type: Garage Door Opener
Test Engineer: Phil Zhu	<i>Phil. Zhu</i>
Report Number: RSHA170814003-00A	
Report Date: 2017-10-25	
Ray Wang	<i>Ray. wang</i>
Reviewed By: EMC Leader	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION	4
EUT EXERCISE SOFTWARE	4
SPECIAL ACCESSORIES.....	4
EQUIPMENT MODIFICATIONS	4
SUPPORT EQUIPMENT LIST AND DETAILS	4
EXTERNAL I/O CABLE.....	4
BLOCK DIAGRAM OF RADIATED EMISSIONS TEST SETUP.....	5
SUMMARY OF TEST RESULTS	6
FCC §15.107 –CONDUCTED EMISSIONS	7
APPLICABLE STANDARD	7
MEASUREMENT UNCERTAINTY	7
EUT SETUP	7
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE	8
TEST EQUIPMENT LIST AND DETAILS.....	8
CORRECTED FACTOR & MARGIN CALCULATION	8
TEST DATA	9
FCC §15.109 - RADIATED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST DATA	13

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	GUARDIAN SHANGHAI CORP.
Model	2211-D
Product	Garage Door Opener
Rate Voltage	AC 120V
Operating Frequency	303MHz & 390MHz
Dimension	281 mm(L) × 241 mm(W) × 173 mm(H)

Note: 1) The device can operate at 303 MHz and 390 MHz simultaneously.

2) The product's series model number: 615CC, 628CC, 628FCACC. The difference between them was explained in the attached declaration letter.

* All measurement and test data in this report was gathered from production sample serial number: 20170814003. (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2017-08-14.

Objective

This report is prepared on behalf of GUARDIAN SHANGHAI CORP. in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B.

Related Submittal(s)/Grant(s)

FCC Part 15.231 DSC submission with FCC ID: YJFDCRX01-CC.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Test Mode: 303MHz and 390MHz simultaneously receive operation

EUT Exercise Software

No software was used to test.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
OPPLE	Lamp	90W	/
GUARDIAN	Remote Controller	R2BCC	/
GUARDIAN	Photo eye 1	/	/
GUARDIAN	Photo eye 2	/	/

External I/O Cable

Cable Description	Length (m)	From/Port	To
Power Cable	15	EUT	Photo eye 1
Power Cable	15	EUT	Photo eye 2

Block Diagram of Radiated Emissions Test Setup

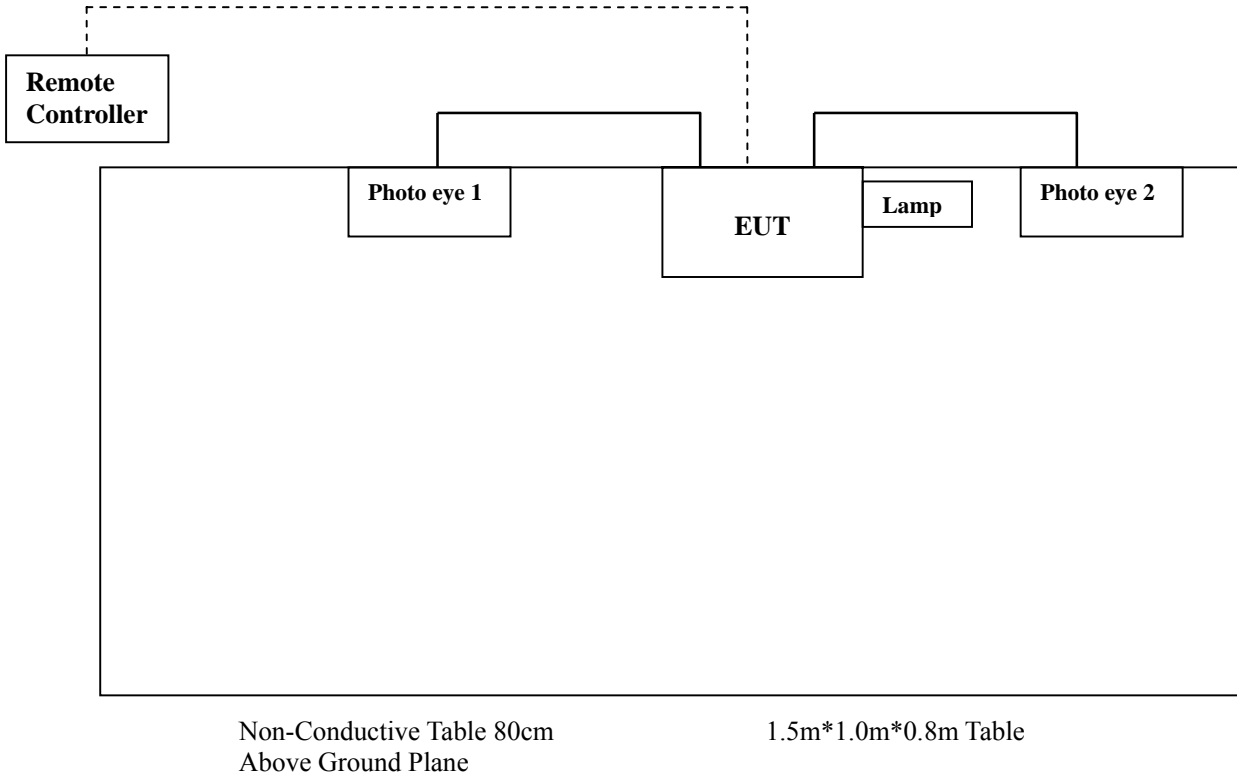

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FCC §15.107 – CONDUCTED EMISSIONS

Applicable Standard


According to FCC§15.107

Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Item		Measurement Uncertainty	U_{cispr}
AMN	150kHz~30MHz	3.19 dB	3.4 dB

EUT Setup

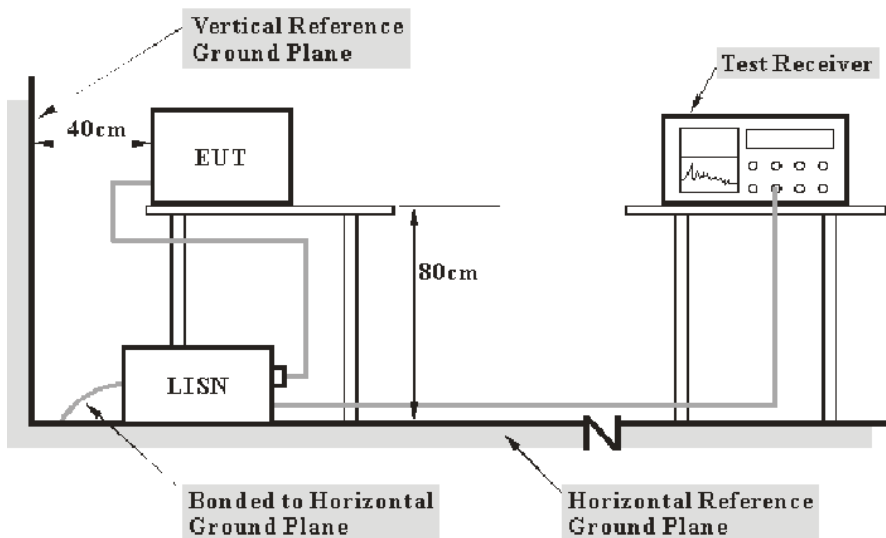

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-09
ROHDE&SCHWARZ	LISN	ENV216	3560655016	2016-11-25	2017-11-24
Rohde & Schwarz	CE Test software	EMC 32	100357	--	--
MICRO-COAX	Coaxial Cable	Cable-6	006	2016-09-07	2017-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	22°C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Phil Zhu on 2017-08-29.

Test Mode: 303MHz and 390MHz simultaneously receive operation

Line


Full Spectrum

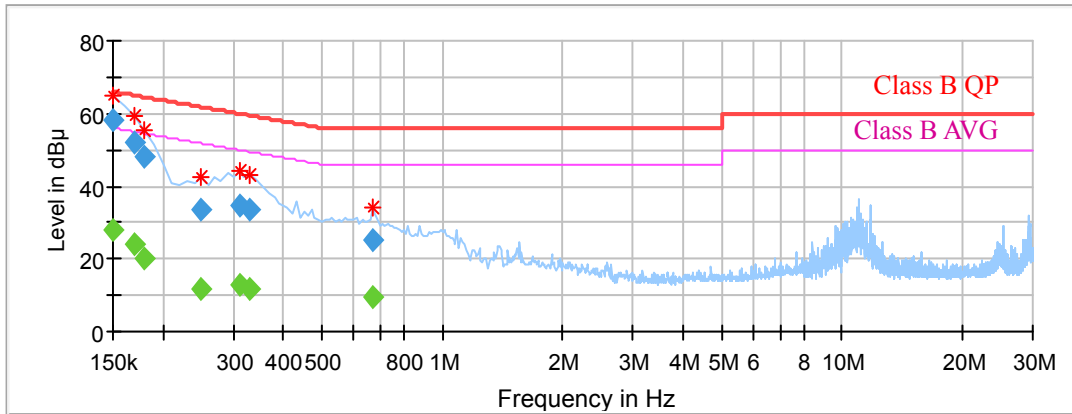

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ V)	Margin (dB)	Line	Corr. (dB)
0.150000	---	27.75	56.00	28.25	L1	16.1
0.150000	58.11	---	66.00	7.89	L1	16.1
0.170000	---	24.33	54.96	30.63	L1	16.1
0.170000	52.01	---	64.96	12.95	L1	16.1
0.180000	---	20.38	54.49	34.11	L1	16.1
0.180000	48.28	---	64.49	16.21	L1	16.1
0.250000	---	11.87	51.76	39.89	L1	16.0
0.250000	33.40	---	61.76	28.36	L1	16.0
0.310000	---	12.91	49.97	37.06	L1	16.1
0.310000	34.56	---	59.97	25.41	L1	16.1
0.330000	---	11.57	49.45	37.88	L1	16.1
0.330000	33.61	---	59.45	25.84	L1	16.1
0.670000	---	9.64	46.00	36.36	L1	16.0
0.670000	25.13	---	56.00	30.87	L1	16.0

Neutral

Full Spectrum

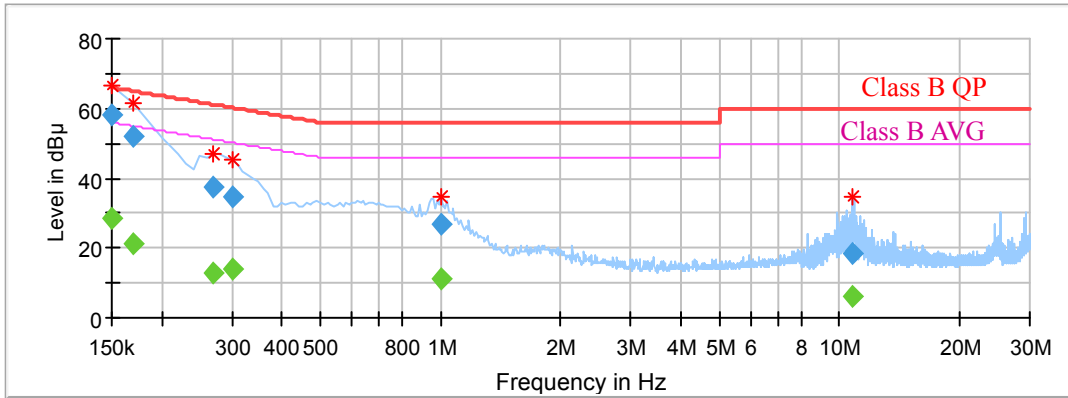

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ V)	Margin (dB)	Line	Corr. (dB)
0.150000	---	28.29	56.00	27.71	N	16.1
0.150000	57.95	---	66.00	8.05	N	16.1
0.170000	---	21.11	54.96	33.85	N	16.1
0.170000	52.17	---	64.96	12.79	N	16.1
0.270000	---	12.82	51.12	38.30	N	16.1
0.270000	37.43	---	61.12	23.69	N	16.1
0.300000	---	13.86	50.24	36.38	N	16.1
0.300000	34.64	---	60.24	25.60	N	16.1
1.000000	---	10.92	46.00	35.08	N	15.9
1.000000	27.13	---	56.00	28.87	N	15.9
10.830000	---	6.23	50.00	43.77	N	16.0
10.830000	18.23	---	60.00	41.77	N	16.0

FCC §15.109 - RADIATED EMISSIONS

Applicable Standard

FCC §15.109


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Item	Measurement Uncertainty	U_{cispr}
Radiated Emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6 GHz ~18 GHz	5.23dB

EUT Setup

Below 1GHz:

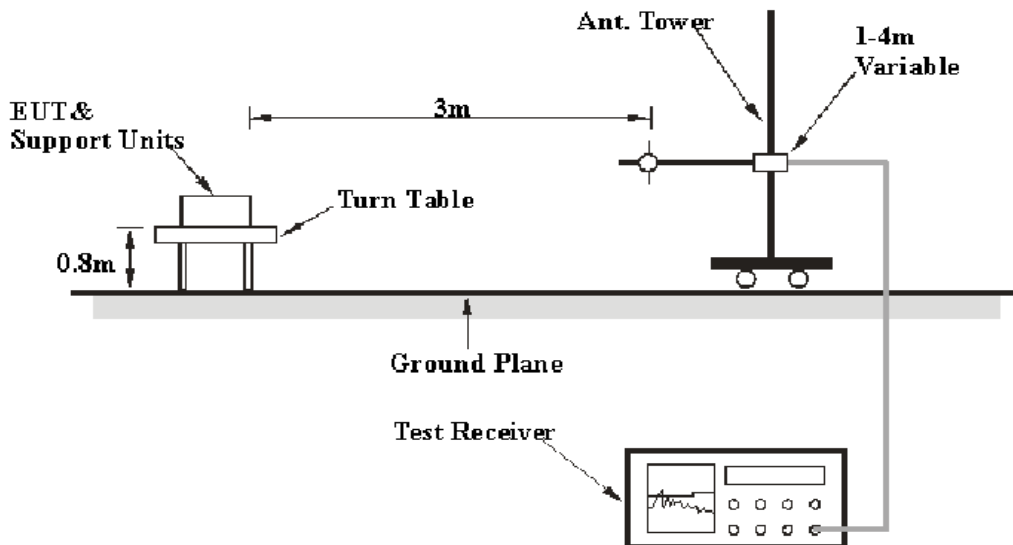

Above 1GHz:

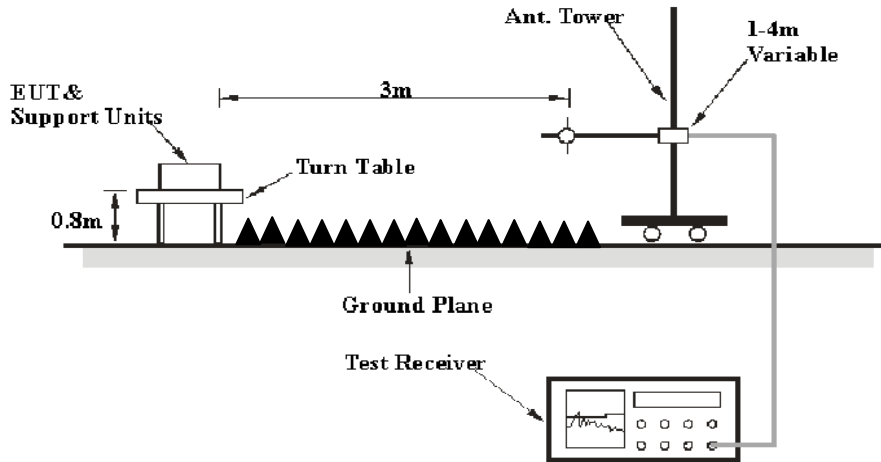

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 2 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	Peak
	1MHz	1 Hz	/	Av

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	330	171377	2016-12-12	2017-12-11
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
R&S	Auto test Software	EMC32	100361	-	-
haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-11
haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-11
haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-11
Champrotek	Chamber	Chamber A	T-KSEMC049	-	-
Champrotek	Chamber	Chamber B	T-KSEMC080	-	-
ETS	Horn Antenna	3115	6229	2016-01-11	2019-01-10
Rohde & Schwarz	EMI Receiver	ESU40	100207	2017-08-27	2018-08-26
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Phil Zhu on 2017-08-29 & 2017-10-25.

Test Mode: 303MHz and 390MHz simultaneously receive operation

30MHz ~ 1GHz:

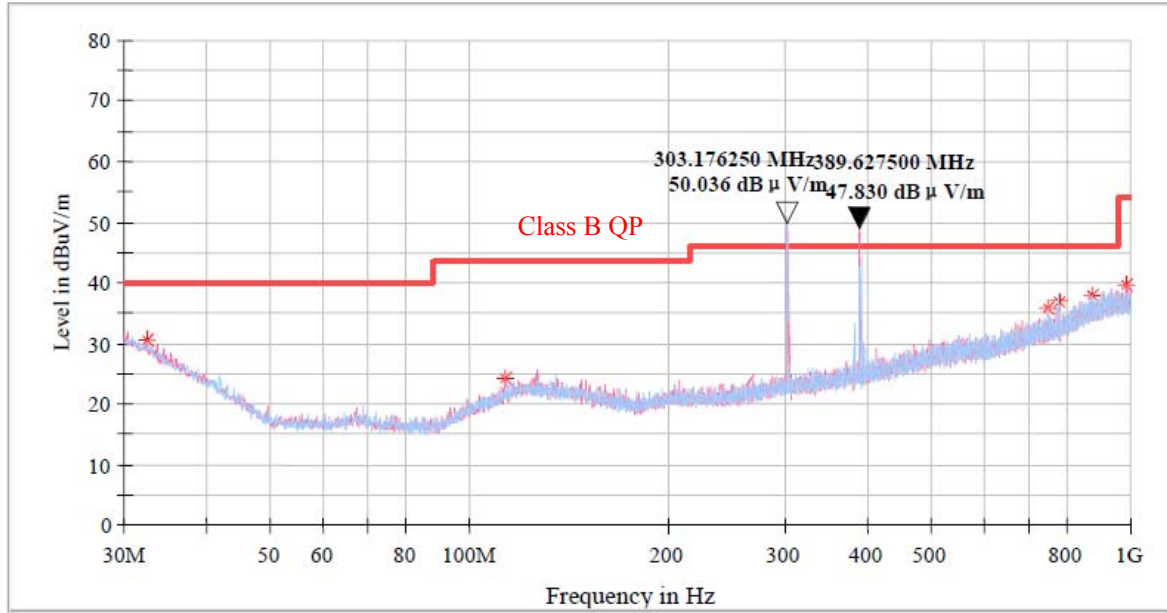

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.425000	30.43	40.00	9.57	200.0	V	354.0	-6.0
113.056250	24.16	43.50	19.34	200.0	V	18.0	-12.9
751.680000	35.79	46.00	10.21	100.0	H	347.0	-2.2
780.052500	36.23	46.00	9.77	200.0	H	347.0	-1.7
872.445000	37.83	46.00	8.17	100.0	H	262.0	-0.3
986.783750	39.62	53.90	14.28	200.0	V	281.0	2.0

Note: The frequencies 303.176MHz and 389.6275MHz are emissions from the remote controller instead of EUT

Above 1 GHz:

Frequency (MHz)	Max Peak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1513.400000	---	47.97	54.00	6.03	200.0	H	142.0	-10.2
1513.400000	57.93	---	74.00	16.07	200.0	H	142.0	-10.2
1958.800000	---	24.90	54.00	29.10	100.0	H	359.0	-8.4
1958.800000	48.90	---	74.00	25.10	100.0	H	359.0	-8.4
3029.800000	---	37.91	54.00	16.09	100.0	H	329.0	-4.7
3029.800000	48.15	---	74.00	25.85	100.0	H	329.0	-4.7
3937.600000	---	44.20	54.00	9.80	200.0	H	280.0	-2.6
3937.600000	54.46	---	74.00	19.54	200.0	H	280.0	-2.6
5409.800000	---	31.62	54.00	22.38	200.0	H	75.0	1.3
5409.800000	50.83	---	74.00	23.17	100.0	H	283.0	1.3
14413.000000	---	42.12	54.00	11.88	100.0	H	169.0	16.7
14413.000000	54.48	---	74.00	19.52	200.0	H	280.0	16.7

******* END OF REPORT *******