



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

GUARDIAN SHANGHAI CORP.

368, Min Shen Rd, SongJiang, Shanghai, China

FCC ID: YJFV2CTRL



Report Type: Original Report	Product Type: Garage Door Smart Control
Test Engineer:	Tyrone Wang 
Report Number:	RSHD190912005-00B
Report Date:	2021-01-28
Reviewed By:	Oscar Ye EMC Manager 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	12
TEST EQUIPMENT LIST	13
FCC §15.247 (i) & §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	15
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP.....	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	18
FACTOR & OVER LIMIT CALCULATION.....	18
TEST RESULTS SUMMARY.....	18
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	25
APPLICABLE STANDARD	25
EUT SETUP.....	25
EMI TEST RECEIVER SETUP.....	26
TEST PROCEDURE	26
TEST RESULTS SUMMARY.....	26
TEST DATA	27
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST DATA	62
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	72
APPLICABLE STANDARD	72
TEST PROCEDURE	72
TEST DATA	73
FCC §15.247(d) – BAND EDGE.....	77
APPLICABLE STANDARD	77
TEST PROCEDURE	77
TEST DATA	77
BLE MODE LEFT SIDE	82

BLE MODE RIGHT SIDE	82
FCC §15.247(e) - POWER SPECTRAL DENSITY	83
APPLICABLE STANDARD	83
TEST PROCEDURE	83
TEST DATA	83

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	GUARDIAN SHANGHAI CORP.
Tested Model	V2(controller)
Product Type	Garage Door Smart Control
Power Supply	DC 12V from adapter
RF Function	2.4G Wi-Fi, BLE(1Mbps/2Mbps)
Operating Band/Frequency	2.4G Wi-Fi: 2412~2462 MHz BLE(1Mbps/2Mbps): 2402-2480MHz
Channel Number	2.4G Wi-Fi: 11 BLE(1Mbps/2Mbps): 40
Channel Separation	2.4G Wi-Fi: 5MHz, BLE(1Mbps/2Mbps): 2MHz
Modulation Type	Wi-Fi: OFDM, DSSS; BLE(1Mbps/2Mbps): GFSK
Antenna Type	Wi-Fi/BLE(1Mbps/2Mbps): PCB antenna
*Maximum Antenna Gain	Wi-Fi:2.4 dBi; BLE: 4.0 dBi

Adapter Information:

Model: XKD-C1000IC12.0-12W

Input: AC 100-240V, 50/60Hz, 0.5A Max

Output: DC 12.0V, 1.0A

Note: The maximum antenna gain is provided by the applicant.

**All measurement and test data in this report was gathered from production sample serial number:*

RSHD190912005-1. (Assigned by the BACL. The EUT supplied by the applicant was received on 2019-09-12)

Objective

This report is prepared on behalf of *GUARDIAN SHANGHAI CORP.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part of system submitted with FCC ID: YJFV2SEN.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For BLE mode, EUT was tested with channel 0, 19 and 39.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
18	2438	38	2478
19	2440	39	2480

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: CMD for 2.4G Wi-Fi; putty for BLE

*Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Level Setting
802.11b	1 Mbps	Default
802.11g	6 Mbps	Default
802.11n-HT20	MCS0	Default
BLE(1Mbps)	1Mbps	3
BLE(2Mbps)	2Mbps	3

Note: The power level setting was declared by the applicant.


Duty Cycle:

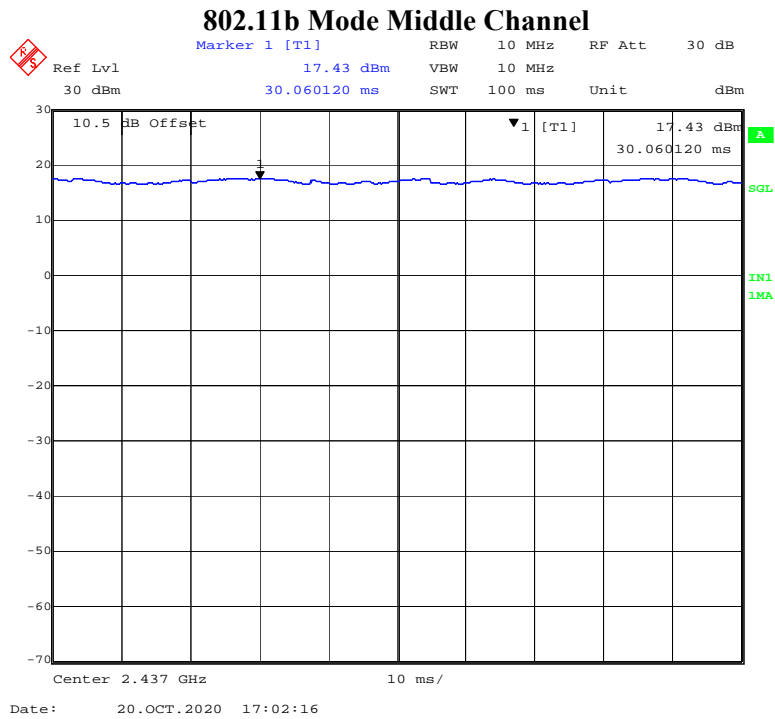

802.11g Mode Middle Channel

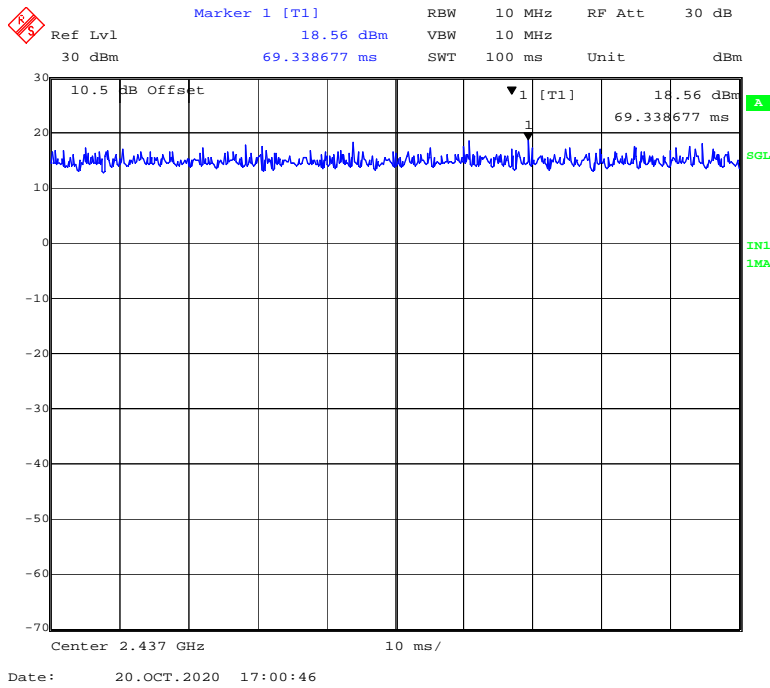


802.11n-HT20 Mode Middle Channel

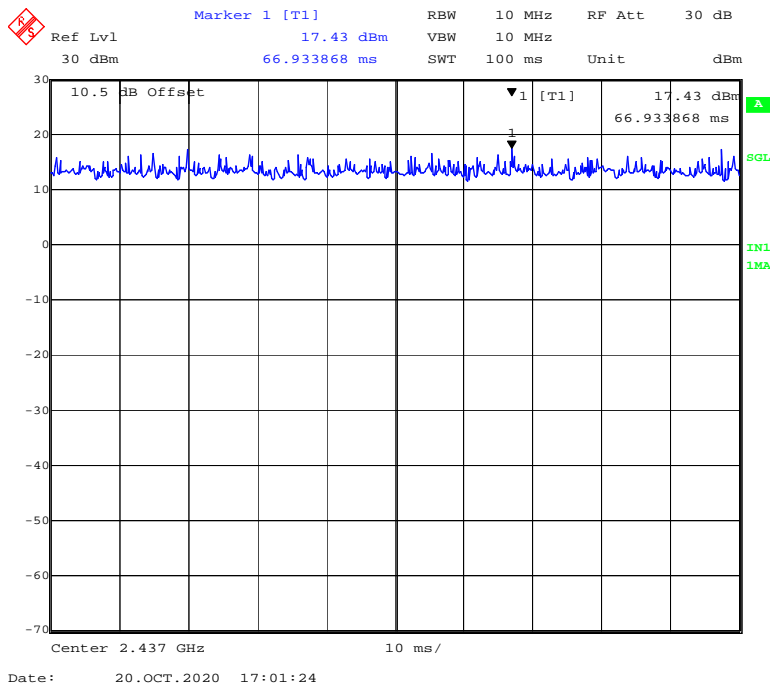


1Mbps:

BLE Mode Middle Channel

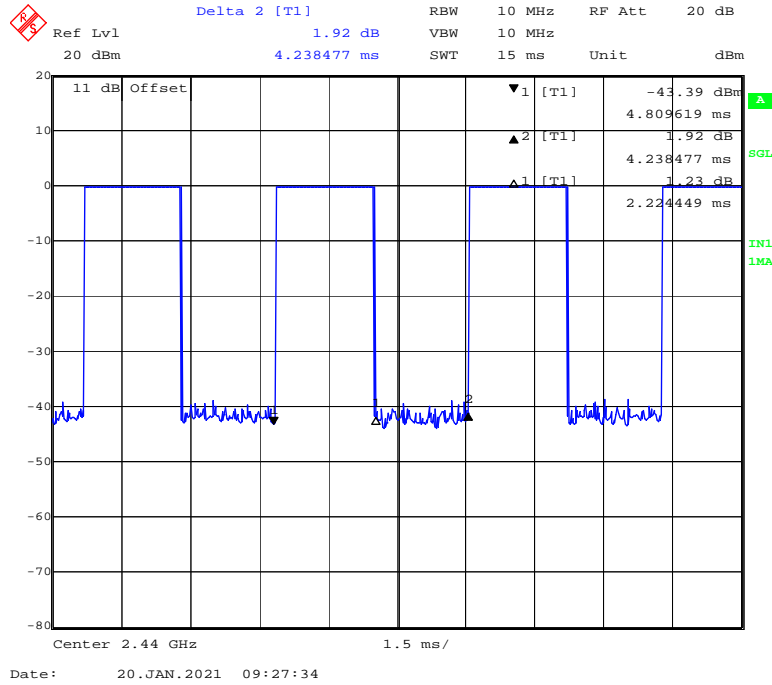

2Mbps:

BLE Mode Middle Channel

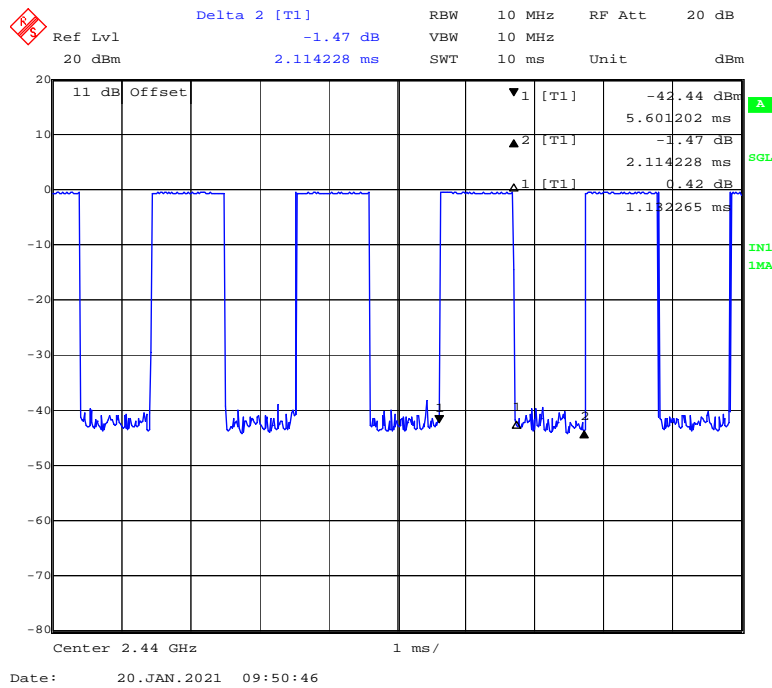

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
BLE(1Mbps)	52.48	2.224	0.45	2.80
BLE(2Mbps)	53.55	1.132	0.88	2.71

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	Socket	/	/
/	Switch	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.5	EUT	Adapter
Power Cable	1.0	EUT	Switch
Power Cable	1.0	Adapter	LISN/AC source

Block Diagram of Test Setup


For Conducted Emissions:

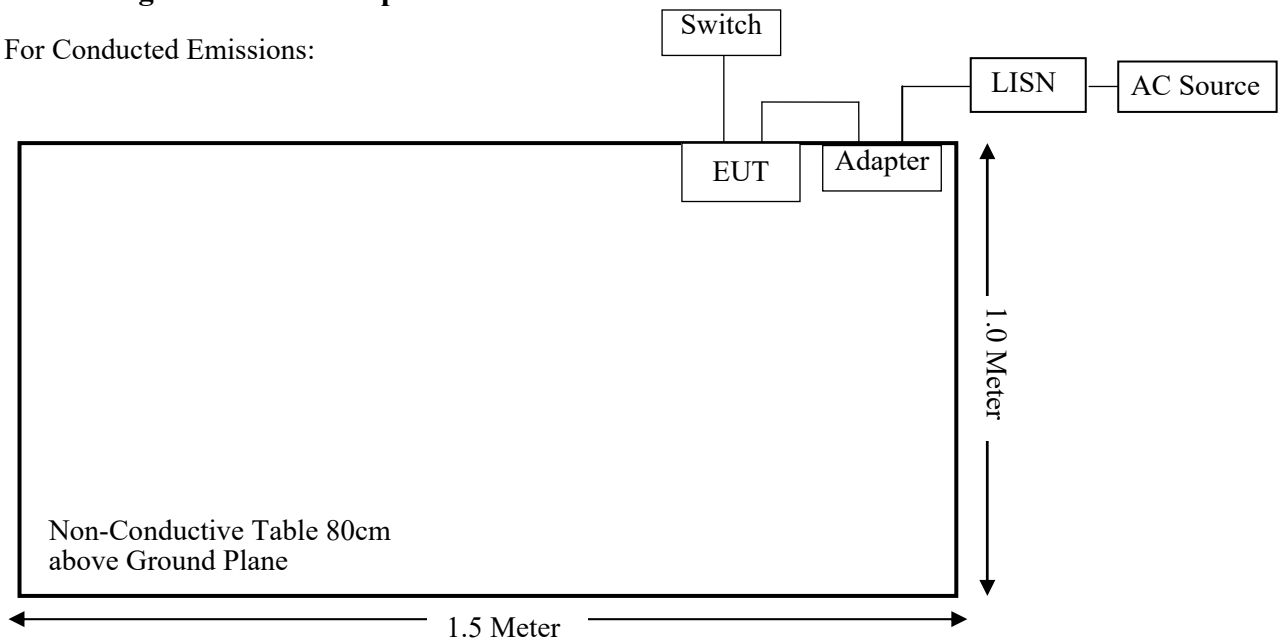

For Radiated Emissions (Below 1GHz):

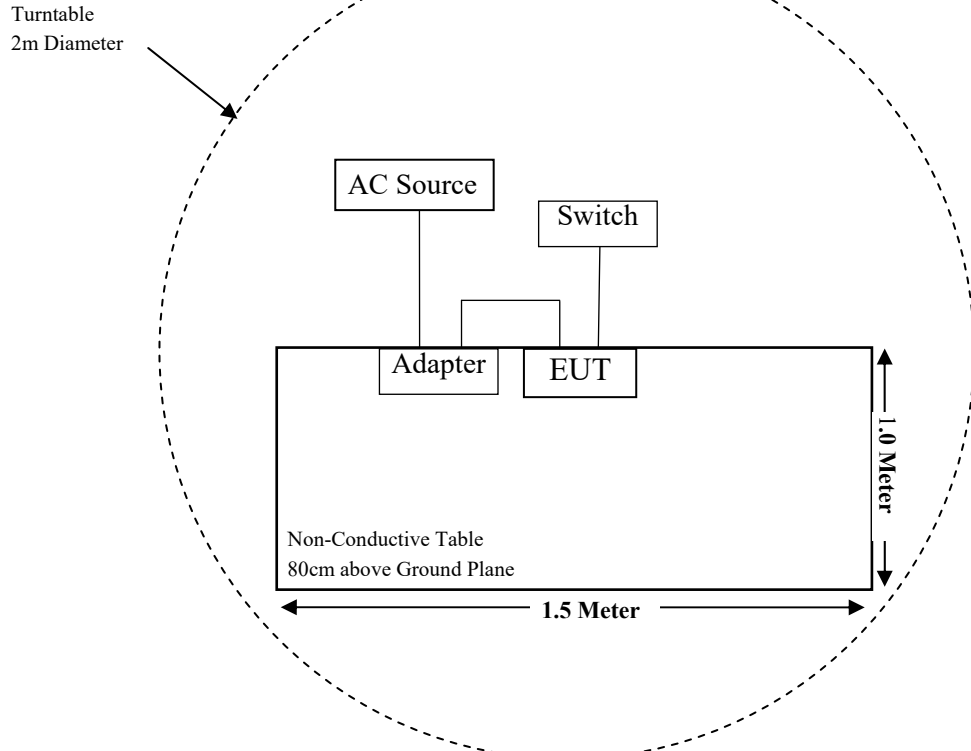

For Radiated Emissions (Above 1GHz):

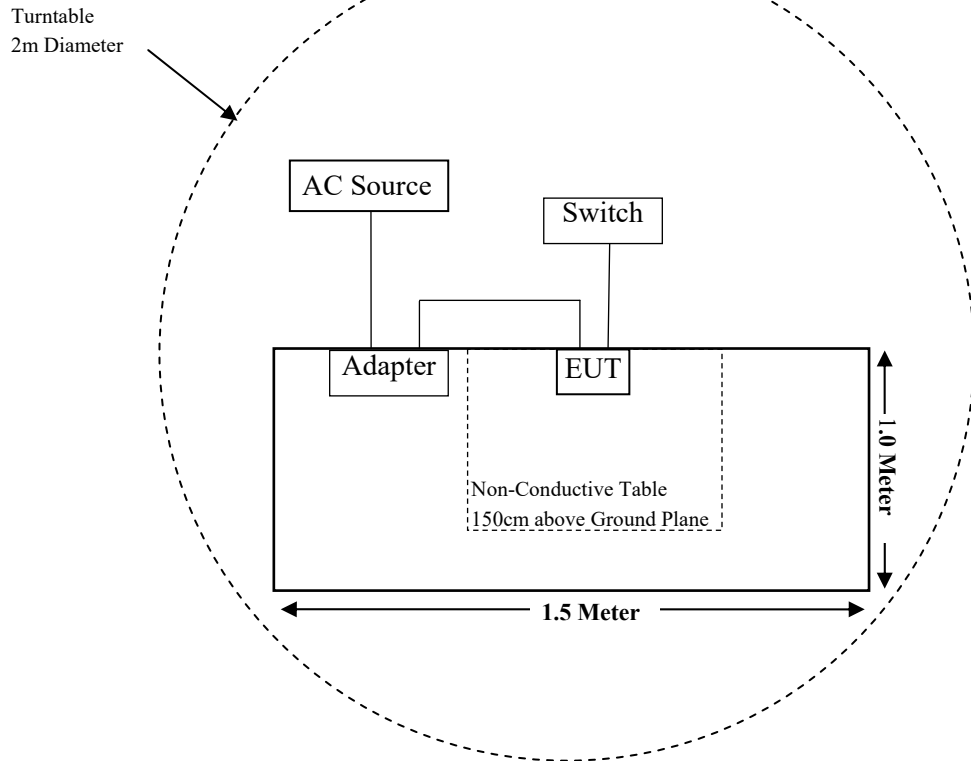

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	84159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-12-12	2021-12-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 3#)					
Sonoma Instrument	Amplifier	310N	185700	2020-08-14	2021-08-13
Rohde & Schwarz	EMI Test Receiver	ESR	102454	2019-11-27	2020-11-26
Rohde & Schwarz	EMI Test Receiver	ESR	102454	2020-11-27	2021-11-26
Sunol Sciences	Hybrid Antenna	JB3	A090314-1	2020-08-05	2023-08-04
Albatross	Chamber 3#	3m-SAC 966	N/A	2019-07-02	2022-07-01
Audix	Test Software	e3	V9	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-12-14	2020-12-13
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-12-14	2021-12-13
Agilent	Power Meter	N1912A	MY5000492	2020-11-18	2021-11-17
Agilent	Power Sensor	N1921A	MY54210024	2020-11-18	2021-11-17
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Guardian	RF Cable	Guardian C01	C01	Each Time	/

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03 -101746-zn	2020-08-05	2021-08-04
Rohde & Schwarz	LISN	ENV216	101115	2020-12-14	2021-12-13
Audix	Test Software	e3	V9	/	/
Rohde & Schwarz	Pulse limiter	ESH3-Z2	357.8810.52	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

2.4G Wi-Fi & BLE:

Mode	Frequency Range (MHz)	Maximum Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412-2462	2.4	1.74	19.50	89.13	20	0.0308	1.0
802.11g		2.4	1.74	20.50	112.20	20	0.0388	1.0
802.11n-HT20		2.4	1.74	19.00	79.43	20	0.0275	1.0
BLE(1Mbps)	2402-2480	4.0	2.51	0.50	1.12	20	0.0006	1.0
BLE(2Mbps)	2402-2480	4.0	2.51	0.00	1.00	20	0.0005	1.0

Note: 1. For the above tune up power were declared by the manufacturer.

2. Wi-Fi and BLE can't transmit simultaneously.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna for Wi-Fi, which the antenna gain is 2.4 dBi, and a PCB antenna for BLE, which the antenna gain is 4.0 dBi, the antenna is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

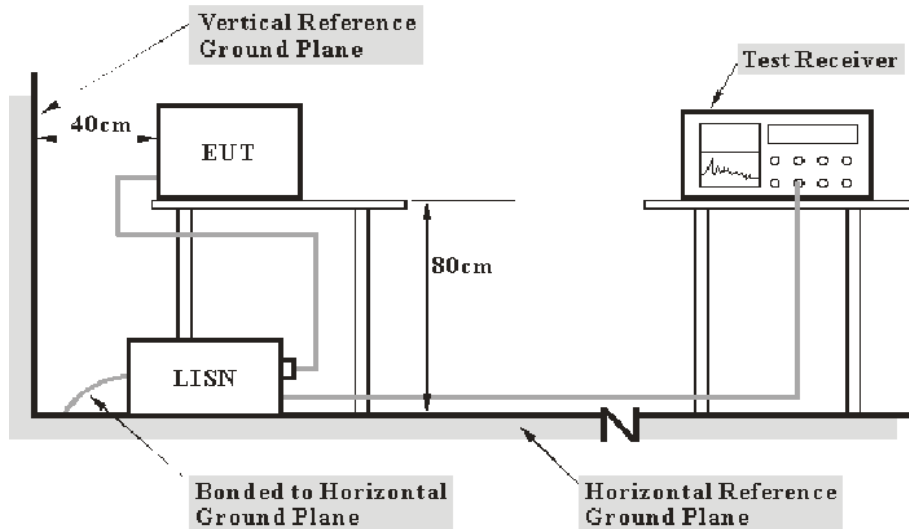

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa


The testing was performed by Tyrone Wang on 2021-01-25.

Test Result: Compliant.

For Wi-Fi Mode:

EUT operation mode: Transmitting in 802.11g mode low channel (worst case)


AC 120V/60 Hz, Line

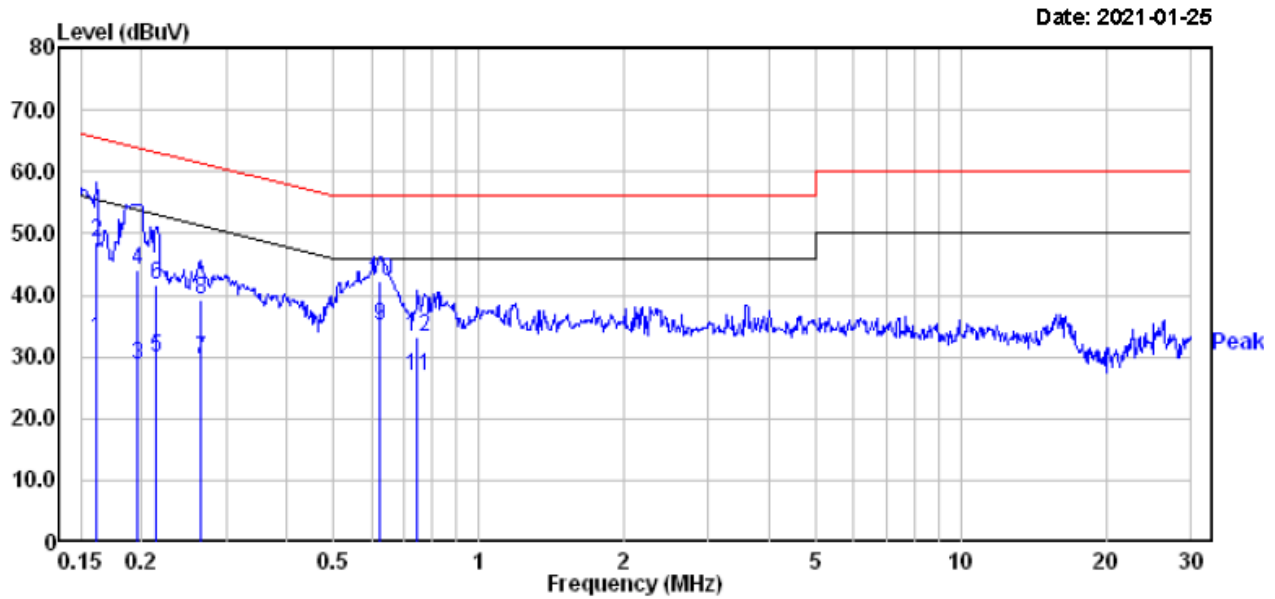

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.162	13.00	19.83	32.83	55.38	-22.55	Average
2	0.162	28.90	19.83	48.73	65.38	-16.65	QP
3	0.196	8.90	19.82	28.72	53.80	-25.08	Average
4	0.196	24.30	19.82	44.12	63.80	-19.68	QP
5	0.215	10.10	19.82	29.92	53.01	-23.09	Average
6	0.215	21.70	19.82	41.52	63.01	-21.49	QP
7	0.264	9.70	19.82	29.52	51.29	-21.77	Average
8	0.264	19.40	19.82	39.22	61.29	-22.07	QP
9	0.624	15.30	19.75	35.05	46.00	-10.95	Average
10	0.624	22.60	19.75	42.35	56.00	-13.65	QP
11	0.747	7.10	19.73	26.83	46.00	-19.17	Average
12	0.747	13.60	19.73	33.33	56.00	-22.67	QP

AC 120V/60 Hz, Neutral

Date: 2021-01-25

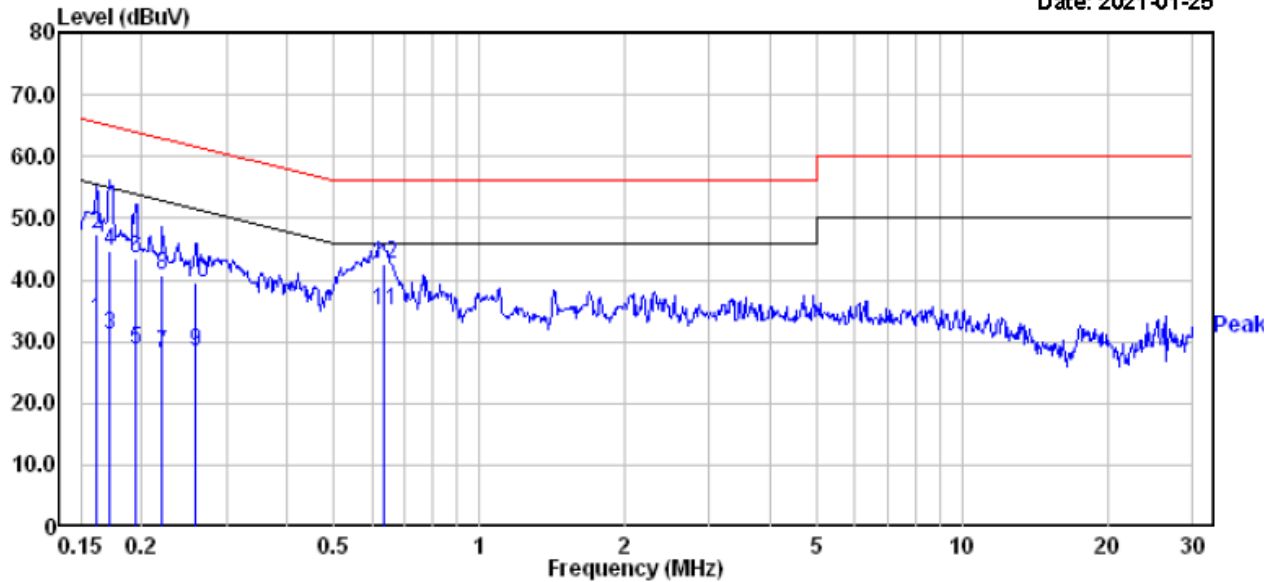

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.162	13.80	19.83	33.63	55.38	-21.75	Average
2	0.162	27.70	19.83	47.53	65.38	-17.85	QP
3	0.171	11.40	19.83	31.23	54.90	-23.67	Average
4	0.171	24.90	19.83	44.73	64.90	-20.17	QP
5	0.194	9.00	19.82	28.82	53.84	-25.02	Average
6	0.194	23.70	19.82	43.52	63.84	-20.32	QP
7	0.221	8.40	19.82	28.22	52.79	-24.57	Average
8	0.221	20.90	19.82	40.72	62.79	-22.07	QP
9	0.259	8.70	19.82	28.52	51.47	-22.95	Average
10	0.259	19.70	19.82	39.52	61.47	-21.95	QP
11	0.634	15.30	19.75	35.05	46.00	-10.95	Average
12	0.634	22.90	19.75	42.65	56.00	-13.35	QP


Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

For BLE Mode(1Mbps):

EUT operation mode: Transmitting in low channel (worst case)


AC 120V/60 Hz, Line

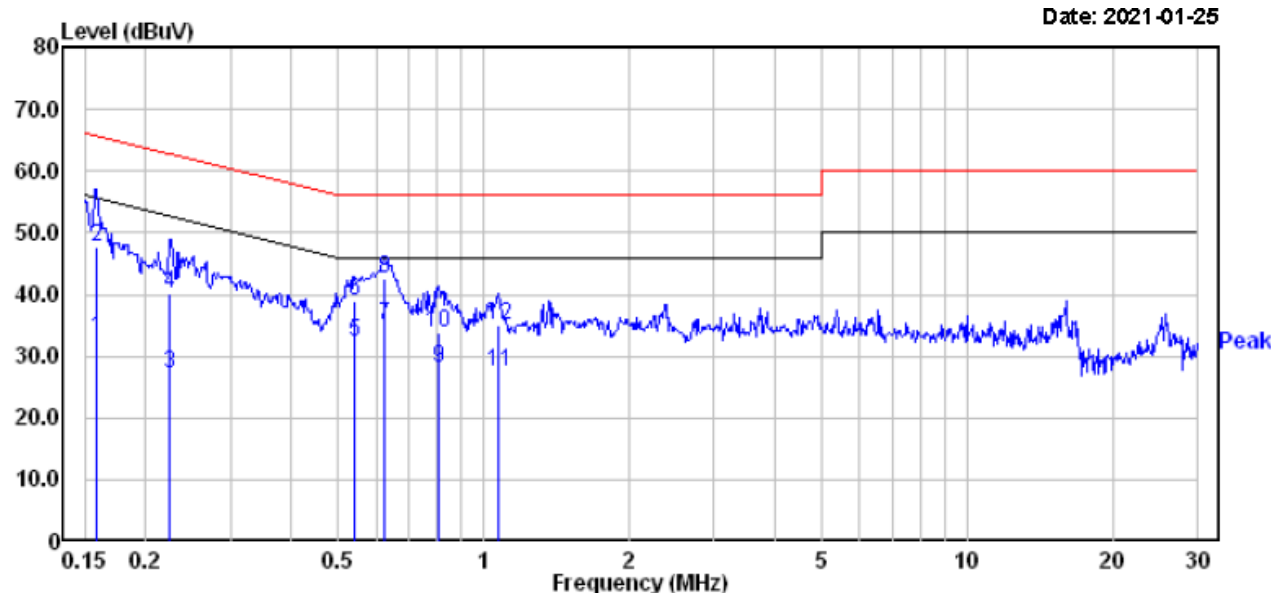

	Read Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.159	13.00	19.82	32.82	55.52	-22.70	Average
2	0.159	27.90	19.82	47.72	65.52	-17.80	QP
3	0.224	7.30	19.82	27.12	52.66	-25.54	Average
4	0.224	20.40	19.82	40.22	62.66	-22.44	QP
5	0.541	12.51	19.75	32.26	46.00	-13.74	Average
6	0.541	19.31	19.75	39.06	56.00	-16.94	QP
7	0.624	15.30	19.75	35.05	46.00	-10.95	Average
8	0.624	22.80	19.75	42.55	56.00	-13.45	QP
9	0.804	8.40	19.70	28.10	46.00	-17.90	Average
10	0.804	14.00	19.70	33.70	56.00	-22.30	QP
11	1.077	7.70	19.82	27.52	46.00	-18.48	Average
12	1.077	15.20	19.82	35.02	56.00	-20.98	QP

AC 120V/60 Hz, Neutral

Date: 2021-01-25

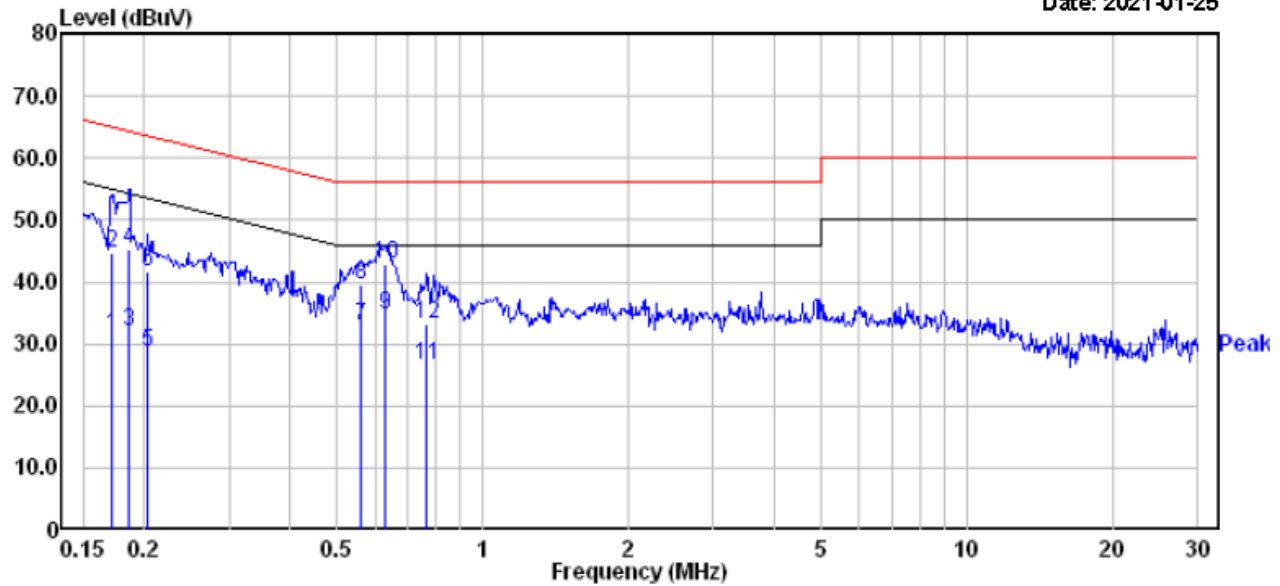


	Read	Limit	Over				
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.172	11.70	19.83	31.53	54.86	-23.33	Average
2	0.172	24.80	19.83	44.63	64.86	-20.23	QP
3	0.186	12.11	19.82	31.93	54.20	-22.27	Average
4	0.186	25.61	19.82	45.43	64.20	-18.77	QP
5	0.203	9.00	19.82	28.82	53.49	-24.67	Average
6	0.203	21.80	19.82	41.62	63.49	-21.87	QP
7	0.561	13.30	19.75	33.05	46.00	-12.95	Average
8	0.561	19.80	19.75	39.55	56.00	-16.45	QP
9	0.630	15.10	19.75	34.85	46.00	-11.15	Average
10	0.630	23.00	19.75	42.75	56.00	-13.25	QP
11	0.767	6.70	19.72	26.42	46.00	-19.58	Average
12	0.767	13.60	19.72	33.32	56.00	-22.68	QP

2Mbps:

EUT operation mode: Transmitting in high channel (worst case)


AC 120V/60 Hz, Line

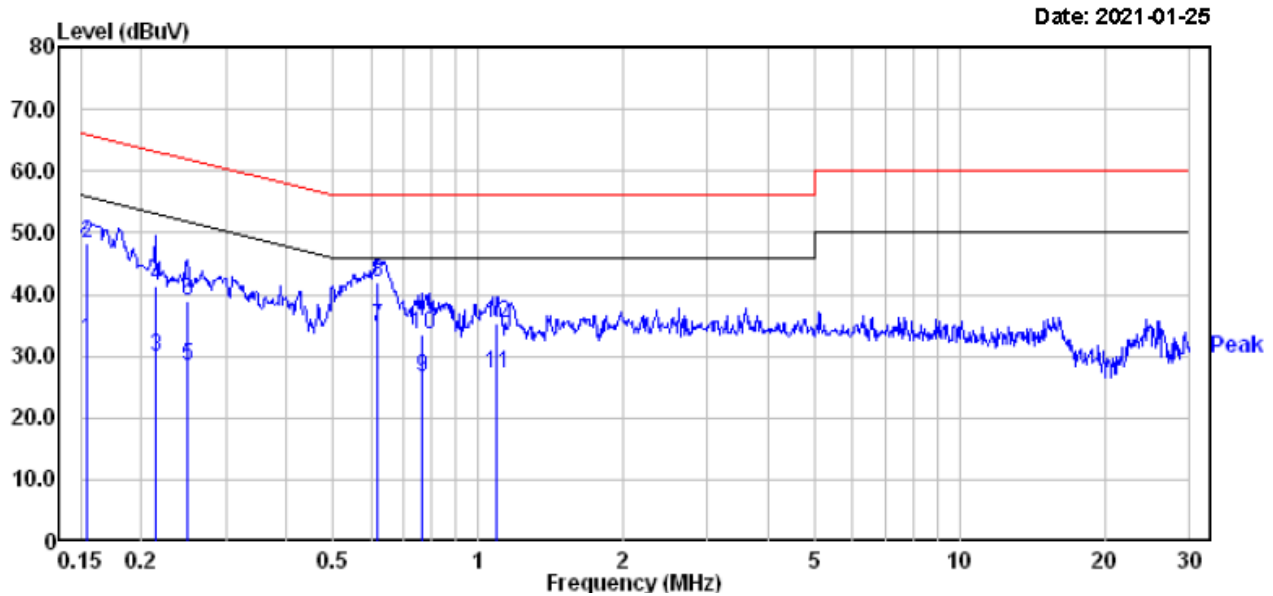

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	12.70	19.82	32.52	55.74	-23.22	Average
2	0.155	28.50	19.82	48.32	65.74	-17.42	QP
3	0.214	10.00	19.82	29.82	53.05	-23.23	Average
4	0.214	21.40	19.82	41.22	63.05	-21.83	QP
5	0.249	8.50	19.82	28.32	51.78	-23.46	Average
6	0.249	19.20	19.82	39.02	61.78	-22.76	QP
7	0.617	14.90	19.75	34.65	46.00	-11.35	Average
8	0.617	22.10	19.75	41.85	56.00	-14.15	QP
9	0.763	6.90	19.72	26.62	46.00	-19.38	Average
10	0.763	13.70	19.72	33.42	56.00	-22.58	QP
11	1.094	7.30	19.82	27.12	46.00	-18.88	Average
12	1.094	15.40	19.82	35.22	56.00	-20.78	QP

AC 120V/60 Hz, Neutral

Date: 2021-01-25

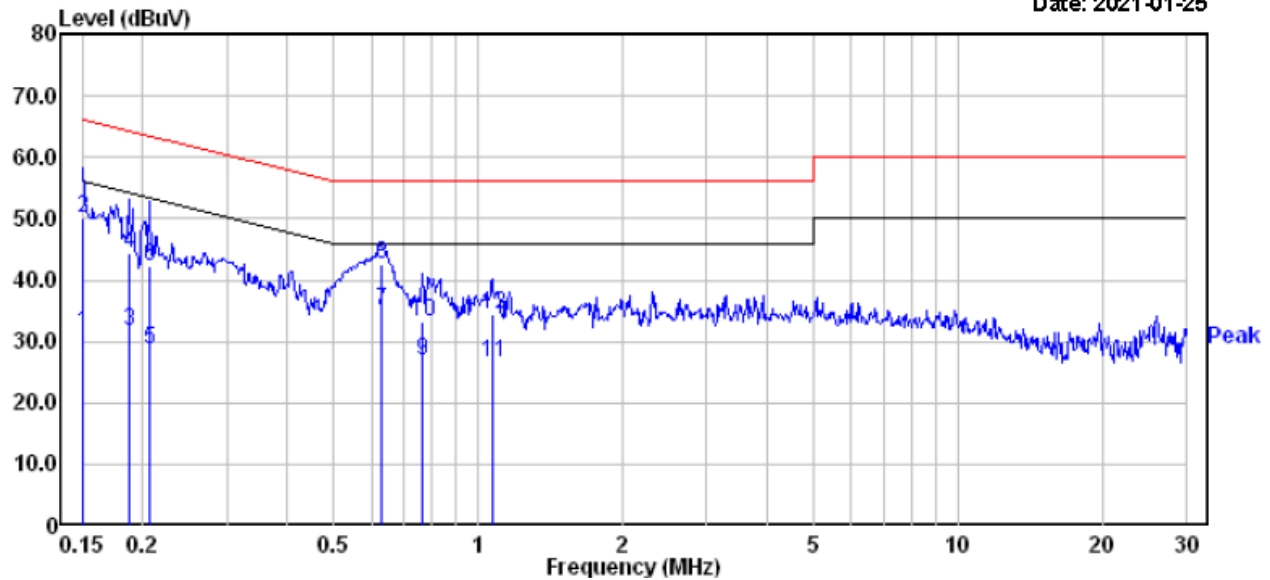

	Read	Limit	Over				
Freq	Level	Factor	Level	Line			
MHz	dBuV	dB	dBuV	dBuV			
1	0.150	11.70	19.82	31.52	56.00	-24.48	Average
2	0.150	30.40	19.82	50.22	66.00	-15.78	QP
3	0.187	11.91	19.82	31.73	54.15	-22.42	Average
4	0.187	24.51	19.82	44.33	64.15	-19.82	QP
5	0.206	8.90	19.82	28.72	53.36	-24.64	Average
6	0.206	22.40	19.82	42.22	63.36	-21.14	QP
7	0.630	15.20	19.75	34.95	46.00	-11.05	Average
8	0.630	22.80	19.75	42.55	56.00	-13.45	QP
9	0.763	7.10	19.72	26.82	46.00	-19.18	Average
10	0.763	13.50	19.72	33.22	56.00	-22.78	QP
11	1.071	6.60	19.82	26.42	46.00	-19.58	Average
12	1.071	14.50	19.82	34.32	56.00	-21.68	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

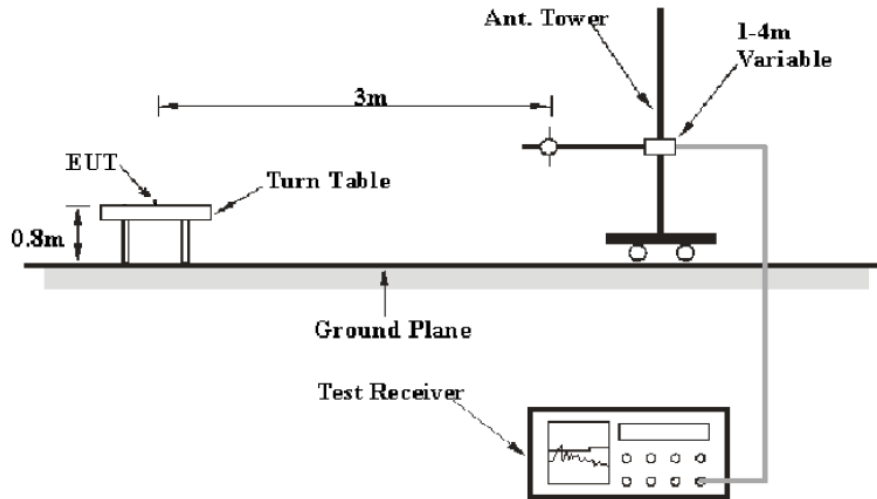

Above 1GHz:

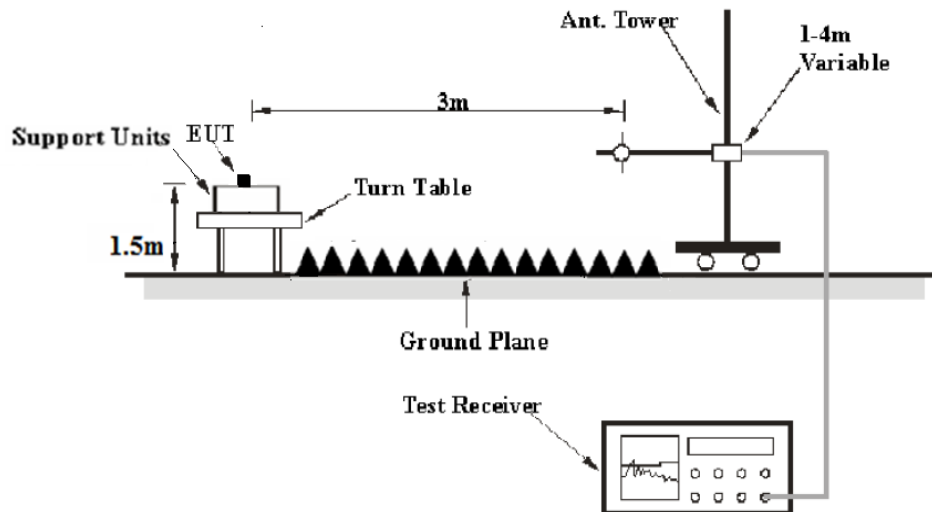

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

Factor & Over Limit Calculation (For Below 1GHz)

The Factor is calculated by adding Antenna Factor , Cable Loss, and Amplifier Gain. The basic equation is as follows:

$$\text{Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB above the limit. The equation for margin calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Corrected Amplitude & Margin Calculation (For Above 1GHz)

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Corr. Amp.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amp}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	24.6-25.3 °C
Relative Humidity:	48-54 %
ATM Pressure:	101.1-101.5 kPa

The testing was performed by Tyrone Wang from 2020-10-20 to 2021-01-25.

Test Result: Compliant.

EUT operation mode: Transmitting


For Wi-Fi Mode:

Spurious Emission Test:

30MHz-1GHz


(Pre-scan with 802.11b, 802.11g and 802.11n-HT20 modes of operation in the X,Y and Z axes of orientation, the worst case low channel of operation in the Z axis of orientation was recorded)

Horizontal:

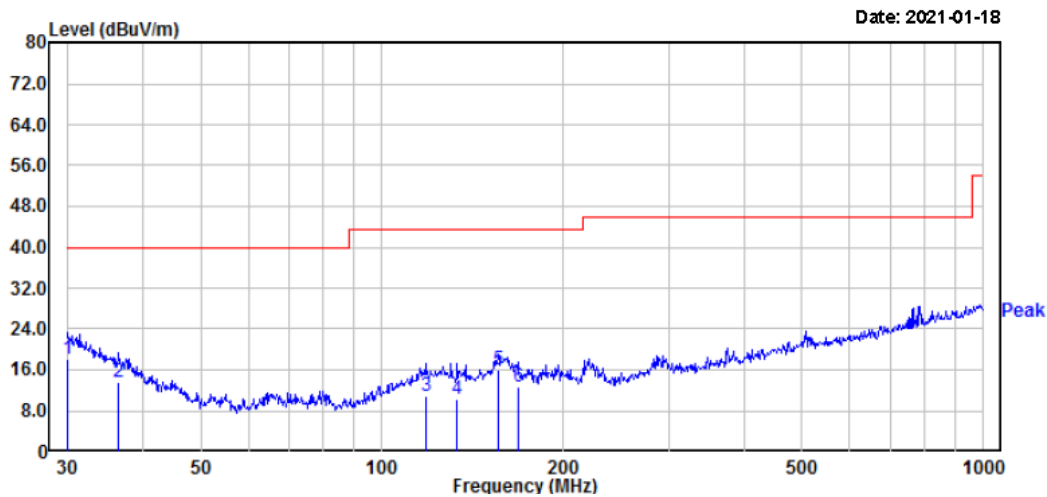

	Read		Limit	Over	APos	TPos	
Freq	Level	Factor	Level	Line	Limit		Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	30.00	21.90	-3.64	18.26	40.00	-21.74	100 1 QP
2	36.51	22.59	-8.92	13.67	40.00	-26.33	100 236 QP
3	118.19	22.19	-11.27	10.92	43.50	-32.58	100 257 QP
4	133.62	22.01	-11.66	10.35	43.50	-33.15	200 219 QP
5	156.46	28.10	-12.23	15.87	43.50	-27.63	200 115 QP
6	168.41	25.39	-12.67	12.72	43.50	-30.78	200 82 QP

Vertical:

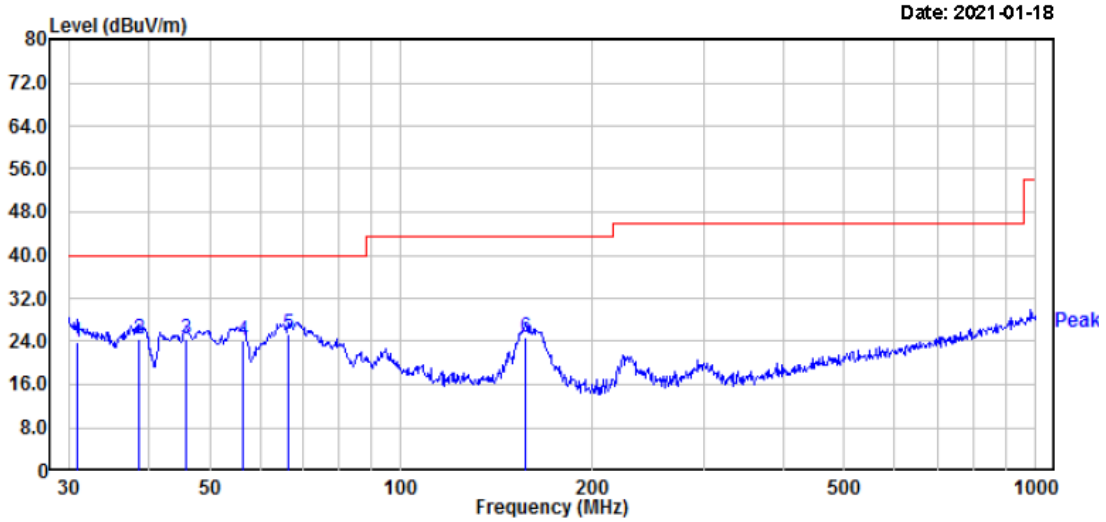

	Read Freq	Read Level	Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	30.96	28.20	-4.42	23.78	40.00	-16.22	100	227 QP
2	38.62	34.99	-10.65	24.34	40.00	-15.66	100	28 QP
3	45.86	39.40	-14.97	24.43	40.00	-15.57	100	188 QP
4	56.39	41.90	-17.62	24.28	40.00	-15.72	100	237 QP
5	66.50	42.71	-17.39	25.32	40.00	-14.68	100	357 QP
6	157.56	37.10	-12.24	24.86	43.50	-18.64	100	360 QP

1GHz-18GHz:


802.11b Mode:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
- Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
- Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)


Low Channel: 2412MHz

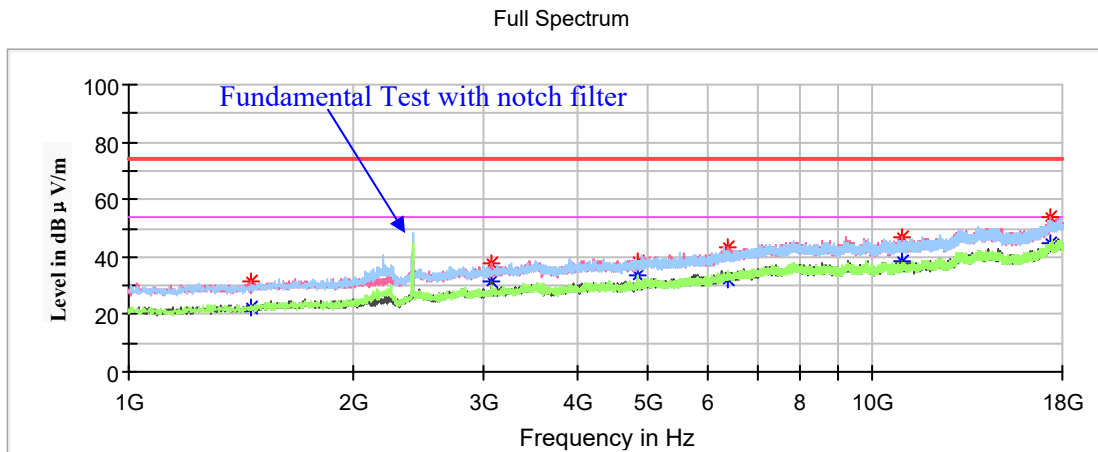

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1462.400000	31.24	---	200.0	H	205.0	-16.6	74.00	42.76
1462.400000	---	22.42	200.0	H	205.0	-16.6	54.00	31.58
3070.600000	---	31.34	200.0	V	298.0	-9.9	54.00	22.66
3070.600000	37.86	---	200.0	V	298.0	-9.9	74.00	36.14
4824.000000	38.34	---	150.0	H	326.0	-5.5	74.00	35.66
4824.000000	---	33.80	150.0	H	326.0	-5.5	54.00	20.20
6389.000000	---	32.51	150.0	H	320.0	-1.6	54.00	21.49
6389.000000	43.26	---	150.0	H	320.0	-1.6	74.00	30.74
10936.500000	---	38.25	150.0	V	359.0	2.8	54.00	15.75
10936.500000	46.77	---	150.0	V	359.0	2.8	74.00	27.23
17306.400000	---	44.56	200.0	V	77.0	8.2	54.00	9.44
17306.400000	54.10	---	200.0	V	77.0	8.2	74.00	19.90

Middle Channel: 2437MHz


Full Spectrum

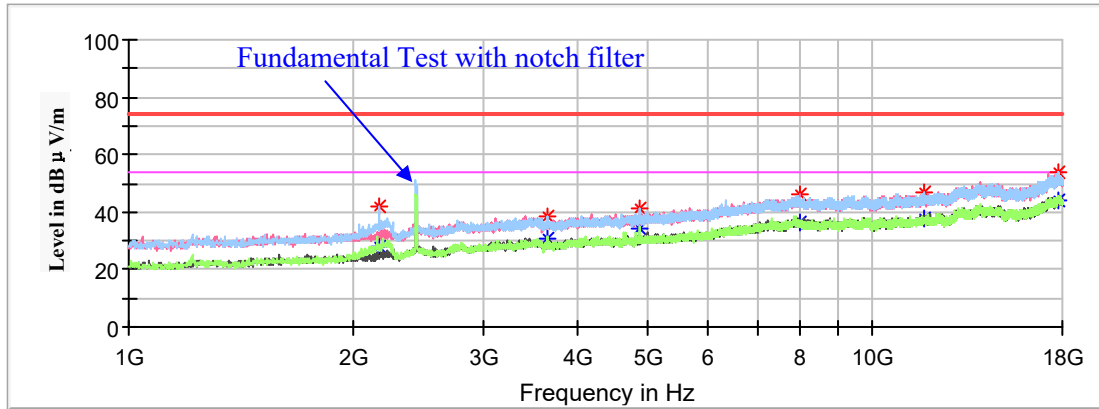

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
2169.600000	41.70	---	200.0	H	0.0	-13.8	74.00	32.30
2169.600000	---	27.67	200.0	H	0.0	-13.8	54.00	26.33
3652.000000	---	31.11	150.0	H	35.0	-8.3	54.00	22.89
3652.000000	38.20	---	150.0	H	35.0	-8.3	74.00	35.80
4874.000000	---	33.99	150.0	H	332.0	-5.4	54.00	20.01
4874.000000	41.30	---	150.0	H	332.0	-5.4	74.00	32.70
7987.000000	---	36.30	150.0	V	218.0	1.8	54.00	17.70
7987.000000	45.86	---	150.0	V	218.0	1.8	74.00	28.14
11737.200000	---	38.03	200.0	H	60.0	3.3	54.00	15.97
11737.200000	47.18	---	200.0	H	60.0	3.3	74.00	26.82
17830.000000	---	44.11	200.0	H	168.0	8.8	54.00	9.89
17830.000000	53.73	---	200.0	H	168.0	8.8	74.00	20.27

High Channel: 2462MHz

Full Spectrum

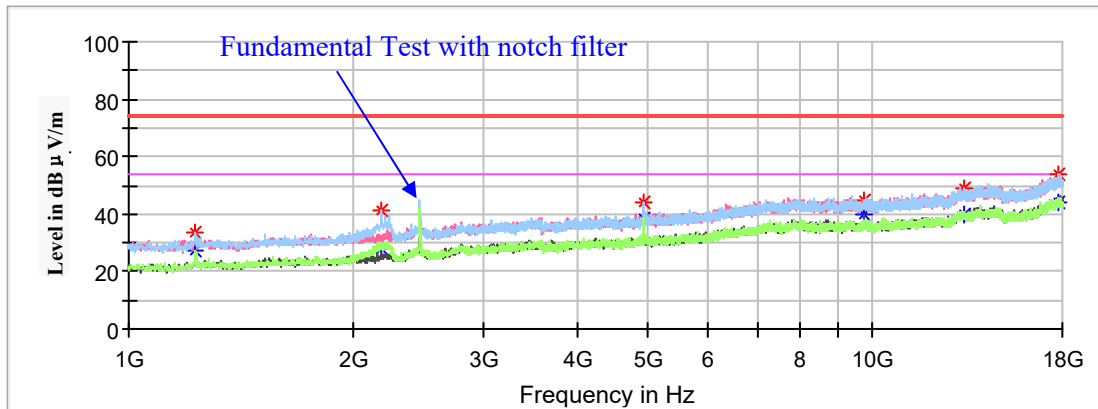

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1229.500000	---	26.93	150.0	H	313.0	-17.8	54.00	27.07
1229.500000	33.23	---	150.0	H	313.0	-17.8	74.00	40.77
2184.900000	41.51	---	150.0	H	356.0	-13.7	74.00	32.49
2184.900000	---	28.25	150.0	H	356.0	-13.7	54.00	25.75
4924.000000	44.17	---	150.0	H	0.0	-5.3	74.00	29.83
4924.000000	---	38.31	150.0	H	0.0	-5.3	54.00	15.69
9724.400000	44.45	---	150.0	V	71.0	2.0	74.00	29.55
9724.400000	---	39.84	150.0	V	71.0	2.0	54.00	14.16
13291.000000	---	39.63	150.0	V	300.0	5.5	54.00	14.37
13291.000000	48.75	---	150.0	V	300.0	5.5	74.00	25.25
17816.400000	---	44.38	150.0	H	225.0	8.8	54.00	9.62
17816.400000	53.81	---	150.0	H	225.0	8.8	74.00	20.19

802.11g Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel: 2412MHz


Full Spectrum

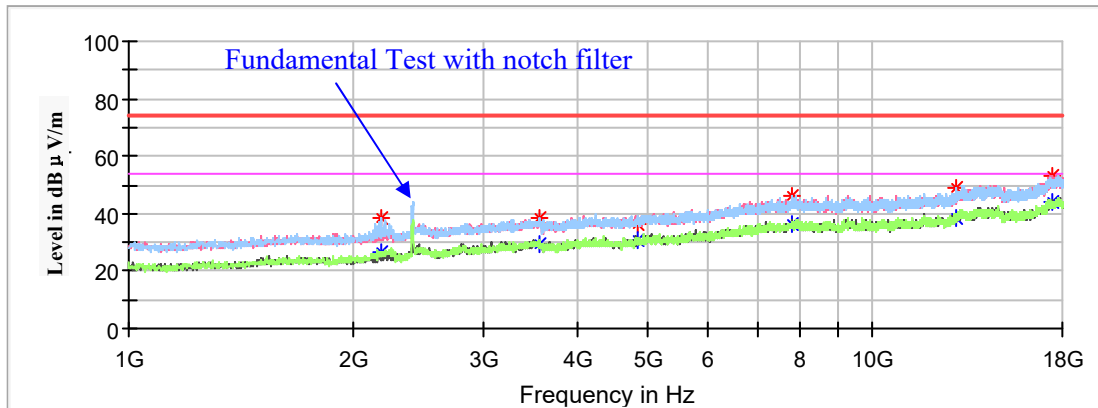

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
2179.800000	38.45	---	200.0	H	356.0	-13.7	74.00	35.55
2179.800000	---	26.62	200.0	H	356.0	-13.7	54.00	27.38
3560.200000	---	29.34	150.0	H	186.0	-8.6	54.00	24.66
3560.200000	38.66	---	150.0	H	186.0	-8.6	74.00	35.34
4824.000000	---	30.97	150.0	V	313.0	-5.5	54.00	23.03
4824.000000	36.36	---	150.0	V	313.0	-5.5	74.00	37.64
7771.100000	---	36.25	200.0	H	249.0	1.5	54.00	17.75
7771.100000	46.21	---	200.0	H	249.0	1.5	74.00	27.79
12957.800000	---	38.41	150.0	H	288.0	5.0	54.00	15.59
12957.800000	49.25	---	150.0	H	288.0	5.0	74.00	24.75
17484.900000	---	44.04	150.0	V	103.0	8.8	54.00	9.96
17484.900000	53.25	---	150.0	V	103.0	8.8	74.00	20.75

Middle Channel: 2437MHz


Full Spectrum

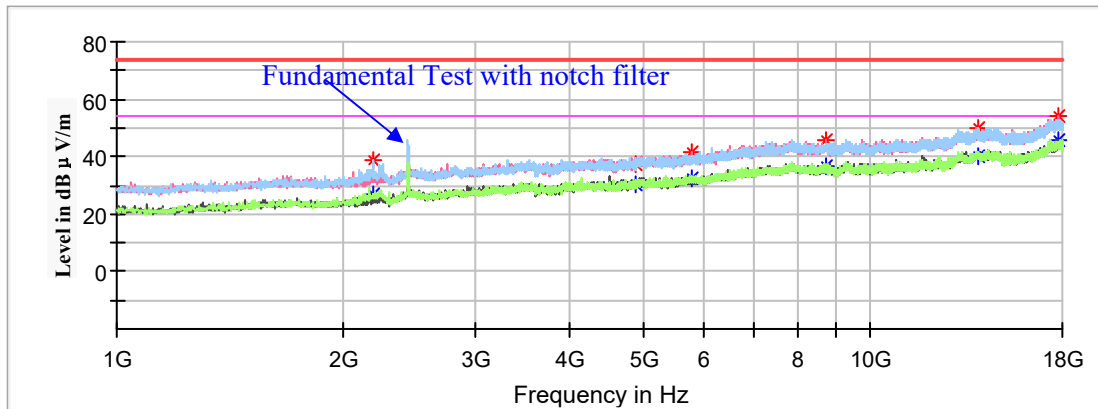

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
2193.400000	38.87	---	200.0	H	359.0	-13.7	74.00	35.13
2193.400000	---	27.14	200.0	H	359.0	-13.7	54.00	26.86
4974.000000	37.44	---	150.0	H	155.0	-5.4	74.00	36.56
4974.000000	---	30.39	150.0	H	155.0	-5.4	54.00	23.61
5797.400000	---	32.58	150.0	V	270.0	-3.4	54.00	21.42
5797.400000	41.73	---	150.0	V	270.0	-3.4	74.00	32.27
8723.100000	---	36.38	200.0	V	236.0	1.6	54.00	17.62
8723.100000	45.43	---	200.0	V	236.0	1.6	74.00	28.57
13916.600000	---	40.41	150.0	H	63.0	6.1	54.00	13.59
13916.600000	50.20	---	150.0	H	63.0	6.1	74.00	23.80
17818.100000	53.79	---	200.0	V	187.0	8.8	74.00	20.21
17818.100000	---	45.55	200.0	V	187.0	8.8	54.00	8.45

High Channel: 2462MHz

Full Spectrum

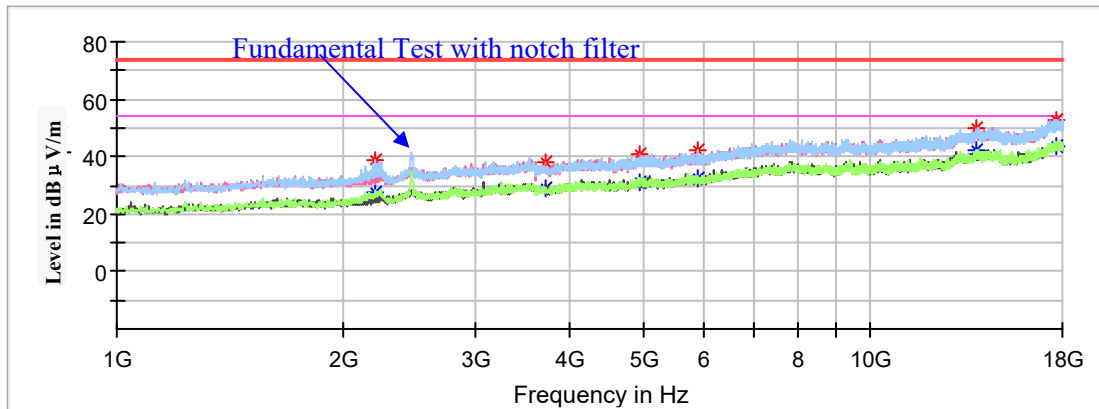

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
2198.500000	---	27.53	150.0	H	89.0	-13.7	54.00	26.47
2198.500000	38.74	---	150.0	H	89.0	-13.7	74.00	35.26
3711.500000	38.15	---	200.0	H	140.0	-8.1	74.00	35.85
3711.500000	---	28.90	200.0	H	140.0	-8.1	54.00	25.10
4924.000000	41.07	---	200.0	V	156.0	-5.3	74.00	32.93
4924.000000	---	31.20	200.0	V	156.0	-5.3	54.00	22.80
5909.600000	---	32.68	150.0	H	153.0	-3.2	54.00	21.32
5909.600000	41.91	---	150.0	H	153.0	-3.2	74.00	32.09
13852.000000	49.93	---	150.0	H	352.0	6.0	74.00	24.07
13852.000000	---	42.13	150.0	H	352.0	6.0	54.00	11.87
17724.600000	---	43.91	200.0	V	147.0	8.8	54.00	10.09
17724.600000	52.74	---	200.0	V	147.0	8.8	74.00	21.26

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel: 2412MHz


Full Spectrum

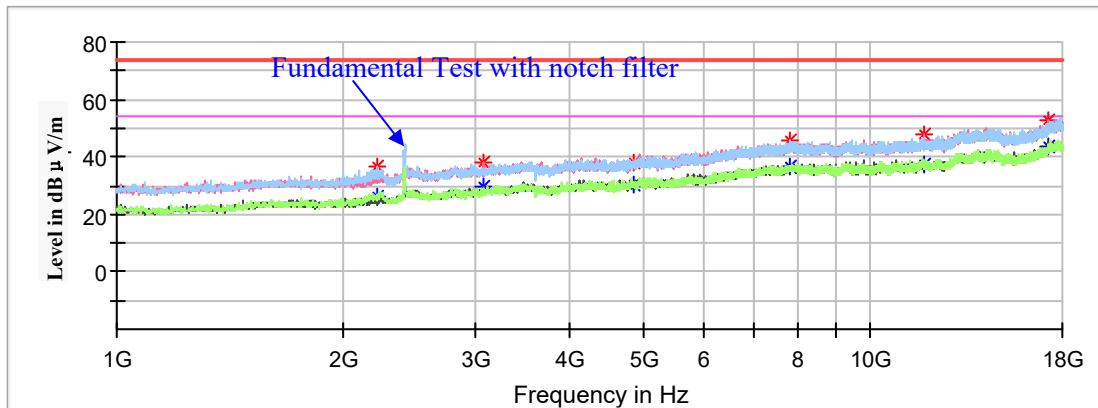

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
2222.300000	---	26.23	200.0	H	155.0	-13.6	54.00	27.77
2222.300000	36.35	---	200.0	H	155.0	-13.6	74.00	37.65
3070.600000	---	29.40	150.0	V	173.0	-9.9	54.00	24.60
3070.600000	38.18	---	150.0	V	173.0	-9.9	74.00	35.82
4824.000000	---	30.20	150.0	H	161.0	-5.5	54.00	23.80
4824.000000	37.98	---	150.0	H	161.0	-5.5	74.00	36.02
7825.500000	---	36.94	200.0	H	76.0	1.5	54.00	17.06
7825.500000	45.48	---	200.0	H	76.0	1.5	74.00	28.52
11796.700000	---	37.38	200.0	V	237.0	3.4	54.00	16.62
11796.700000	47.59	---	200.0	V	237.0	3.4	74.00	26.41
17265.600000	---	43.85	150.0	V	129.0	8.1	54.00	10.15
17265.600000	52.55	---	150.0	V	129.0	8.1	74.00	21.45

Middle Channel: 2437MHz


Full Spectrum

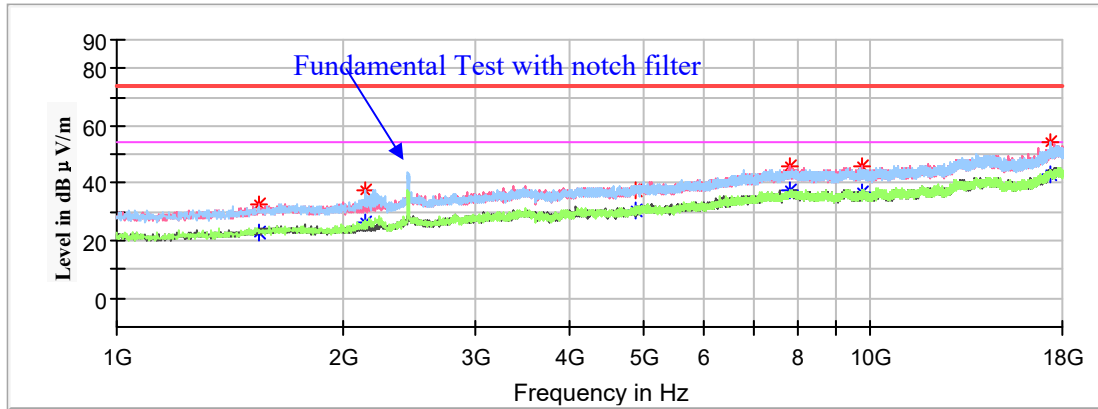

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1545.700000	---	23.14	200.0	V	38.0	-16.2	54.00	30.86
1545.700000	32.62	---	200.0	V	38.0	-16.2	74.00	41.38
2139.000000	37.32	---	200.0	H	266.0	-13.9	74.00	36.68
2139.000000	---	26.53	200.0	H	266.0	-13.9	54.00	27.47
4874.000000	37.49	---	200.0	H	0.0	-5.4	74.00	36.51
4874.000000	---	30.47	200.0	H	0.0	-5.4	54.00	23.53
7834.000000	46.10	---	150.0	V	161.0	1.6	74.00	27.90
7834.000000	---	37.29	150.0	V	161.0	1.6	54.00	16.71
9729.500000	---	36.81	150.0	H	326.0	2.0	54.00	17.19
9729.500000	45.90	---	150.0	H	326.0	2.0	74.00	28.10
17340.400000	54.03	---	150.0	H	136.0	8.3	74.00	19.97
17340.400000	---	43.30	150.0	H	136.0	8.3	54.00	10.70

High Channel: 2462MHz

Full Spectrum

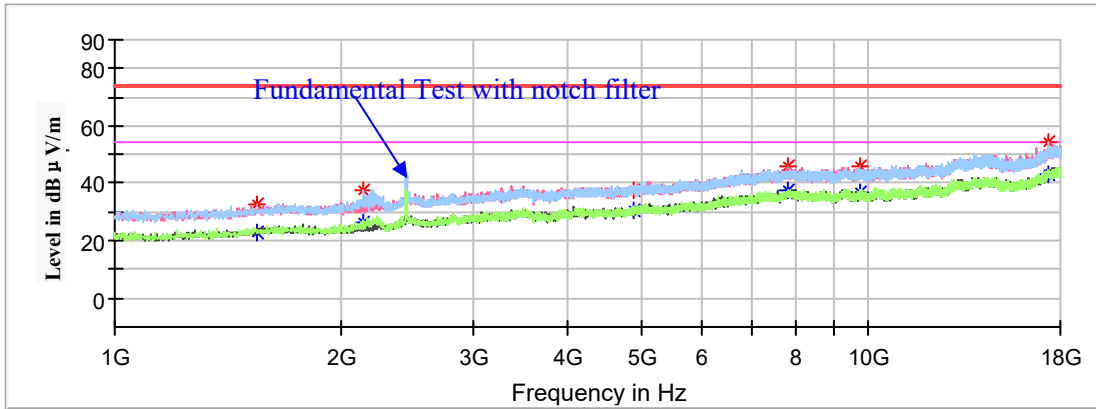


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1545.700000	---	23.14	200.0	V	38.0	-16.2	54.00	30.86
1545.700000	32.62	---	200.0	V	38.0	-16.2	74.00	41.38
2139.000000	37.32	---	200.0	H	266.0	-13.9	74.00	36.68
2139.000000	---	26.53	200.0	H	266.0	-13.9	54.00	27.47
4974.000000	37.49	---	200.0	H	0.0	-5.4	74.00	36.51
4974.000000	---	30.47	200.0	H	0.0	-5.4	54.00	23.53
7834.000000	46.10	---	150.0	V	161.0	1.6	74.00	27.90
7834.000000	---	37.29	150.0	V	161.0	1.6	54.00	16.71
9729.500000	---	36.81	150.0	H	326.0	2.0	54.00	17.19
9729.500000	45.90	---	150.0	H	326.0	2.0	74.00	28.10
17340.400000	54.03	---	150.0	H	136.0	8.3	74.00	19.97
17340.400000	---	43.30	150.0	H	136.0	8.3	54.00	10.70

18GHz-25GHz:


Pre-scan with 802.11b, 802.11g and 802.11n-HT20 modes of operation in the X,Y and Z axes of orientation, the worst case low channel of 802.11g mode in Z-axis of orientation was recorded

Horizontal

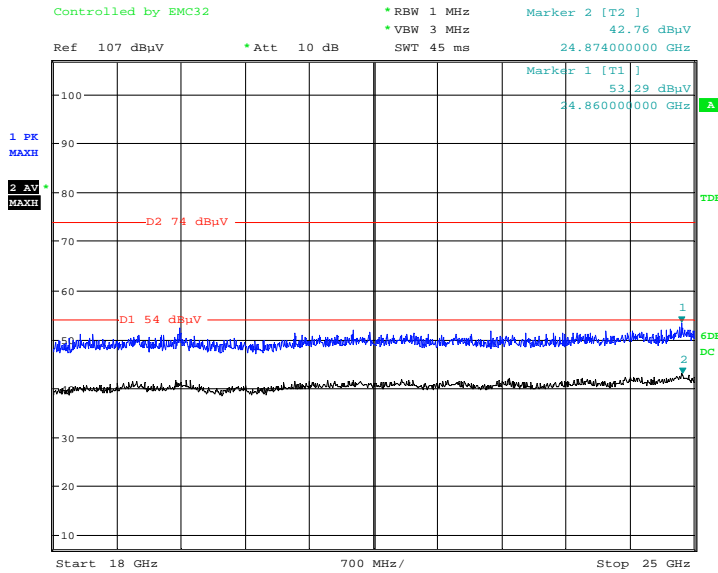

Date: 25.JAN.2021 20:37:50

Vertical

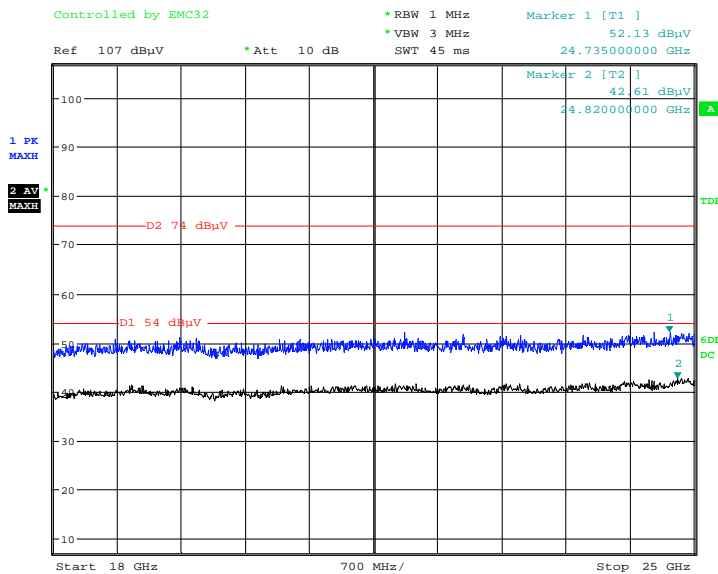

Date: 25.JAN.2021 20:26:12

Restricted Bands Emissions Test:

Note:

- 1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
- Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
- Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

802.11b Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.000000	61.42	---	150.0	H	0.0	-2.9	74.00	12.58
2390.000000	---	53.46	150.0	H	0.0	-2.9	54.00	0.54
High Channel: 2462MHz								
2483.500000	56.49	---	200.0	H	353.0	-2.5	74.00	17.51
2483.500000	---	50.08	200.0	H	353.0	-2.5	54.00	3.92

802.11g Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.000000	58.62	---	150.0	H	0.0	-2.9	74.00	15.38
2390.000000	---	50.55	150.0	H	0.0	-2.9	54.00	3.45
High Channel: 2462MHz								
2483.500000	55.39	---	150.0	H	1.0	-2.5	74.00	18.61
2483.500000	---	50.68	150.0	H	1.0	-2.5	54.00	3.32

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.000000	56.64	---	150.0	H	358.0	-2.9	74.00	17.36
2390.000000	---	47.80	150.0	H	358.0	-2.9	54.00	6.20
High Channel: 2462MHz								
2483.500000	57.37	---	150.0	H	4.0	-2.5	74.00	16.63
2483.500000	---	50.41	150.0	H	4.0	-2.5	54.00	3.59


For BLE Mode(1Mbps):

Spurious Emission Test:

30MHz-1GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in the **Z** axis of orientation was recorded)

Horizontal:

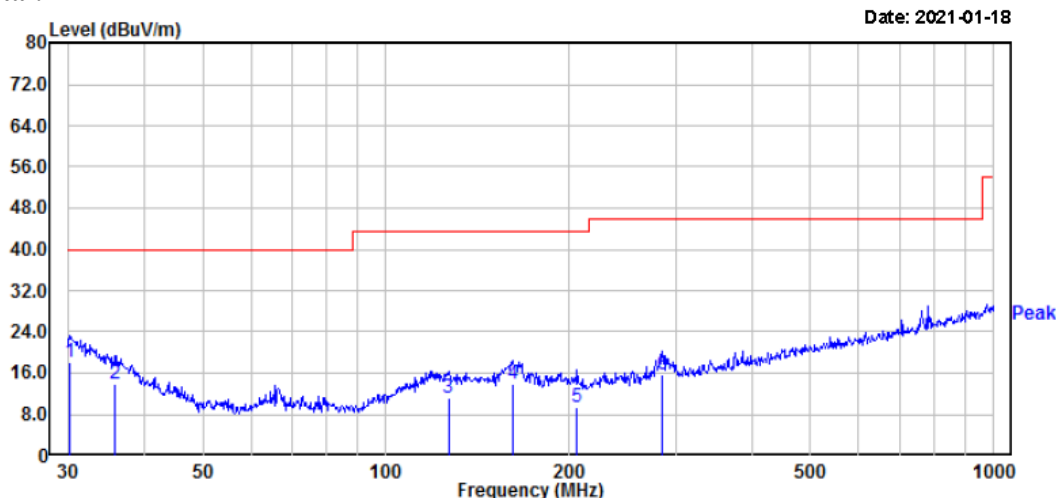

	Read Freq	Read Level	Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	30.21	22.01	-3.82	18.19	40.00	-21.81	200	332 QP
2	35.87	22.40	-8.41	13.99	40.00	-26.01	100	75 QP
3	126.77	22.31	-11.29	11.02	43.50	-32.48	200	119 QP
4	162.04	26.40	-12.37	14.03	43.50	-29.47	200	105 QP
5	206.40	21.70	-12.40	9.30	43.50	-34.20	100	162 QP
6	284.98	26.41	-10.78	15.63	46.00	-30.37	100	102 QP

Vertical:

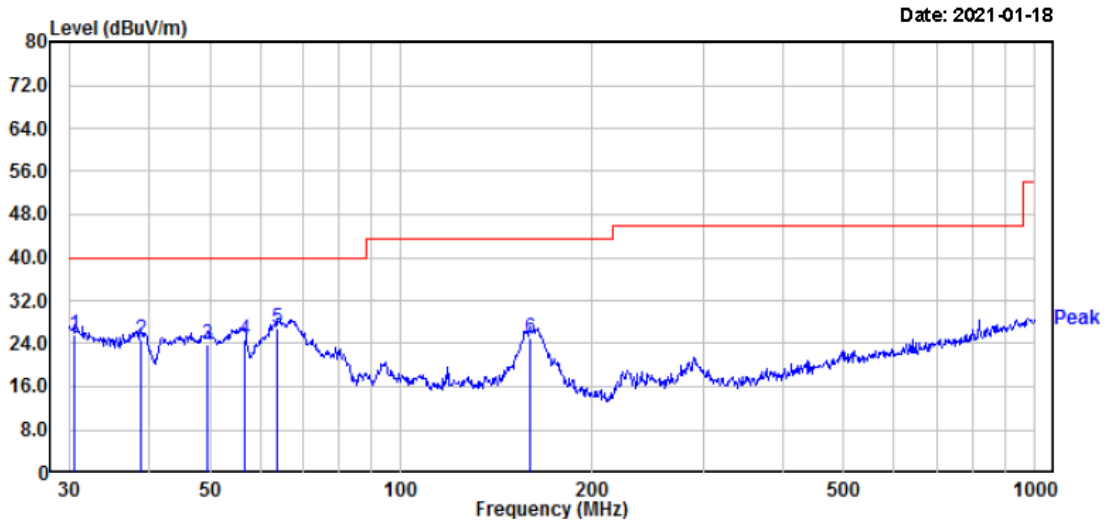

	Read Freq	Read Level	Read Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	30.53	29.60	-4.07	25.53	40.00	-14.47	100	359 QP
2	38.89	35.60	-10.88	24.72	40.00	-15.28	100	72 QP
3	49.53	40.94	-16.96	23.98	40.00	-16.02	100	178 QP
4	56.79	42.44	-17.65	24.79	40.00	-15.21	100	282 QP
5	63.98	44.36	-17.57	26.79	40.00	-13.21	100	233 QP
6	160.35	37.44	-12.30	25.14	43.50	-18.36	100	301 QP

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel: 2402MHz


Full Spectrum

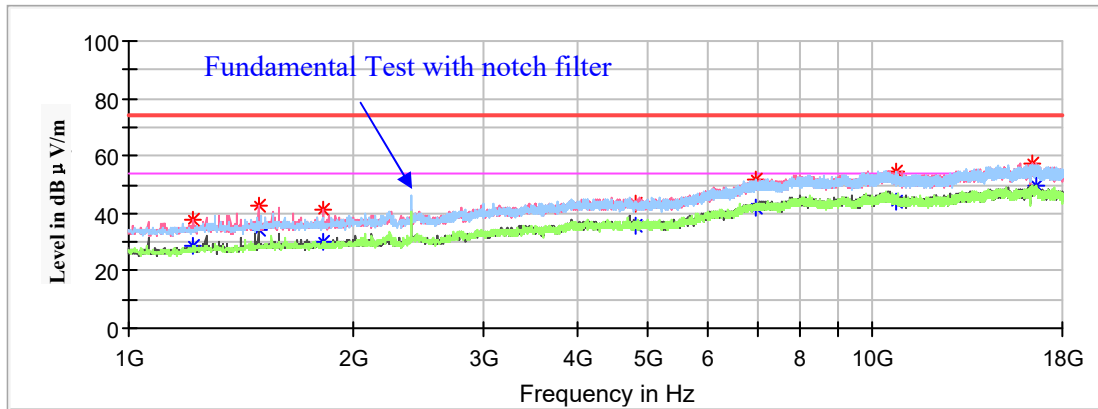

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1222.700000	---	28.45	150.0	V	276.0	-17.1	54.00	25.55
1222.700000	37.61	---	150.0	V	276.0	-17.1	74.00	36.39
1493.000000	42.55	---	150.0	V	291.0	-16.4	74.00	31.45
1493.000000	---	33.99	150.0	V	291.0	-16.4	54.00	20.01
1822.800000	---	30.12	200.0	V	209.0	-14.6	54.00	23.88
1822.800000	41.29	---	200.0	V	209.0	-14.6	74.00	32.71
4804.000000	---	35.97	200.0	V	323.0	-5.1	54.00	18.03
4804.000000	43.59	---	200.0	V	323.0	-5.1	74.00	30.41
6958.500000	51.77	---	150.0	H	214.0	-1.3	74.00	22.23
6958.500000	---	42.20	150.0	H	214.0	-1.3	54.00	11.80
10790.300000	---	43.90	150.0	H	60.0	2.4	54.00	10.10
10790.300000	54.56	---	150.0	H	60.0	2.4	74.00	19.44

Middle Channel: 2440MHz


Full Spectrum

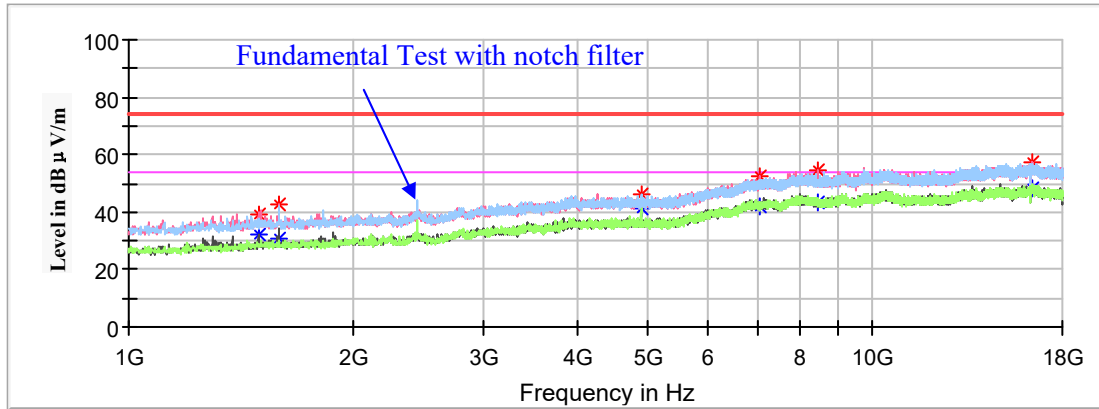

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1493.000000	39.25	---	150.0	V	299.0	-16.4	74.00	34.75
1493.000000	---	32.29	150.0	V	299.0	-16.4	54.00	21.71
1595.000000	---	30.59	200.0	V	278.0	-16.1	54.00	23.41
1595.000000	42.89	---	200.0	V	278.0	-16.1	74.00	31.11
4880.000000	45.83	---	150.0	H	198.0	-5.3	74.00	28.17
4880.000000	---	41.25	150.0	H	198.0	-5.3	54.00	12.75
7070.700000	---	42.23	150.0	V	114.0	1.5	54.00	11.77
7070.700000	52.79	---	150.0	V	114.0	1.5	74.00	21.21
8440.900000	54.51	---	150.0	V	238.0	2.0	74.00	19.49
8440.900000	---	43.68	150.0	V	238.0	2.0	54.00	10.32
16420.700000	---	48.28	200.0	V	182.0	7.8	54.00	5.72
16420.700000	57.57	---	200.0	V	182.0	7.8	74.00	16.43

High Channel: 2480MHz

Full Spectrum

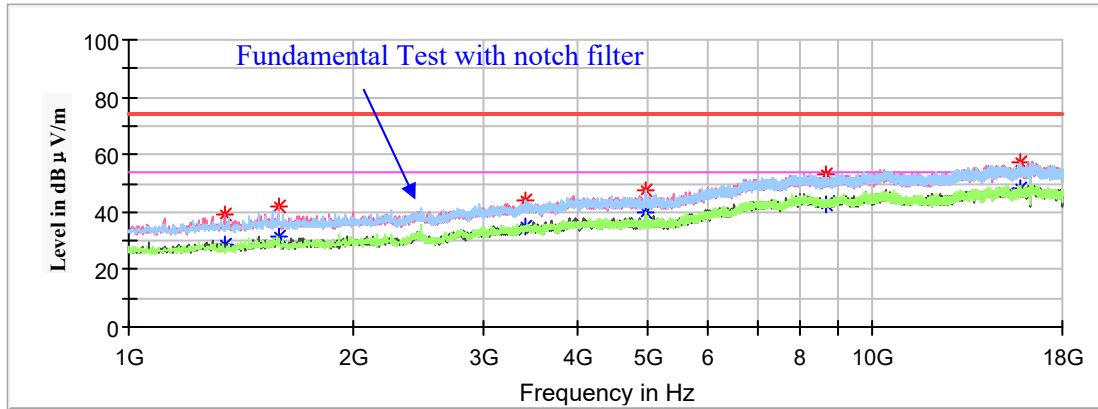


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1345.100000	---	28.60	200.0	V	256.0	-17.1	54.00	25.40
1345.100000	39.49	---	200.0	V	256.0	-17.1	74.00	34.51
1593.300000	41.66	---	200.0	V	288.0	-15.8	74.00	32.34
1593.300000	---	31.17	200.0	V	288.0	-15.8	54.00	22.83
3414.000000	43.99	---	150.0	H	214.0	-8.7	74.00	30.01
3414.000000	---	34.74	150.0	H	214.0	-8.7	54.00	19.26
4960.000000	47.79	---	200.0	H	208.0	-4.9	74.00	26.21
4960.000000	---	39.86	200.0	H	208.0	-4.9	54.00	14.14
8639.800000	---	42.83	150.0	H	262.0	3.1	54.00	11.17
8639.800000	53.37	---	150.0	H	262.0	3.1	74.00	20.63
15761.100000	---	48.44	200.0	V	353.0	6.7	54.00	5.56
15761.100000	57.09	---	200.0	V	353.0	6.7	74.00	16.91

18GHz-25GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case low channel of operation in the Z axis of orientation was recorded)

Horizontal

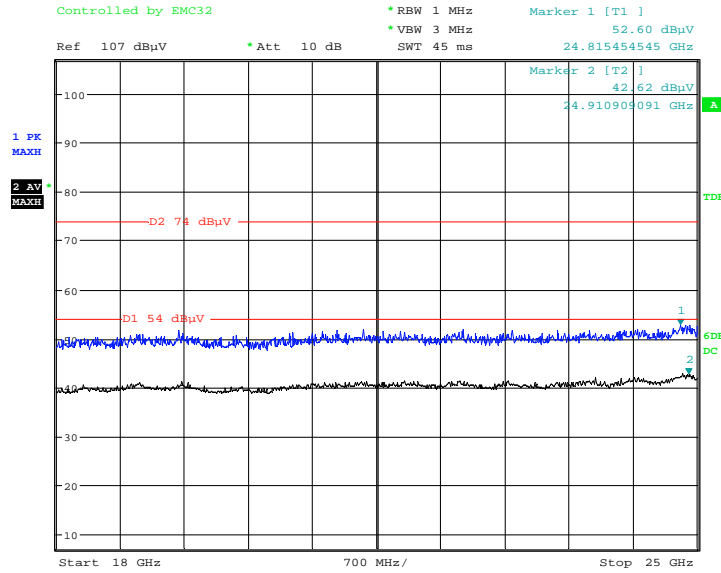

Date: 25.JAN.2021 20:00:13

Vertical

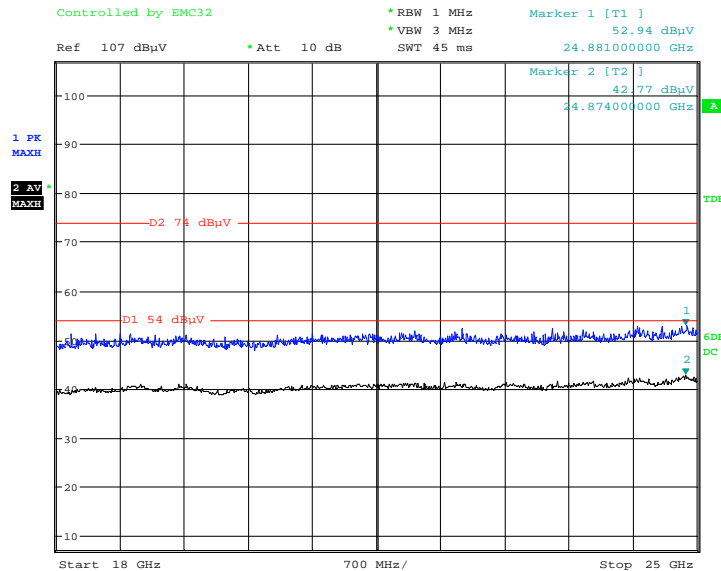

Date: 25.JAN.2021 19:50:39

Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

- 1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
- Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
- Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.000000	51.49	---	200.0	V	331.0	3.8	74.00	22.51
2390.000000	---	45.96	200.0	V	331.0	3.8	54.00	8.04
High Channel: 2480MHz								
2483.500000	51.88	---	150.0	V	14.0	4.1	74.00	22.12
2483.500000	---	45.71	200.0	H	14.0	4.1	54.00	8.29


For BLE Mode(2Mbps):

Spurious Emission Test:

30MHz-1GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high** channel of operation in the Z axis of orientation was recorded)

Horizontal:

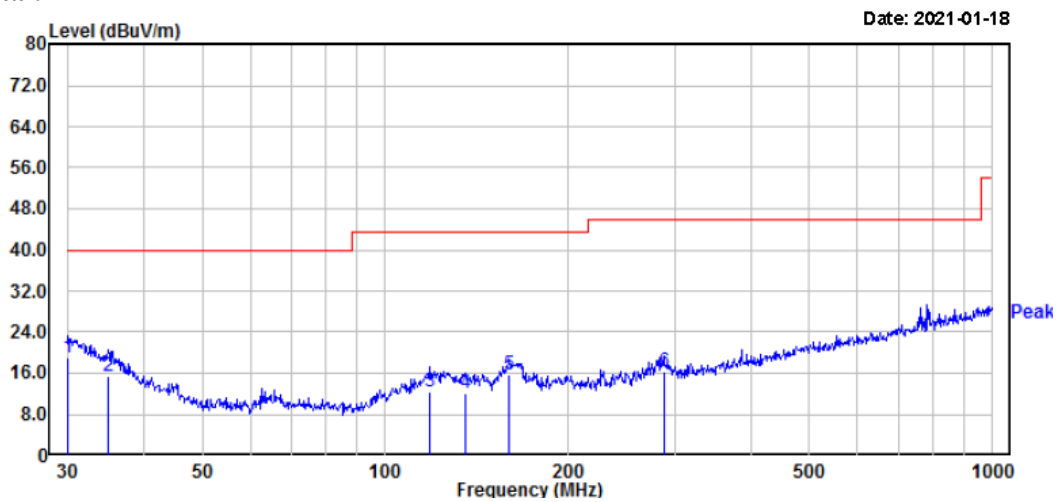

	Read Freq	Read Level	Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	30.11	22.66	-3.73	18.93	40.00	-21.07	100	160 QP
2	35.00	23.17	-7.69	15.48	40.00	-24.52	200	82 QP
3	118.19	23.56	-11.27	12.29	43.50	-31.21	200	359 QP
4	135.98	23.91	-11.79	12.12	43.50	-31.38	200	90 QP
5	160.35	27.89	-12.30	15.59	43.50	-27.91	200	292 QP
6	287.99	27.05	-10.73	16.32	46.00	-29.68	100	42 QP

Vertical:

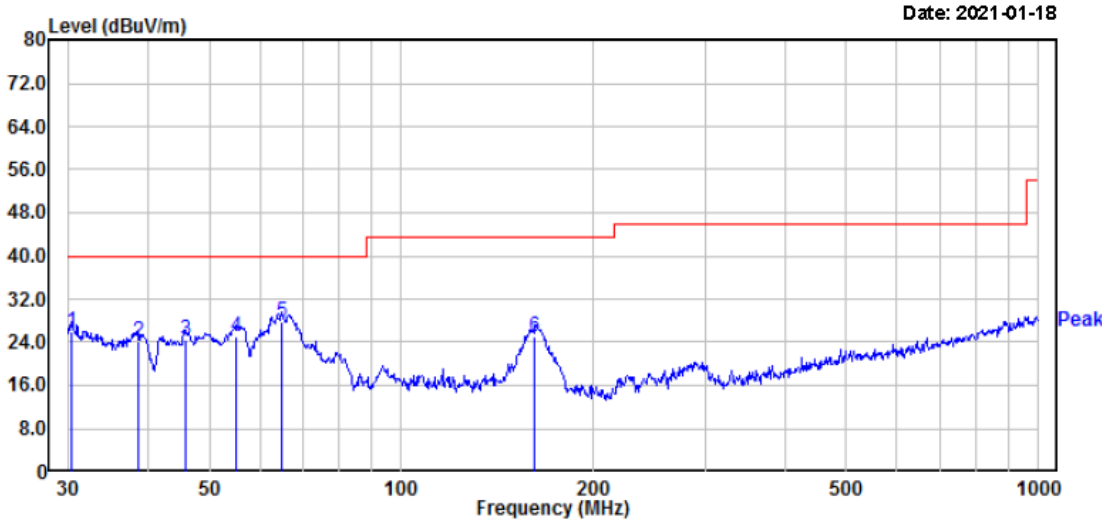

	Read Freq	Read Level	Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	30.32	29.73	-3.90	25.83	40.00	-14.17	100	327 QP
2	38.75	34.86	-10.76	24.10	40.00	-15.90	100	299 QP
3	45.86	39.30	-14.97	24.33	40.00	-15.67	100	146 QP
4	55.03	42.56	-17.53	25.03	40.00	-14.97	100	312 QP
5	64.89	45.24	-17.51	27.73	40.00	-12.27	100	194 QP
6	162.04	37.44	-12.37	25.07	43.50	-18.43	100	236 QP

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel: 2402MHz


Full Spectrum

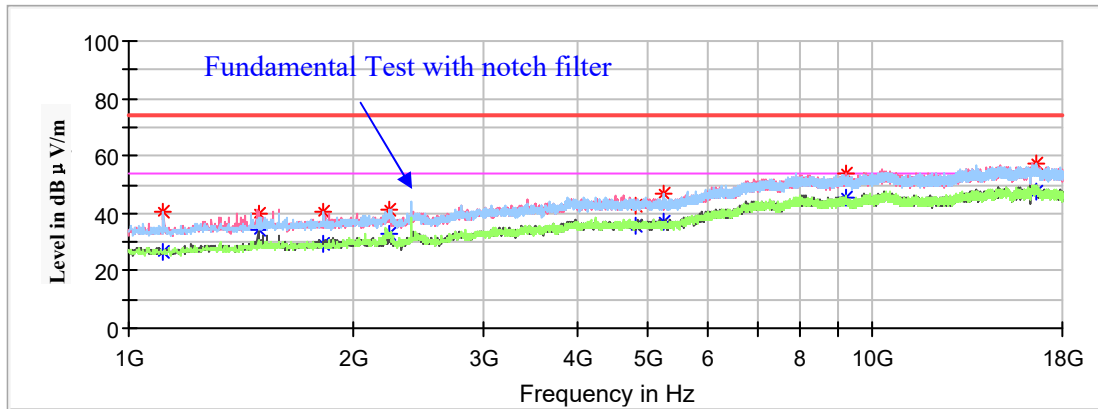

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1113.900000	40.74	---	200.0	H	331.0	-18.2	74.00	33.26
1113.900000	---	26.73	200.0	H	331.0	-18.2	54.00	27.27
1493.000000	---	34.56	150.0	V	275.0	-16.4	54.00	19.44
1493.000000	40.03	---	150.0	V	275.0	-16.4	74.00	33.97
1829.600000	40.65	---	150.0	V	193.0	-14.3	74.00	33.35
1829.600000	---	29.38	150.0	V	193.0	-14.3	54.00	24.62
2242.700000	41.17	---	150.0	H	276.0	-13.6	74.00	32.83
2242.700000	---	32.67	150.0	H	276.0	-13.6	54.00	21.33
4804.000000	42.85	---	150.0	H	195.0	-5.6	74.00	31.15
4804.000000	---	35.88	150.0	H	195.0	-5.6	54.00	18.12
5244.900000	46.57	---	150.0	H	49.0	-5.0	74.00	27.43
5244.900000	---	37.12	150.0	H	49.0	-5.0	54.00	16.88
9207.600000	---	45.50	200.0	V	319.0	1.7	54.00	8.50
9207.600000	54.13	---	200.0	V	319.0	1.7	74.00	19.87
16566.900000	---	47.64	200.0	H	146.0	7.8	54.00	6.36
16566.900000	57.51	---	200.0	H	146.0	7.8	74.00	16.49

Middle Channel: 2440MHz


Full Spectrum

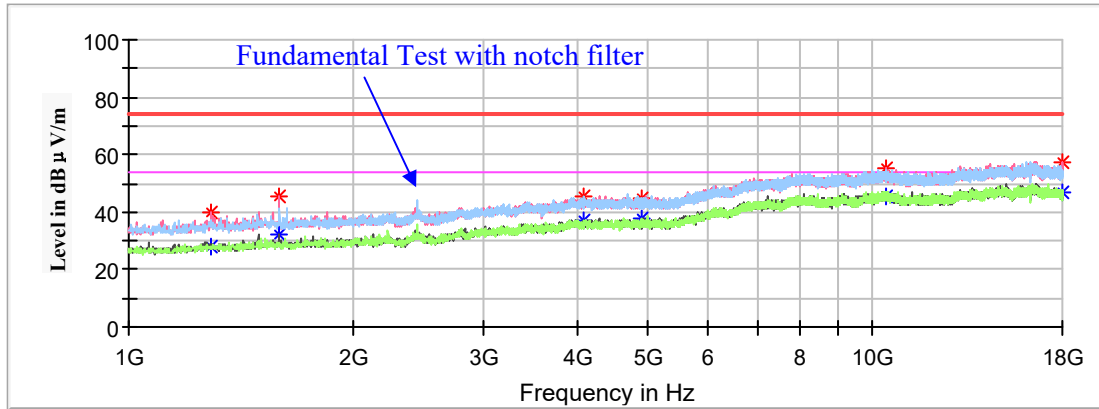

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1289.000000	---	28.20	150.0	V	244.0	-17.7	54.00	25.80
1289.000000	39.92	---	150.0	V	244.0	-17.7	74.00	34.08
1595.000000	45.23	---	150.0	V	289.0	-16.3	74.00	28.77
1595.000000	---	32.50	150.0	V	289.0	-16.3	54.00	21.50
4099.100000	---	37.29	150.0	H	273.0	-5.8	54.00	16.71
4099.100000	45.40	---	150.0	H	273.0	-5.8	74.00	28.60
4880.000000	---	37.90	150.0	H	162.0	-5.3	54.00	16.10
4880.000000	44.96	---	150.0	H	162.0	-5.3	74.00	29.04
10404.400000	55.09	---	200.0	V	355.0	2.6	74.00	18.91
10404.400000	---	45.79	200.0	V	355.0	2.6	54.00	8.21
17974.500000	---	46.54	150.0	V	10.0	8.6	54.00	7.46
17974.500000	57.69	---	150.0	V	10.0	8.6	74.00	16.31

High Channel: 2480MHz

Full Spectrum

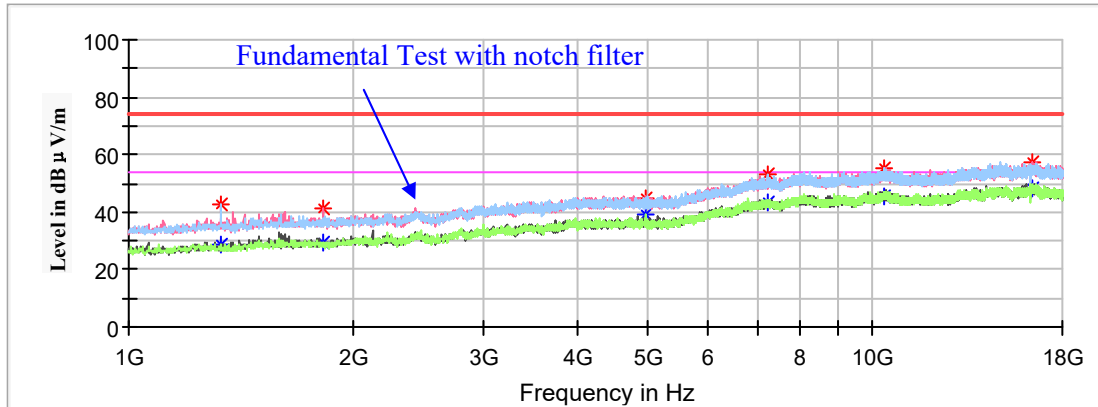


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1328.100000	---	28.53	200.0	H	83.0	-17.0	54.00	25.47
1328.100000	42.84	---	200.0	H	83.0	-17.0	74.00	31.16
1826.200000	41.44	---	200.0	V	208.0	-16.1	74.00	32.56
1826.200000	---	29.28	200.0	V	208.0	-16.1	54.00	24.72
4960.000000	---	39.13	150.0	H	74.0	-4.8	54.00	14.87
4960.000000	44.71	---	150.0	H	74.0	-4.8	74.00	29.29
7211.800000	53.06	---	150.0	H	67.0	1.1	74.00	20.94
7211.800000	---	43.43	150.0	H	67.0	1.1	54.00	10.57
10390.800000	---	45.16	150.0	H	358.0	2.4	54.00	8.84
10390.800000	54.92	---	150.0	H	358.0	2.4	74.00	19.08
16362.900000	---	48.24	150.0	V	207.0	7.1	54.00	5.76
16362.900000	57.33	---	150.0	V	207.0	7.1	74.00	16.67

18GHz-25GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high** channel of operation in the Z axis of orientation was recorded)

Horizontal

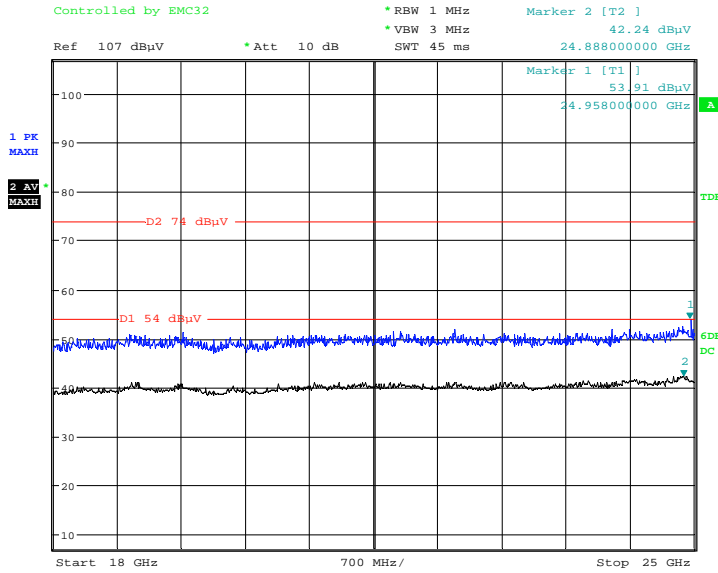

Date: 25.JAN.2021 20:17:37

Vertical

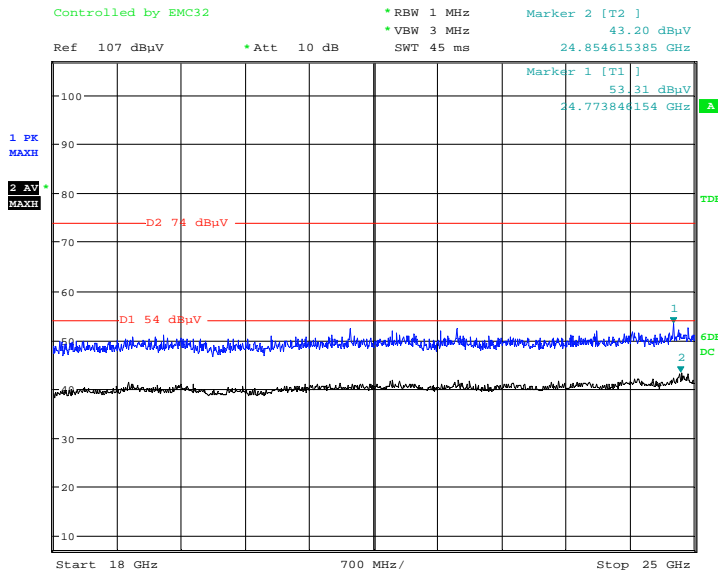

Date: 25.JAN.2021 20:06:54

Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Note:

- 1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
- Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
- Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.000000	51.73	---	150.0	V	42.0	3.8	74.00	22.27
2390.000000	---	45.85	150.0	V	42.0	3.8	54.00	8.15
High Channel: 2480MHz								
2483.500000	52.18	---	150.0	H	191.0	4.1	74.00	21.82
2483.500000	---	46.21	150.0	H	191.0	4.1	54.00	7.79

Conducted Spurious Emissions at Antenna Port


802.11b Mode Low Channel

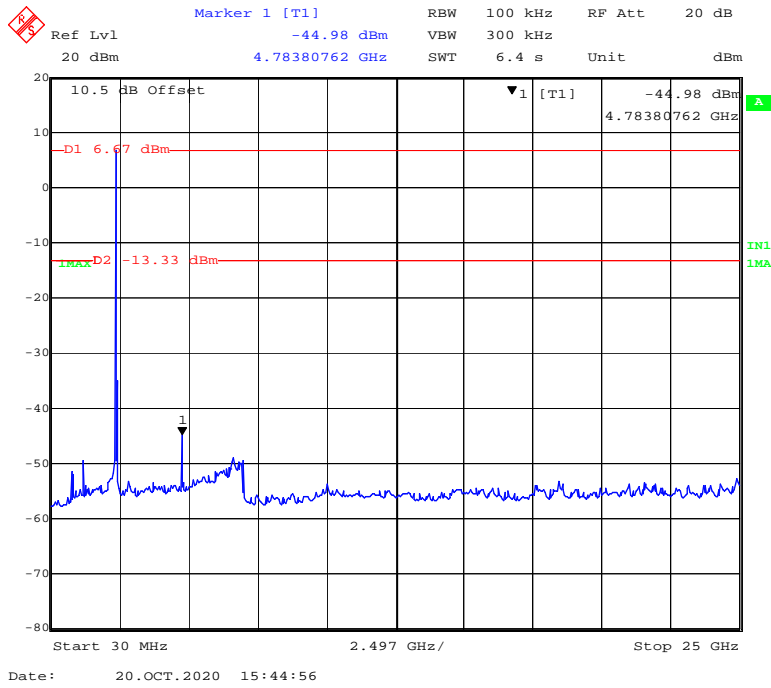


802.11b Mode Middle Channel

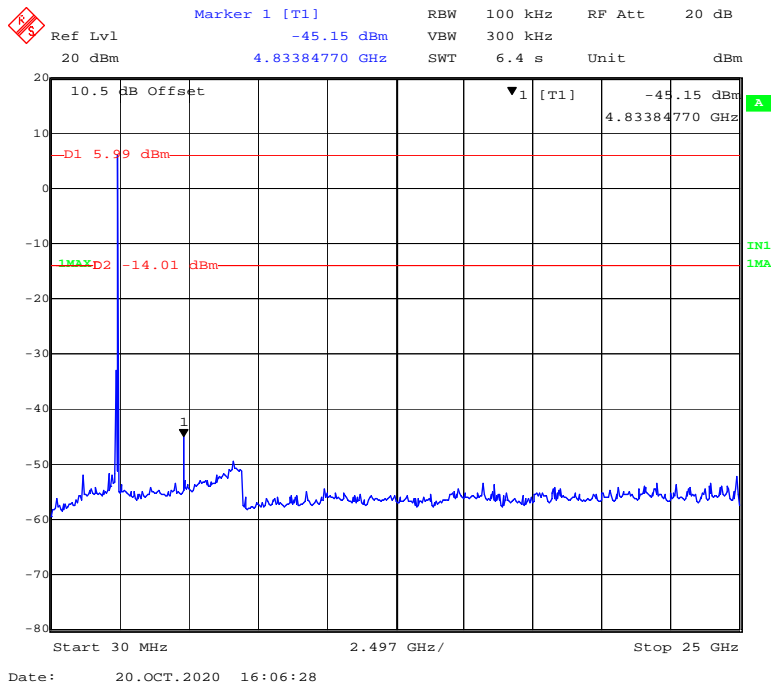


802.11b Mode High Channel

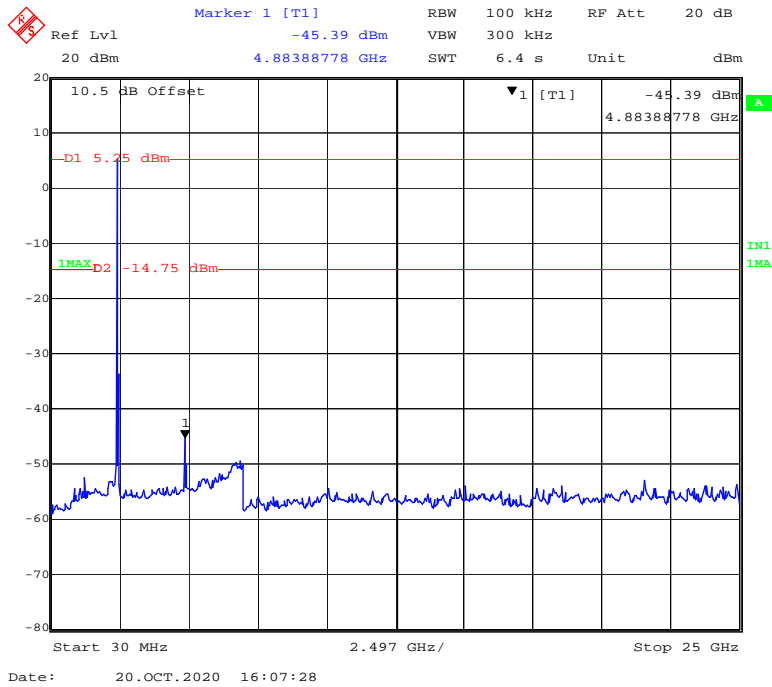


802.11g Mode Low Channel

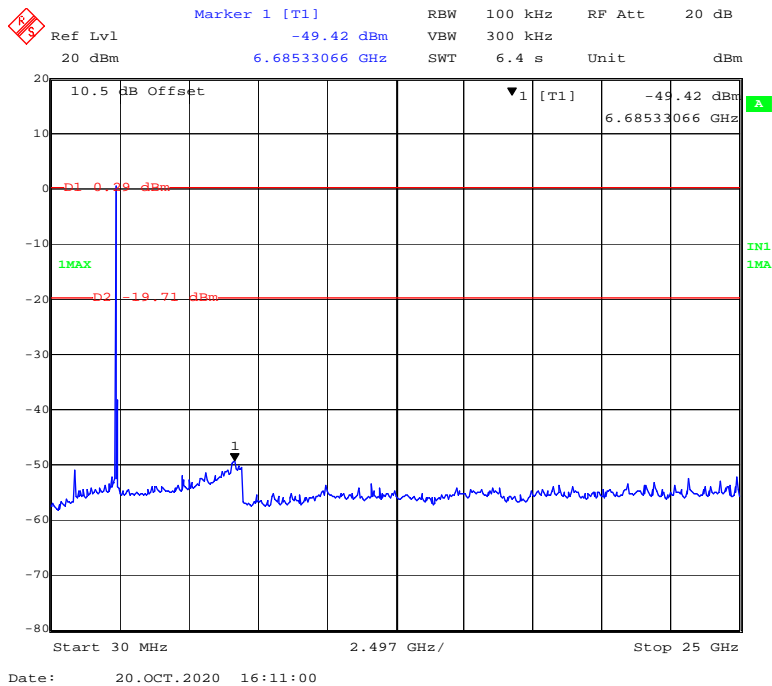


802.11g Mode Middle Channel

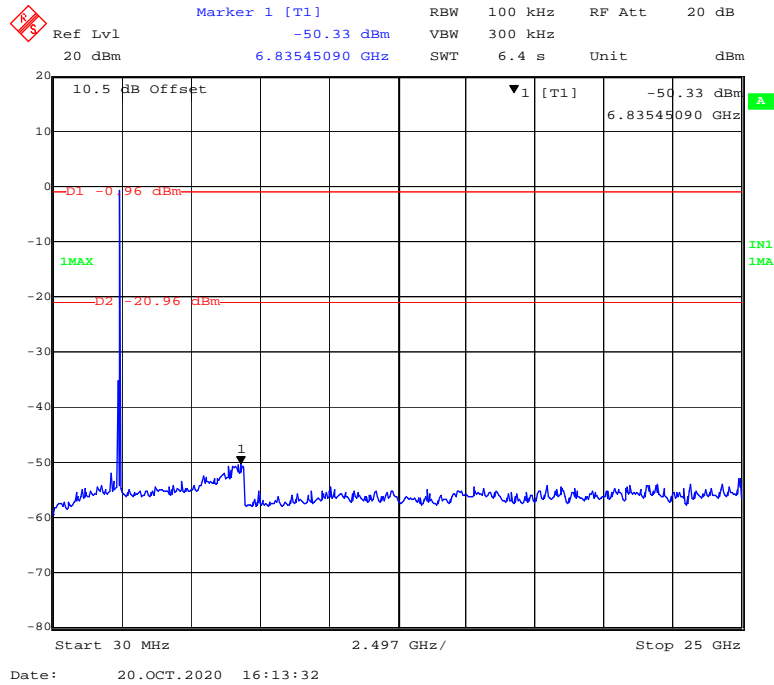


802.11g Mode High Channel

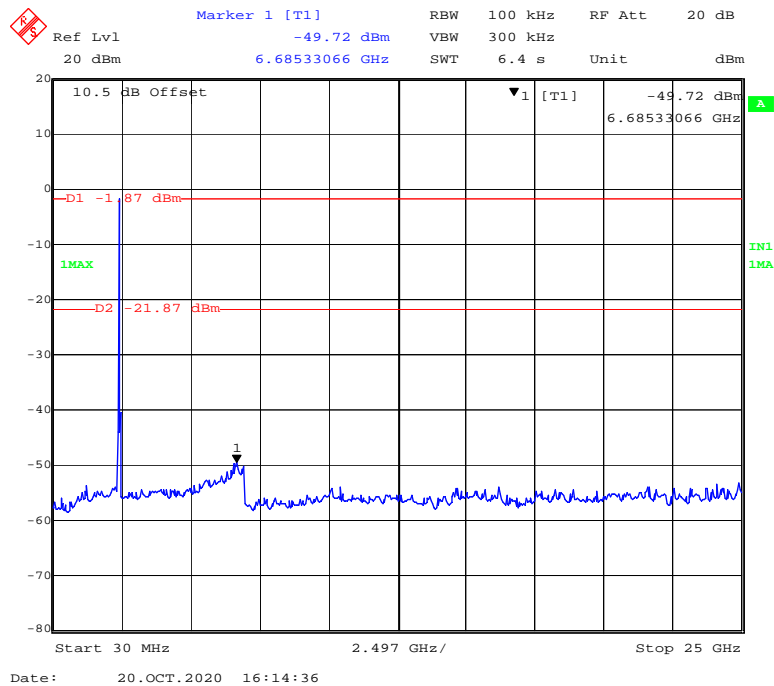


802.11n-HT20 Mode Low Channel

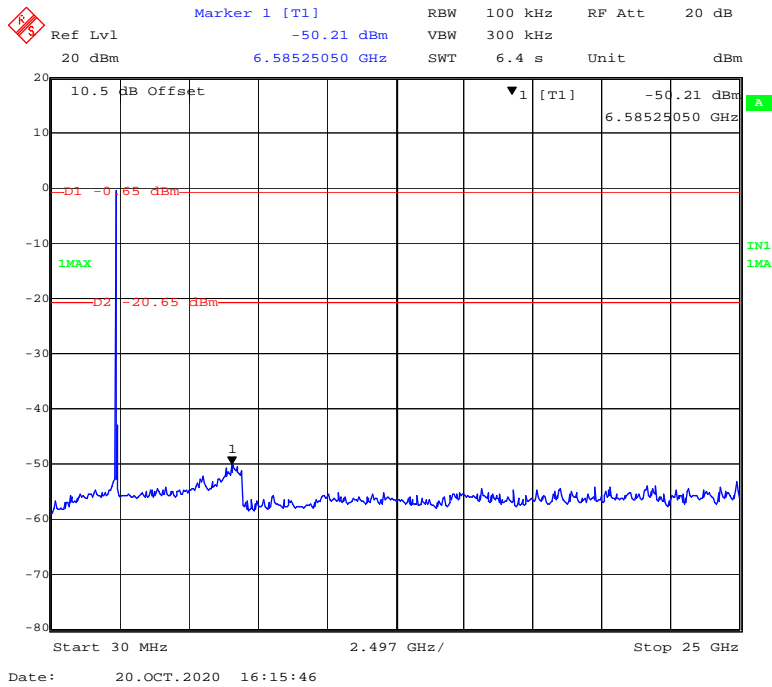

802.11n-HT20 Mode Middle Channel

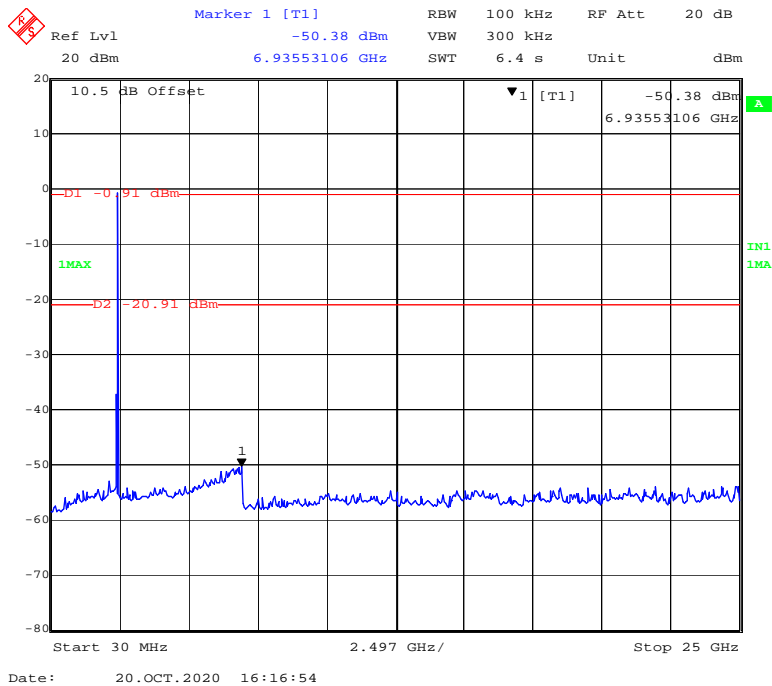


802.11n-HT20 Mode High Channel

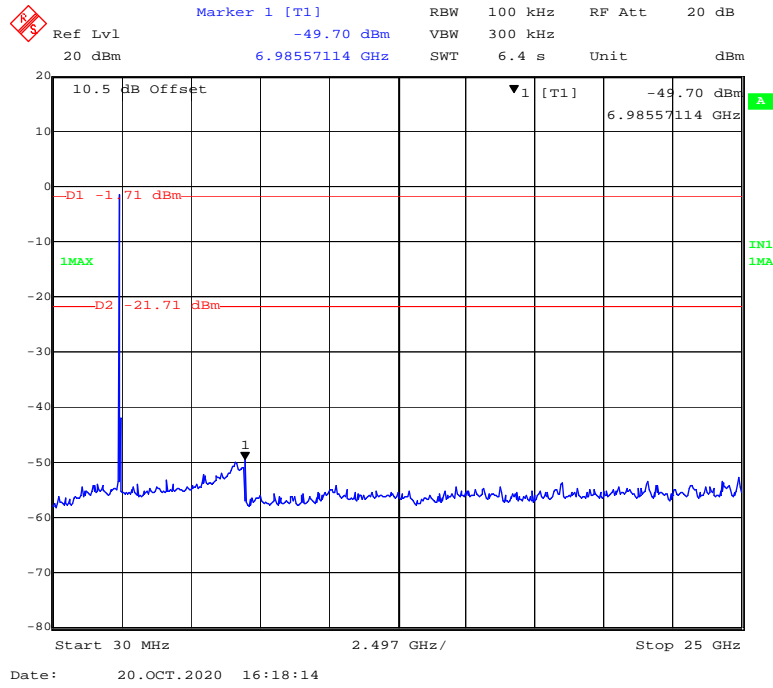


1Mbps:


BLE Mode Low Channel

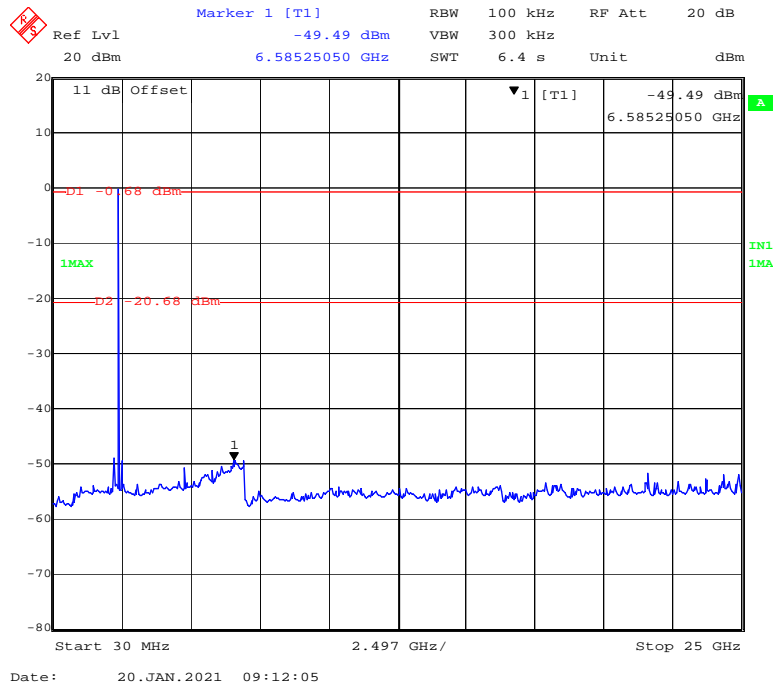

BLE Mode Middle Channel

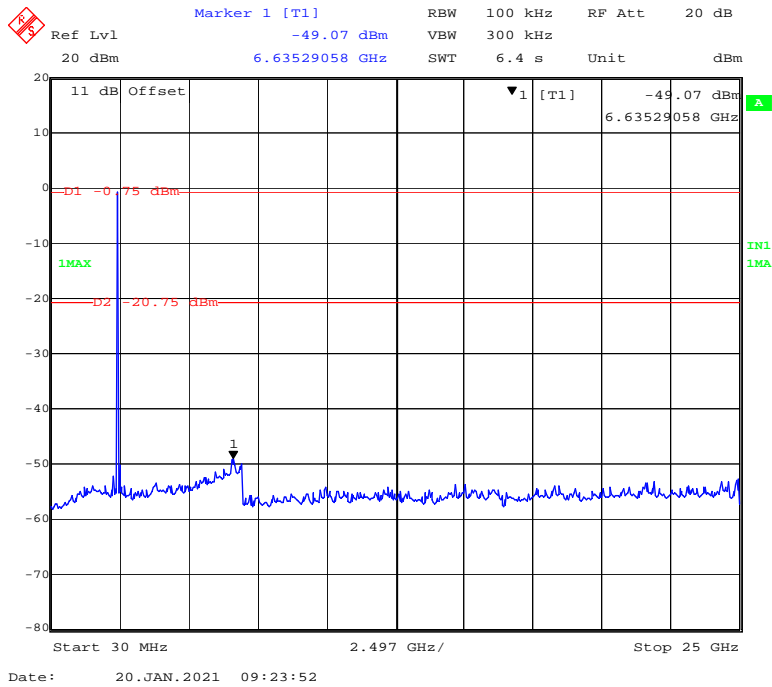


BLE Mode High Channel

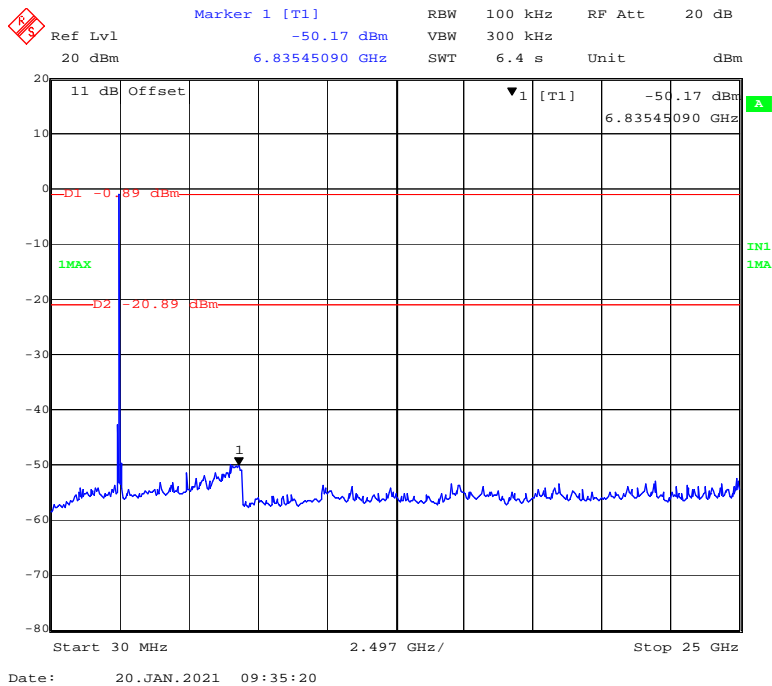


2Mbps:

BLE Mode Low Channel

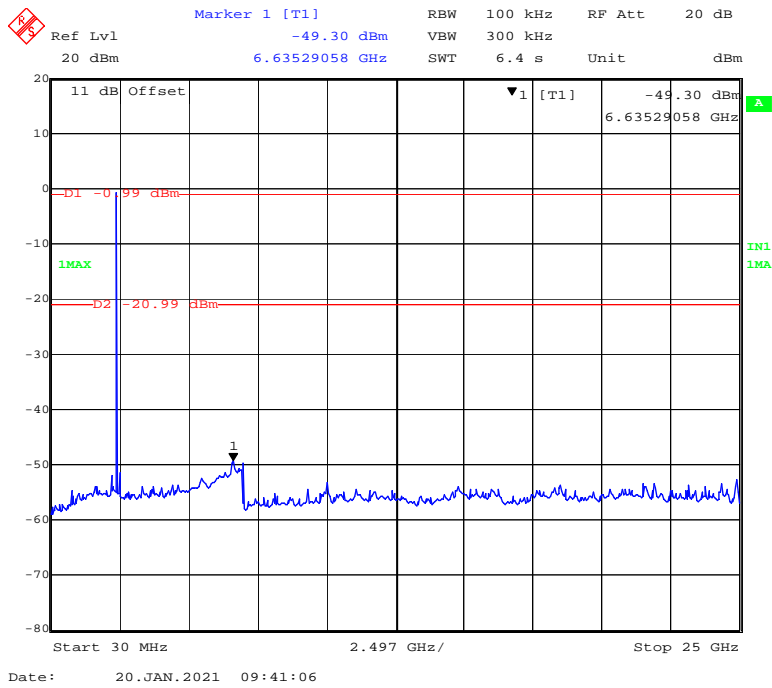

BLE Mode Middle Channel

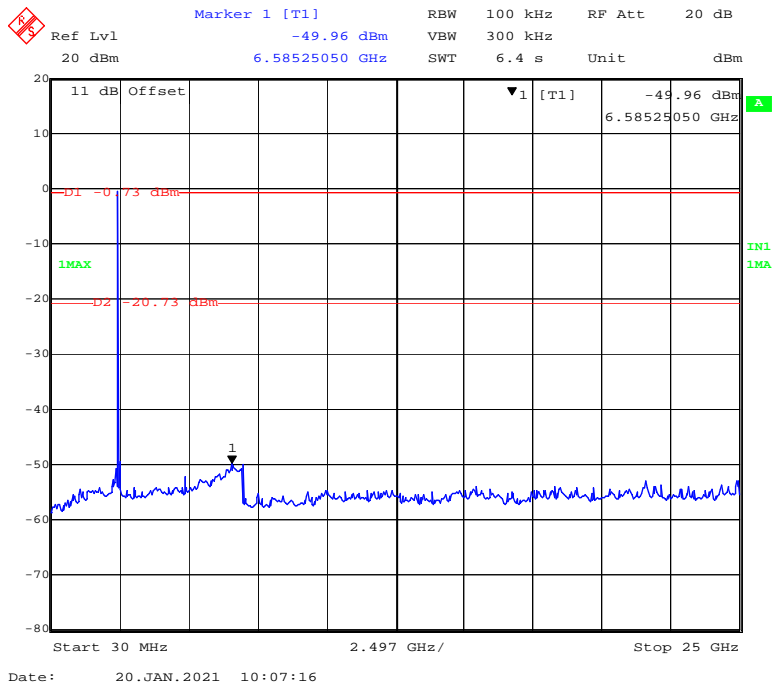

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	23.3-25.3 °C
Relative Humidity:	48-54 %
ATM Pressure:	101.1-101.5 kPa


The testing was performed by Tyrone Wang from 2020-10-20 to 2021-01-20.

Test Result: Compliant.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	9.078	≥0.5
Middle	2437	9.078	≥0.5
High	2462	9.078	≥0.5
802.11g Mode			
Low	2412	15.210	≥0.5
Middle	2437	15.210	≥0.5
High	2462	15.210	≥0.5
802.11n-HT20 Mode			
Low	2412	15.210	≥0.5
Middle	2437	15.210	≥0.5
High	2462	15.210	≥0.5
BLE Mode(1Mbps)			
Low	2402	0.758	≥0.5
Middle	2440	0.758	≥0.5
High	2480	0.758	≥0.5
BLE Mode(2Mbps)			
Low	2402	1.202	≥0.5
Middle	2440	1.166	≥0.5
High	2480	1.166	≥0.5


802.11b Mode Low Channel

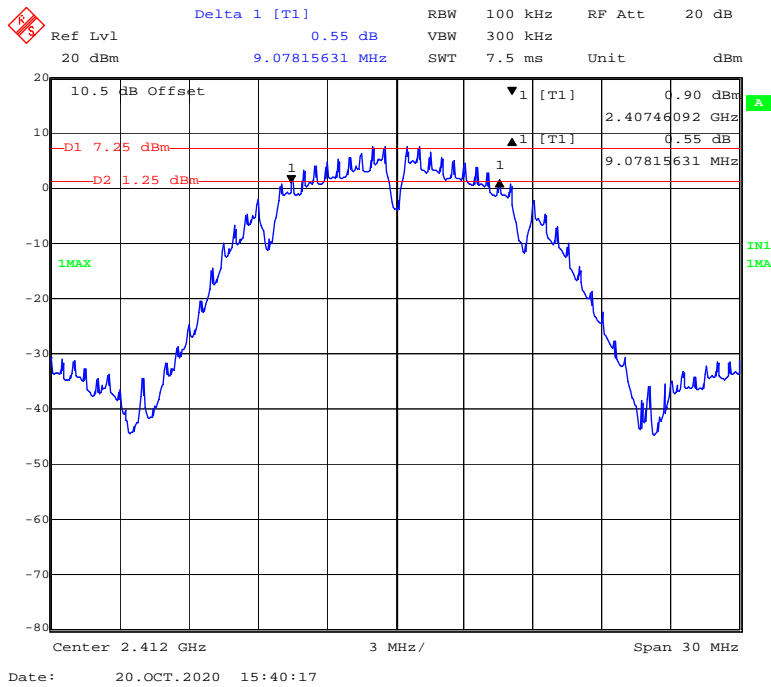


802.11b Mode Middle Channel

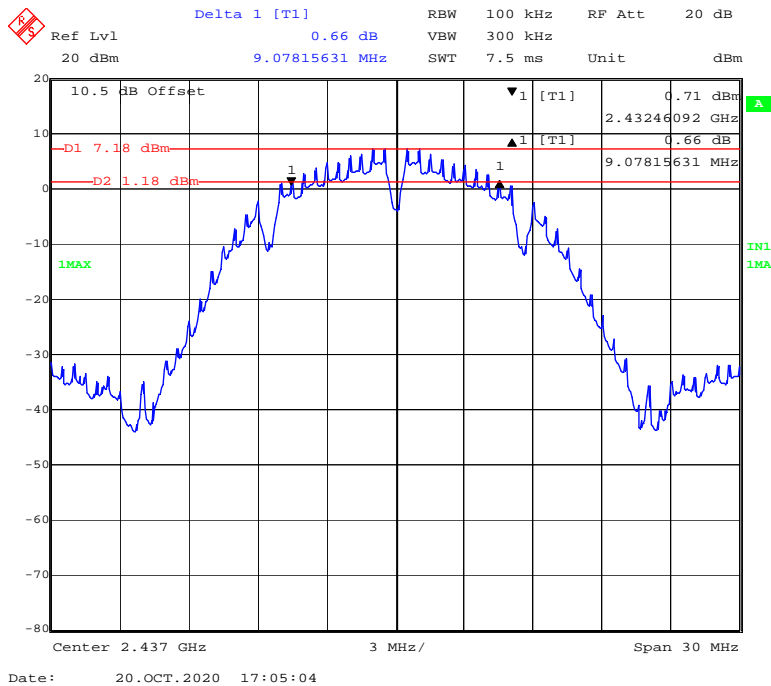


802.11b Mode High Channel

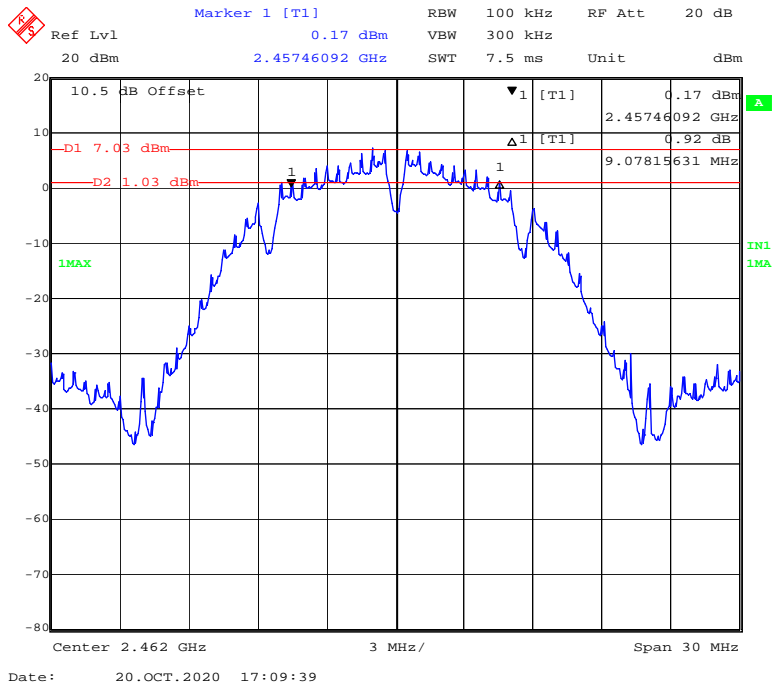


802.11g Mode Low Channel

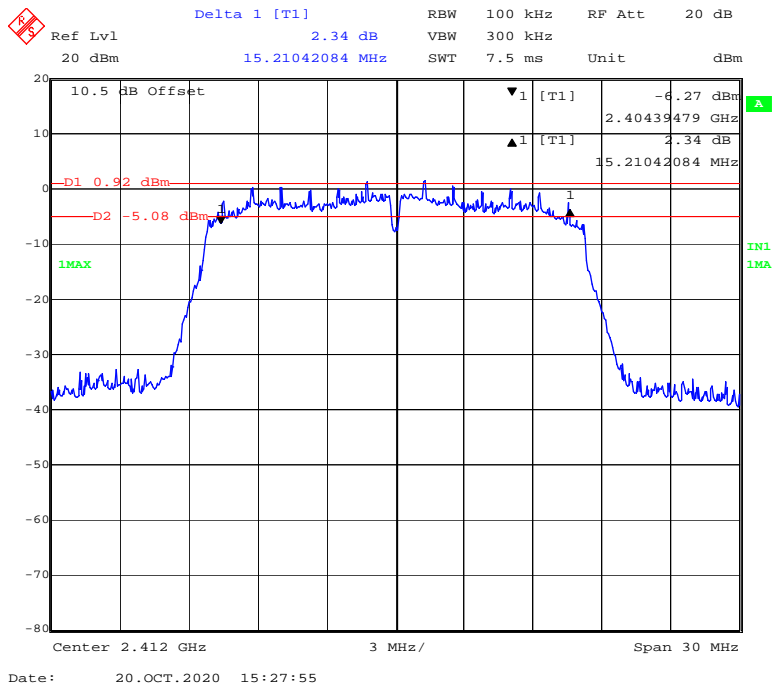


802.11g Mode Middle Channel

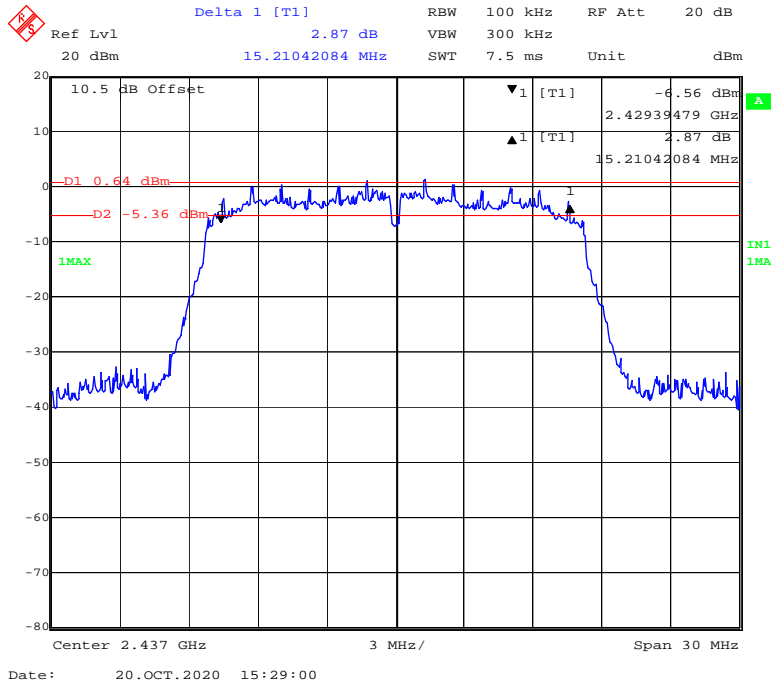


802.11g Mode High Channel

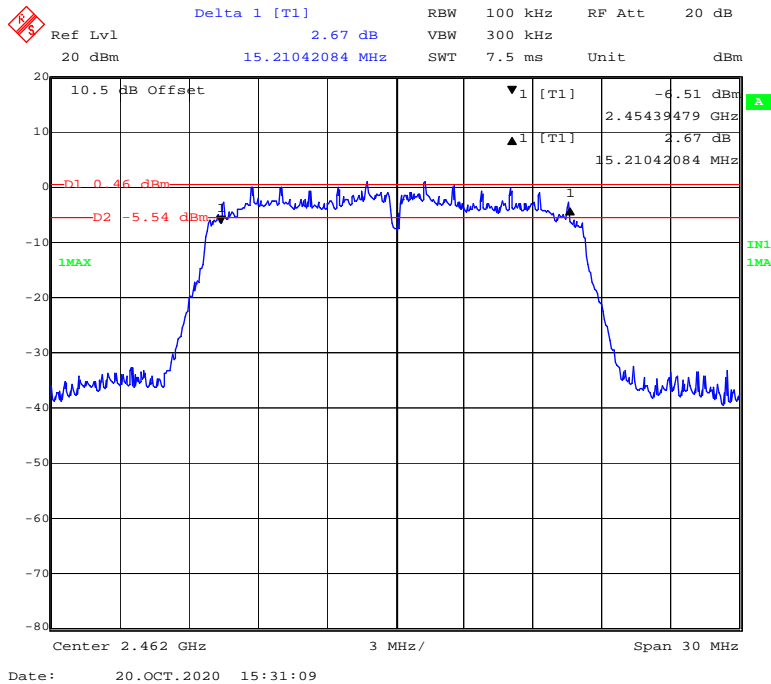


802.11n-HT20 Mode Low Channel

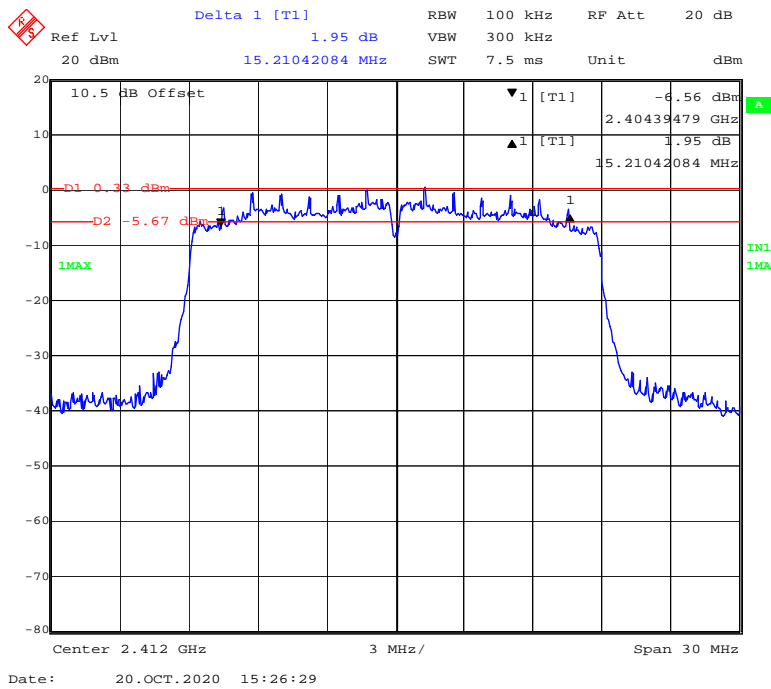

802.11n-HT20 Mode Middle Channel

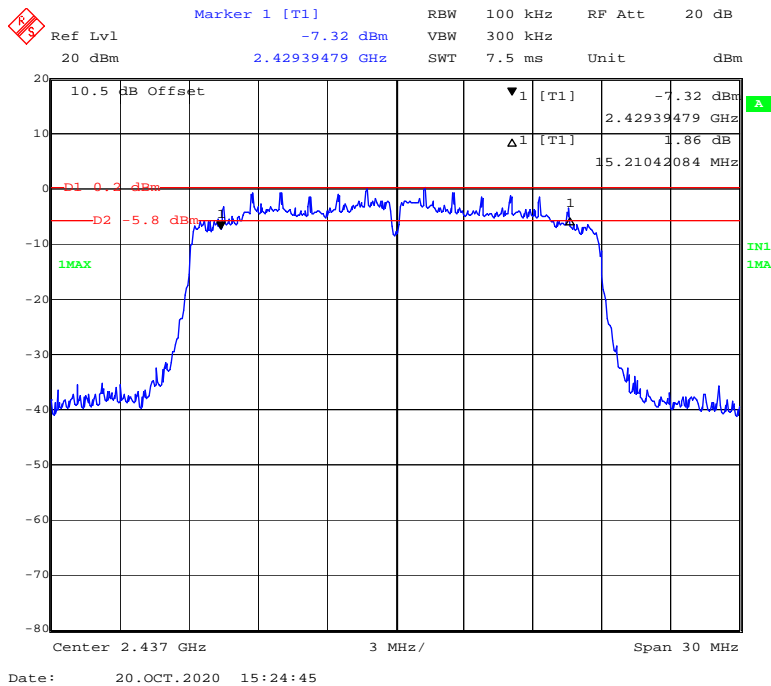


802.11n-HT20 Mode High Channel

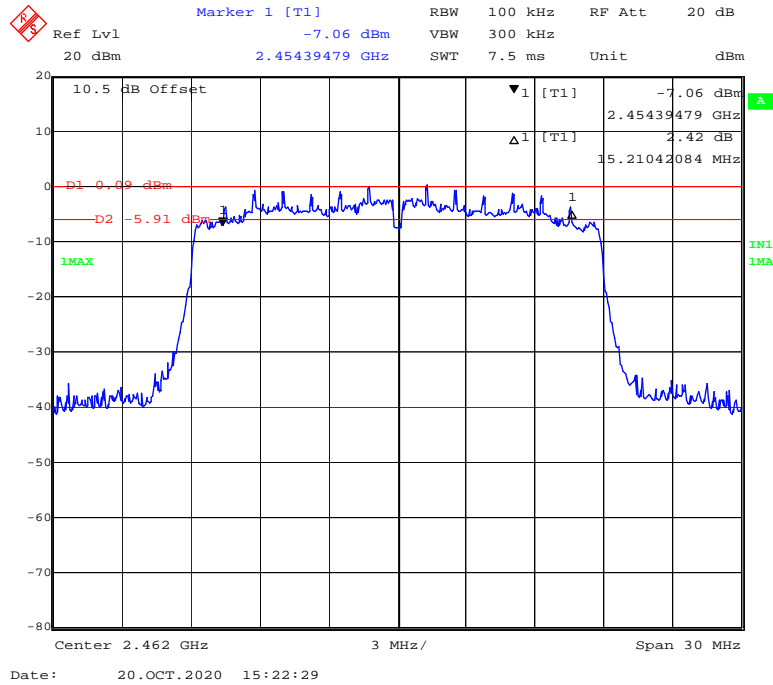


1Mbps:

BLE Mode Low Channel

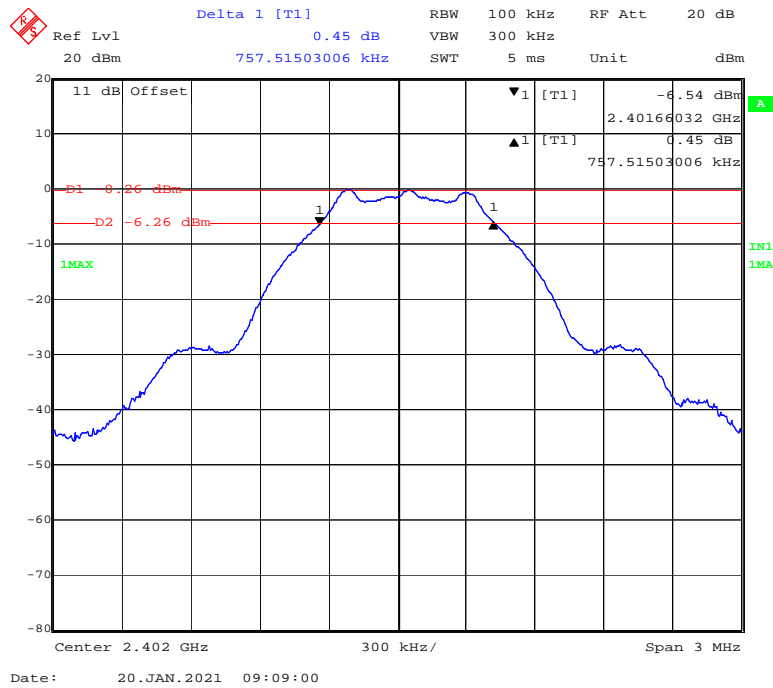


BLE Mode Middle Channel

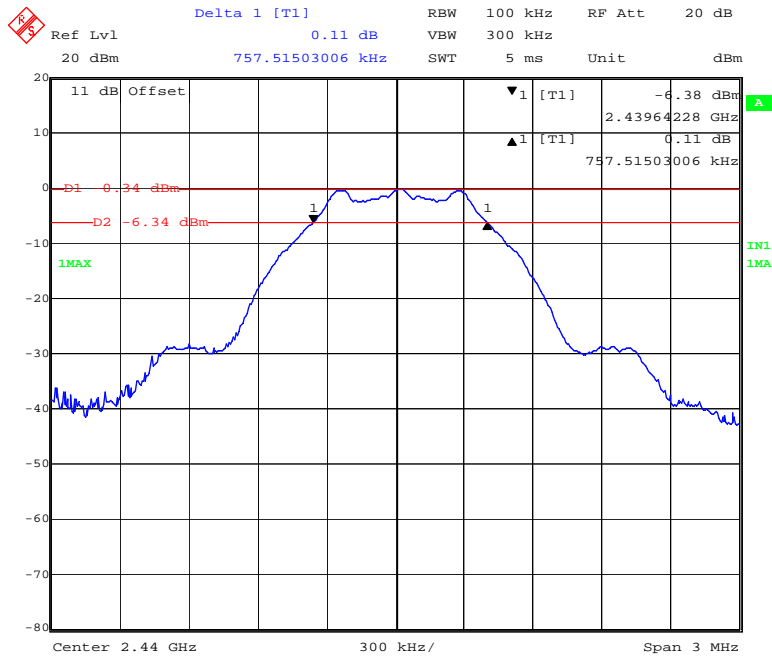

Date: 20.JAN.2021 09:22:27


BLE Mode High Channel

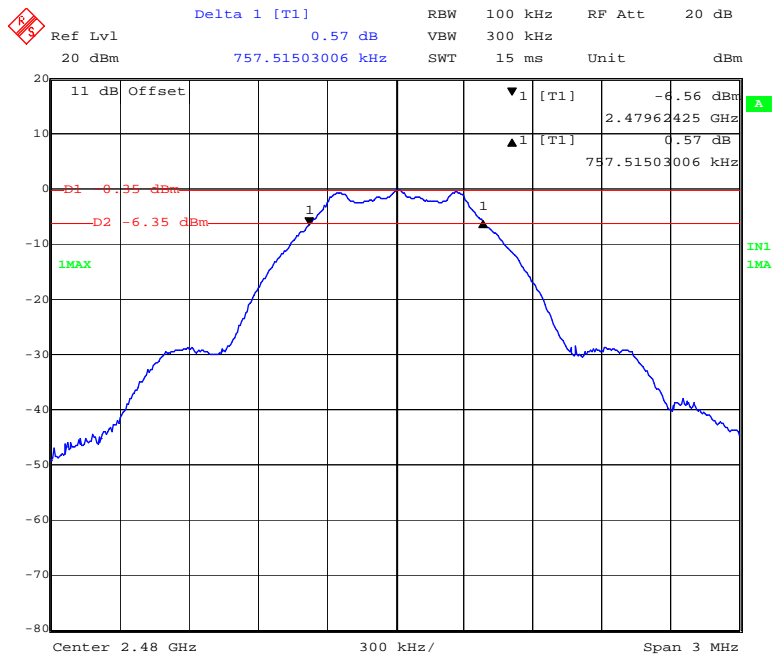


Date: 20.JAN.2021 09:29:47

2Mbps:


BLE Mode Low Channel

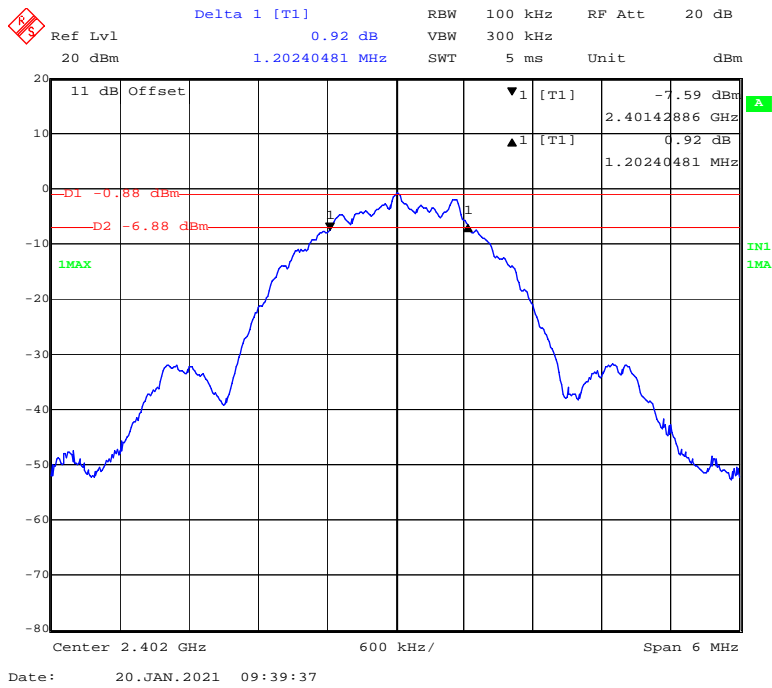

BLE Mode Middle Channel

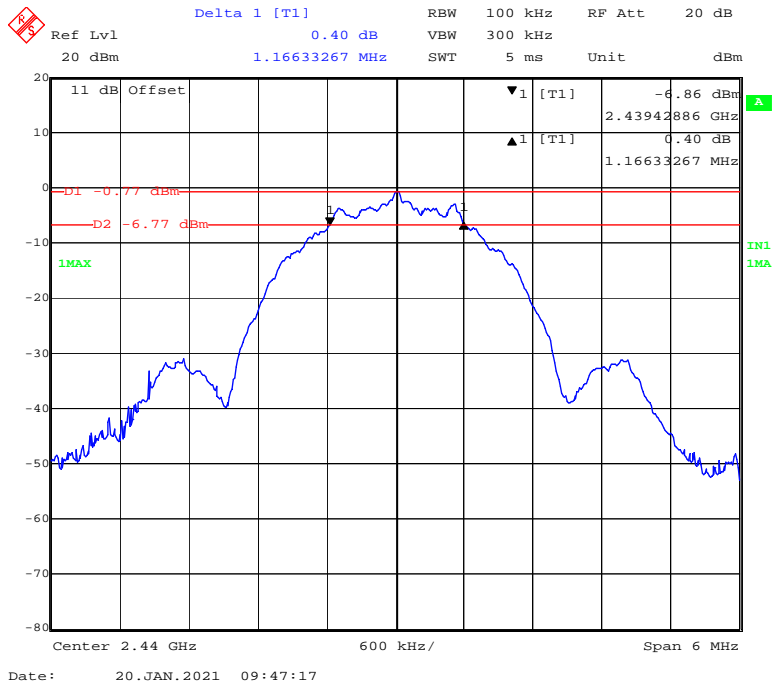

BLE Mode High Channel

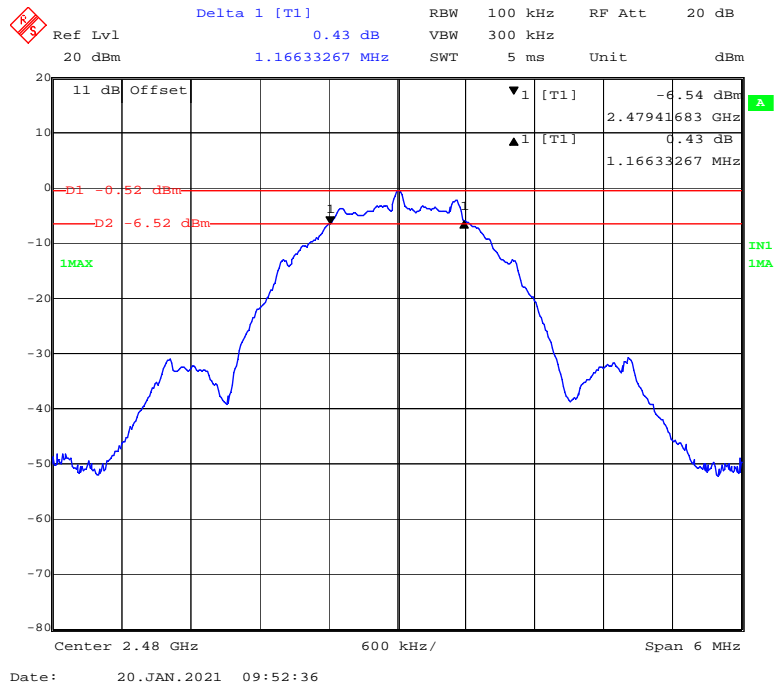

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

For Wi-Fi:

According to ANSI C63.10-2013 sub-clause 11.9.1.3


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.



For BLE:

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW \geq DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data**Environmental Conditions**

Temperature:	25.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Tyrone Wang on 2021-01-20.


Test Result: Compliant.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
Low	2412	19.07	30	Pass
Middle	2437	18.72	30	Pass
High	2462	18.45	30	Pass
802.11g Mode				
Low	2412	20.06	30	Pass
Middle	2437	19.82	30	Pass
High	2462	19.51	30	Pass
802.11n-HT20 Mode				
Low	2412	18.79	30	Pass
Middle	2437	18.81	30	Pass
High	2462	18.27	30	Pass
BLE(1Mbps) Mode				
Low	2402	0.07	30	Pass
Middle	2440	0.05	30	Pass
High	2480	0.00	30	Pass
BLE(2Mbps) Mode				
Low	2402	-0.69	30	Pass
Middle	2440	-0.44	30	Pass
High	2480	-0.31	30	Pass


1Mbps:

BLE Mode Low Channel

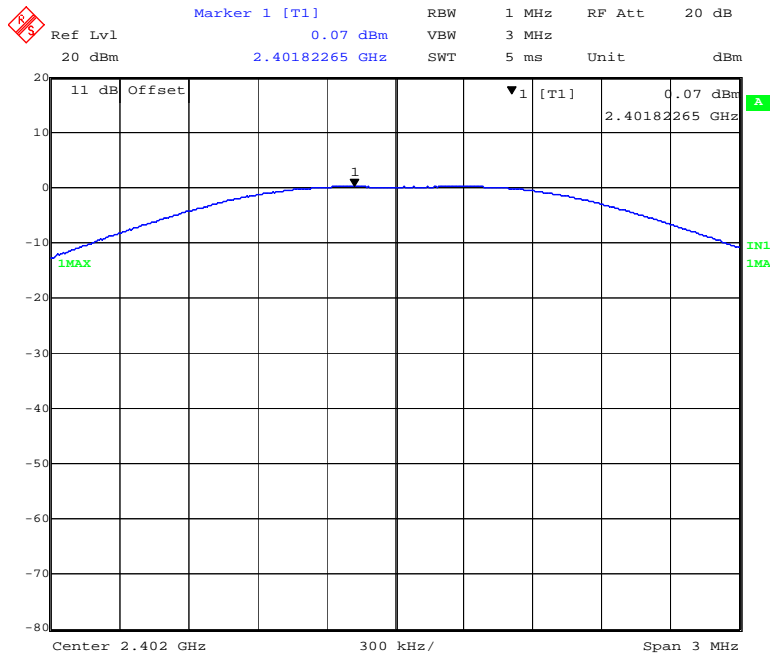


Date: 20.JAN.2021 09:07:19

BLE Mode Middle Channel

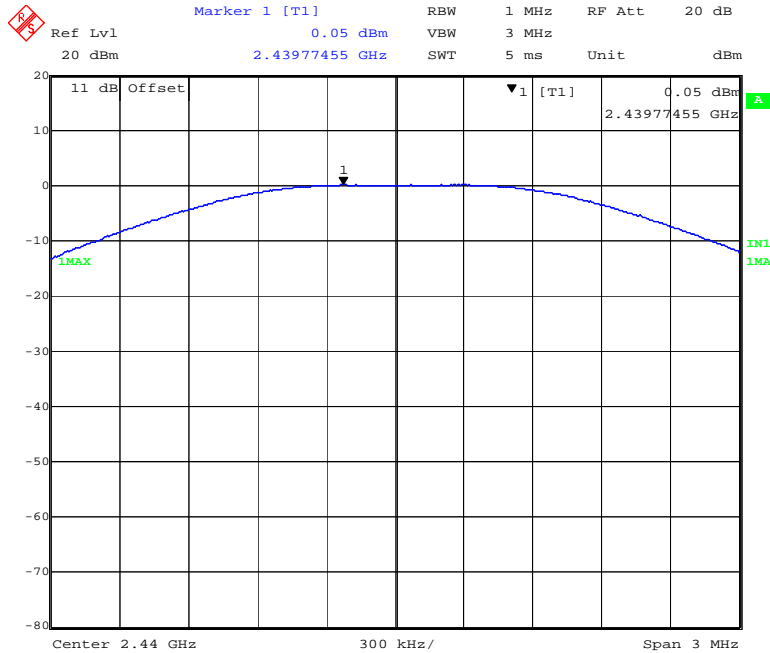


Date: 20.JAN.2021 09:16:07

BLE Mode High Channel

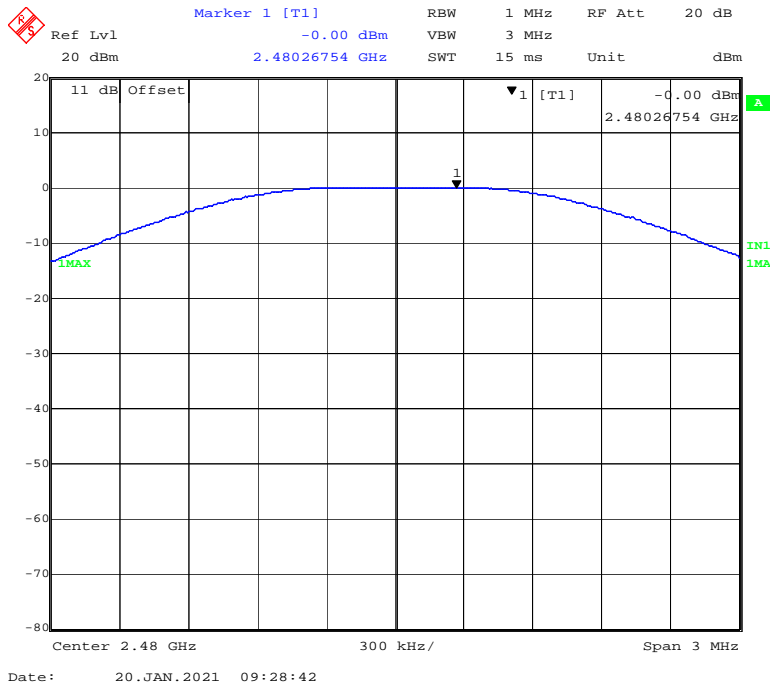


2Mbps:


BLE Mode Low Channel

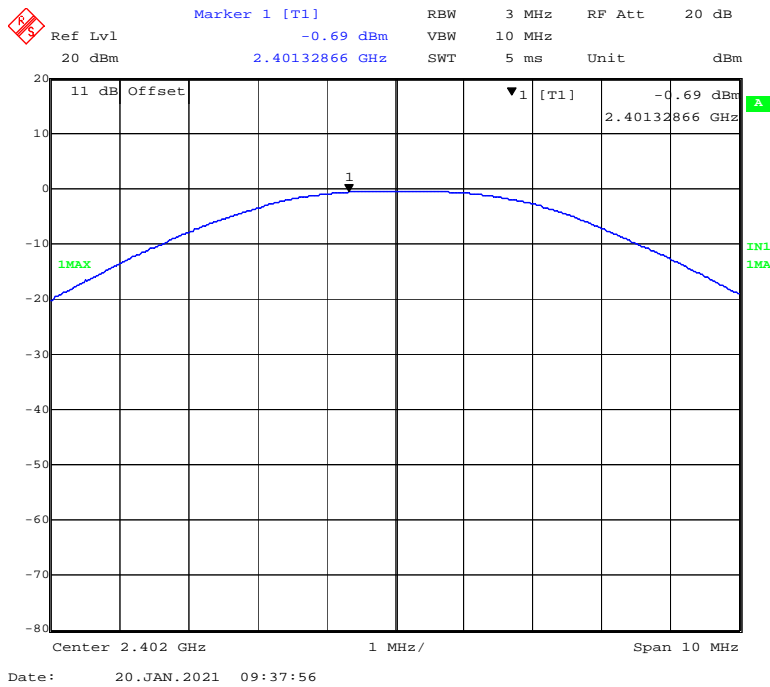

BLE Mode Middle Channel

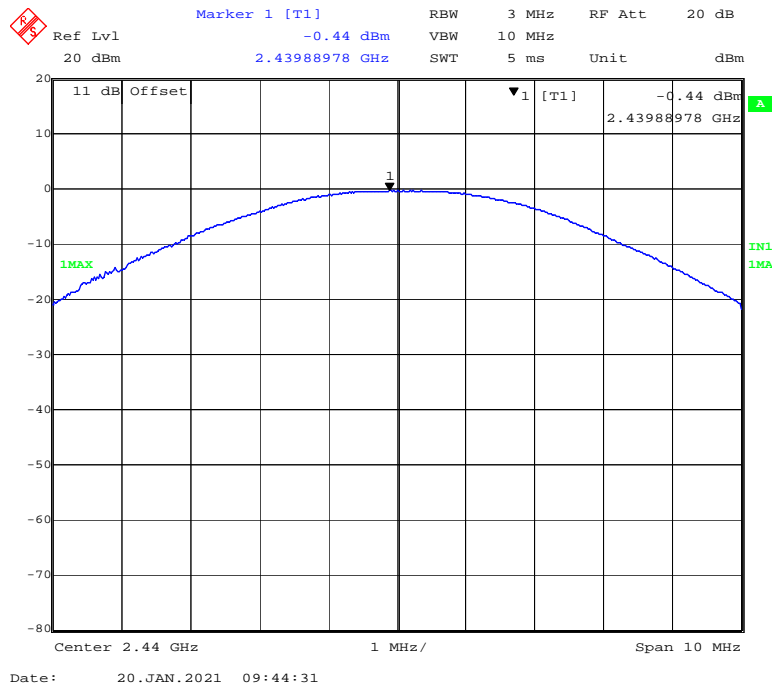

BLE Mode High Channel

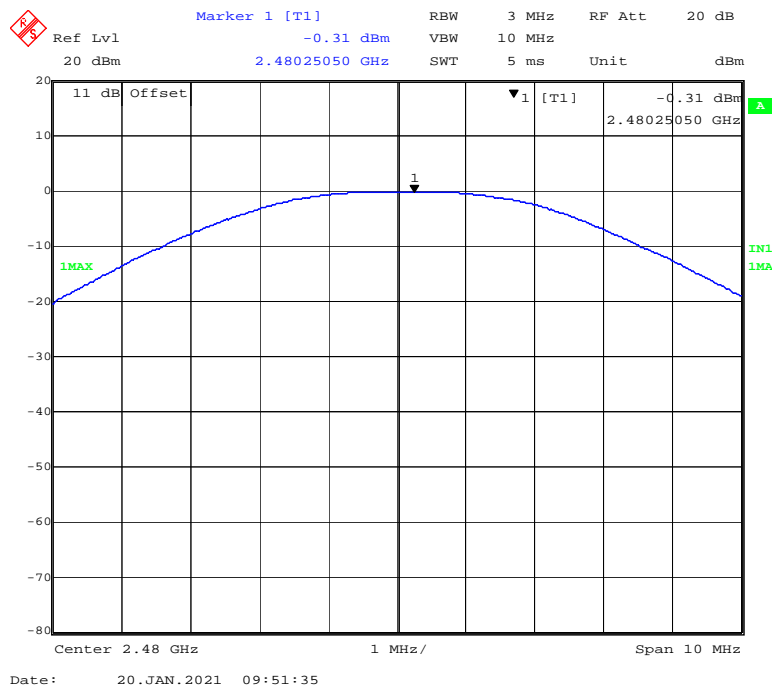

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	23.3-25.3 °C
Relative Humidity:	48-54 %
ATM Pressure:	101.1-101.5 kPa

The testing was performed by Tyrone Wang from 2020-10-20 to 2021-01-20.


Test Result: Compliant.

EUT operation mode: Transmitting


802.11b Mode Left Side




802.11b Mode Right Side

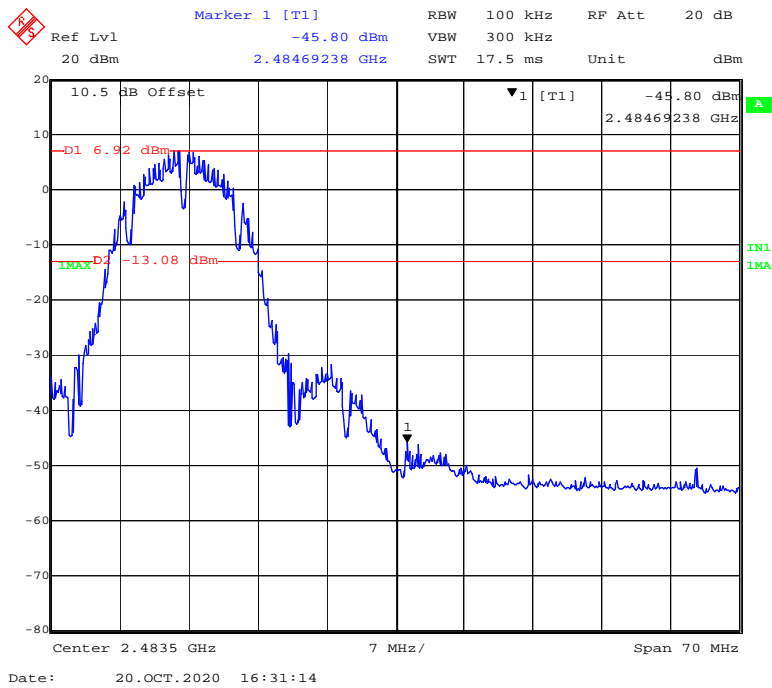


802.11g Mode Left Side

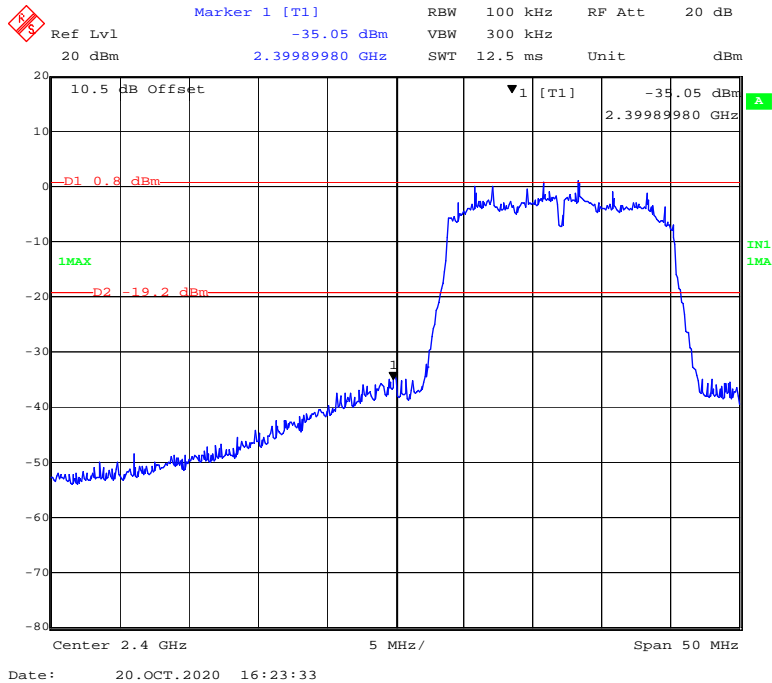


802.11g Mode Right Side

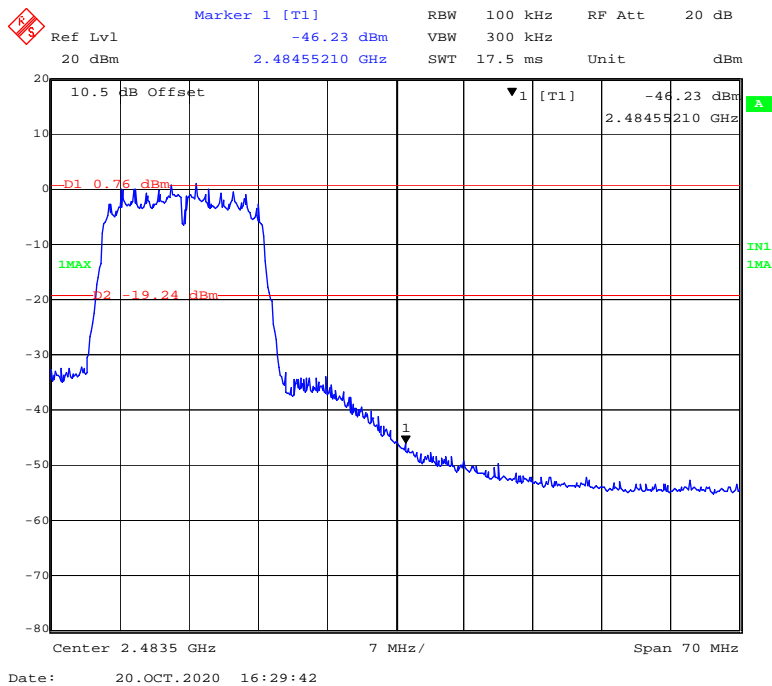

802.11n-HT20 Mode Left Side

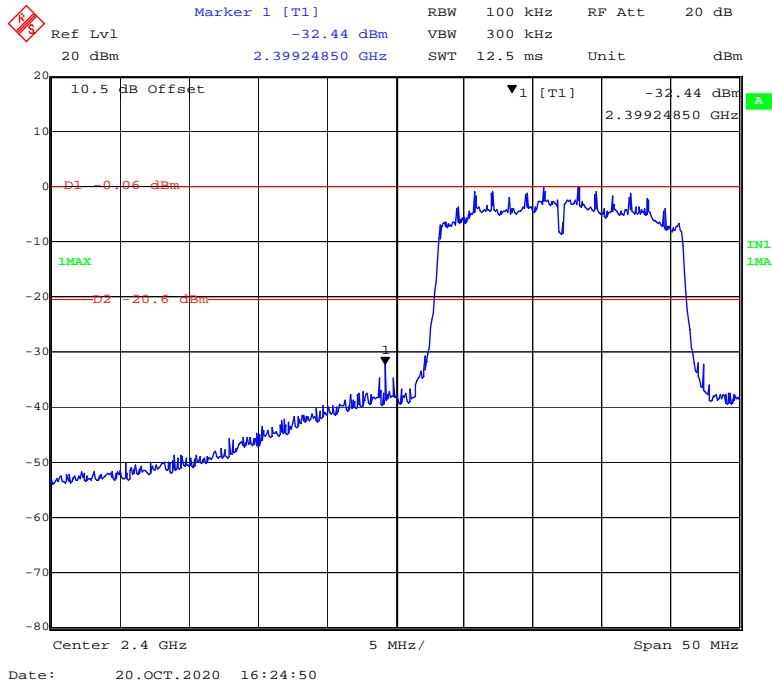


802.11n-HT20 Mode Right Side

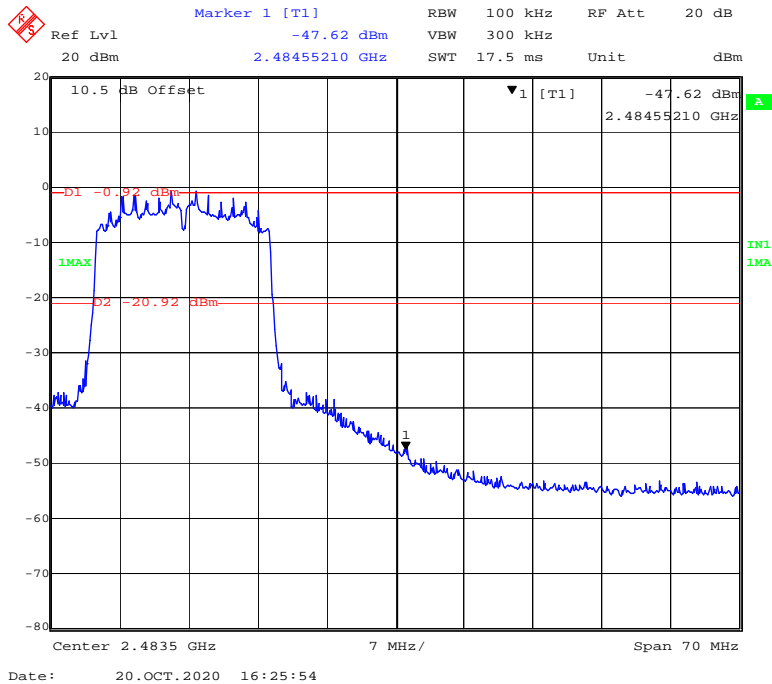


1Mbps:

BLE Mode Mode Left Side

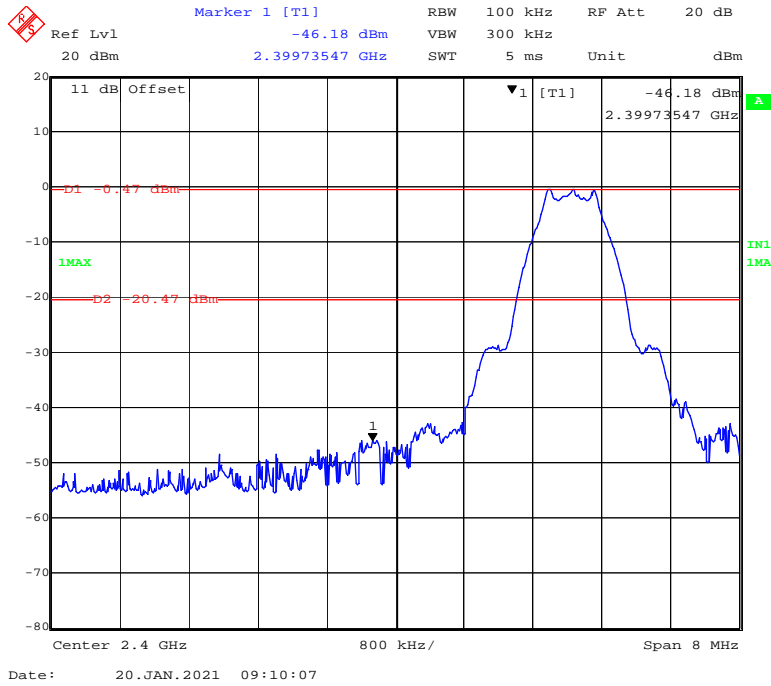


BLE Mode Right Side

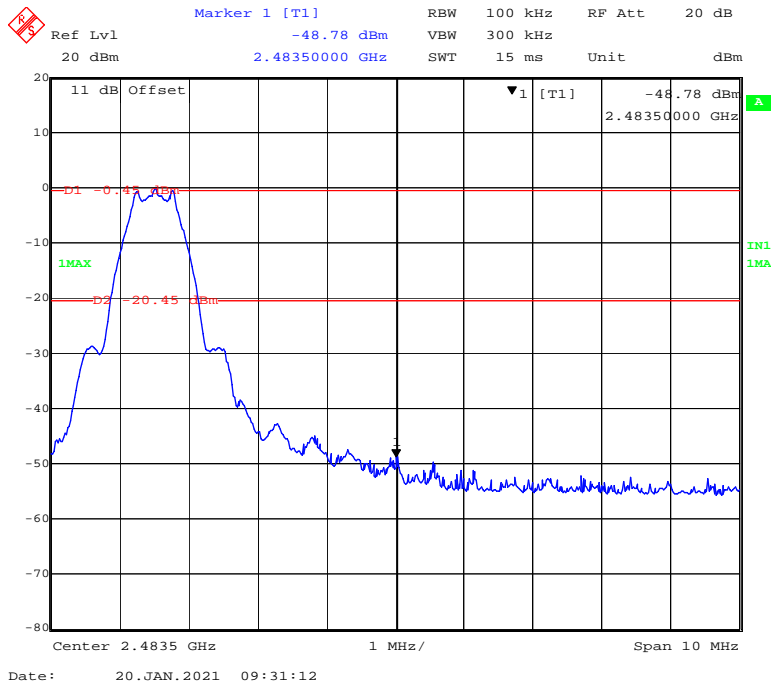


2Mbps:

BLE Mode Left Side

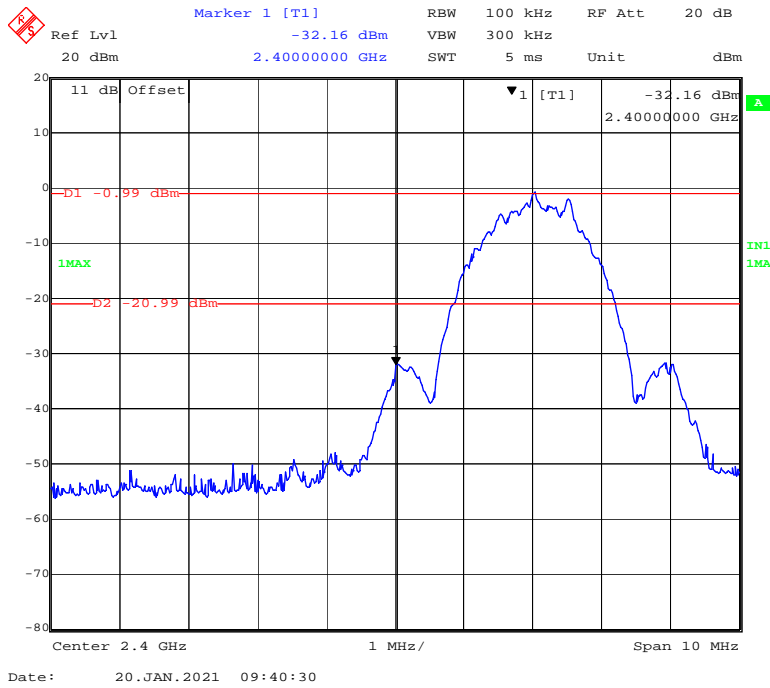

BLE Mode Right Side

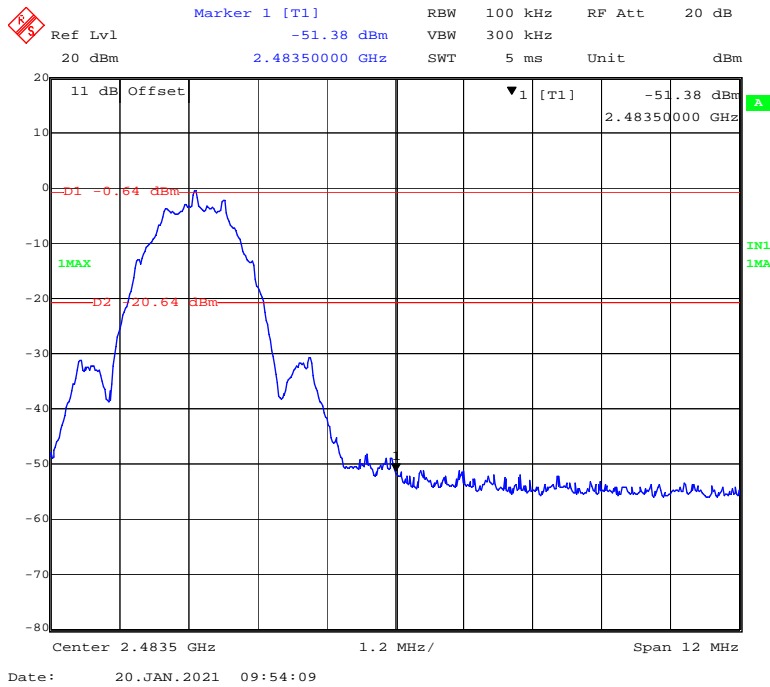

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	23.3-25.3 °C
Relative Humidity:	48-54 %
ATM Pressure:	101.1-101.5 kPa


The testing was performed by Tyrone Wang from 2020-10-20 to 2021-01-20.

Test Result: Compliant.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
Low	2412	-5.99	≤8
Middle	2437	-6.95	≤8
High	2462	-8.12	≤8
802.11g Mode			
Low	2412	-12.90	≤8
Middle	2437	-12.65	≤8
High	2462	-13.26	≤8
802.11n-HT20 mode			
Low	2412	-13.63	≤8
Middle	2437	-14.46	≤8
High	2462	-14.28	≤8
BLE Mode(1Mbps)			
Low	2402	-13.86	≤8
Middle	2440	-13.62	≤8
High	2480	-14.01	≤8
BLE Mode(2Mbps)			
Low	2402	-15.74	≤8
Middle	2440	-15.11	≤8
High	2480	-15.60	≤8


802.11b Mode Low Channel

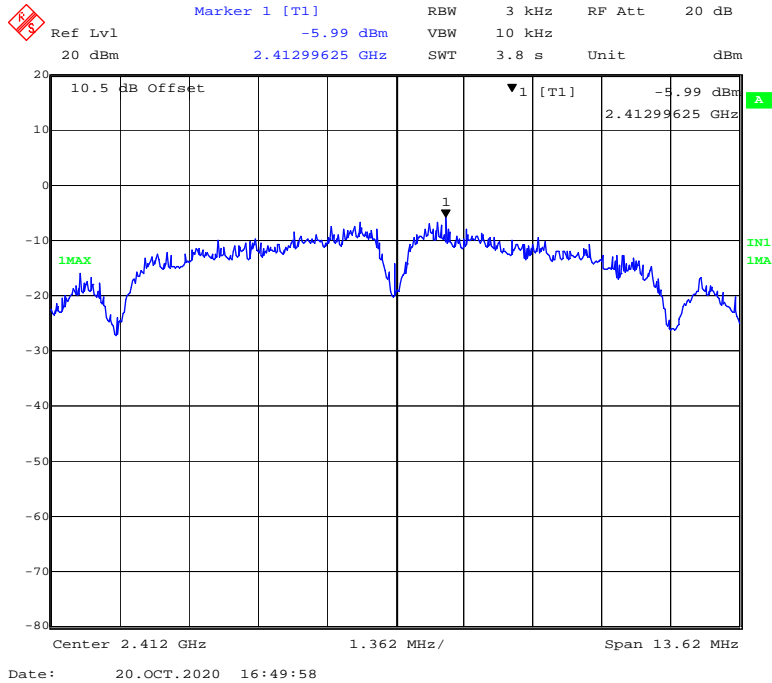


802.11b Mode Middle Channel

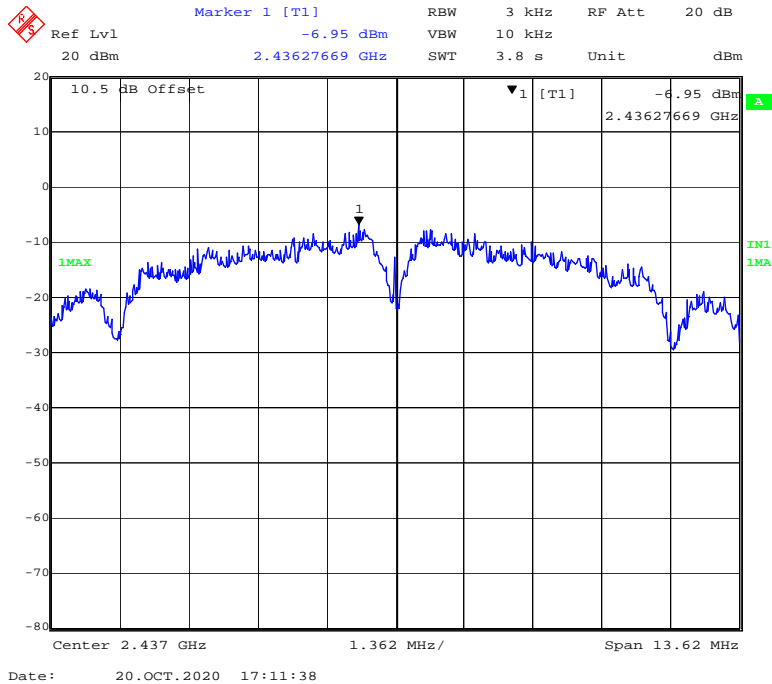


802.11b Mode High Channel

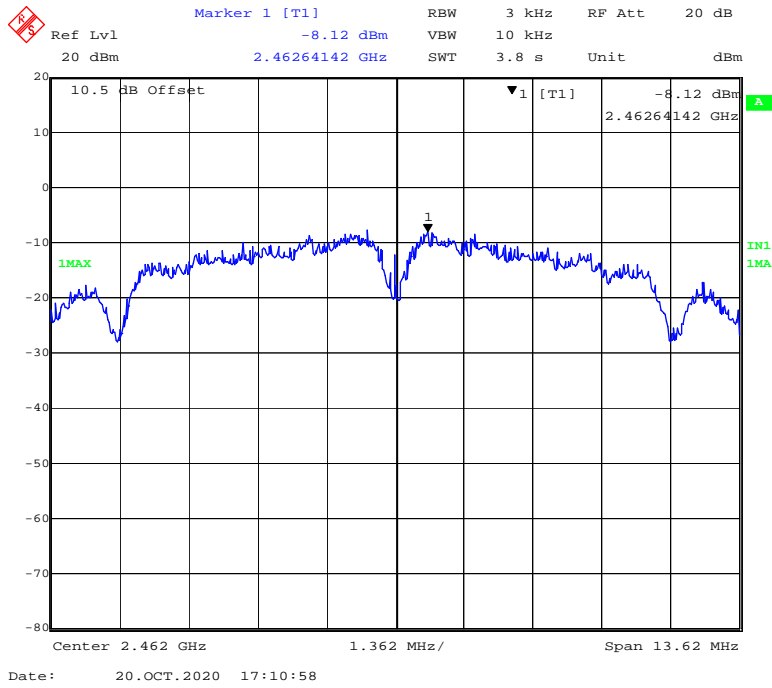


802.11g Mode Low Channel

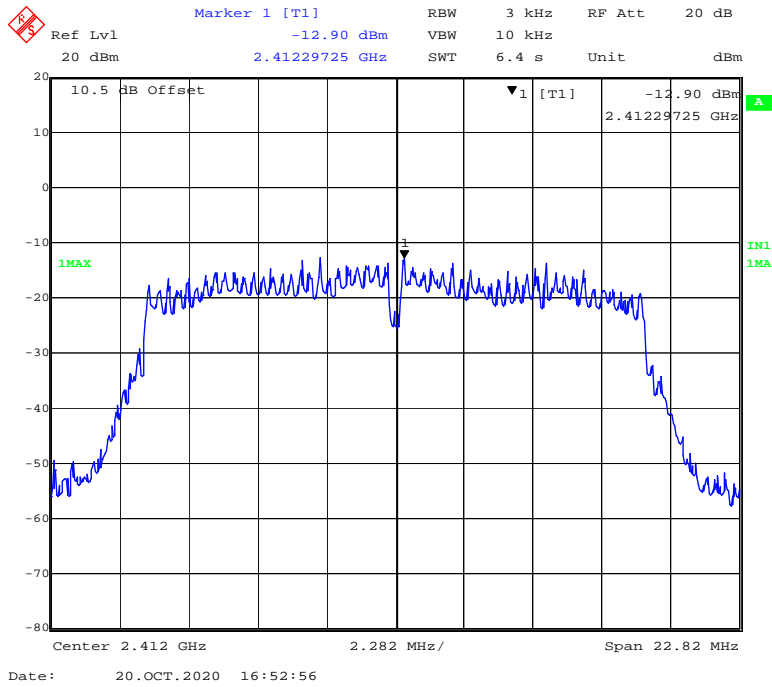


802.11g Mode Middle Channel

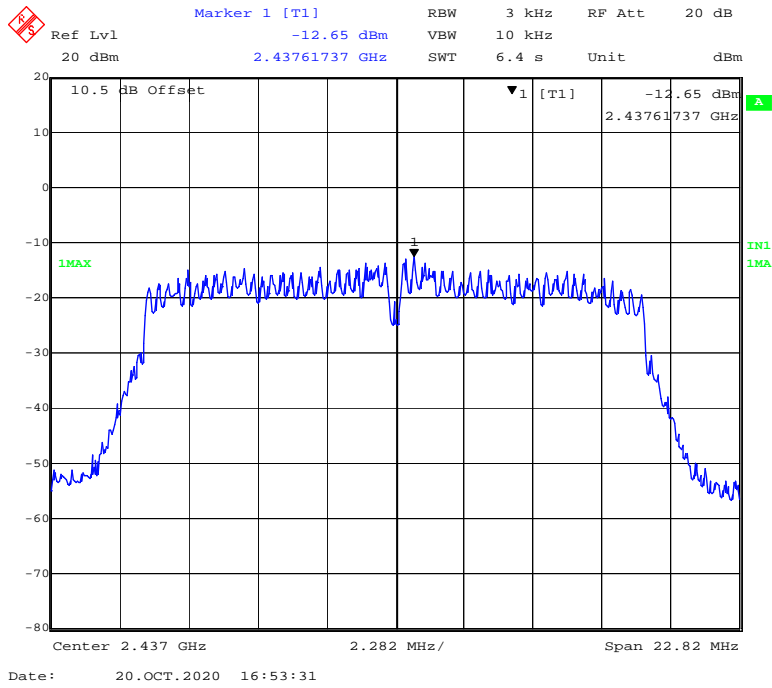


802.11g Mode High Channel

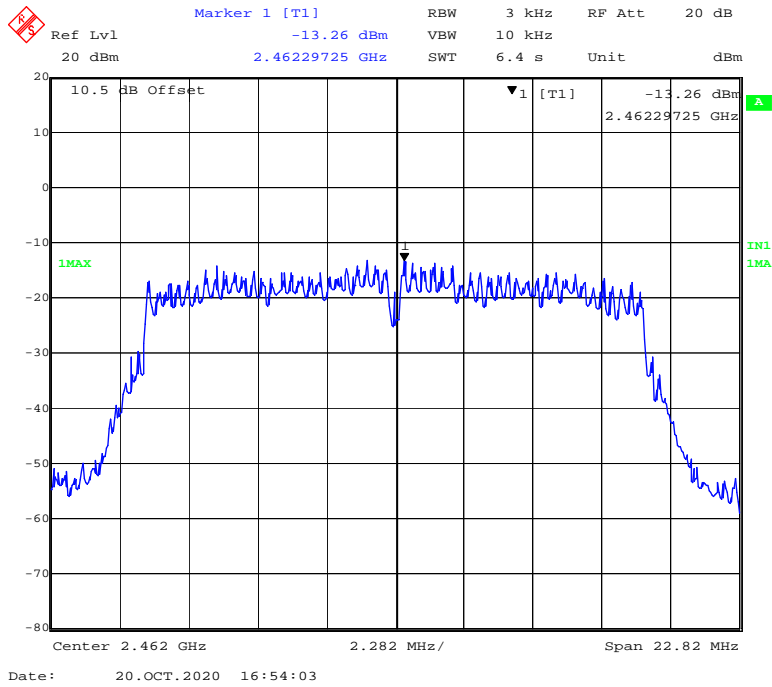


802.11n-HT20 Mode Low Channel

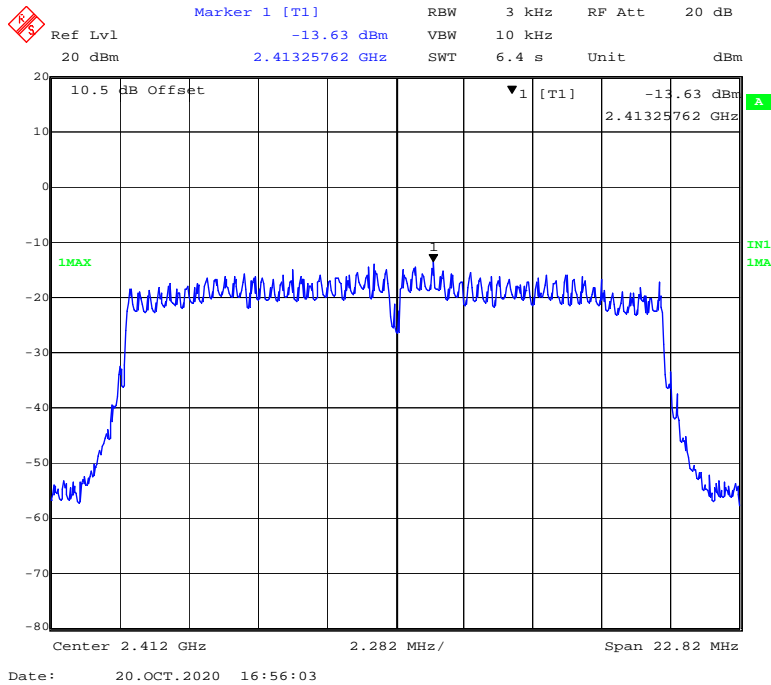

802.11n-HT20 Mode Middle Channel

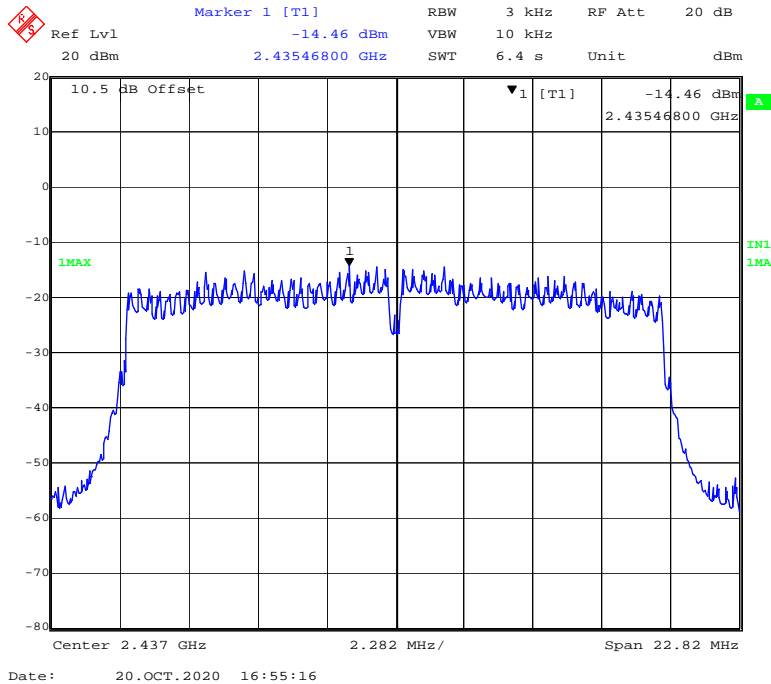


802.11n-HT20 Mode High Channel

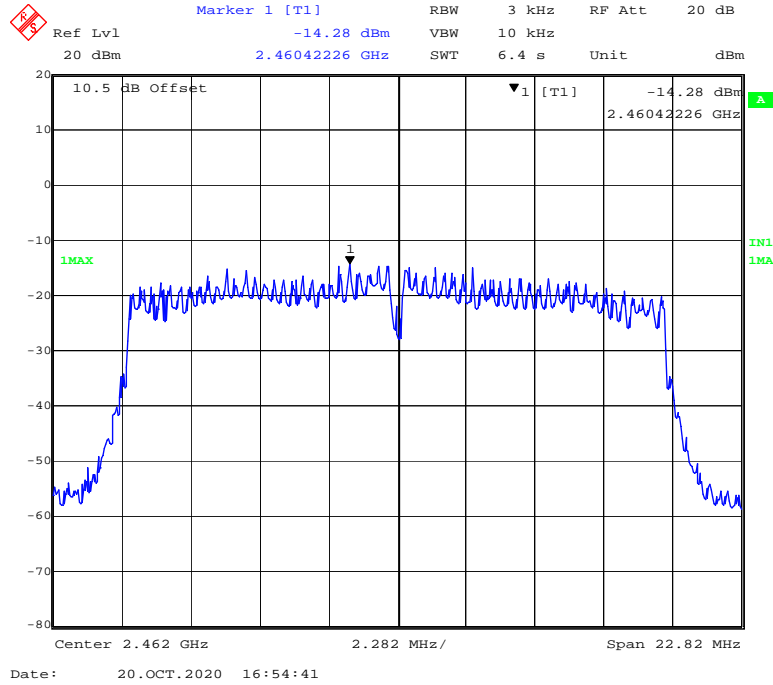


1Mbps:


BLE Mode Low Channel

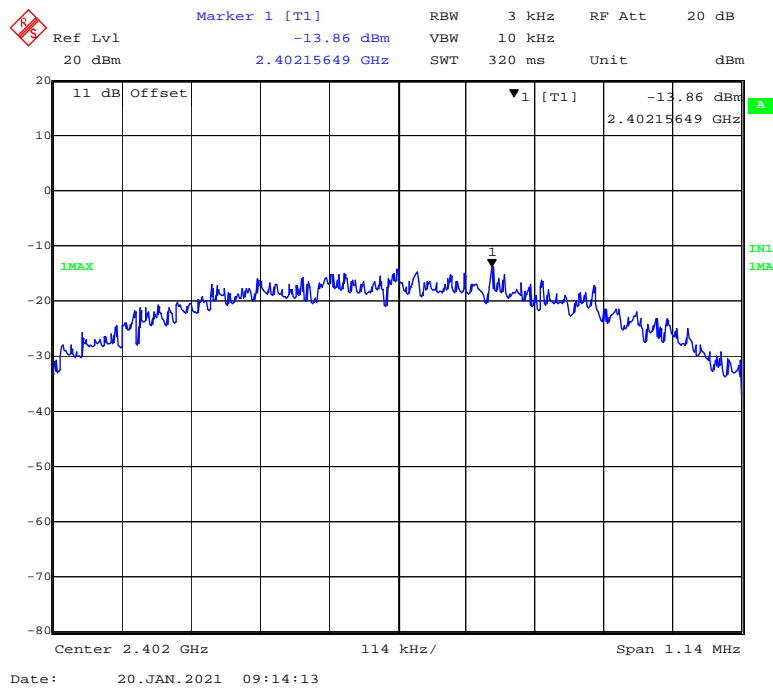

BLE Mode Middle Channel

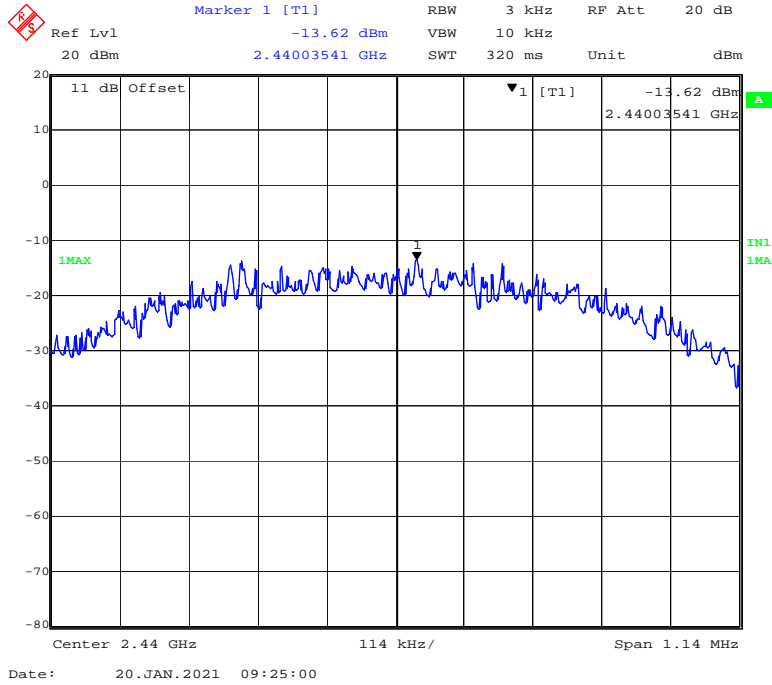


BLE Mode High Channel

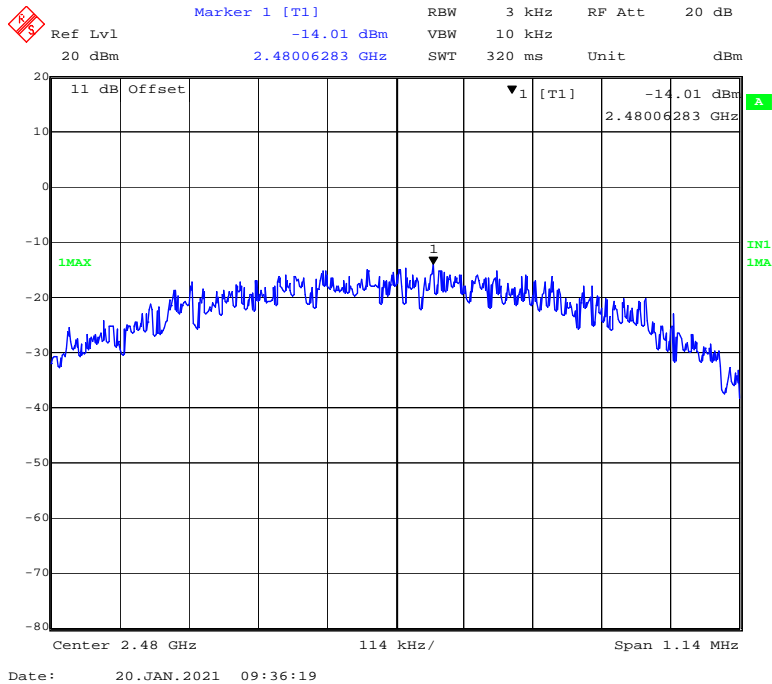


2Mbps:


BLE Mode Low Channel

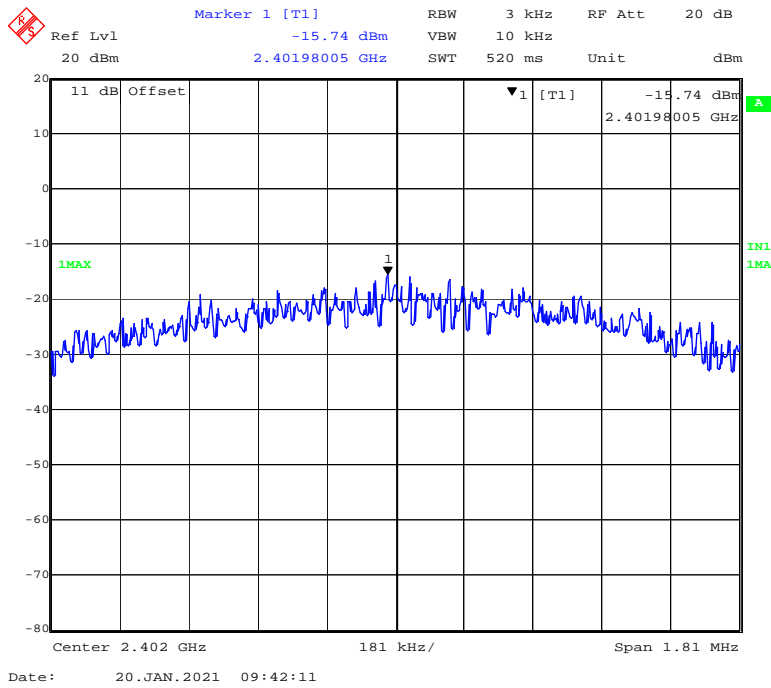

BLE Mode Middle Channel

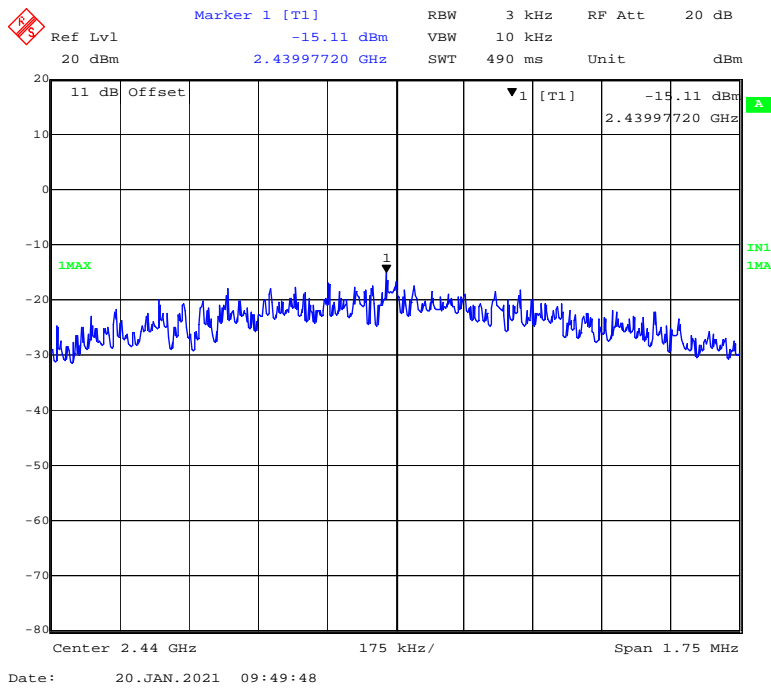

BLE Mode High Channel

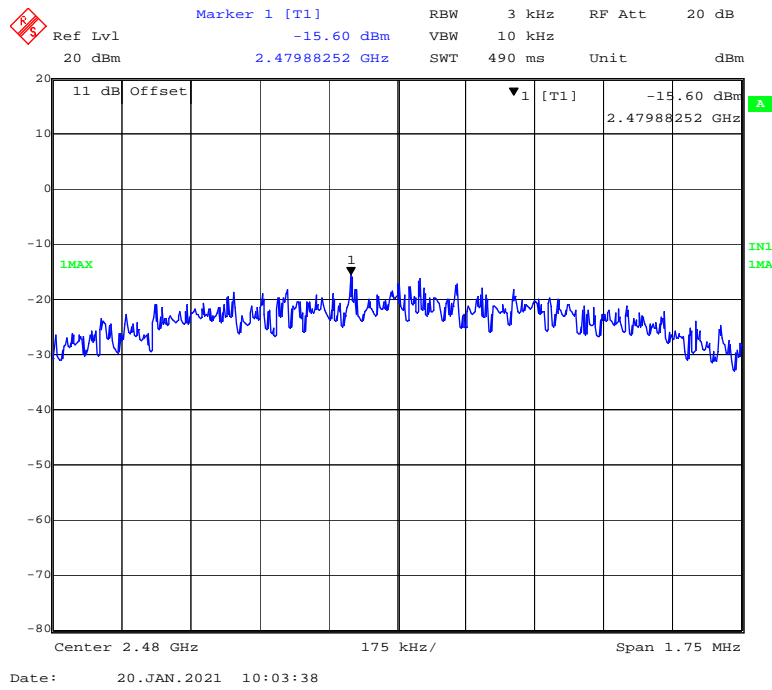

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******