

Test Report

Product Name	Bluetooth Module
Model No.	BT-102
FCC ID	YKH319-BT10200

Applicant	NUMA Electronics Inc.
Address	3F, No. 5, Wugong 5th Rd., Xinzhuang Dist New Taipei City Taiwan

Date of Receipt	Nov. 07, 2022
Issued Date	Feb. 15, 2023
Report No.	22B0267R-RFUSBT2V01-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report




Product Name	Bluetooth Module
Applicant	NUMA Electronics Inc.
Address	3F, No. 5, Wugong 5th Rd., Xinzhuang Dist New Taipei City Taiwan
Manufacturer	NUMA Electronics Inc.
Model No.	BT-102
FCC ID	YKH319-BT10200
EUT Rated Voltage	DC 3.0-3.6 V
EUT Test Voltage	DC 3.3 V (Power by Test Fixture)
Trade Name	NUMA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Project Specialist / Joanne Lin)

Tested By :



(Senior Engineer / Bill Lin)

Approved By :



(Senior Engineer / Alan Chen)

TABLE OF CONTENTS

1. General Information	6
1.1. EUT Description	6
1.2. Tested System Details	8
1.3. Configuration of Tested System	8
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment.....	10
1.7. Uncertainty	11
2. Conducted Emission	12
2.1. Test Setup	12
2.2. Limits.....	12
2.3. Test Procedure	13
2.4. Test Result of Conducted Emission.....	13
3. Peak Power Output.....	15
3.1. Test Setup	15
3.2. Limit	15
3.3. Test Procedure	15
3.4. Test Result of Peak Power Output.....	16
4. Radiated Emission	17
4.1. Test Setup	18
4.2. Limits.....	19
4.3. Test Procedure	20
4.4. Test Result of Radiated Emission	20
5. RF Antenna Conducted Test	25
5.1. Test Setup	25
5.2. Limits.....	25
5.3. Test Procedure	25
5.4. Test Result of RF Antenna Conducted Test	26
6. Band Edge.....	28
6.1. Test Setup	28
6.2. Limit	29
6.3. Test Procedure	29

6.4. Test Result of Band Edge	30
7. Channel Number	42
7.1. Test Setup	42
7.2. Limit	42
7.3. Test Procedure	42
7.4. Test Result of Channel Number	43
8. Channel Separation	45
8.1. Test Setup	45
8.2. Limit	45
8.3. Test Procedure	45
8.4. Test Result of Channel Separation	45
9. Dwell Time	48
9.1. Test Setup	48
9.2. Limit	48
9.3. Test Procedure	48
9.4. Test Result of Dwell Time	49
10. Occupied Bandwidth	51
10.1. Test Setup	51
10.2. Limits	51
10.3. Test Procedure	51
10.4. Test Result of Occupied Bandwidth	51
11. Duty Cycle	54
11.1. Test Setup	54
11.2. Test Result of Duty Cycle	54

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 22B0267R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
22B0267R-RFUSBT2V01-A	V1.0	Initial issue of report.	Feb. 15, 2023

1. General Information

1.1. EUT Description

Product Name	Bluetooth Module
Trade Name	NUMA
Model No.	BT-102
FCC ID	YKH319-BT10200
Frequency Range	2402-2480 MHz
Number of Channels	79 CH
Type of Modulation	GFSK(1Mbps) / π / 4DQPSK(2Mbps) / 8DPSK(3Mbps)
Channel Control	Auto

Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	NUMA Electronics Inc.	BT-102	PIFA	3.3 dBi for 2400 MHz

Note: The antenna of EUT conforms to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	01	2403	02	2404	03	2405
04	2406	05	2407	06	2408	07	2409
08	2410	09	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	--	--

Note:

1. The EUT is a Bluetooth Module with built-in Bluetooth BLE 5.0 Dual mode / 4.2/4.0/3.0/2.1/2.0/1.2/1.1 transceiver, this report for Bluetooth V3.0/V2.1+EDR.
2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test
4. The test mode is based on the Bluetooth technology, while testing 1 Mbps, 2 Mbps and 3 Mbps, the worst case is 1 Mbps and 3 Mbps, and only worse case data is recorded in this report.
5. DEKRA has evaluated each test mode. Only the worst case is shown in the report.
6. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.

Test Mode	Mode 1	Transmit-Bluetooth-1 Mbps
	Mode 2	Transmit-Bluetooth-3 Mbps


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	P62G	CY9FJC2	N/A
2 Test Fixture	NUMA	BT-TEST	N/A	N/A

Cable Type	Cable Description
A USB Cable	Shielded, 1m
B Signal Cable	Non-shielded, 0.1m

1.3. Configuration of Tested System

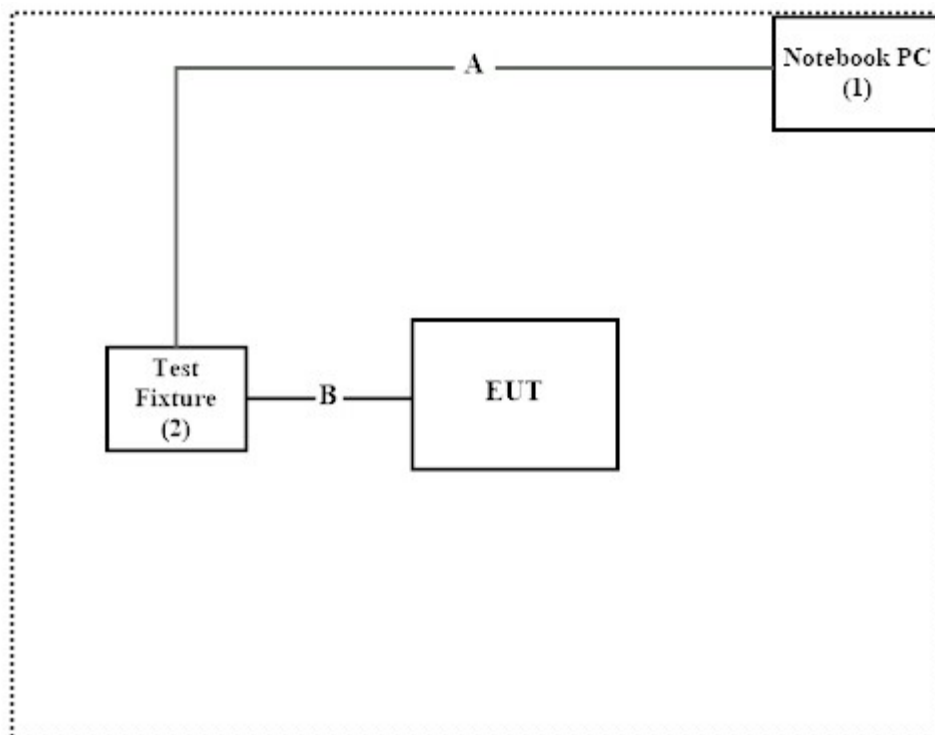

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software "FCC test tool Version 2.3" on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press "OK" to start the continuous transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	24.6 °C
	Humidity (%RH)	10~90 %	56.0 %
Radiated Emission	Temperature (°C)	10~40 °C	21.6 °C
	Humidity (%RH)	10~90 %	62.8 %
Conductive	Temperature (°C)	10~40 °C	25.0 °C
	Humidity (%RH)	10~90 %	58.0 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd

Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan

Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.

Phone Number : +886-3-275-7255

Fax Number : +886-3-327-8031

Email Address : info.tw@dekra.comWebsite : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2022/05/23	2023/05/22
V	Two-Line V-Network	R&S	ENV216	101307	2022/07/04	2023/07/03
V	Coaxial Cable	SUHNER	RG400 BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: E3 210616 dekra V9.

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103464	2022/04/27	2023/04/26
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000410	2022/08/06	2023/08/05
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY56080003	2022/08/05	2023/08/04
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY56080004	2022/08/05	2023/08/04

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: RF Conducted Test Tools R3 V3.0.1.14.

For Radiated Measurements / HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	49611	2022/03/18	2023/03/17
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	RF SPIN	DRH18-E	210508A18ES	2022/06/08	2023/06/07
V	Horn Antenna	Com-Power	AH-840	101100	2021/10/04	2023/10/03
V	Pre-Amplifier	SGH	SGH0301-9	20211007-10	2022/02/22	2023/02/21
V	Pre-Amplifier	SGH	PRAMP118	20200701	2022/07/28	2023/07/27
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2022/07/28	2023/07/27
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2022/05/12	2023/05/11
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
V	Filter	MICRO TRONICS	BRM50702	G269	2022/07/31	2023/07/30
	Filter	MICRO TRONICS	BRM50716	G196	2022/07/27	2023/07/26
V	EMI Test Receiver	R&S	ESR3	102793	2022/12/05	2023/12/04
V	Spectrum Analyzer	R&S	FSV3044	101114	2022/02/11	2023/02/10
V	Coaxial Cable	SGH	SGH18	2021005-1	2022/03/18	2023/03/17
	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	SGH18	GD20110223-1		
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: E3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Item	Uncertainty	
Conducted Emission	± 3.42 dB	
Peak Power Output	± 0.89 dB	
Radiated Emission	Under 1GHz ± 4.05 dB	Above 1GHz ± 3.73 dB
RF Antenna Conducted Test	± 2.06 dB	
Band Edge	Under 1GHz ± 4.05 dB	Above 1GHz ± 3.73 dB
Channel Number	N/A	
Channel Separation	± 1544.74 Hz	
Dwell Time	± 2.31 ms	
Occupied Bandwidth	± 1544.74 Hz	
Duty Cycle	± 2.31 ms	

2. Conducted Emission

2.1. Test Setup

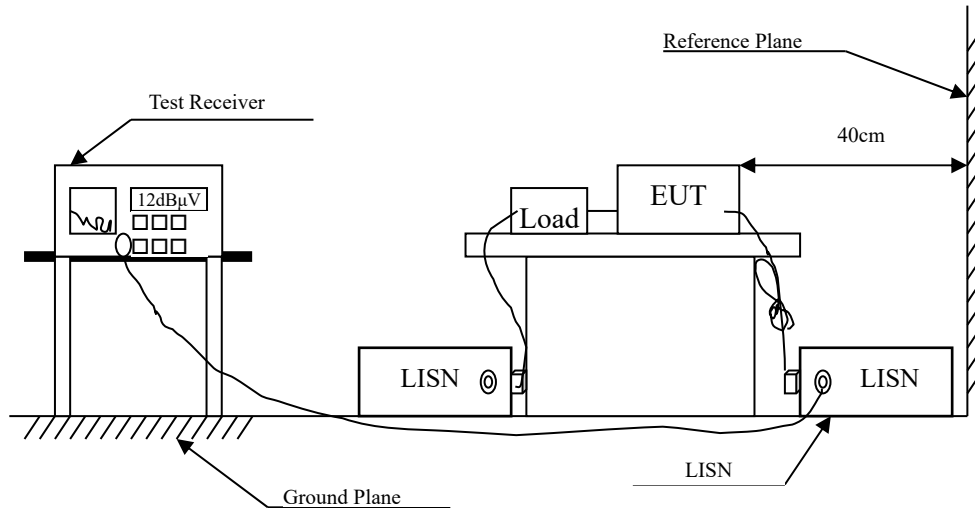

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure


The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


The EUT setup and the test procedure are according to ANSI C63.4, 2014 to comply with the requirements of FCC 47CFR Subpart C.

2.4. Test Result of Conducted Emission

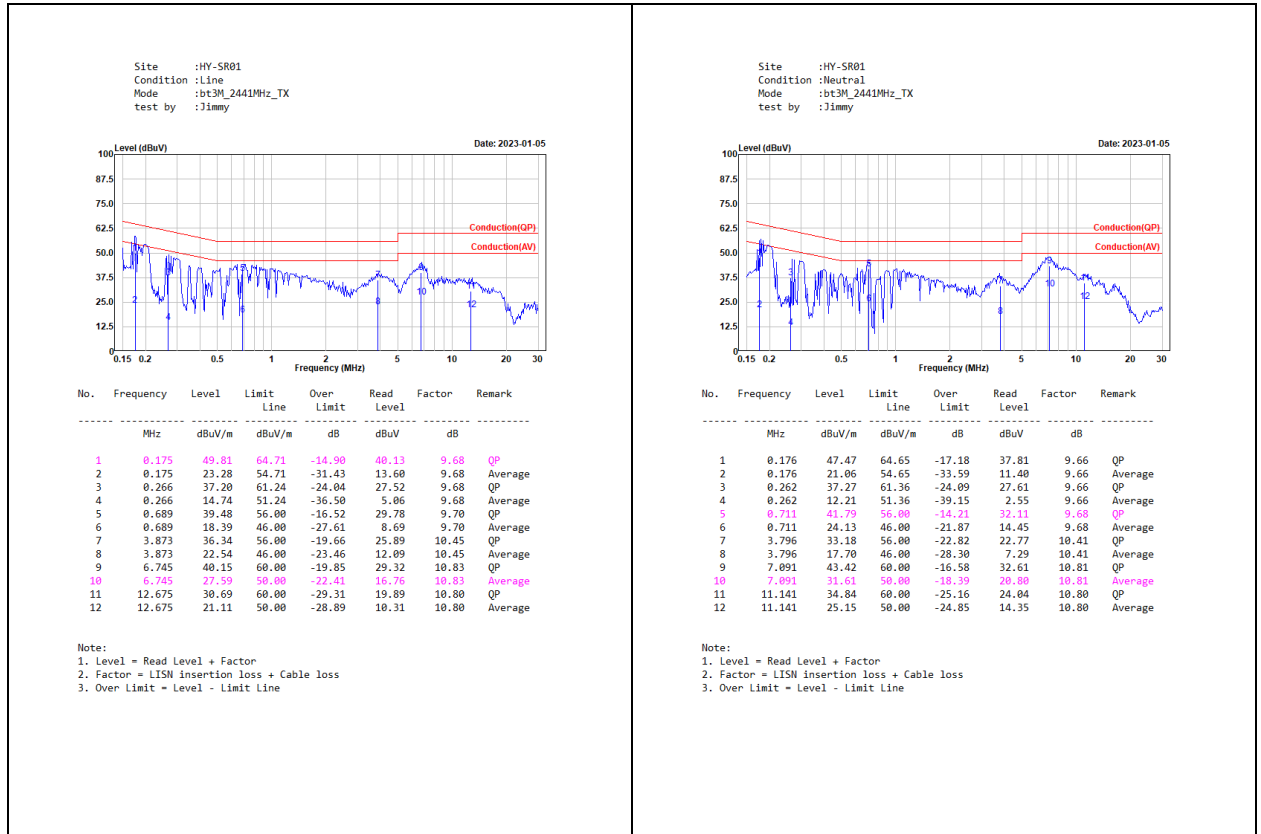

3. Peak Power Output

3.1. Test Setup

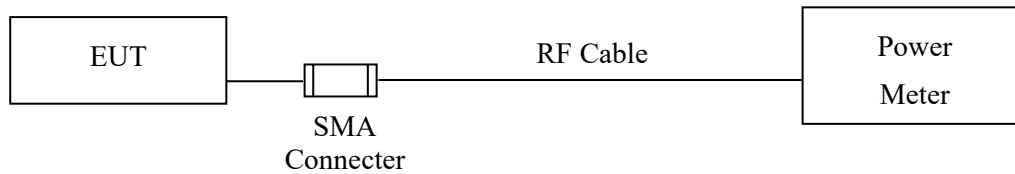

3.2. Limit

The maximum peak power shall be less 1 Watt.

3.3. Test Procedure

Tested according to FHSS test procedure of KDB 558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

3.4. Test Result of Peak Power Output

Product : Bluetooth Module
Test Item : Peak Power Output
Test Mode : Transmit-Bluetooth-1 Mbps
Test Date : 2022/12/05

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
00	2402	2.06	1 Watt= 30 dBm	Pass
39	2441	2.39	1 Watt= 30 dBm	Pass
78	2480	2.32	1 Watt= 30 dBm	Pass


Product : Bluetooth Module
Test Item : Peak Power Output
Test Mode : Transmit-Bluetooth-3 Mbps
Test Date : 2022/12/05

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
00	2402	1.64	1 Watt= 30 dBm	Pass
39	2441	1.79	1 Watt= 30 dBm	Pass
78	2480	1.66	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30 MHz

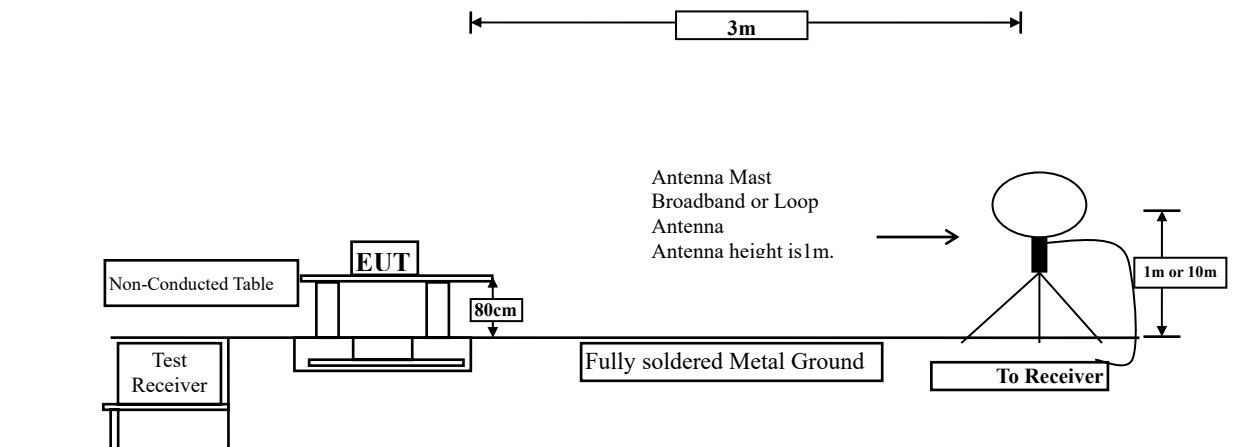

Radiated Emission Below 1 GHz

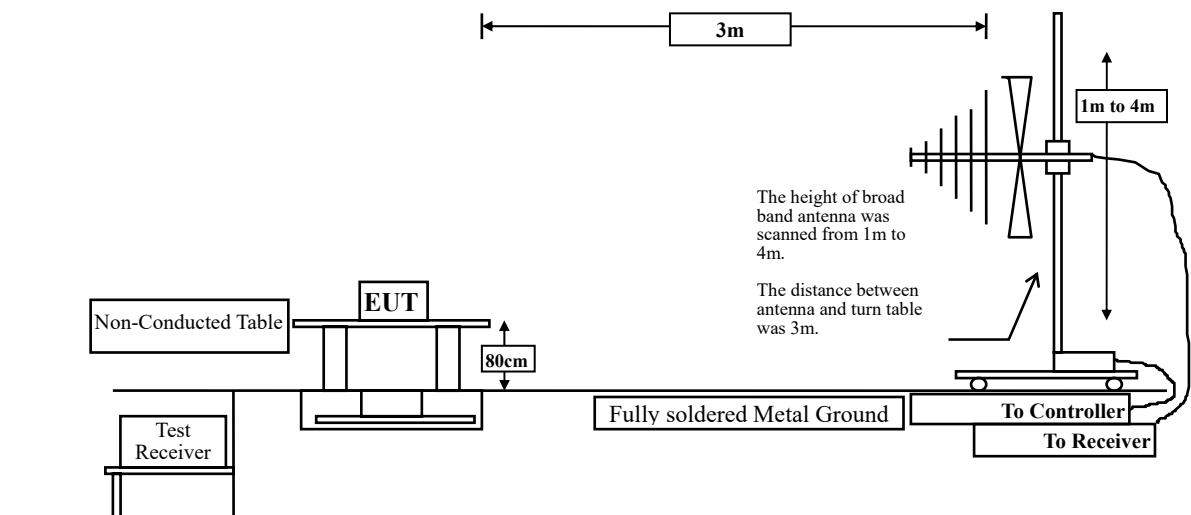

Radiated Emission Above 1 GHz

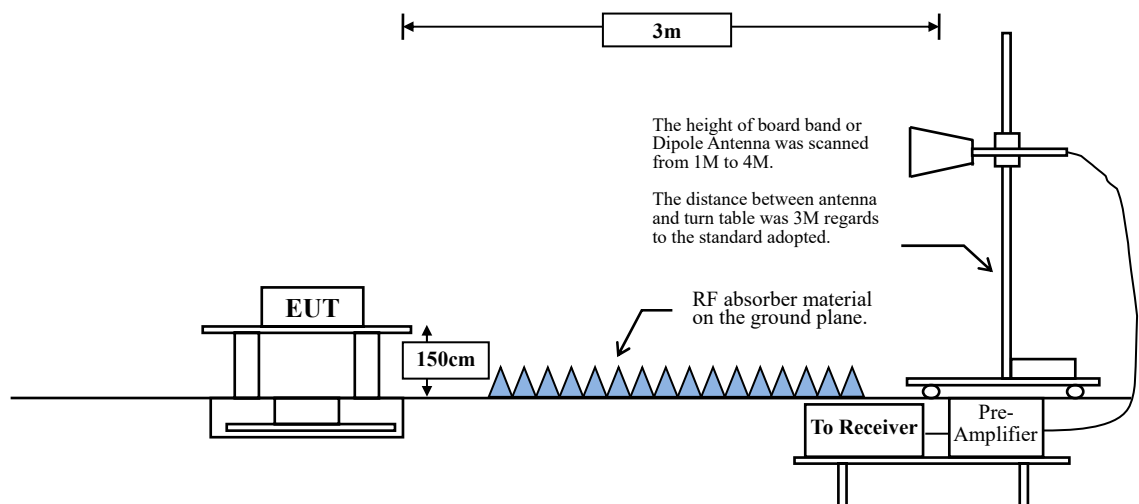

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks:

1. RF Voltage (dBμV) = 20 log RF Voltage (μV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1 GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30 MHz setting on the field strength meter is 9kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.


Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.


The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range form 9 kHz - 10th Harmonic of fundamental was investigated.

4.4. Test Result of Radiated Emission

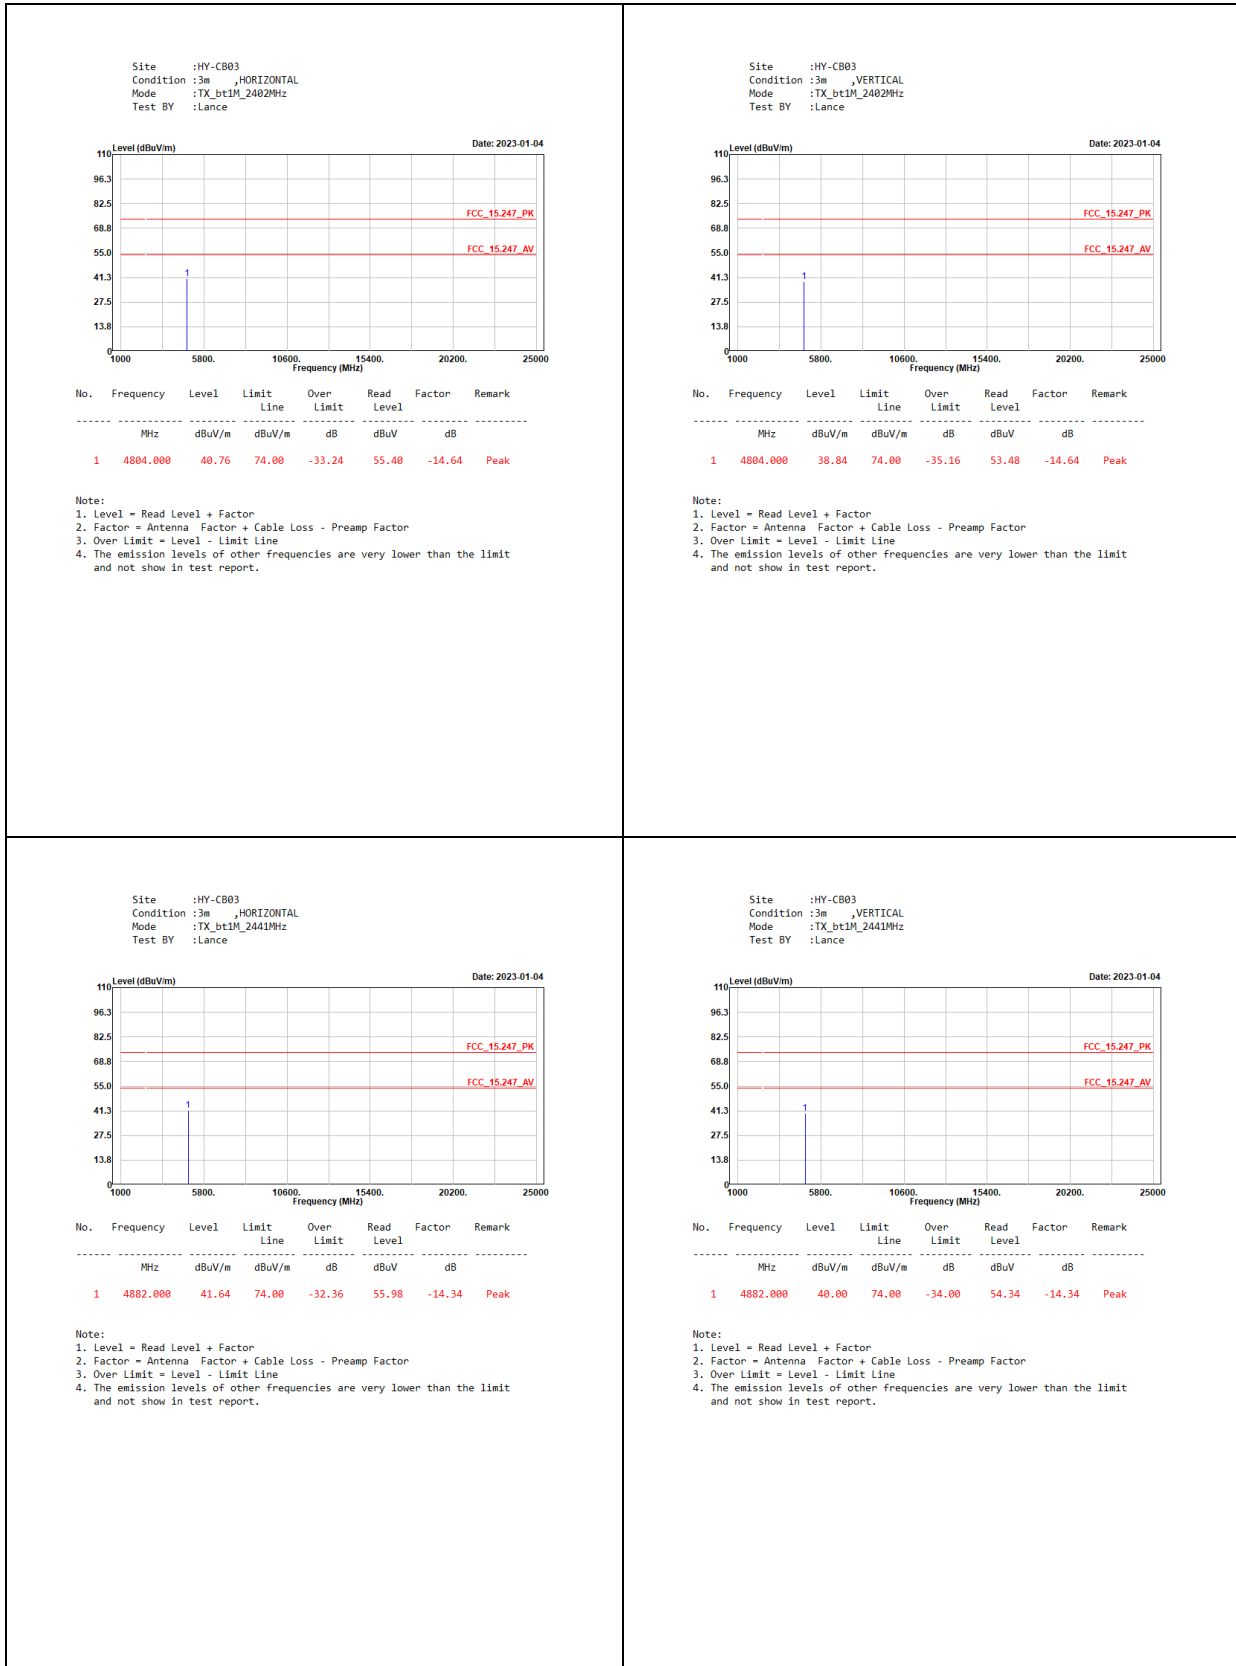

Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_bt1M_2480MHz
Test BY :Lance

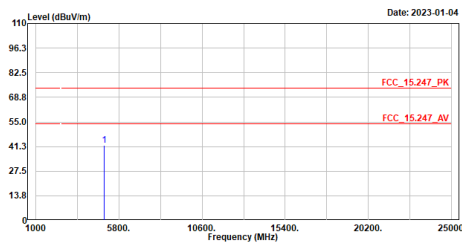


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4968.000	41.77	74.00	-32.23	55.73	-13.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_bt1M_2480MHz
Test BY :Lance

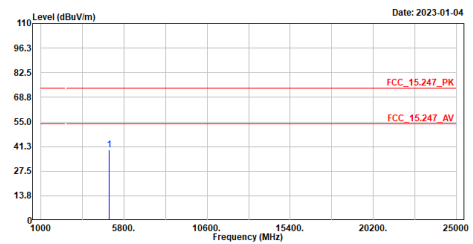


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4968.000	39.24	74.00	-34.76	53.20	-13.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2402MHz
Test BY :Lance

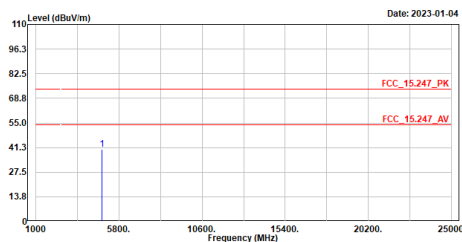


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4804.000	40.18	74.00	-33.82	54.82	-14.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_bt3M_2402MHz
Test BY :Lance

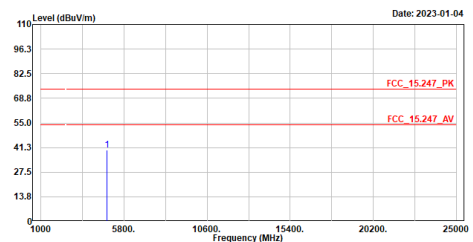


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4804.000	39.74	74.00	-34.26	54.38	-14.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2441MHz
Test BY :Lance

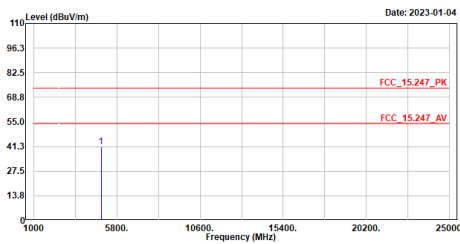

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4882.000	41.01	74.00	-32.99	55.35	-14.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_bt3M_2441MHz
Test BY :Lance

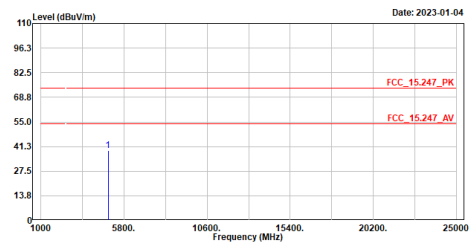

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4882.000	39.21	74.00	-34.79	53.55	-14.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2480MHz
Test BY :Lance

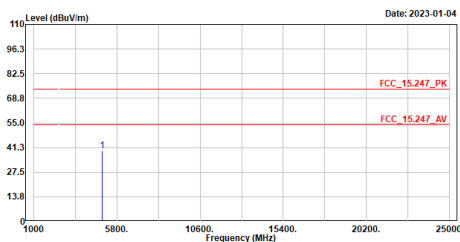

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	39.44	74.00	-34.56	53.40	-13.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_bt3M_2480MHz
Test BY :Lance

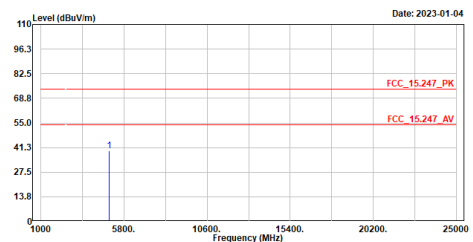

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	39.39	74.00	-34.61	53.35	-13.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_bt3M_2441MHz
Test BY :Lance

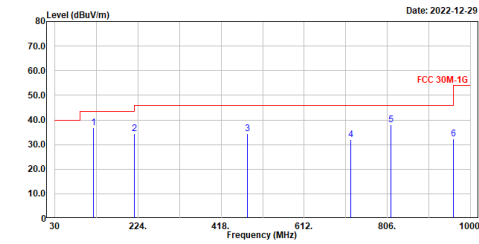


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	119.240	36.98	43.50	-6.52	63.59	-26.61	QP
2	215.270	34.45	43.50	-9.05	61.50	-27.05	QP
3	480.080	34.28	46.00	-11.72	53.56	-19.28	QP
4	720.640	32.13	46.00	-13.87	46.92	-14.79	QP
5	813.760	38.18	46.00	-7.82	51.71	-13.53	QP
6	960.230	32.41	54.00	-21.59	44.12	-11.71	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_bt3M_2441MHz
Test BY :Lance

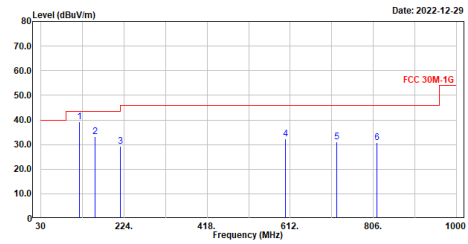


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	119.240	39.26	43.50	-4.24	65.87	-26.61	QP
2	156.100	33.20	43.50	-10.30	57.49	-24.29	QP
3	216.240	29.29	46.00	-16.71	56.34	-27.05	QP
4	600.360	32.24	46.00	-13.76	48.51	-16.27	QP
5	720.640	31.05	46.00	-14.95	45.84	-14.79	QP
6	813.760	30.80	46.00	-15.20	44.33	-13.53	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

5. RF Antenna Conducted Test

5.1. Test Setup

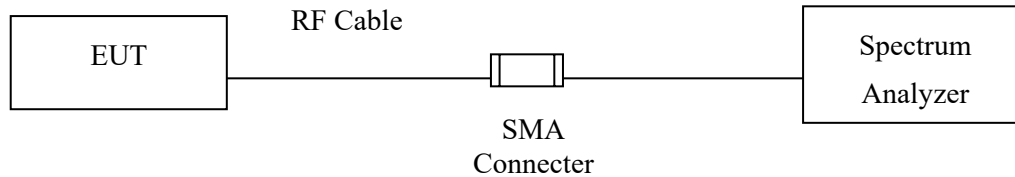

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


5.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 b) for compliance to FCC 47CFR 15.247 requirements.

5.4. Test Result of RF Antenna Conducted Test

Product : Bluetooth Module
Test Item : RF Antenna Conducted Test
Test Mode : Transmit-Bluetooth-1 Mbps
Test Date : 2022/12/05


Figure Channel 39

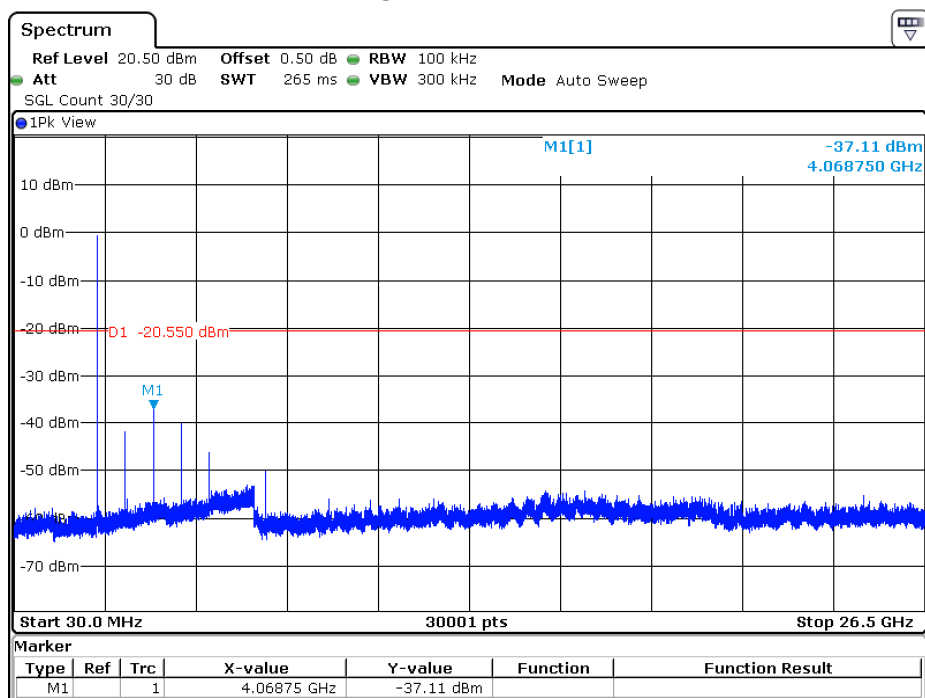

Date: 5.DEC.2022 09:22:30

Product : Bluetooth Module
Test Item : RF Antenna Conducted Test
Test Mode : Transmit-Bluetooth-3 Mbps
Test Date : 2022/12/05

Figure Channel 39

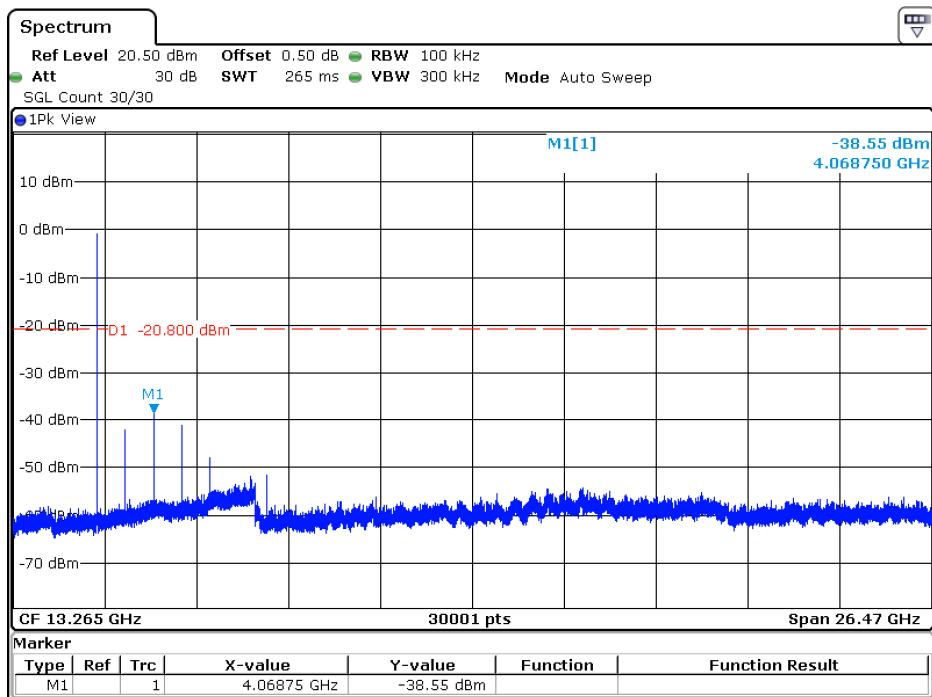


Date: 5.DEC.2022 09:35:09


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

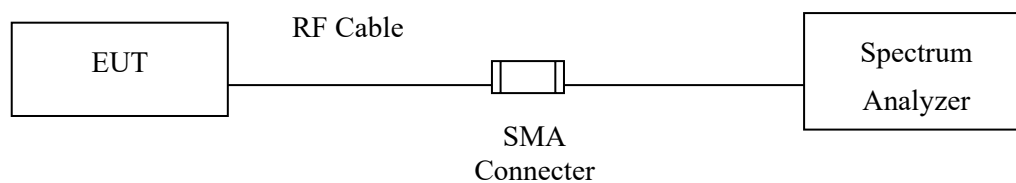

RF Radiated Measurement:

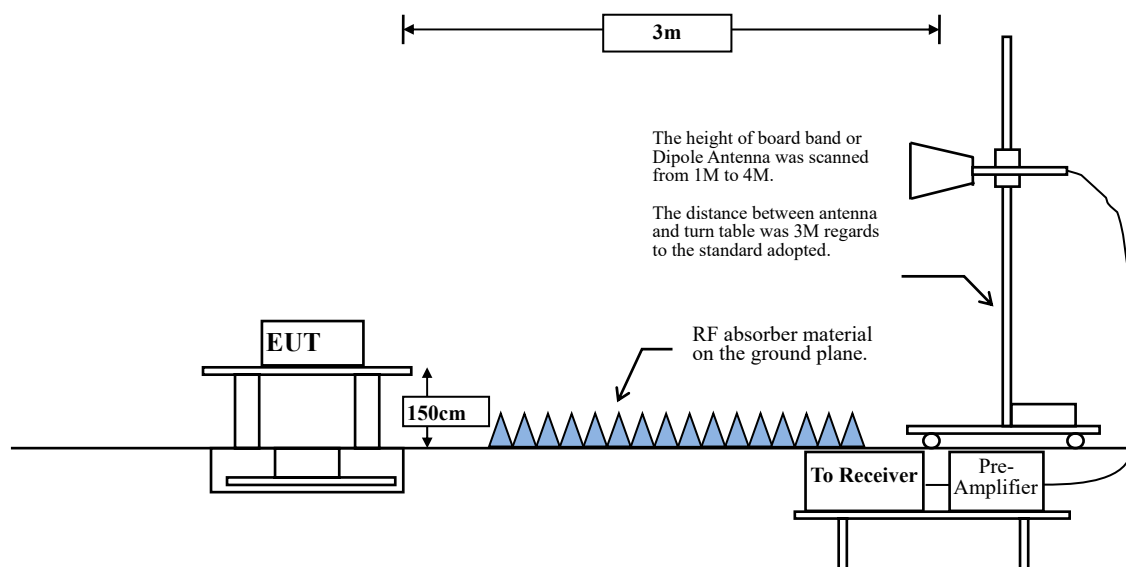

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.


The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1 GHz and above 1 GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.4. Test Result of Band Edge

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt1M_2402MHz
 Test BY :Lance

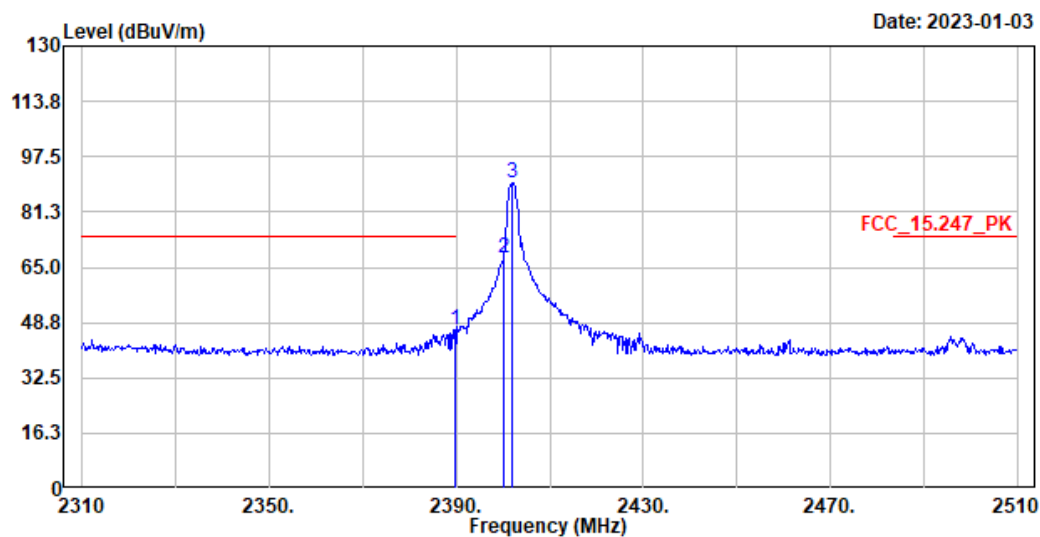

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	46.77	74.00	-27.23	40.23	6.54	Peak
2	2400.000	67.54	-----	-----	61.01	6.53	Peak
3	2402.000	89.86	-----	-----	83.33	6.53	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389	46.77	-30.755	16.015	-37.985	54.000
2400	67.54	-30.755	36.785	--	--
2402	89.86	-30.755	59.105	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt1M_2402MHz
 Test BY :Lance

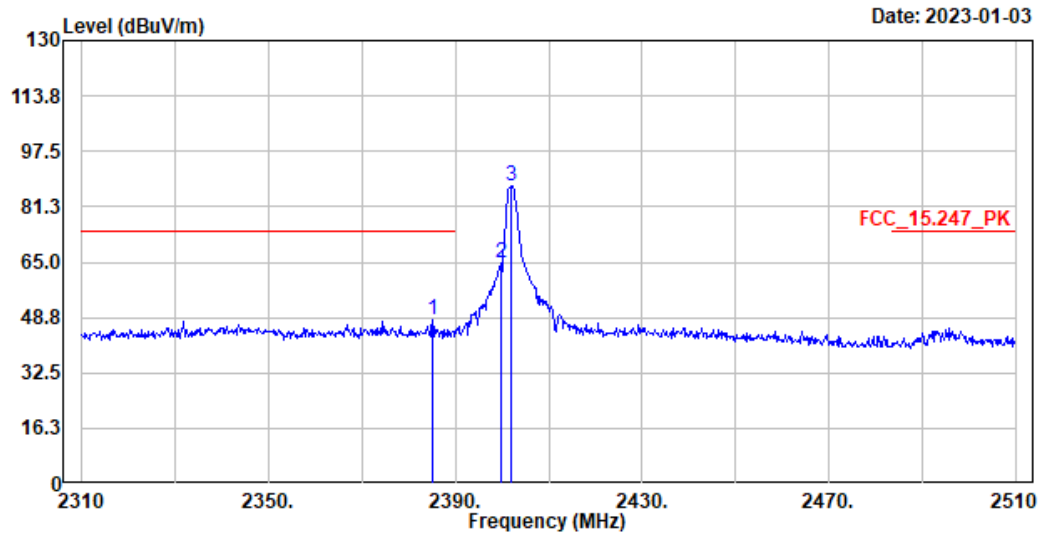

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2385.000	48.04	74.00	-25.96	41.50	6.54	Peak
2	2399.800	64.88	-----	-----	58.35	6.53	Peak
3	2402.000	87.52	-----	-----	80.99	6.53	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2385	48.04	-30.755	17.285	-36.715	54.000
2399.8	64.88	-30.755	34.125	--	--
2402	87.52	-30.755	56.765	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt1M_2480MHz
 Test BY :Lance

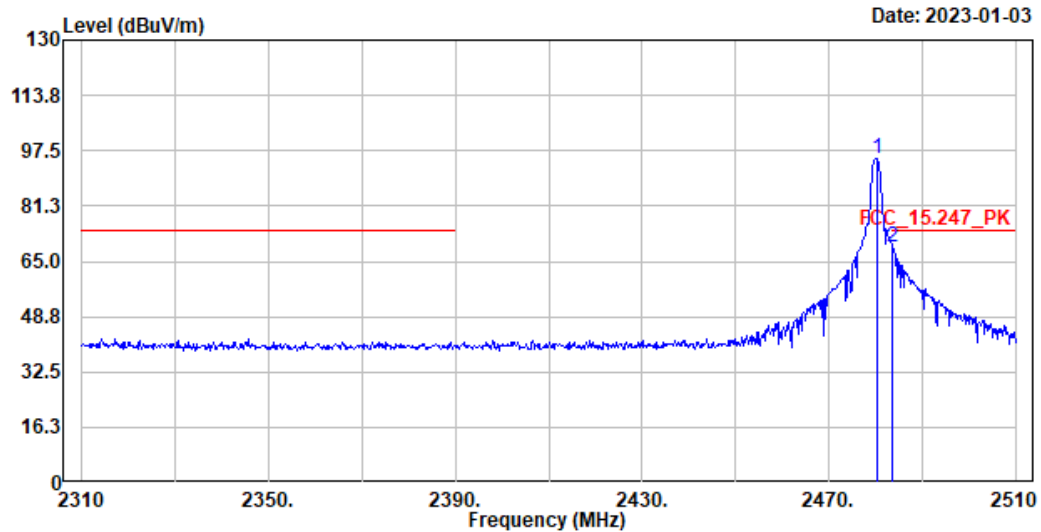

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.200	94.95	-----	-----	88.42	6.53	Peak
2	2483.600	69.11	74.00	-4.89	62.57	6.54	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	94.95	-30.755	64.195	--	--
2483.6	69.11	-30.755	38.355	-15.645	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt1M_2480MHz
 Test BY :Lance

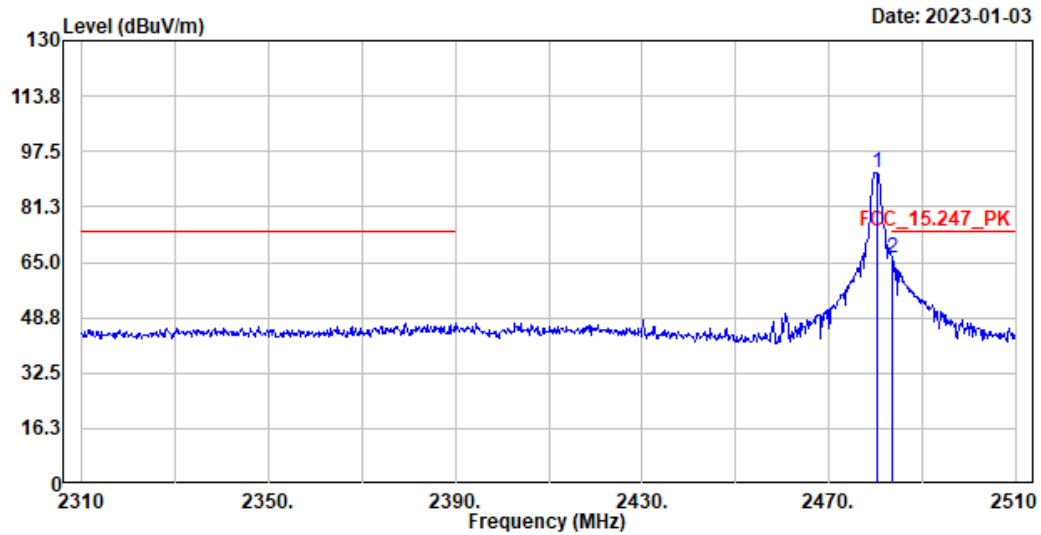

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.200	91.41	-----	-----	84.88	6.53	Peak
2	2483.600	66.33	74.00	-7.67	59.79	6.54	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	91.41	-30.755	60.655	--	--
2483.6	66.33	-30.755	35.575	-18.425	54.000

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt3M_2402MHz
 Test BY :Lance

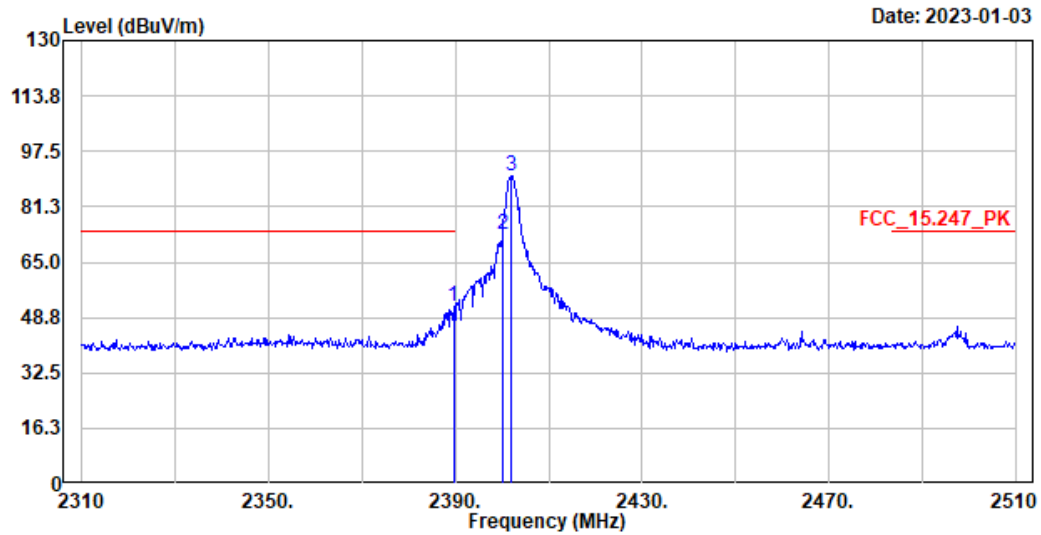

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2389.600	52.18	74.00	-21.82	45.64	6.54	Peak
2	2400.000	73.29	-----	-----	66.76	6.53	Peak
3	2402.000	90.17	-----	-----	83.64	6.53	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389.6	52.18	-30.755	21.425	-32.575	54.000
2400	73.29	-30.755	42.535	--	--
2402	90.17	-30.755	59.415	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt3M_2402MHz
 Test BY :Lance

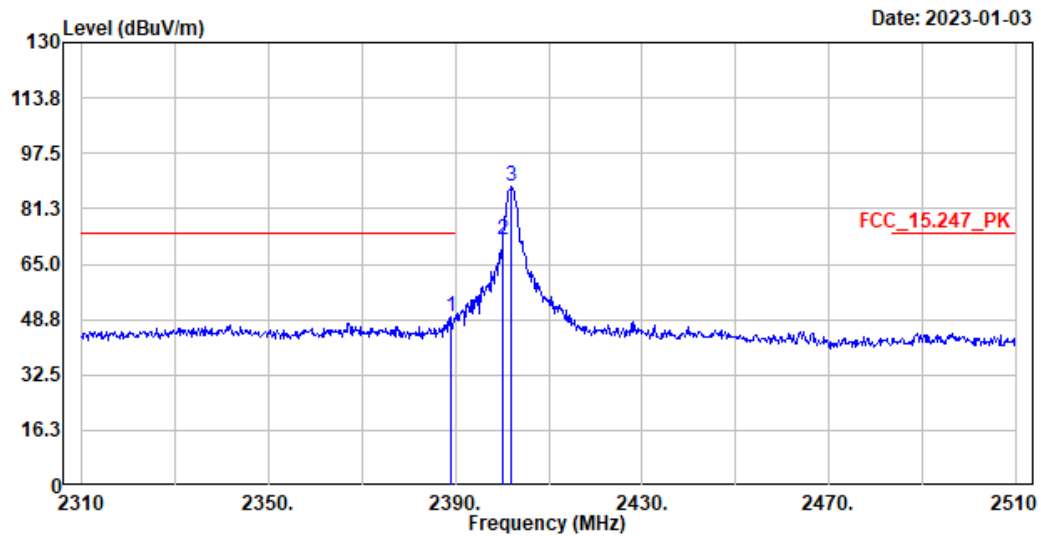

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.000	49.55	74.00	-24.45	43.01	6.54	Peak
2	2400.000	72.00	-----	-----	65.47	6.53	Peak
3	2402.000	87.62	-----	-----	81.09	6.53	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389	49.55	-30.755	18.795	-35.205	54.000
2400	72	-30.755	41.245	--	--
2402	87.62	-30.755	56.865	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt3M_2480MHz
 Test BY :Lance

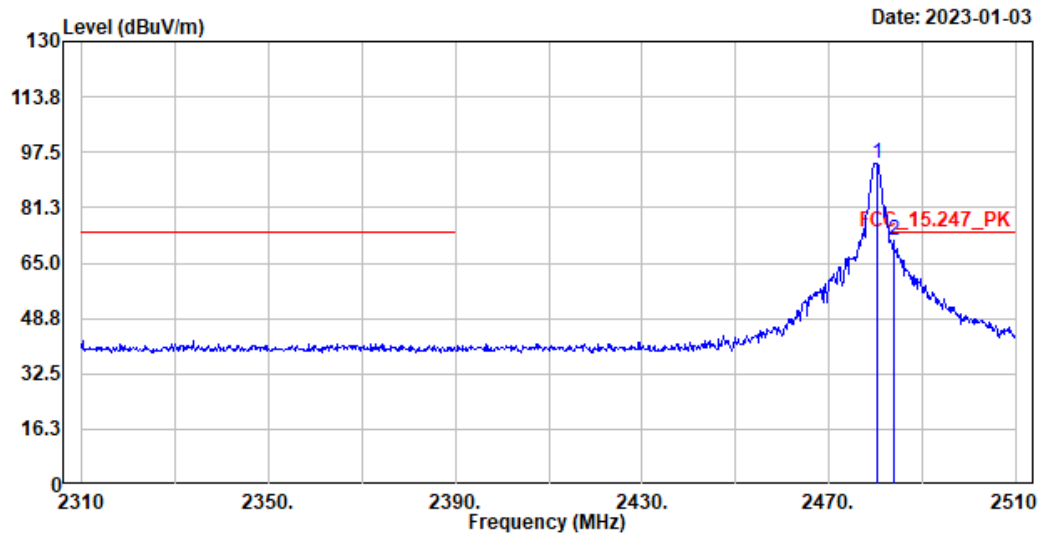

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.200	94.38	-----	-----	87.85	6.53	Peak
2	2483.800	71.38	74.00	-2.62	64.84	6.54	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	94.38	-30.755	63.625	--	--
2483.8	71.38	-30.755	40.625	-13.375	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt3M_2480MHz
 Test BY :Lance

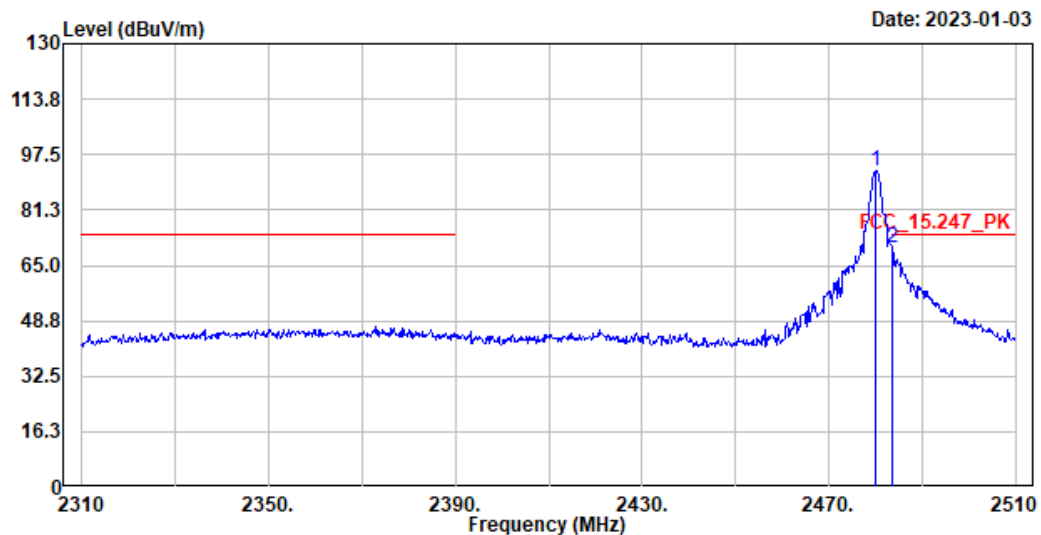

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.000	92.52	-----	-----	85.99	6.53	Peak
2	2483.600	70.35	74.00	-3.65	63.81	6.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480	92.52	-30.755	61.765	--	--
2483.6	70.35	-30.755	39.595	-14.405	54.000

Product : Bluetooth Module
 Test Item : Band Edge
 Test Mode : Transmit-Bluetooth-1 Mbps (Hopping off)
 Test Date : 2022/12/05


Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00

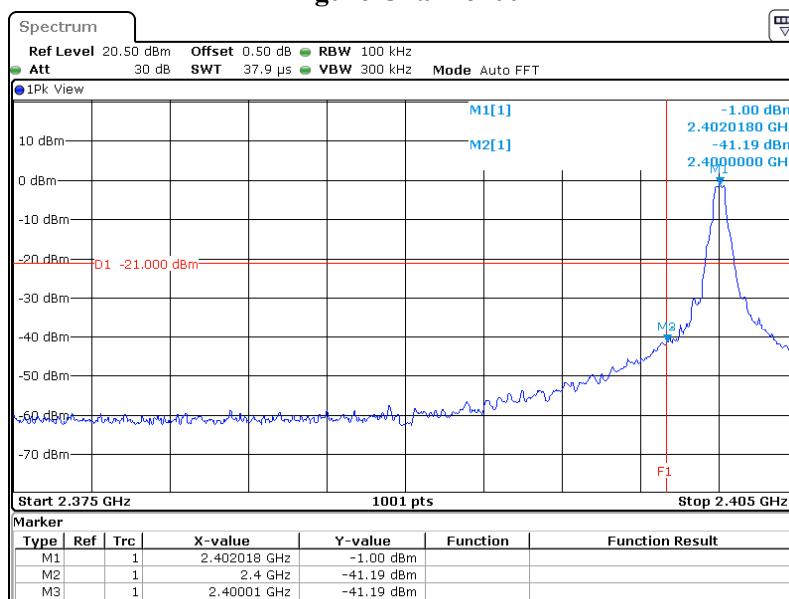

Date: 5.DEC.2022 09:39:10

Figure Channel 78

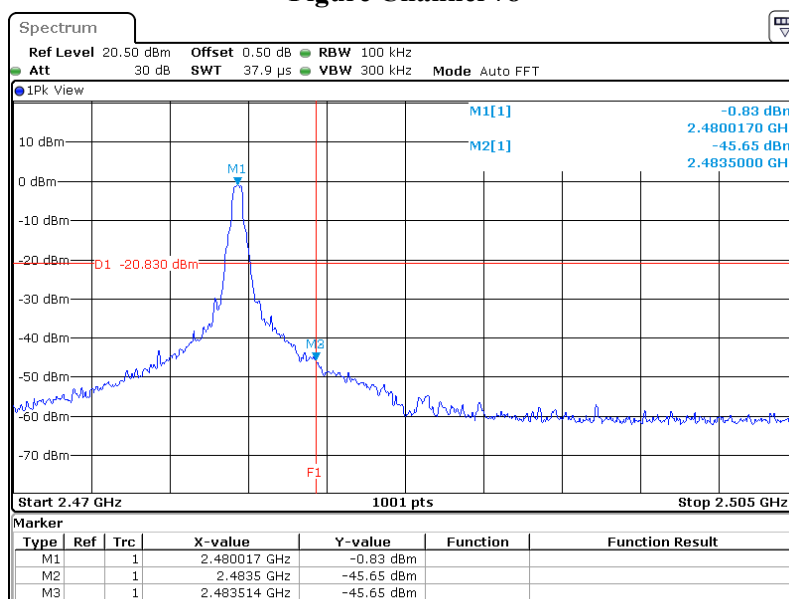


Date: 5.DEC.2022 08:56:14

Product : Bluetooth Module
 Test Item : Band Edge
 Test Mode : Transmit-Bluetooth-3 Mbps (Hopping off)
 Test Date : 2022/12/05


Measurement Level Δ (dB)	Result
> 20	PASS

Figure Channel 00:

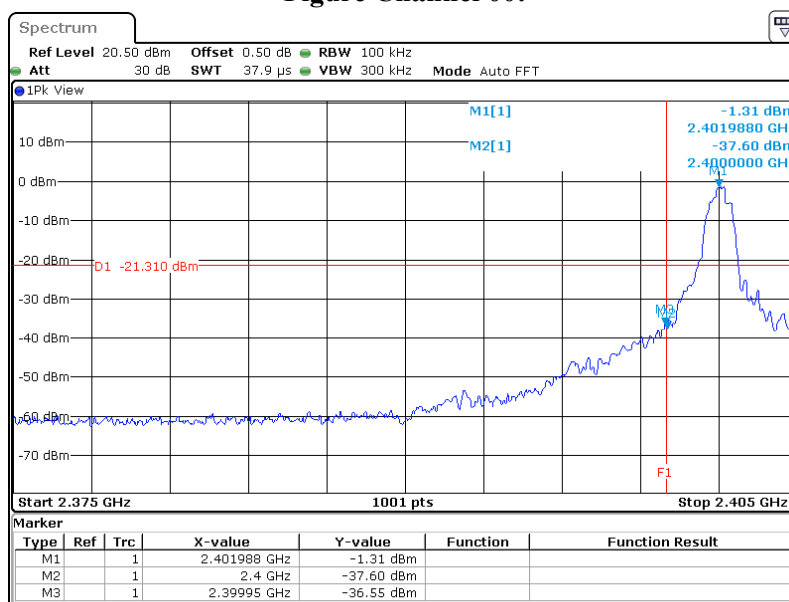

Date: 5.DEC.2022 09:26:52

Figure Channel 78

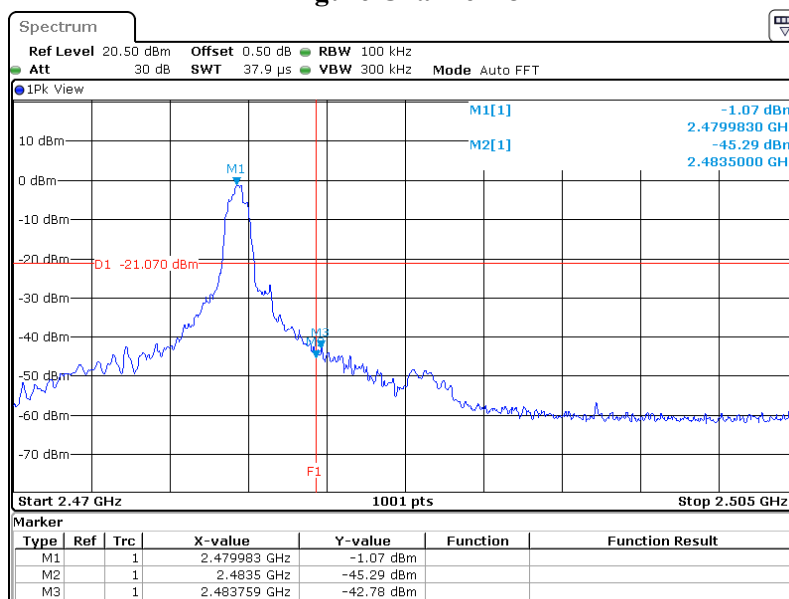


Date: 5.DEC.2022 09:31:10

Product : Bluetooth Module
 Test Item : Band Edge
 Test Mode : Transmit-Bluetooth-1 Mbps (Hopping on)
 Test Date : 2022/12/05

Measurement Level Δ (dB)	Result
> 20	PASS

Figure Channel Hopping

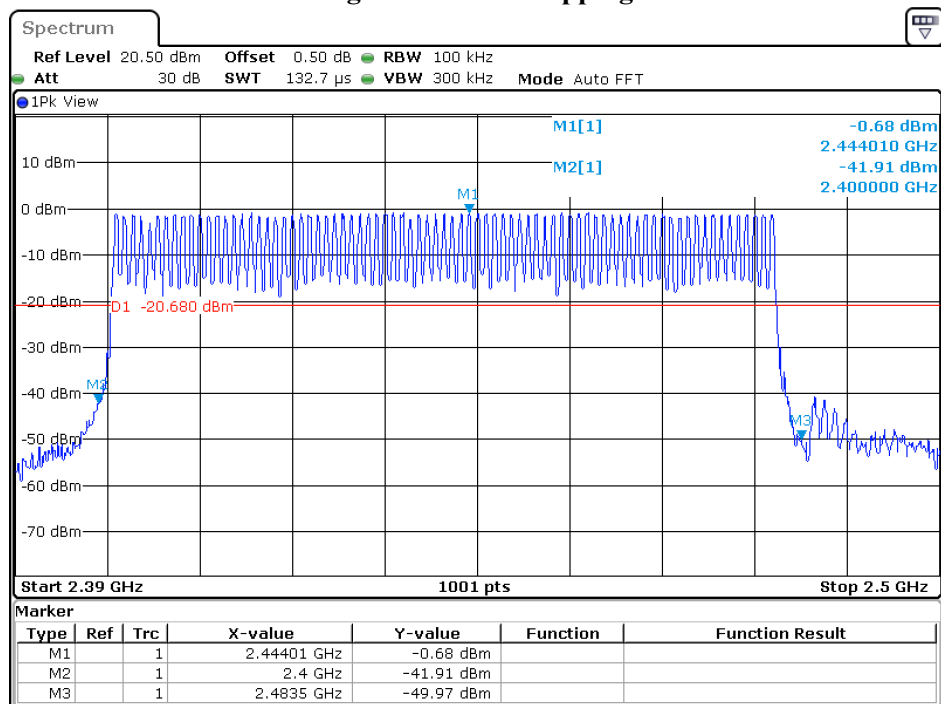


Date: 5.DEC.2022 08:48:28

Product : Bluetooth Module
 Test Item : Band Edge
 Test Mode : Transmit-Bluetooth-3 Mbps (Hopping on)
 Test Date : 2022/12/05

Measurement Level Δ (dB)	Result
> 20	PASS


Figure Channel Hopping

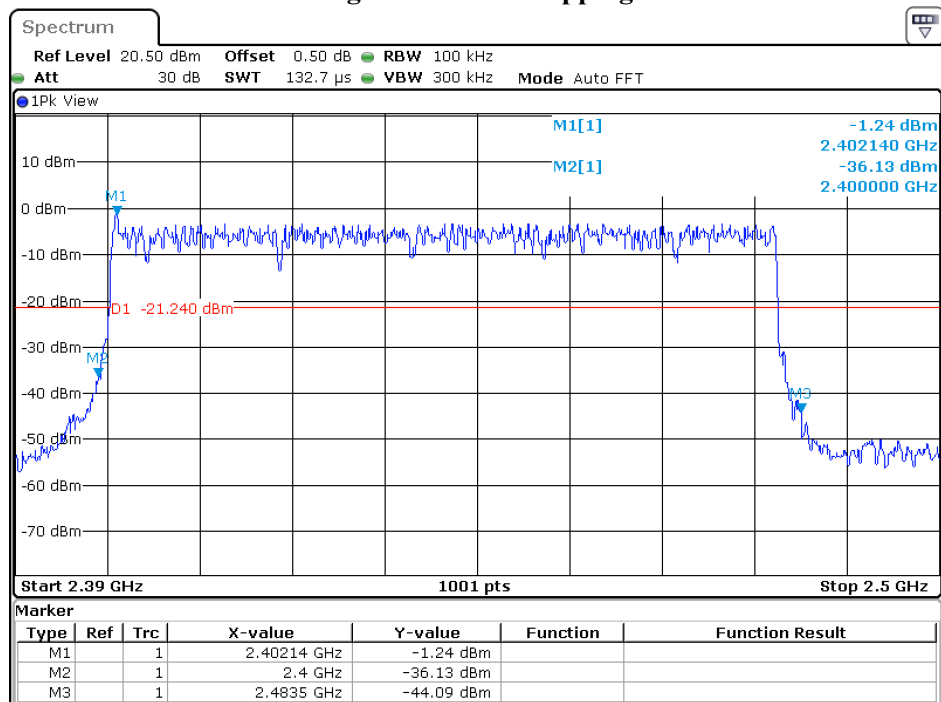

Date: 5.DEC.2022 09:27:34

7. Channel Number

7.1. Test Setup

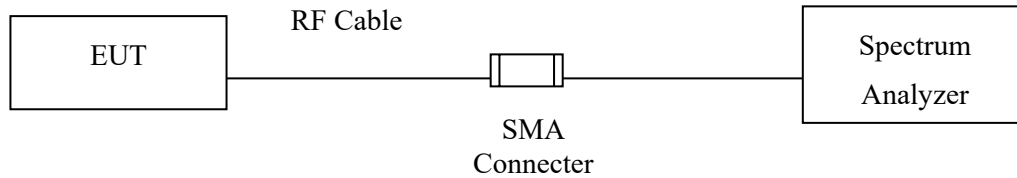

7.2. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.3. Test Procedure


Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of Channel Number


Product : Bluetooth Module
 Test Item : Channel Number
 Test Mode : Transmit-Bluetooth-1 Mbps
 Test Date : 2022/12/05

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

2402 MHz

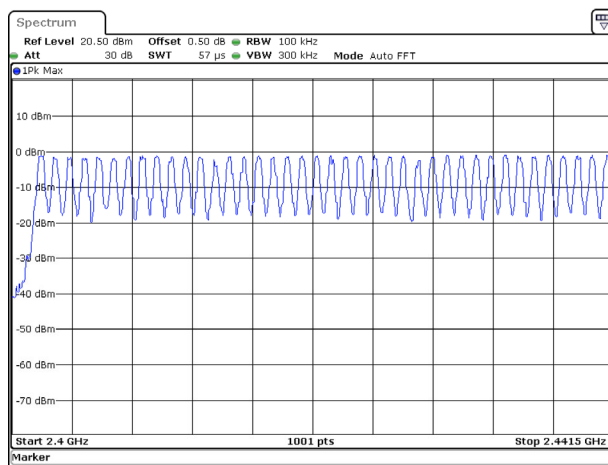


2480 MHz

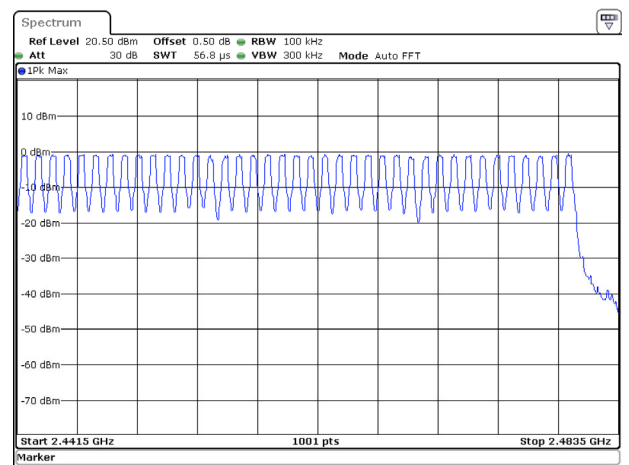

Product : Bluetooth Module
Test Item : Channel Number
Test Mode : Transmit-Bluetooth-3 Mbps
Test Date : 2022/12/05


Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

2402 MHz

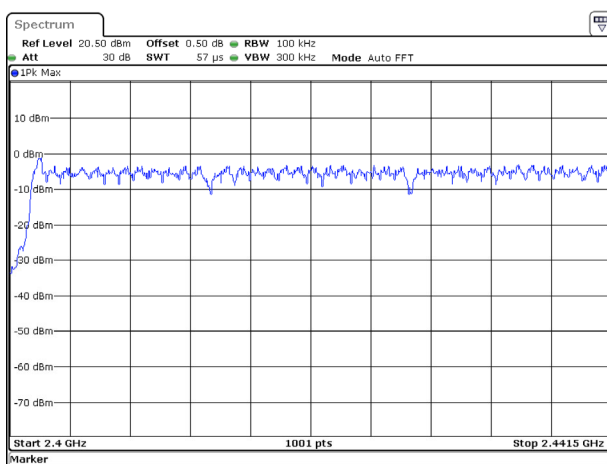

Date: 5 DEC 2022 09:26:44


2480 MHz

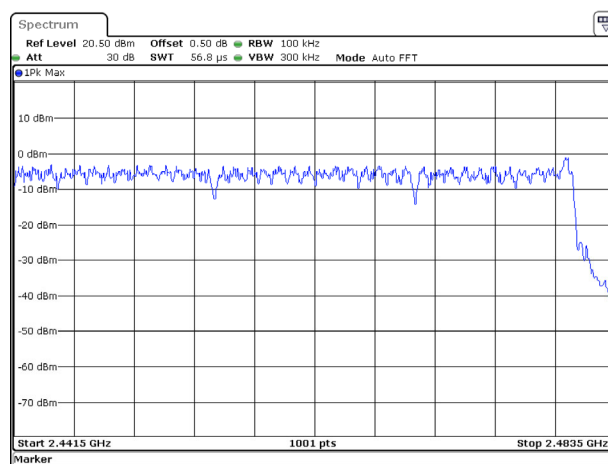

Date: 5 DEC 2022 09:31:02

8. Channel Separation

8.1. Test Setup

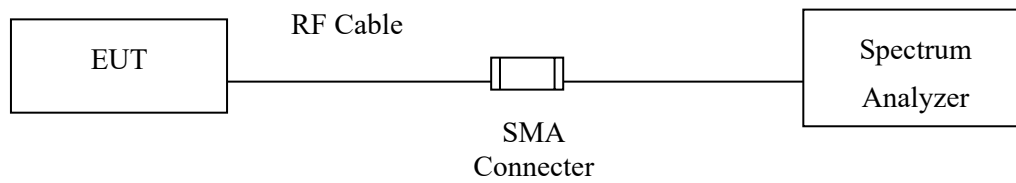

8.2. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.


8.4. Test Result of Channel Separation

Product : Bluetooth Module
 Test Item : Channel Separation
 Test Mode : Transmit-Bluetooth-1 Mbps
 Test Date : 2022/12/05

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	998	>25 kHz	886.7	Pass
39	2441	1001	>25 kHz	888.7	Pass
78	2480	1001	>25 kHz	888.7	Pass

Note: The 20dB Bandwidth is refer to section 10.

Figure Channel 00

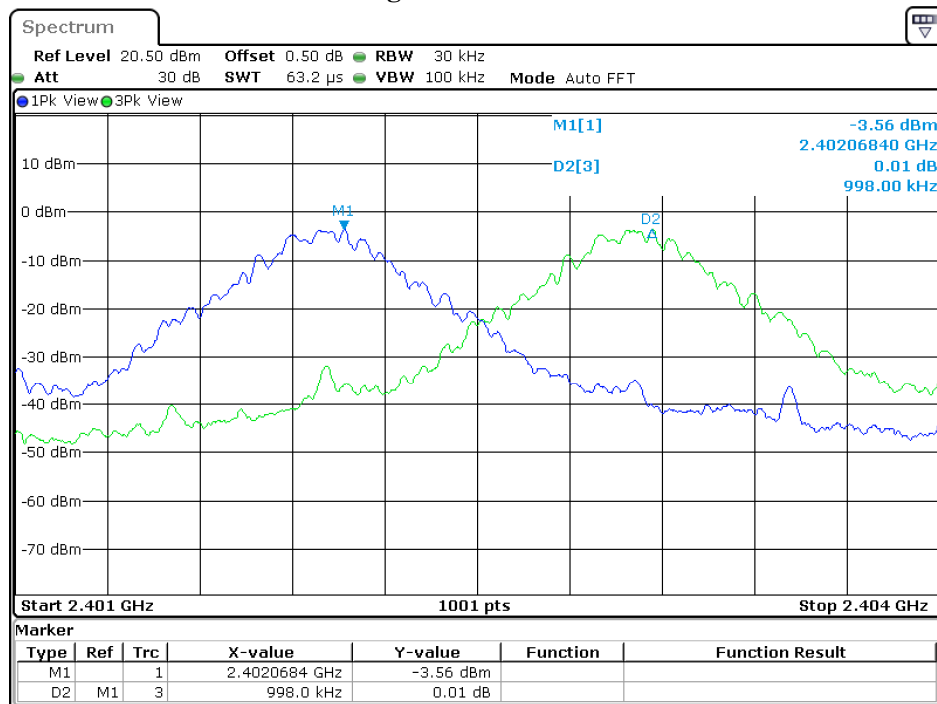


Date: 5.DEC.2022 08:47:12

Product : Bluetooth Module
 Test Item : Channel Separation
 Test Mode : Transmit-Bluetooth-3 Mbps
 Test Date : 2022/12/05

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1001	>25 kHz	886.7	Pass
39	2441	998	>25 kHz	888.7	Pass
78	2480	998	>25 kHz	888.7	Pass

Note: The 20dB Bandwidth is refer to section 10.


Figure Channel 39

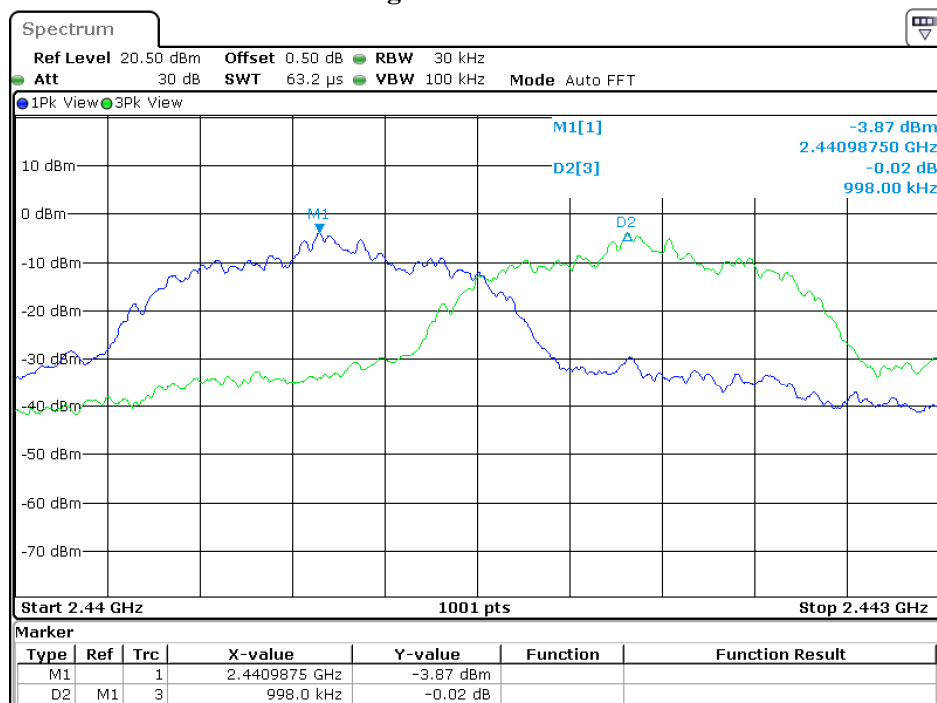

Date: 5.DEC.2022 09:33:35

9. Dwell Time

9.1. Test Setup

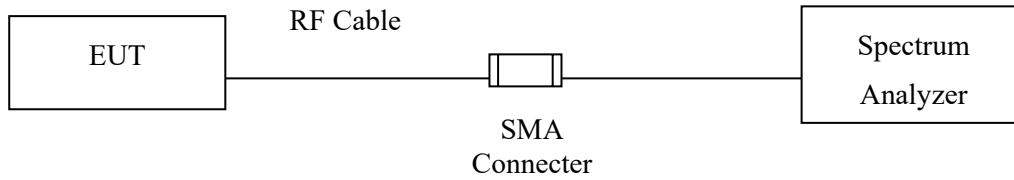

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure


Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

9.4. Test Result of Dwell Time

Product : Bluetooth Module
 Test Item : Dwell Time
 Test Mode : Transmit-Bluetooth-1 Mbps (Channel 00, 39, 78)
 Test Date : 2022/12/27

Frequency (MHz)	Time slot length (ms)	Period (sec)	(calculation)	Dwell Time (ms)	Limit (ms)	Result
2402	2.913	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	310.724	400	Pass
2441	2.913	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	310.724	400	Pass
2480	2.942	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	313.817	400	Pass


Note: Dwell time = Time slot length * calculation

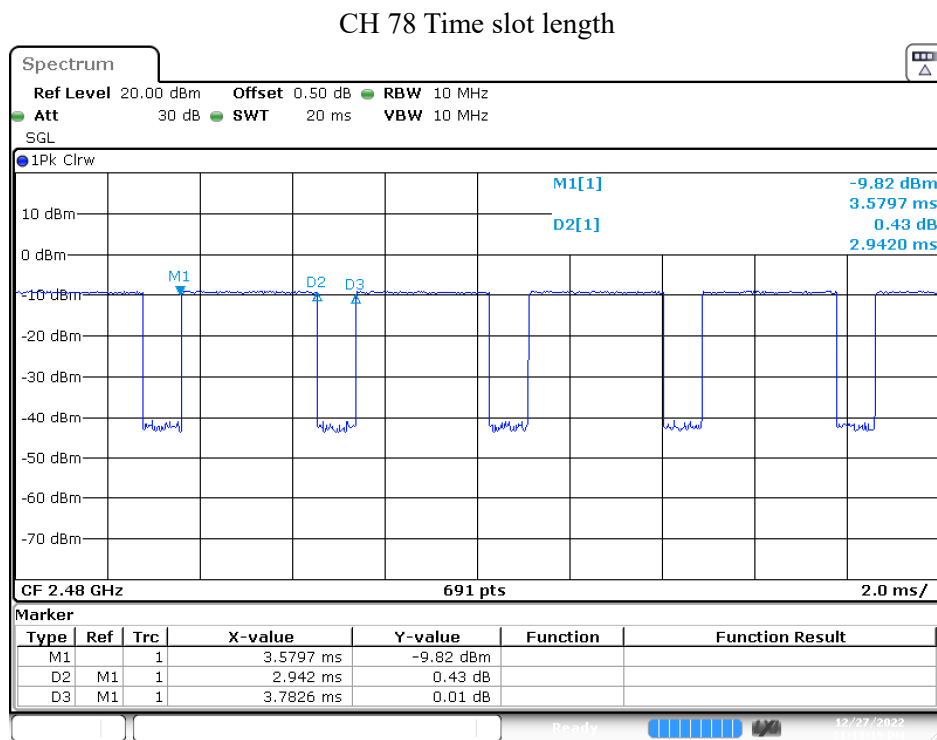

Product : Bluetooth Module
 Test Item : Dwell Time
 Test Mode : Transmit-Bluetooth-3 Mbps (Channel 00, 39, 78)
 Test Date : 2022/12/27

Frequency (MHz)	Time slot length (ms)	Period (sec)	(calculation)	Dwell Time (ms)	Limit (ms)	Result
2402	2.942	31.6	$\text{Time(sec)} \times (266.67/79) \times 31.6$	313.817	400	Pass
2441	2.913	31.6	$\text{Time(sec)} \times (266.67/79) \times 31.6$	310.724	400	Pass
2480	2.913	31.6	$\text{Time(sec)} \times (266.67/79) \times 31.6$	310.724	400	Pass


Note: Dwell time = Time slot length * calculation

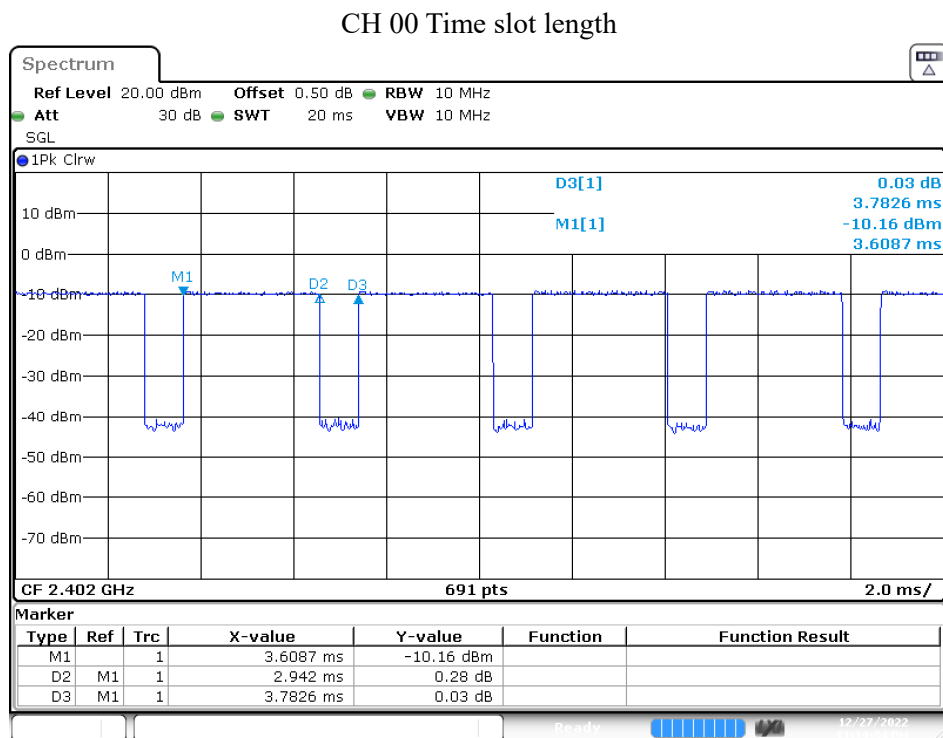

Date: 27.DEC.2022 23:14:34

10. Occupied Bandwidth

10.1. Test Setup

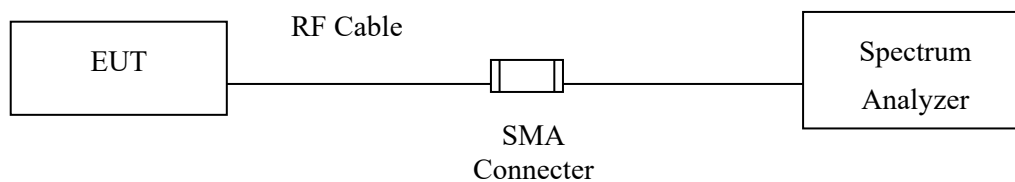

10.2. Limits

N/A

10.3. Test Procedure


Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

10.4. Test Result of Occupied Bandwidth

Product : Bluetooth Module
 Test Item : Occupied Bandwidth Data
 Test Mode : Transmit-Bluetooth-1 Mbps
 Test Date : 2022/12/05

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1048	--	NA
39	2441	1054	--	NA
78	2480	1057	--	NA

Figure Channel 78:

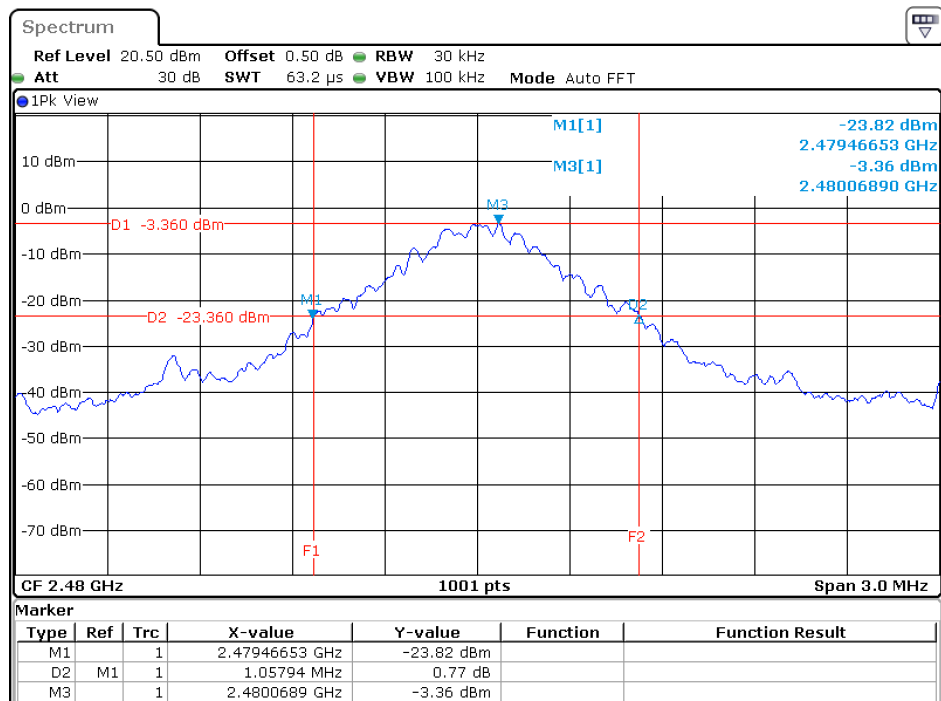


Date: 5.DEC.2022 08:52:38

Product : Bluetooth Module
 Test Item : Occupied Bandwidth Data
 Test Mode : Transmit-Bluetooth-3 Mbps
 Test Date : 2022/12/05

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1330	--	NA
39	2441	1333	--	NA
78	2480	1333	--	NA


Figure Channel 78:

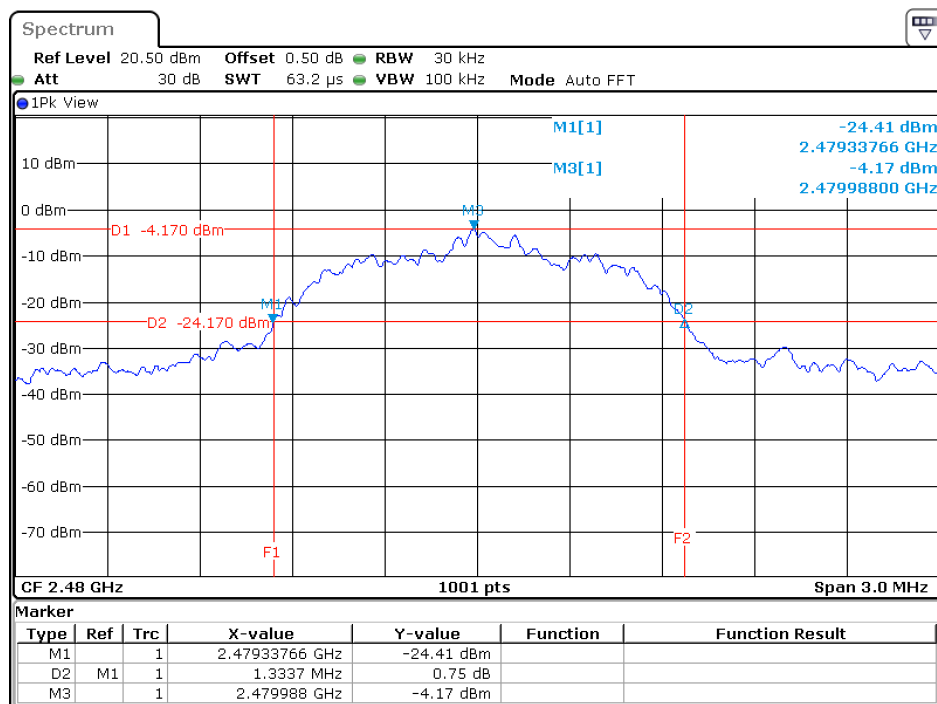

Date: 5.DEC.2022 09:29:33


11. Duty Cycle

11.1. Test Setup

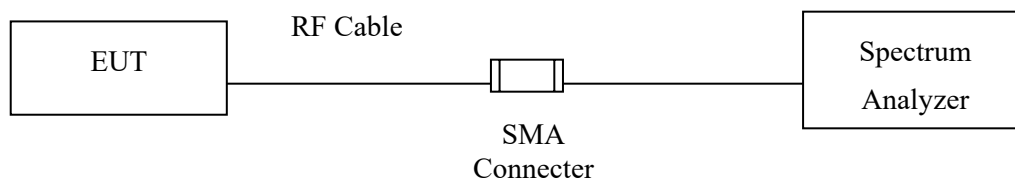

11.2. Test Result of Duty Cycle

Product : Bluetooth Module
 Test Item : Duty Cycle Data
 Test Mode : Transmit-Bluetooth-1 Mbps

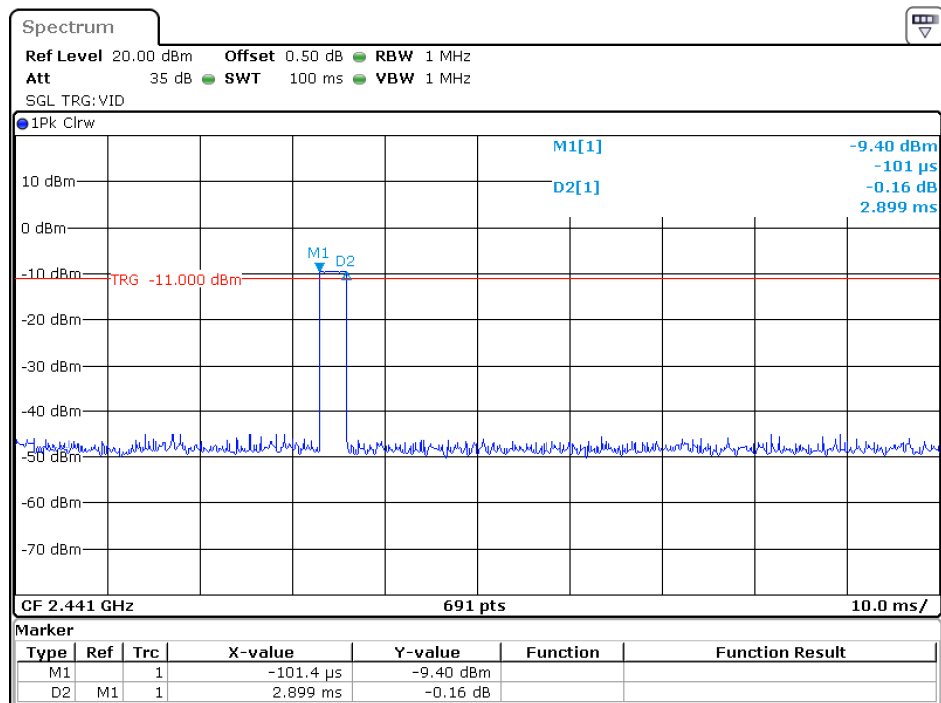

Date: 27.DEC.2022 11:25:36


Time on of 100ms = 2.899ms

Duty Cycle = 2.899ms / 100ms = 0.02899

Duty Cycle correction factor = 20 LOG 0.02899 = -30.755 dB

Duty Cycle correction factor	-30.755 dB
------------------------------	------------

Product : Bluetooth Module
 Test Item : Duty Cycle Data
 Test Mode : Transmit-Bluetooth-3 Mbps

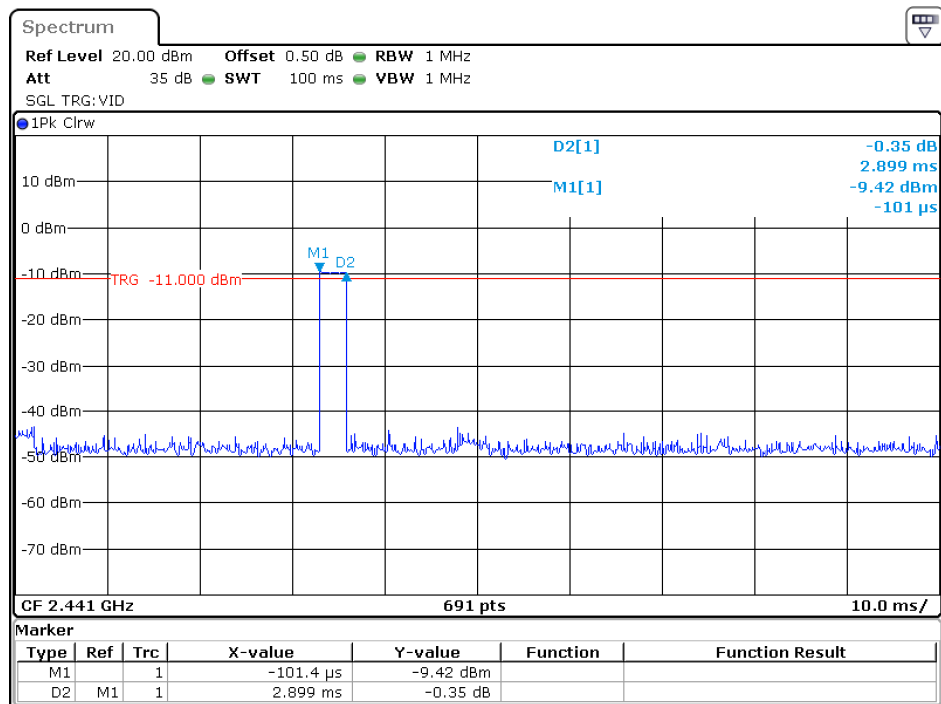

Date: 27.DEC.2022 11:24:12

Time on of 100ms = 2.899ms

Duty Cycle = 2.899ms / 100ms = 0.02899

Duty Cycle correction factor = 20 LOG 0.02899 = -30.755 dB

Duty Cycle correction factor	-30.755 dB
------------------------------	------------