

FCC PART 15 SUBPART C TEST REPORT

for

Electronic Swinghandle

Model No.: H3-EM-67-100-10

FCC ID: YKRH3EM67

of

Applicant: **Southco., Inc**

Address: 210 North Brinton Lake Road Concordville, Pennsylvania
19331-0116 United States

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600


Industry Canada filed test laboratory Reg. No. IC 5679A-1

A2LA Accredited No.: 2732.01



Report No.: W6M21303-13091-C-1


6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER.....	4
1.4	APPLICATION DETAILS	4
1.5	GENERAL INFORMATION OF TEST ITEM.....	4
1.6	TEST STANDARDS.....	4
2	TECHNICAL TEST.....	5
2.1	SUMMARY OF TEST RESULTS	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT LIST	6
2.4	GENERAL TEST PROCEDURE	8
3	TEST RESULTS (ENCLOSURE)	10
3.1	OUTPUT POWER (FIELD STRENGTH)	11
3.2	OUT OF BAND RADIATED EMISSIONS.....	13
3.4	OCCUPIED BANDWIDTH	19
3.5	FREQUENCY TOLERANCE	20
3.6	POWER LINE CONDUCTED EMISSION	21
	APPENDIX	24



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

April 16, 2013

Robert Ren

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

April 16, 2013


Danny Sung

Date

WTS

Name

Signature



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01


FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1



Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.
Accredited number: ./.
Street: ./.
Town: ./.
Country: ./.
Telephone: ./.
Fax: ./.



Registration number: W6M21303-13091-C-1

FCC ID: YKRH3EM67

1.3 Details of approval holder

Name: Southco,. Inc
Street: 210 North Brinton Lake Road
Town: Concordville, Pennsylvania 19331-0116
Country: United States
Telephone: 1 610-361-6098
Fax: 1 610-361-7100

1.4 Application details

Date of receipt of test item: March 27, 2013
Date of test: From March 27, 2013 to April 16, 2013

1.5 General information of Test item

Description of test item: Electronic Swinghandle
Type identification: H3-EM-67-100-10
Multi-listing model number: H3-EM-67-100,H3-EM-67-200-10,H3-EM-67-200,
H3-EM-67-300-10,H3-EM-67-300
Brand: Southco
Transmitting frequency: 13.56 MHz
Operation mode: duplex
Voltage supply: DC 10-30V
AC 110 V (from testing peripheral)

(If the device is using battery, please check if the device is tested under fresh battery condition.)

Antenna type: Loop antenna


Photos: see Annex

Manufacturer: (if applicable)

Name: ./.
Street: ./.
Town: ./.
Country: ./.
Additional information: ./.

1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART C § 15.225 (2011-10)



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

2 Technical test

2.1 Summary of test results


No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified in 3 were ascertained in the course of the tests performed.

2.2 Test environment

Temperature: 23 °C
Relative humidity content: 20 ... 75 %
Air pressure: 86 ... 103 kPa
Details of power supply: DC 10-30V
AC 110 V (from testing peripheral)
Extreme conditions parameters: /.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21303-13091-C-1

FCC ID: YKRH3EM67

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2012/9/5	2013/9/4
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2012/12/21	2013/12/20
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2013/3/4	2014/3/3
ETSTW-CE 007	SPECTRUM ANALYZER 5GHz	FSB	849670/001	R&S	Pre-test Use	
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2012/7/3	2013/7/2
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2012/9/5	2013/9/4
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2012/9/5	2013/9/4
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2012/10/12	2013/10/11
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2012/8/01	2013/7/31
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2013/3/4	2014/3/3
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2013/3/21	2014/3/20
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2013/3/4	2014/3/3
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2013/3/4	2014/3/3
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2013/3/4	2014/3/3
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2012/5/29	2013/5/28
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2013/3/4	2014/3/3
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2012/11/28	2013/11/27
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	EMCO	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2012/10/5	2013/10/4
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2012/10/12	2013/10/11
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2013/3/4	2014/3/3
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2012/12/4	2013/12/3
ETSTW-RE 111	TRILOG Super Broadband test Antenna	VULB 9160	9160-3309	Schwarz beck	2012/12/13	2013/12/12
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	None	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2013/1/11	2014/1/10
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21303-13091-C-1

FCC ID: YKRH3EM67

ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2012/7/3	2013/7/2
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2012/8/18	2013/8/17
ETSTW-RE 126	5GHz Notch filter	5NSL11-5800/E221.3-O/O	1	K&L Microwave	2012/8/18	2013/8/17
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2013/3/4	2014/3/3
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2012/10/5	2013/10/4
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40/12+9SS	3	WI	2013/1/11	2014/1/10
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2013/1/11	2014/1/10
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2013/1/11	2014/1/10
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2013/1/11	2014/1/10
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2012/9/18	2013/9/17
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2013/3/4	2014/3/3
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test Use NCR	
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2013/3/4	2014/3/3
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2013/3/4	2014/3/3
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2013/3/4	2014/3/3
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2013/3/4	2014/3/3
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2013/3/4	2014/3/3
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2013/3/26	2014/3/25
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2013/3/4	2014/3/3
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2013/3/4	2014/3/3
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2012/10/12	2013/10/11
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2012/10/12	2013/10/11
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2013/3/4	2014/3/3
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2012/11/28	2013/11/27
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2012/11/28	2013/11/27
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2012/11/28	2013/11/27
ETSTW-Cable 053	N TYPE To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2013/3/26	2014/3/25
ETSTW-Cable 054	BNC To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2013/3/26	2014/3/25
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS
33 20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2009 Section 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: **930600**.



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.4-2009 10.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.




Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Output Power Field Strength	15.225 (a) (b) (c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Out of Band Radiated Emissions	15.225 (d)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band Edge	15.225 (d)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Occupied Bandwidth	2.1049	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency Stability	15.225 (e)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207 (a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The following is intentionally left blank.



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

3.1 Output Power (Field Strength)

FCC Rules: 15.225 (a) (b) (c), 15.205, 15.209, 15.35
Operation within the band 13.110 - 14.010 MHz
Limit

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.


(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

10V


Measurement Results:

The field strength at 3 meter distance as 69.23 dB μ V/m. Extrapolated with 40dB to 30 meter distance it would be 29.23 dB μ V/m.

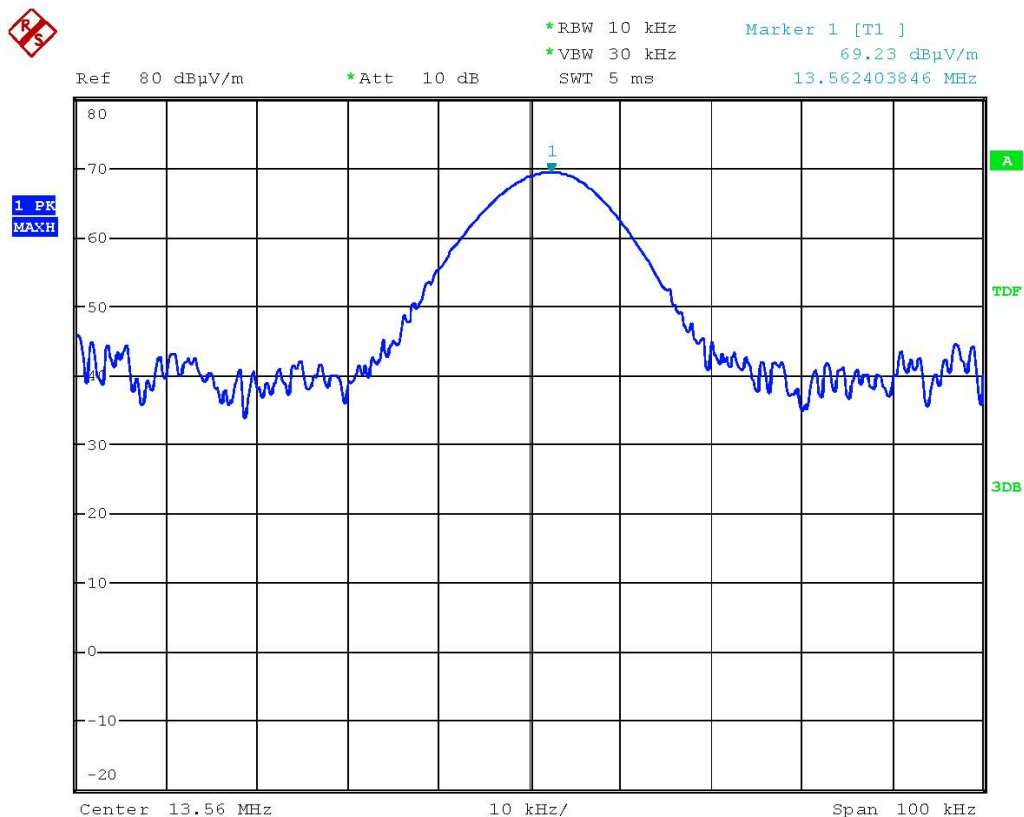

POWER 10V

Date: 27.MAR.2013 20:35:09




Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

30V

Measurement Results:


The field strength at 3 meter distance as 68.51 dB μ V/m. Extrapolated with 40dB to 30 meter distance it would be 28.51 dB μ V/m.

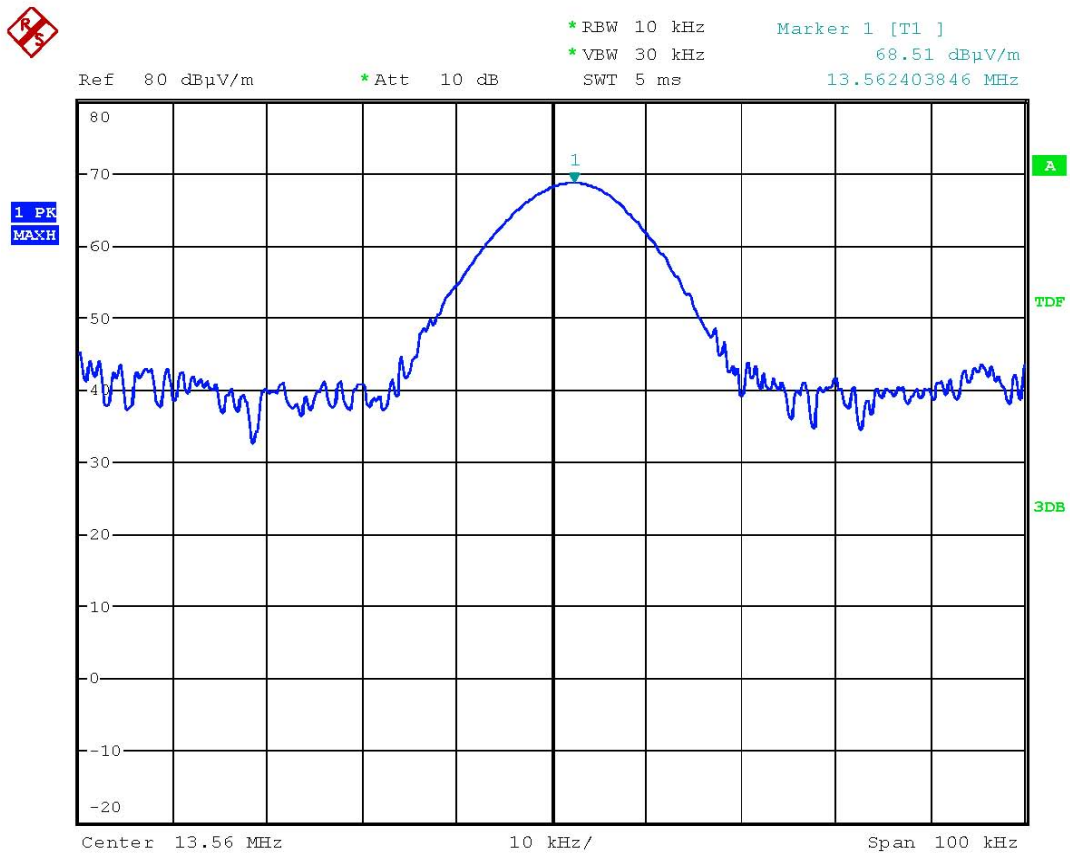

POWER 30V

Date: 27.MAR.2013 20:34:30

Test equipment used: ETSTW-RE 027, ETSTW-RE 055



Registration number: W6M21303-13091-C-1

FCC ID: YKRH3EM67

3.2 Out of Band Radiated Emissions

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequency of Emission (MHz)	Limit	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3


Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

Summary table with radiated data of the test plots


Operating: TX mode

For the frequency from 9 kHz to 30 MHz:

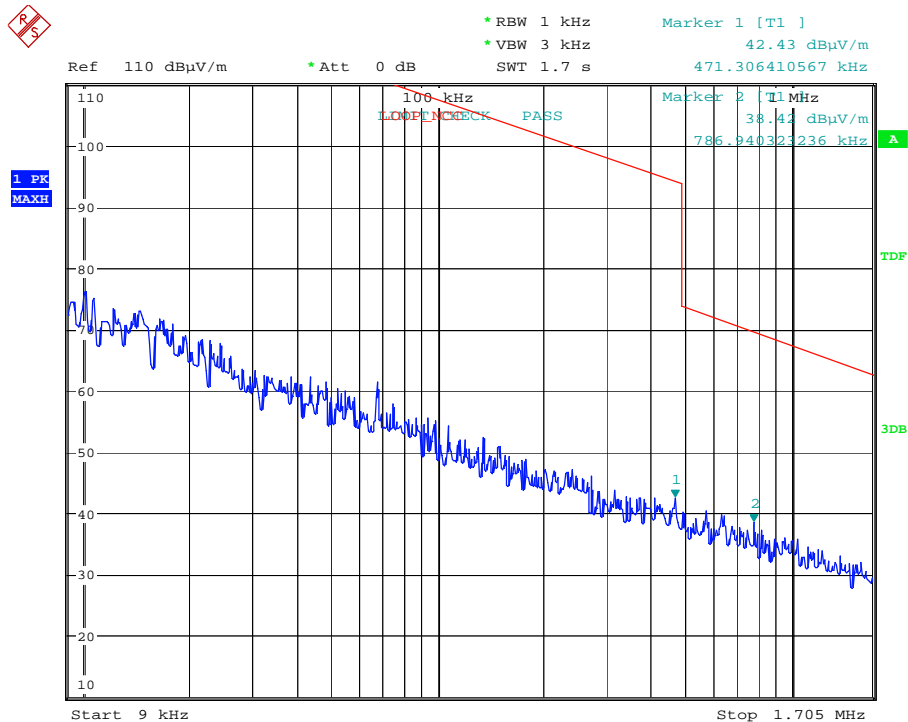


Radiated

Date: 27.MAR.2013 20:52:38



Registration number: W6M21303-13091-C-1
 FCC ID: YKRH3EM67

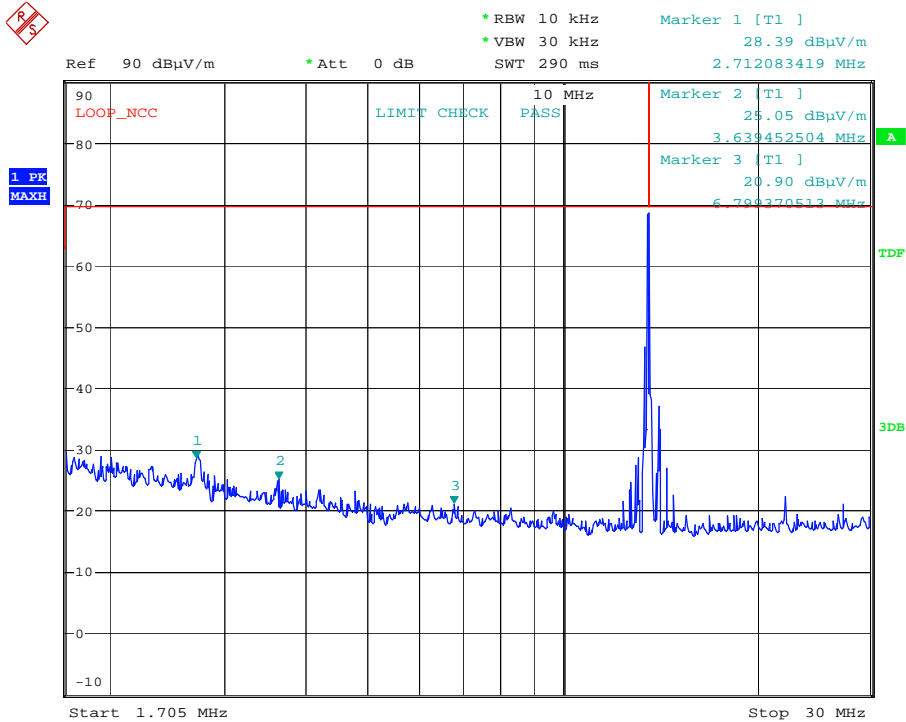


Radiated
 Date: 27.MAR.2013 20:54:57

For the frequency from 30 MHz to 1000 MHz:

Model: H3-EM-67-100-10 Date: 2013/4/15
 Mode: TX Temperature: 24 °C Engineer: Leon
 Polarization: Horizontal Humidity: 60 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
43.6071	2.88	peak	14.23	17.11	40.00	-22.89	135	100
133.0261	4.60	peak	14.52	19.12	43.50	-24.38	240	100
222.4448	2.89	peak	13.64	16.53	46.00	-29.47	265	100
368.2364	4.00	peak	17.63	21.63	46.00	-24.37	200	100
449.8797	3.68	peak	20.06	23.74	46.00	-22.26	140	100
638.4370	3.75	peak	23.50	27.25	46.00	-18.75	130	100




Registration number: W6M21303-13091-C-1
 FCC ID: YKRH3EM67

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
39.7194	3.57	peak	14.02	17.59	40.00	-22.41	115	100
150.5210	3.63	peak	15.29	18.92	43.50	-24.58	170	100
282.7053	3.38	peak	15.53	18.91	46.00	-27.09	320	100
397.3947	2.82	peak	18.52	21.34	46.00	-24.66	160	100
512.0842	3.96	peak	20.89	24.85	46.00	-21.15	250	100
620.9420	3.70	peak	23.35	27.05	46.00	-18.95	215	100


Operating: RX mode

For the frequency from 9 kHz to 30 MHz:

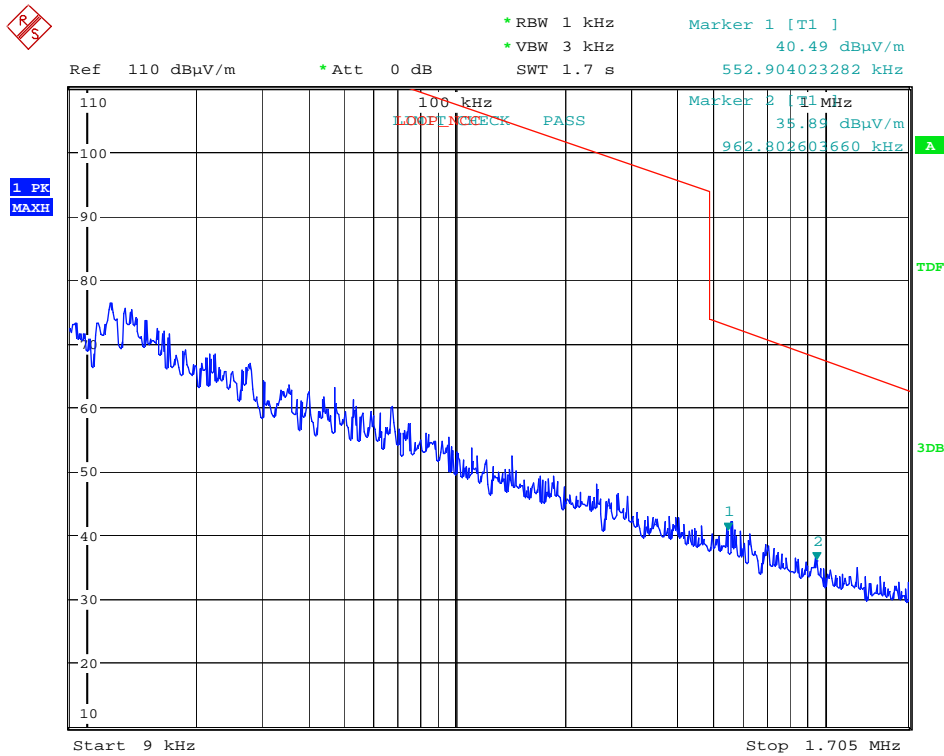


Radiated

Date: 27.MAR.2013 20:52:22



Registration number: W6M21303-13091-C-1
 FCC ID: YKRH3EM67

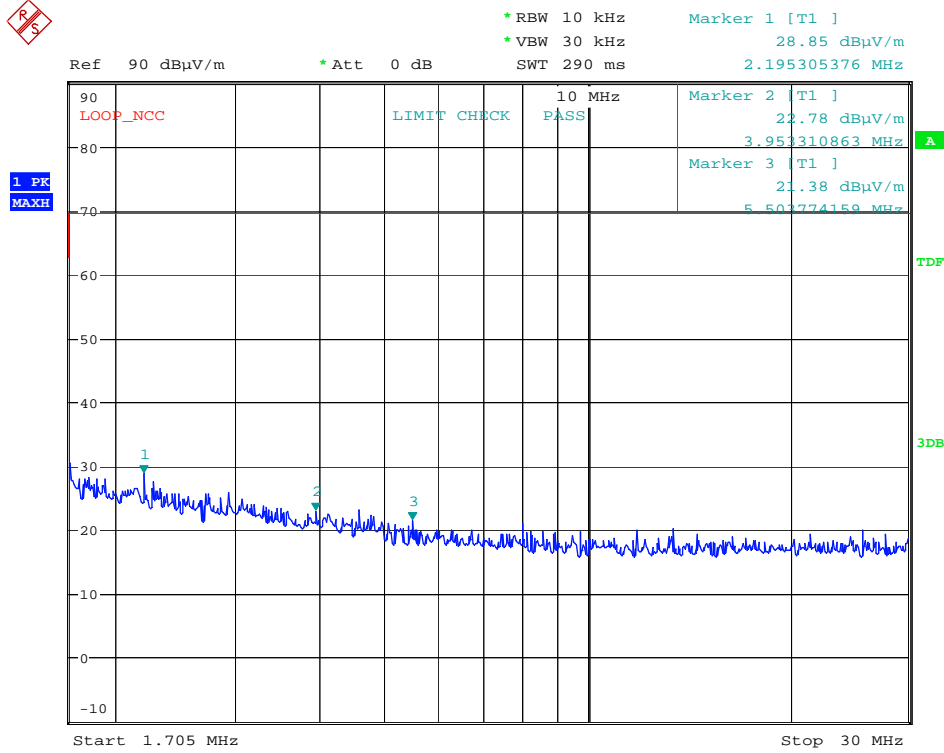


Radiated
 Date: 27.MAR.2013 20:54:29

For the frequency from 30 MHz to 1000 MHz:

Model: H3-EM-67-100-10 Date: 2013/4/15
 Mode: RX Temperature: 24 °C Engineer: Leon
 Polarization: Horizontal Humidity: 60 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
39.7194	4.25	peak	14.02	18.27	40.00	-21.73	120	100
140.8015	3.49	peak	15.06	18.55	43.50	-24.95	145	100
278.8176	3.28	peak	15.36	18.64	46.00	-27.36	160	100
411.0020	3.42	peak	18.92	22.34	46.00	-23.66	235	100
465.4310	3.85	peak	20.19	24.04	46.00	-21.96	210	100
630.6612	4.74	peak	23.43	28.17	46.00	-17.83	290	100



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

Polarization: Vertical


Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
39.7194	3.87	peak	14.02	17.89	40.00	-22.11	115	100
166.0721	3.31	peak	15.02	18.33	43.50	-25.17	120	100
306.0321	3.09	peak	16.07	19.16	46.00	-26.84	170	100
422.6653	4.04	peak	19.28	23.32	46.00	-22.68	350	100
508.1963	4.61	peak	20.81	25.42	46.00	-20.58	160	100
620.9420	3.89	peak	23.35	27.24	46.00	-18.76	240	100

Note

- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
- 2. The formula of measured value as: Test Result = Reading + Correction Factor**
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
- 5. Measurement uncertainty for 10m measurement: 0.009-30MHz \pm 6.67 dB**
Measurement uncertainty for 3m measurement: 30-1000 MHz : \pm 3.72 dB
; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. See attached diagrams for above 30MHz in appendix. For digital part of above 30 MHz, Please refer to test report no.: W6M21303-13091-P-15B.**


All other not noted test plots do not contain significant test results in relation to the limits
Test results: The unit meet the FCC requirements.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 111



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67


Test result of Band Edge:

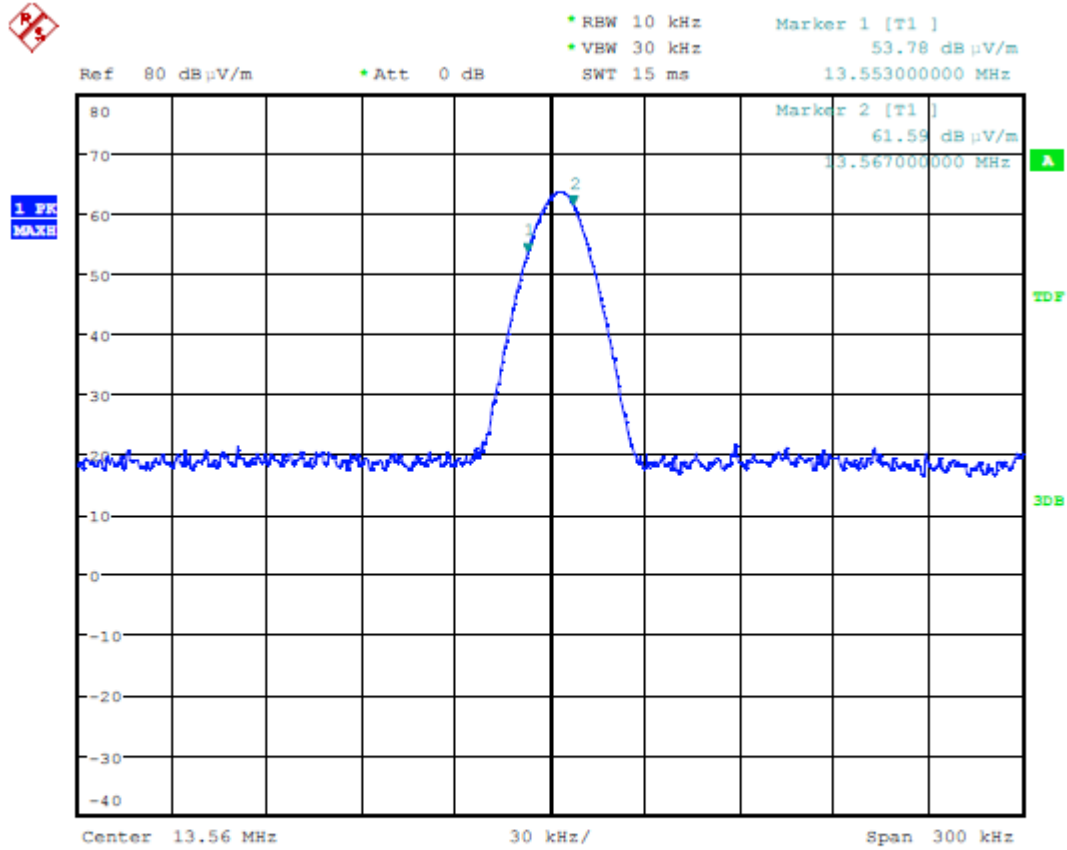

Bandedge


Date: 16.APR.2013 16:50:36

Test equipment used: ETSTW-RE 055




Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

3.4 Occupied Bandwidth

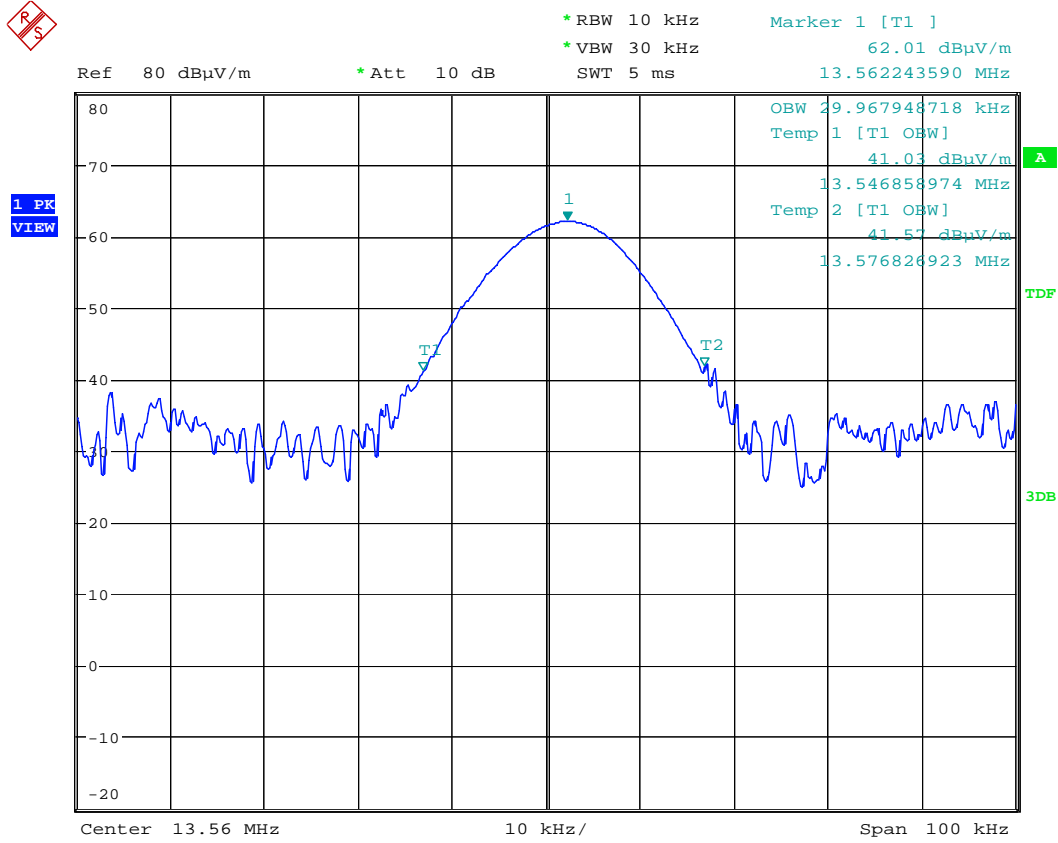

BANDWIDTH
Date: 27.MAR.2013 20:35:58

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

3.5 Frequency tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20°C to +50°C C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Measurement Results:

Temperature Degrees °C	Voltage	Frequency MHz	Frequency deviation kHz	Limit kHz (0.01%)
20°C	9	13.56272436	-0.032	1.356
20°C	11	13.56273641	-0.044	1.356
50°C	10	13.56267436	0.018	1.356
40°C	10	13.56267231	0.020	1.356
30°C	10	13.56266026	0.032	1.356
*20°C	10	13.56269231	0.000	1.356
10°C	10	13.56270833	-0.016	1.356
0°C	10	13.56269231	0.000	1.356
-10°C	10	13.56274039	-0.048	1.356
-20°C	10	13.56276032	-0.068	1.356

Test equipment used: ETSTW-RE 055, ETSTW-CE 009



Registration number: W6M21303-13091-C-1


FCC ID: YKRH3EM67

3.6 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.


This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dB μ V)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

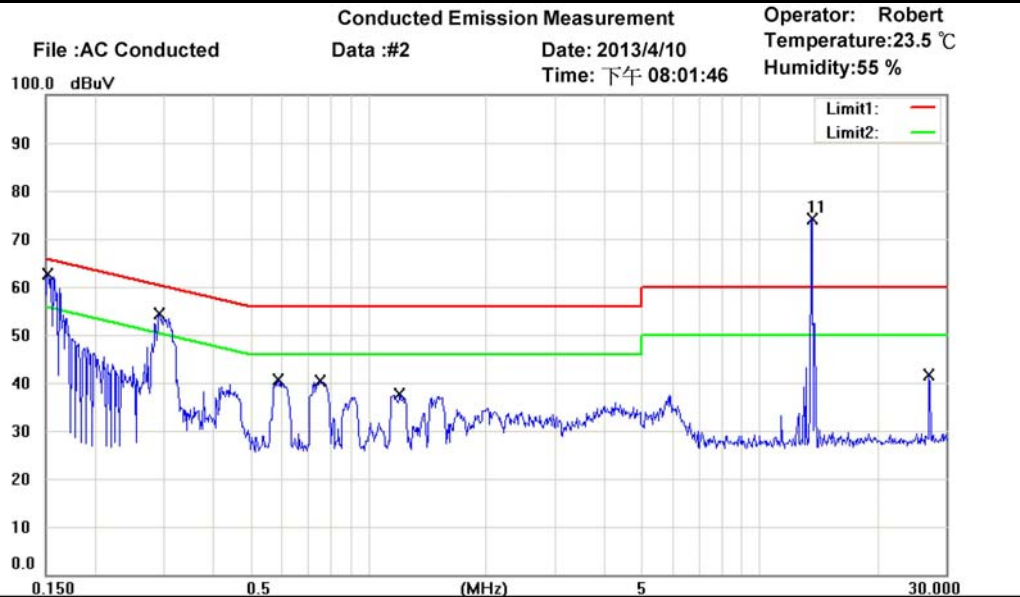


Site : Chamber_03
 Condition : FCC Part 15 Class B Conduction (QP)
 EUT : W6M21303-13091
 M/N: H3-EM-67-100-10
 Test Mode :
 Note :
 Phase: N
 Power : 110VAC

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1510	49.60	QP	10.12	59.72	65.94	-6.22	
	0.1510	34.82	AVG	10.12	44.94	55.94	-11.00	
	0.2912	40.39	QP	10.11	50.50	60.49	-9.99	
	0.2912	28.01	AVG	10.11	38.12	50.49	-12.37	
	0.5877	26.85	QP	10.12	36.97	56.00	-19.03	
	0.5877	12.69	AVG	10.12	22.81	46.00	-23.19	
	0.7542	27.49	QP	10.13	37.62	56.00	-18.38	
	0.7542	14.02	AVG	10.13	24.15	46.00	-21.85	
	1.2020	21.89	QP	10.15	32.04	56.00	-23.96	
	1.2020	5.38	AVG	10.15	15.53	46.00	-30.47	
*	13.5624	63.53	peak	10.70	74.23			Fundamental
	27.1250	28.32	QP	11.13	39.45	60.00	-20.55	
	27.1250	20.39	AVG	11.13	31.52	50.00	-18.48	



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21303-13091-C-1
 FCC ID: YKRH3EM67

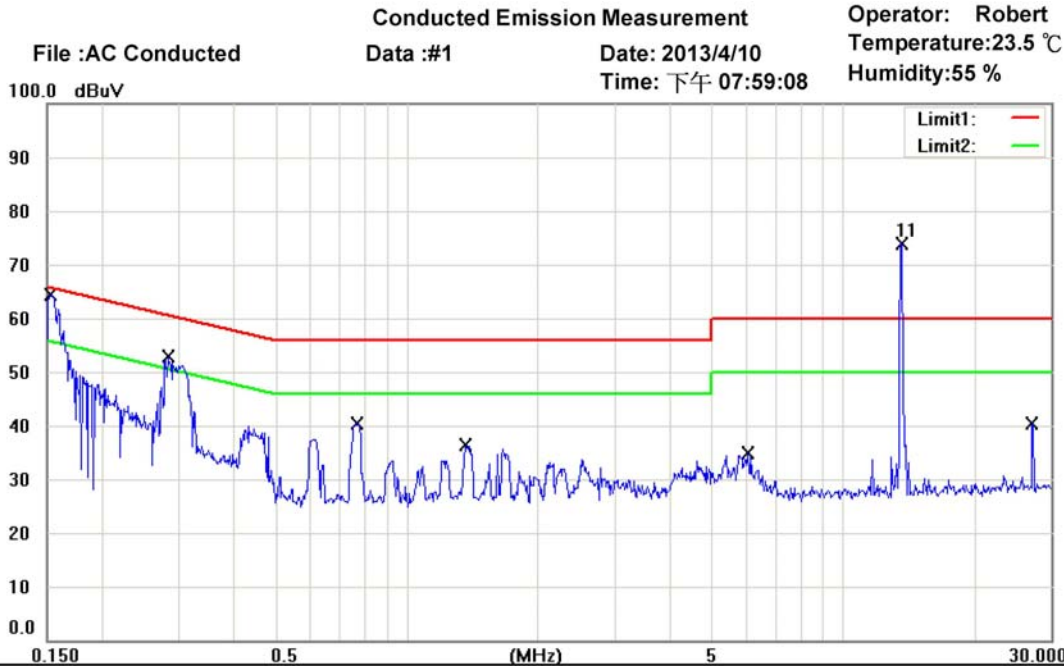

Site : Chamber_03
 Condition : FCC Part 15 Class B Conduction (QP) Phase: L1
 EUT : W6M21303-13091 Power : 110VAC
 M/N: H3-EM-67-100-10
 Test Mode :
 Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1520	51.66	QP	10.12	61.78	65.89	-4.11	
	0.1520	36.47	AVG	10.12	46.59	55.89	-9.30	
	0.2823	35.26	QP	10.10	45.36	60.75	-15.39	
	0.2823	20.31	AVG	10.10	30.41	50.75	-20.34	
	0.7700	26.37	QP	10.13	36.50	56.00	-19.50	
	0.7700	15.85	AVG	10.13	25.98	46.00	-20.02	
	1.3640	21.89	QP	10.16	32.05	56.00	-23.95	
	1.3640	8.05	AVG	10.16	18.21	46.00	-27.79	
	6.0500	15.73	QP	10.49	26.22	60.00	-33.78	
	6.0500	6.10	AVG	10.49	16.59	50.00	-33.41	
*	13.5624	63.04	peak	10.85	73.89			Fundamental
	27.1250	28.58	QP	11.41	39.99	60.00	-20.01	
	27.1250	20.61	AVG	11.41	32.02	50.00	-17.98	

- Note:**
- The formula of measured value as: Test Result = Reading + Correction Factor
 - The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
 - Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 - All not in the table noted test results are more than 20 dB below the relevant limits.
 - Measurement uncertainty = ±1.60 dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
 - Up Line: QP Limit Line, Down Line: Ave Limit Line.



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21303-13091-C-1

FCC ID: YKRH3EM67

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 004, ETSTW-CE 006 , ETSTW-RE 045




Registration number: W6M21303-13091-C-1
FCC ID: YKRH3EM67

Appendix

Measurement diagrams

Out of Band Radiated Emissions




Registration number: W6M21303-13091-C-1

FCC ID: YKRH3EM67


Out of Band Radiated Emission

TX mode (Above 30 MHz)

Antenna Polarization H

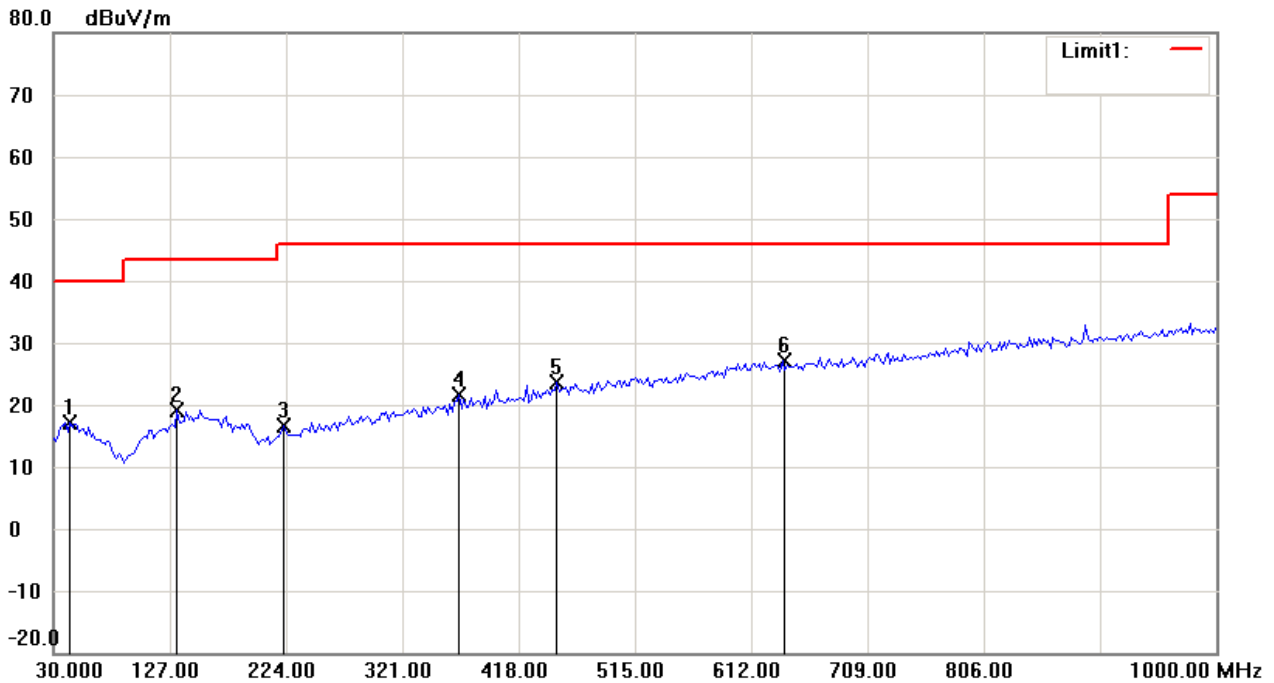

Antenna Polarization V

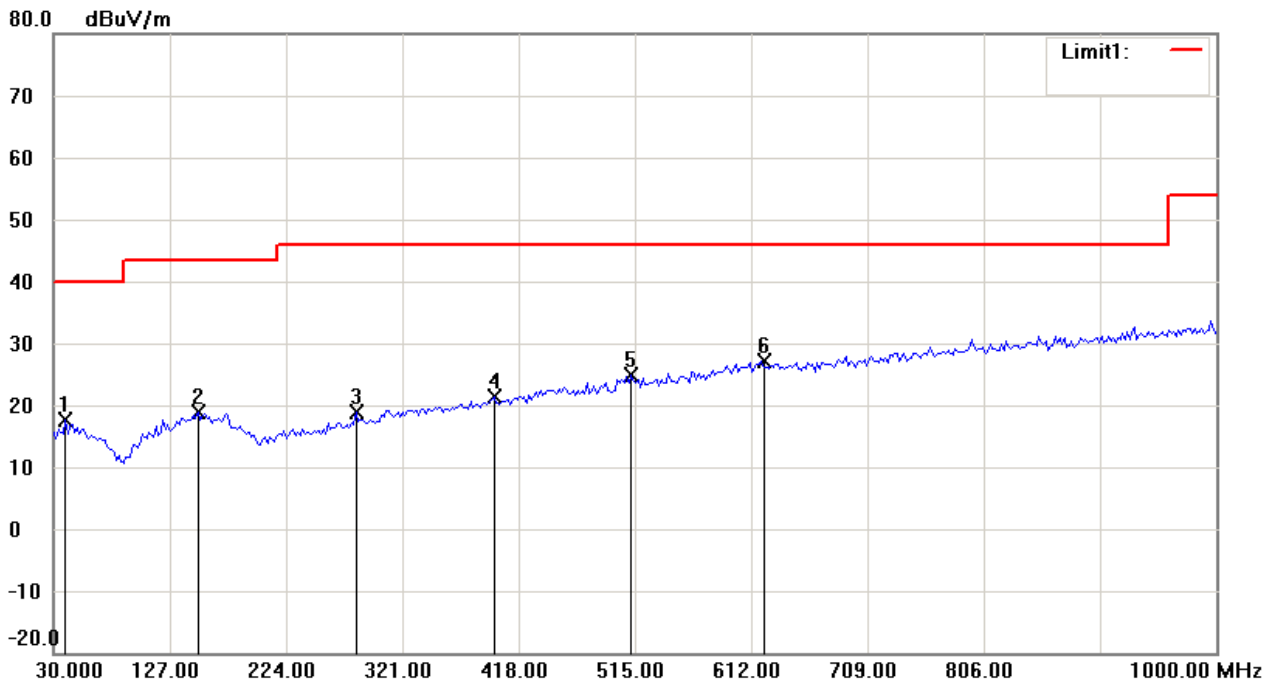

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21303-13091-C-1


FCC ID: YKRH3EM67

RX mode (Above 30 MHz)

Antenna Polarization H

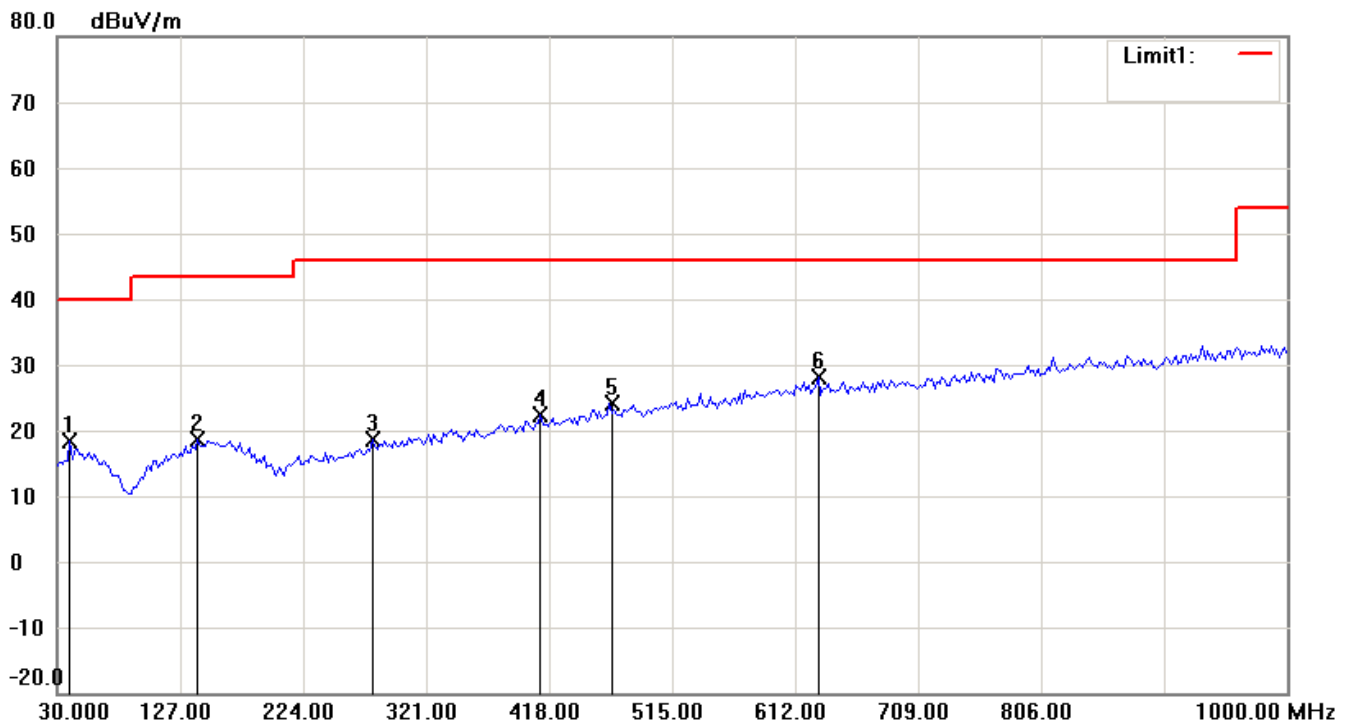

Antenna Polarization V

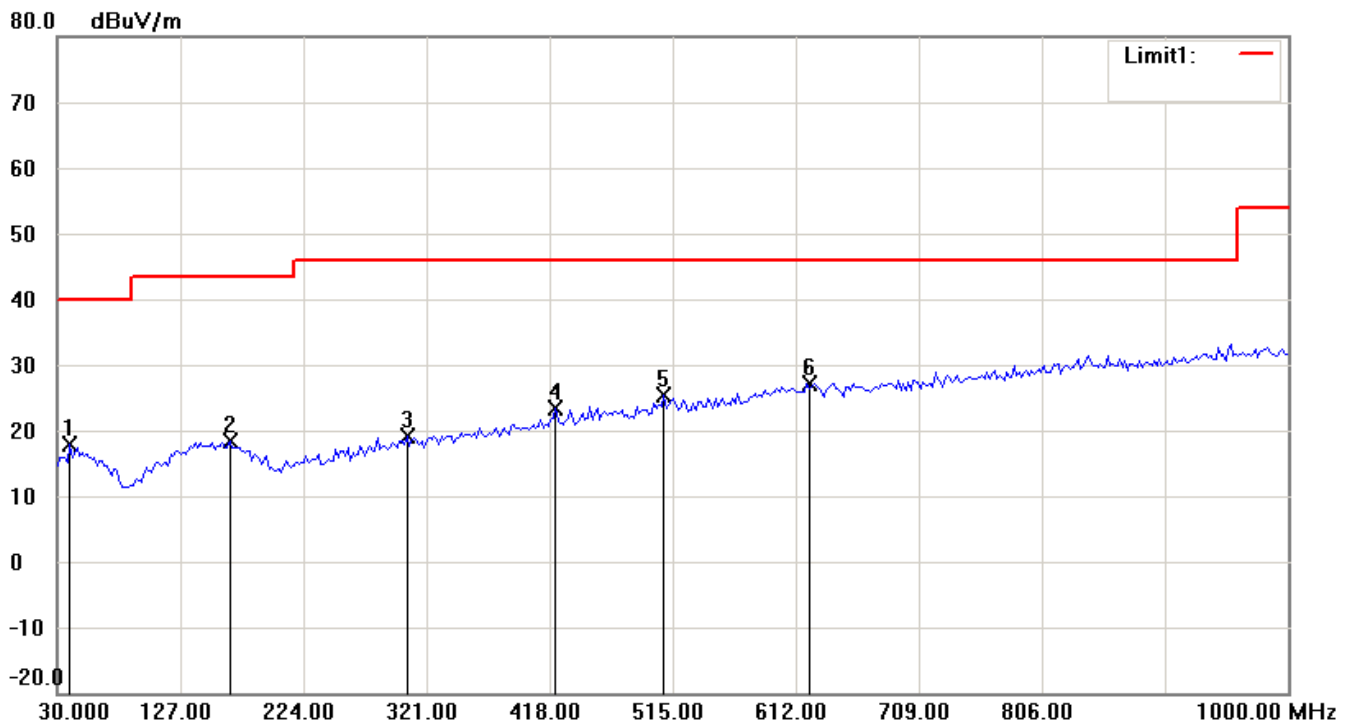

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.